

FCCTest Report

Report No.: HP190411KF01-FLE**FCC ID:** 2ASKIMD6972**Product Name** CD BOOMBOX with Bluetooth® Wireless Technology**Test Model:** MD6972**Series Model:** N/A**Received Date:** 2019-4-11**Test Date:** 2019-4-11~2019-4-29**Issued Date:** 2019-5-7**Applicant Name:** ANKANG COMATE TECH CO.,LTD**Applicant Address:** North end of Gaoxin No.7 Road, The High-Tech Industrial Zone, Ankang Shaanxi, ChinaC**Issued By:** Hwa-Hsing (Dongguan) Testing Co., Ltd.**Lab Address:** No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China**Test Location:** No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China**FCC Designation Number:** CN1255**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :**Date:** May05, 2019

Tank Tan//Engineer

Approved by :**Date:** May07, 2019

Harry Li/ Supervisor

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1. Summary of Test Results	5
1.2 Measurement Uncertainty	5
1.3 Modification Record	5
2. General Information	6
2.1 General Description of EUT	6
2.2 Description of Test Modes	7
2.3 Test Mode Applicability and Tested Channel Detail	8
2.4 Duty Cycle of Test Signal	9
2.5 Description of Support Units	10
2.6 Configuration of System under Test	10
2.7 General Description of Applied Standards	11
3. Test Types and Results	12
3.1 Radiated Emission and Bandedge Measurement	12
3.2 Limits of Radiated Emission and Bandedge Measurement	12
3.3 Test Instruments	13
3.4 Test Procedures	14
3.5 Deviation from Test Standard	14
3.6 Test Set Up	15
3.7 EUT Operating Conditions	16
3.8 Test Results	17
4. Conducted Emission Measurement	22
4.1 Limits of Conducted Emission Measurement	22
4.2 Test Instruments	22
4.3 Test Procedures	23
4.4 Deviation from Test Standard	23
4.5 TEST SETUP	23
4.6 EUT Operating Conditions	23
4.7 Test Results	24
5. 6dB Bandwidth Measurement	26
5.1 Limits of 6dB Bandwidth Measurement	26
5.2 Test Setup	26
5.3 Test Instruments	26
5.4 Test Procedure	26
5.5 Deviation from Test Standard	26
5.6 EUT Operating Conditions	26
5.7 Test Result	27
6. Occupied Bandwidth Measurement	28

6.1 Test Setup	28
6.2 Test Instruments	28
6.3 Test Procedure	28
6.4 Deviation from Test Standard	28
6.5 EUT Operating Conditions.....	28
6.6 Test Results	29
7. Conducted Output Power Measurement.....	30
7.1 Limits of Conducted Output Power Measurement.....	30
7.2 Test Setup	30
7.3 Test Instruments	30
7.4 Test Procedures.....	30
7.5 Deviation from Test Standard	30
7.6 EUT Operating Conditions.....	30
7.7 Test Results	30
8. Power Spectral Density Measurement	31
8.1 Limits of Power Spectral Density Measurement.....	31
8.2 Test Setup	31
8.3 Test Instruments	31
8.4 Test Procedure	31
8.5 Deviation from Test Standard	31
8.6 EUT Operating Condition	31
8.7 Test Results	32
9. Conducted Out of Band Emission Measurement.....	33
9.1 Limits of Conducted Out of Band Emission Measurement.....	33
9.2 Test Setup	33
9.3 Test Instruments	33
9.4 Test Procedure	33
9.5 Deviation from Test Standard	33
9.6 EUT Operating Condition	33
9.7 Test results.....	34
10. Pictures of Test Arrangements.....	37
10.1 Test instruments.....	37
Appendix – Information on the Testing Laboratories	38

Release Control Record

Issue No.	Description	Date Issued
HP190411KF01-FLE	Original Release	May 07, 2019

1. Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) ANSI C63.10:2013; KDB 558074 D01 15.247 Meas Guidance v05r02			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -23.80 dB at 0.4380MHz.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.51 dB at 7206.00MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used. The device is professionally installed

1.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUTas specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.62 dB

1.3 Modification Record

There were no modifications required for compliance.

2. General Information

2.1 General Description of EUT

Product Name	CD BOOMBOX with Bluetooth® Wireless Technology
Brand Name	N/A
Test Model	MD6972
Identification No. of EUT	N/A
Series Model	N/A
Model Difference	N/A
Status of EUT	Engineeringprototype
Power Supply Rating	120Vac/60Hz(host equipment) 12Vdc (Li-ion battery*8)
Modulation Type	GFSK
Transfer Rate	1 Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Output Power	0.612mW
Antenna Type	PCB antenna with-0.58dBi gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. Please refer to the EUT photo document (Reference No.:HP190411KF01) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

2.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.3 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Note: "-"means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0	GFSK	1

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0 to 39	GFSK	1

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1


Test Condition:

Applicable test items	Environmental Conditions	Input Power	Tested by
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Tank Tan
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Tank Tan
PLC	25 deg. C, 65 %RH	120Vac, 60Hz	Tank Tan
APCM	25 deg. C, 65 %RH	120Vac, 60Hz	Harry Li

2.4 DutyCycleof Test Signal

Duty cycle of test signal is 76.4 %, Duty cycle of test signal is < 98%

Duty cycle = $1.914/2.502 = 76.4$, Duty factor = $10 * \log(1/0.764) = 1.169$ Db

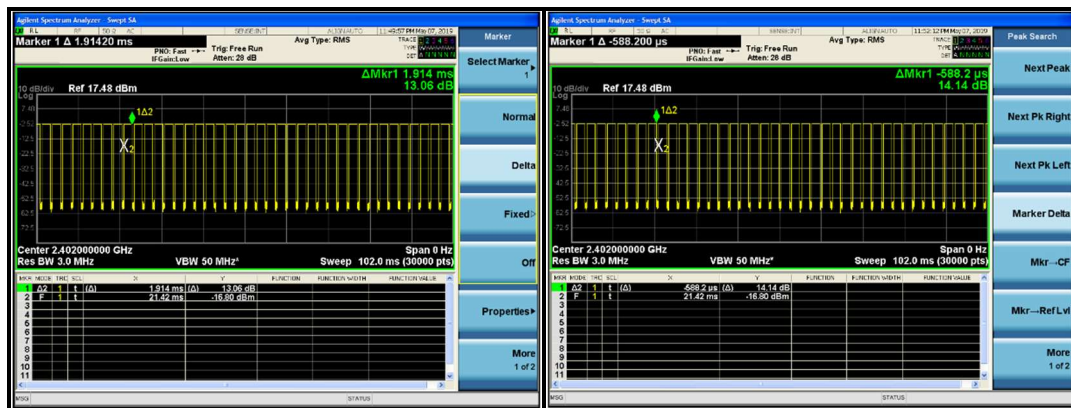

2.5 Description of Support Units



The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	Lenovo	E430	MP-0DN27	N/A
2.	N/A	N/A	N/A	N/A	N/A
3.	N/A	N/A	N/A	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	AC Line: Un-shieldin 1.5m
2.	/
3.	/

Note: -

2.6 Configuration of System under Test

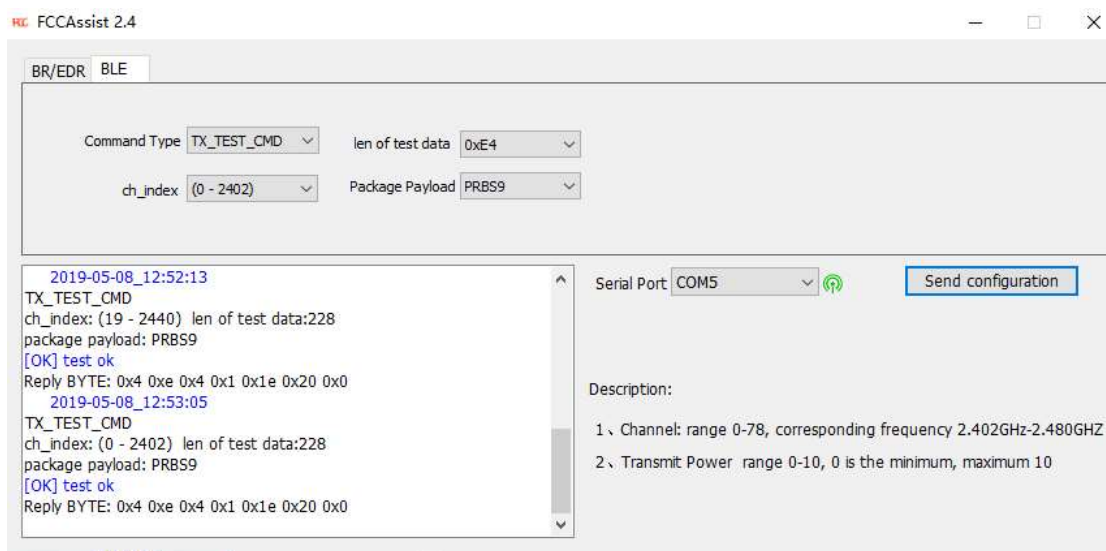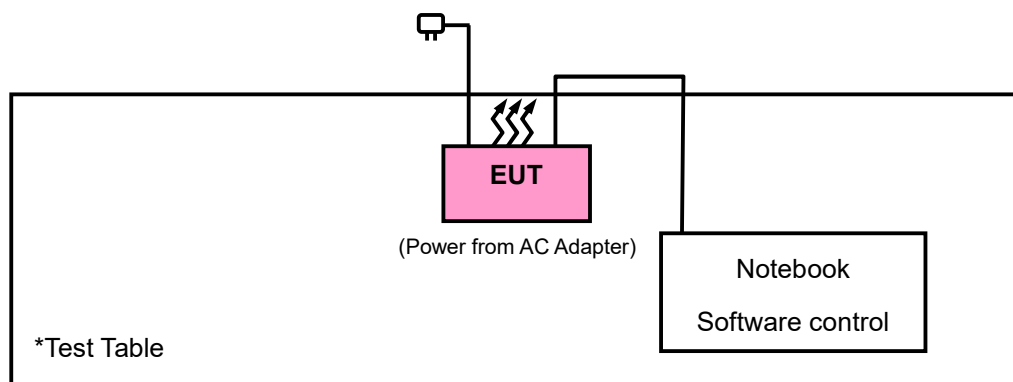

2.7 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note:The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

3. Test Types and Results

3.1 Radiated Emission and Bandedge Measurement

3.2 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESCI 7	100962	2018-7-16	2019-7-15
Broadband antenna Schwarzbeck	VULB 9168	00937	2018-11-18	2019-11-17
3m Semi-anechoic Chamber MAORUI	9m*6m*6m	NSEMC003	2018-10-20	2019-10-19
Signal Amplifier Com-power	PAM-103	18020051	2018-11-29	2019-11-28
Attenuator Rohde&Schwarz	TS2GA-6dB	18101101	N/A	N/A
Test software FARAD	FARAD	EZ_EMCV1.1.4.2	N/A	N/A
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	2018-10-17	2019-10-16
Loop Antenna	HLA 6121	45745	2018-10-19	2019-10-18
Preamplifier EMCI	EMC001340	980201	2017-10-22	2019-10-21
Digital Multimeter FLUKE	15B+	43512617WS	2018-11-10	2019-11-09
Horn Antenna Schwarzbeck	BBHA 9170	01959	2018-11-18	2019-11-17
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2018-12-11	2019-12-10
Broadband Coaxial Preamplifier Schwarzbeck	BBV 9718	00025	2018-10-29	2019-10-28
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170242	2018-/5-5	2019-5-4
Pre-Amplifier EMCI	EMC 184045	980102	2018-11-20	2019-11-19
Spectrum Keysight	N9020A	MY51240612	2018-10-29	2019-10-28
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower&Turn Table Controller MF	MF-7802	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.

2. The test was performed in Chamber 1.

3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.5 Deviationfrom Test Standard


No deviation.

3.6 Test Set Up


Radiated emission below 30MHz:

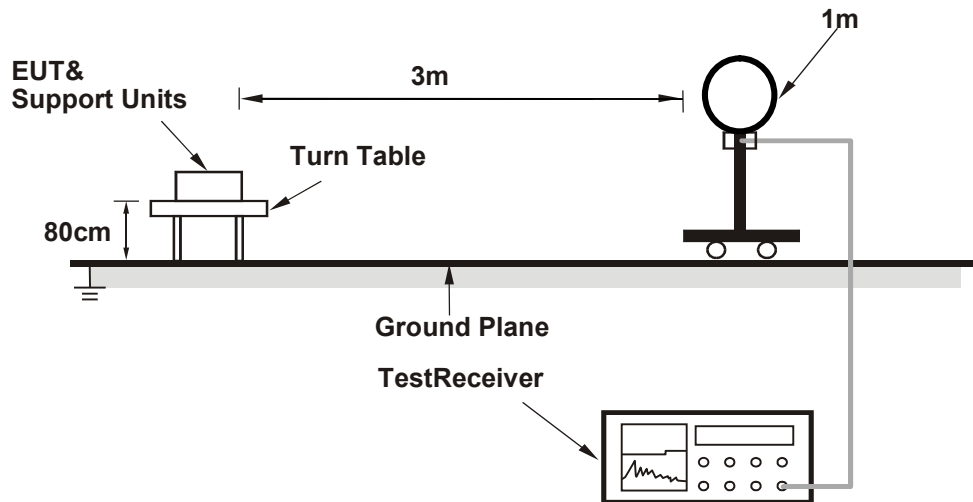

Frequency Range below 1GHz:

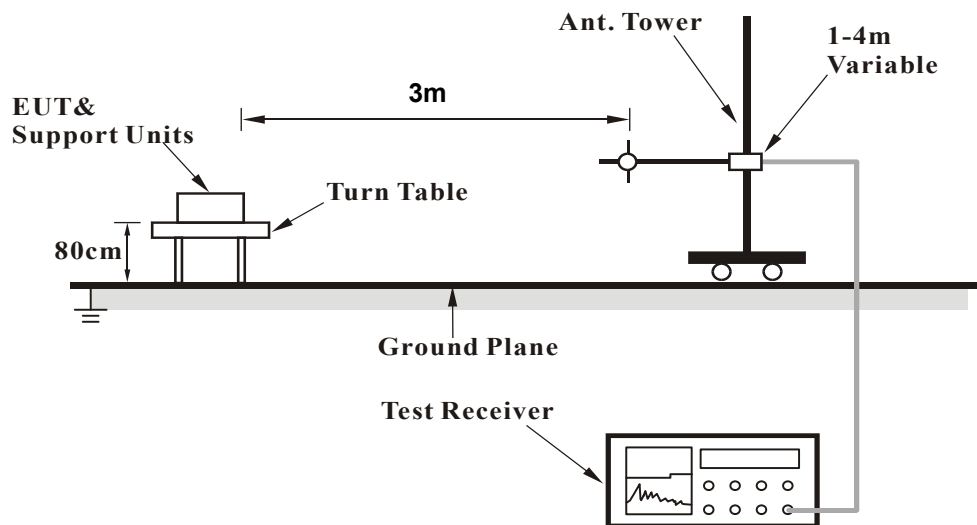

Frequency Range above 1GHz:

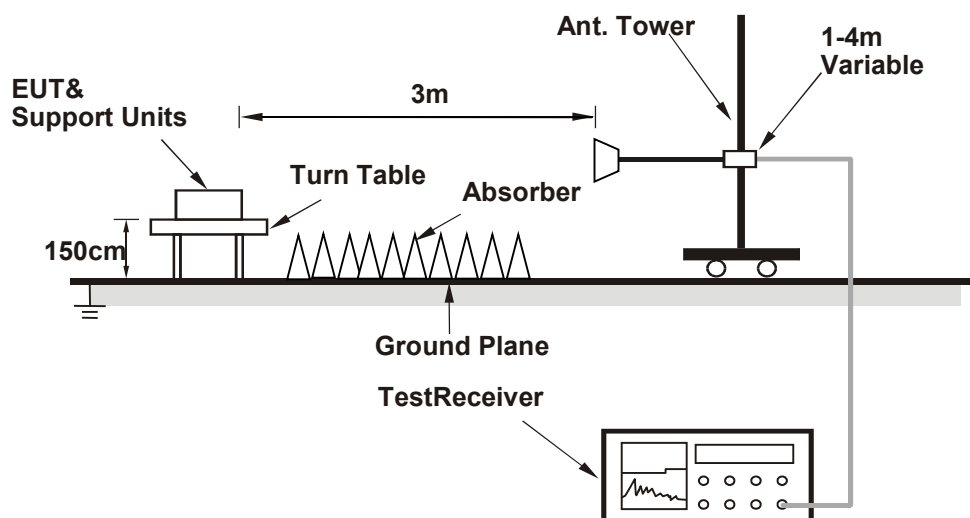

Directional antenna.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.7 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

3.8 Test Results

Above 1GHz Data:

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Input Power	120Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25deg. C, 65%RH	Tested By	Tank tan

Antennal Polarity&TestDistance: Horizontal at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2390.000	40.40	-0.77	39.63	74.00	-34.37	peak	100	253	
2	2390.000	39.89	-0.77	39.12	54.00	-14.88	AVG	100	253	
3 *	2402.000	94.56	-0.75	93.81			peak	100	253	
4 *	2402.000	94.54	-0.75	93.79			AVG	100	253	
5	4804.000	43.63	5.36	48.99	74.00	-25.01	peak	100	185	
6	4804.000	43.16	5.36	48.52	54.00	-5.48	AVG	100	185	
7	7206.000	41.42	11.75	53.17	74.00	-20.83	peak	100	203	
8	7206.000	38.48	11.75	50.23	54.00	-3.77	AVG	100	203	
Antennal Polarity&TestDistance: Vertical at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	2390.000	41.31	-0.77	40.54	74.00	-33.46	peak	100	253	
2	2390.000	40.53	-0.77	39.76	54.00	-14.24	AVG	100	253	
3 *	2402.000	93.14	-0.75	92.39			peak	100	253	
4 *	2402.000	92.90	-0.75	92.15			AVG	100	253	
5	4804.000	43.85	5.36	49.21	74.00	-24.79	peak	100	160	
6	4804.000	43.66	5.36	49.02	54.00	-4.98	AVG	100	160	
7	7206.000	41.48	11.75	53.23	74.00	-20.77	peak	100	327	
8	7206.000	38.74	11.75	50.49	54.00	-3.51	AVG	100	327	Worst

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- 2402MHz: Fundamental frequency.

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Input Power	120Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25deg. C, 65%RH	Tested By	Tank tan

Antennal Polarity&TestDistance: Horizontal at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1 *	2440.000	94.36	-0.64	93.72			peak	117	264	
2 *	2440.000	85.92	-0.64	85.28			AVG	117	264	
3	4880.000	41.49	6.24	47.73	74.00	-26.27	peak	100	190	
4	4880.000	28.85	6.24	35.09	54.00	-18.91	AVG	100	190	
5	7320.000	42.57	12.13	54.70	74.00	-19.30	peak	100	40	
6	7320.000	27.64	12.13	39.77	54.00	-14.23	AVG	100	40	
Antennal Polarity&TestDistance: Vertical at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1 *	2440.000	94.33	-0.64	93.69			peak	100	216	
2 *	2440.000	93.66	-0.64	93.02			AVG	100	216	
3	4880.000	40.71	6.24	46.95	74.00	-27.05	peak	100	310	
4	4880.000	28.87	6.24	35.11	54.00	-18.89	AVG	100	310	
5	7320.000	42.15	12.13	54.28	74.00	-19.72	peak	100	360	
6	7320.000	27.61	12.13	39.74	54.00	-14.26	AVG	100	360	

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- 2440MHz: Fundamental frequency.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Input Power	120Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25deg. C, 65%RH	Tested By	Tank tan

Antennal Polarity&TestDistance: Horizontal at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1*	2480.000	95.94	-0.52	95.42			peak	275	215	
2 *	2480.000	87.79	-0.52	87.27			AVG	275	215	
3	2483.500	46.26	-0.51	45.75	74.00	-28.25	peak	275	215	
4	2483.500	43.50	-0.51	42.99	54.00	-11.01	AVG	275	215	
5	4960.000	40.68	6.09	46.77	74.00	-27.23	peak	100	28	
6	4960.000	27.42	6.09	33.51	54.00	-20.49	AVG	100	28	
7	7440.000	39.99	12.53	52.52	74.00	-21.48	peak	100	196	
8	7440.000	26.95	12.53	39.48	54.00	-14.52	AVG	100	196	
Antennal Polarity&TestDistance: Vertical at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1 *	2480.000	94.48	-0.52	93.96			peak	100	219	
2 *	2480.000	85.96	-0.52	85.44			AVG	100	219	
3	2483.500	51.85	-0.51	51.34	74.00	-22.66	peak	100	219	
4	2483.500	41.53	-0.51	41.02	54.00	-12.98	AVG	100	219	
5	4960.000	40.01	6.09	46.10	74.00	-27.90	peak	100	330	
6	4960.000	27.44	6.09	33.53	54.00	-20.47	AVG	100	330	
7	7440.000	40.54	12.53	53.07	74.00	-20.93	peak	100	240	
8	7440.000	26.98	12.53	39.51	54.00	-14.49	AVG	100	240	

Remarks:


- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- 2480MHz: Fundamental frequency.

9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

30MHz ~ 1GHz Worst-Case Data:


EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Input Power	120Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25deg. C, 65%RH	Tested By	Tank tan

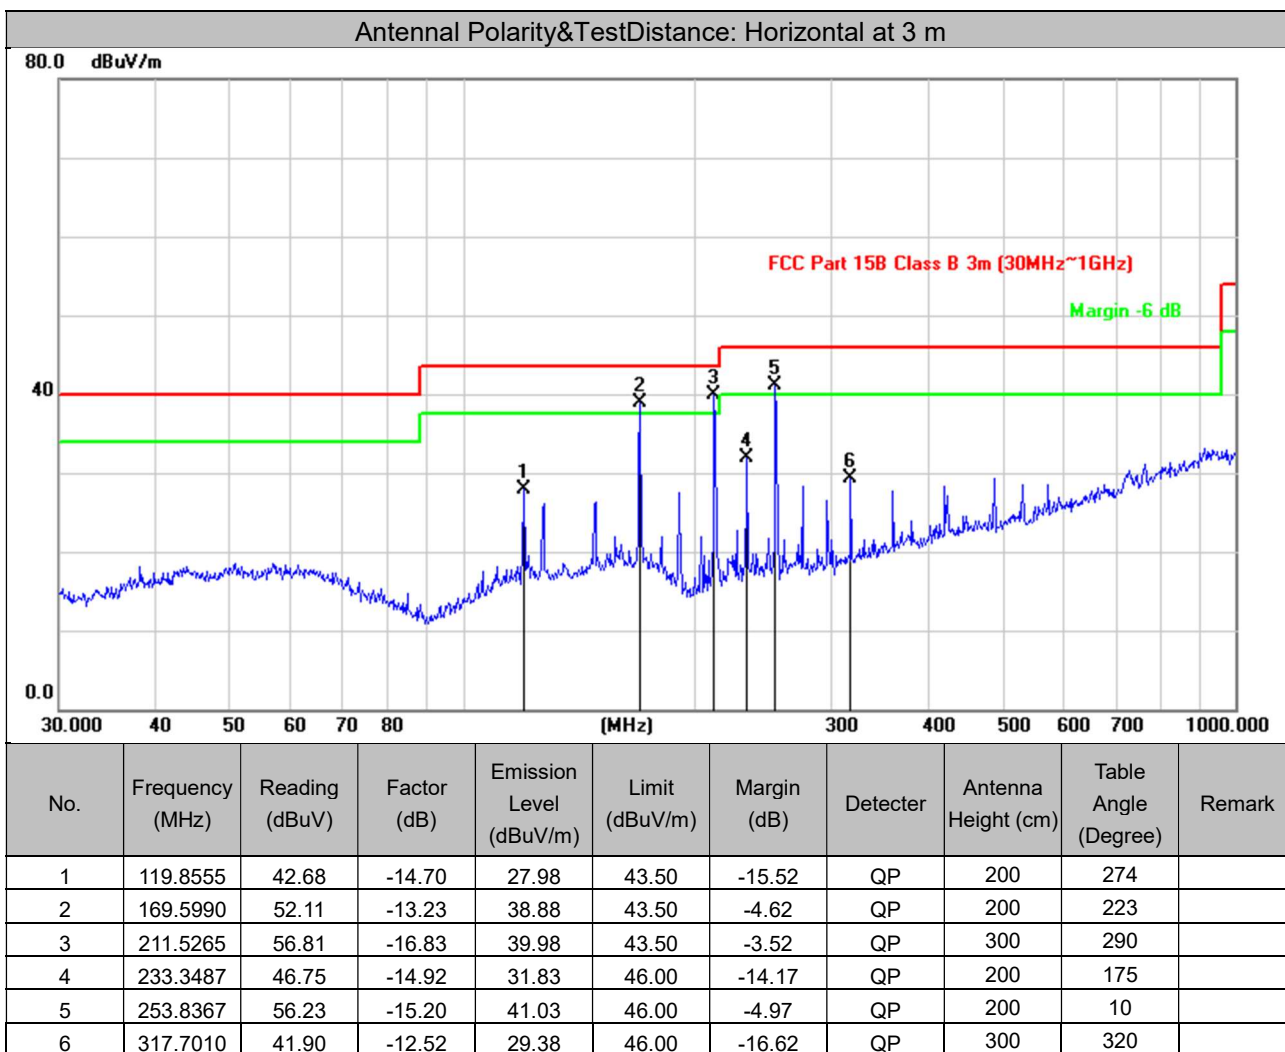

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Input Power	120Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25deg. C, 65%RH	Tested By	Tank Tan

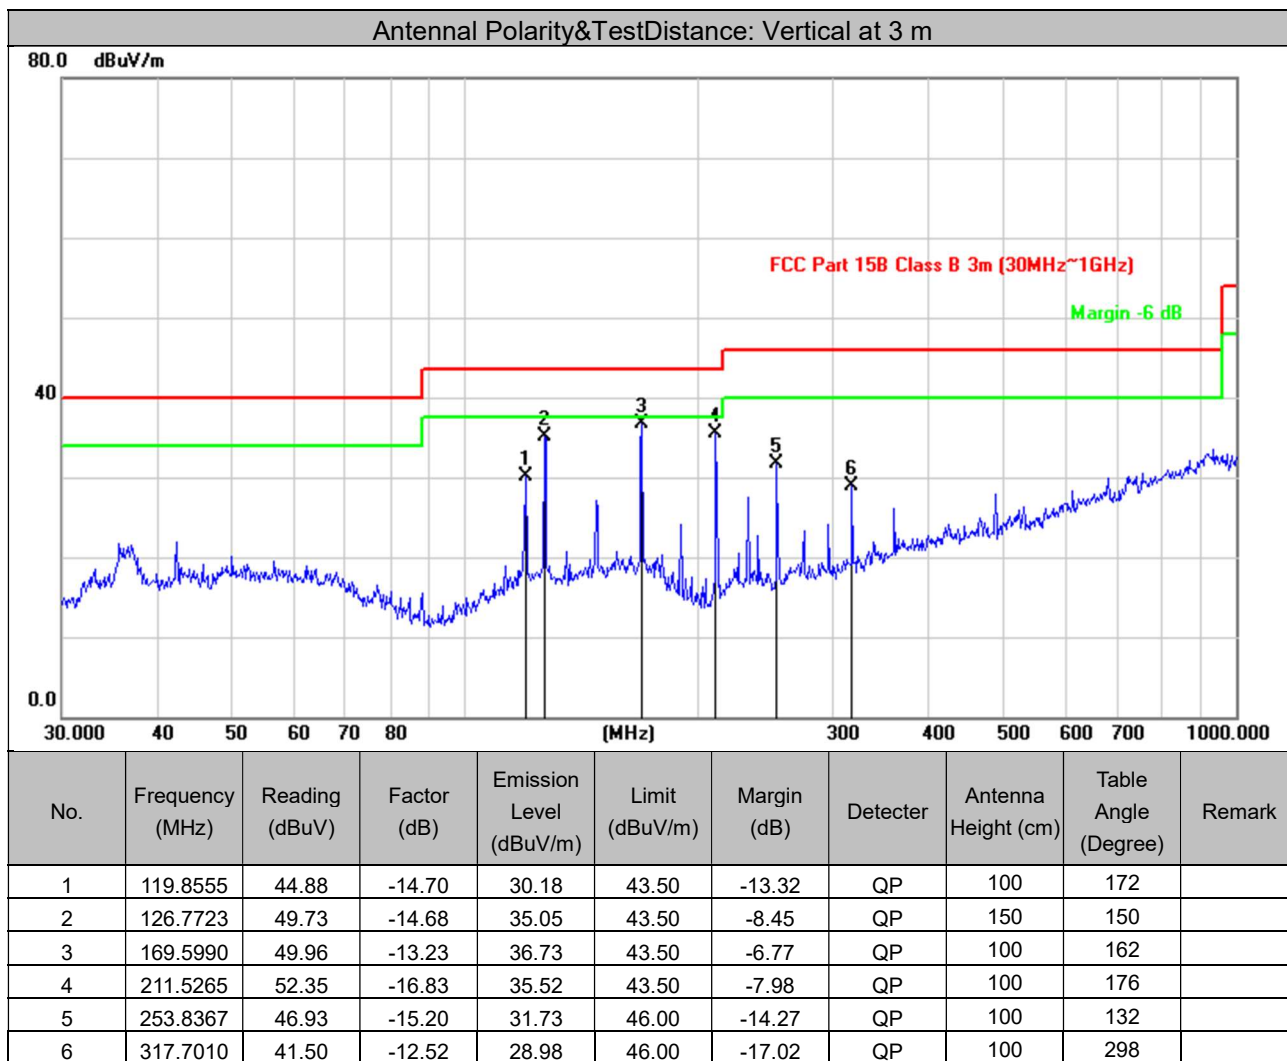

4. Conducted Emission Measurement

4.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESCI3	101418	2019-1-5	2020-1-4
Artificial Mains Network Rohde&Schwarz	ENV216	3560.6550.15	2018-11-12	2019-11-11
Test software FARAD	EZ_EMCC V1.1.4.2	N/A	N/A	N/A
Hygrothermograph Yuhuaze	HTC-1	NA	2018-10-30	2019-10-29
Digital Multimeter FLUKE	15B+	43512617WS	2018-11-10	2019-11-09

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.

2. The test was performed in Shielded Room 1.

4.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

4.4 Deviation from Test Standard

No deviation.

4.5 TEST SETUP

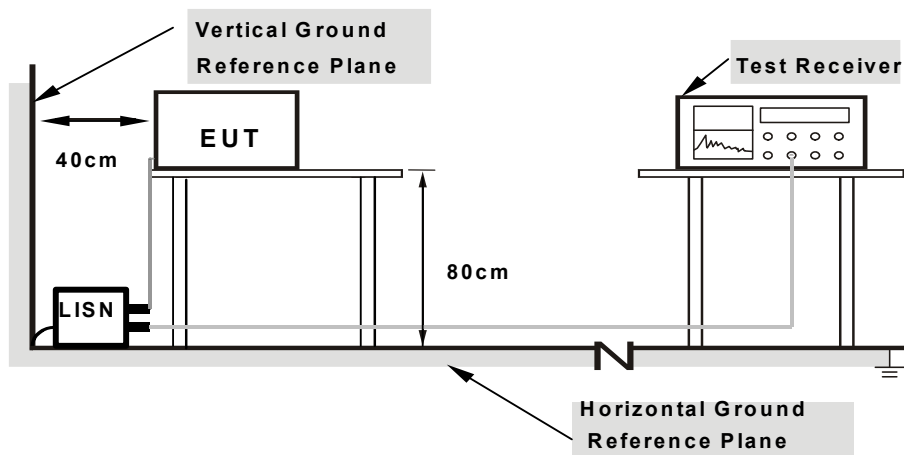

- Note:** 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.7 Test Results

CONDUCTED WORST-CASE DATA


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 60%RH
Tested by	Tank Tan	Test Date	2019/4/15

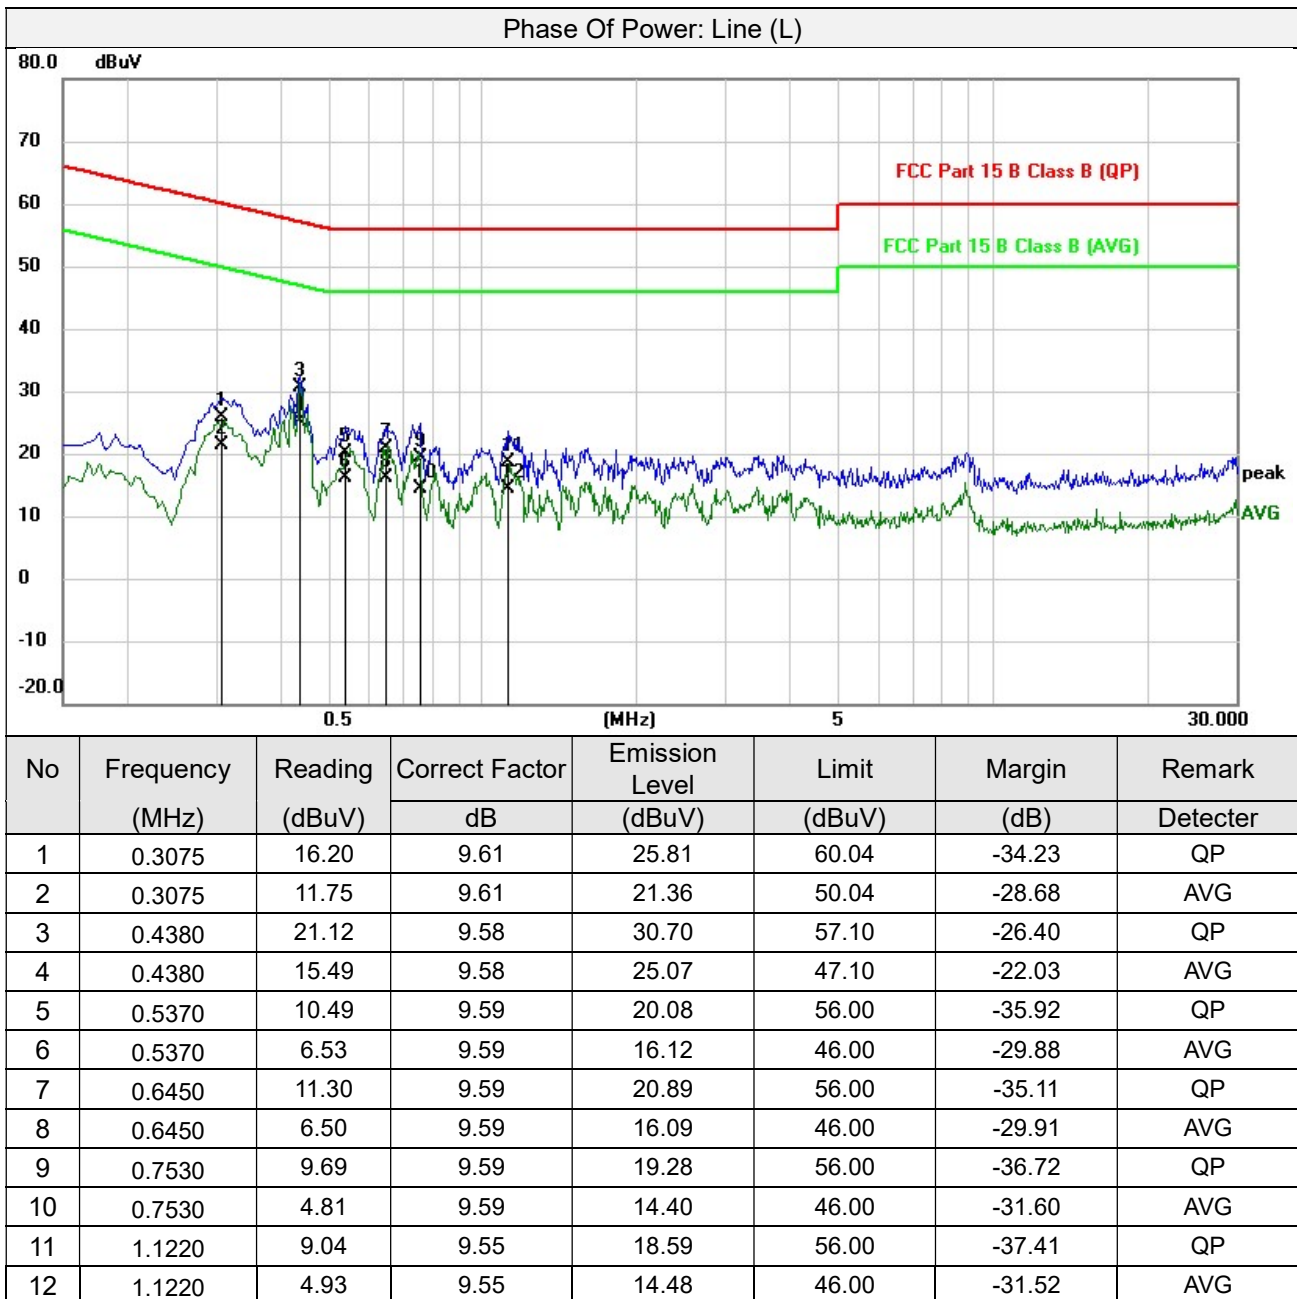

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 60%RH
Tested by	Tank Tan	Test Date	2019/4/15

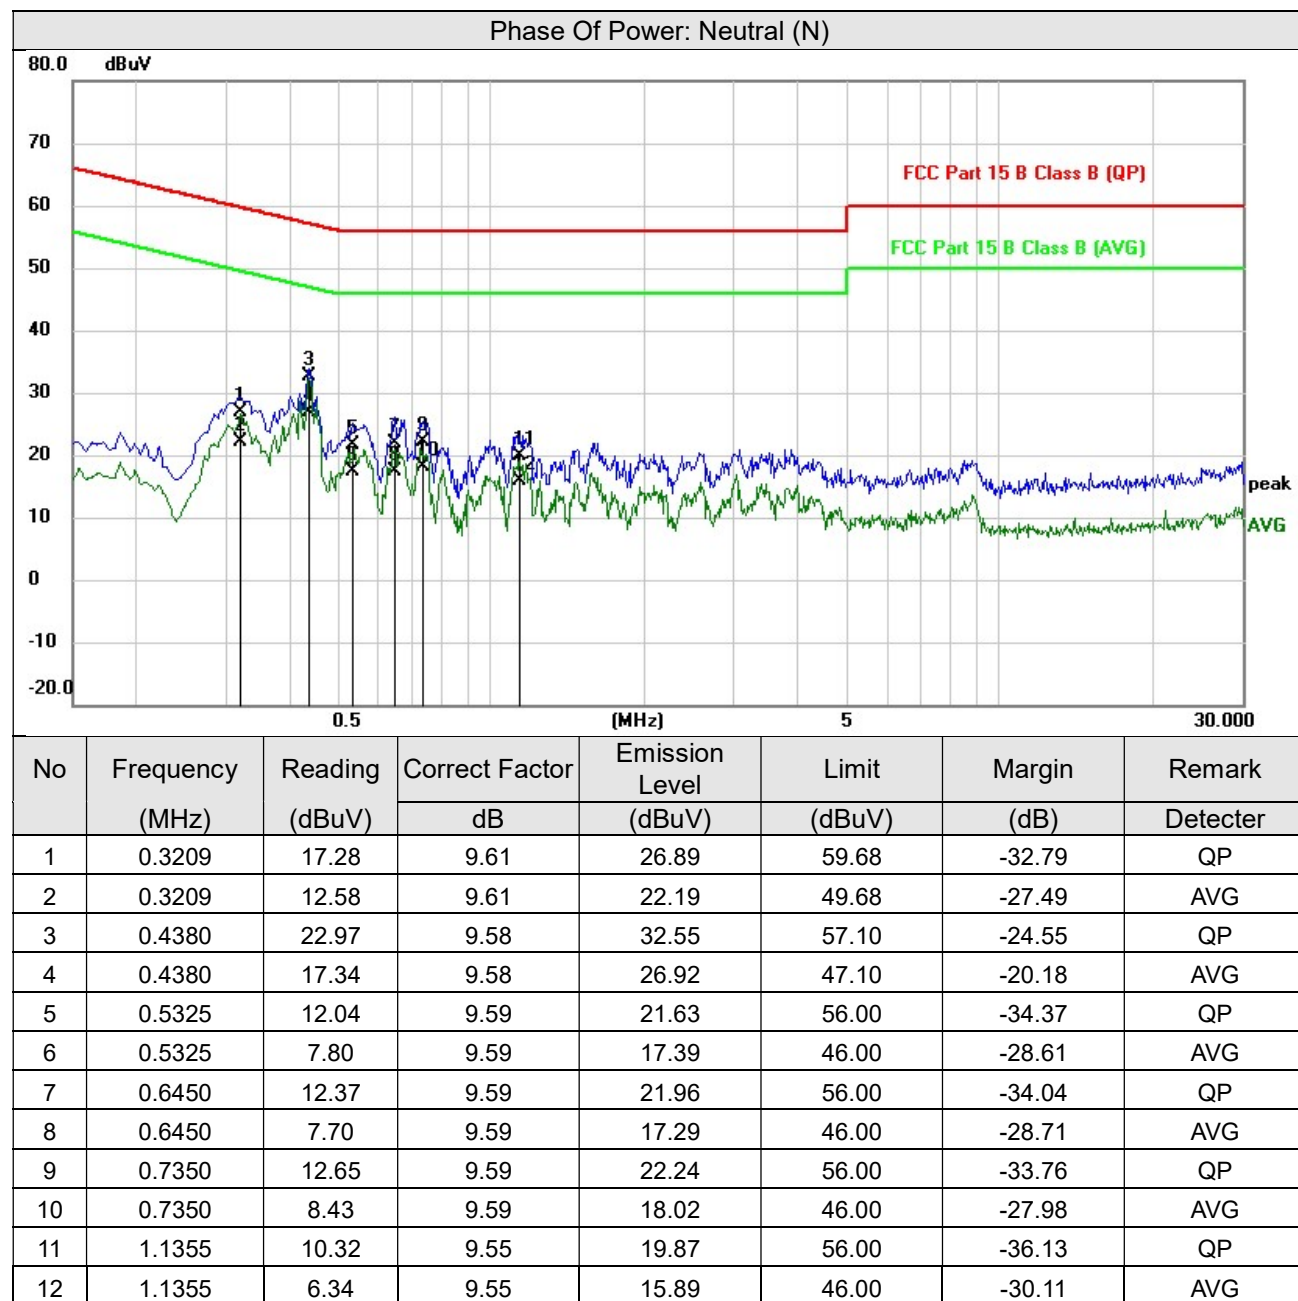

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

5. 6dB Bandwidth Measurement

5.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.2 Test Setup



5.3 Test Instruments

Refer to section 10.1 to get information of above instrument.

5.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.5 Deviation from Test Standard


No deviation.

5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

5.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth(MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.700	0.5	Pass
19	2440	0.676	0.5	Pass
39	2480	0.660	0.5	Pass

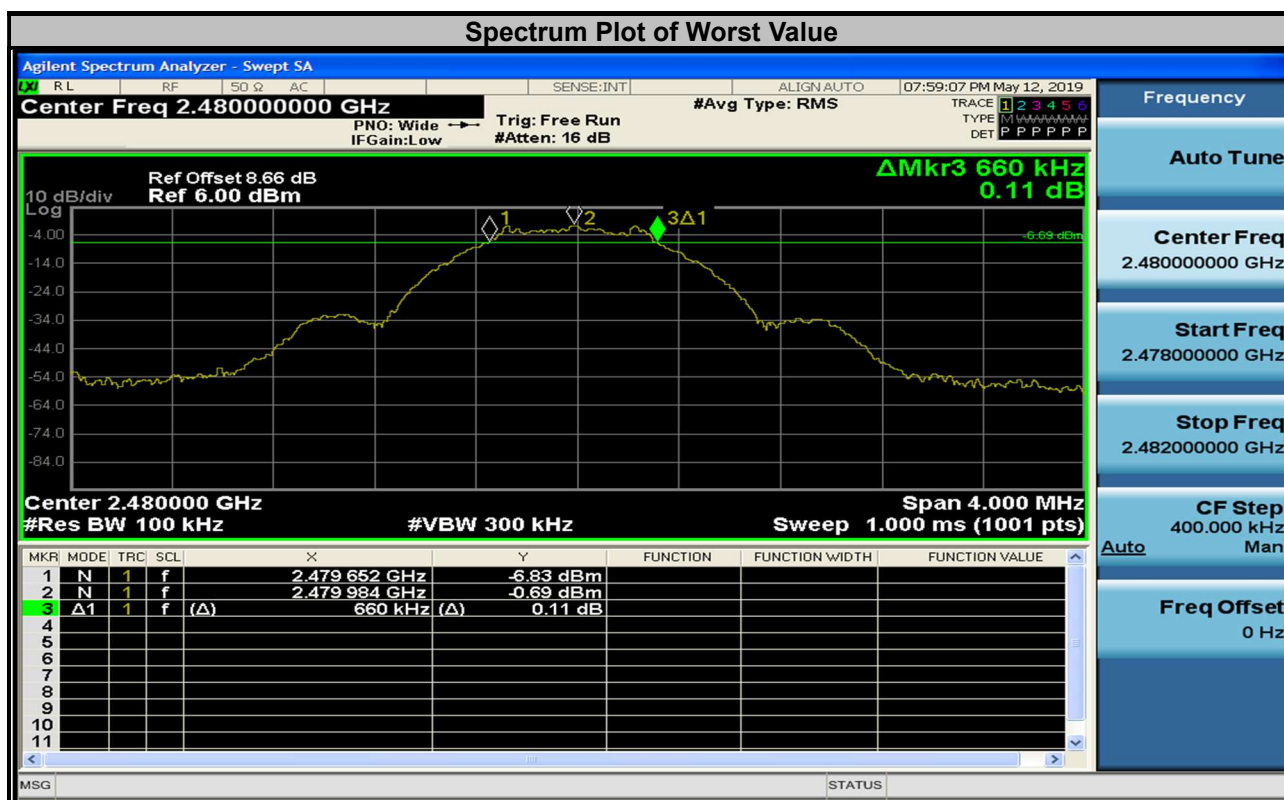

6. Occupied Bandwidth Measurement

6.1 Test Setup



6.2 Test Instruments

Refer to section 10.1 to get information of above instrument.

6.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

6.4 Deviation from Test Standard

No deviation.

6.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

6.6 Test Results

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.0299	Pass
19	2440	1.0251	Pass
39	2480	1.0272	Pass




7. Conducted Output Power Measurement

7.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

7.2 Test Setup

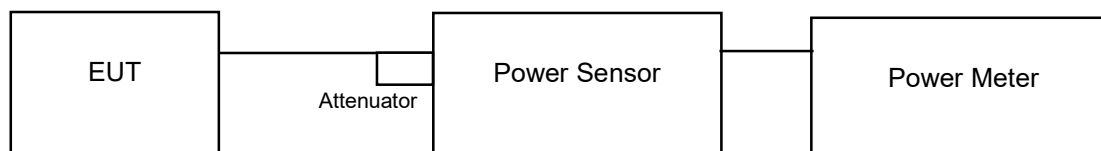

7.3 Test Instruments

Refer to section 10.1 to get information of above instrument.

7.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

7.5 Deviation from Test Standard

No deviation.

7.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

7.7 Test Results


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	0.612	-2.13	30	Pass
19	2440	0.541	-2.67	30	Pass
39	2480	0.449	-3.48	30	Pass

8. Power Spectral Density Measurement

8.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

8.2 Test Setup



8.3 Test Instruments

Refer to section 10.1 to get information of above instrument.

8.4 Test Procedure

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz bandsegment within the fundamental EBW.

8.5 Deviation from Test Standard


No deviation.

8.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

8.7 Test Results

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	2402	-14.960	8	Pass
19	2440	-15.526	8	Pass
39	2480	-15.301	8	Pass

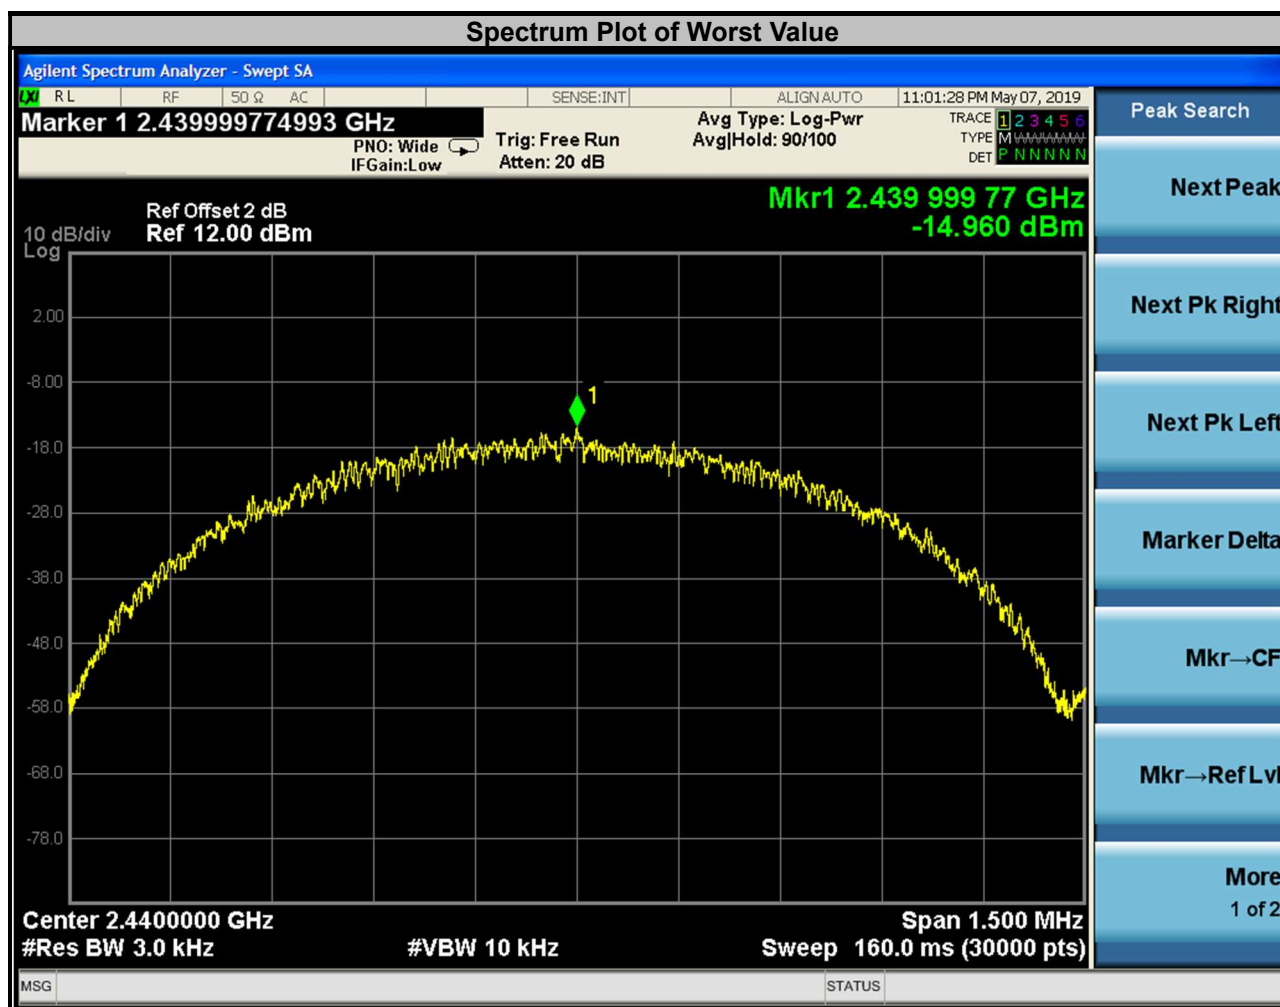

9. Conducted Out of Band Emission Measurement

9.1 Limits of Conducted Out of Band Emission Measurement


For average power:

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

For peak power:

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth)

9.2 Test Setup



9.3 Test Instruments

Refer to section 10.1 to get information of above instrument.

9.4 Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


9.5 Deviation from Test Standard

No deviation.

9.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

9.7 Test results

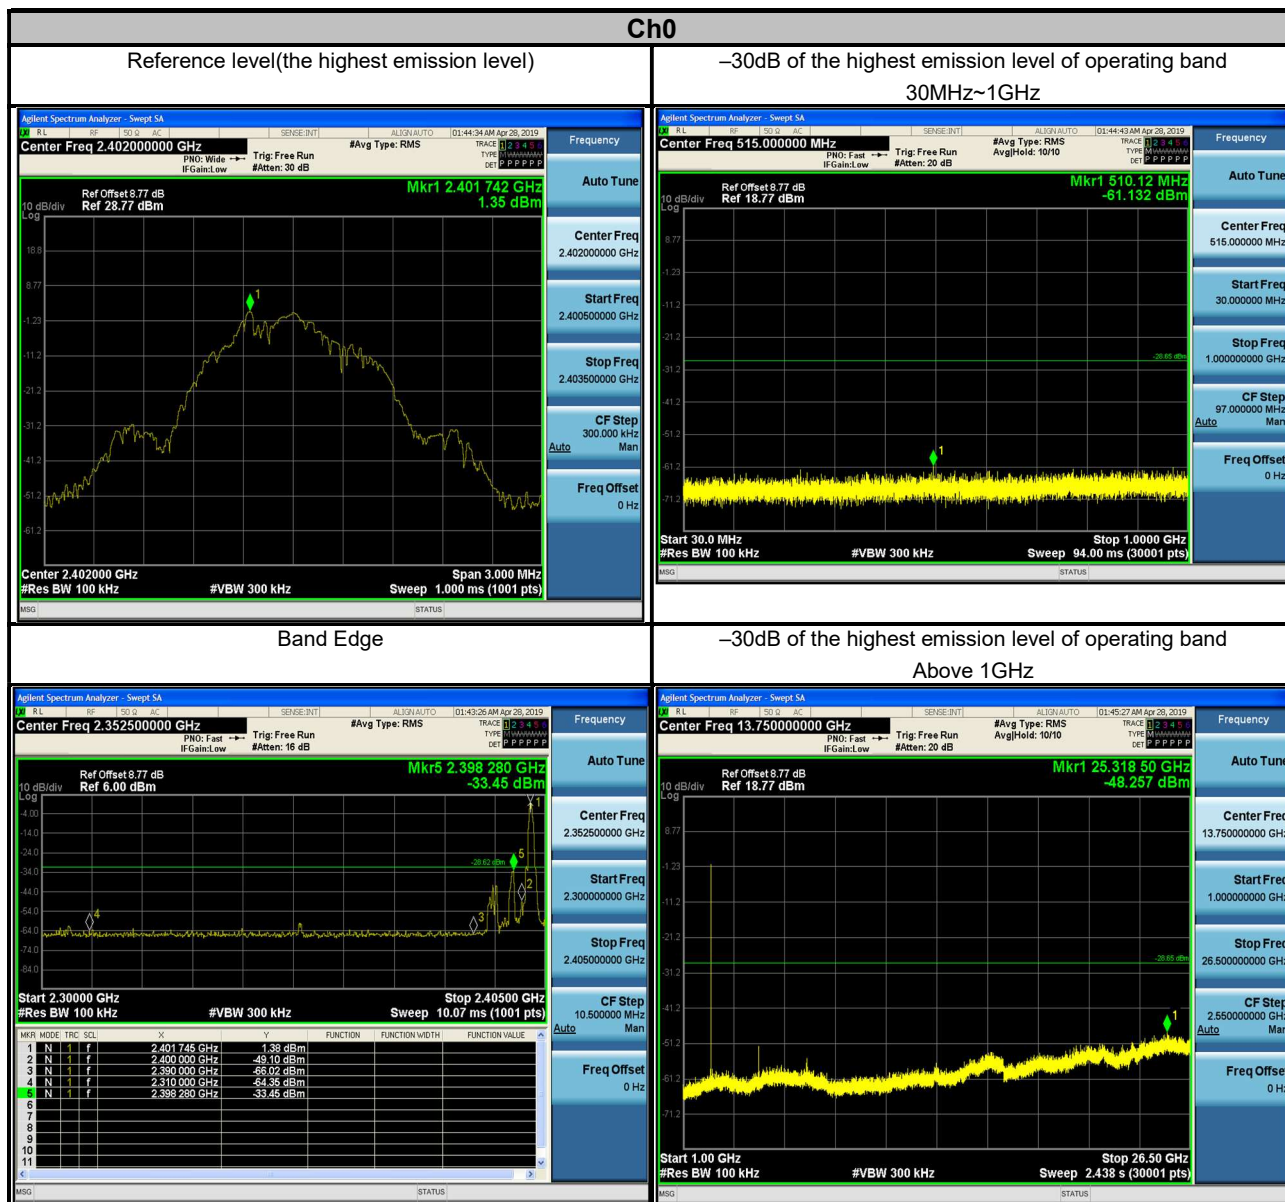


Ch 19

Reference level(the highest emission level)



-30dB of the highest emission level of operating band
30MHz~1GHz

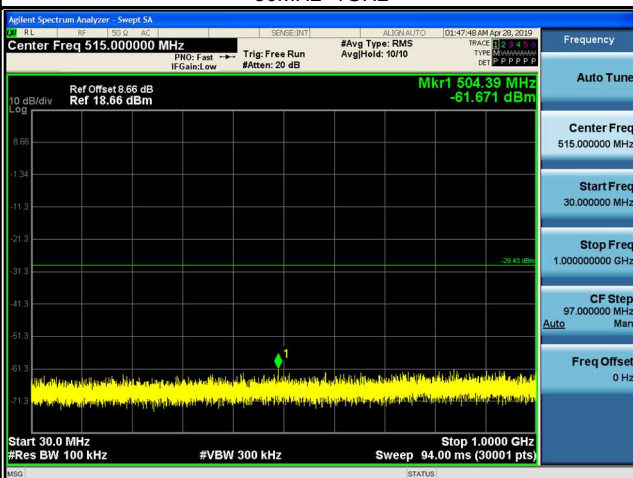

-30dB of the highest emission level of operating band
Above 1GHz





10. Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

10.1 Test instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Spectrum Keysight	N9020A	MY51240612	2018/10/29	2019/10/28
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2018/12/11	2019/12/10
Power Meter10Hz~18GHz Tonscend	JS0806-2	188060126	2018-11-10	2019-11-09
Signal generator Keysight	N5182A	GB40051020	2018/10/29	2019/10/28
Signal generator Keysight	N5182A	MY47420944	2018/10/29	2019/10/28
Test Software Tonscend	JS0806-2	NA	NA	NA
Hygrothermograph Yuhuaze	HTC-1	NA	2018/10/30	2019/10/29

Note: 3. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.

4. The test was performed in Chamber 1.

Appendix – Information on the Testing Laboratories

We, Hwa-Hsing (Dongguan) Co., Ltd., A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

Contact Tel: 0769-83078199

Email:customerservice.dg@hwa-hsing.com

Web Site:www.hwa-hsing.com

The address and road map of all our labs can be found in our web site also.

--- END ---