



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT** 

## INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Applicant: BrainScope

4330 East-West Highway, Suite 1000, Bethesda, MD, USA

Product Name: BrainScope Handheld Computer

Brand Name: BrainScope

Model No.: GT-500BC1, GT-500BC

Model Difference: Marketing purpose

**Report Number**: T190313W04-RP4 **FCC ID**: 2ASKV-GT-500BC1

**Issue Date:** Apr. 15, 2019

**FCC Rule Part:** 

Date of Test: Mar. 14, 2019~ Apr. 01, 2019

Date of EUT Received: Mar. 14, 2019

**Issued by** Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

§15.247, Cat: DTS

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190313W04-RP4	Rev.00	Initial creation of document	All	Apr. 15, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## **Table of Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	DUTY CYCLE OF TEST SIGNAL	16
8	PEAK OUTPUT POWER MEASUREMENT	18
9	6DB BANDWIDTH MEASUREMENT	22
10	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	26
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	35
12	POWER SPECTRAL DENSITY	86
13	ANTENNA REQUIREMENT	90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。



## 1 GENERAL INFORMATION

## 1.1 Product description

Product Name:	BrainScope Handheld Computer		
Brand Name:	BrainScope		
Model No.:	GT-500BC1, GT-500BC		
Model Difference:	Marketing purpose		
Hardware Version:	N/A		
Software Version:	N/A		
Device Cumphy	3.8Vdc from Rechargeable Li-ion Battery or 5Vdc from USB port		
Power Supply:	Battery: Model No.: GT500V-1, Supplier: AMobile		

Wi-Fi 802.11	Frequency Range	Channels	Rated Power (dBm)	Modulation Technology
b			15.16	DSSS
g	2412-2462	11	20.84	
n_HT20			21.03	OFDM
n_HT40	2422-2452	7	21.84	
Modulation type:		,	PSK, DBPSK for DSSS 16QAM, QPSK, BPSK for OFDM	
Transition Rate:		802.11 g: 802.11 n	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72.2Mbps 802.11 n_40MHz: 13.5 - 150.0Mbps	

## **Antenna Designation**

Antenna	Supplier	Antenna	Freq.	Peak Antenna	Worst Antenna
Type		Part No.	(MHz)	Gain (dBi)	Gain
PIFA	AMobile	RFA-25-AP732	2402-2480	-2.99	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v04

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

## 1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

#### 1.4 Special Accessories

There are no special accessories used while test was conducted.

#### 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

#### 1.6 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m\*9m\*6m semi-anechoic chamber. the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### 2 SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

#### 2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



# **Emission Configuration**

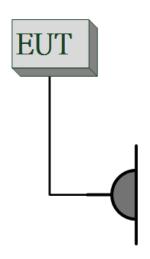



Fig 2-2 Radiated Emission










Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	L430	P0000195	Shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### 4 DESCRIPTION OF TEST MODES

## 4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b, 802.11g and 802.11n HT20

		<u> </u>	
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

#### 7 channels are provided for 802.11n HT40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.

#### AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

#### **RADIATED EMISSION TEST:**

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE AVAILABLE TESTED CHANNEL MODULATION DATA RATE (Mbps)							
802.11g	1 to 11	1,6,11	OFDM	6			

RADIATED EMISSION TEST (ABOVE 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)			
802.11b	1 to 11	1, 6, 11	DSSS	1			
802.11g	1 to 11	1, 6, 11	OFDM	6			
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 0			
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 0			

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

#### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST								
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)				
802.11b	1 to 11	1, 6, 11	DSSS	1				
802.11g	1 to 11	1, 6, 11	OFDM	6				
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 0				
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## 5 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### **6 CONDUCTED EMISSION TEST**

## 6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Lin dB(	nits uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

#### Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 6.2 Measurement Equipment Used

	Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019					
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019					
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020					
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020					
Software		EZ-EMC(0	CCS-3A1-CE)							

## 6.3 EUT Setup


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## 6.4 Test SET-UP (Block Diagram of Configuration)

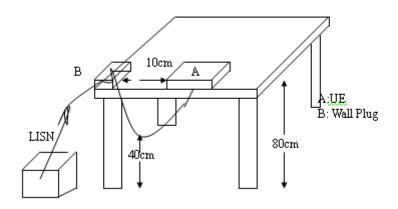

#### 6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




## AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation Date: 2019/3/28

Line: L1 Temp.(°C)/Hum.(%): 26(°C)/62%


Test Voltage: AC 120V/60Hz Test By: Henry

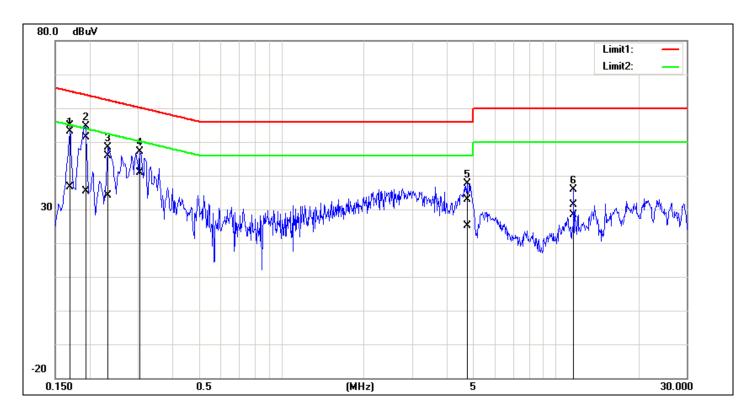

No.	Frequency	QuasiPeak reading	Average reading	Correction	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1700	54.60	36.50	0.16	54.76	36.66	64.96	54.96	-10.20	-18.30	Pass
2	0.1940	51.14	35.19	0.15	51.29	35.34	63.86	53.86	-12.57	-18.52	Pass
3	0.2340	45.64	33.91	0.15	45.79	34.06	62.30	52.31	-16.51	-18.25	Pass
4*	0.3060	47.08	40.82	0.16	47.24	40.98	60.08	50.08	-12.84	-9.10	Pass
5	4.7540	32.68	24.94	0.30	32.98	25.24	56.00	46.00	-23.02	-20.76	Pass
6	11.6620	30.85	27.84	0.50	31.35	28.34	60.00	50.00	-28.65	-21.66	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Description: Operation Date: 2019/3/28

Line: N Temp.(°C)/Hum.(%): 26(°C)/62%

Test Voltage: AC 120V/60Hz Test By: Henry

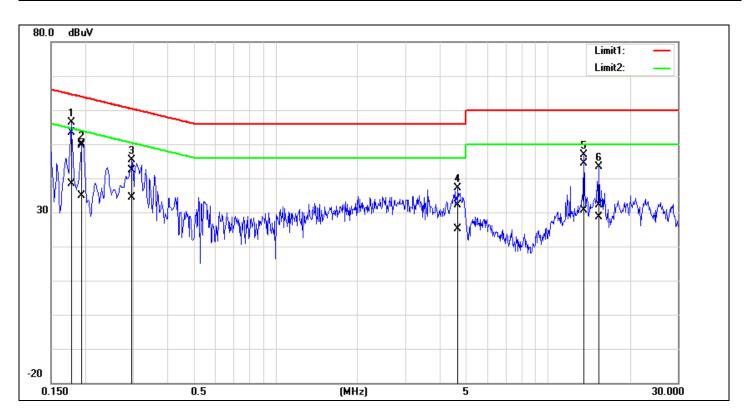

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1780	53.26	38.24	0.10	53.36	38.34	64.57	54.58	-11.21	-16.24	Pass
2	0.1940	49.95	34.80	0.10	50.05	34.90	63.86	53.86	-13.81	-18.96	Pass
3	0.2980	42.38	34.25	0.10	42.48	34.35	60.30	50.30	-17.82	-15.95	Pass
4	4.6860	31.98	25.01	0.23	32.21	25.24	56.00	46.00	-23.79	-20.76	Pass
5	13.5620	43.96	30.11	0.44	44.40	30.55	60.00	50.00	-15.60	-19.45	Pass
6	15.4420	31.62	28.27	0.47	32.09	28.74	60.00	50.00	-27.91	-21.26	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## 7 DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

#### Formula:

Duty Cycle = Ton / (Ton+Toff)

#### **Measurement Procedure:**

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

## **Duty Cycle:**

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	99.64	0.02	0.12	0.01
802.11g	97.48	0.11	0.72	1.00
802.11n_20	97.30	0.12	0.77	1.00
802.11n_40	94.88	0.23	1.54	2.00

b = 99.64%, g = 97.478%, n\_ht\_20 = 97.3%, n\_ht\_40 = 94.875%


Duty Cycle Factor: 10 \* log(1/0.9964) = 0.02 Duty Cycle Factor: 10 \* log(1/0.97478) = 0.11 Duty Cycle Factor: 10 \* log(1/0.973) = 0.12 Duty Cycle Factor: 10 \* log(1/0.94875) = 0.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




#### 7.1 DUTY CYCLE TEST SIGNAL Measurement Result


FCC\_15\_247\_WLAN\Duty Cycle\_802.11b\_20MHz\_Chain0\_2437MHz

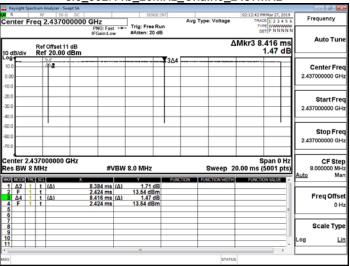


FCC\_15\_247\_WLAN\Duty Cycle\_802.11g\_20MHz\_Chain0\_2437MHz

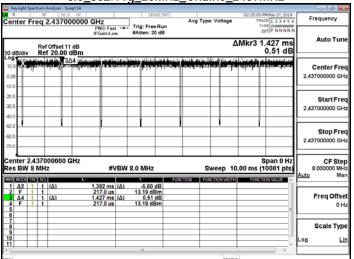

FCC\_15\_247\_WLAN\Duty Cycle\_802.11n\_20MHz\_Chain0\_2437MHz

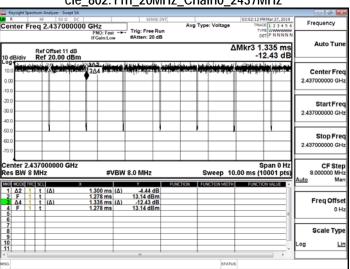

FCC\_15\_247\_WLAN\Duty Cycle\_802.11n\_40MHz\_Chain0\_2437MHz

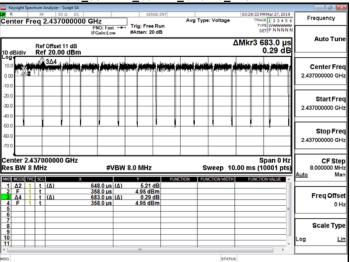

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



## 8 PEAK OUTPUT POWER MEASUREMENT

## 8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.


In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

## 8.2 Measurement Equipment Used

Conducted Emission Test Site												
EQUIPMENT MFR MODEL SERIAL LAST CAL D												
TYPE		NUMBER	NUMBER	CAL.								
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019							
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019							
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019							
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020							

## 8.3 Test Set-up

Power Meter:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### 8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

#### **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

#### 8.5 Measurement Result

802.1	02.11b Ch0								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	1	15.16	30.00	PASS				
6	2437	1	14.92	30.00	PASS				
11	2462	1	15.11	30.00	PASS				
802.1	1b Ch0								
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	1	11.98	30.00	PASS				
6	2437	1	11.74	30.00	PASS				
11	2462	1	11.89	30.00	PASS				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



802.1	302.11g Ch0								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	20.84	30.00	PASS				
6	2437	6	20.79	30.00	PASS				
11	2462	6	20.18	30.00	PASS				
802.1	1g Ch0								
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	11.80	30.00	PASS				
6	2437	6	11.76	30.00	PASS				
11	2462	6	11.93	30.00	PASS				

802.1	302.11n_HT20M Ch0								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	MCS0	21.03	30.00	PASS				
6	2437	MCS0	20.98	30.00	PASS				
11	2462	MCS0	20.42	30.00	PASS				
802.1	1n_HT20	M Ch0			-				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	MCS0	11.90	30.00	PASS				
6	2437	MCS0	11.85	30.00	PASS				
11	2462	MCS0	11.96	30.00	PASS				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



802.1	802.11n_HT40M Ch0							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT			
3	2422	MCS0	21.84	30.00	PASS			
6	2437	MCS0	21.68	30.00	PASS			
9	2452	MCS0	21.10	30.00	PASS			
802.1	1n_HT40	M Ch0						
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT			
3	2422	MCS0	11.95	30.00	PASS			
6	2437	MCS0	11.84	30.00	PASS			
9	2452	MCS0	11.95	30.00	PASS			

Note

Cable Loss 11.00 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

<sup>\*</sup> Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.

#### 9 6DB BANDWIDTH MEASUREMENT


## 9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 9.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT MFR MODEL SERIAL LAST CA						
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	

#### 9.3 Test Set-up



#### 9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
  - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:
  - Set the spectrum analyzer as RBW=1%, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.
- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



#### 9.5 Measurement Result

#### 6dB Bandwidth

802.11b Ch0

### 802.11a Ch0

002:116 0110					
Freq.	6dB BW	Limit	Result		
(MHz)	(kHz)	(kHz)	Result		
2412	9588.00	> 500	PASS		
2437	10050.00	> 500	PASS		
2462	9583.00	> 500	PASS		

Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Nesuit
2412	15320.00	> 500	PASS
2437	15250.00	> 500	PASS
2462	15460.00	> 500	PASS

802.11 n HT20 Ch0

802.	11	n	Ц٦		Ch	Λ
OUZ.		11	п	40	UII	v


Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	15940.00	> 500	PASS
2437	16270.00	> 500	PASS
2462	16080.00	> 500	PASS

Freq.	6dB BW	Limit	Result	
(MHz)	(kHz) (kHz)		Resuit	
2422	35170.00	> 500	PASS	
2437	35600.00	> 500	PASS	
2452	35150.00	> 500	PASS	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

<sup>\*</sup>Refer to next page for plots








#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11b\_20MHz\_Chain0\_2437MHz




#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11b\_20MHz\_Chain0\_2462MHz



#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11g\_20MHz\_Chain0\_2412MHz

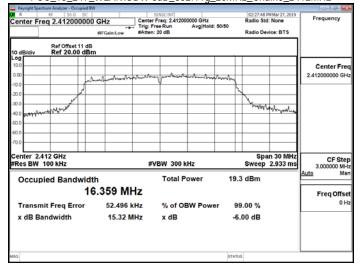

#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11g\_20MHz\_Chain0\_2437MHz

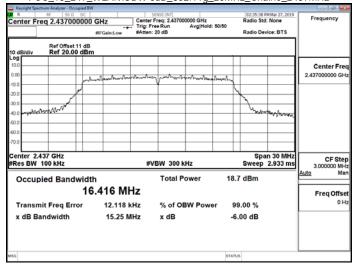


#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11g\_20MHz\_Chain0\_2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






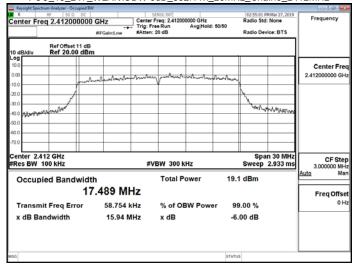


#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11n\_20MHz\_Chain0\_2437MHz

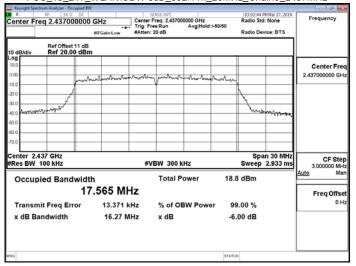


#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11n\_20MHz\_Chain0\_2462MHz

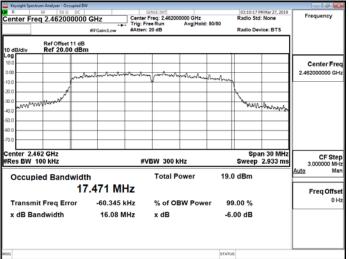


#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11n\_40MHz\_Chain0\_2422MHz

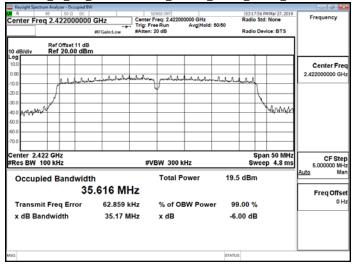

#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11n\_40MHz\_Chain0\_2437MHz

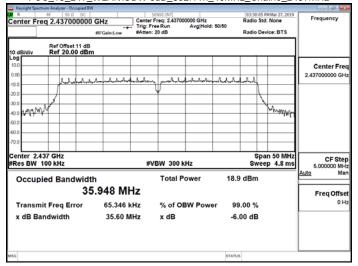

#### FCC\_15\_247\_WLAN\OBW 6dB\_802.11n\_40MHz\_Chain0\_2452MHz

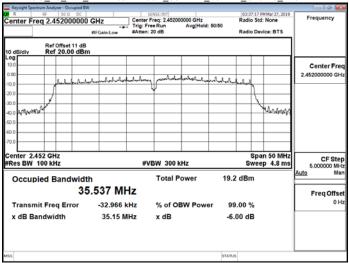

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions.htm and for electronic format document htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司



## 10 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

### 10.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

## 10.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT MFR MODEL SERIAL LAST CAL DU						
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	

#### 10.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### 10.4 Measurement Procedure

#### **Reference Level of Emission Limit:**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

#### **Conducted Band Edge:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

#### **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector = Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### 10.5 Measurement Result


Reference Level of Limit 802.11b mode			Refere	nce Leve	l of Limit 802.11g mode
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)
2412	3.21	-16.79	2412	2.41	-17.59
2437	3.17	-16.83	2437	0.89	-19.11
2462	2.70	-17.30	2462	1.72	-18.28

Referen	Reference Level of Limit 802.11n20 mode Reference Level of Limit 802.11n40 MODE					
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit	
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)	
2412	2.13	-17.87	2422	-0.82	-20.82	
2437	1.26	-18.74	2437	-2.29	-22.29	
2462	1.56	-18.44	2452	-0.83	-20.83	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






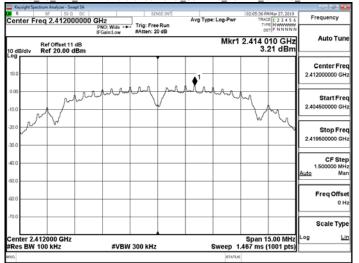


#### FCC\_15\_247\_WLAN\Reference Level\_802.11b\_20MHz\_Chain0\_2437MHz

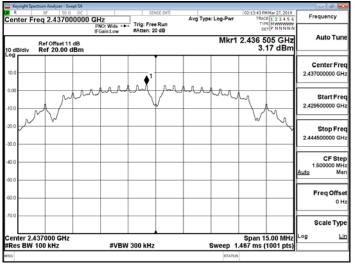


FCC\_15\_247\_WLAN\Reference Level\_802.11b\_20MHz\_Chain0\_2462MHz

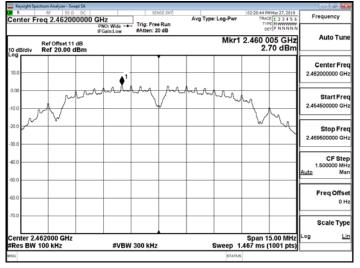


#### FCC\_15\_247\_WLAN\Reference Level\_802.11g\_20MHz\_Chain0\_2412MHz

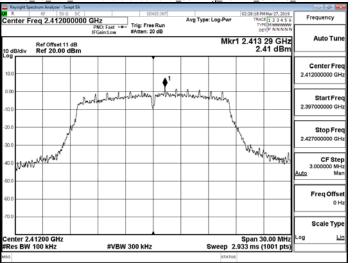

FCC\_15\_247\_WLAN\Reference Level\_802.11g\_20MHz\_Chain0\_2437MHz

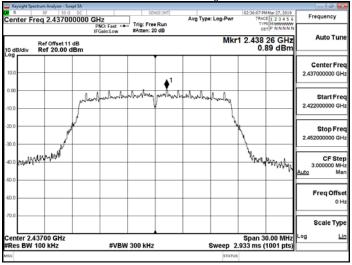

FCC\_15\_247\_WLAN\Reference Level\_802.11g\_20MHz\_Chain0\_2462MHz

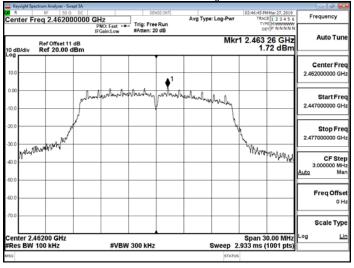


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions.htm and for electronic format document htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






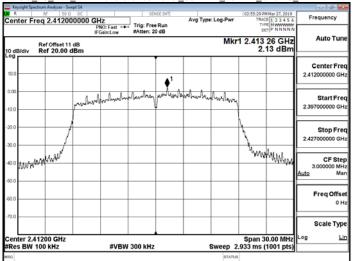


#### FCC\_15\_247\_WLAN\Reference Level\_802.11n\_20MHz\_Chain0\_2437MHz

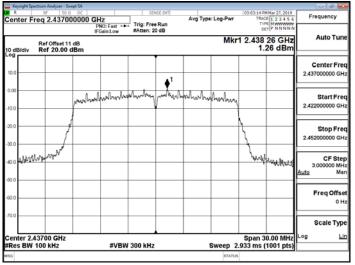


FCC\_15\_247\_WLAN\Reference Level\_802.11n\_20MHz\_Chain0\_2462MHz

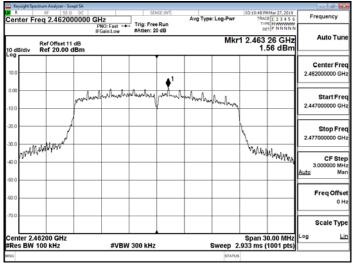


FCC\_15\_247\_WLAN\Reference Level\_802.11n\_40MHz\_Chain0\_2422MHz

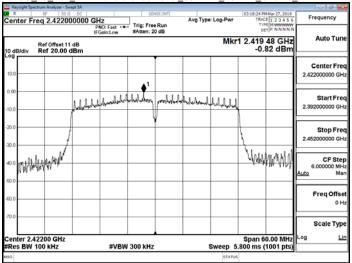

FCC\_15\_247\_WLAN\Reference Level\_802.11n\_40MHz\_Chain0\_2437MHz

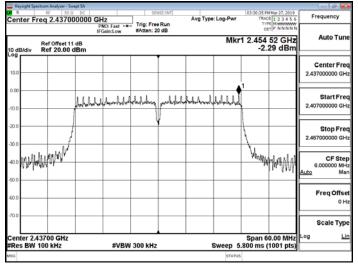

FCC\_15\_247\_WLAN\Reference Level\_802.11n\_40MHz\_Chain0\_2452MHz

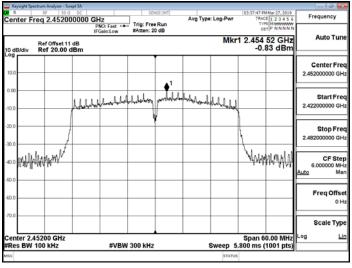


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




#### FCC\_15\_247\_WLAN\Band Edge\_802.11b\_20MHz\_Chain0\_2412MHz

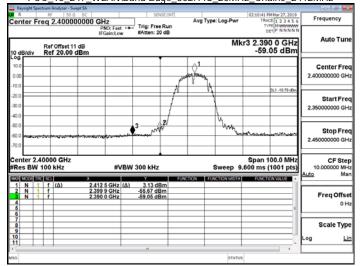


FCC\_15\_247\_WLAN\Band Edge\_802.11b\_20MHz\_Chain0\_2462MHz

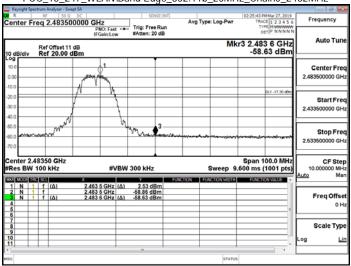

FCC\_15\_247\_WLAN\Band Edge\_802.11g\_20MHz\_Chain0\_2412MHz

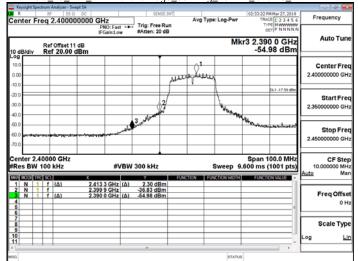

FCC\_15\_247\_WLAN\Band Edge\_802.11g\_20MHz\_Chain0\_2462MHz

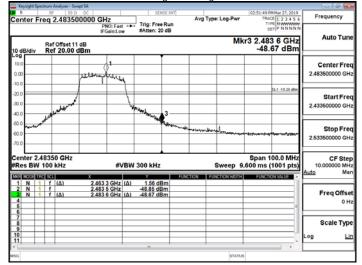


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




#### FCC\_15\_247\_WLAN\Band Edge\_802.11n\_20MHz\_Chain0\_2412MHz

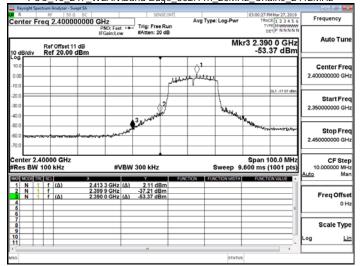


FCC\_15\_247\_WLAN\Band Edge\_802.11n\_20MHz\_Chain0\_2462MHz

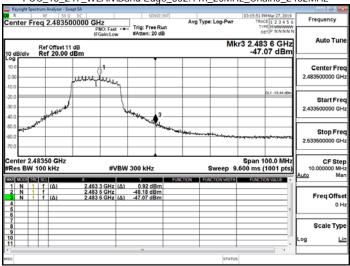

FCC\_15\_247\_WLAN\Band Edge\_802.11n\_40MHz\_Chain0\_2422MHz

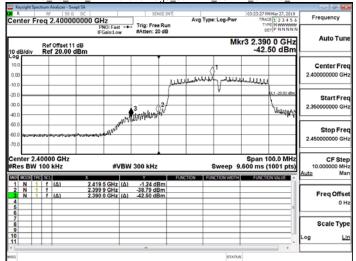


FCC\_15\_247\_WLAN\Band Edge\_802.11n\_40MHz\_Chain0\_2452MHz

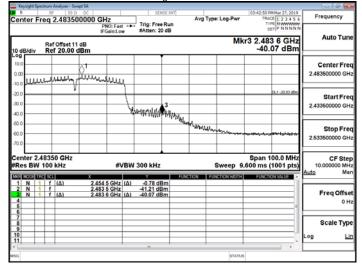


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






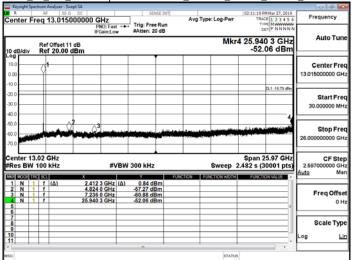


#### FCC\_15\_247\_WLAN\Spurious Emission\_802.11b\_20MHz\_Chain0\_2437MHz

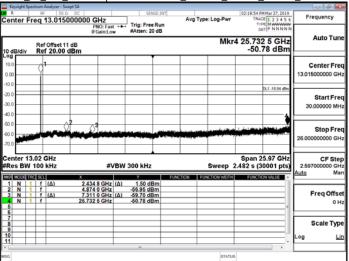


#### FCC 15 247 WLAN\Spurious Emission 802.11b 20MHz Chain0 2462MHz

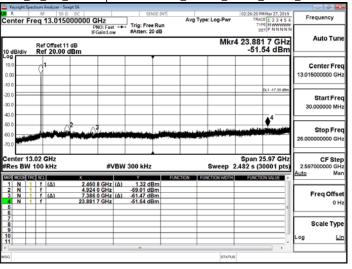


#### FCC\_15\_247\_WLAN\Spurious Emission\_802.11g\_20MHz\_Chain0\_2412MHz

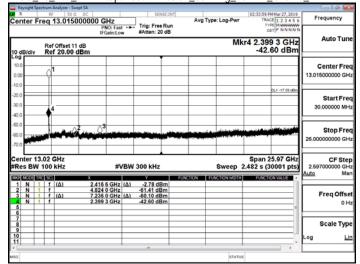

FCC\_15\_247\_WLAN\Spurious Emission\_802.11g\_20MHz\_Chain0\_2437MHz

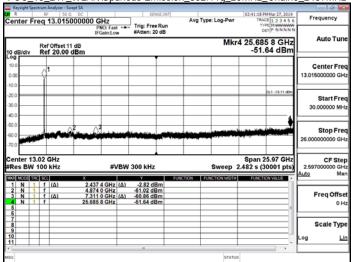

FCC 15 247 WLAN\Spurious Emission 802.11g 20MHz Chain0 2462MHz

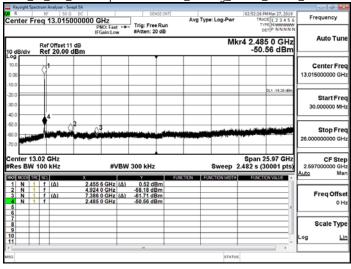


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






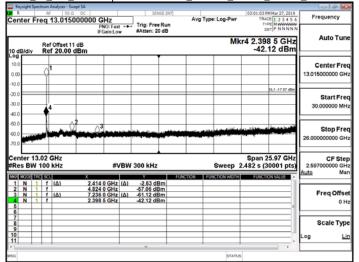


FCC\_15\_247\_WLAN\Spurious Emission\_802.11n\_20MHz\_Chain0\_2437MHz

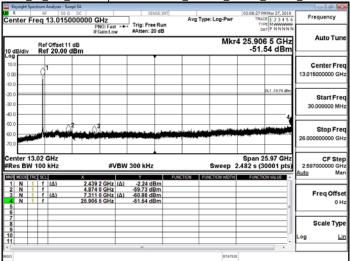


FCC 15 247 WLAN\Spurious Emission 802.11n 20MHz Chain0 2462MHz

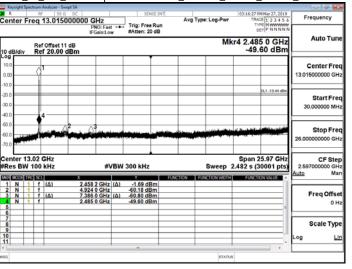


FCC\_15\_247\_WLAN\Spurious Emission\_802.11n\_40MHz\_Chain0\_2422MHz

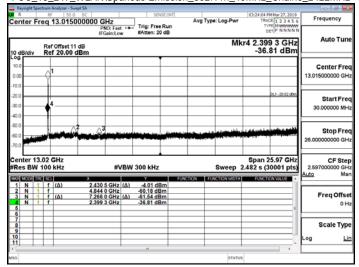

FCC\_15\_247\_WLAN\Spurious Emission\_802.11n\_40MHz\_Chain0\_2437MHz

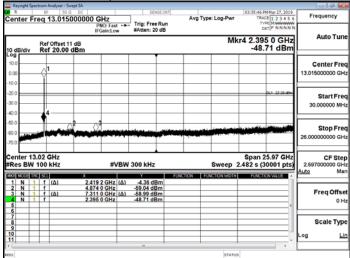

FCC\_15\_247\_WLAN\Spurious Emission\_802.11n\_40MHz\_Chain0\_2452MHz

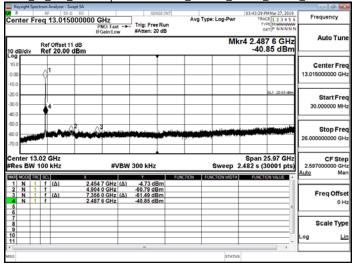

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### 11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

## 11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



## 11.2 Measurement Equipment Used:

	966A Chamber						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020		
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020		
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020		
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019		
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019		
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020		
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020		
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019		
Antenna Tower	ccs	CC-A-1F	N/A	N.C.R	N.C.R		
Controller	ccs	CC-C-1F	N/A	N.C.R	N.C.R		
Turn Table	ccs	CC-T-1F	N/A	N.C.R	N.C.R		
Software	e3 V6.11-20180413						


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





#### 11.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

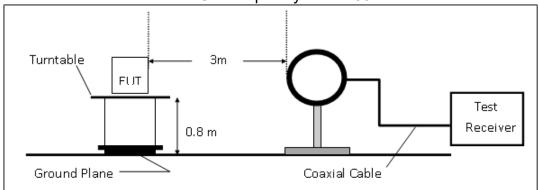

## (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

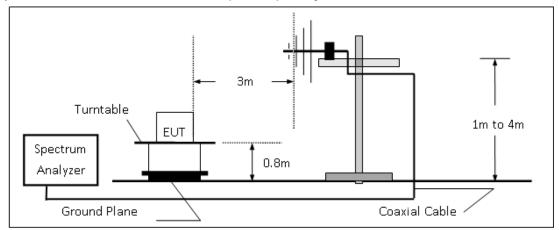

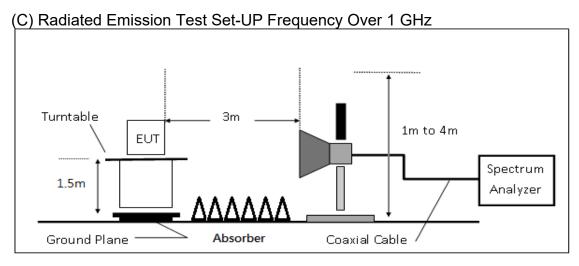

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



#### 11.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guid-
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### 11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	3	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

#### 11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

#### 11.7 Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



### **Radiated Band Edge Measurement Result**


**Operation Band** :802.11b **Test Date** :2019-03-15 Temp./Humi. Fundamental Frequency :2412 MHz :20/60 Operation Mode :BE CH LOW Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

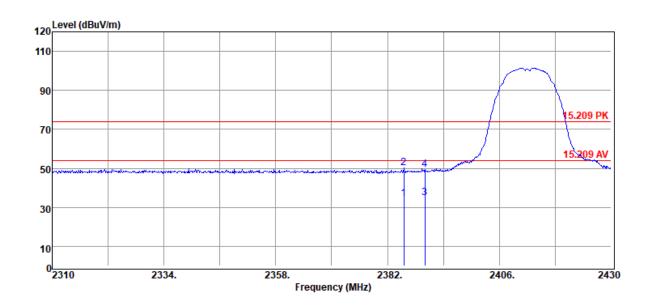

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
2385.48	Average	37.79	-3.33	34.46	54.00	-19.54	
2385.48	Peak	53.36	-3.33	50.03	74.00	-23.97	
2390.00	Average	38.31	-3.33	34.98	54.00	-19.02	
2390.00	Peak	52.80	-3.33	49.47	74.00	-24.53	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :80 Fundamental Frequency :24 Operation Mode :BE

:802.11b :2412 MHz :BE CH LOW

EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :20/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

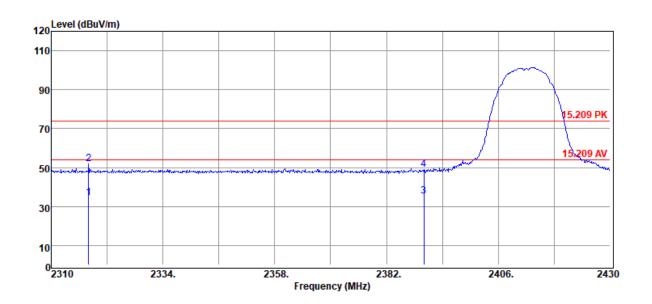

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2318.04	Average	37.63	-3.26	34.37	54.00	-19.63
2318.04	Peak	55.18	-3.26	51.92	74.00	-22.08
2390.00	Average	38.48	-3.33	35.15	54.00	-18.85
2390.00	Peak	52.37	-3.33	49.04	74.00	-24.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11b :2462 MHz :BE CH HIGH

EUT Pol. :E2 Plan **Test Date** :2019-03-15


Temp./Humi. :21/61 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

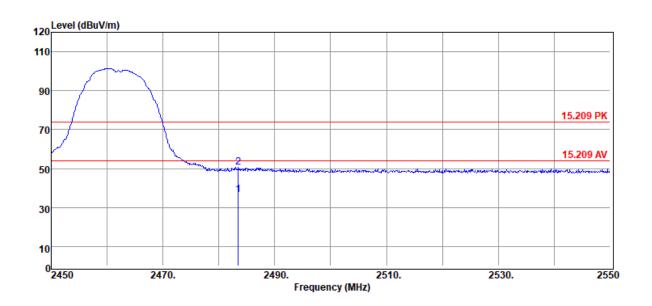

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	39.21	-2.72	36.49	54.00	-17.51
2483.50	Peak	53.23	-2.72	50.51	74.00	-23.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





EUT Pol.


:802.11b :2462 MHz :BE CH HIGH

:E2 Plan

**Test Date** :2019-03-15

Temp./Humi. :21/61 Engineer :Jerry


:HORIZONTAL Measurement Antenna Pol.

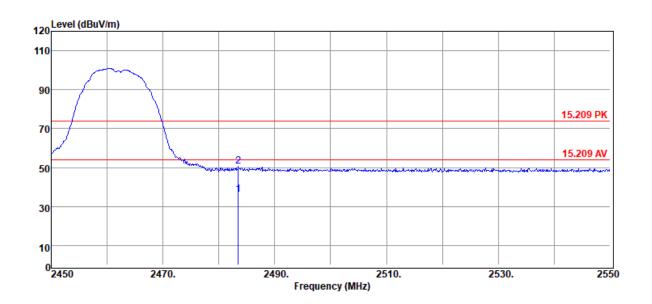

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	38.85	-2.72	36.13	54.00	-17.87
2483.50	Peak	53.46	-2.72	50.74	74.00	-23.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11g Fundamental Frequency :2412 MHz **Operation Mode** :BE CH LOW EUT Pol. :E2 Plan

**Test Date** :2019-03-15


Temp./Humi. :21/59 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

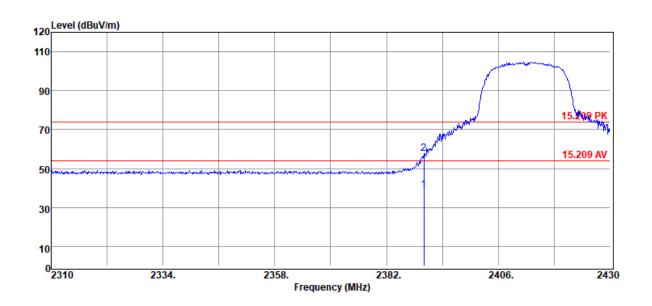

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
2390.00	Average	42.40	-3.33	39.07	54.00	-14.93	
2390.00	Peak	61.02	-3.33	57.69	74.00	-16.31	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11g Fundamental Frequency :2412 MHz Operation Mode EUT Pol.

:BE CH LOW :E2 Plan

Measurement Antenna Pol.

**Test Date** :2019-03-15 Temp./Humi. :21/59 Engineer :Jerry


:HORIZONTAL

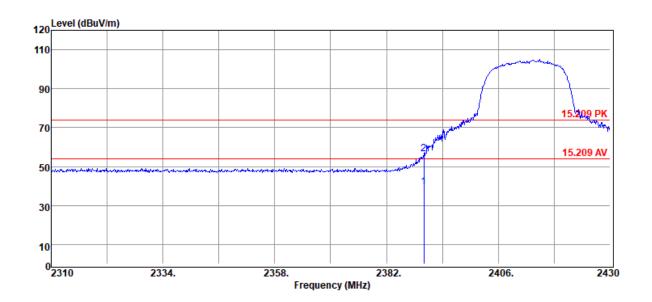

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	42.91	-3.33	39.58	54.00	-14.42
2390.00	Peak	59.95	-3.33	56.62	74.00	-17.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11g :2462 MHz :BE CH HIGH

EUT Pol. :E2 Plan **Test Date** :2019-03-15


Temp./Humi. :22/60 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

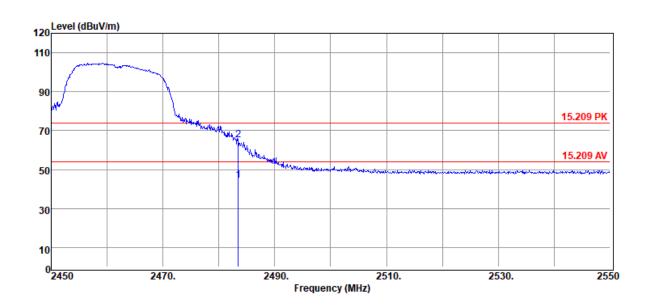

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
2483.50	Average	47.33	-2.72	44.61	54.00	-9.39	
2483.50	Peak	67.92	-2.72	65.20	74.00	-8.80	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





:802.11g :2462 MHz :BE CH HIGH


EUT Pol.

:E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :22/60

Engineer :Jerry


:HORIZONTAL Measurement Antenna Pol.

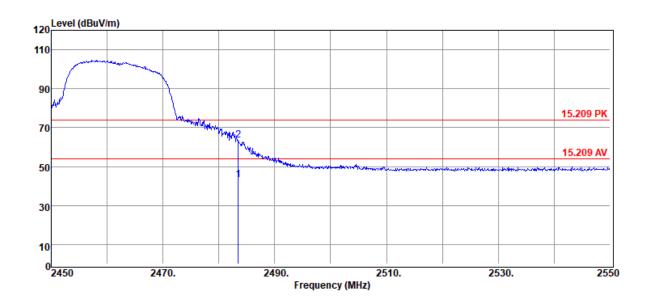

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	46.05	-2.72	43.33	54.00	-10.67
2483.50	Peak	66.26	-2.72	63.54	74.00	-10.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11n20 Fundamental Frequency :2412 MHz **Operation Mode** :BE CH LOW EUT Pol. :E2 Plan


**Test Date** :2019-03-15 Temp./Humi. :22/59 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

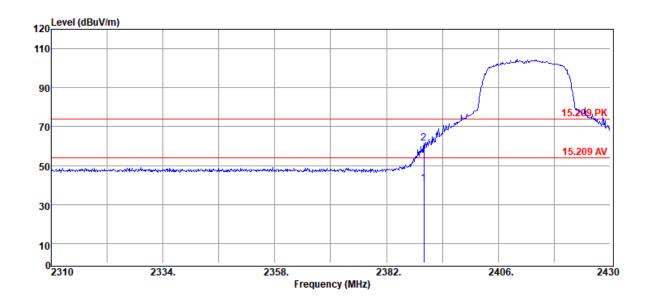

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
2390.00	Average	44.09	-3.33	40.76	54.00	-13.24	
2390.00	Peak	64.93	-3.33	61.60	74.00	-12.40	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11n20 Fundamental Frequency Operation Mode EUT Pol.

:2412 MHz :BE CH LOW :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :22/59 Engineer :Jerry


:HORIZONTAL Measurement Antenna Pol.

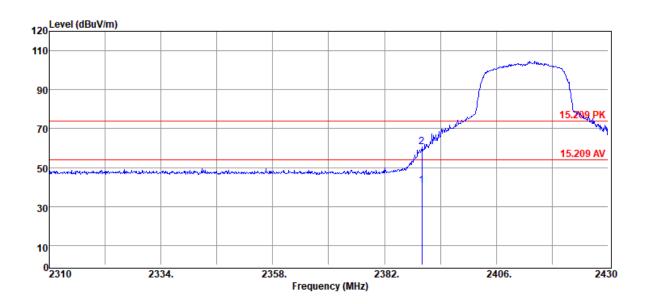

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2390.00	Average	43.84	-3.33	40.51	54.00	-13.49
2390.00	Peak	63.98	-3.33	60.65	74.00	-13.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11n20 :2462 MHz :BE CH HIGH

EUT Pol. :E2 Plan **Test Date** :2019-03-15


Temp./Humi. :22/60 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

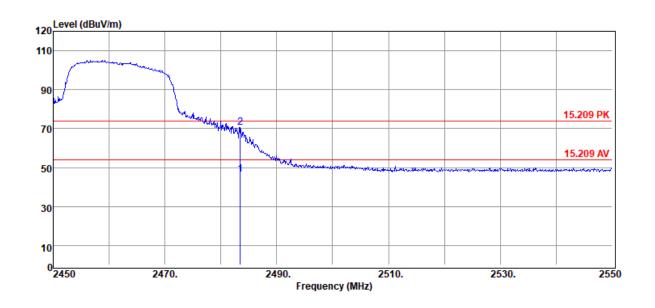

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	49.42	-2.72	46.70	54.00	-7.30
2483.50	Peak	73.45	-2.72	70.73	74.00	-3.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11n20 :2462 MHz :BE CH HIGH


EUT Pol. :E2 Plan **Test Date** :2019-03-15 Temp./Humi. :22/60 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

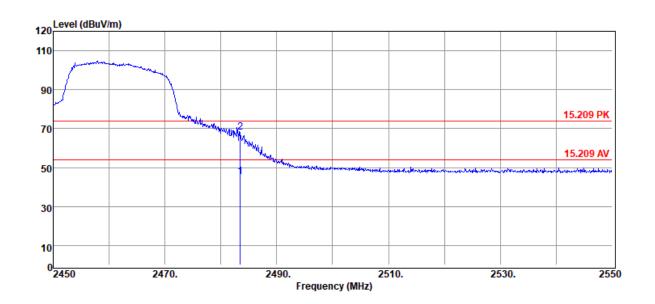

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	48.02	-2.72	45.30	54.00	-8.70
2483.50	Peak	70.88	-2.72	68.16	74.00	-5.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n40
Fundamental Frequency :2422 MHz
Operation Mode :BE CH LOW
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :22/59
Engineer :Jerry


Measurement Antenna Pol. :VERTICAL

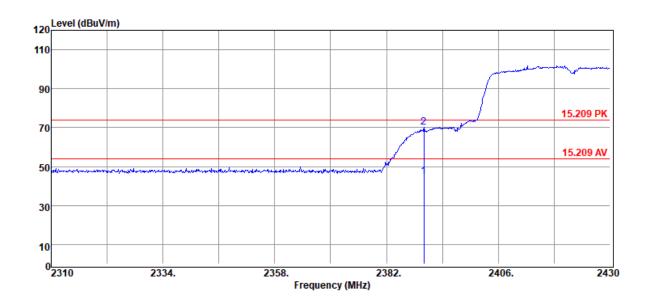

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
2390.00	Average	47.99	-3.33	44.66	54.00	-9.34	
2390.00	Peak	73.48	-3.33	70.15	74.00	-3.85	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11n40 :2422 MHz :BE CH LOW


EUT Pol. :E2 Plan **Test Date** :2019-03-15 Temp./Humi. :22/59 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

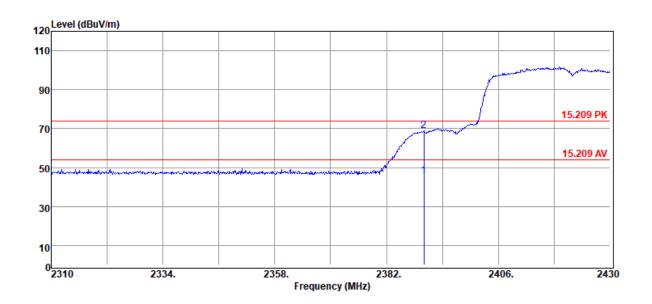

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	48.91	-3.33	45.58	54.00	-8.42
2390.00	Peak	72.23	-3.33	68.90	74.00	-5.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11n40 :2452 MHz :BE CH HIGH

EUT Pol. :E2 Plan **Test Date** :2019-03-15


Temp./Humi. :22/61 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

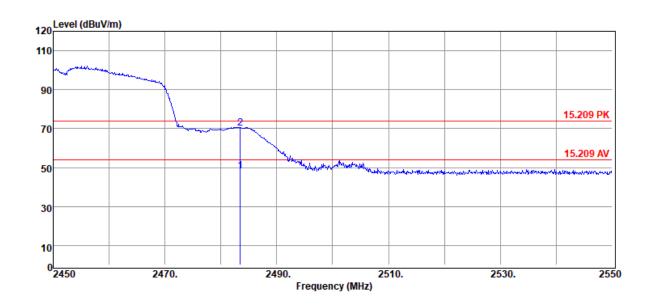

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	50.86	-2.72	48.14	54.00	-5.86
2483.50	Peak	73.10	-2.72	70.38	74.00	-3.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11n40 :2452 MHz :BE CH HIGH

EUT Pol. :E2 Plan **Test Date** :2019-03-15

Temp./Humi. :22/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

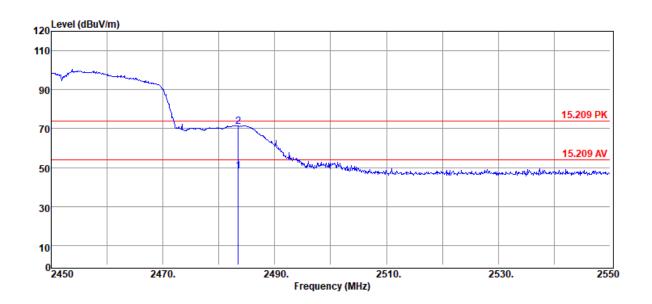

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	51.09	-2.72	48.37	54.00	-5.63
2483.50	Peak	73.93	-2.72	71.21	74.00	-2.79


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



# Radiated Spurious Emission Measurement Result Below 1GHz Worst-Case Data:


**Operation Band** :802.11g **Test Date** :2019-03-18 Fundamental Frequency :2412 MHz Temp./Humi. :22/58 Operation Mode :TX CH LOW Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

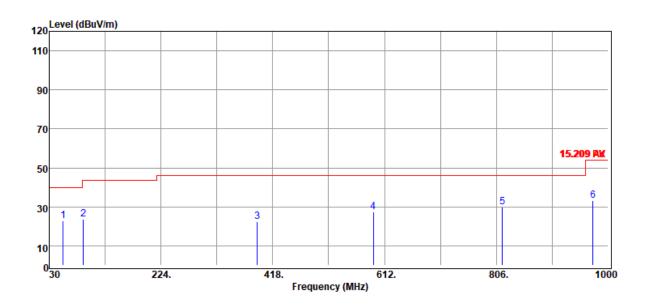

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
54.25	Peak	38.01	-15.33	22.68	40.00	-17.32	
89.17	Peak	38.69	-14.90	23.79	43.50	-19.71	
390.84	Peak	27.73	-5.13	22.60	46.00	-23.40	
592.60	Peak	28.64	-1.23	27.41	46.00	-18.59	
816.67	Peak	26.01	3.73	29.74	46.00	-16.26	
973.81	Peak	26.52	6.64	33.16	54.00	-20.84	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11g
Fundamental Frequency :2412 MHz
Operation Mode :TX CH LOW
EUT Pol. :E2 Plan

Test Date :2019-03-18
Temp./Humi. :22/58
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

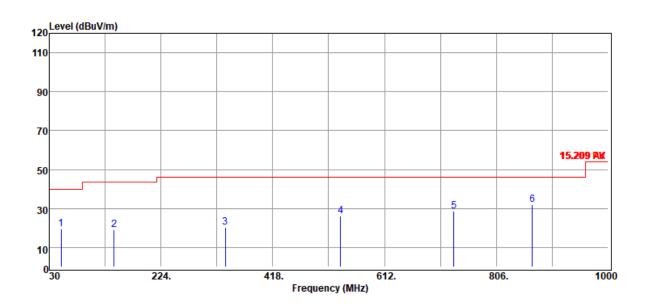

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
50.37	Peak	34.01	-14.62	19.39	40.00	-20.61	
142.52	Peak	28.26	-9.19	19.07	43.50	-24.43	
335.55	Peak	26.95	-6.48	20.47	46.00	-25.53	
535.37	Peak	27.23	-1.12	26.11	46.00	-19.89	
732.28	Peak	27.20	1.63	28.83	46.00	-17.17	
868.08	Peak	28.13	3.94	32.07	46.00	-13.93	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802
Fundamental Frequency :243
Operation Mode :TX
EUT Pol. :E2

:802.11g :2437 MHz :TX CH MID :E2 Plan Test Date :2019-03-18
Temp./Humi. :22/58
Engineer :Jerry


Measurement Antenna Pol. :VERTICAL

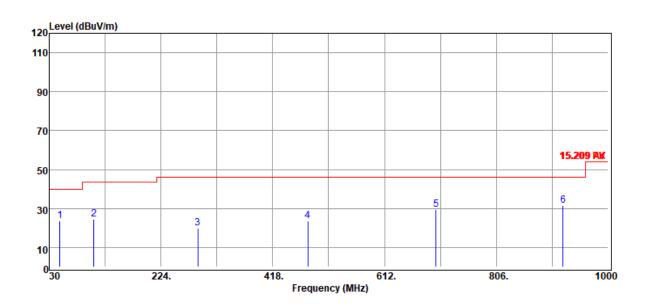

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
48.43	Peak	37.52	-13.97	23.55	40.00	-16.45	
107.60	Peak	34.62	-10.12	24.50	43.50	-19.00	
288.02	Peak	27.68	-7.67	20.01	46.00	-25.99	
479.11	Peak	25.54	-2.02	23.52	46.00	-22.48	
701.24	Peak	28.57	0.96	29.53	46.00	-16.47	
921.43	Peak	26.63	4.93	31.56	46.00	-14.44	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band ::
Fundamental Frequency ::
Operation Mode ::
EUT Pol. ::

:802.11g :2437 MHz :TX CH MID :E2 Plan Test Date :2019-03-18 Temp./Humi. :22/58

Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

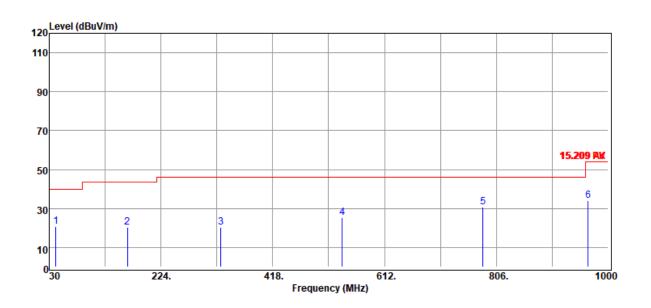

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
41.64	Peak	30.78	-10.03	20.75	40.00	-19.25	
165.80	Peak	30.33	-9.79	20.54	43.50	-22.96	
327.79	Peak	26.88	-6.41	20.47	46.00	-25.53	
538.28	Peak	26.32	-1.13	25.19	46.00	-20.81	
782.72	Peak	28.30	2.59	30.89	46.00	-15.11	
965.08	Peak	27.83	6.17	34.00	54.00	-20.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11g
Fundamental Frequency :2462 MHz
Operation Mode :TX CH HIGH

EUT Pol. :E2 Plan

Test Date :2019-03-18

Temp./Humi. :22/58 Engineer :Jerry


Measurement Antenna Pol. :VERTICAL

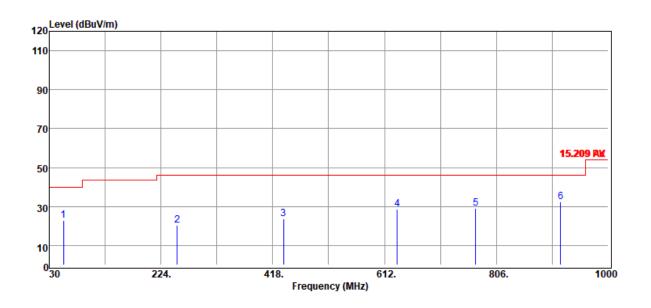

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
55.22	Peak	38.33	-15.40	22.93	40.00	-17.07	
252.13	Peak	30.21	-9.75	20.46	46.00	-25.54	
436.43	Peak	27.15	-3.55	23.60	46.00	-22.40	
634.31	Peak	27.90	0.92	28.82	46.00	-17.18	
770.11	Peak	26.14	2.83	28.97	46.00	-17.03	
917.55	Peak	27.61	4.85	32.46	46.00	-13.54	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





:802.11g :2462 MHz :TX CH HIGH


EUT Pol.

:E2 Plan

Test Date :2019-03-18 Temp./Humi. :22/58

Temp./Humi. :22/58 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

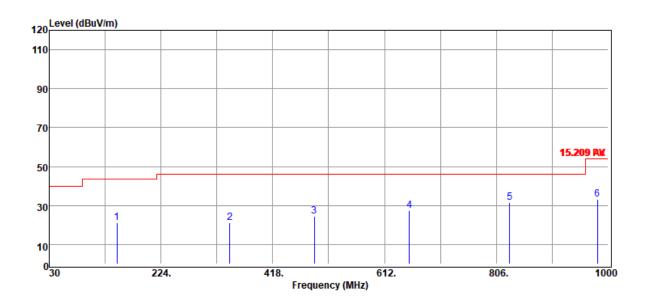

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
147.37	Peak	30.51	-9.36	21.15	43.50	-22.35	
343.31	Peak	27.70	-6.40	21.30	46.00	-24.70	
489.78	Peak	26.59	-2.21	24.38	46.00	-21.62	
654.68	Peak	26.61	0.89	27.50	46.00	-18.50	
829.28	Peak	27.45	4.27	31.72	46.00	-14.28	
981.57	Peak	26.45	6.57	33.02	54.00	-20.98	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



# Radiated Spurious Emission Measurement Result Above 1GHz Data:


**Operation Band** :802.11b **Test Date** :2019-03-15 Fundamental Frequency :2412 MHz Temp./Humi. :24/60 Operation Mode :TX CH LOW Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

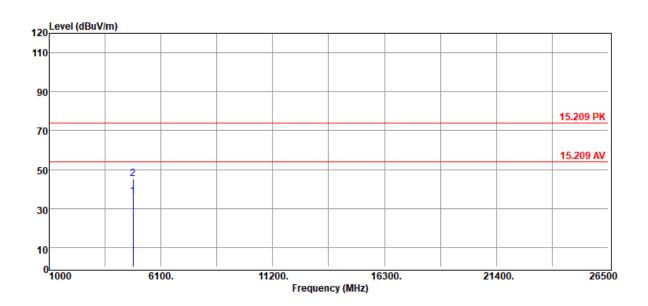

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	32.92	3.02	35.94	54.00	-18.06
4824.00	Peak	42.16	3.02	45.18	74.00	-28.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11b
Fundamental Frequency :2412 MHz
Operation Mode :TX CH LOW
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

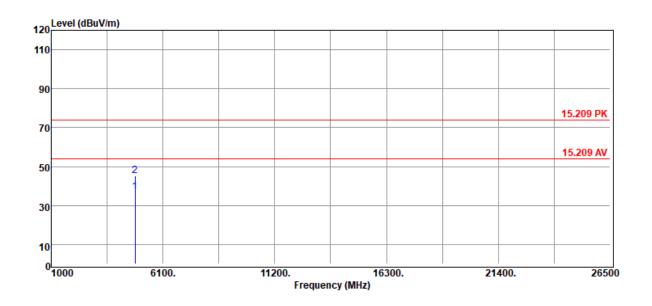

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	33.83	3.02	36.85	54.00	-17.15
4824.00	Peak	42.26	3.02	45.28	74.00	-28.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11b Fundamental Frequency :2437 MHz Operation Mode :TX CH MID EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60


Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

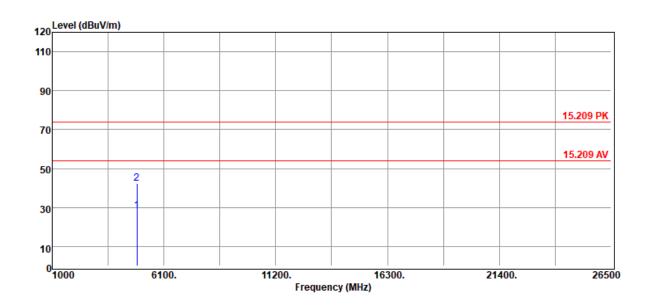

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	24.92	3.36	28.28	54.00	-25.72
4874.00	Peak	39.09	3.36	42.45	74.00	-31.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11b :2437 MHz :TX CH MID

:E2 Plan

**Test Date** :2019-03-15


Temp./Humi. :24/60 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

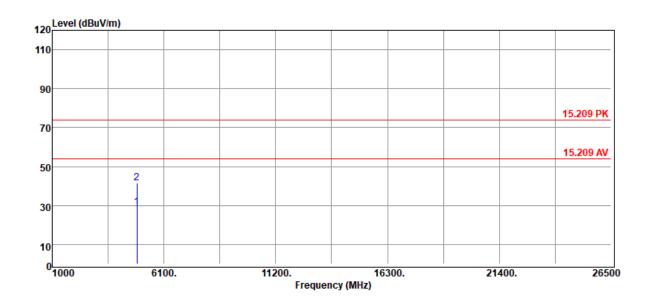

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	25.89	3.36	29.25	54.00	-24.75
4874.00	Peak	38.16	3.36	41.52	74.00	-32.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11b Fundamental Frequency :2462 MHz Operation Mode :TX CH HIGH EUT Pol. :E2 Plan


**Test Date** :2019-03-15 Temp./Humi. :24/60 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

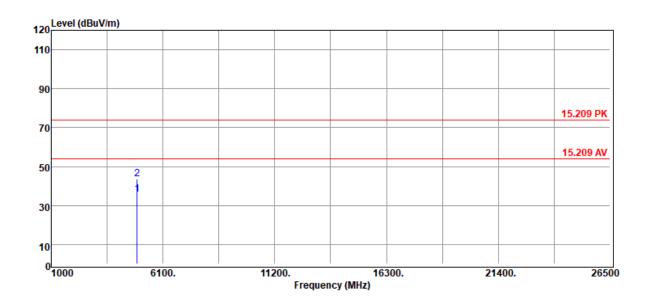

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	31.85	3.93	35.78	54.00	-18.22
4924.00	Peak	39.54	3.93	43.47	74.00	-30.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11b Fundamental Frequency :2462 MHz Operation Mode :TX CH HIGH EUT Pol. :E2 Plan


**Test Date** :2019-03-15 Temp./Humi. :24/60 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

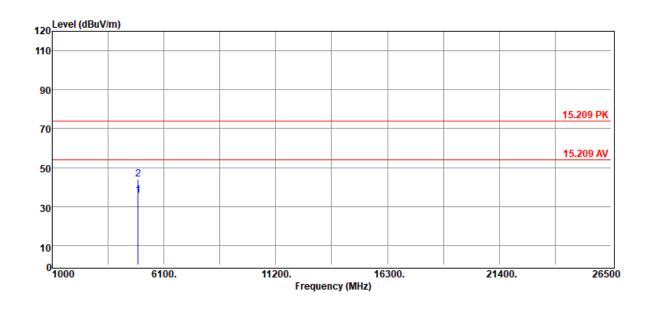

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
4924.00	Average	31.72	3.93	35.65	54.00	-18.35	
4924.00	Peak	40.12	3.93	44.05	74.00	-29.95	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11g Fundamental Frequency :2412 MHz **Operation Mode** :TX CH LOW EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60 Engineer :Jerry


:VERTICAL Measurement Antenna Pol.

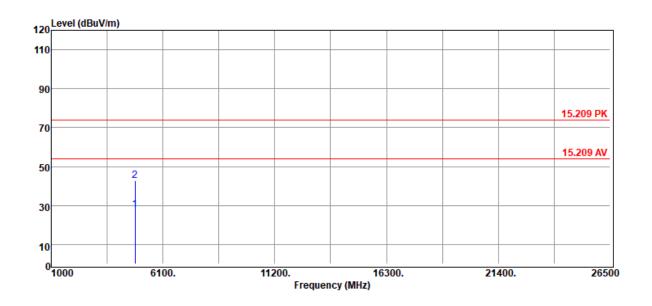

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
4824.00	Average	24.76	3.02	27.78	54.00	-26.22	
4824.00	Peak	39.63	3.02	42.65	74.00	-31.35	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11g
Fundamental Frequency :2412 MHz
Operation Mode :TX CH LOW
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

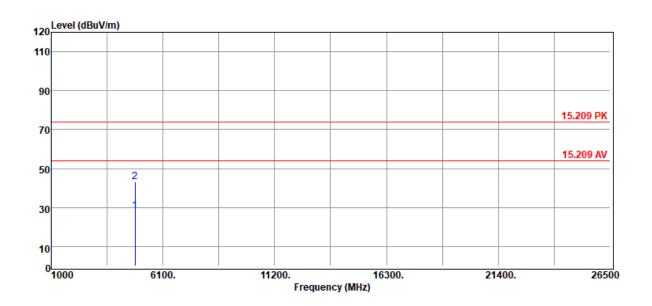

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	25.16	3.02	28.18	54.00	-25.82
4824.00	Peak	40.23	3.02	43.25	74.00	-30.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11g **Fundamental Frequency** :2437 MHz Operation Mode :TX CH MID EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

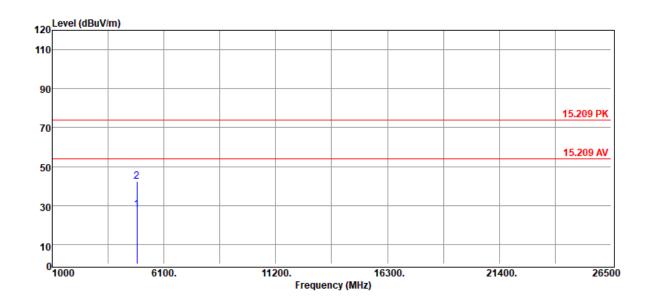


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	24.26	3.36	27.62	54.00	-26.38
4874.00	Peak	39.02	3.36	42.38	74.00	-31.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司






**Operation Band** :802.11g **Fundamental Frequency** :2437 MHz Operation Mode :TX CH MID EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60 Engineer :Jerry


:HORIZONTAL Measurement Antenna Pol.

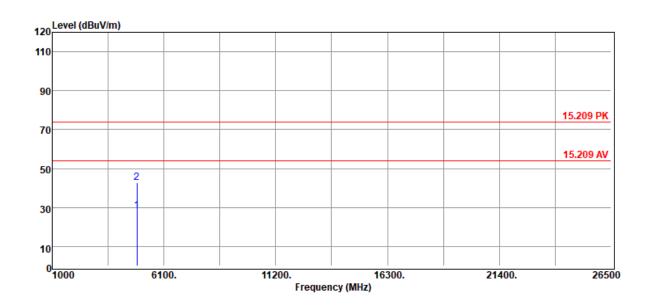

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4874.00	Average	24.80	3.36	28.16	54.00	-25.84
4874.00	Peak	39.23	3.36	42.59	74.00	-31.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11g
Fundamental Frequency :2462 MHz
Operation Mode :TX CH HIGH
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :VERTICAL

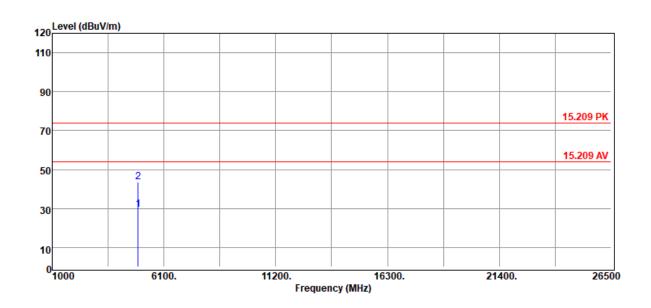

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	25.52	3.93	29.45	54.00	-24.55
4924.00	Peak	39.86	3.93	43.79	74.00	-30.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11g
Fundamental Frequency :2462 MHz
Operation Mode :TX CH HIGH

EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

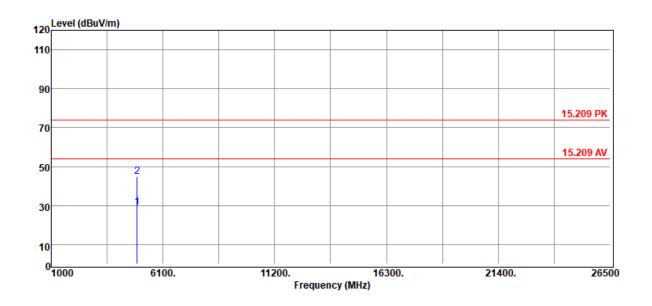

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	25.23	3.93	29.16	54.00	-24.84
4924.00	Peak	40.74	3.93	44.67	74.00	-29.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11n20 Fundamental Frequency :2412 MHz **Operation Mode** :TX CH LOW EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60


Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

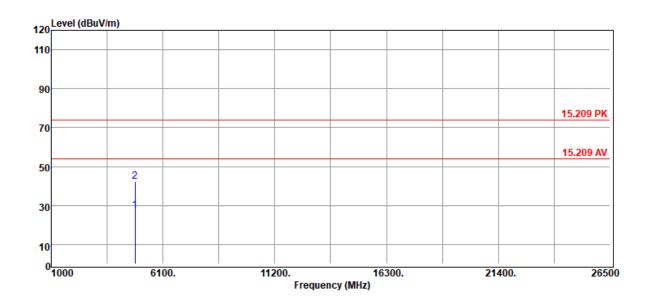

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
4824.00	Average	24.47	3.02	27.49	54.00	-26.51	
4824.00	Peak	39.46	3.02	42.48	74.00	-31.52	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n20
Fundamental Frequency :2412 MHz
Operation Mode :TX CH LOW
EUT Pol. :E2 Plan


Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

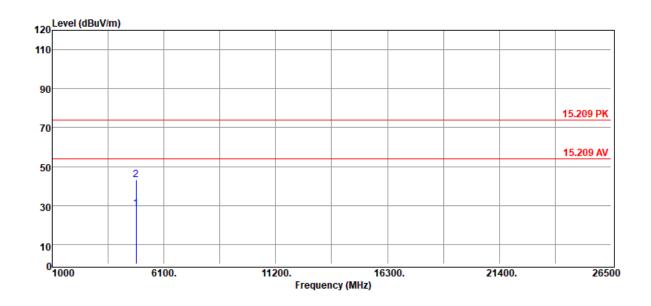

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	25.02	3.02	28.04	54.00	-25.96
4824.00	Peak	40.20	3.02	43.22	74.00	-30.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n20
Fundamental Frequency :2437 MHz
Operation Mode :TX CH MID
EUT Pol. :E2 Plan

Test Date :2019-03-15 Temp./Humi. :24/60

Temp./Humi. :24/60 Engineer :Jerry


Measurement Antenna Pol. :VERTICAL

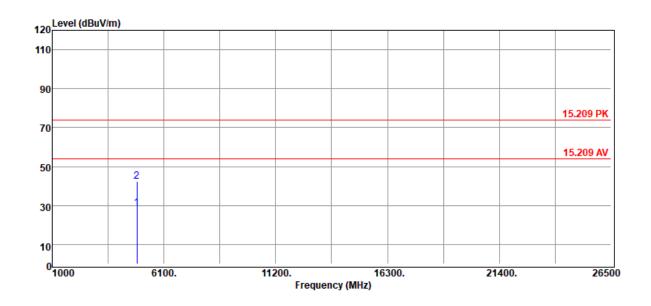

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	25.31	3.36	28.67	54.00	-25.33
4874.00	Peak	38.93	3.36	42.29	74.00	-31.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n20
Fundamental Frequency :2437 MHz
Operation Mode :TX CH MID
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

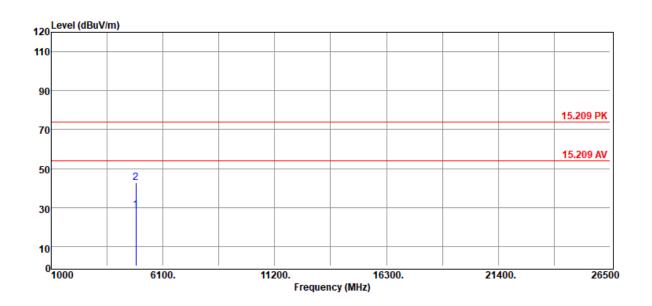

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	25.29	3.36	28.65	54.00	-25.35
4874.00	Peak	39.38	3.36	42.74	74.00	-31.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11n20 Fundamental Frequency :2462 MHz Operation Mode :TX CH HIGH EUT Pol. :E2 Plan


**Test Date** :2019-03-15 Temp./Humi. :24/60 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

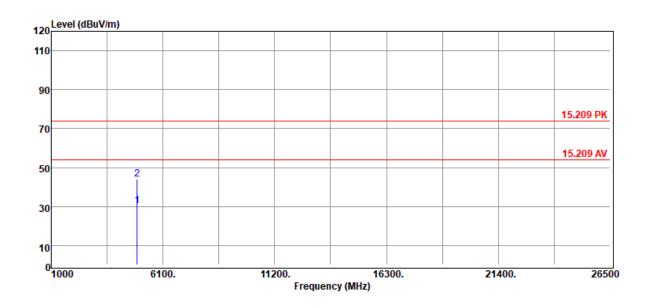

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
4924.00	Average	26.24	3.93	30.17	54.00	-23.83	
4924.00	Peak	40.19	3.93	44.12	74.00	-29.88	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n20
Fundamental Frequency :2462 MHz
Operation Mode :TX CH HIGH
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

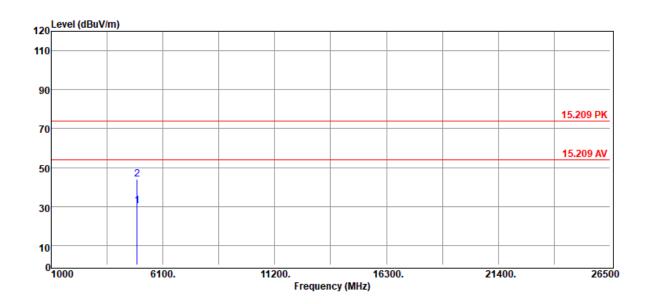

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	26.42	3.93	30.35	54.00	-23.65
4924.00	Peak	40.08	3.93	44.01	74.00	-29.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



:Jerry




**Operation Band** :802.11n40 Fundamental Frequency :2422 MHz **Operation Mode** :TX CH LOW EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60


Engineer

:VERTICAL Measurement Antenna Pol.

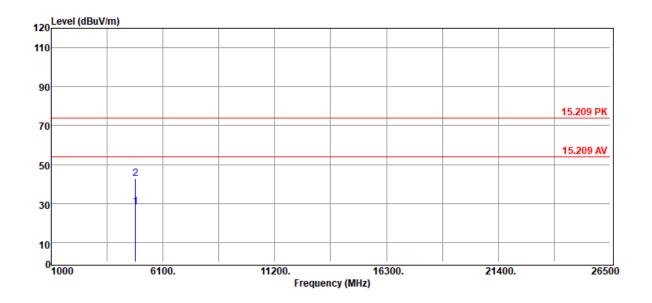

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
4844.00	Average	25.24	3.04	28.28	54.00	-25.72	
4844.00	Peak	39.93	3.04	42.97	74.00	-31.03	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11n40 Fundamental Frequency :2422 MHz Operation Mode :TX CH LOW EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60 Engineer :Jerry


:HORIZONTAL Measurement Antenna Pol.

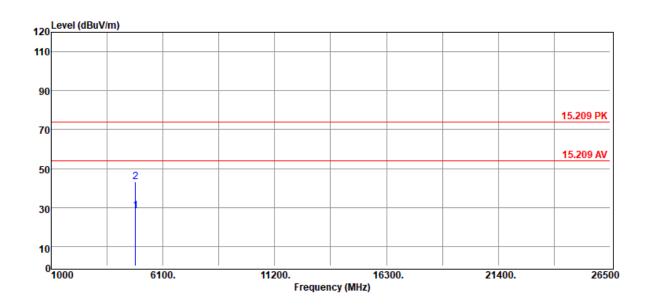

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4844.00	Average	25.18	3.04	28.22	54.00	-25.78
4844.00	Peak	40.24	3.04	43.28	74.00	-30.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Operation Band** :802.11n40 **Fundamental Frequency** :2437 MHz Operation Mode :TX CH MID EUT Pol. :E2 Plan

**Test Date** :2019-03-15

Temp./Humi. :24/60 Engineer :Jerry


:VERTICAL Measurement Antenna Pol.

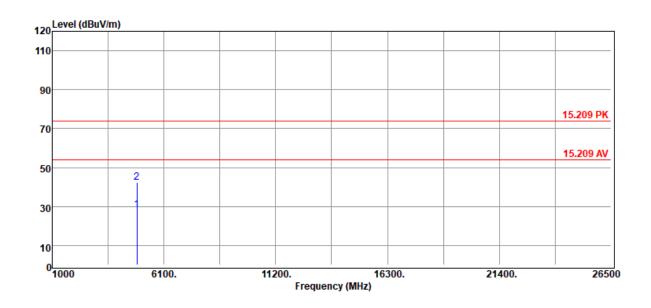

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	24.72	3.36	28.08	54.00	-25.92
4874.00	Peak	39.09	3.36	42.45	74.00	-31.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n40
Fundamental Frequency :2437 MHz
Operation Mode :TX CH MID
EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

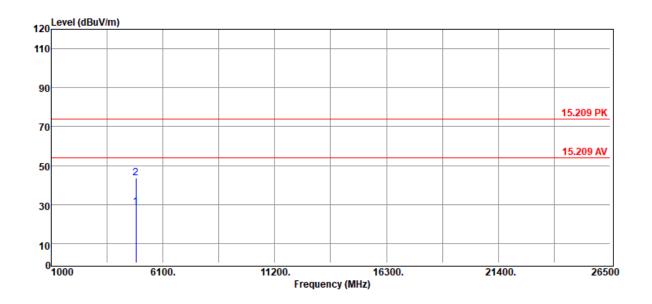

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	25.13	3.36	28.49	54.00	-25.51
4874.00	Peak	40.26	3.36	43.62	74.00	-30.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



:VERTICAL




**Operation Band** :802.11n40 Fundamental Frequency :2452 MHz Operation Mode :TX CH HIGH EUT Pol. :E2 Plan

**Test Date** :2019-03-15 Temp./Humi. :24/60

Engineer :Jerry


Measurement Antenna Pol.

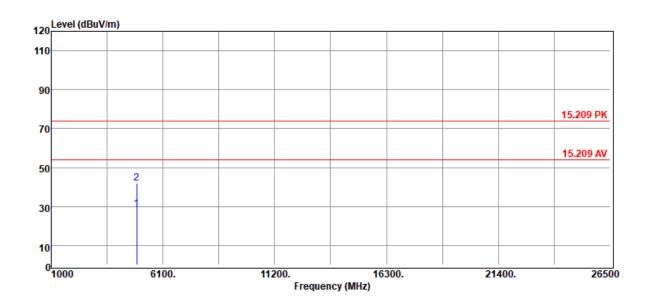

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4904.00	Average	24.80	3.64	28.44	54.00	-25.56
4904.00	Peak	38.45	3.64	42.09	74.00	-31.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :802.11n40
Fundamental Frequency :2452 MHz
Operation Mode :TX CH HIGH

EUT Pol. :E2 Plan

Test Date :2019-03-15
Temp./Humi. :24/60
Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

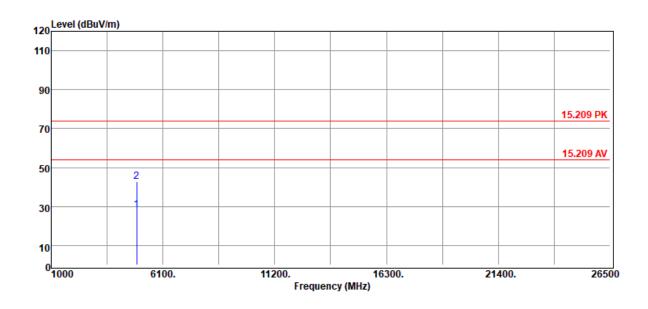

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4904.00	Average	24.50	3.64	28.14	54.00	-25.86
4904.00	Peak	39.13	3.64	42.77	74.00	-31.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



### 12 POWER SPECTRAL DENSITY


## 12.1 Standard Applicable

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 12.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019		
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020		
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020		

# 12.3 Test Set-up



### 12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### 12.5 Measurement Result

POWER DENSITY 802.11b					
Freq.	PSD	Limit	Result		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit		
2412	-12.22	8.00	PASS		
2437	-12.18	8.00	PASS		
2462	-10.68	8.00	PASS		

POWER DENSITY 802.11g					
Freq.	PSD	Limit	بالمديال		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result		
2412	-12.46	8.00	PASS		
2437	-14.08	8.00	PASS		
2462	-13.67	8.00	PASS		

POWER DENSITY 802.11n HT20					POWER DENSITY 802.11n HT40			
Freq.	PSD	Limit	Result	Freq.	PSD	Limit	Result	
(MHz)	(dBm/3kHz)	(dBm/3kHz)		(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit	
2412	-12.93	8.00	PASS	2422	-14.78	8.00	PASS	
2437	-13.76	8.00	PASS	2437	-17.18	8.00	PASS	
2462	-13.56	8.00	PASS	2452	-16.64	8.00	PASS	

Note


Cable Loss 11.00 dB

\*Refer to next page for plots


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




#### FCC\_15\_247\_WLAN\Power Density\_802.11b\_20MHz\_Chain0\_2412MHz

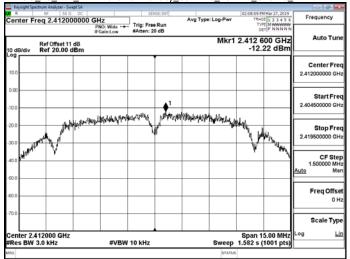


FCC\_15\_247\_WLAN\Power Density\_802.11b\_20MHz\_Chain0\_2437MHz

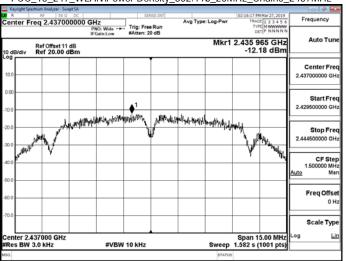


FCC\_15\_247\_WLAN\Power Density\_802.11b\_20MHz\_Chain0\_2462MHz

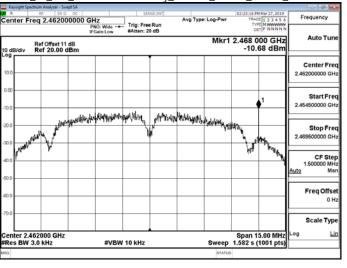


FCC\_15\_247\_WLAN\Power Density\_802.11g\_20MHz\_Chain0\_2412MHz

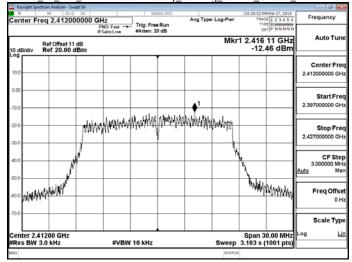

FCC\_15\_247\_WLAN\Power Density\_802.11g\_20MHz\_Chain0\_2437MHz

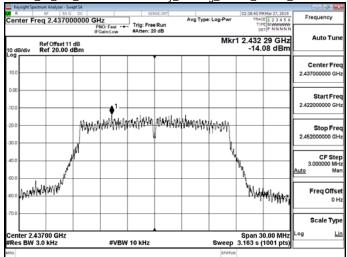

FCC\_15\_247\_WLAN\Power Density\_802.11g\_20MHz\_Chain0\_2462MHz

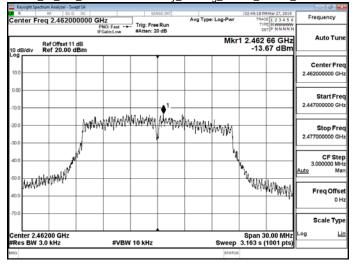


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




#### FCC\_15\_247\_WLAN\Power Density\_802.11n\_20MHz\_Chain0\_2412MHz

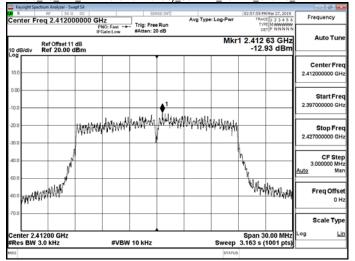


#### FCC\_15\_247\_WLAN\Power Density\_802.11n\_20MHz\_Chain0\_2437MHz

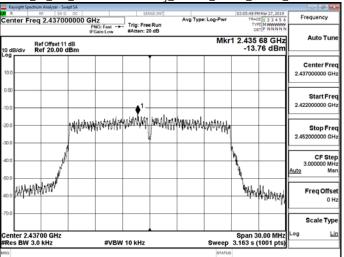


FCC\_15\_247\_WLAN\Power Density\_802.11n\_20MHz\_Chain0\_2462MHz

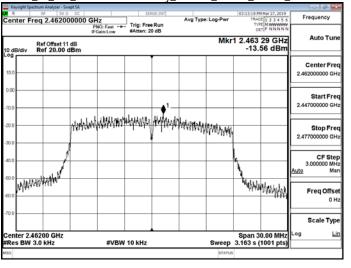


FCC\_15\_247\_WLAN\Power Density\_802.11n\_40MHz\_Chain0\_2422MHz

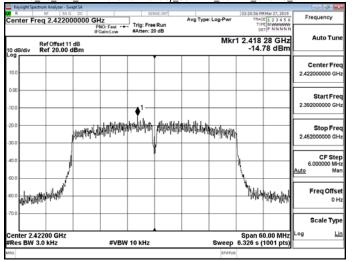

FCC\_15\_247\_WLAN\Power Density\_802.11n\_40MHz\_Chain0\_2437MHz

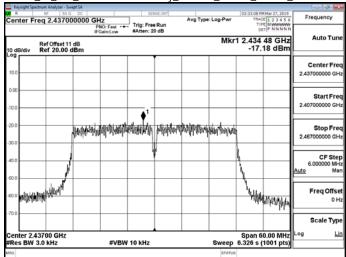

FCC\_15\_247\_WLAN\Power Density\_802.11n\_40MHz\_Chain0\_2452MHz

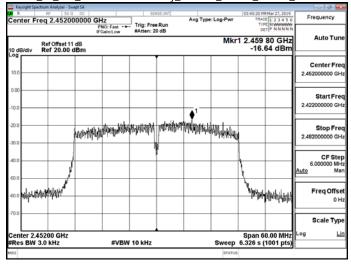

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



# 13 ANTENNA REQUIREMENT

# 13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

#### 13.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。