

EMC TEST REPORT**FCC 47 CFR Part 15B, ISED ICES-003 Issue 6**

Report Reference No	G0M-1901-8009-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 ISED Testing Laboratory site: 3470A-2
Applicant	Piavita AG
Address	Ringbahnstrasse 18 12099 Berlin GERMANY
Test Specification	
Standard	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Basestation stationary
Model(s)	B02S01
Additional Model(s)	None
Brand Name(s)	PiaVita
Hardware Version(s)	Version 02
Software Version(s)	B02I05F00
FCC-ID	2ASL2-PB9
IC	N/A
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Date of receipt of test item	2019-02-15	
Report:		
Compiled by	Matthias Handrik	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
Approved by (+ signature) (Deputy Head of Lab)	Jens Marquardt	
Date of Issue	2019-03-12	
Total number of pages	31	
General Remarks:		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
Additional Comments:		

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T_{NOM}	Nominal operating temperature
V_{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-03-12	Initial Release	

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	10
1.4	Support Equipment.....	12
1.5	Operational Modes.....	13
1.6	EUT Configuration.....	14
1.7	Sample emission level calculation.....	15
2	Result Summary.....	16
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	17
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	27

1 Equipment (Test Item) Under Test


Description	Basesation stationary	
Model	B02S01	
Additional Model(s)	None	
Brand Name(s)	PiaVita	
Serial Number(s)	unspecified	
Hardware Version(s)	Version 02	
Software Version(s)	B02I05F00	
FCC-ID	2ASL2-PB9	
IC	N/A	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	2400	
Radio Module	Type	Bluetooth module
	Model	SX-SDPAC
	Manufacturer	Silex Technology
	FCC-ID	N/A
	IC	N/A
Supply Voltage	V_{NOM}	5V DC via 120V AC (AC/DC adaptor)
AC/DC-Adaptor	Model	K103-0502100US
	Vendor	Merryking
	Input	100-240V AC
	Output	5V DC
Manufacturer	PiaVita AG Ringbahnstrasse 18 12099 Berlin GERMANY	

1.1 Equipment Ports

Name	Type	Attributes	Comment
Ethernet	IO	Count: 1 Direction: IO Service only: No	
USB	IO	Count: 1 Direction: IO Service only: No	
Power	AC	Count: 1 Direction: In Service only: No	
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		



1.2 Equipment Photos - Internal

EUT PCB I TOP

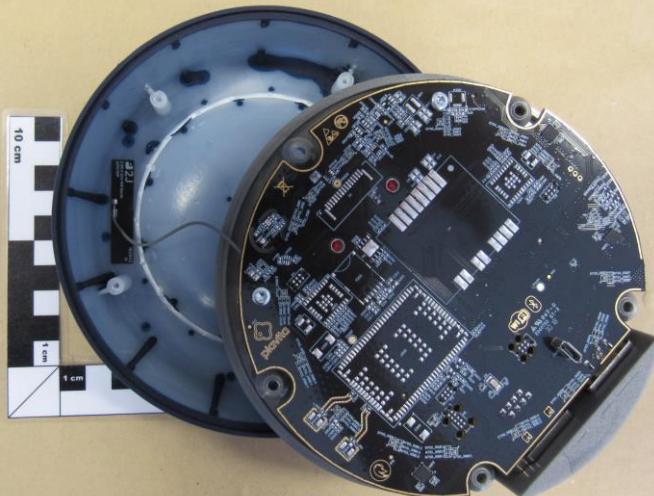


EUT PCB I BOTTOM

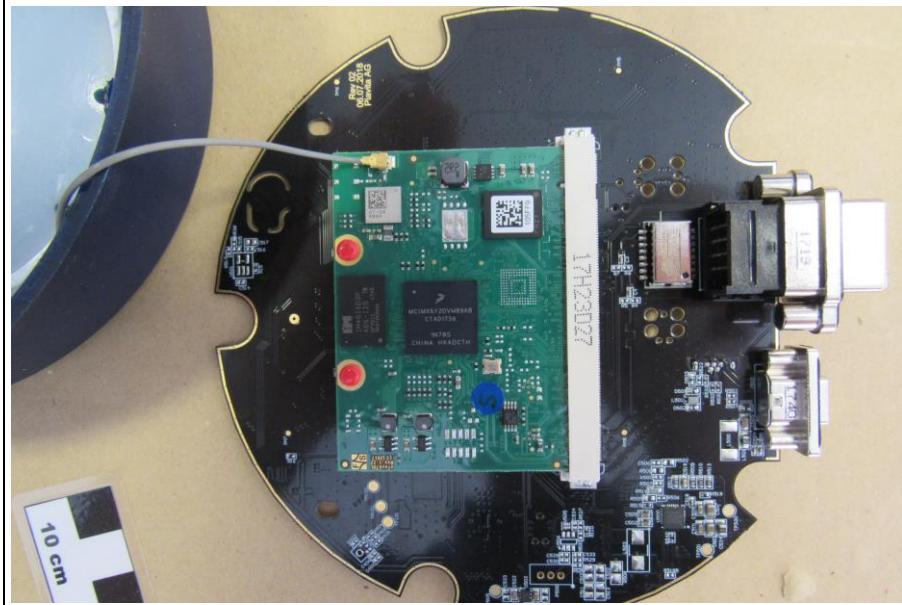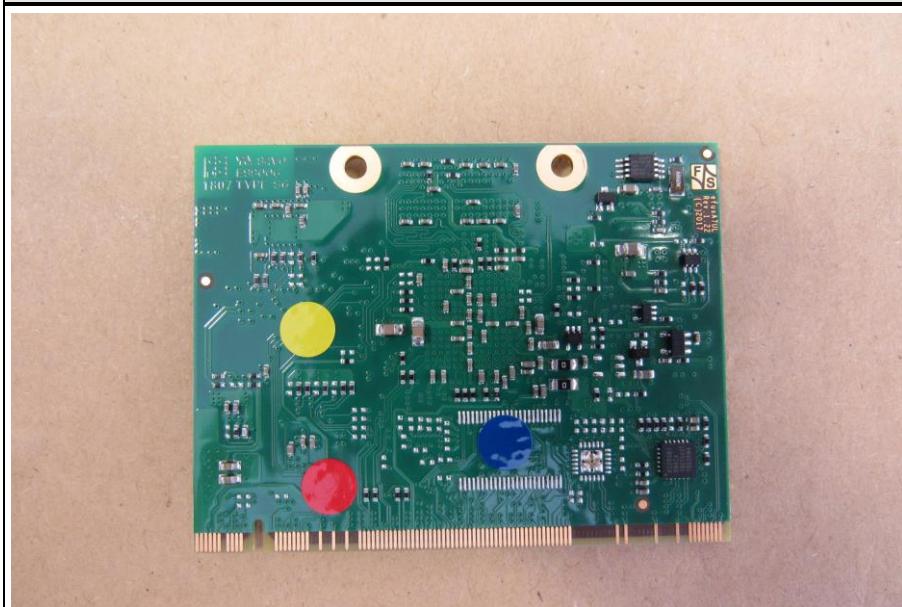

EUT PCB II TOP**EUT PCB II BOTTOM**

1.3 Equipment Photos - External

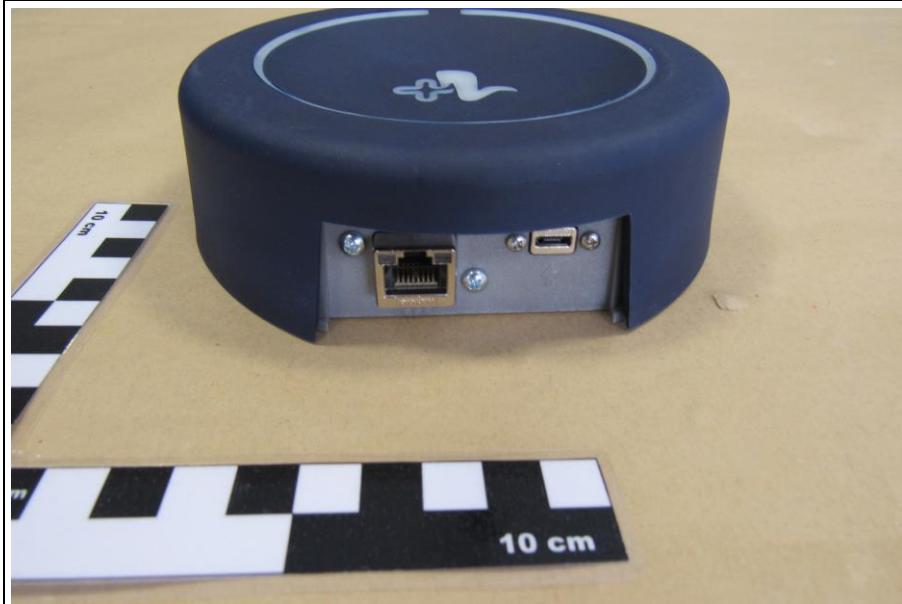

EUT FRONT**AC/DC adaptor label**

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Laptop	Lenovo	X250	
AE	Piavita measuring device	Piavita AG	PAG1803VD01S02	Companion device
AE	Ethernet switch	Netgear	FS108P	
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
1	Measurement / Data Transfer mode: Companion Measurement Device sending data through the EUT via Bluetooth Low Energy. The EUT sent the data to the Cloud Server through Ethernet connection.
Comment:	

1.6 EUT Configuration

Configuration #	Description
1	<p>EUT powered via AC/DC adaptor.</p> <p>EUT is connected via BLE to companion device. The companion device is placed inside the measurement chamber (corner).</p> <p>EUT is connected via Ethernet cable to Ethernet switch.</p> <p>Laptop is also connected to Ethernet switch.</p> <p>Ethernet switch is connected to the Internet.</p> <p>Laptop and Ethernet switch is placed outside the measurement chamber.</p> <p>Measurement data visualized on Laptop in browser window.</p>
Comment:	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dB μ V. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF +21.5 dB μ V + 26 dB/m	= Net Reading = 47.5 dB μ V/m	:	Net reading - FCC limit 47.5 dB μ V/m - 57.0 dB μ V/m	= Margin = -9.5 dB
--	--------------------------------------	---	--	-----------------------

2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	PASS	
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	2400
Measurement range	30 MHz to 13000 MHz
Temperature [°C]	21
Humidity [%]	29
Operator	Matthias Handrik
Date	2019-02-20

2.1.2 Setup

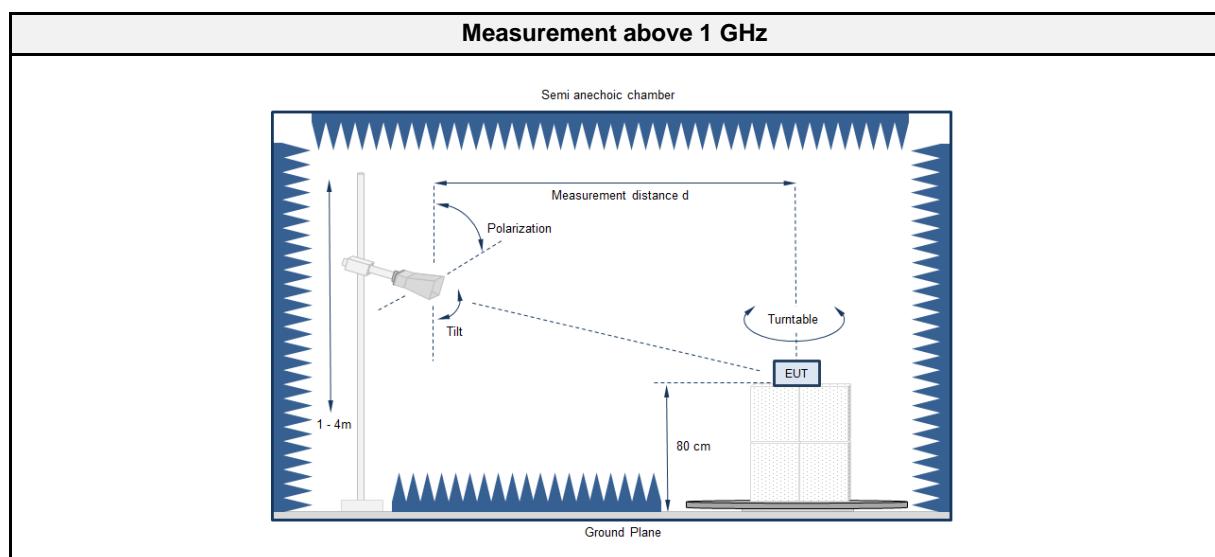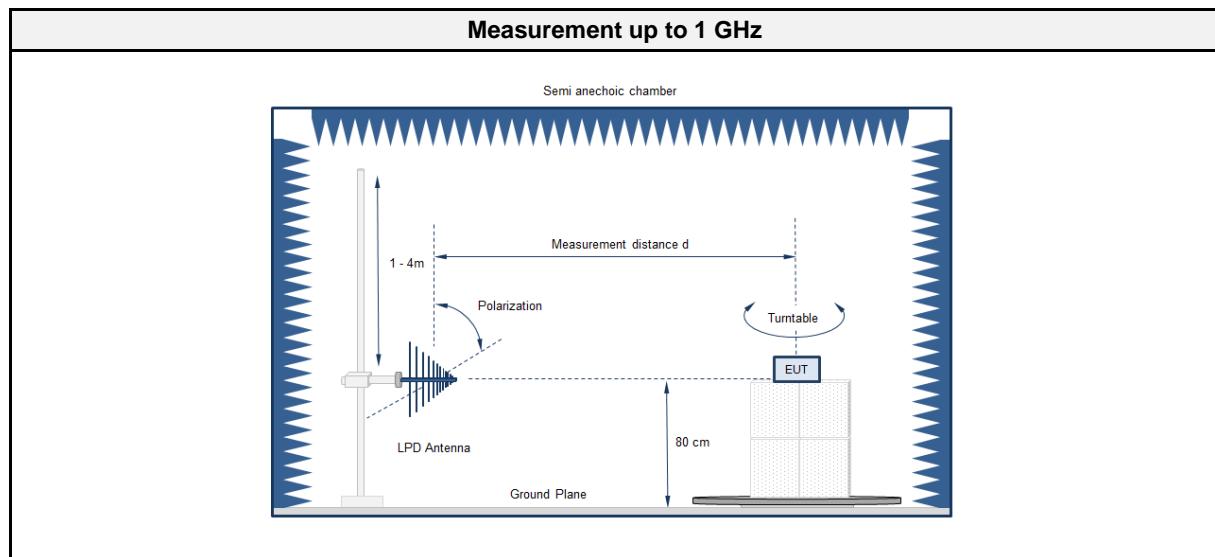

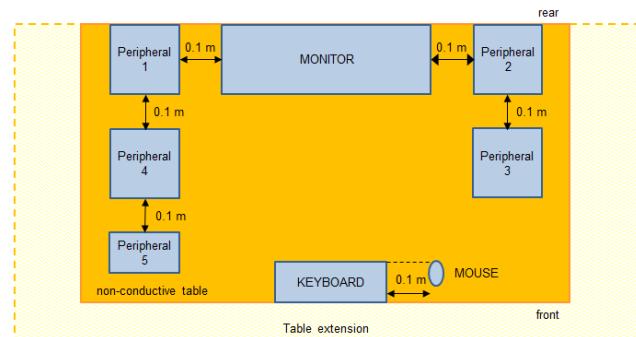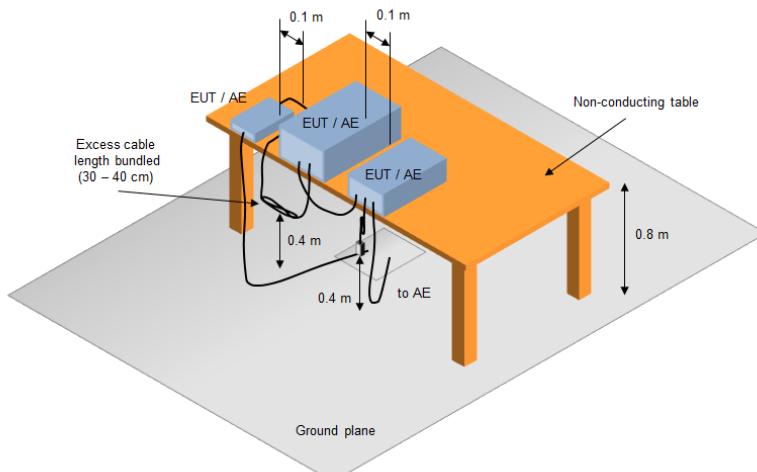Equipment placement - Table top

Test Setup

2.1.3 Equipment
Test Software

Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2018-08	2019-08
Biconical Antenna	R&S	HK 116	EF00186	2018-03	2020-03
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
Horn antenna	Schwarzbeck	BBHA 9120D (1-18GHz)	EF00018	2016-09	2019-09

2.1.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non-conductive table at a height of 0.8m. 2. The EUT and support equipment, if needed, were set up to simulate typical usage. 3. Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage. 4. The antenna was placed at a distance of 3 or 10 m. 5. The received signal was monitored at the measurement receiver. 6. This procedure has to be performed in both antenna polarizations, horizontal and vertical. 7. The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

Final measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver. 2. A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast. 3. The EUT and cable arrangement were based on the exploratory measurement results. 4. Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded. 5. The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits



Class B @ 3 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54

Class A @ 10 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5

2.1.6 Results

Test Results			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	

2.1.7 Setup Photos

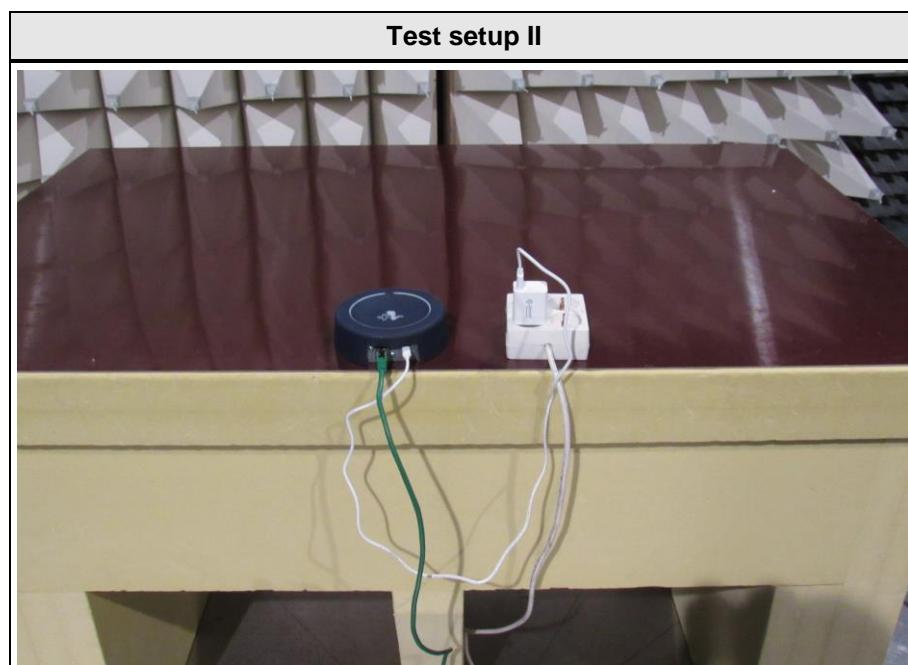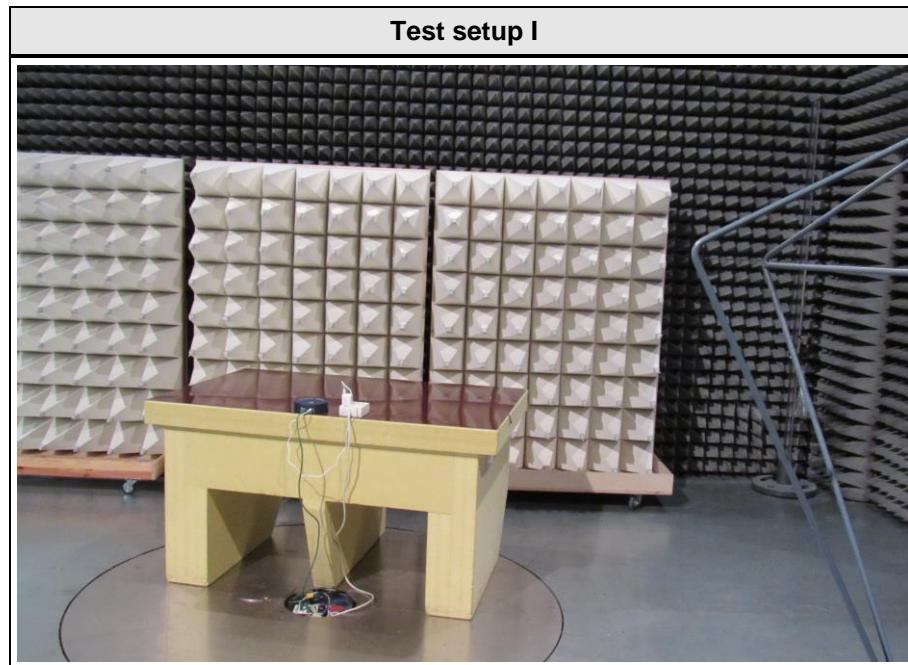


2.1.8 Records

Radiated emissions under normal conditions according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
 EUT Name: Basestation
 Model: B02S01
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Thom: 21°C, Unom: 120V AC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: mode# 1
 Test Date: 2019-02-20
 Note:

Index 3

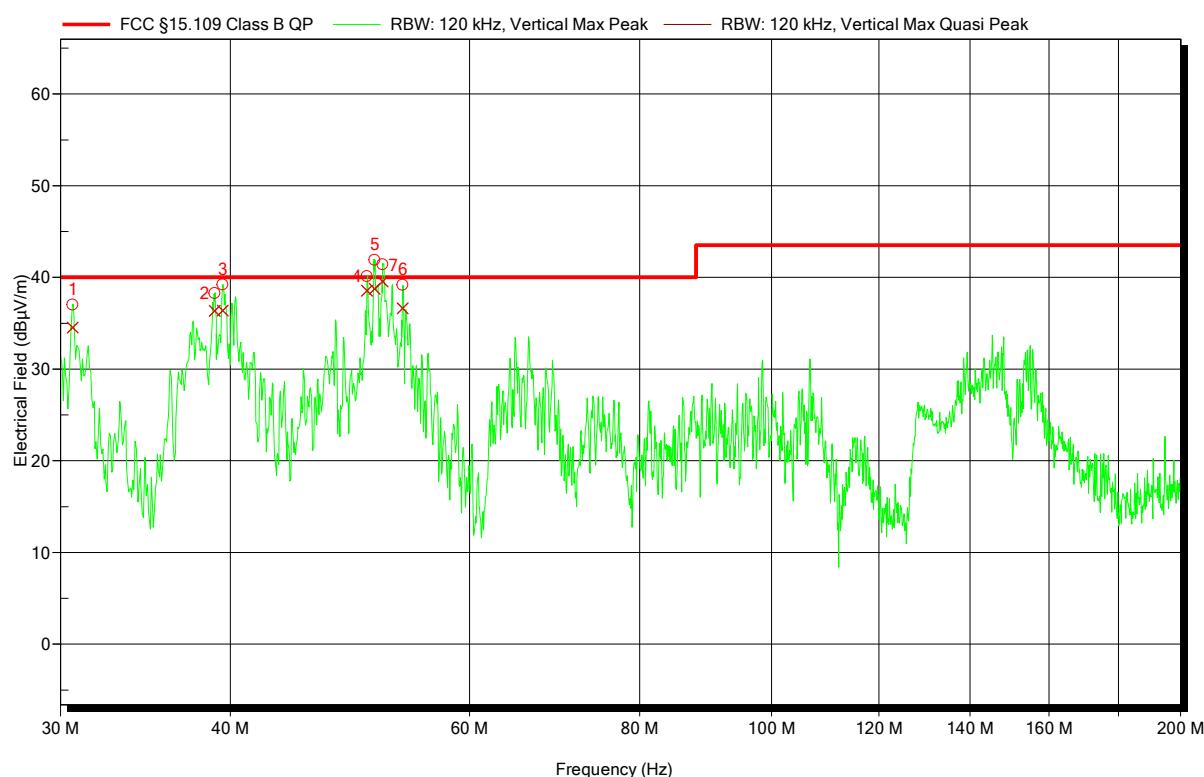


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	30.631 MHz	34.53 dB μ V/m	40 dB μ V/m	-5.47 dB	Pass	0 Degree	1 m
2	38.959 MHz	36.33 dB μ V/m	40 dB μ V/m	-3.67 dB	Pass	0 Degree	1 m
3	39.488 MHz	36.39 dB μ V/m	40 dB μ V/m	-3.61 dB	Pass	0 Degree	1 m
4	50.429 MHz	38.53 dB μ V/m	40 dB μ V/m	-1.47 dB	Pass	0 Degree	1 m
5	51.089 MHz	38.76 dB μ V/m	40 dB μ V/m	-1.24 dB	Pass	0 Degree	1 m
6	53.563 MHz	36.61 dB μ V/m	40 dB μ V/m	-3.39 dB	Pass	0 Degree	1 m
7	51.78 MHz	39.57 dB μ V/m	40 dB μ V/m	-0.43 dB	Pass	0 Degree	1 m

Radiated emissions under normal conditions according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
EUT Name: Basestation
Model: B02S01
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 21°C, Unom: 120V AC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3m
Mode: mode# 1
Test Date: 2019-02-20
Note:

Index 4

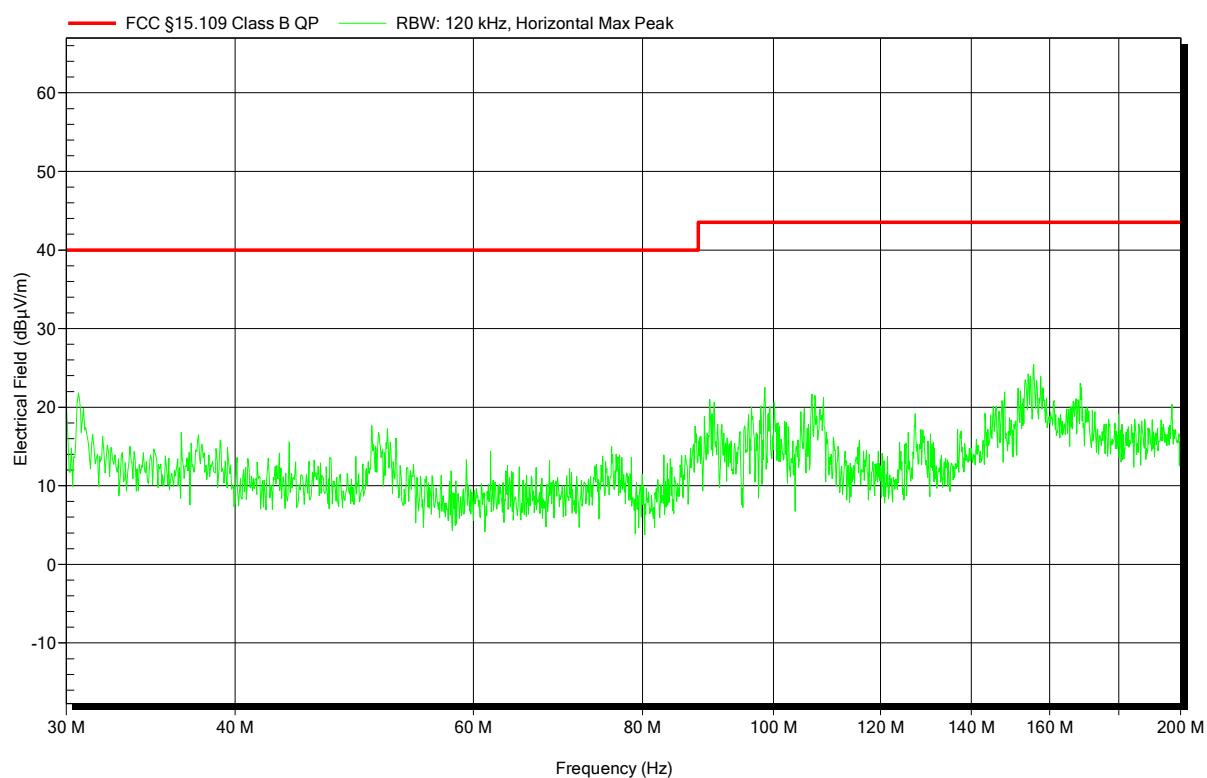

Test Report No.: G0M-1901-8009-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
EUT Name: Basestation
Model: B02S01
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 21°C, Unom: 120V AC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3m
Mode: mode# 1
Test Date: 2019-02-20
Note:

Index 5

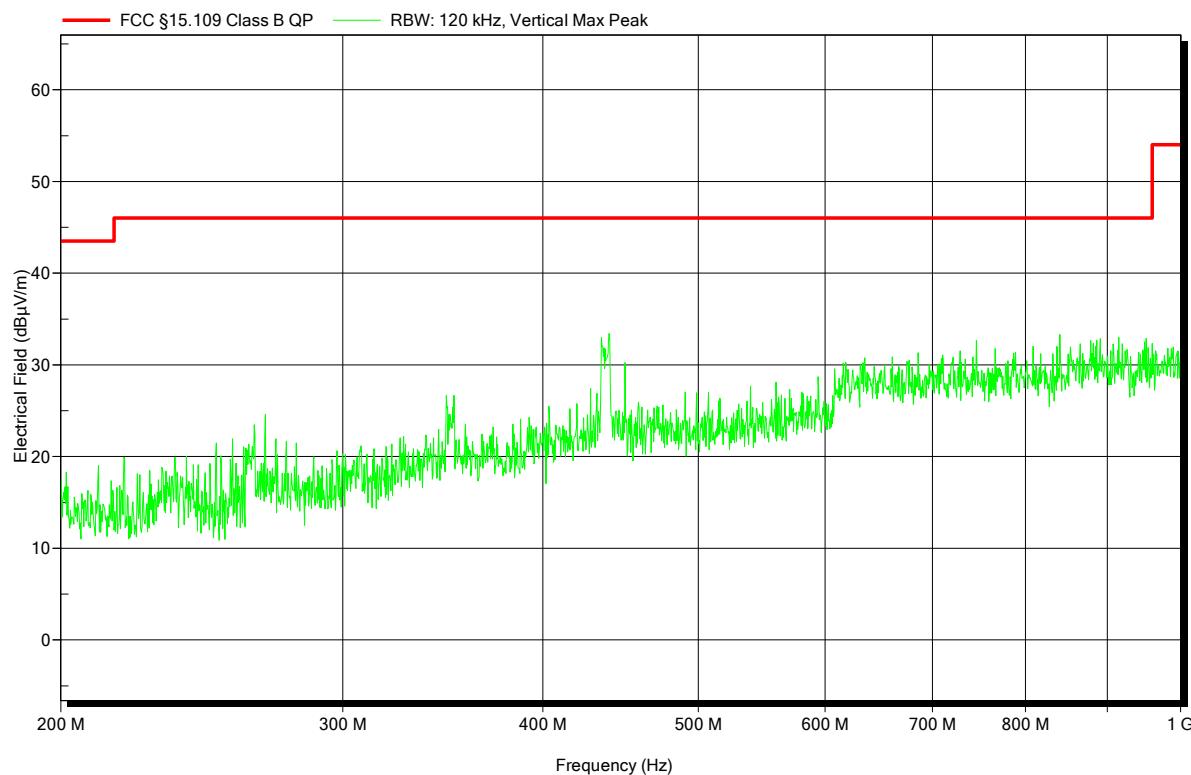


Radiated emissions under normal conditions according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
EUT Name: Basestation
Model: B02S01
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 21°C, Unom: 120V AC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3m
Mode: mode# 1
Test Date: 2019-02-20
Note:

Index 6

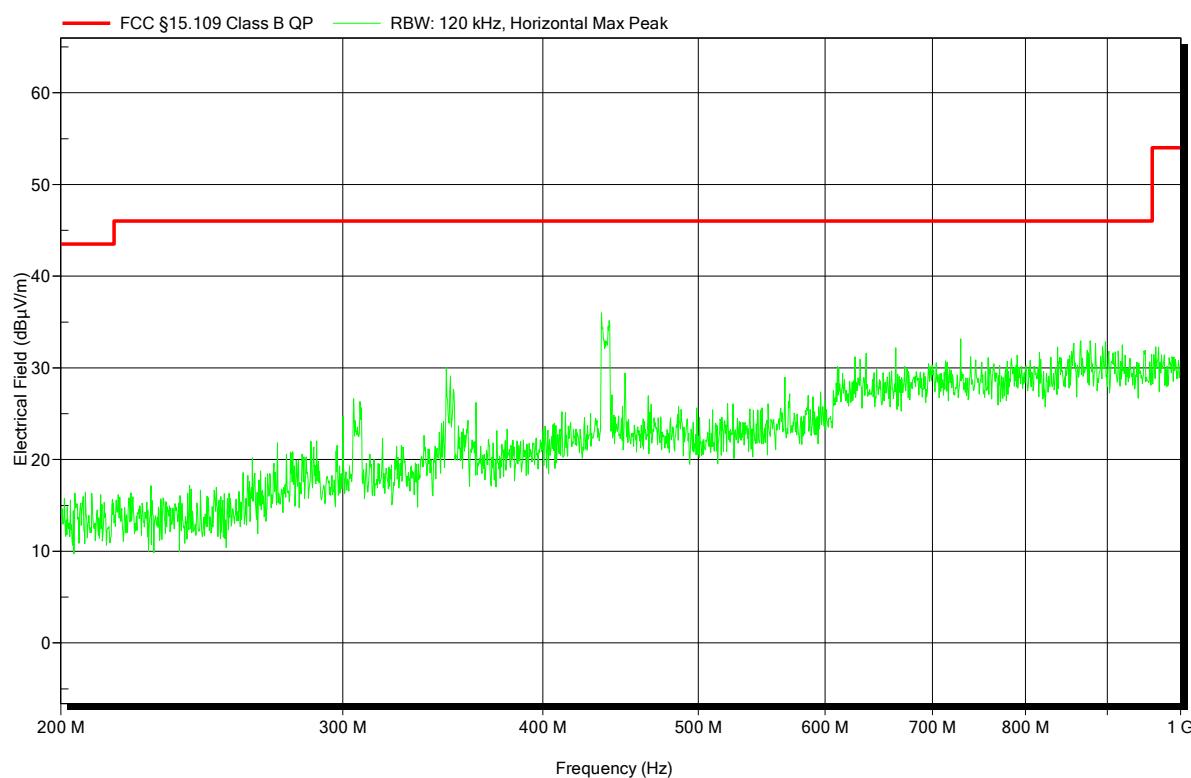

Test Report No.: G0M-1901-8009-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
 EUT Name: Basestation
 Model: B02S01
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 120V AC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: mode# 1
 Test Date: 2019-02-20
 Note:

Index 7

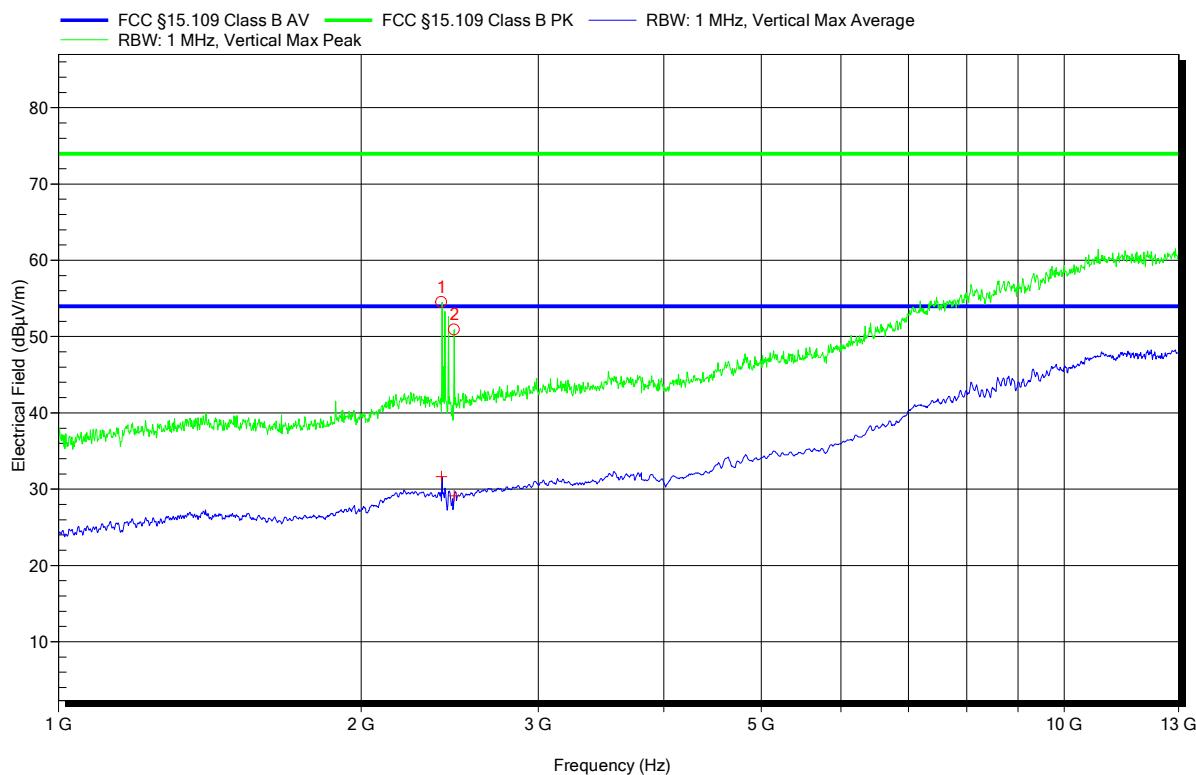


Peak Number Frequency Peak Angle Height
 1 2.404 GHz BLE carrier
 2 2.474 GHz

Radiated emissions under normal conditions according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
EUT Name: Basestation
Model: B02S01
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 21°C, Unom: 120V AC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3m
Mode: mode# 1
Test Date: 2019-02-20
Note:

Index 8

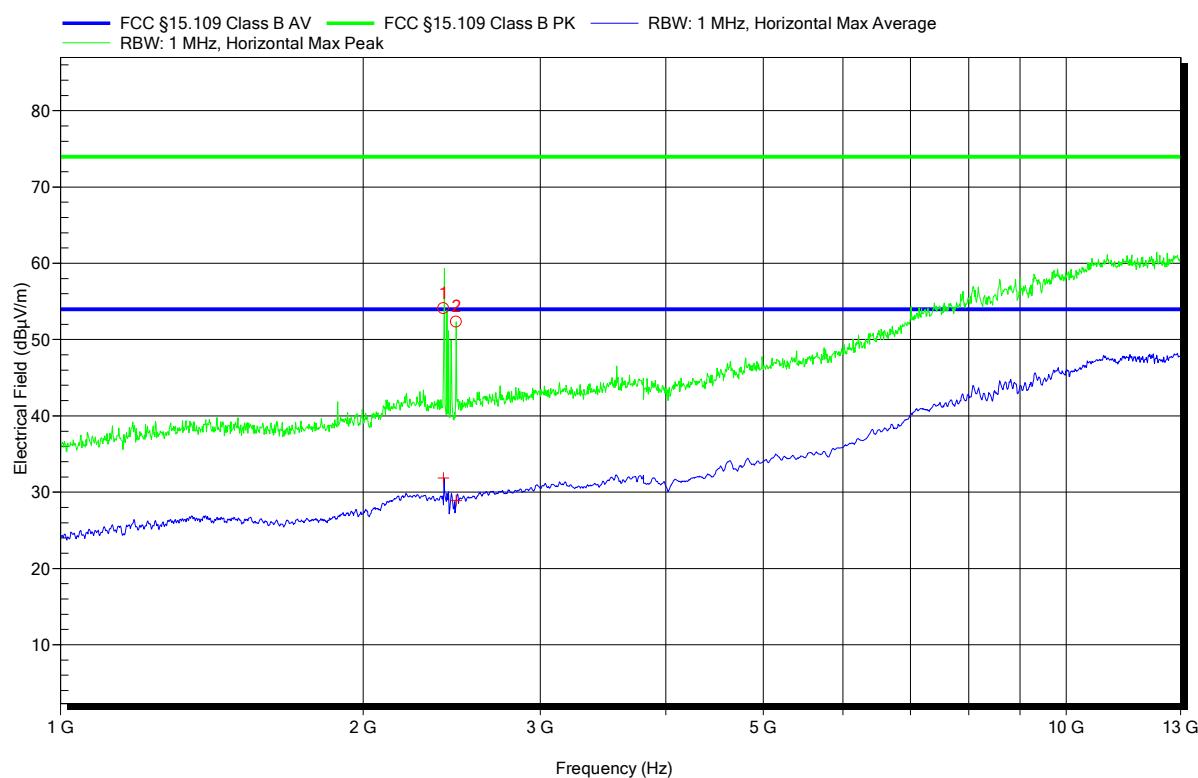

Test Report No.: G0M-1901-8009-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany



Page 26 of 31

2.2 Test Conditions and Results - Conducted emissions acc. to ANSI C63.4

2.2.1 Information

Test Information	
Reference	FCC 15.107, ICES-003, 8, 6.2
Reference method	ANSI C63.4:2014 Section 12
Measurement range	150 kHz to 30 MHz
Equipment class	Class B
Equipment type	Table top
Temperature [°C]	22
Humidity [%]	29
Operator	Matthias Handrik
Date	2019-02-19

2.2.2 Setup

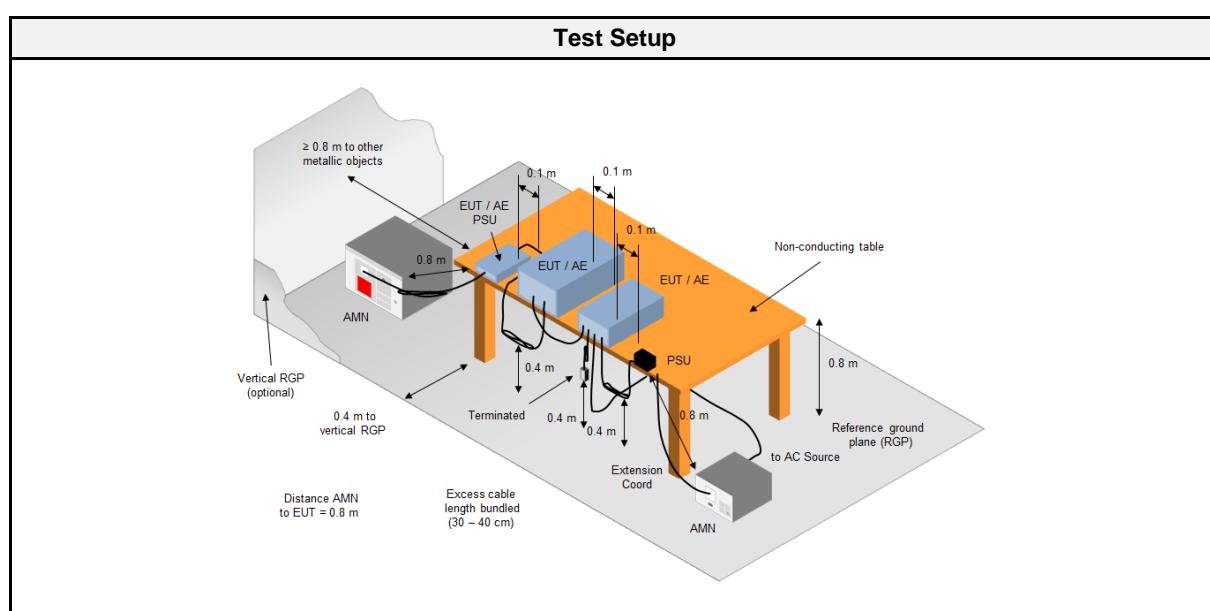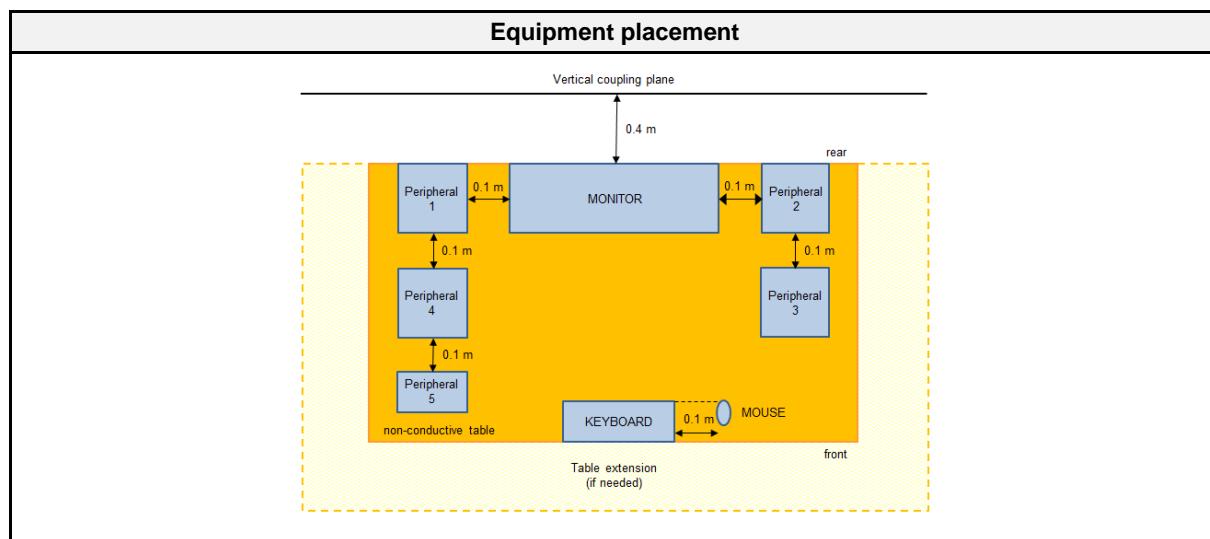

2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2017-01	2019-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2018-07	2019-07
EMI Test Receiver	R&S	ESR 7	EF00943	2018-07	2019-07

2.2.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1) 2. The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN. 3. The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length). 4. The LISN measurement port was connected to a measurement receiver 5. I/O cables were bundled not longer than 0.4 m 6. Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor 7. To maximize the emissions the cable positions were manipulated 8. The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Final measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1) 2. The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN. 3. The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length). 4. The LISN measurement port was connected to a measurement receiver 5. The EUT and cable arrangement were based on the exploratory measurement results 6. The test data of the worst-case conditions were recorded and shown on the next pages

2.2.5 Limits


Class B		
Frequency [MHz]	Quasi-peak Limit [dB μ V]	Average Limit [dB μ V]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

2.2.6 Results

AC power line conducted emissions					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
Power	AMN	1	1	PASS	

2.2.7 Setup Photos

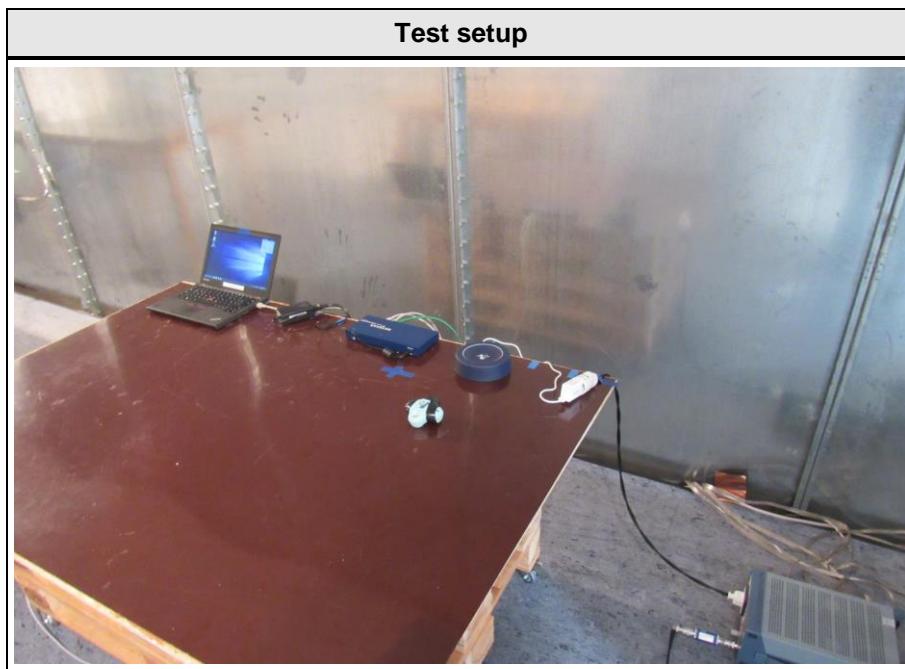


2.2.8 Records

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
 EUT Name: Basestation
 Model: B02S01
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $U_{nom}: 120\text{V AC}$
 LISN: ESH3-Z5 (N)
 Mode: mode# 1
 Test Date: 2019-02-19
 Note:

Index 1

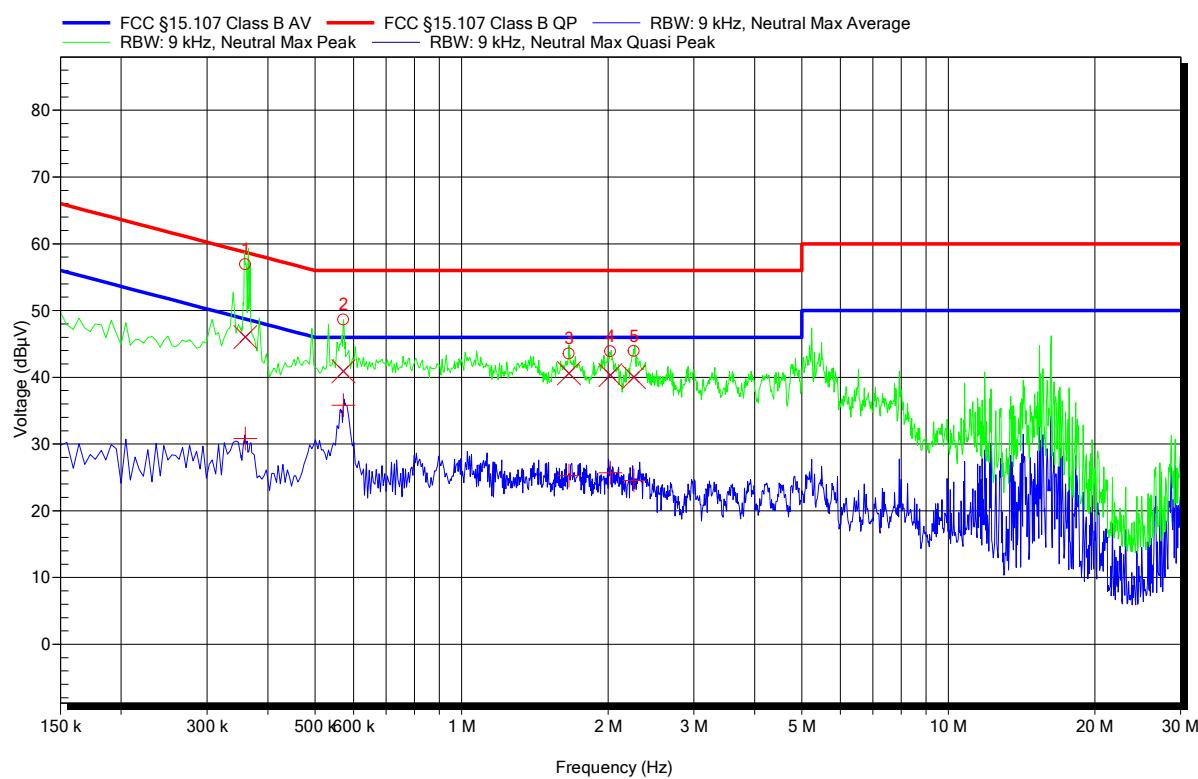

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	359.7 kHz	46 dB μ V	58.74 dB μ V	-12.73 dB	Pass
2	571.65 kHz	40.91 dB μ V	56 dB μ V	-15.09 dB	Pass
3	1.662 MHz	40.63 dB μ V	56 dB μ V	-15.37 dB	Pass
4	2.022 MHz	40.33 dB μ V	56 dB μ V	-15.67 dB	Pass
5	2.26 MHz	40.05 dB μ V	56 dB μ V	-15.95 dB	Pass


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	359.7 kHz	30.85 dB μ V	48.74 dB μ V	-17.89 dB	Pass
2	571.65 kHz	35.81 dB μ V	46 dB μ V	-10.19 dB	Pass
3	1.662 MHz	25.24 dB μ V	46 dB μ V	-20.76 dB	Pass
4	2.022 MHz	25.69 dB μ V	46 dB μ V	-20.31 dB	Pass
5	2.26 MHz	24.56 dB μ V	46 dB μ V	-21.44 dB	Pass

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1901-8009

Applicant: Piavita AG
 EUT Name: Basestation
 Model: B02S01
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120V AC
 LISN: ESH3-Z5 (L)
 Mode: mode# 1
 Test Date: 2019-02-19
 Note:

Index 2

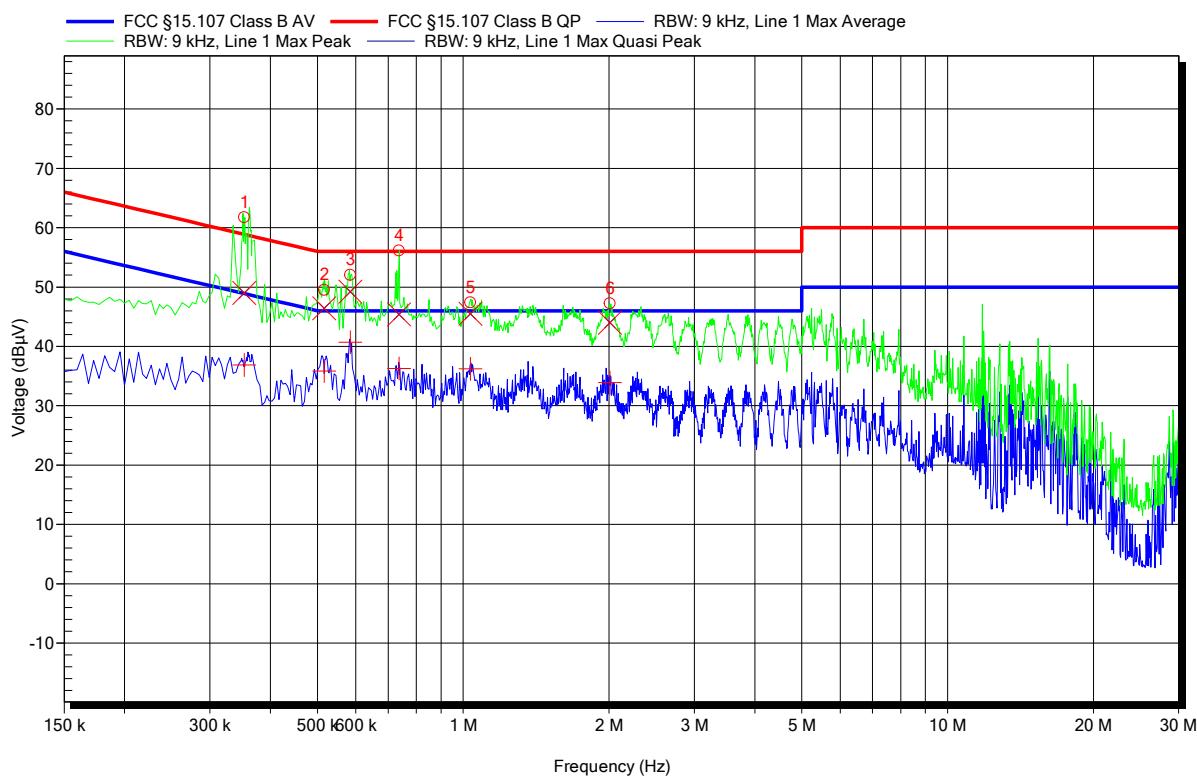

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	353.4 kHz	49.03 dB μ V	58.88 dB μ V	-9.85 dB	Pass
2	516.3 kHz	46.44 dB μ V	56 dB μ V	-9.56 dB	Pass
3	585.15 kHz	49.2 dB μ V	56 dB μ V	-6.8 dB	Pass
4	736.8 kHz	45.37 dB μ V	56 dB μ V	-10.63 dB	Pass
5	1.035 MHz	45.52 dB μ V	56 dB μ V	-10.48 dB	Pass
6	2.008 MHz	43.97 dB μ V	56 dB μ V	-12.03 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	353.4 kHz	36.85 dB μ V	48.88 dB μ V	-12.04 dB	Pass
2	516.3 kHz	35.83 dB μ V	46 dB μ V	-10.17 dB	Pass
3	585.15 kHz	40.69 dB μ V	46 dB μ V	-5.31 dB	Pass
4	736.8 kHz	36.28 dB μ V	46 dB μ V	-9.72 dB	Pass
5	1.035 MHz	36.23 dB μ V	46 dB μ V	-9.77 dB	Pass
6	2.008 MHz	33.89 dB μ V	46 dB μ V	-12.11 dB	Pass

Test Report No.: G0M-1901-8009-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany