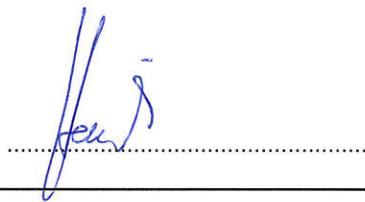


EMC TEST REPORT**FCC 47 CFR Part 15B, ISED ICES-003 Issue 6**

Report Reference No	G0M-1902-8075-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 ISED Testing Laboratory site: 3470A-2
Applicant	Piavita AG
Address	Technoparkstrasse 1 8005 Zurich SWITZERLAND
Test Specification	
Standard	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Equine vital signs wireless monitoring device
Model(s)	Piavita Measuring device
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	V04
Software Version(s)	2
FCC-ID	2ASL2-PD9
IC	N/A
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Date of receipt of test item	2019-03-11	
Report:		
Compiled by	Matthias Handrik	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
Approved by (+ signature) (Deputy Head of Lab)	Jens Marquardt	
Date of Issue	2019-03-22	
Total number of pages	31	
General Remarks:		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
Additional Comments:		

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T_{NOM}	Nominal operating temperature
V_{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-03-22	Initial Release	

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	11
1.4	Support Equipment.....	12
1.5	Operational Modes.....	13
1.6	EUT Configuration.....	14
1.7	Sample emission level calculation.....	15
2	Result Summary.....	16
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	17
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	27



1 Equipment (Test Item) Under Test


Description	Equine vital signs wireless monitoring device	
Model	Piavita Measuring device	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	unspecified	
Hardware Version(s)	V04	
Software Version(s)	2	
FCC-ID	2ASL2-PD9	
IC	N/A	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	2500	
Radio Module	Type	Bluetooth Low Energy module
	Model	nRF52840
	Manufacturer	Nordic Semiconductor
	FCC-ID	Unspecified
	IC	Unspecified
Supply Voltage	V _{NOM}	3.7 VDC
AC/DC-Adaptor	None	
Manufacturer	Piavita AG Technoparkstrasse 1 8005 Zurich SWITZERLAND	


1.1 Equipment Ports

Name	Type	Attributes	Comment
-	-	-	-
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		

1.2 Equipment Photos - Internal

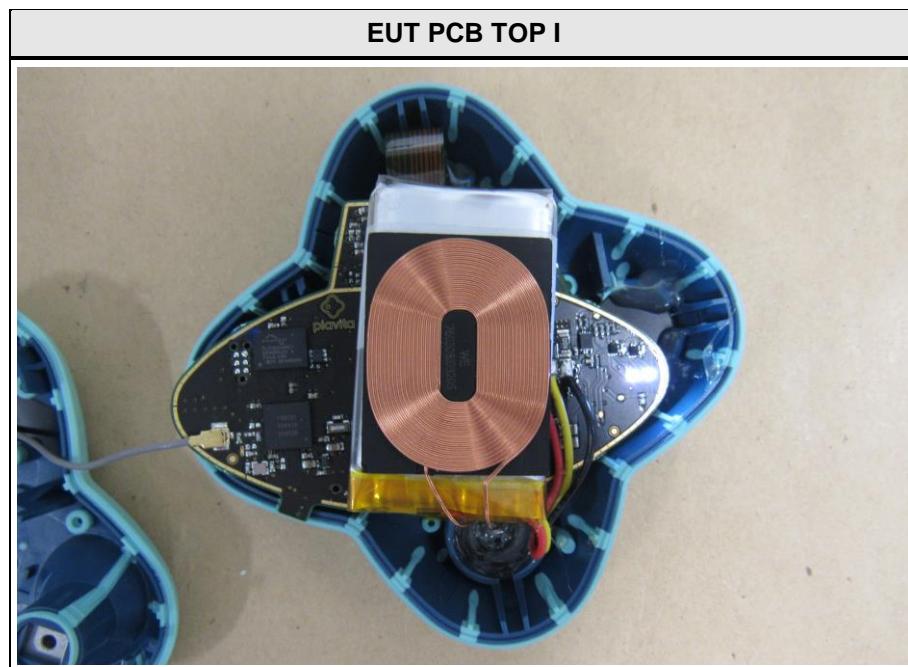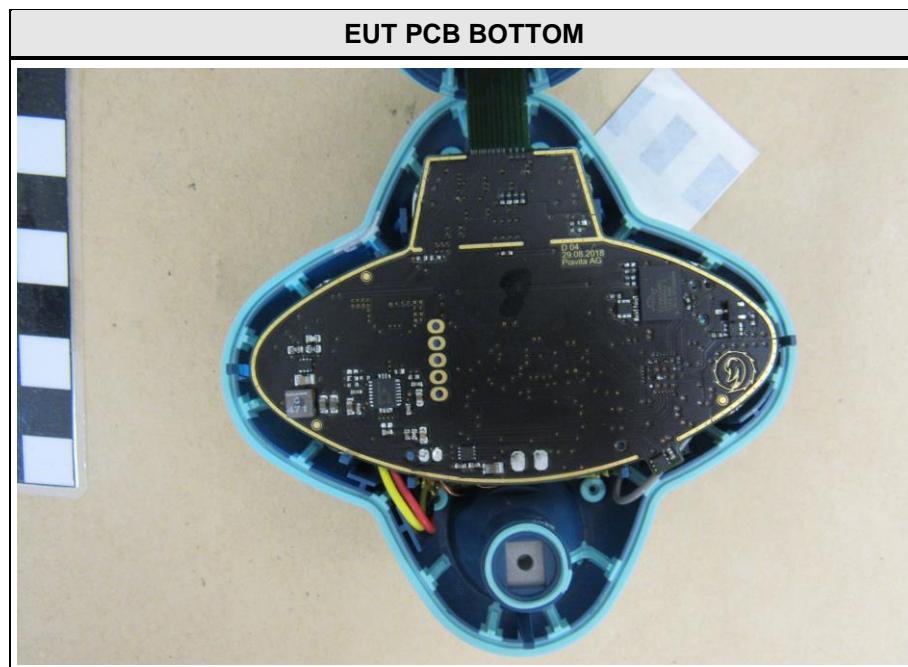

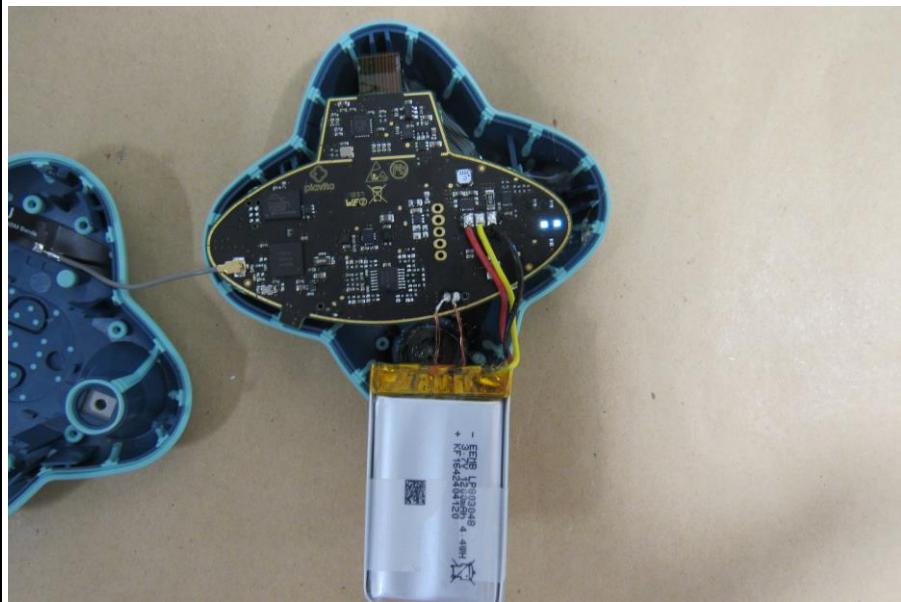EUT PCB TOP II**EUT PCB II BOTTOM**

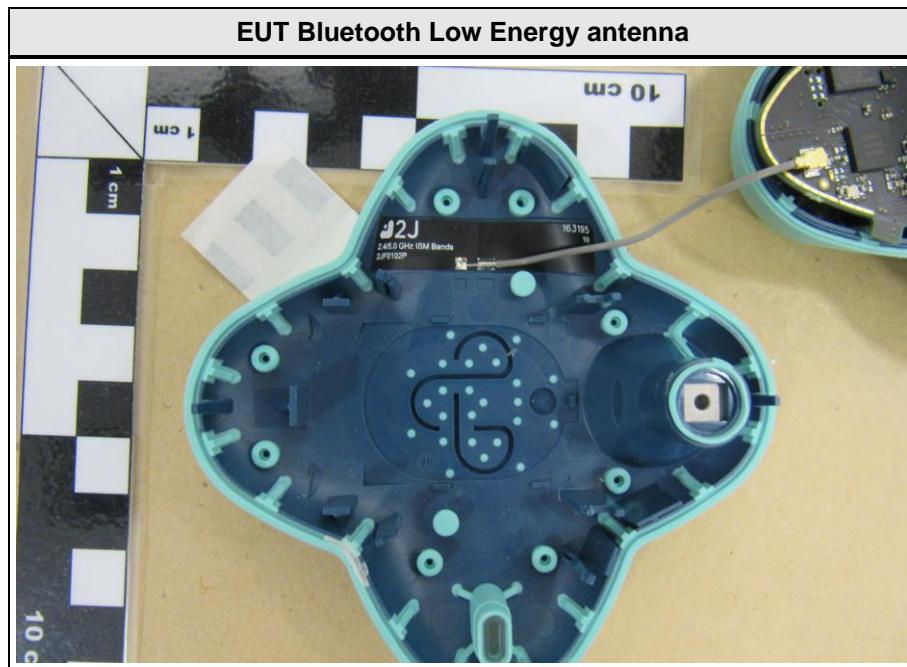

1.3 Equipment Photos - External

EUT TOP**EUT BOTTOM**

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Piavita Stationary Basesation	Piavita	B01S01	
AE	Laptop	Lenovo	ThinkPad X250	
AE	Ethernet Switch	Netgear		
AE	Wireless charger	Piavita	GY-68	
AE	AC/DC Adapter	Merryking	K103-0502100US	
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
1	Measurement / Data Transfer Mode via Bluetooth Low Energy (BLE)
2	Charging
Comment:	

1.6 EUT Configuration

Configuration #	Description
1	EUT powered via internal battery. Device sending data through the BLE and the data is received by the Base station, then sent to the Cloud Server through Ethernet connection
2	EUT placed on wireless charger. Device sending data through the BLE and the data is received by the Base station, then sent to the Cloud Server through Ethernet connection
Comment:	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dB μ V. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF +21.5 dB μ V + 26 dB/m	= Net Reading = 47.5 dB μ V/m	:	Net reading - FCC limit 47.5 dB μ V/m - 57.0 dB μ V/m	= Margin = -9.5 dB
--	--------------------------------------	---	--	-----------------------

2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	PASS	
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	2500
Measurement range	30 MHz to 12500 MHz
Temperature [°C]	25
Humidity [%]	24
Operator	Matthias Handrik
Date	2019-03-19

2.1.2 Setup

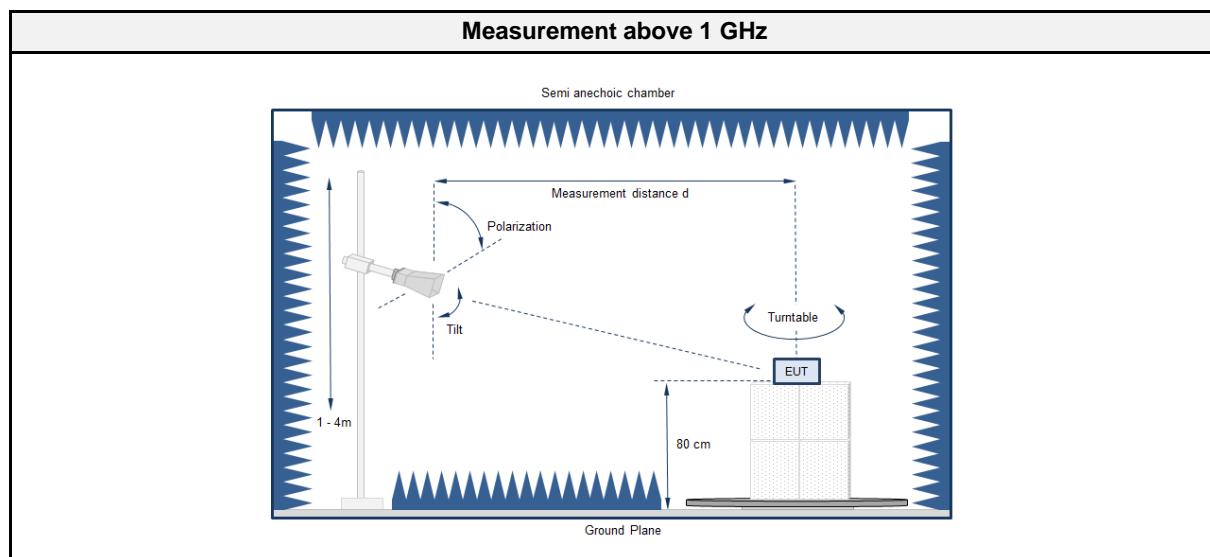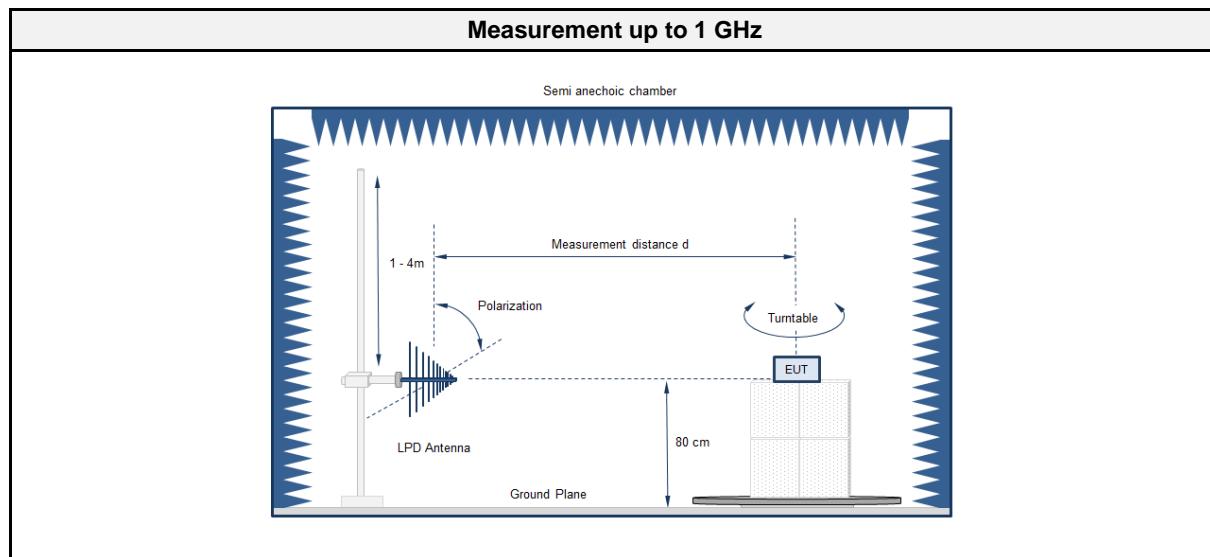

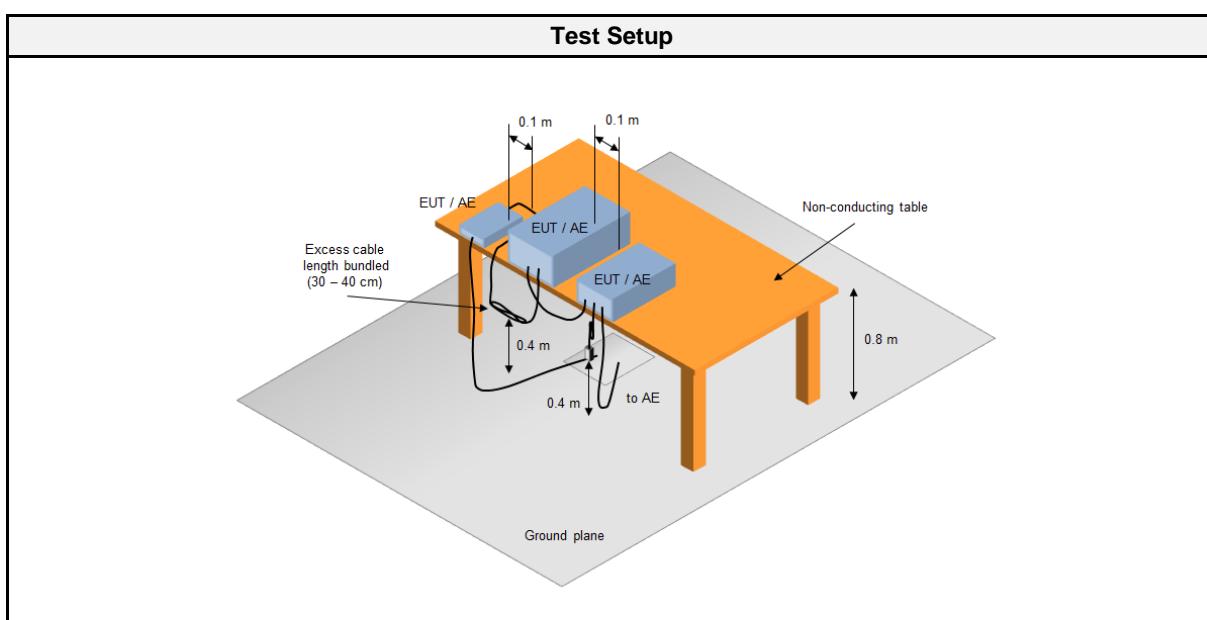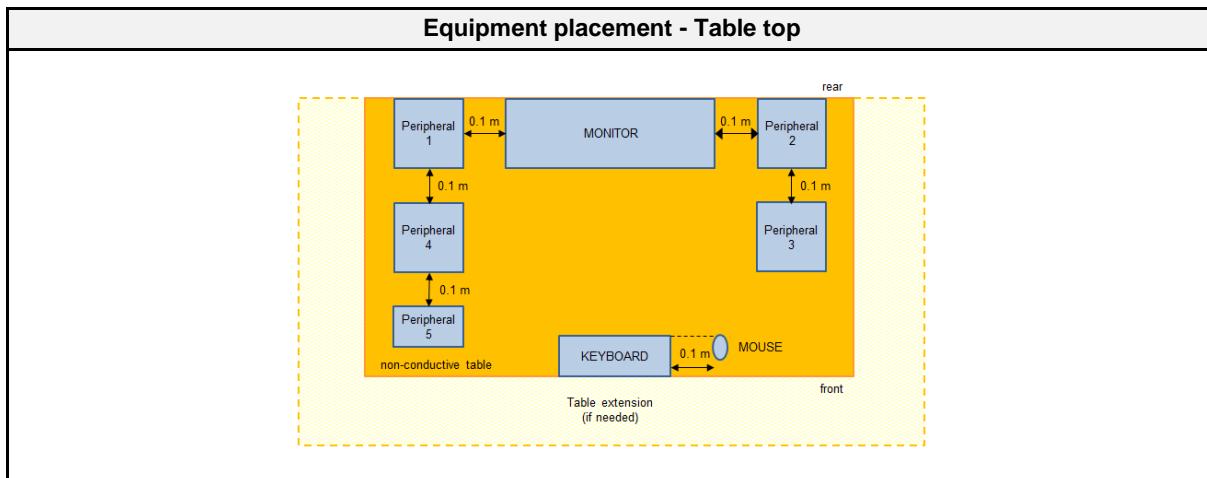

2.1.3 Equipment

Test Software					
Description	Manufacturer	Name	Version		
EMC Software	DARE Instruments	Radimation	2016.1.10		

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2018-08	2019-08
Biconical Antenna	R&S	HK 116	EF00186	2018-03	2020-03
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
Horn Antenna	ETS-Lindgren	3117	EF01256	2018-09	2019-09

2.1.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non-conductive table at a height of 0.8m. 2. The EUT and support equipment, if needed, were set up to simulate typical usage. 3. Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage. 4. The antenna was placed at a distance of 3 or 10 m. 5. The received signal was monitored at the measurement receiver. 6. This procedure has to be performed in both antenna polarizations, horizontal and vertical. 7. The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

Final measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver. 2. A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast. 3. The EUT and cable arrangement were based on the exploratory measurement results. 4. Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded. 5. The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits



Class B @ 3 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54

Class A @ 10 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5

2.1.6 Results

Test Results			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	Note
Note:			
measurement for wireless charging were performed in test-report: G0M-1902-8075-TFC106WP-V01			

2.1.7 Setup Photos

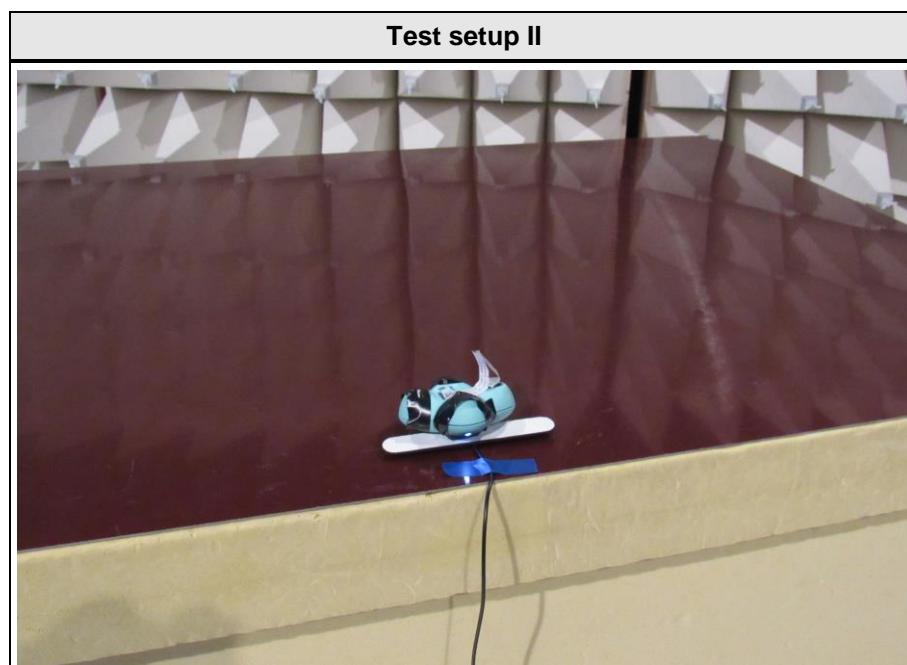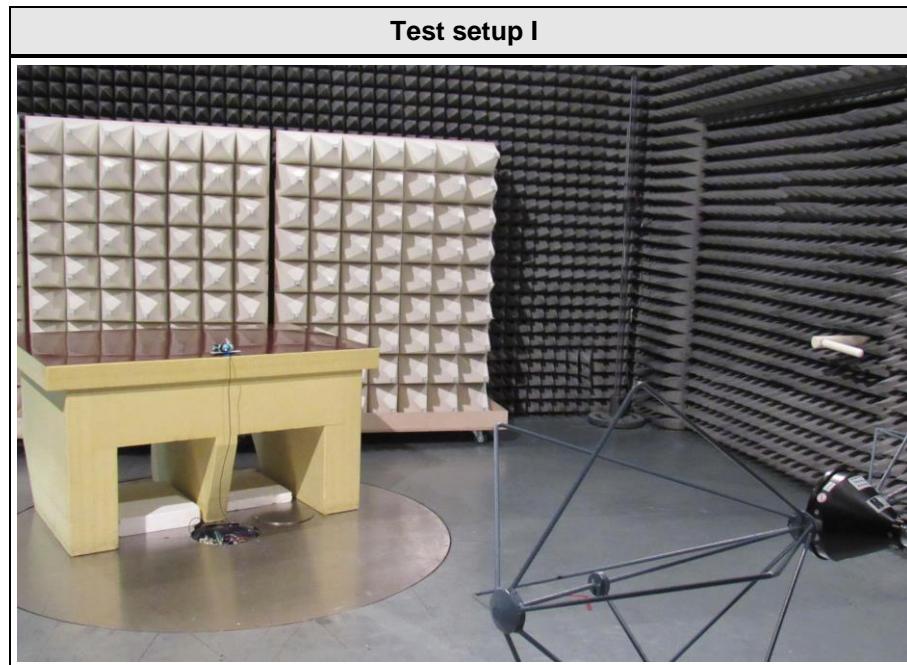


2.1.8 Records

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Thom: 25°C, Unom: 3.7 VDC lithium polymer battery
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3m
Mode: Mode#1
Test Date: 2019-03-19
Note:

Index 36

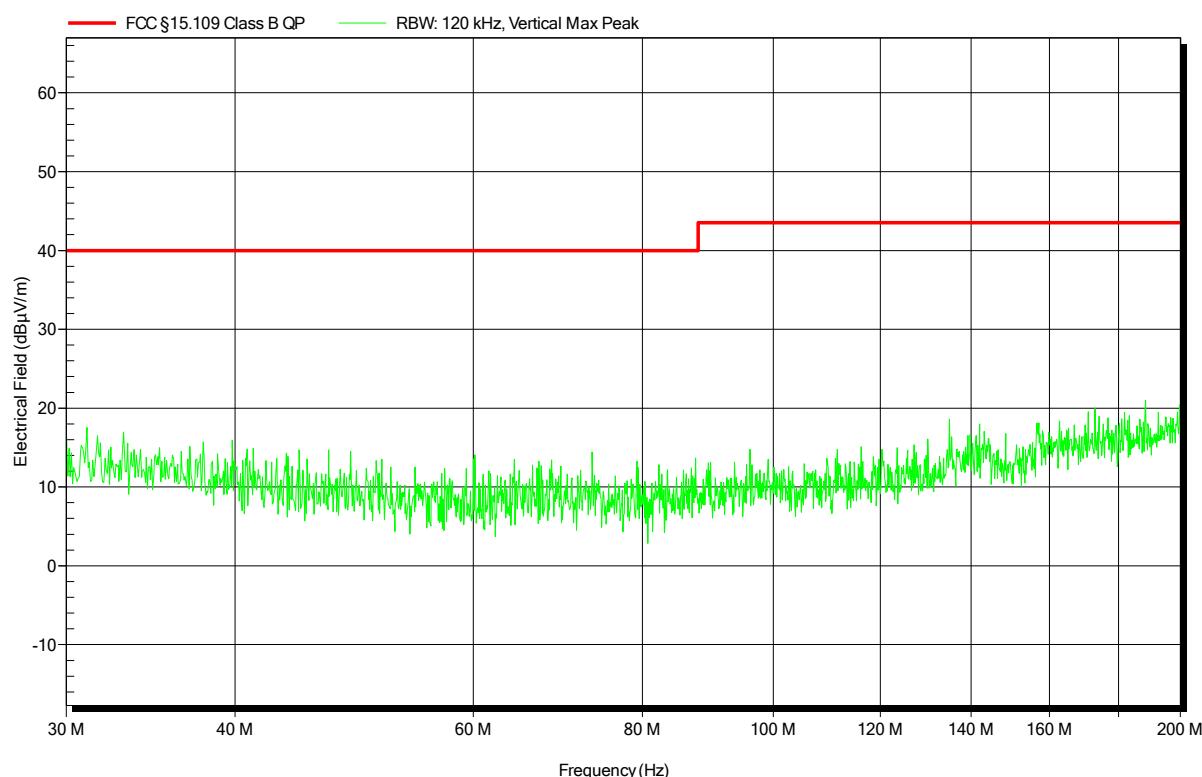

Test Report No.: G0M-1902-8075-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3m
Mode: Mode#1
Test Date: 2019-03-19
Note:

Index 37

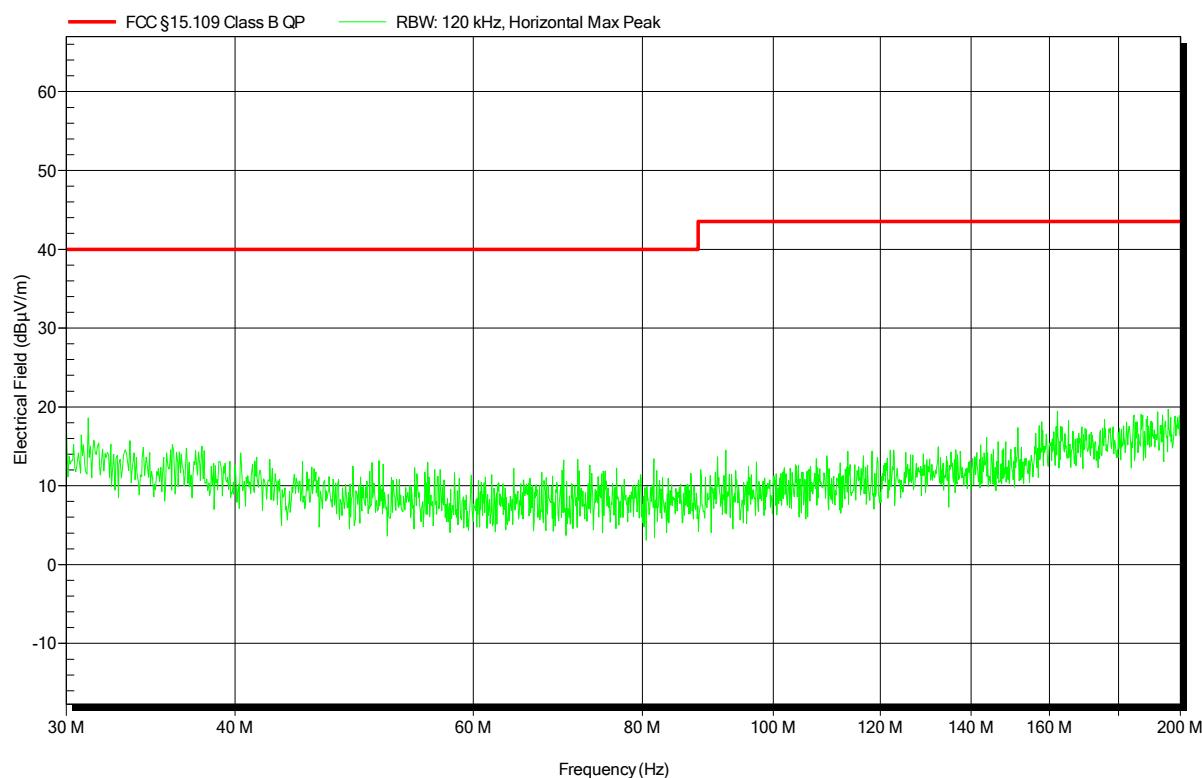

Test Report No.: G0M-1902-8075-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 22 of 31

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3m
Mode: Mode#1
Test Date: 2019-03-19
Note:

Index 38

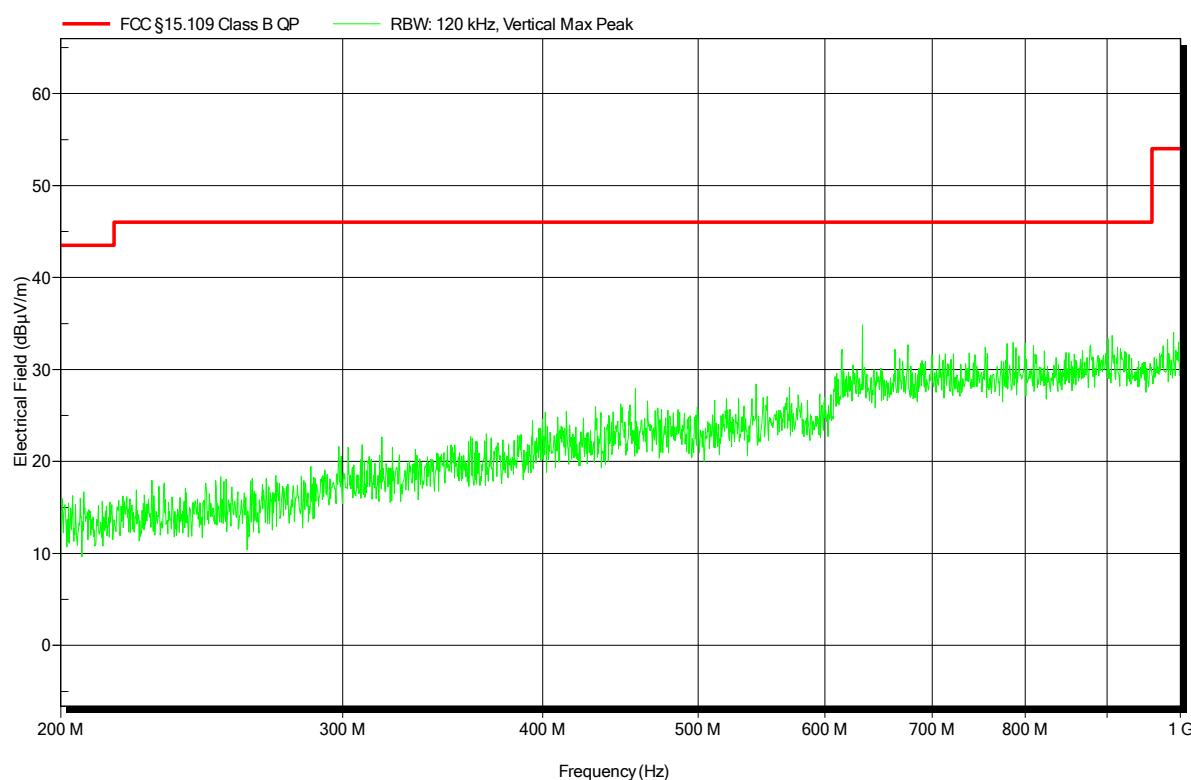

Test Report No.: G0M-1902-8075-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 23 of 31

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: Mode#1
 Test Date: 2019-03-19
 Note:

Index 39

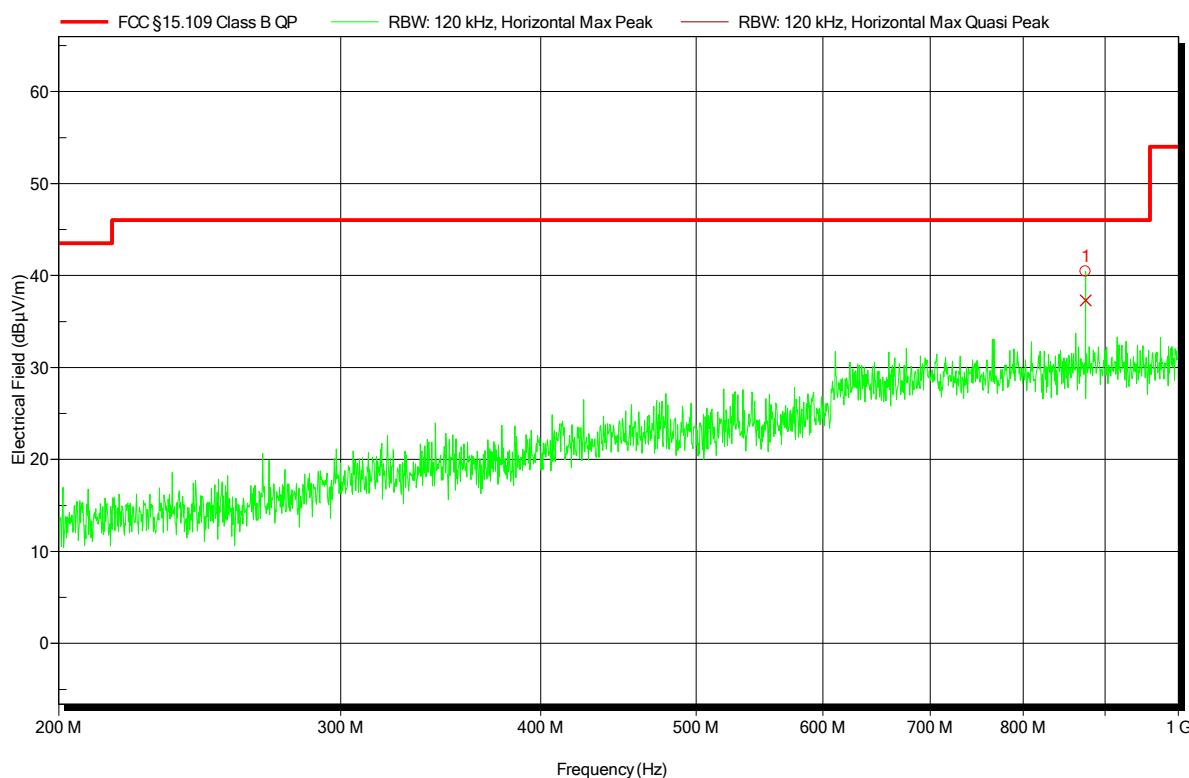

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	875.004 MHz	37.28 dBµV/m	46.02 dBµV/m	-8.74 dB	Pass	0 Degree	1 m

Test Report No.: G0M-1902-8075-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: Mode#1
 Test Date: 2019-03-19
 Note:

Index 40

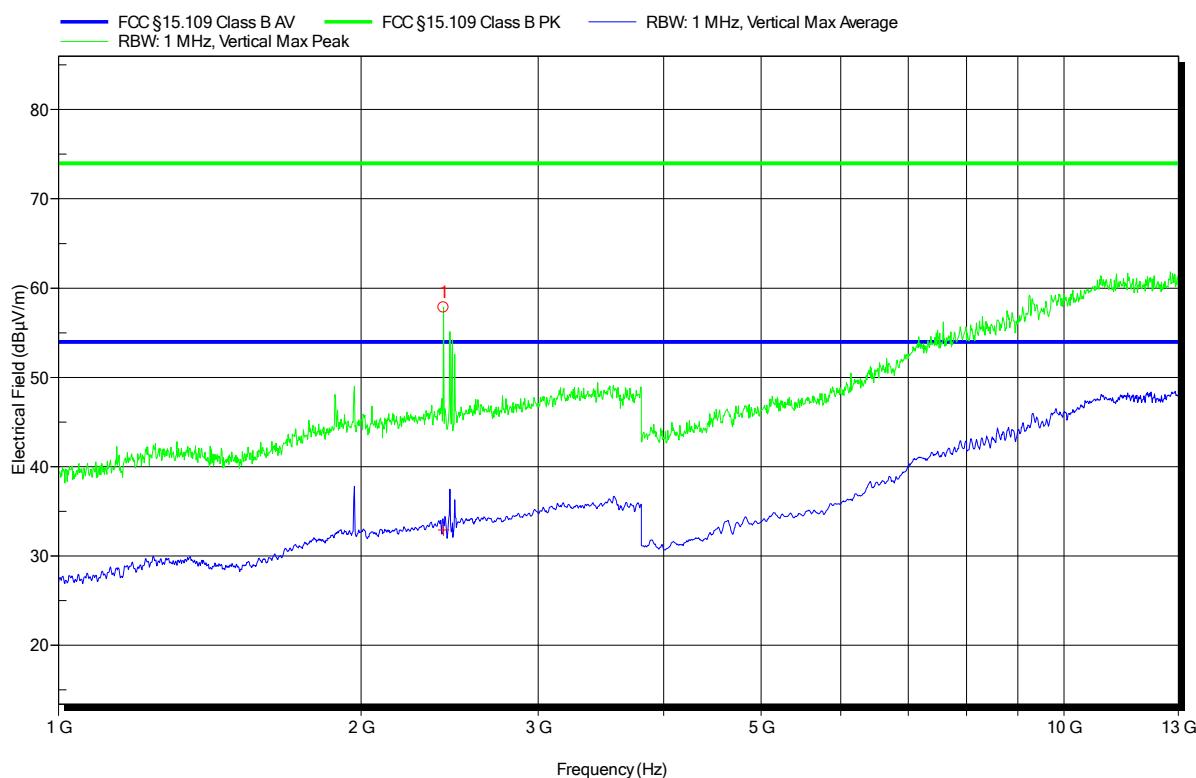

Test Report No.: G0M-1902-8075-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 25 of 31

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3m
 Mode: Mode#1
 Test Date: 2019-03-19
 Note:

Index 41


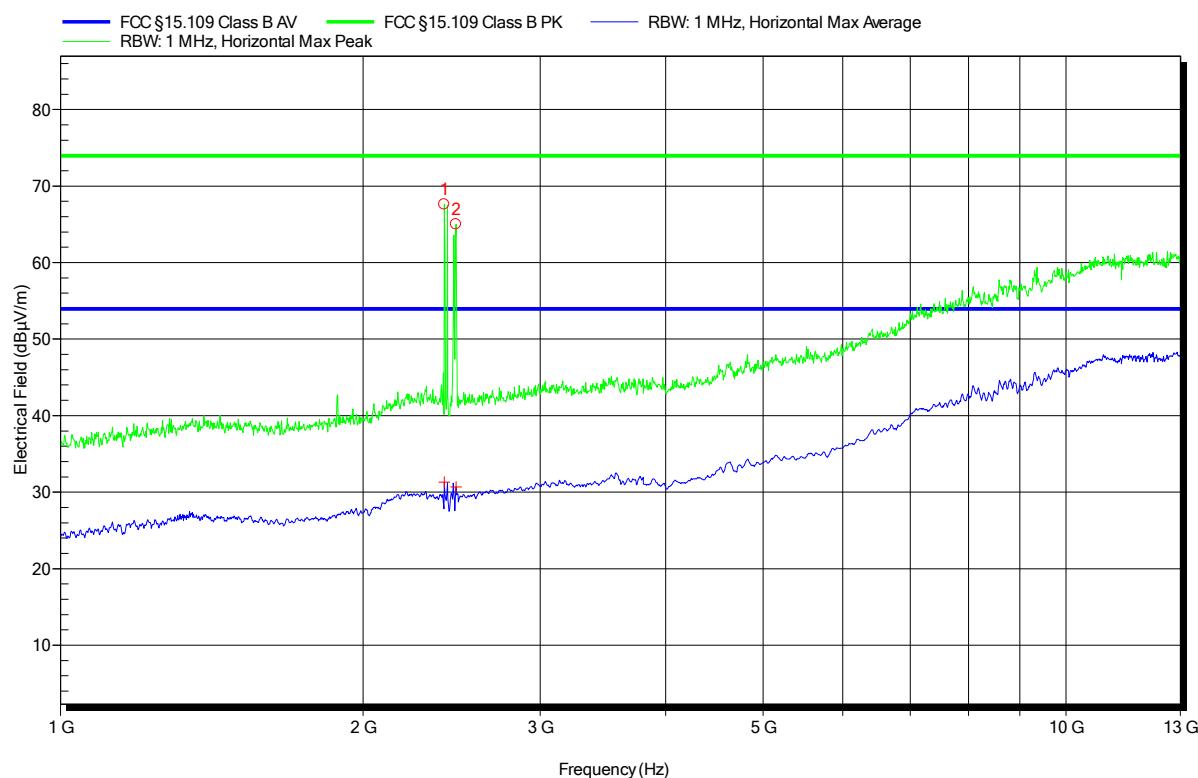


2.2 Test Conditions and Results - Conducted emissions acc. to ANSI C63.4

2.2.1 Information

Test Information	
Reference	FCC 15.107, ICES-003, 8, 6.2
Reference method	ANSI C63.4:2014 Section 12
Measurement range	150 kHz to 30 MHz
Equipment class	Class B
Equipment type	Table top
Temperature [°C]	21
Humidity [%]	35
Operator	Matthias Handrik
Date	2019-03-19

2.2.2 Setup

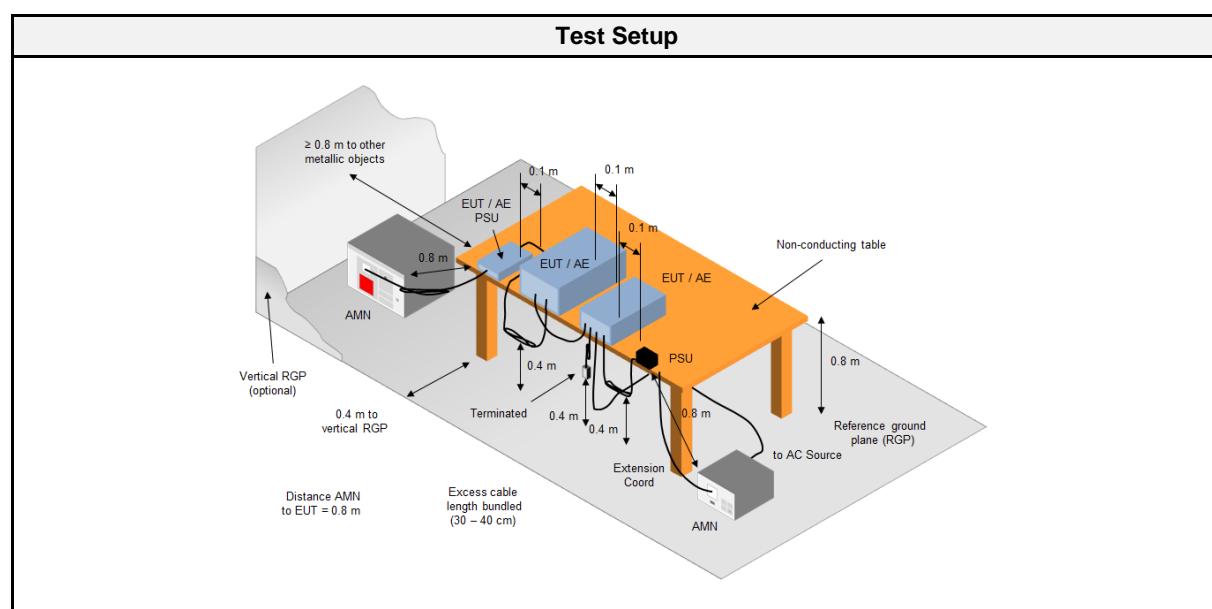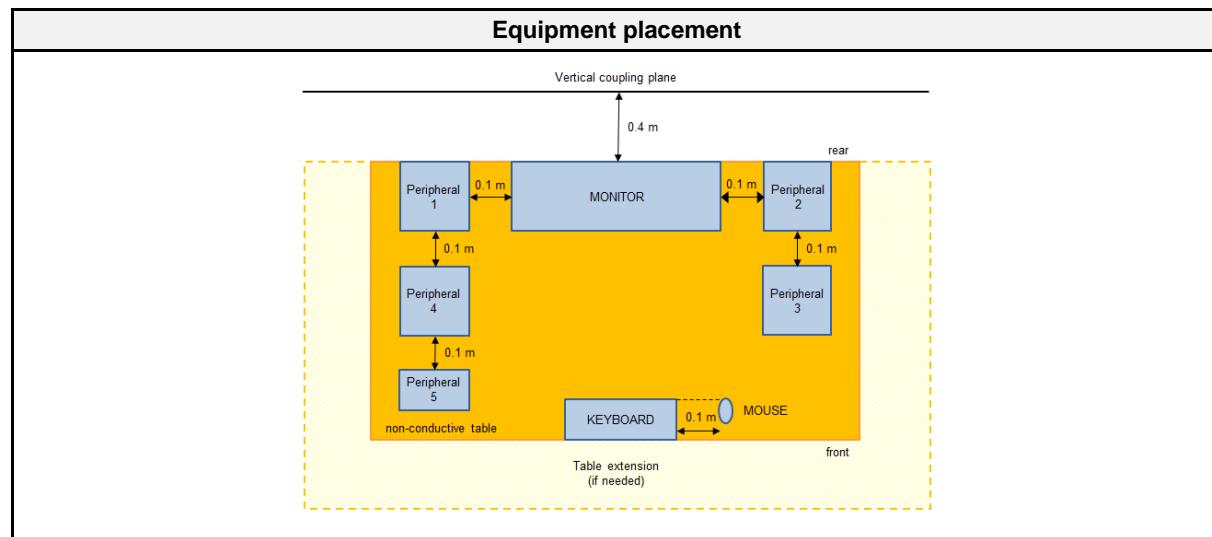

2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2017-01	2019-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2018-07	2019-07
EMI Test Receiver	R&S	ESR 7	EF00943	2018-07	2019-07

2.2.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1) 2. The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN. 3. The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length). 4. The LISN measurement port was connected to a measurement receiver 5. I/O cables were bundled not longer than 0.4 m 6. Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor 7. To maximize the emissions the cable positions were manipulated 8. The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Final measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1) 2. The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN. 3. The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length). 4. The LISN measurement port was connected to a measurement receiver 5. The EUT and cable arrangement were based on the exploratory measurement results 6. The test data of the worst-case conditions were recorded and shown on the next pages

2.2.5 Limits


Class B		
Frequency [MHz]	Quasi-peak Limit [dB μ V]	Average Limit [dB μ V]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

2.2.6 Results

AC power line conducted emissions					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
USB	AMN	2	2	PASS	

2.2.7 Setup Photos

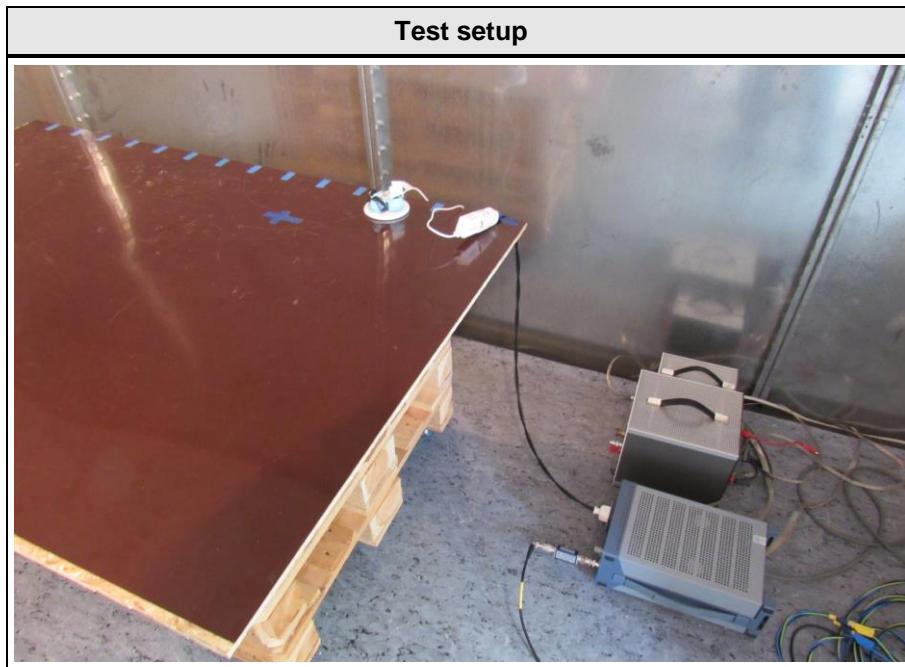


2.2.8 Records

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: T_{nom} : 25°C, U_{nom} : 3.7 VDC lithium polymer battery
 LISN: ESH3-Z5 (N)
 Mode: charging
 Test Date: 2019-03-19
 Note:

Index 34

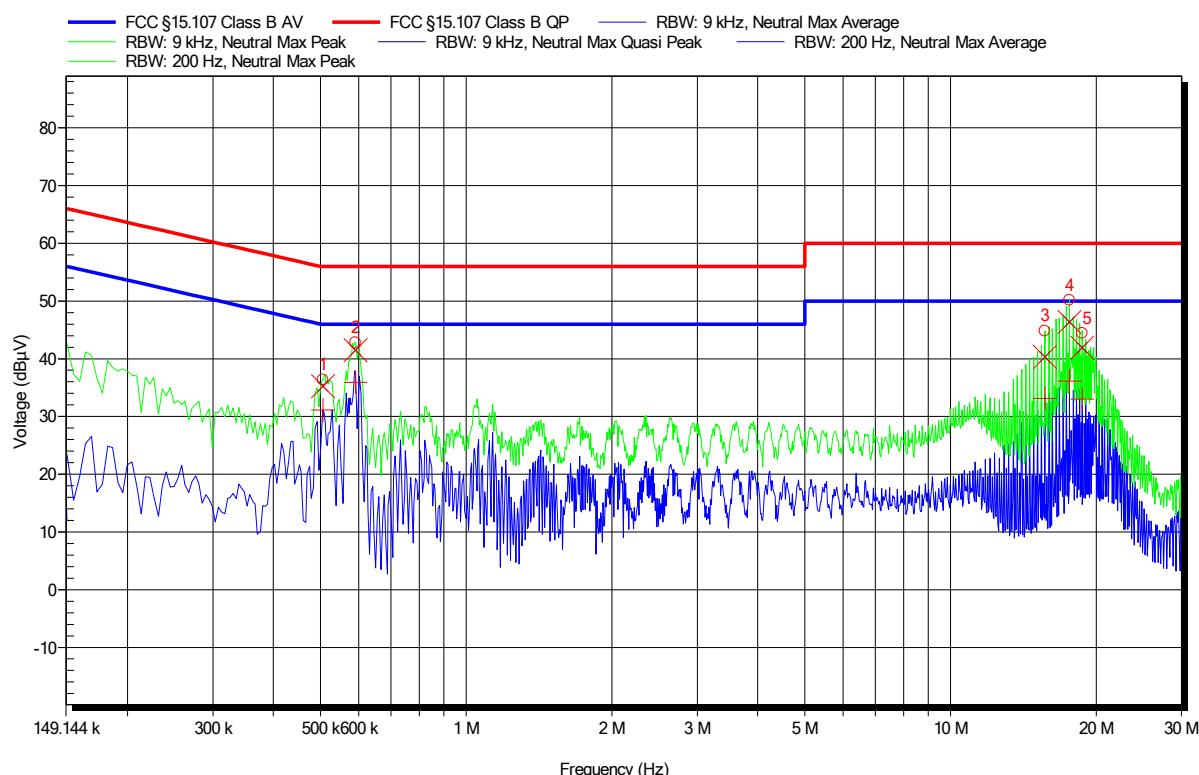

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	506.85 kHz	35.22 dB μ V	56 dB μ V	-20.78 dB	Pass
2	591 kHz	41.45 dB μ V	56 dB μ V	-14.55 dB	Pass
3	15.662 MHz	40.28 dB μ V	60 dB μ V	-19.72 dB	Pass
4	17.601 MHz	46.35 dB μ V	60 dB μ V	-13.65 dB	Pass
5	18.709 MHz	41.94 dB μ V	60 dB μ V	-18.06 dB	Pass


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	506.85 kHz	31.12 dB μ V	46 dB μ V	-14.88 dB	Pass
2	591 kHz	35.92 dB μ V	46 dB μ V	-10.08 dB	Pass
3	15.662 MHz	33.11 dB μ V	50 dB μ V	-16.89 dB	Pass
4	17.601 MHz	36.14 dB μ V	50 dB μ V	-13.86 dB	Pass
5	18.709 MHz	33.03 dB μ V	50 dB μ V	-16.97 dB	Pass

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
 LISN: ESH3-Z5 (L)
 Mode: charging
 Test Date: 2019-03-19
 Note:

Index 35

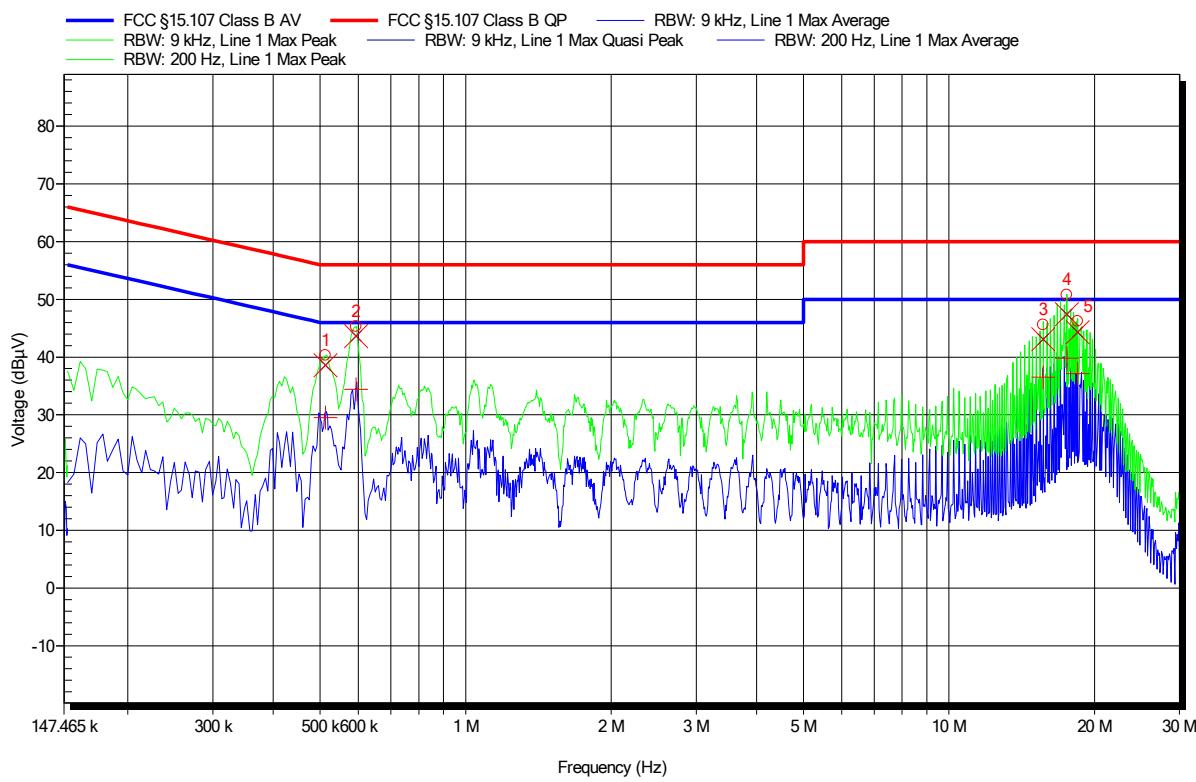

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	513.15 kHz	38.61 dB μ V	56 dB μ V	-17.39 dB	Pass
2	593.7 kHz	43.66 dB μ V	56 dB μ V	-12.34 dB	Pass
3	15.67 MHz	43.09 dB μ V	60 dB μ V	-16.91 dB	Pass
4	17.536 MHz	47.41 dB μ V	60 dB μ V	-12.59 dB	Pass
5	18.463 MHz	44.32 dB μ V	60 dB μ V	-15.68 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	513.15 kHz	29.52 dB μ V	46 dB μ V	-16.48 dB	Pass
2	593.7 kHz	34.43 dB μ V	46 dB μ V	-11.57 dB	Pass
3	15.67 MHz	36.5 dB μ V	50 dB μ V	-13.5 dB	Pass
4	17.536 MHz	39.81 dB μ V	50 dB μ V	-10.19 dB	Pass
5	18.463 MHz	37.16 dB μ V	50 dB μ V	-12.84 dB	Pass

Test Report No.: G0M-1902-8075-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany