

RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1902-8075-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 ISED Testing Laboratory site: 3470A-2
Applicant	Piavita AG
Address	Technoparkstrasse 1 8005 Zurich SWITZERLAND
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, 2018-04
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Equine vital signs wireless monitoring device
Model(s)	Piavita Measuring device
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	V04
Software Version(s)	2
FCC-ID	2ASL2-PD9
IC	N/A
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2019-03-11	
Report:		
Compiled by	Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2019-03-25	
Total number of pages	94	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-03-25	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment Internal	10
1.3	Photos – Test Setup.....	12
1.4	Support Equipment.....	13
1.5	Test Modes	14
1.6	Test Frequencies.....	15
1.7	Sample emission level calculation.....	16
2	Result Summary.....	17
3	Test Conditions and Results.....	18
3.1	Test Conditions and Results - Occupied bandwidth.....	18
3.2	Test Conditions and Results - 6 dB bandwidth.....	23
3.3	Test Conditions and Results - Maximum peak conducted output power	28
3.4	Test Conditions and Results - Power spectral density	30
3.5	Test Conditions and Results - AC powerline conducted emissions.....	35
3.6	Test Conditions and Results - Band-edge compliance.....	38
3.7	Test Conditions and Results - Conducted spurious emissions.....	42
3.8	Test Conditions and Results - Transmitter radiated emissions	47
3.9	Test Conditions and Results - Receiver radiated emissions	50
ANNEX A	Transmitter spurious emissions	53
ANNEX B	Receiver spurious emissions	85

1 Equipment (Test Item) Under Test

Description	Equine vital signs wireless monitoring device	
Model	Piavita Measuring device	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	None	
Hardware Version(s)	V04	
Software Version(s)	2	
PMN	None	
HVIN	None	
FVIN	None	
HMN	None	
FCC-ID	2ASL2-PD9	
IC	None	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	Integrated
	Model	FXP70.07.0053A
	Manufacturer	Taoglas
	Gain	5 dBi (customer declaration)
Supply Voltage	V _{NOM}	3.7 VDC (lithium polymer)
Operating Temperature	T _{NOM}	25 °C
AC/DC-Adaptor	Model	K103-0502100US
	Vendor	Merryking
	Input	100-240V
	Output	5 VDC
Manufacturer	Piavita AG Technoparkstrasse 1 8005 Zurich SWITZERLAND	

1.1 Photos – Equipment External



AE: Piavet Wireless Charger Top





AE: Piavet Wireless Charger Bottom




AE: USB Charger Label




1.2 Photos – Equipment Internal

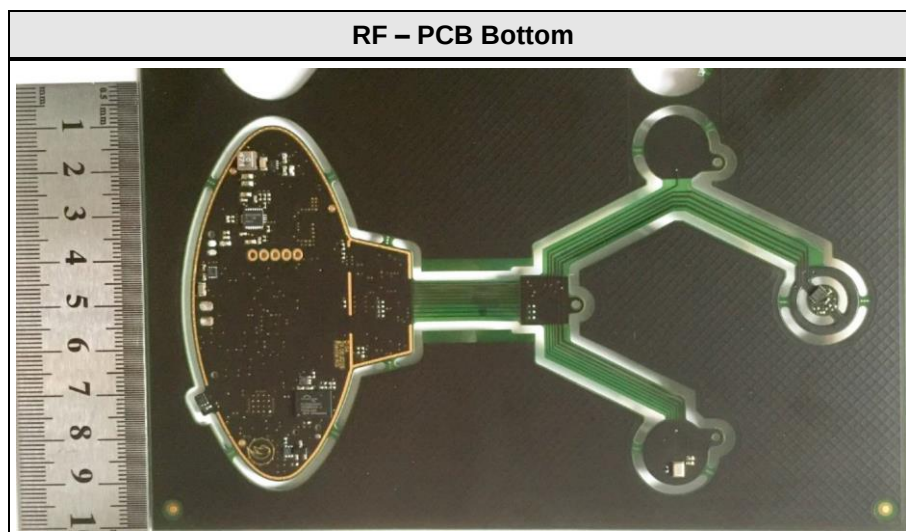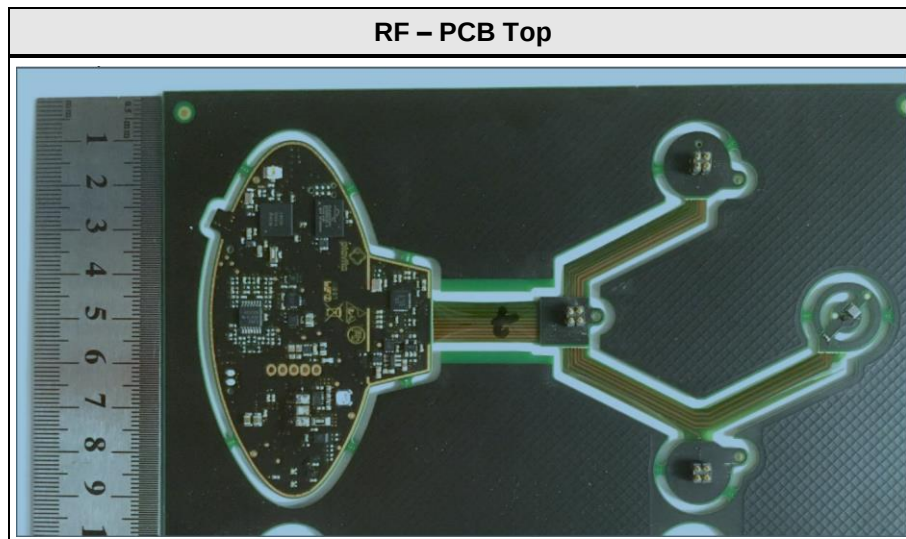



Battery Charging Top View

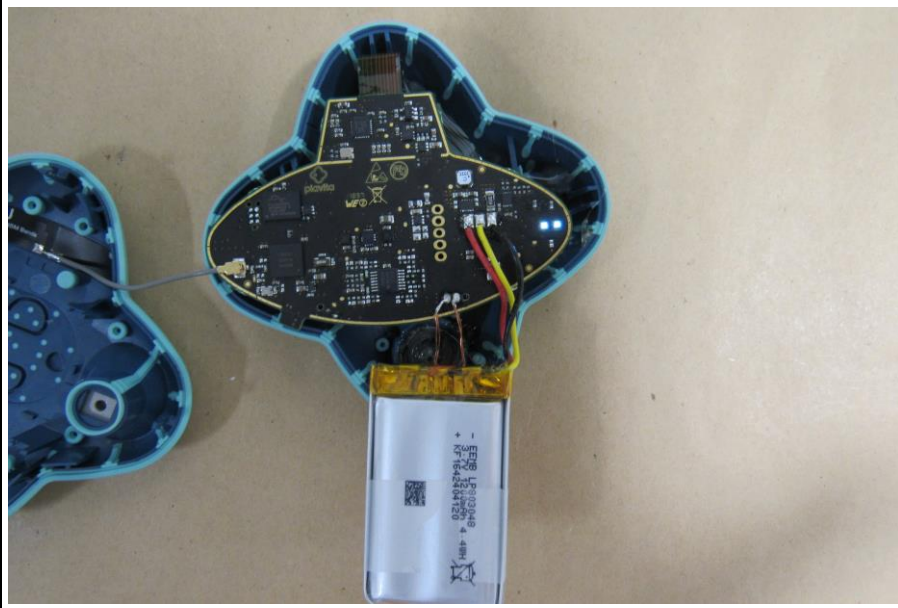

Battery Charging Bottom View

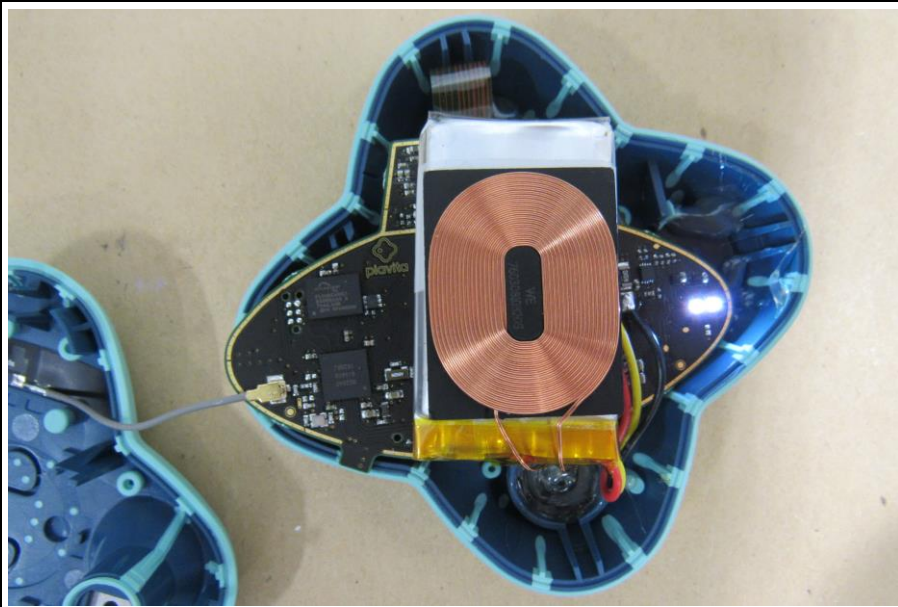

1.3 Photos – Test Setup

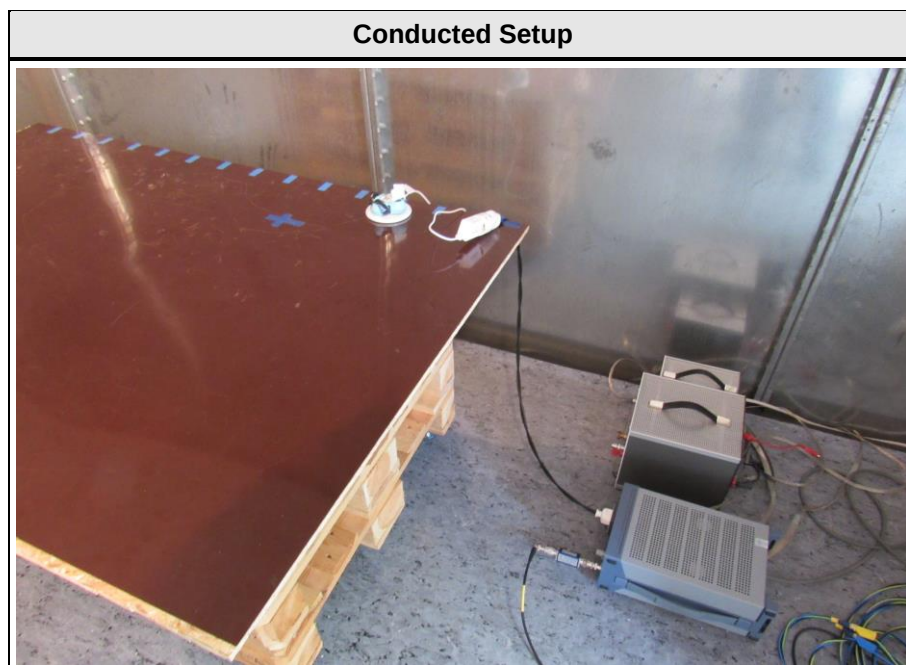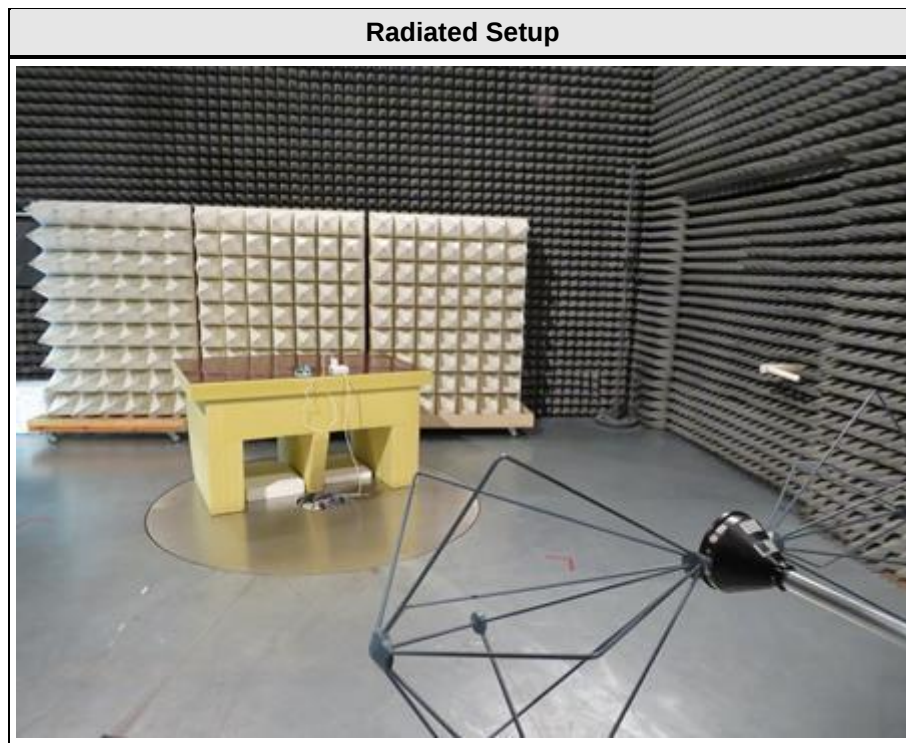

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Charger	Piavita	GY-68	Piavet Wireless Charger
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 64%
Receive	Mode = Receive
Comment:	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBμV + 26 dB/m	= 47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 (section 6.6)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	PASS	
FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen, Issue 5 (section 6.6)
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2019-03-19

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

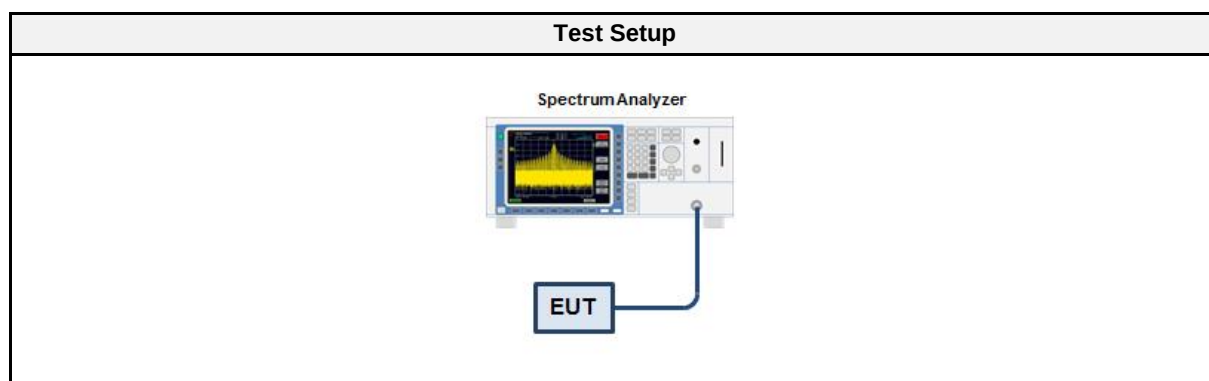

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.055
GFSK	2440	1.055
GFSK	2480	1.055

Occupied Bandwidth


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Occupied Bandwidth [MHz]: 1.055

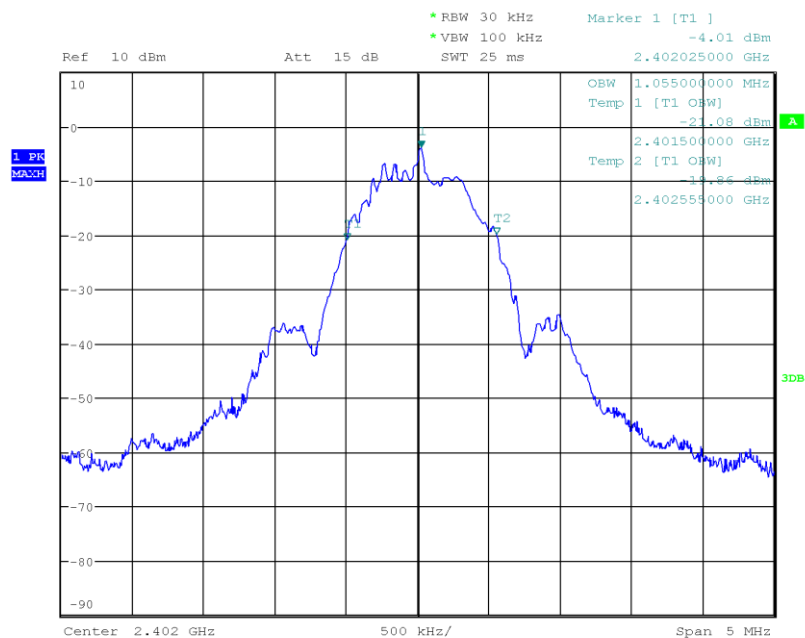

Date: 19.MAR.2019 04:08:53

Occupied Bandwidth


Project Number:	G0M-1902-8075
Applicant:	Piavita AG
Model Description:	Equine vital signs wireless monitoring device
Model:	Piavita Measuring device
Test Sample ID:	23344
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 6.9.3
Operational Mode:	GFSK, Channel: 19, 2440 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2019-03-19
Occupied Bandwidth [MHz]:	1.055

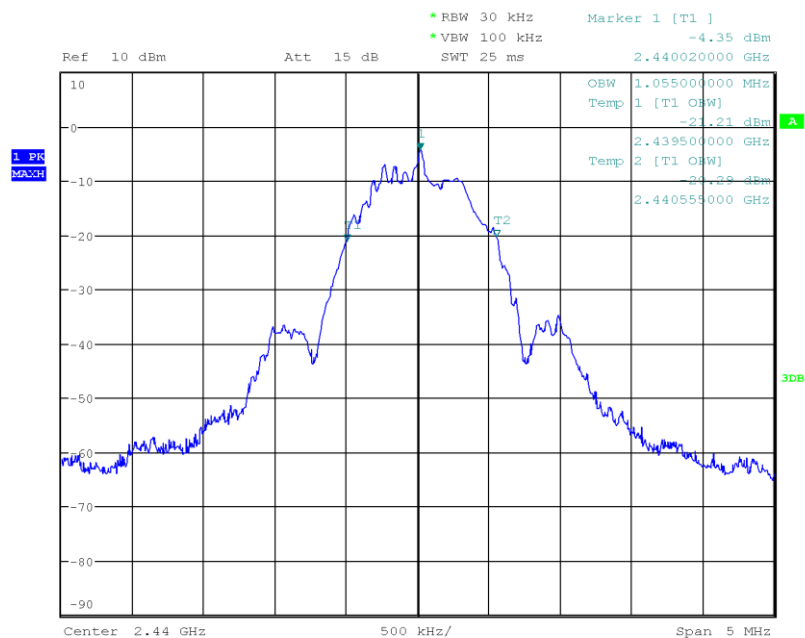

Date: 19.MAR.2019 04:11:03

Occupied Bandwidth

Project Number:	G0M-1902-8075
Applicant:	Piavita AG
Model Description:	Equine vital signs wireless monitoring device
Model:	Piavita Measuring device
Test Sample ID:	23344
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 6.9.3
Operational Mode:	GFSK, Channel: 39, 2480 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2019-03-19
Occupied Bandwidth [MHz]:	1.055

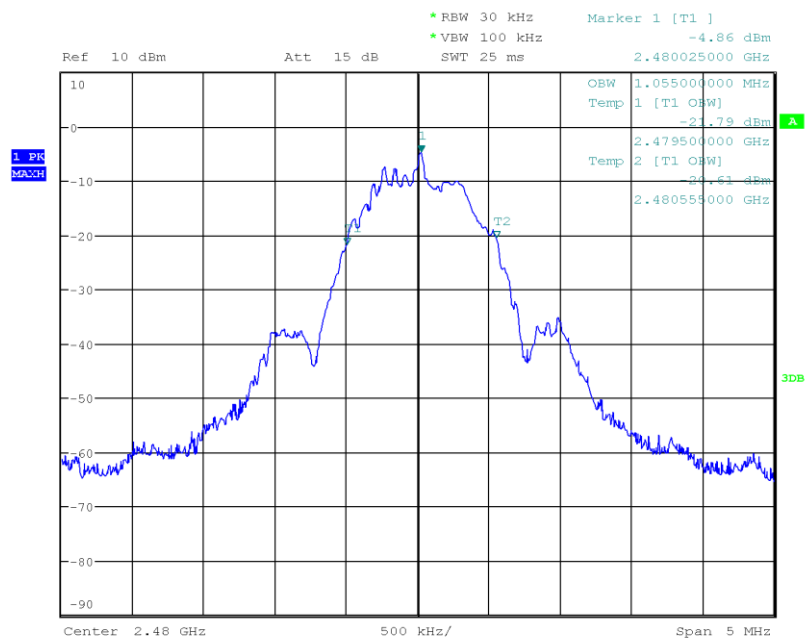

Date: 19.MAR.2019 04:12:38

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC § 15.247(a)(2); ISED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.8
Operator	Wilfried Treffke
Date	2019-03-19

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

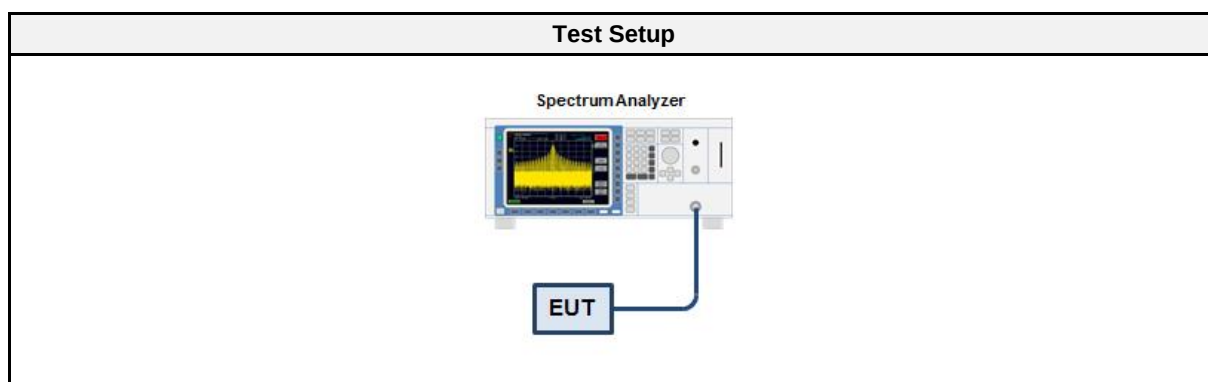

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.2.5 Procedure


Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	695	500	PASS
GFSK	2440	695	500	PASS
GFSK	2480	695	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Lower Frequency [MHz]: 2401.670
 Upper Frequency [MHz]: 2402.365
 6 dB Bandwidth [kHz]: 695

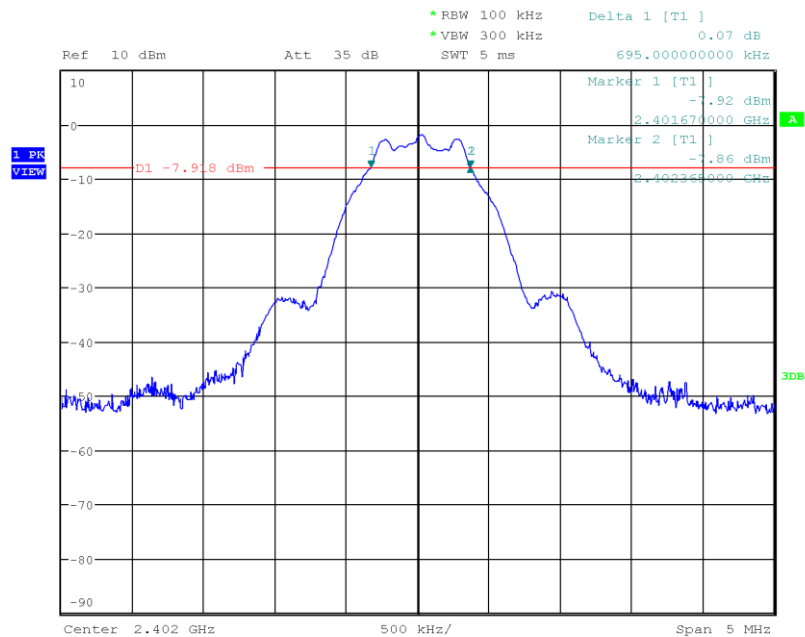

Date: 19.MAR.2019 04:38:52

DTS (6 dB) Bandwidth


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Lower Frequency [MHz]: 2439.670
 Upper Frequency [MHz]: 2440.365
 6 dB Bandwidth [kHz]: 695

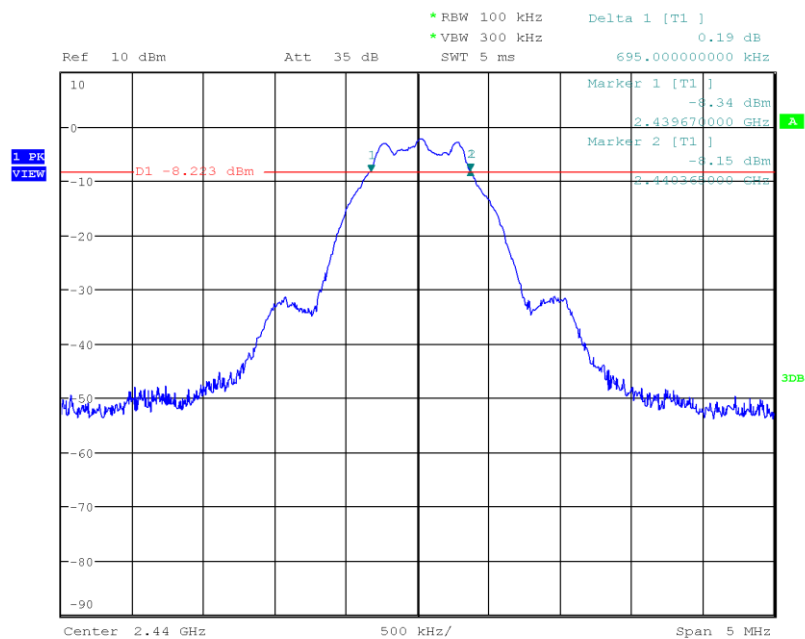

Date: 19.MAR.2019 04:18:06

DTS (6 dB) Bandwidth

Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Lower Frequency [MHz]: 2479.665
 Upper Frequency [MHz]: 2480.360
 6 dB Bandwidth [kHz]: 695

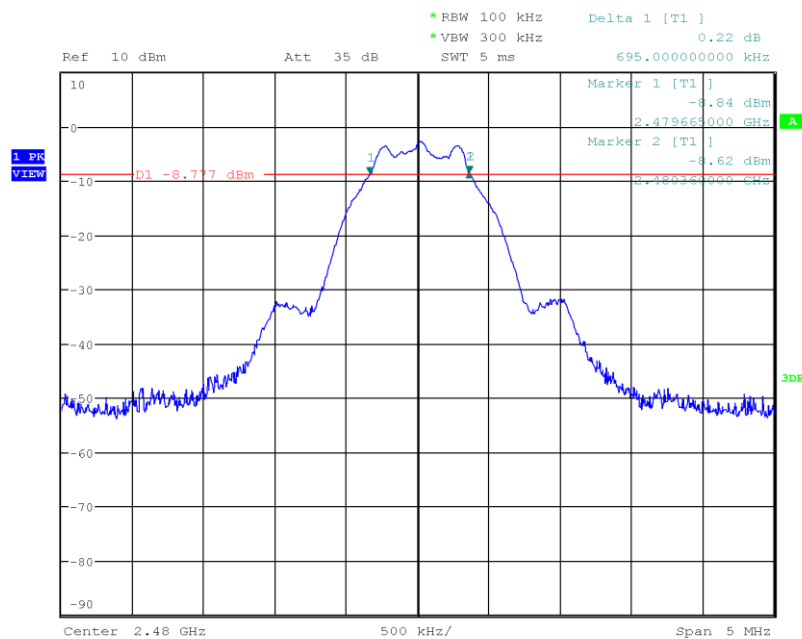

Date: 19.MAR.2019 04:16:53

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC § 15.247(b)(1); ISED RSS-247, Issue 2 (section 5.4)
Measurement Method	ANSI C63.10 11.9.1
Operator	Wilfried Treffke
Date	2019-03-19

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

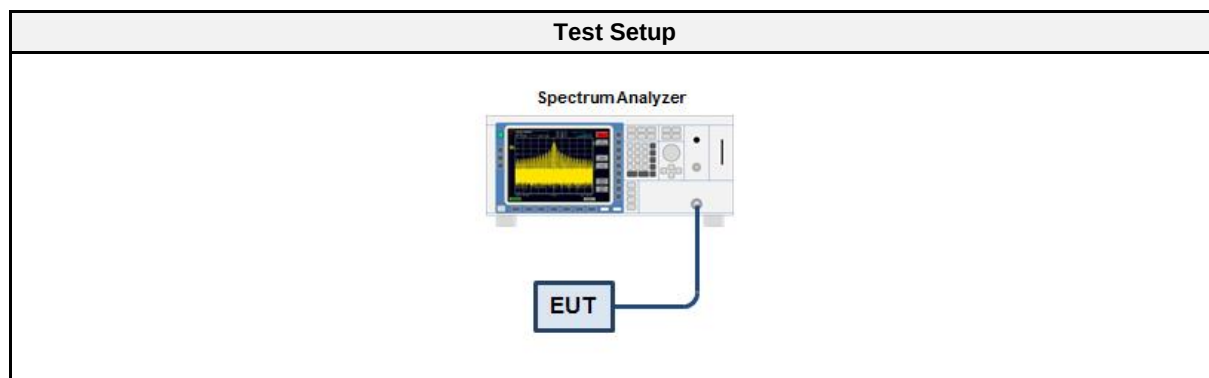

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.3.5 Procedure

Test Procedure
1. EUT set to test hopping mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set $\geq$ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	-0.151	0.0010	1.0	PASS
2440	-0.155	0.0010	1.0	PASS
2480	-0.961	0.0008	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC § 15.247(e); ISSED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Wilfried Treffke
Date	2019-03-19

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

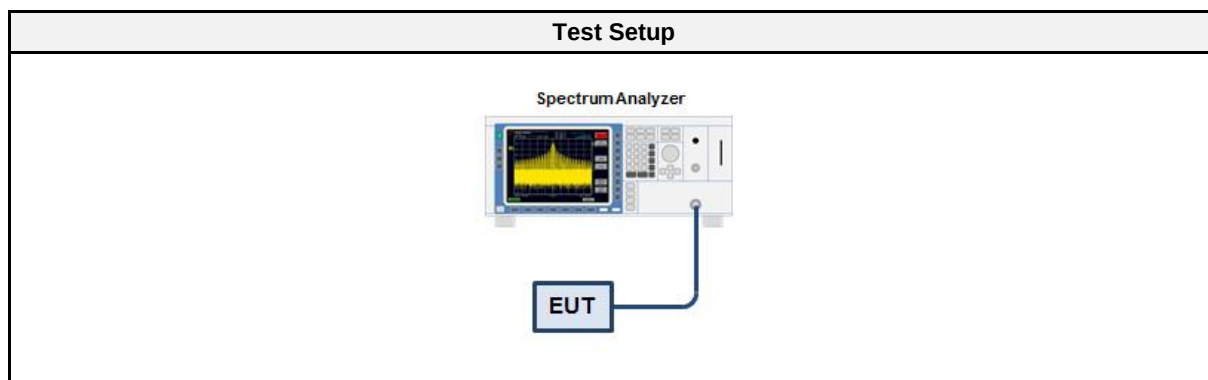

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.4.5 Procedure


Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW $\geq$ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	-0.568	8.0	PASS
2440	-0.564	8.0	PASS
2480	-1.282	8.0	PASS
RBW = 100 kHz			

Peak Power Spectral Density


Project Number:	G0M-1902-8075
Applicant:	Piavita AG
Model Description:	Equine vital signs wireless monitoring device
Model:	Piavita Measuring device
Test Sample ID:	23344
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 11.10.2
Operational Mode:	GFSK, Channel: 0, 2402 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2019-03-19
Peak Frequency [MHz]:	2402.021
Spectral Density [dBm/RBW]:	-0.568
Resolution Bandwidth [kHz]:	100 kHz

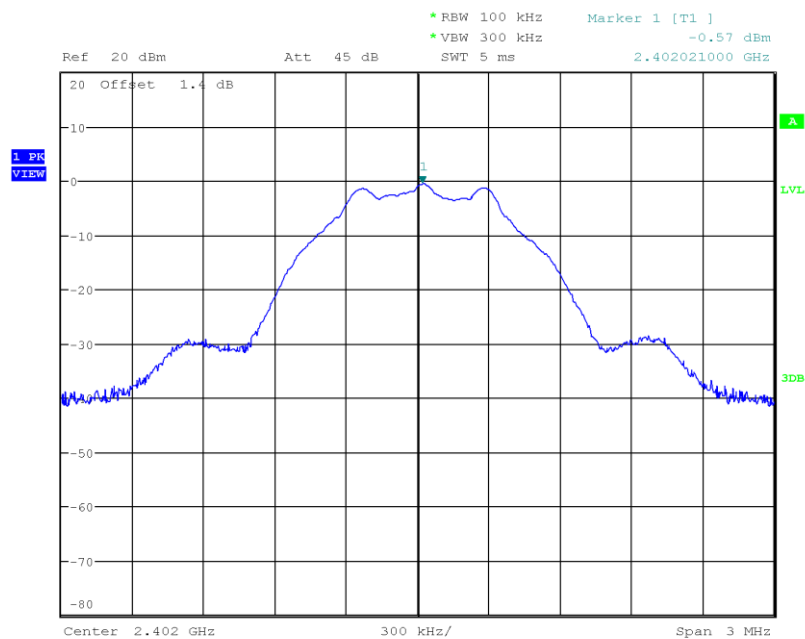

Date: 19.MAR.2019 04:36:47

Peak Power Spectral Density


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Peak Frequency [MHz]: 2440.018
 Spectral Density [dBm/RBW]: -0.564
 Resolution Bandwidth [kHz]: 100 kHz

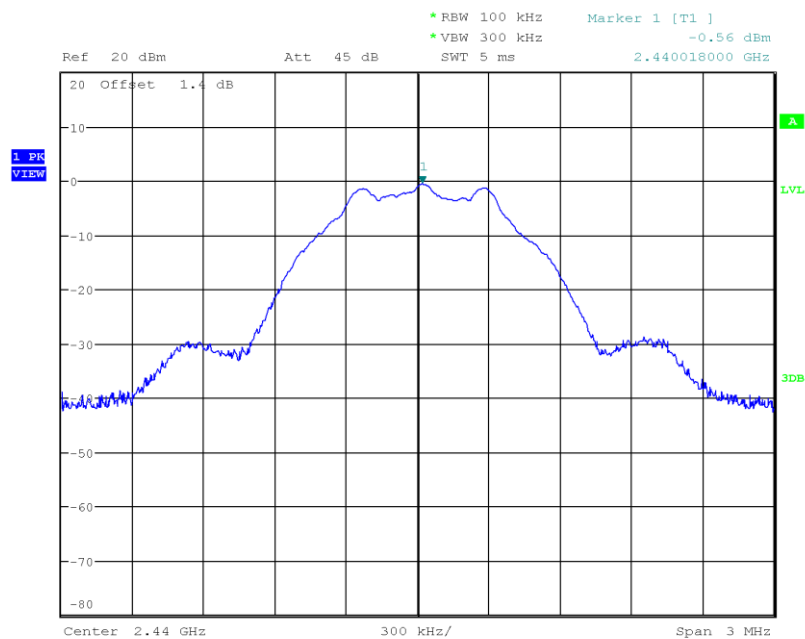

Date: 19.MAR.2019 04:34:54

Peak Power Spectral Density

Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Peak Frequency [MHz]: 2480.021
 Spectral Density [dBm/RBW]: -1.282
 Resolution Bandwidth [kHz]: 100 kHz

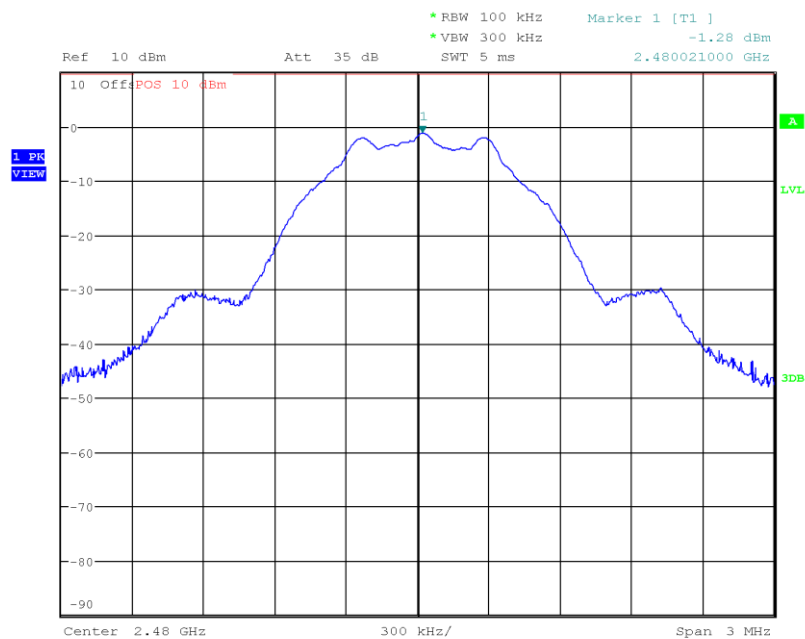

Date: 19.MAR.2019 04:33:19

3.5 Test Conditions and Results - AC powerline conducted emissions

3.5.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Operator	Wilfried Treffke
Date	2019-03-19

3.5.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBμV]	Average [dBμV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.5.3 Setup

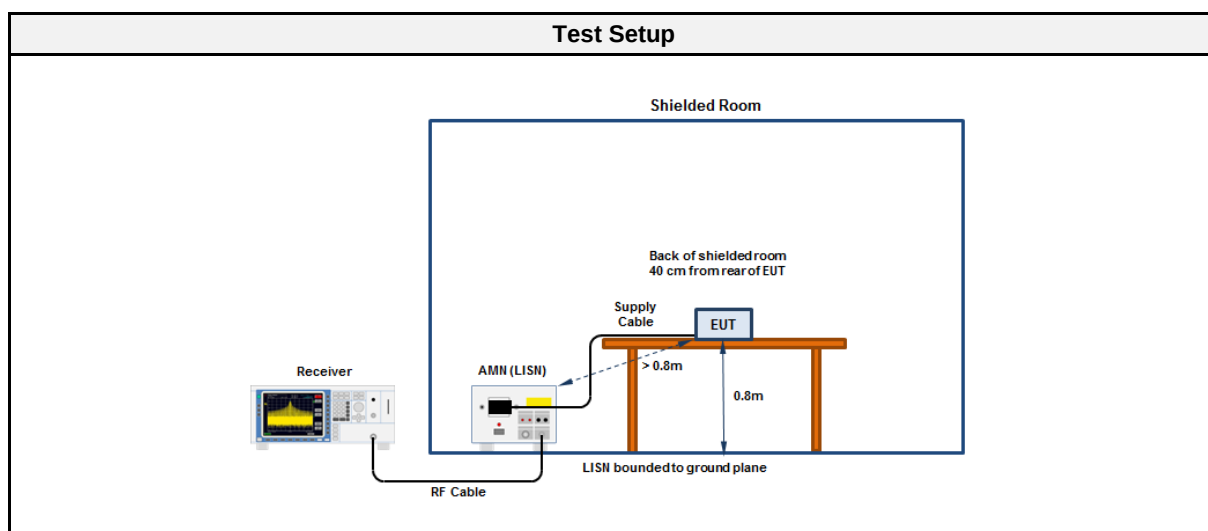

3.5.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Receiver	R&S	ESR7	EF00943	2018-07	2019-07
LISN	R&S	ESH3-Z5	EF00036	2017-01	2019-07

EMI voltage test in the ac-mains according to FCC Part 15 C

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
LISN: ESH3-Z5 (N)
Mode: charging, BLE Tx 2440 MHz
Test Date: 2019-03-19
Note:

Index 34

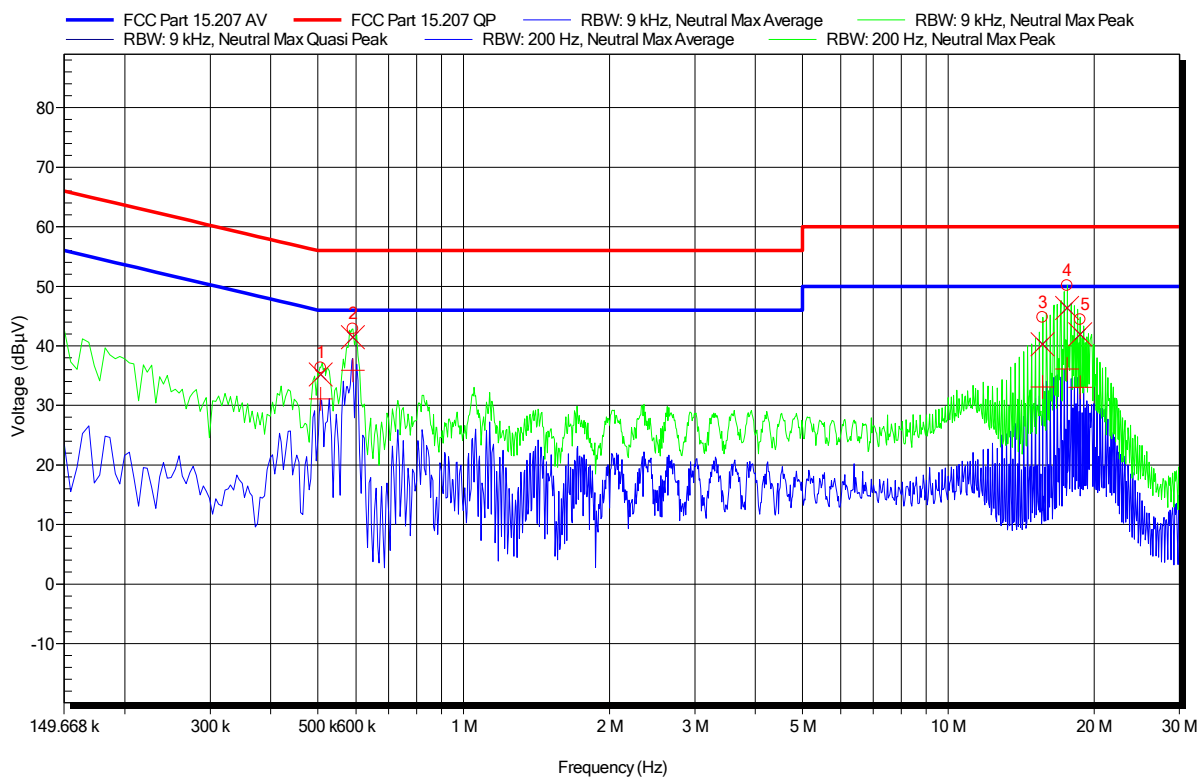

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	506.85 kHz	35.22 dBμV	56 dBμV	-20.78 dB	Pass
2	591 kHz	41.45 dBμV	56 dBμV	-14.55 dB	Pass
3	15.662 MHz	40.28 dBμV	60 dBμV	-19.72 dB	Pass
4	17.601 MHz	46.35 dBμV	60 dBμV	-13.65 dB	Pass
5	18.709 MHz	41.94 dBμV	60 dBμV	-18.06 dB	Pass


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	506.85 kHz	31.12 dBμV	46 dBμV	-14.88 dB	Pass
2	591 kHz	35.92 dBμV	46 dBμV	-10.08 dB	Pass
3	15.662 MHz	33.11 dBμV	50 dBμV	-16.89 dB	Pass
4	17.601 MHz	36.14 dBμV	50 dBμV	-13.86 dB	Pass
5	18.709 MHz	33.03 dBμV	50 dBμV	-16.97 dB	Pass

EMI voltage test in the ac-mains according to FCC Part 15 C

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Unom: 3.7 VDC lithium polymer battery
 LISN: ESH3-Z5 (L)
 Mode: charging, BLE Tx 2440 MHz
 Test Date: 2019-03-19
 Note:

Index 35

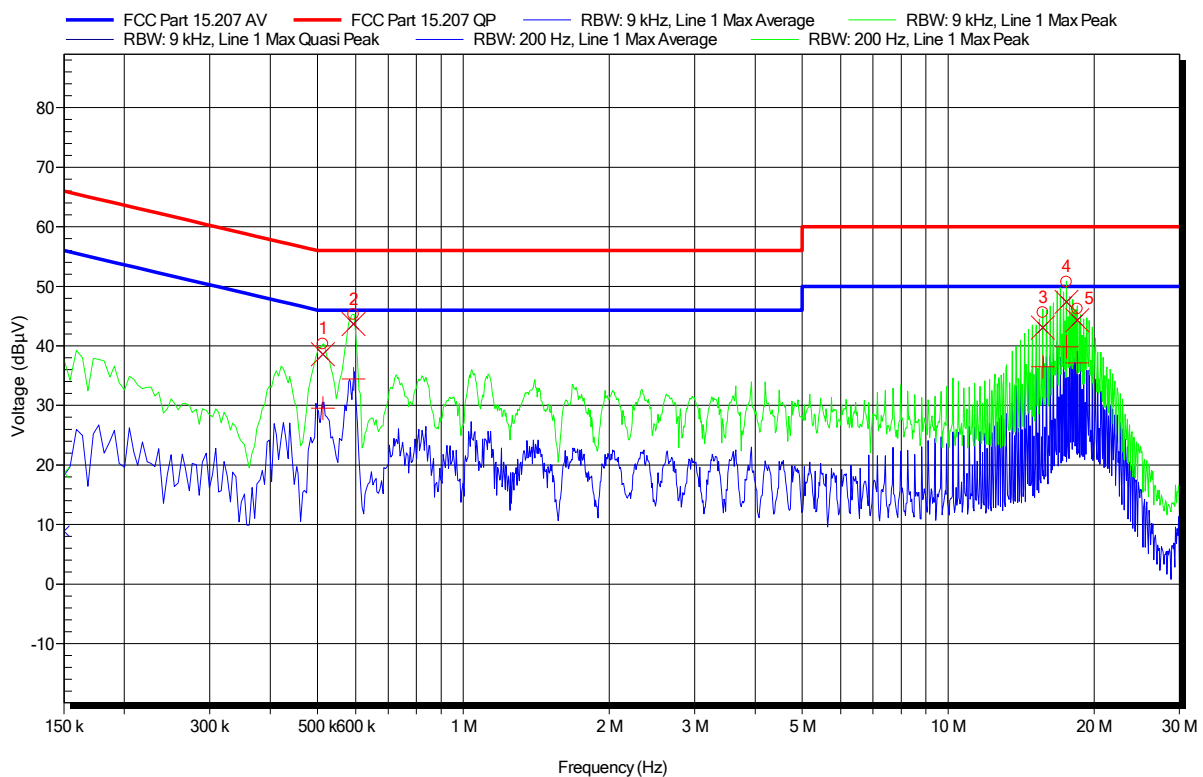

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	513.15 kHz	38.61 dBμV	56 dBμV	-17.39 dB	Pass
2	593.7 kHz	43.66 dBμV	56 dBμV	-12.34 dB	Pass
3	15.67 MHz	43.09 dBμV	60 dBμV	-16.91 dB	Pass
4	17.536 MHz	47.41 dBμV	60 dBμV	-12.59 dB	Pass
5	18.463 MHz	44.32 dBμV	60 dBμV	-15.68 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	513.15 kHz	29.52 dBμV	46 dBμV	-16.48 dB	Pass
2	593.7 kHz	34.43 dBμV	46 dBμV	-11.57 dB	Pass
3	15.67 MHz	36.5 dBμV	50 dBμV	-13.5 dB	Pass
4	17.536 MHz	39.81 dBμV	50 dBμV	-10.19 dB	Pass
5	18.463 MHz	37.16 dBμV	50 dBμV	-12.84 dB	Pass

3.6 Test Conditions and Results - Band-edge compliance


3.6.1 Information

Test Information	
Reference	FCC § 15.247(d); ISSED RSS-247, Issue 2 (section 5.5)
Measurement Method	ANSI C63.10 11.13
Operator	Wilfried Treffke
Date	2019-03-19

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

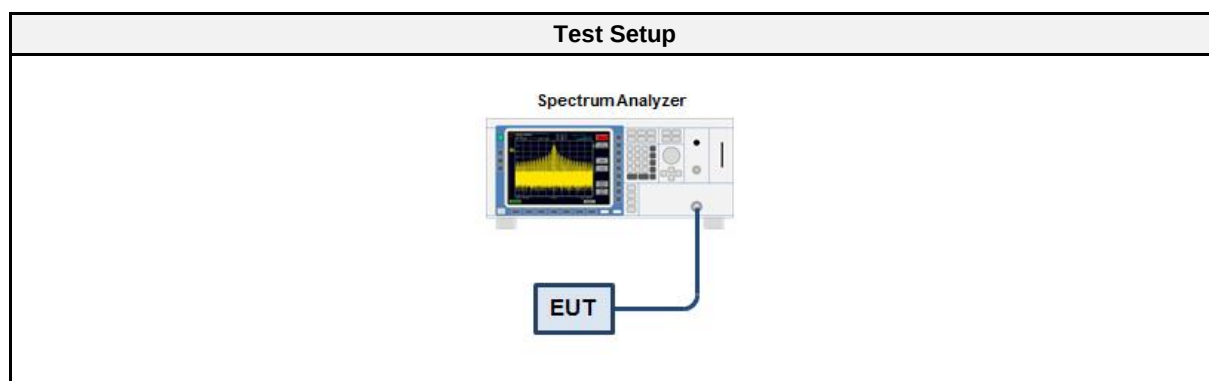

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.6.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-38.64	-20	PASS
GFSK	2480	-47.31	-20	PASS

Band-edge Compliance


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Band-edge: Lower
 In-band Frequency [MHz]: 2402.048
 Max. in-band Level [dBm/100 kHz]: -0.626
 Out-of-band Frequency [MHz]: 2392.0
 Max. out-of-band Level [dBm/100 kHz]: -39.27
 Attenuation [dB]: -38.64

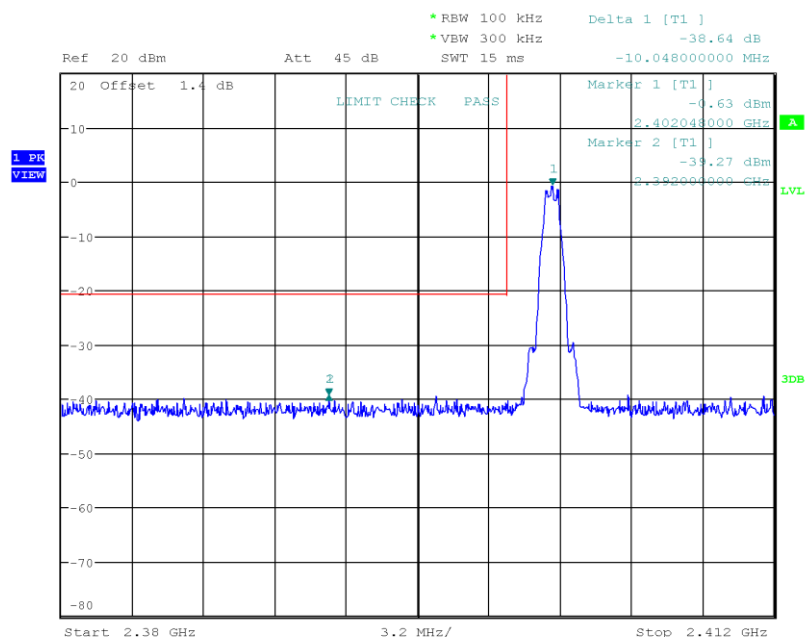

Date: 19.MAR.2019 04:42:32

Band-edge Compliance

Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Band-edge: Upper
 In-band Frequency [MHz]: 2480.01
 Max. in-band Level [dBm/100 kHz]: -1.352
 Out-of-band Frequency [MHz]: 2490.37
 Max. out-of-band Level [dBm/100 kHz]: -48.663
 Attenuation [dB]: -47.31

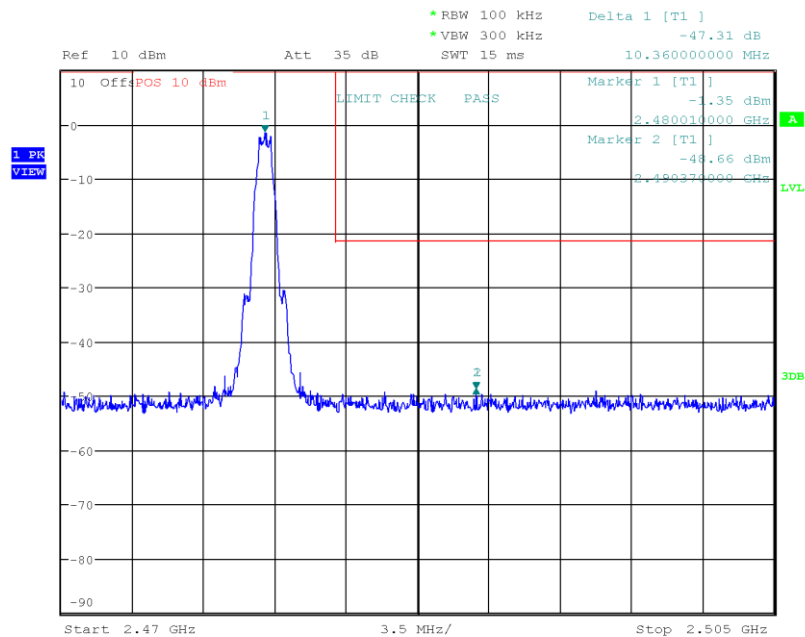

Date: 19.MAR.2019 04:44:03

3.7 Test Conditions and Results - Conducted spurious emissions


3.7.1 Information

Test Information	
Reference	FCC § 15.247(d); ISSED RSS-247, Issue 2 (section 5.5)
Measurement Method	ANSI C63.10 11.11
Operator	Wilfried Treffke
Date	2019-03-19

3.7.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.7.3 Setup

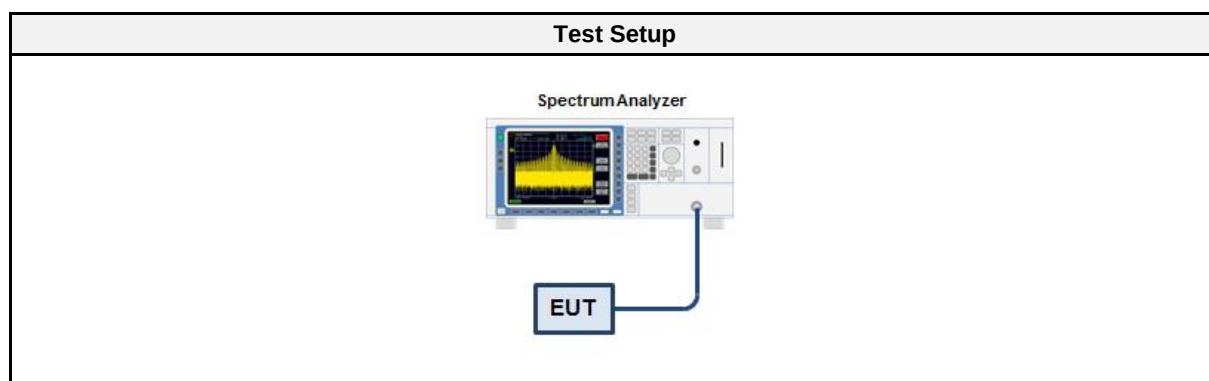

3.7.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.7.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.7.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

Conducted Spurious Emissions


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Max. in-band Frequency [MHz]: 2402.0
 Max. in-band Level [dBm/100 kHz]: -1.1
 Out-of-band Limit [dBm/100 kHz]: -21.1

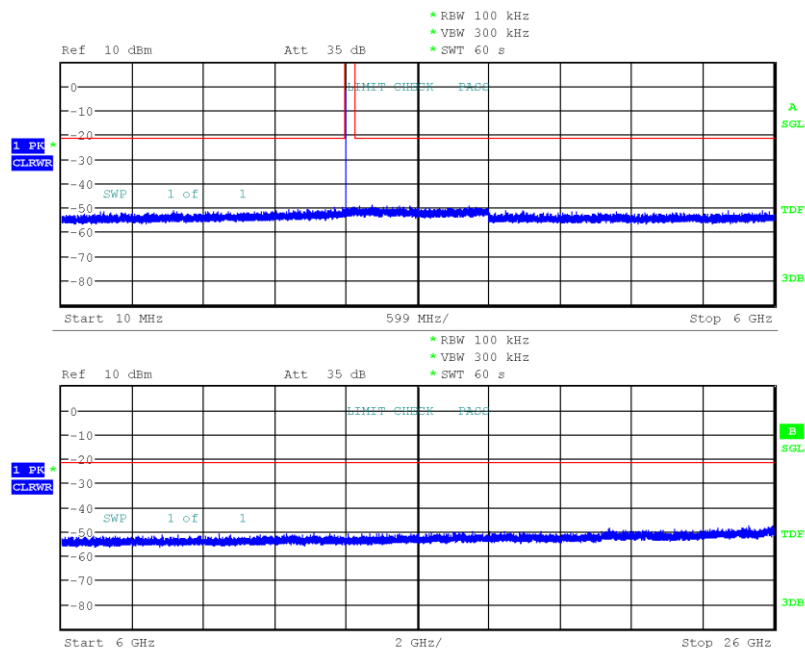

Date: 19.MAR.2019 05:00:45

Conducted Spurious Emissions


Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Max. in-band Frequency [MHz]: 2440.0
 Max. in-band Level [dBm/100 kHz]: -1.4
 Out-of-band Limit [dBm/100 kHz]: -21.4

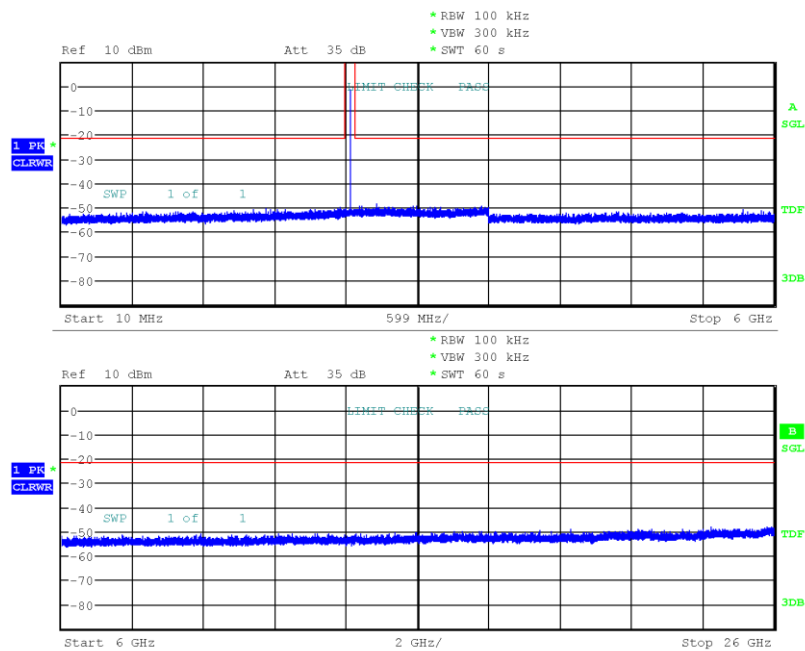

Date: 19.MAR.2019 04:53:23

Conducted Spurious Emissions

Project Number: G0M-1902-8075
 Applicant: Piavita AG
 Model Description: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Sample ID: 23344
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-03-19
 Max. in-band Frequency [MHz]: 2480.0
 Max. in-band Level [dBm/100 kHz]: -1.9
 Out-of-band Limit [dBm/100 kHz]: -21.9

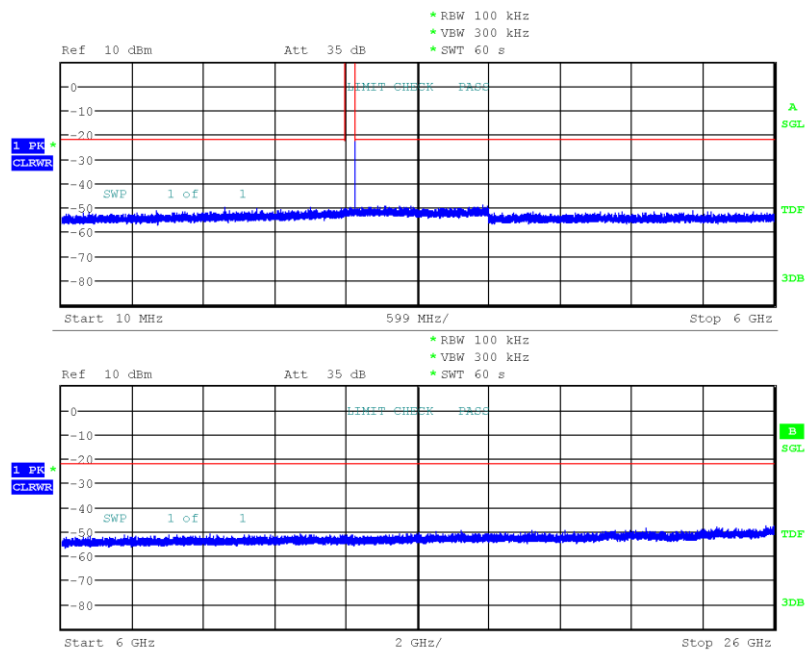

Date: 19.MAR.2019 04:48:48

3.8 Test Conditions and Results - Transmitter radiated emissions


3.8.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 (section 6.13)
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2019-03-19

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

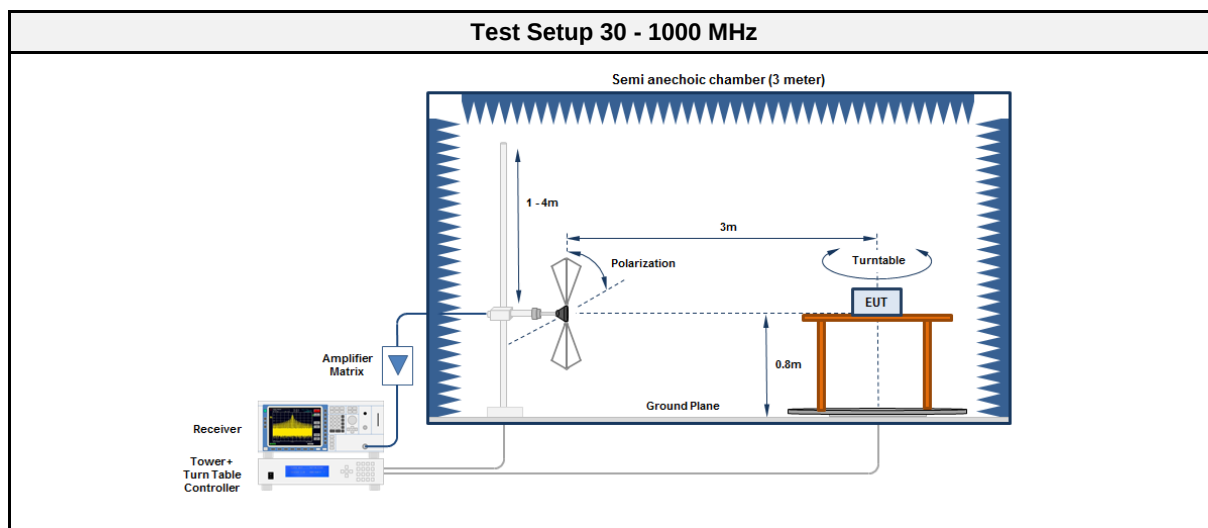

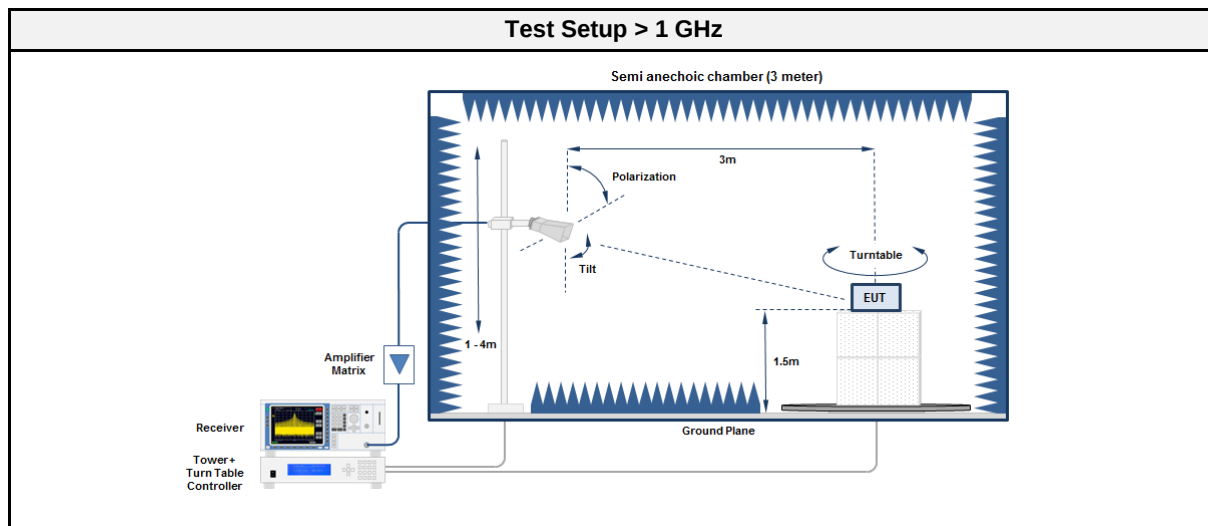

3.8.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF01153	2018-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2018-10	2019-10

3.8.5 Procedure

Test Procedure < 30 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The EUT is rotated through 360° 4. The emissions are measured with peak detector and max hold 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	4800	37.26	pk	hor	74.00	-36.74
2440	7315	42.21	pk	ver	74.00	-31.79
2480	Comment: Emission level corresponds to ambient noise floor					

3.9 Test Conditions and Results - Receiver radiated emissions


3.9.1 Information


Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2019-03-19

3.9.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.9.3 Setup

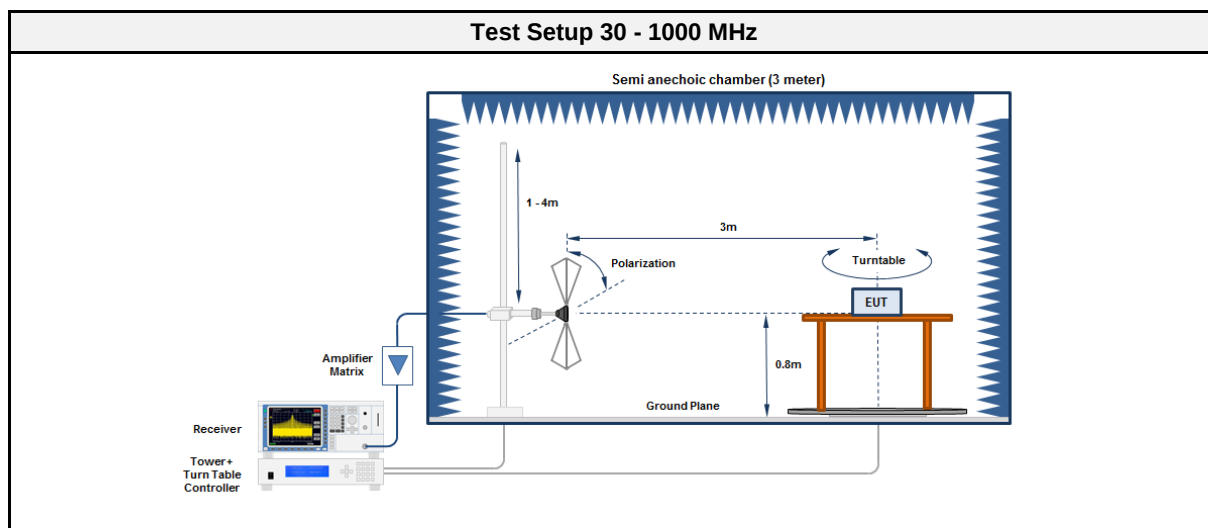

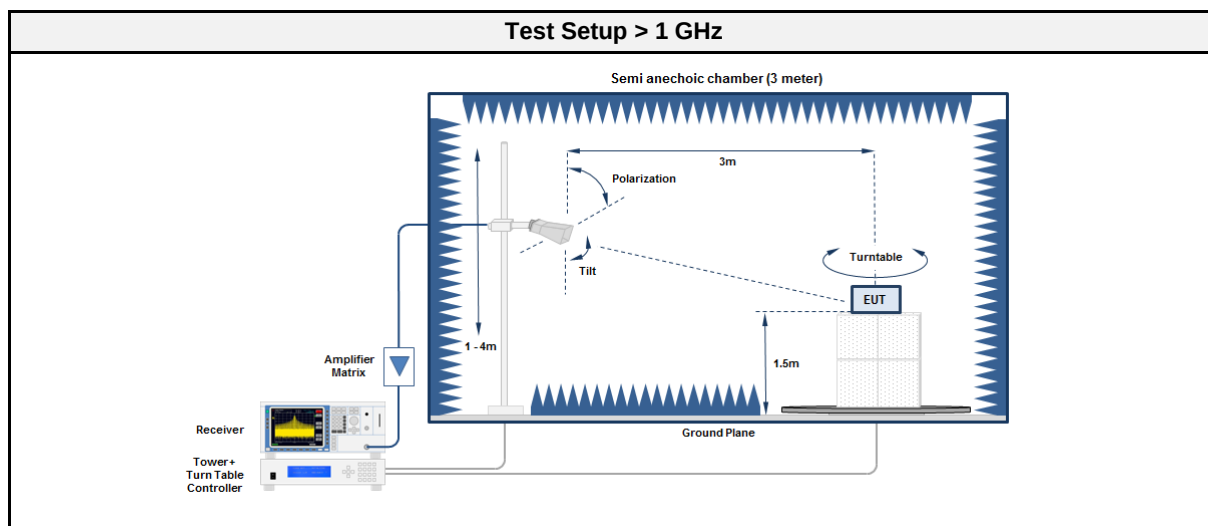

3.9.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF01153	2018-09	2019-09

3.9.5 Procedure

Test Procedure 30 - 1000 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure > 1 GHz						
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector						

3.9.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2440	31.353	34.06	qpk	hor	40.00	-05.94
2440	31.372	32.26	qpk	ver	40.00	-07.74
2440	10981	43.74	pk	ver	53.98	-10.24
2440	11017	44.09	pk	hor	53.98	-09.89


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note:

Index 30

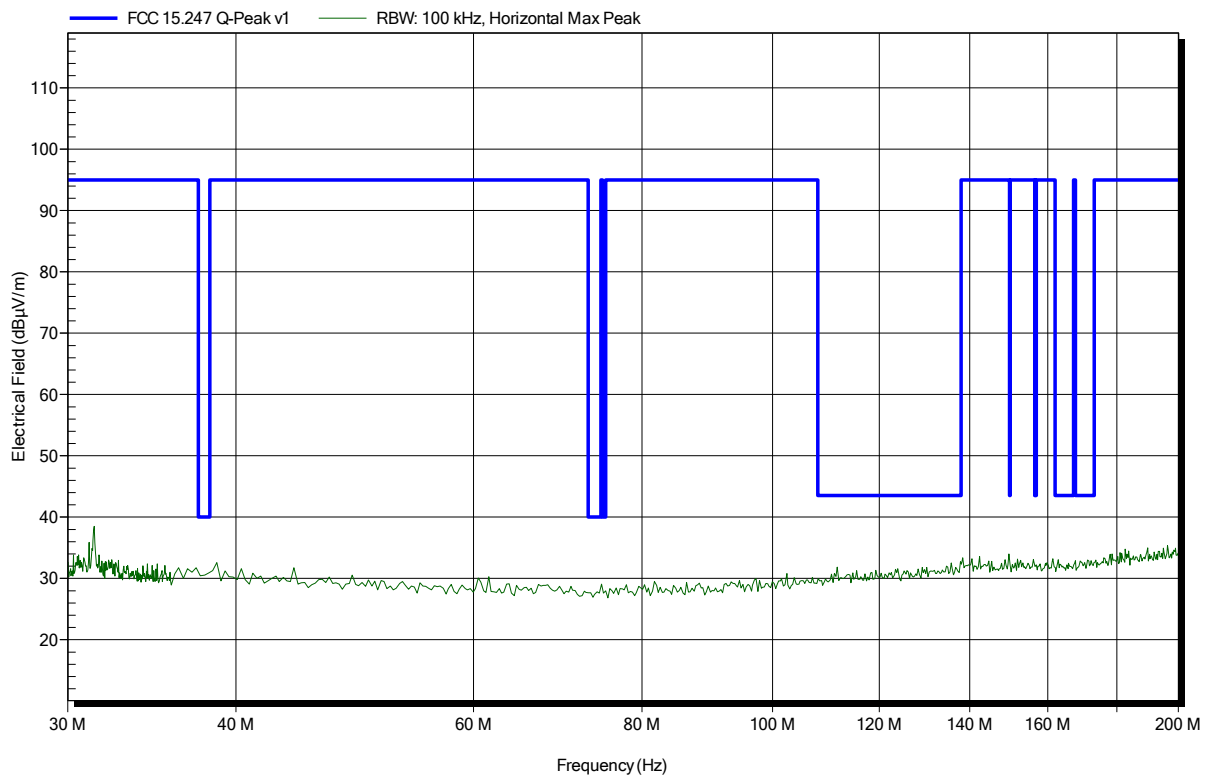


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note:

Index 29

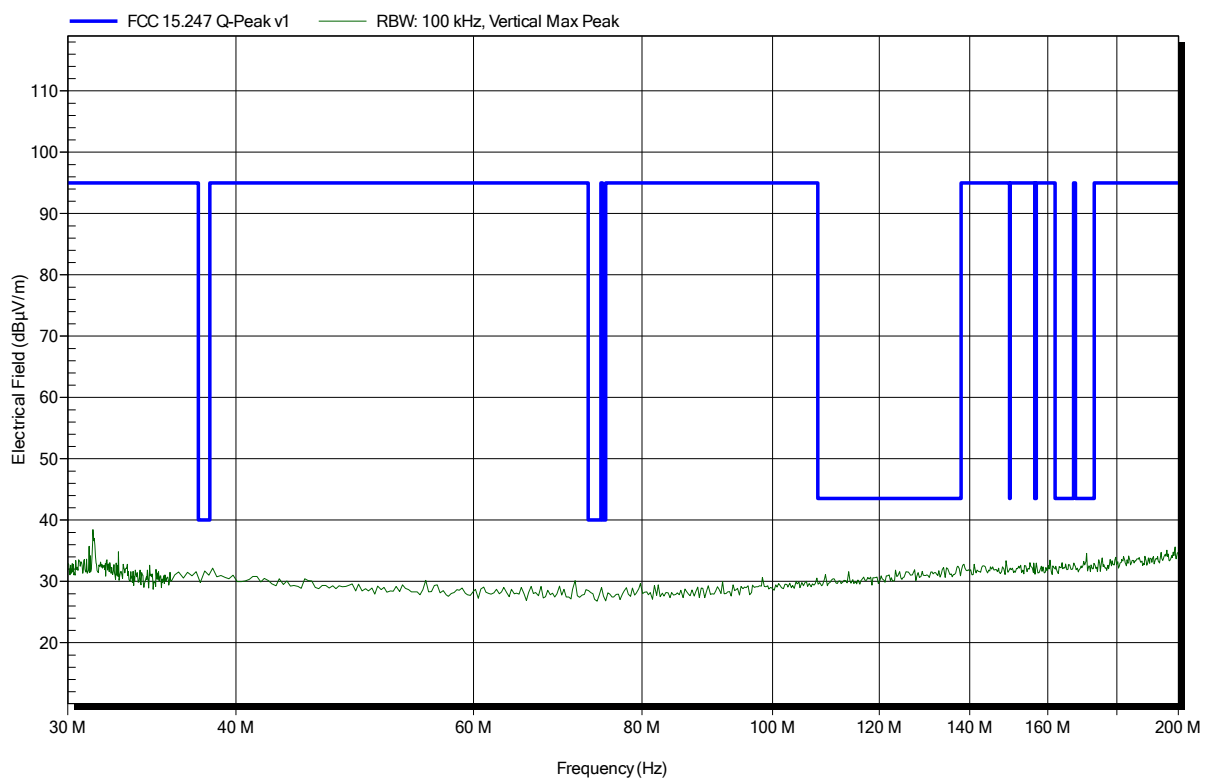

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Rohde & Schwarz HL 223, Horizontal


Measurement distance: 3 m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 31

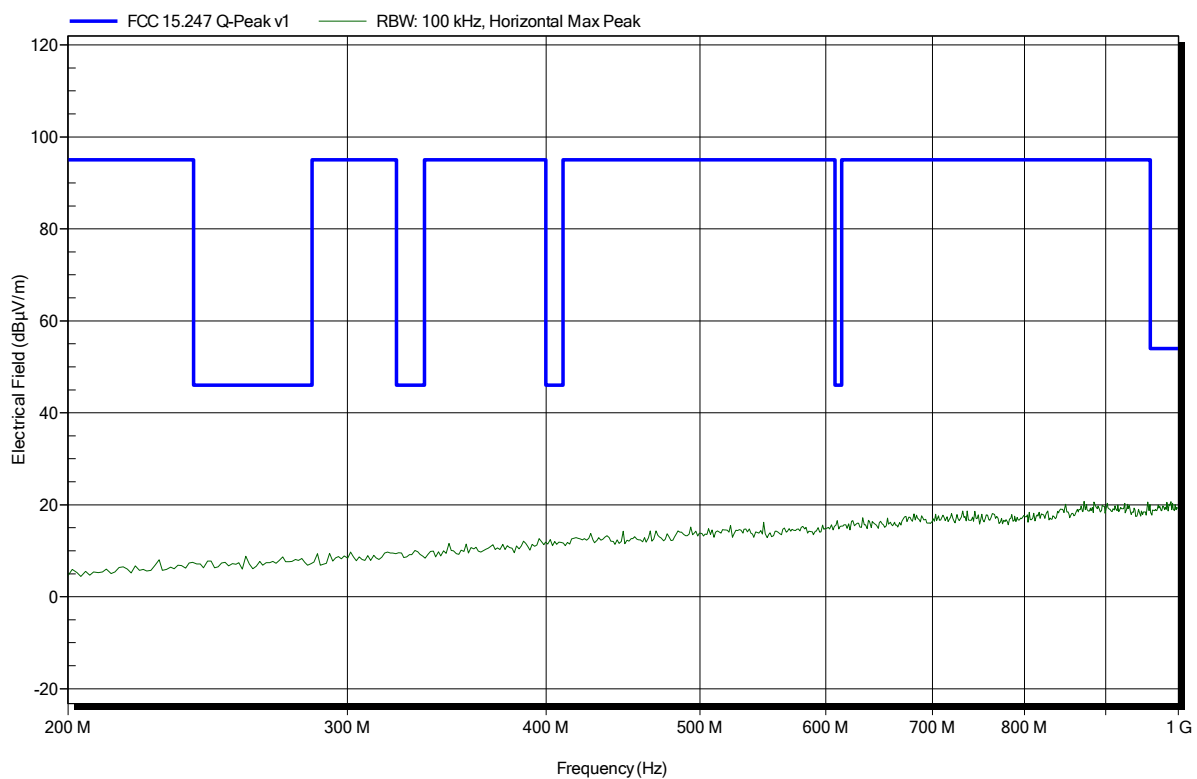


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note:

Index 32

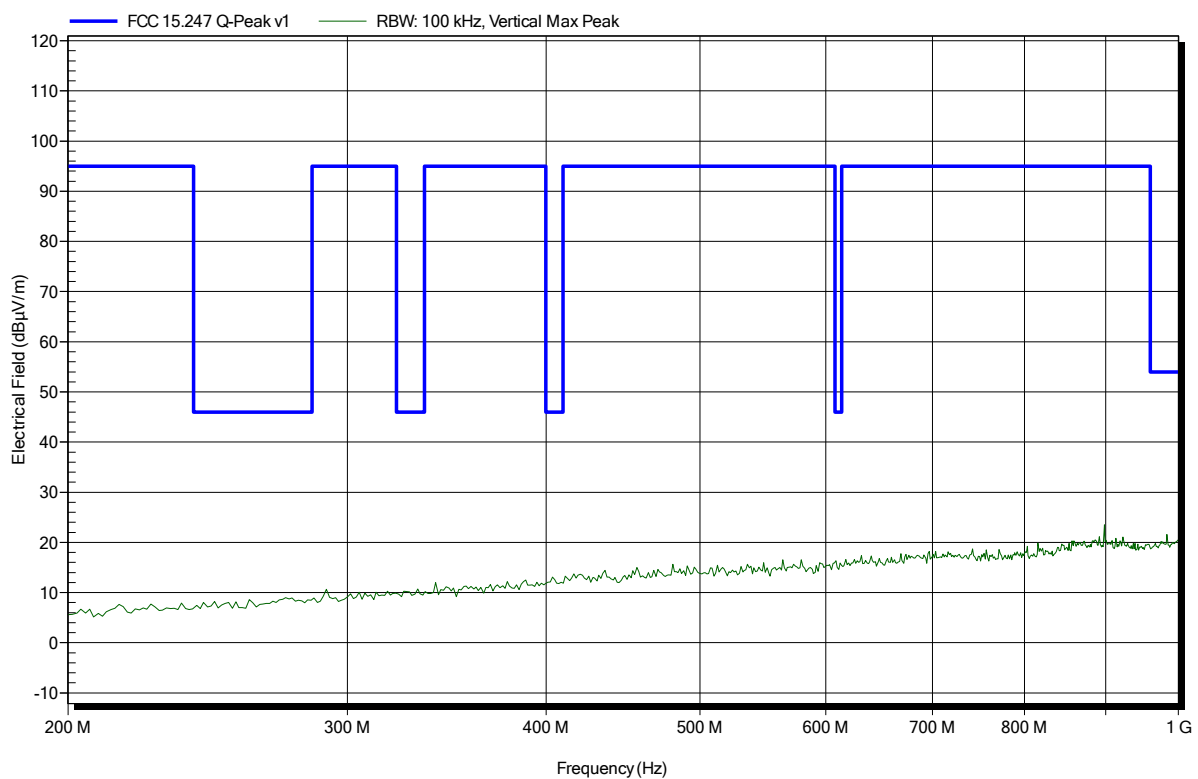

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 1

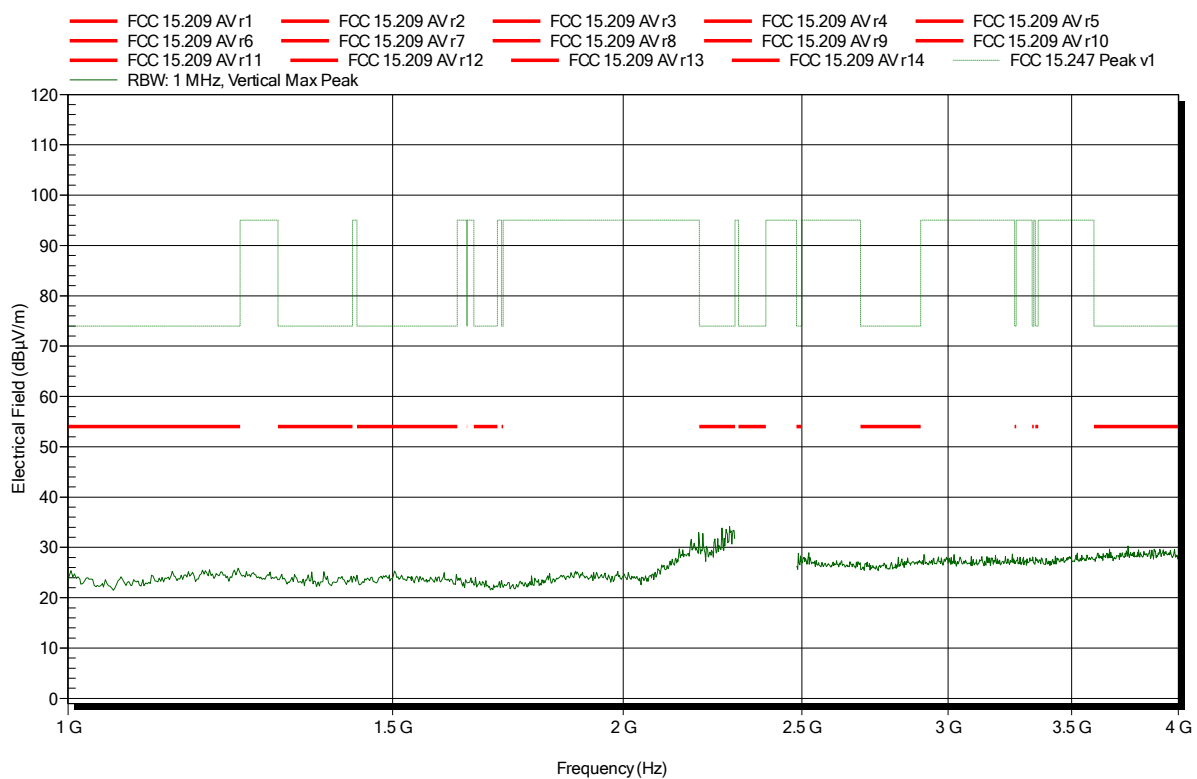

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 6

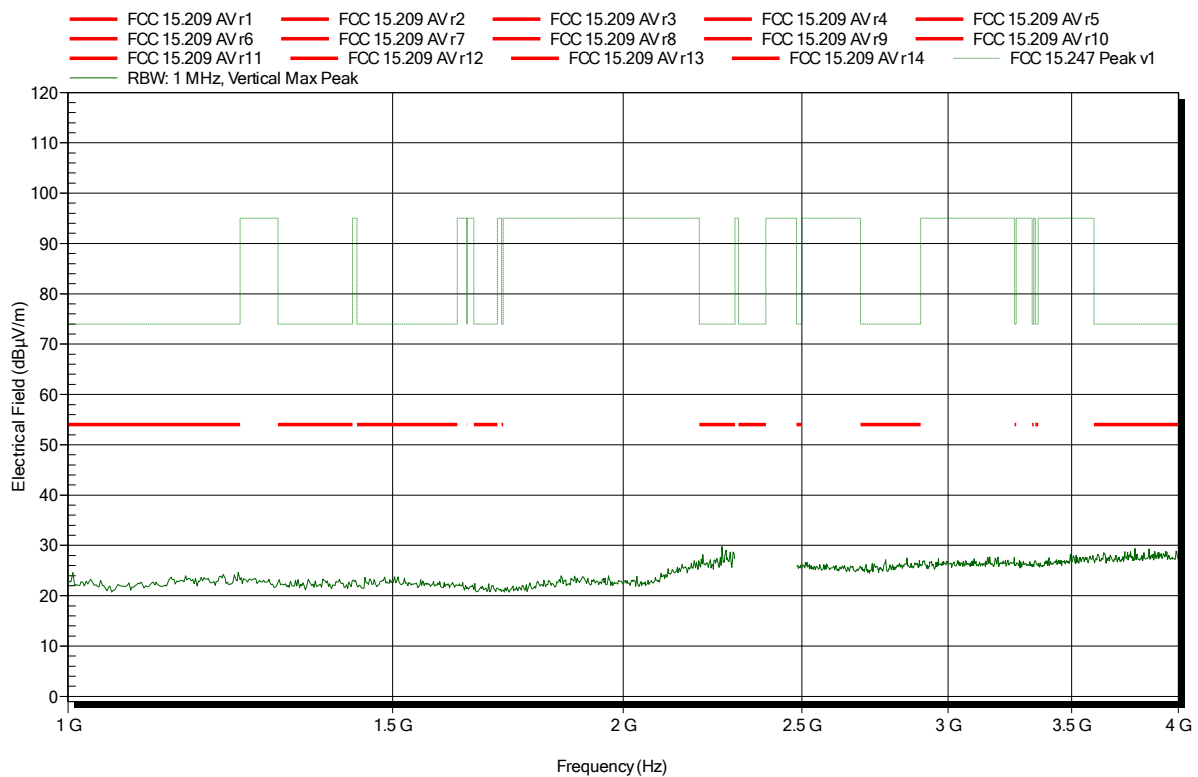


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note: lower bandedge

Index 2

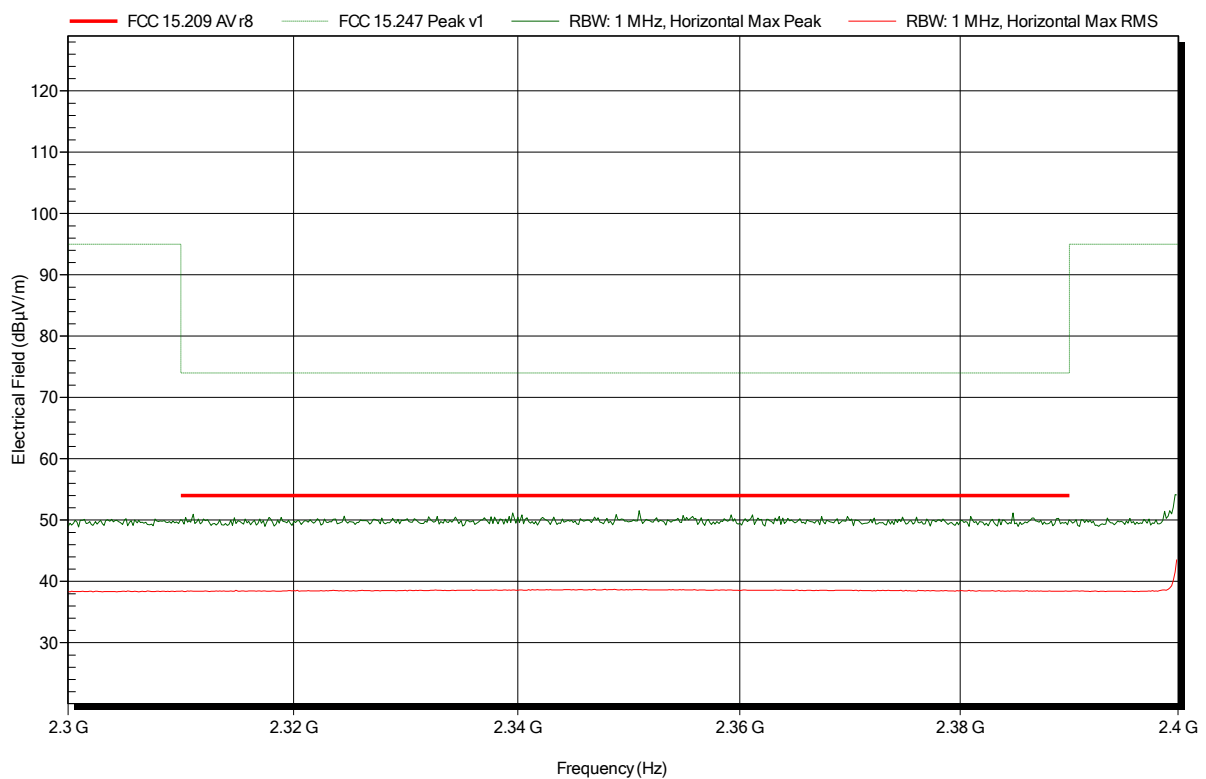


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note: lower bandedge

Index 7

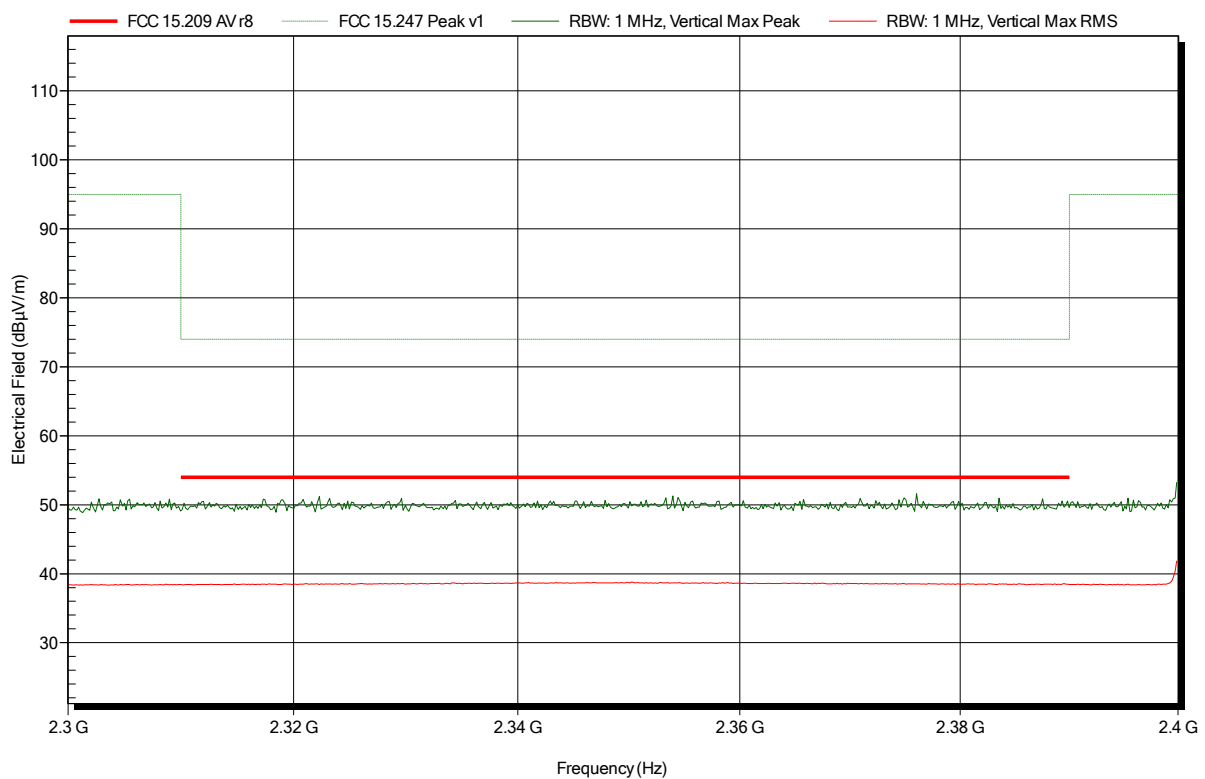

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 3

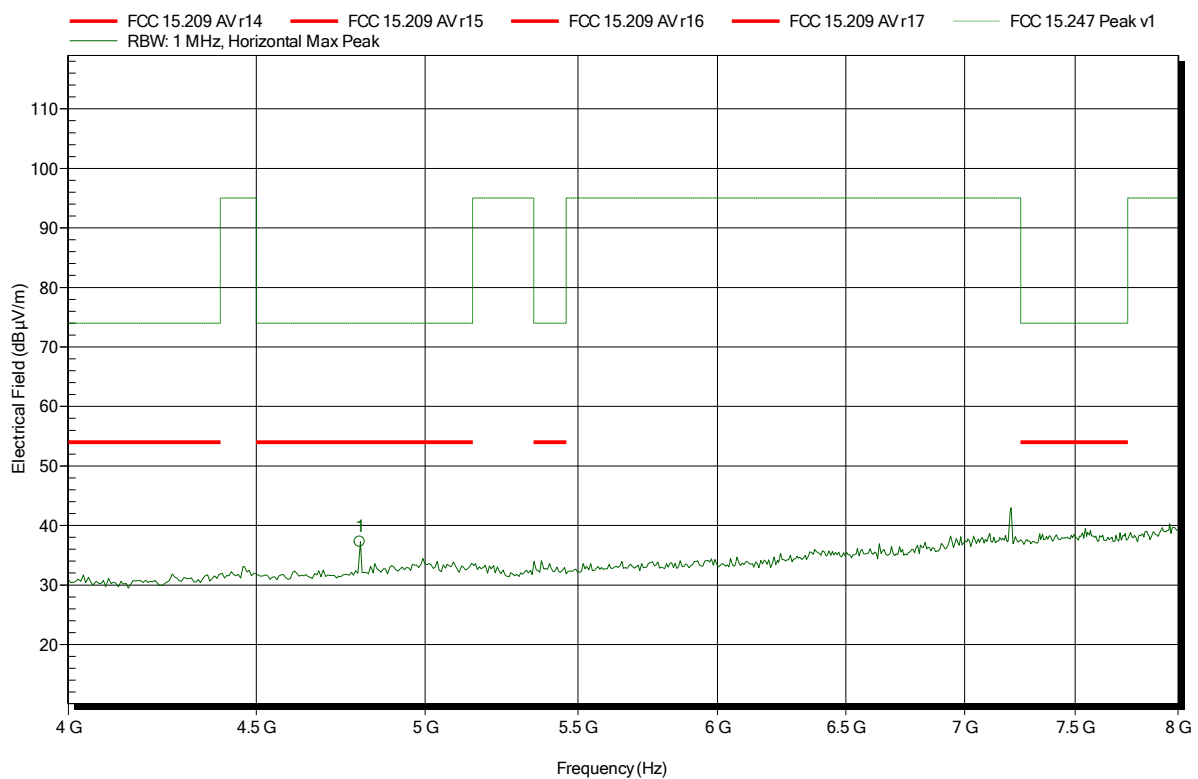

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.8 GHz	37.26 dBµV/m	74 dBµV/m	-36.74 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 8

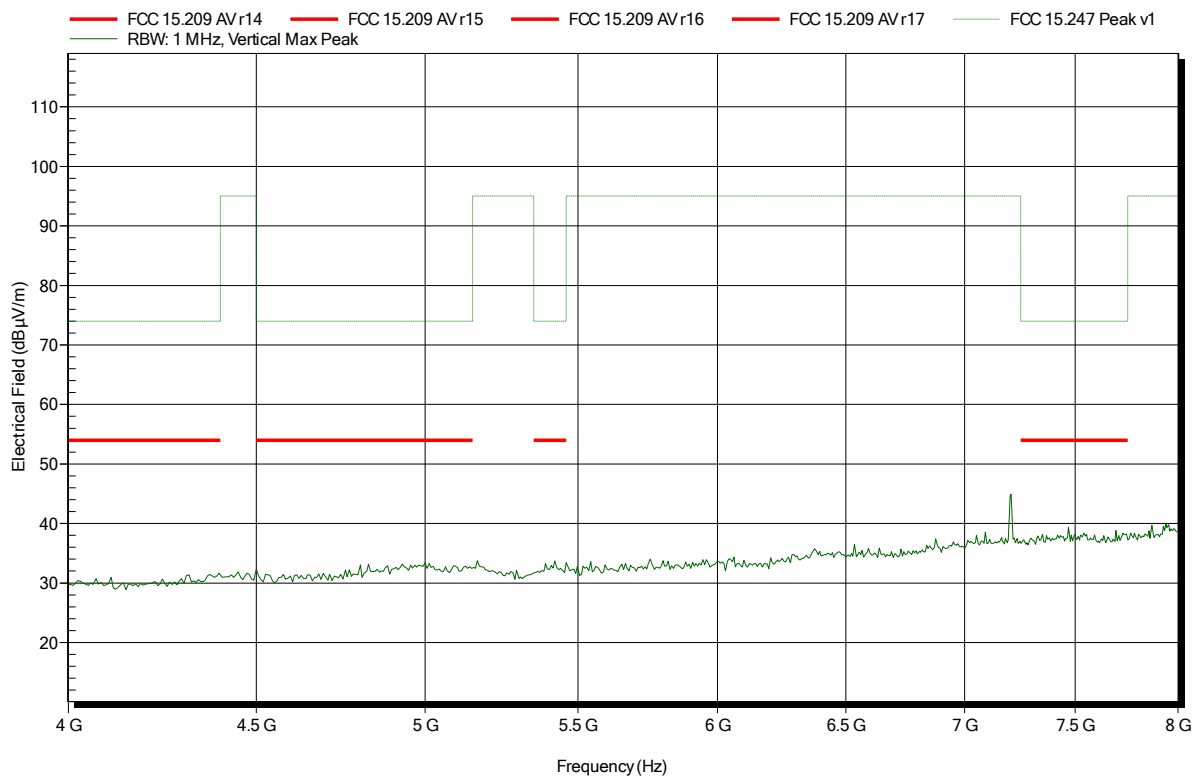


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note:

Index 4

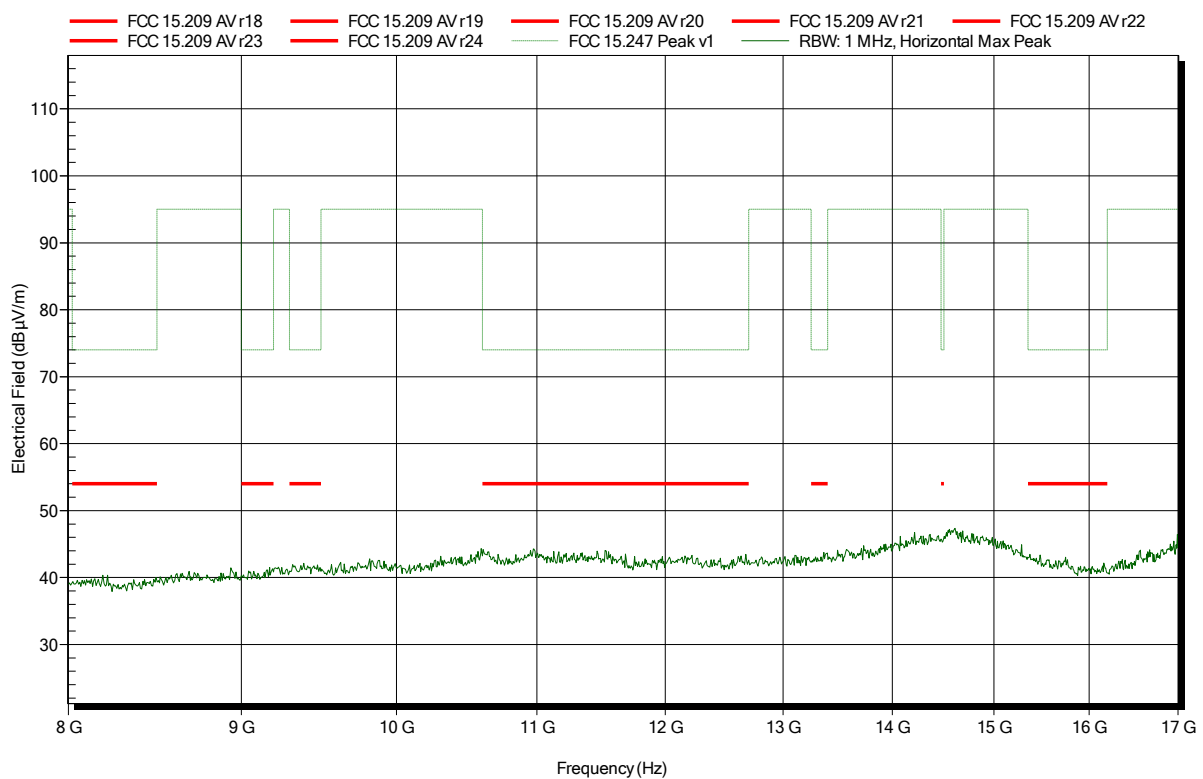


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2019-03-18
Note:

Index 9

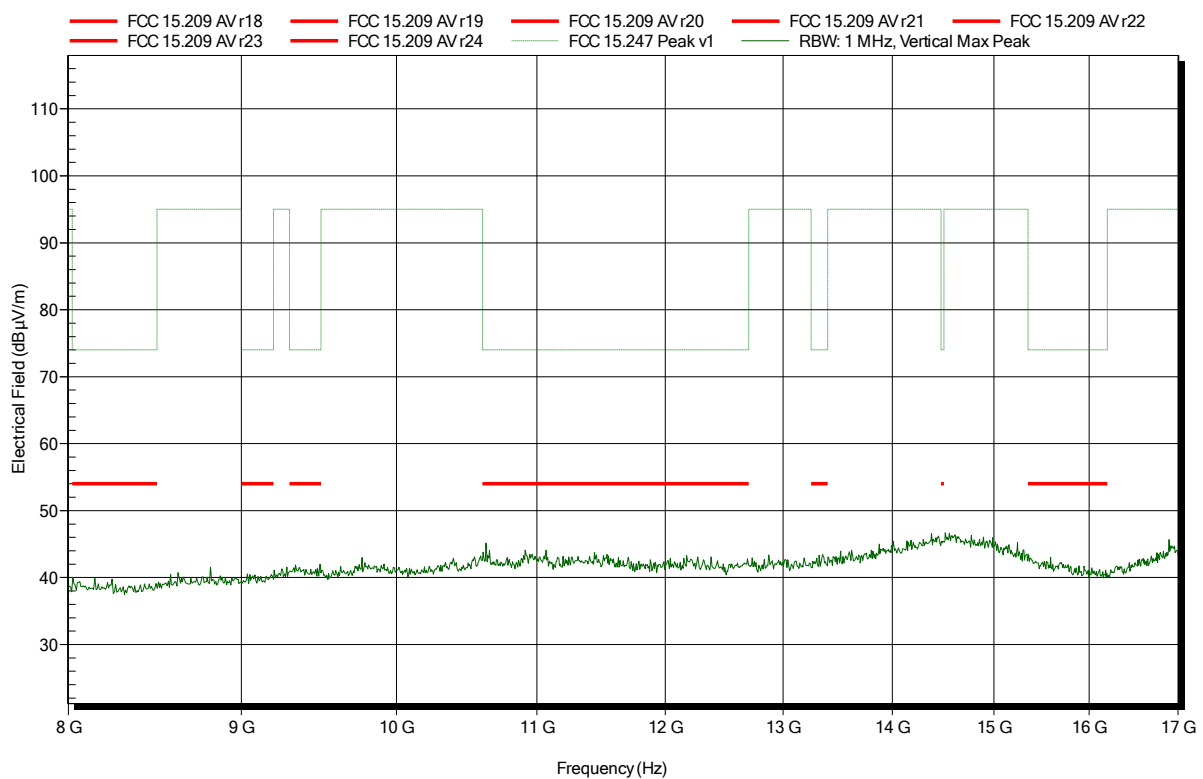

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Amplifier Research AT4560, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 5

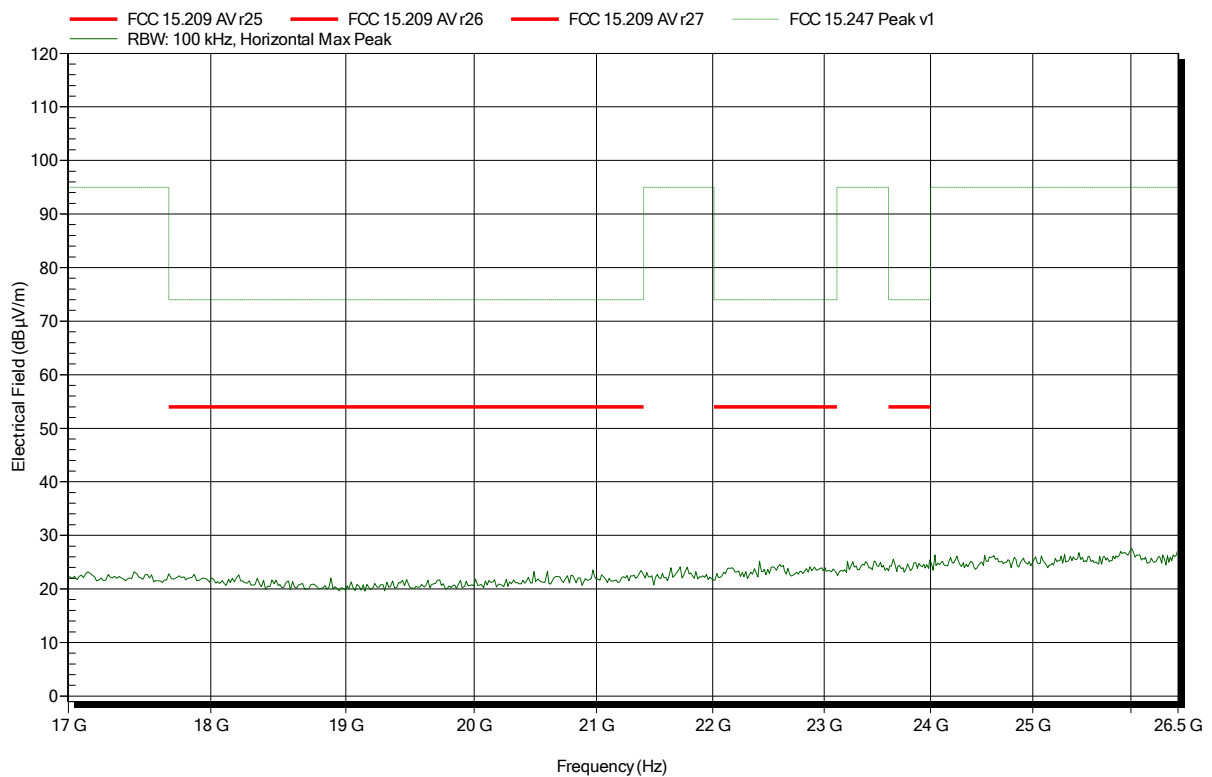

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Amplifier Research AT4560, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2402 MHz

Test Date: 2019-03-18

Note:

Index 10

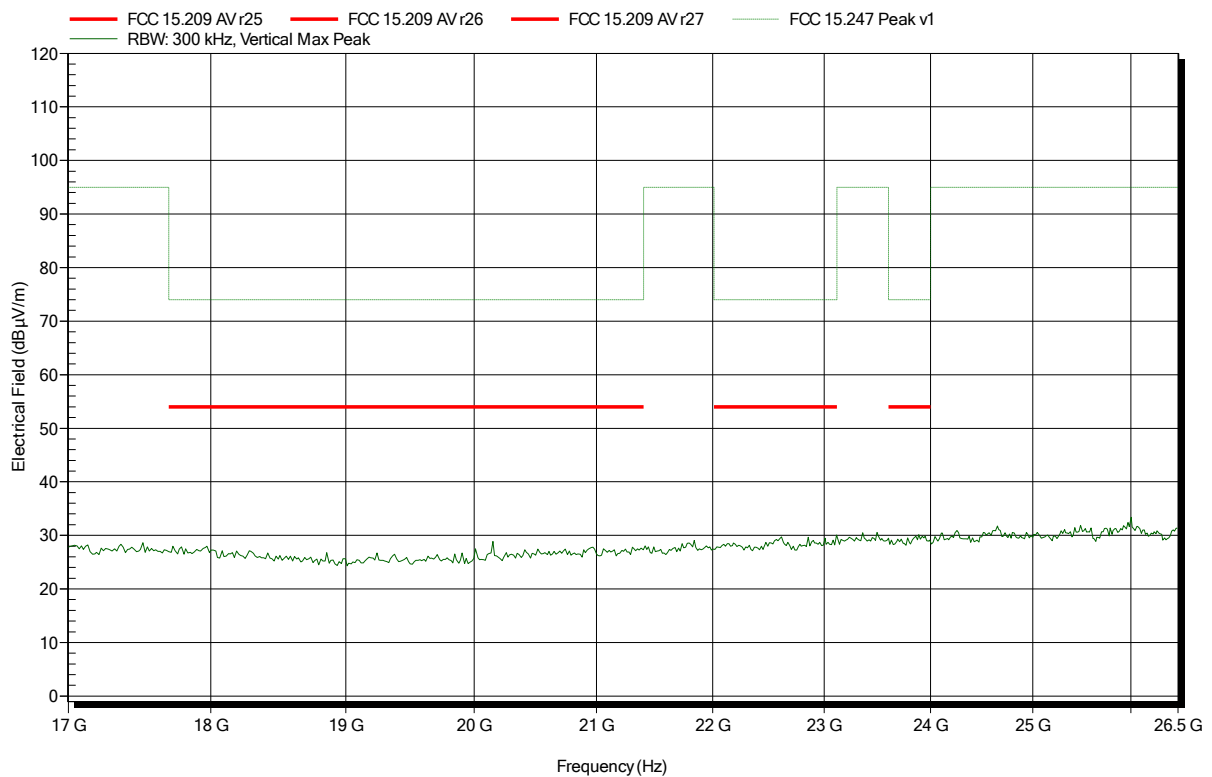

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 11

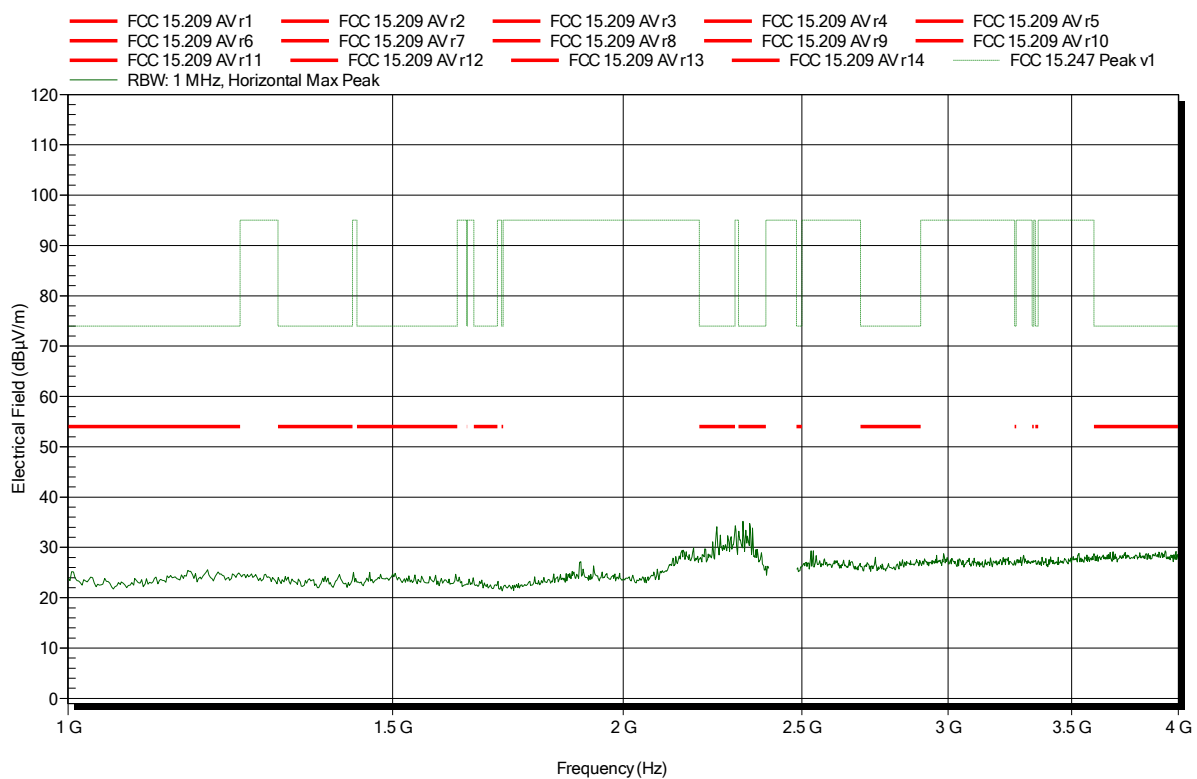

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 15

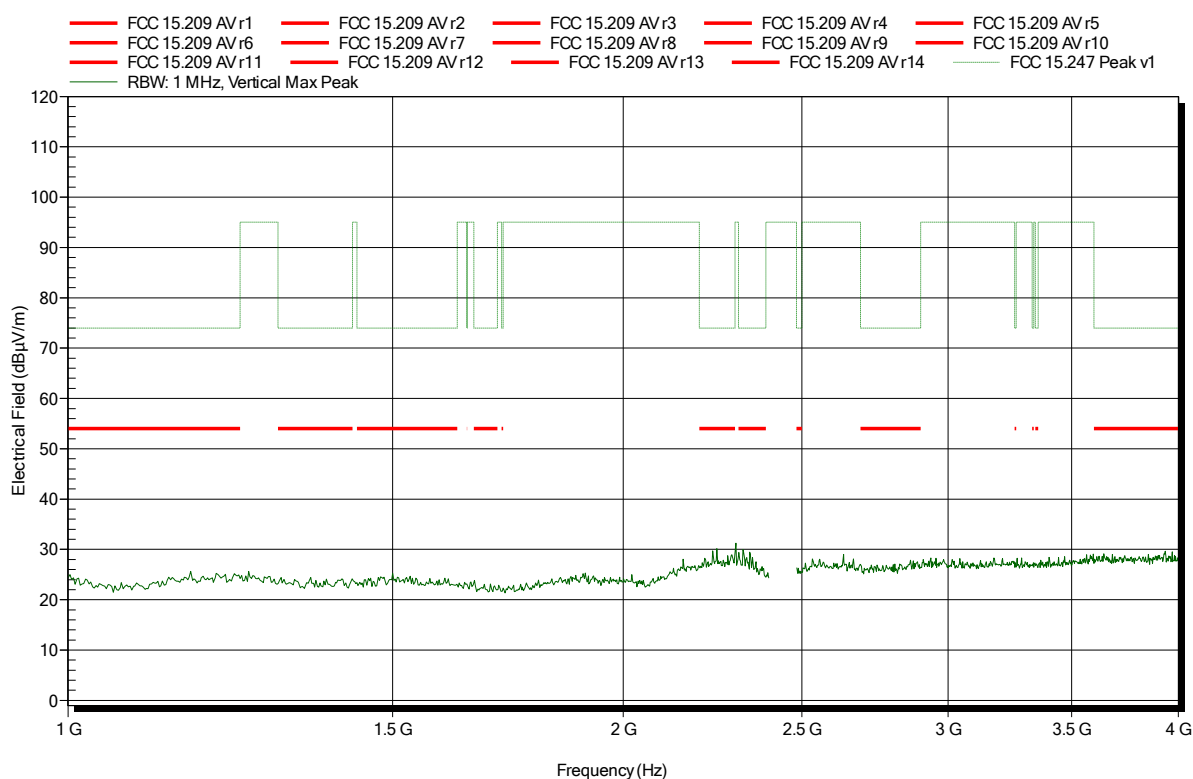

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 12

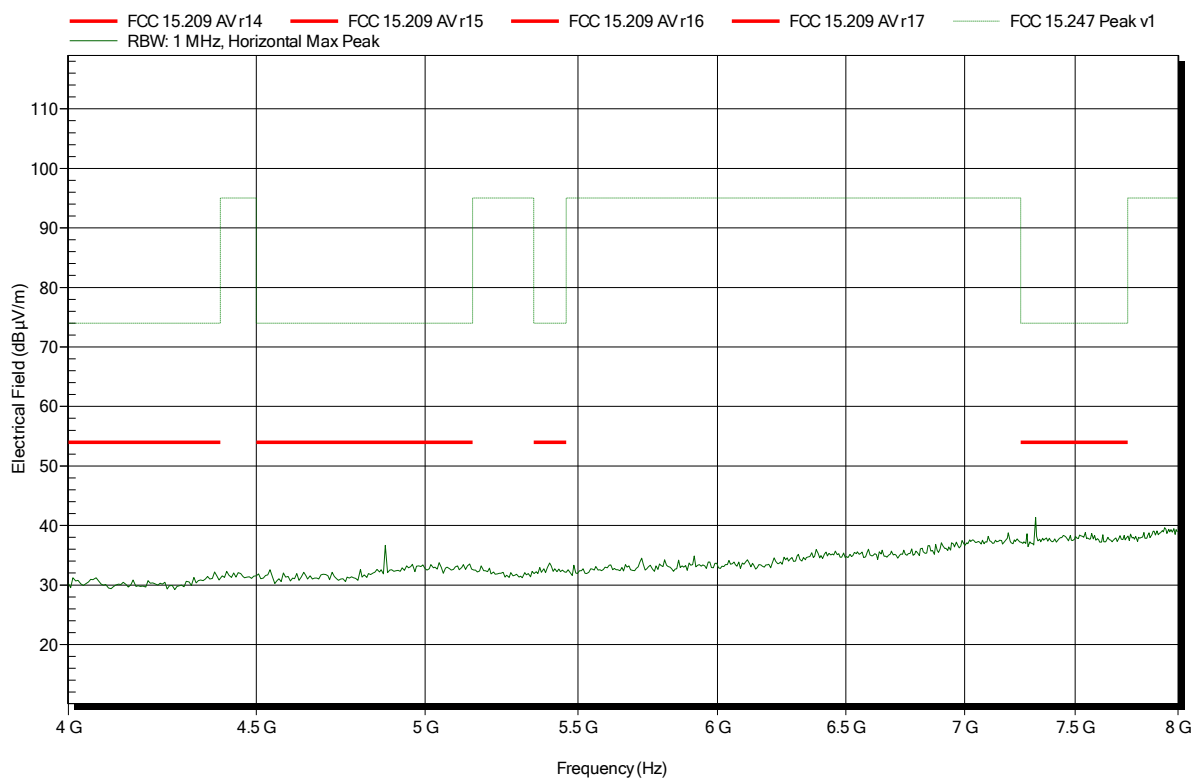

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 16

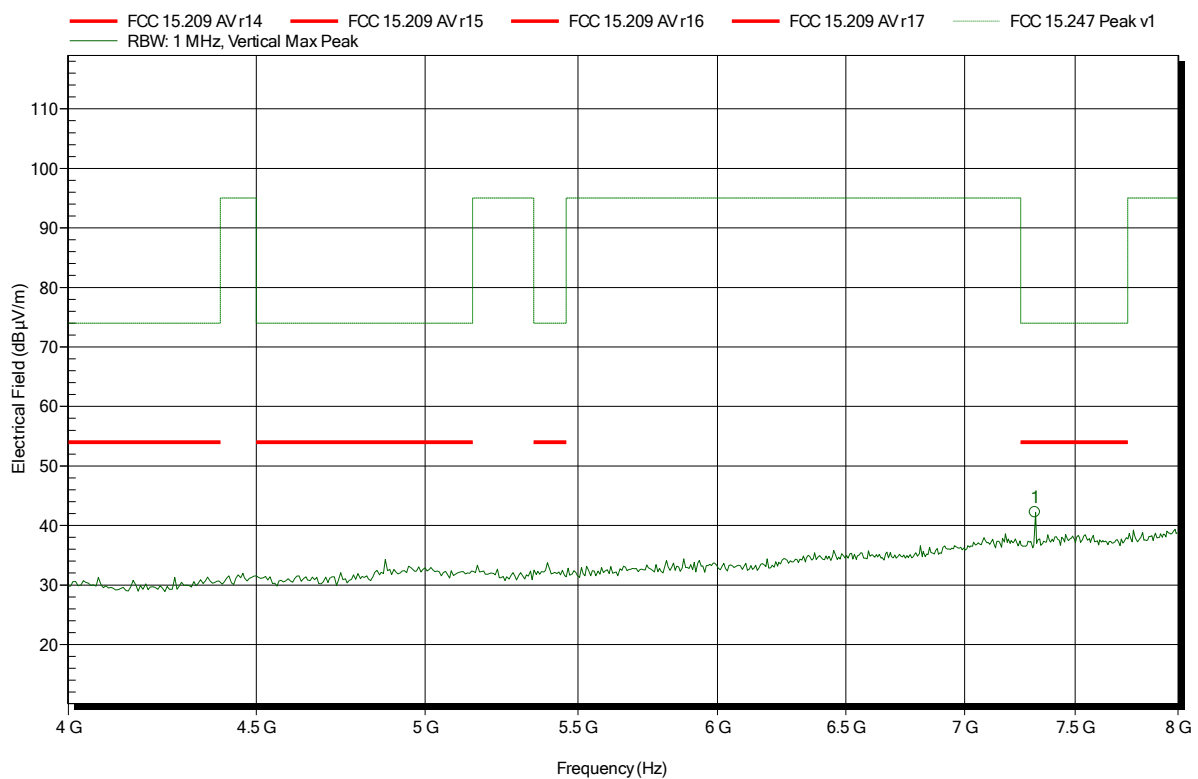


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.315 GHz	42.21 dBµV/m	74 dBµV/m	-31.79 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2019-03-18
Note:

Index 13

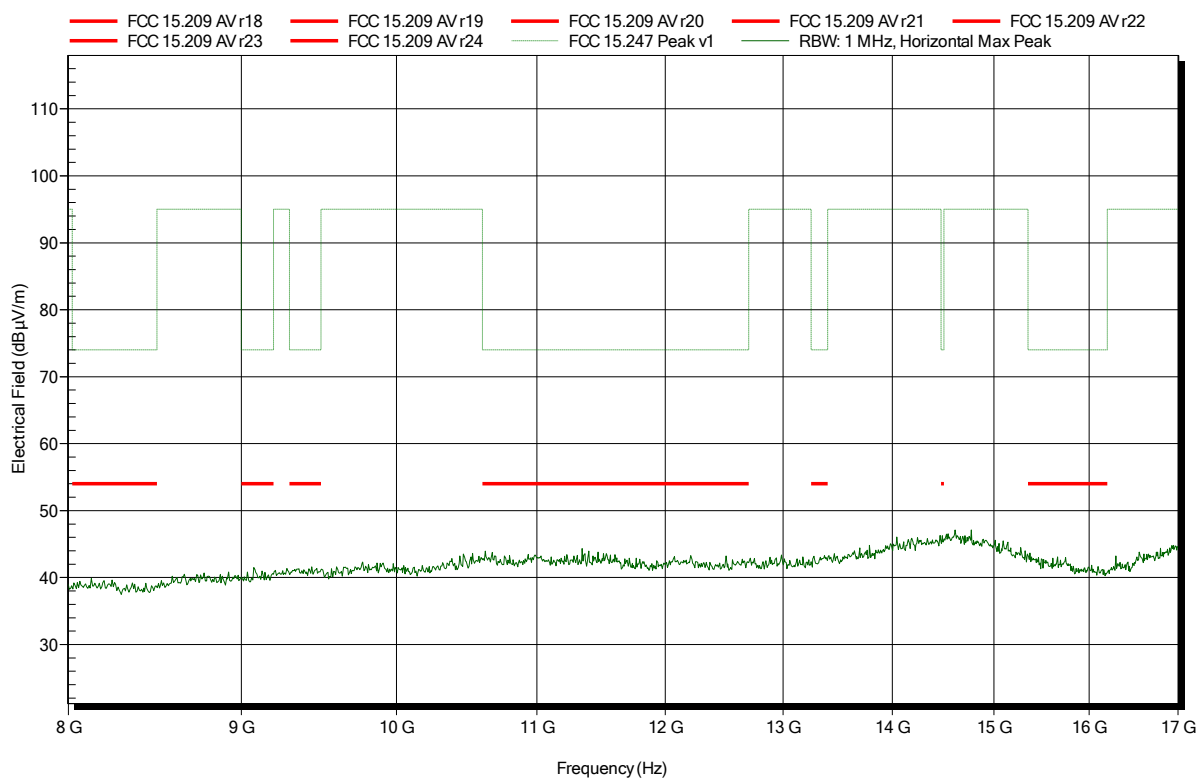


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2019-03-18
Note:

Index 17

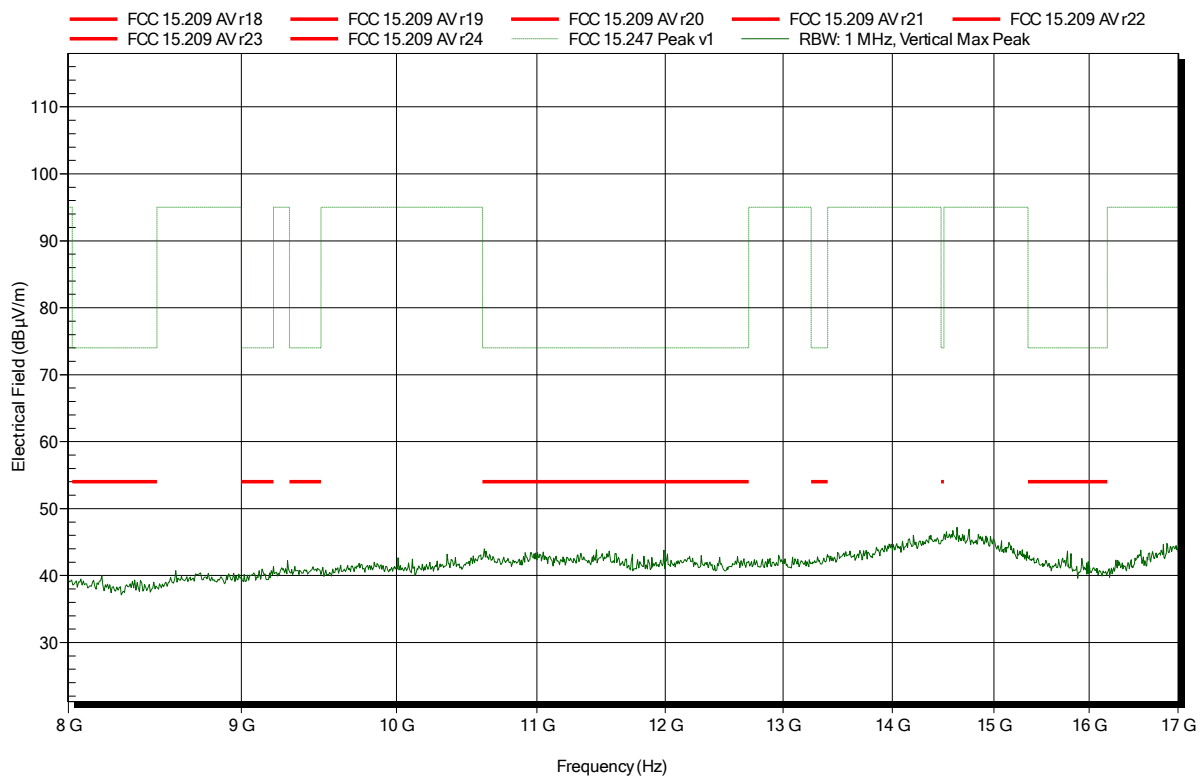

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Amplifier Research AT4560, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 14

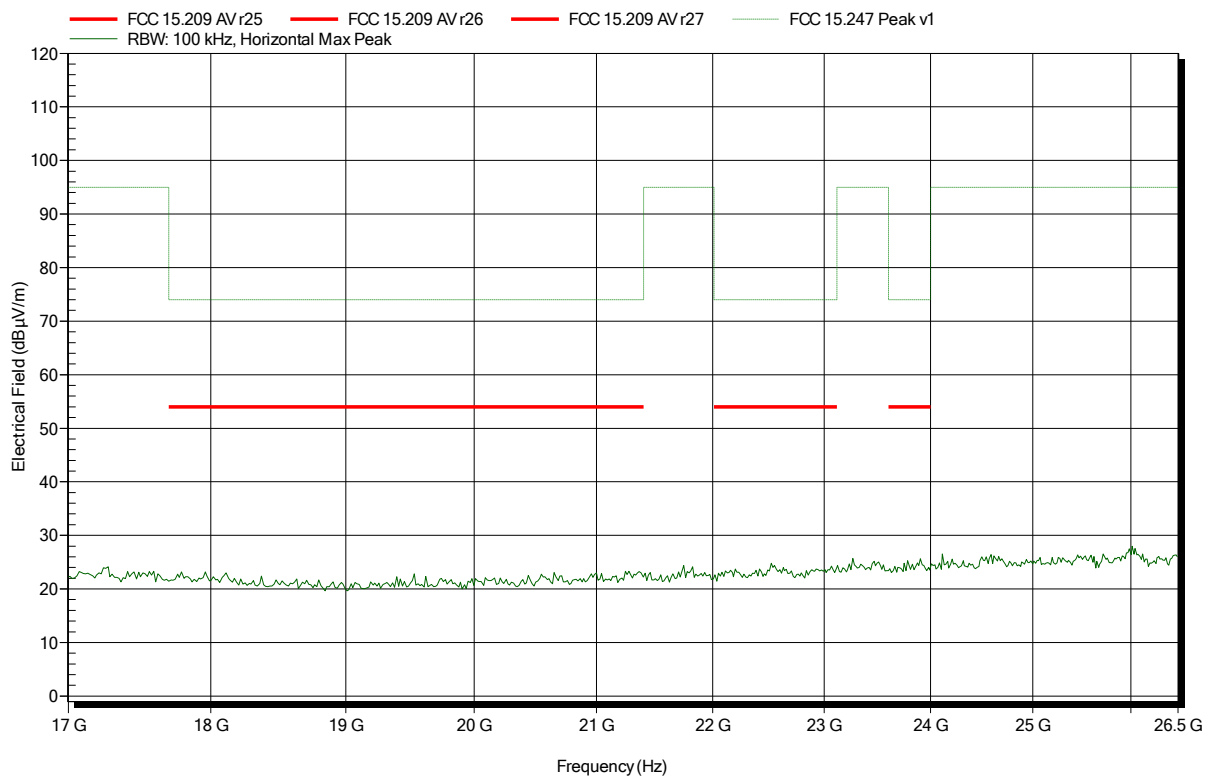

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Amplifier Research AT4560, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 18

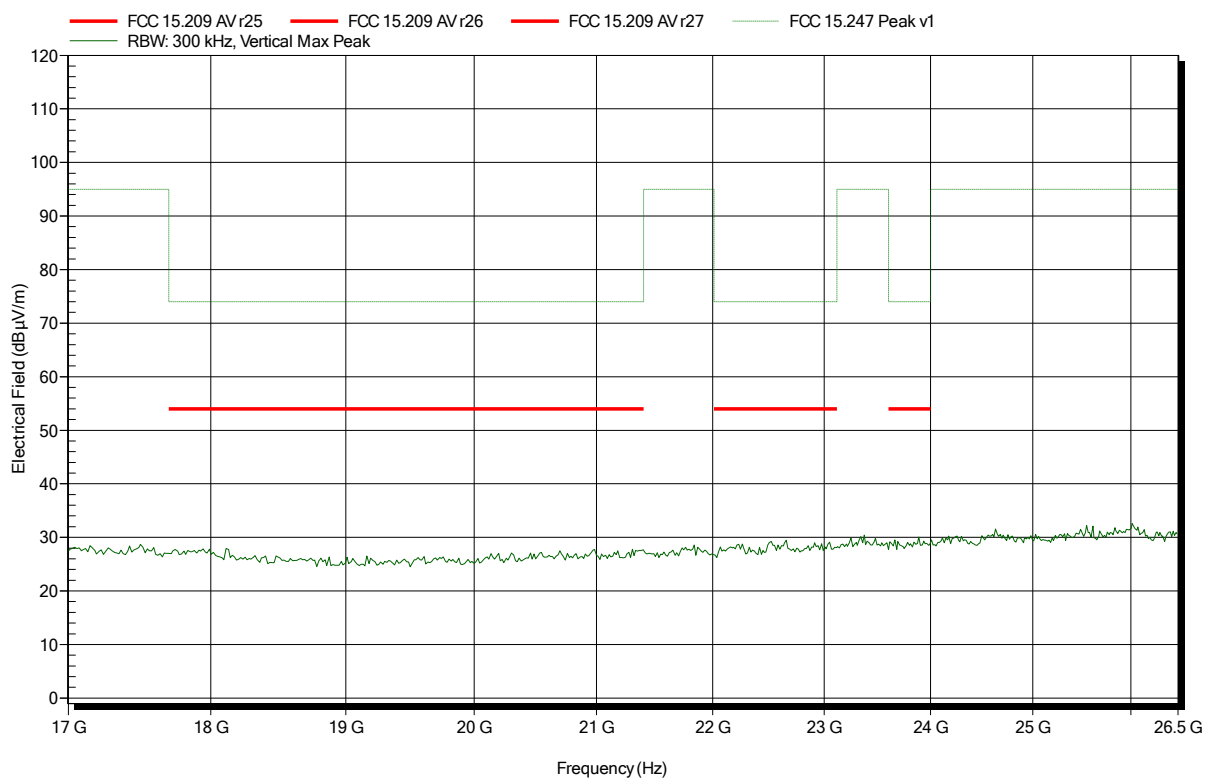

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 19

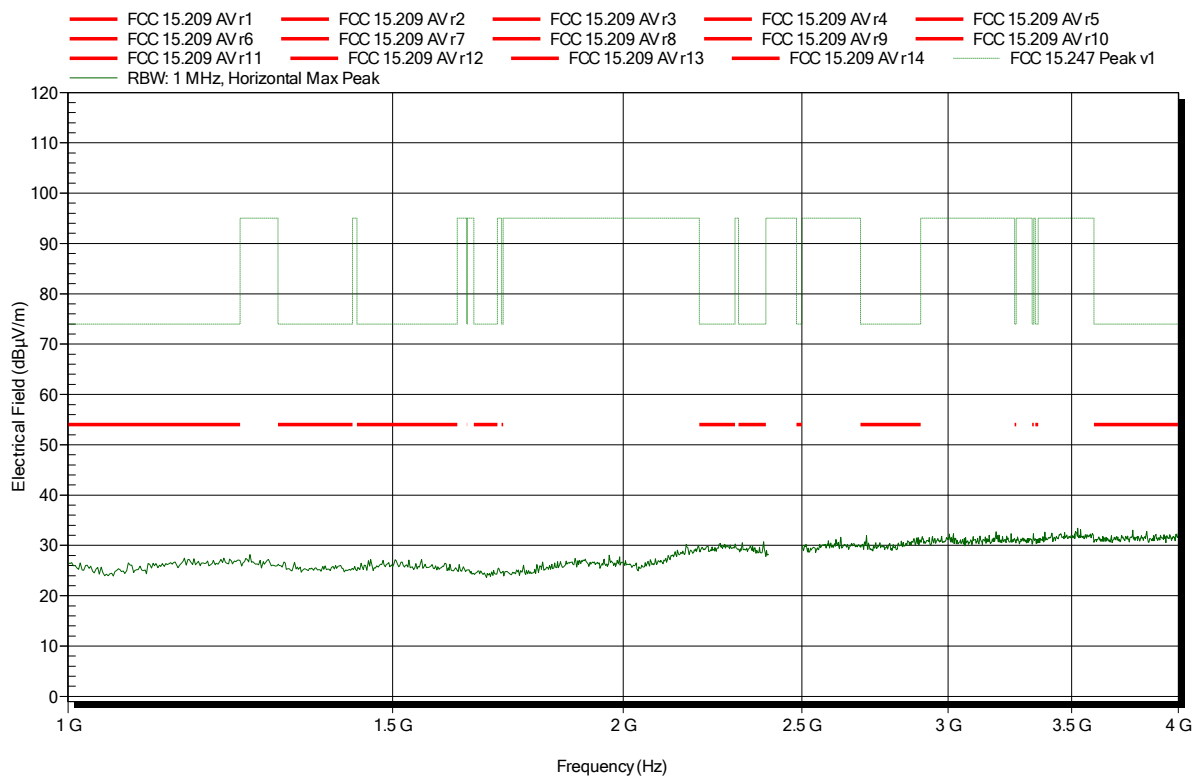

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 24

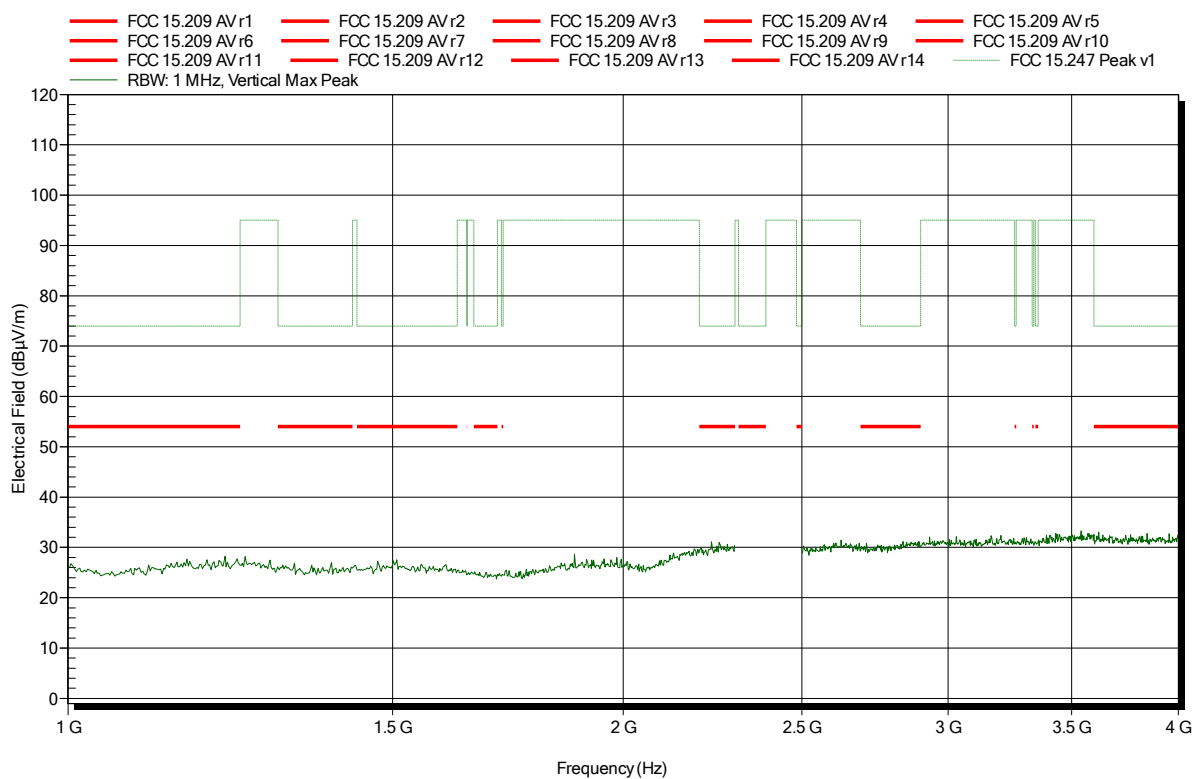


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2019-03-18
Note: upper bandedge

Index 20

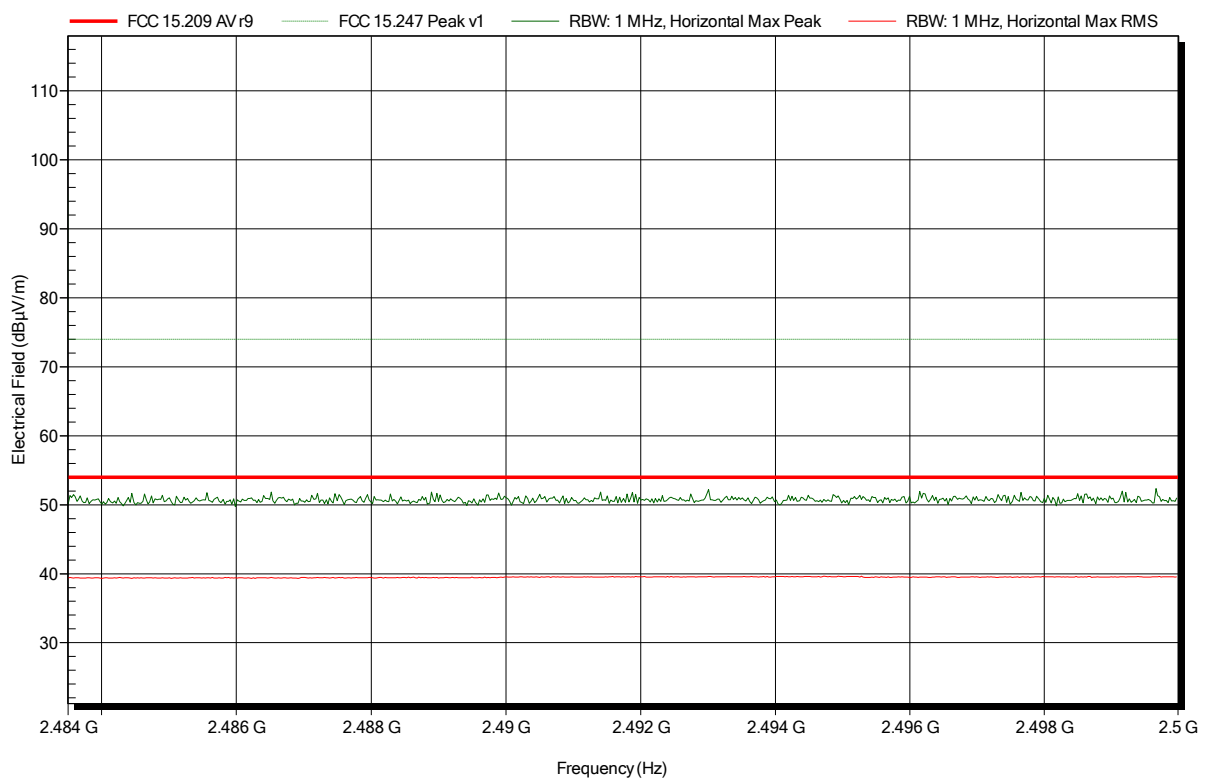


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2480 MHz
 Test Date: 2019-03-18
 Note: upper bandedge

Index 25

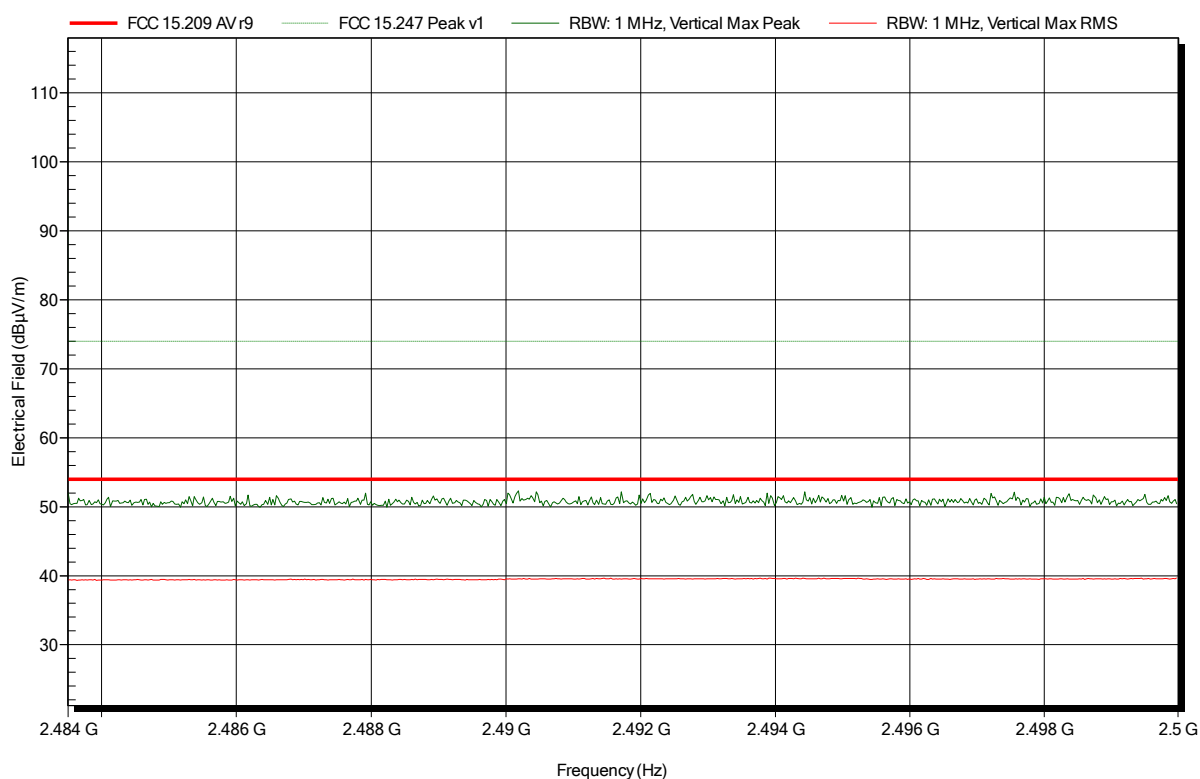

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 21

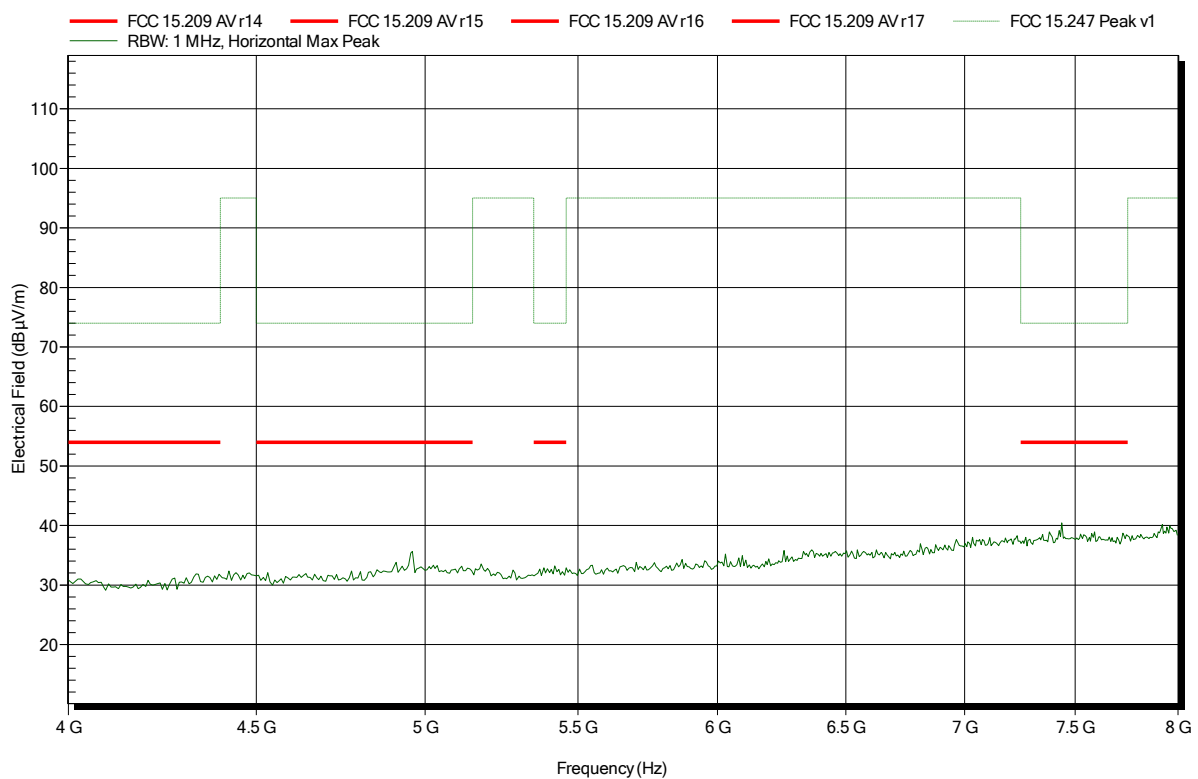

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 26

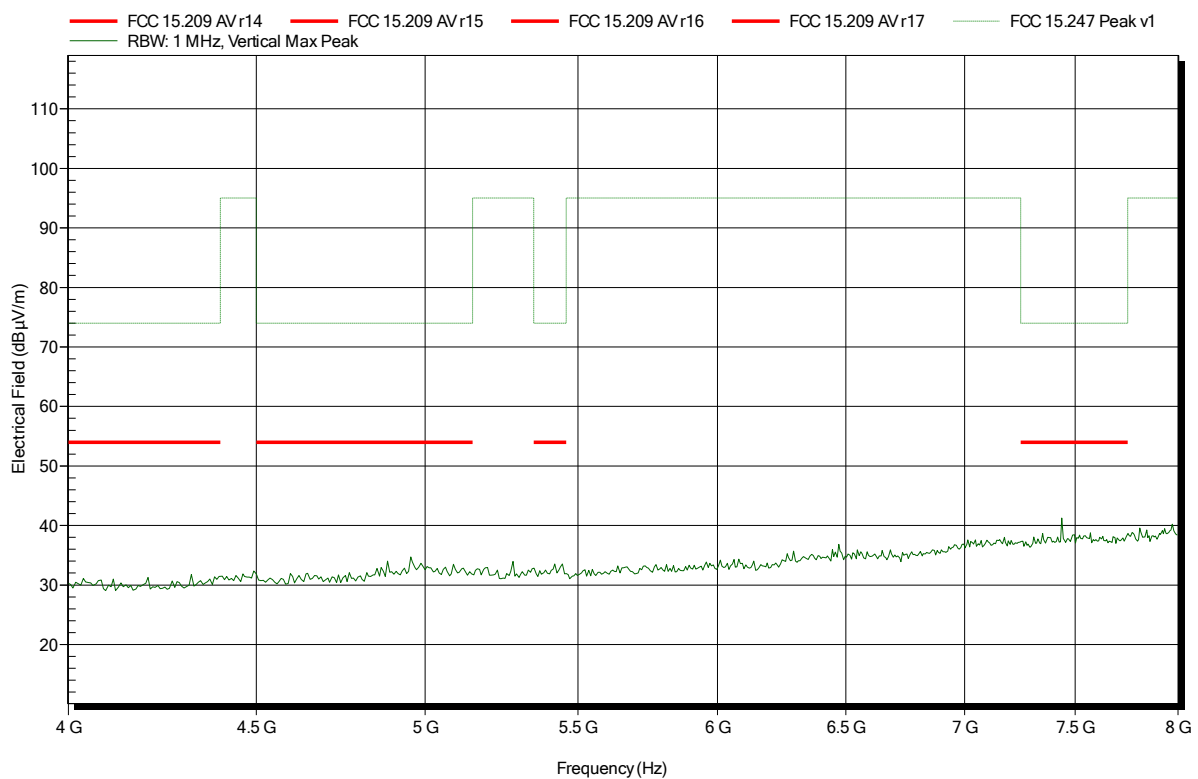

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 22

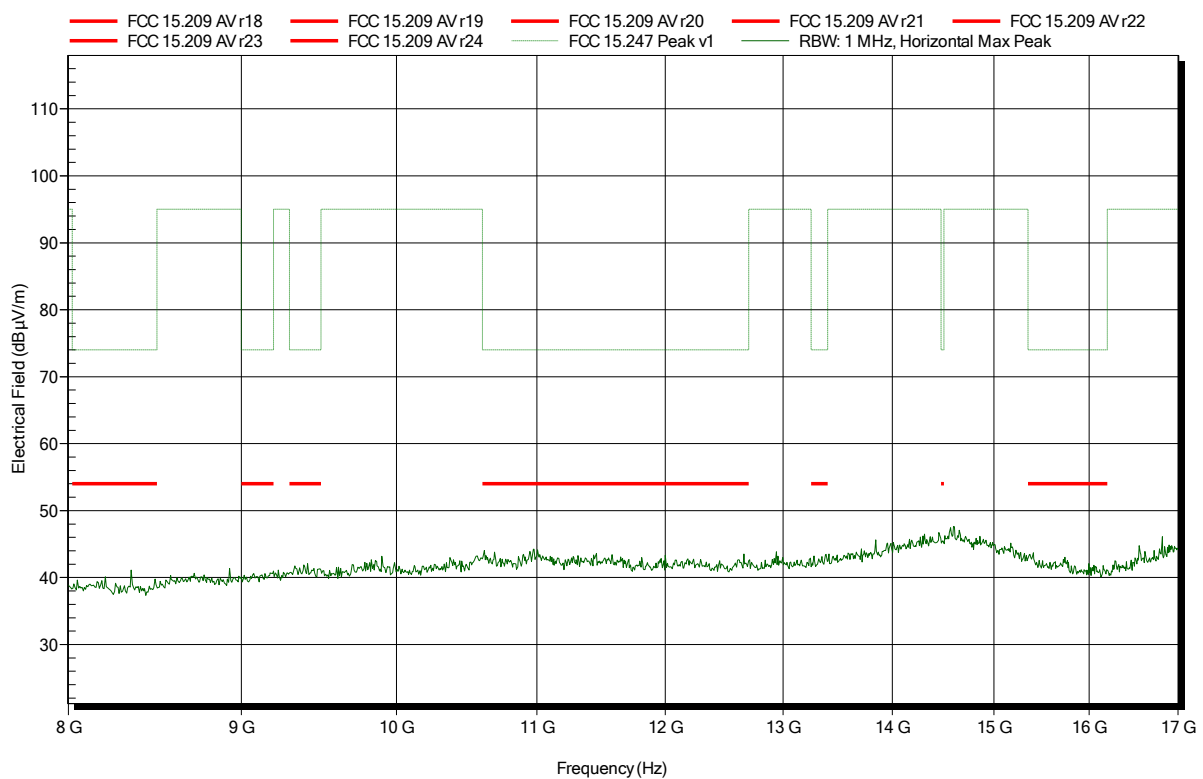


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2019-03-18
Note:

Index 27

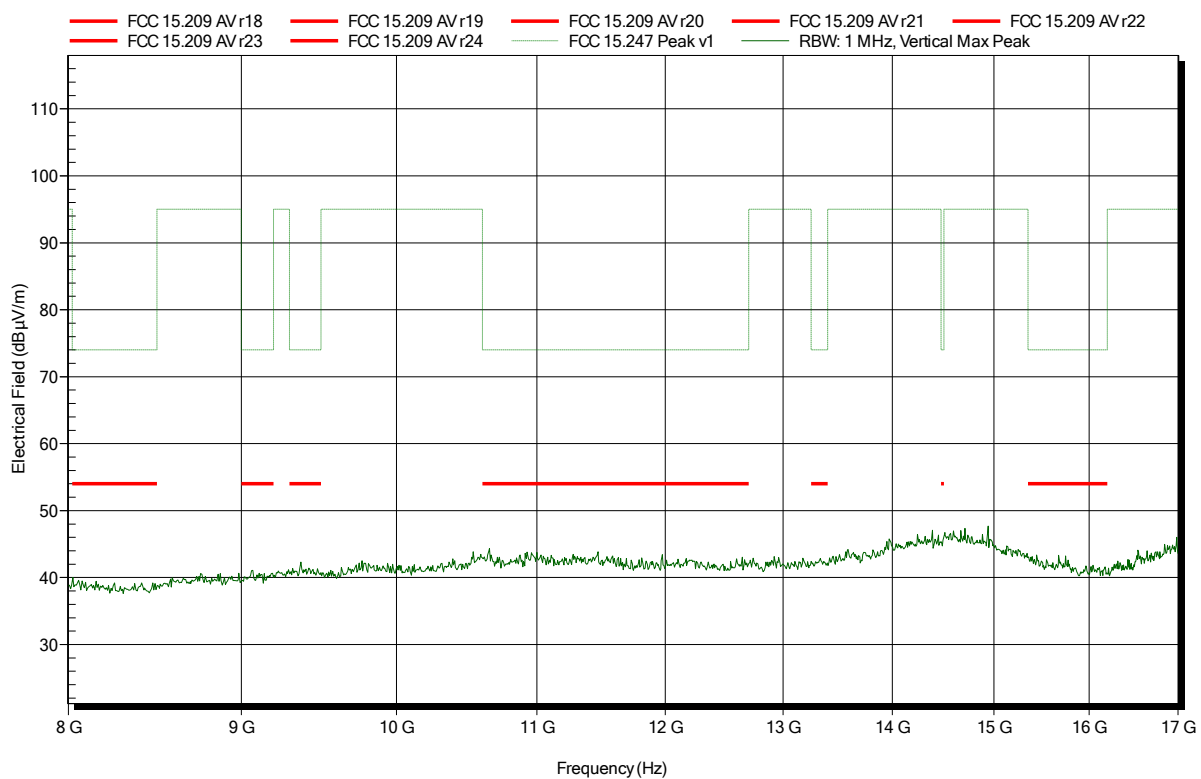

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Amplifier Research AT4560, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 23

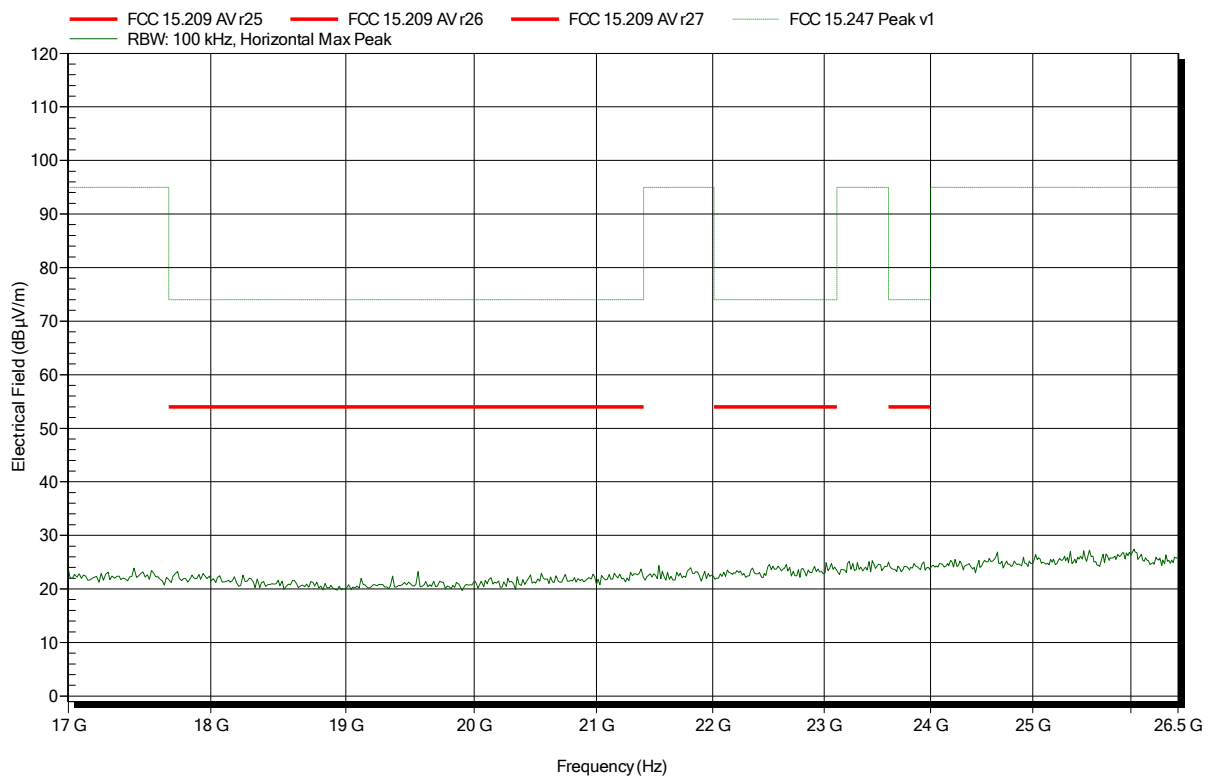

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Amplifier Research AT4560, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; GFSK; 2480 MHz

Test Date: 2019-03-18

Note:

Index 28

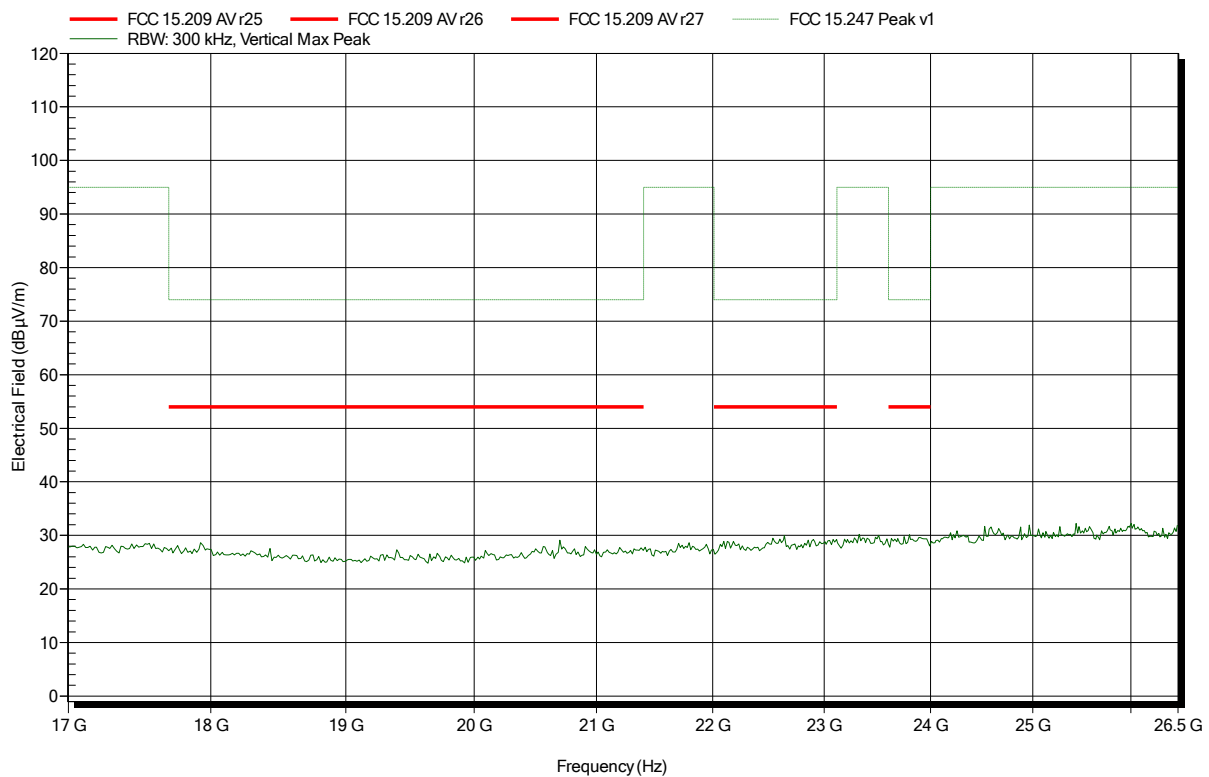

ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Rohde & Schwarz HK 116, Horizontal


Measurement distance: 3 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 37

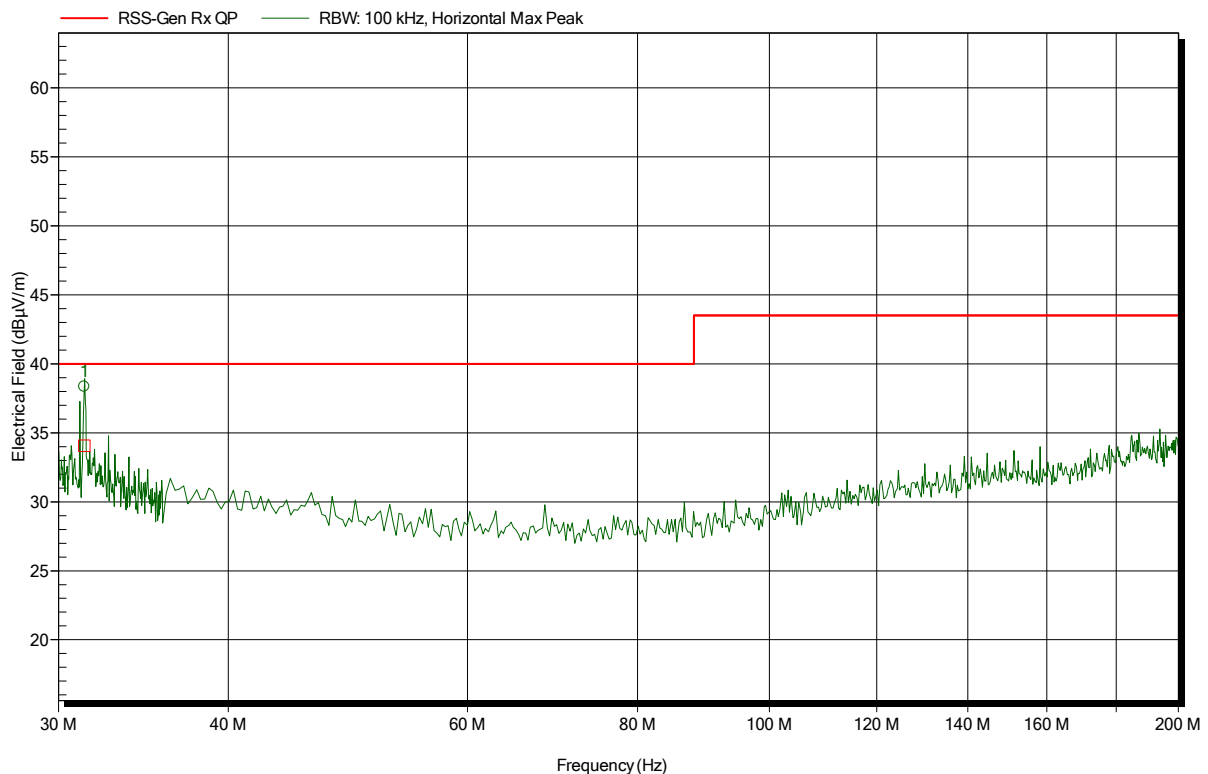

Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
31.353 MHz	38.33 dBµV/m	---	----	Pass	264 Degree	1.2 m

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
31.353 MHz	34.06 dBµV/m	40 dBµV/m	-5.94 dB	Pass	264 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Rohde & Schwarz HK 116, Vertical


Measurement distance: 3 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 38

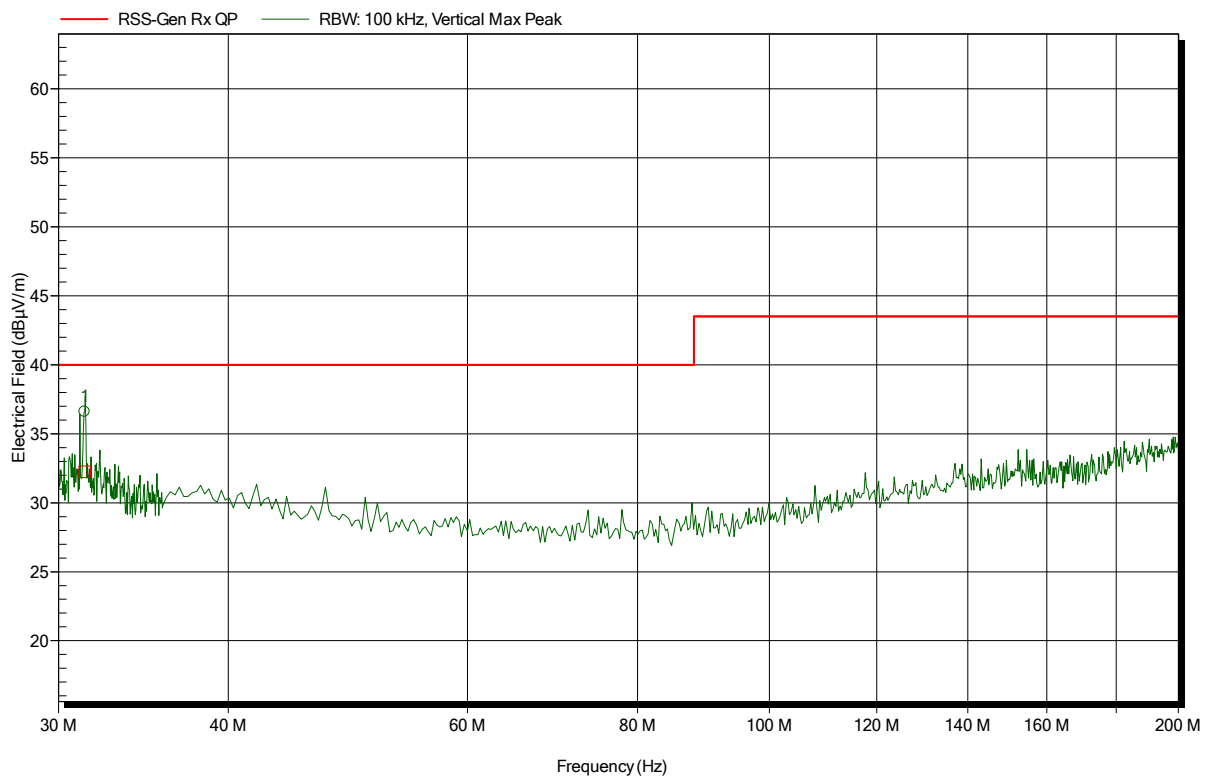


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
31.372 MHz	36.61 dBµV/m	---	---	Pass	31 Degree	1.2 m

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
31.372 MHz	32.26 dBµV/m	40 dBµV/m	-7.74 dB	Pass	31 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075
 Applicant: Piavita AG
 EUT Name: Equine vital signs wireless monitoring device
 Model: Piavita Measuring device
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; GFSK; 2440 MHz
 Test Date: 2019-03-18
 Note:

Index 35

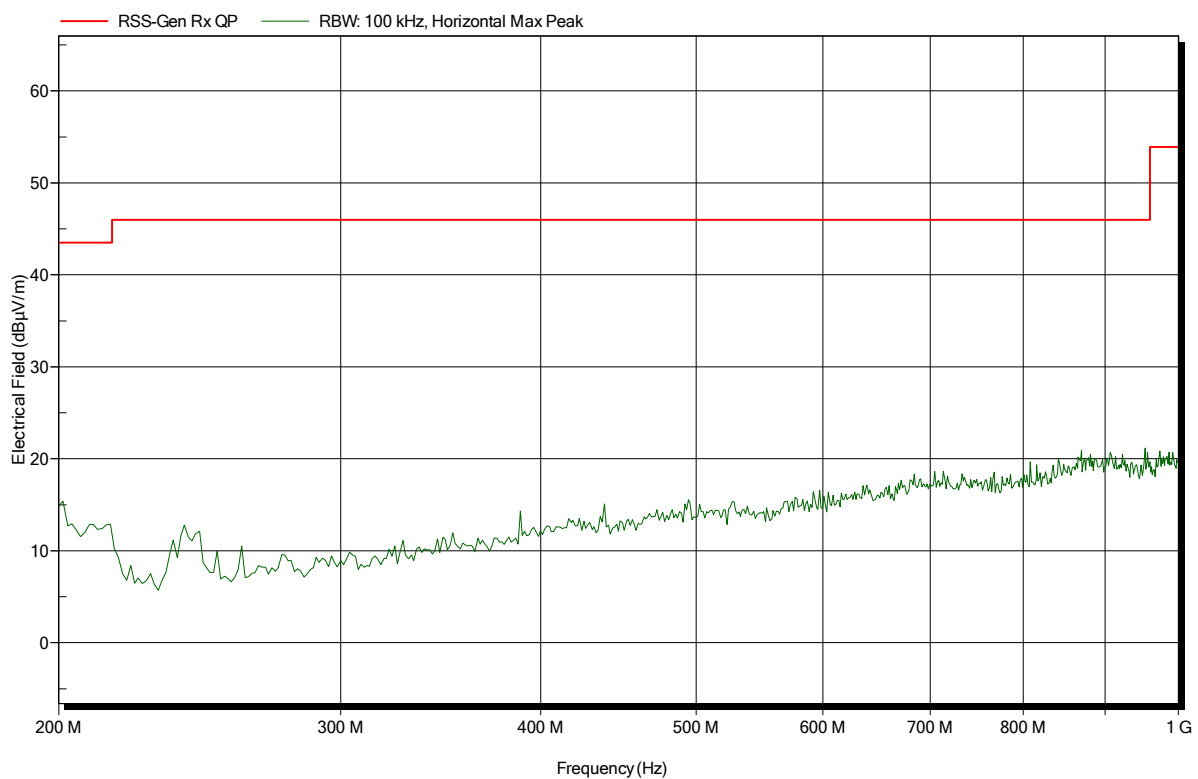

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Rohde & Schwarz HL 223, Vertical


Measurement distance: 3 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 36

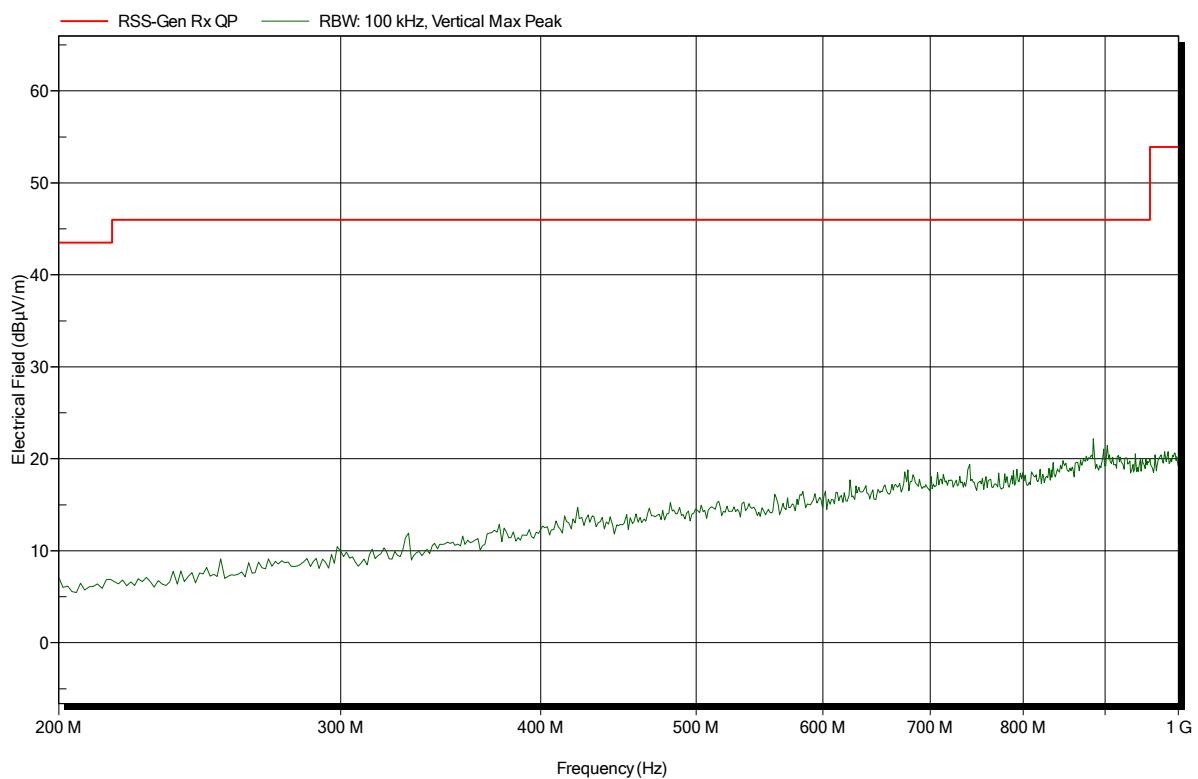

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 29

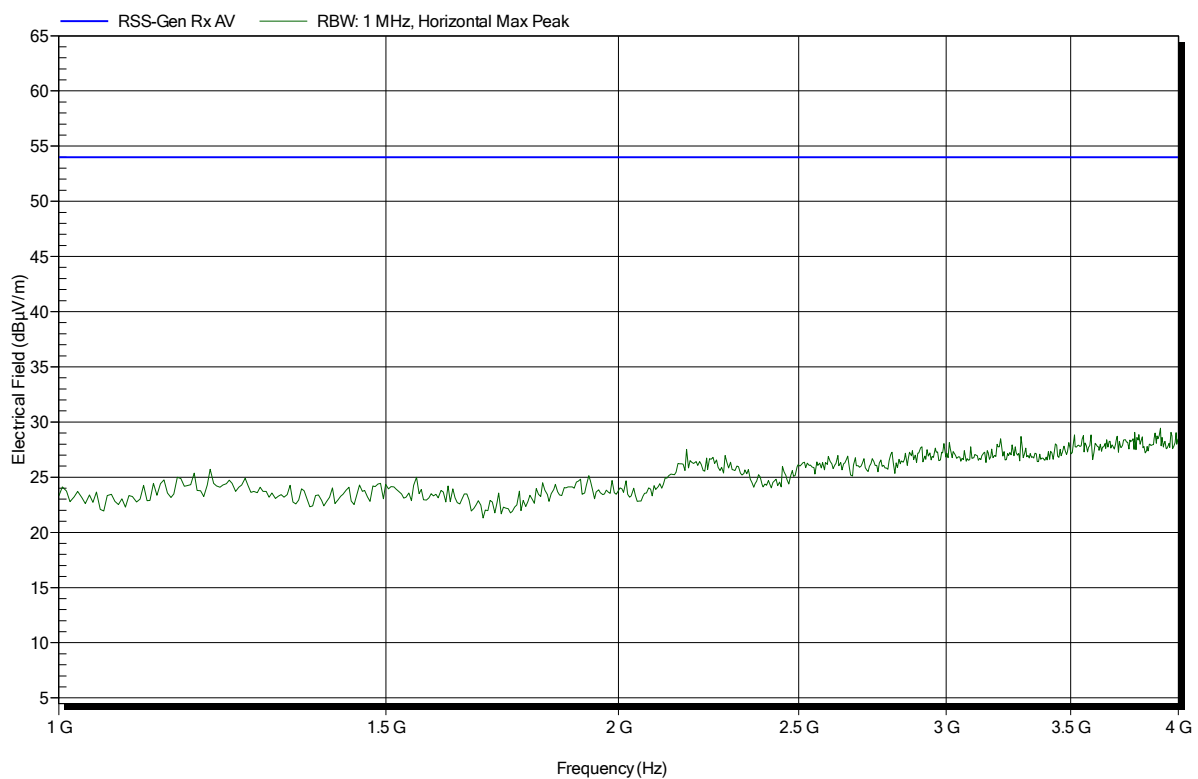

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 32

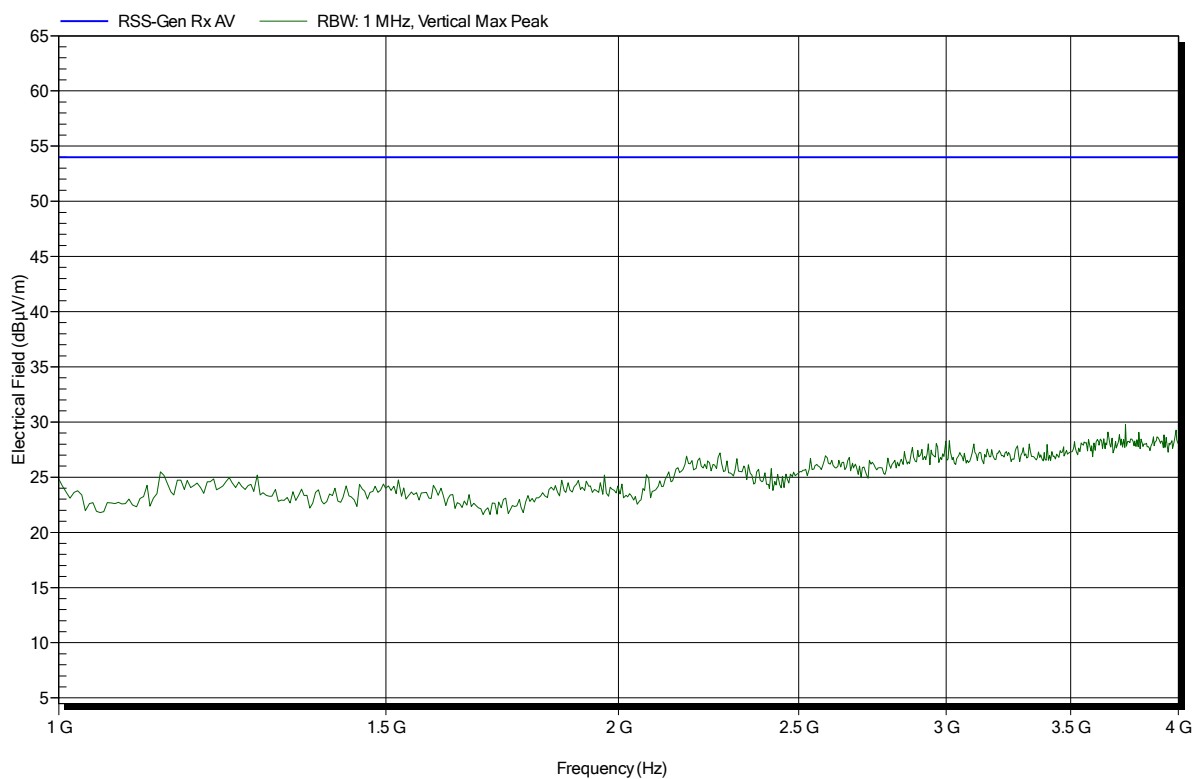

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 33

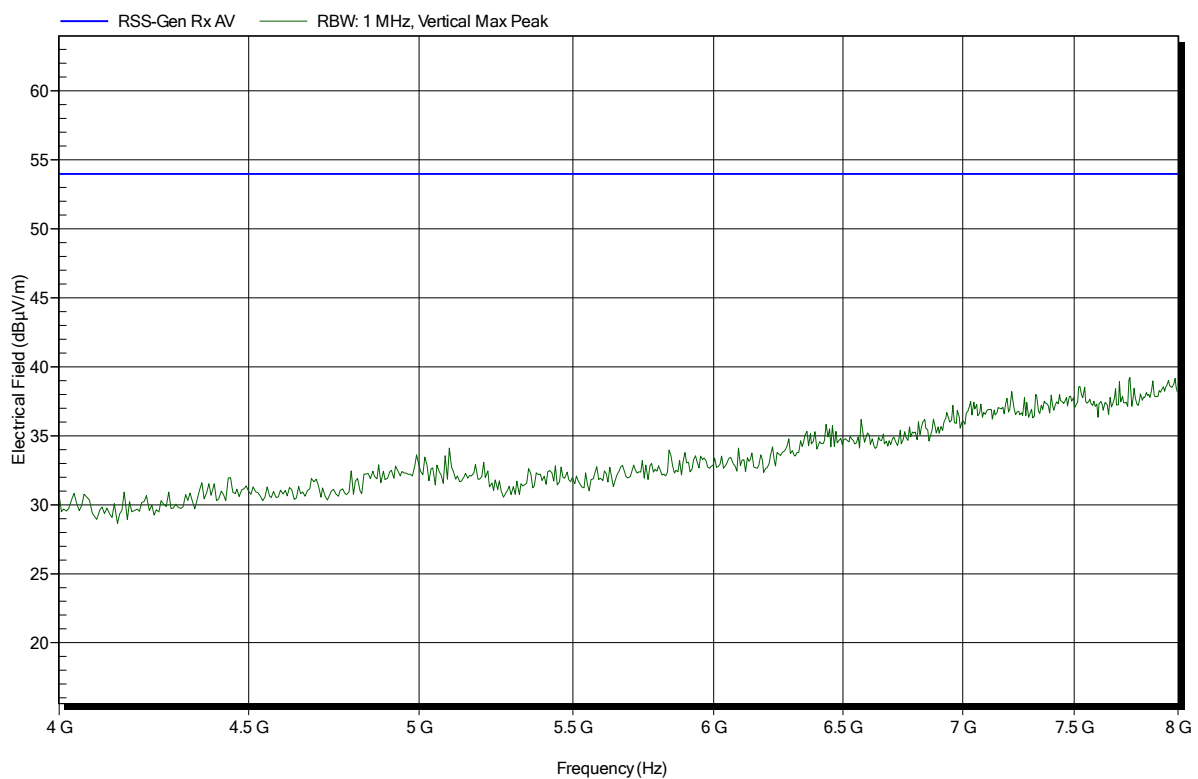

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 3 m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 30

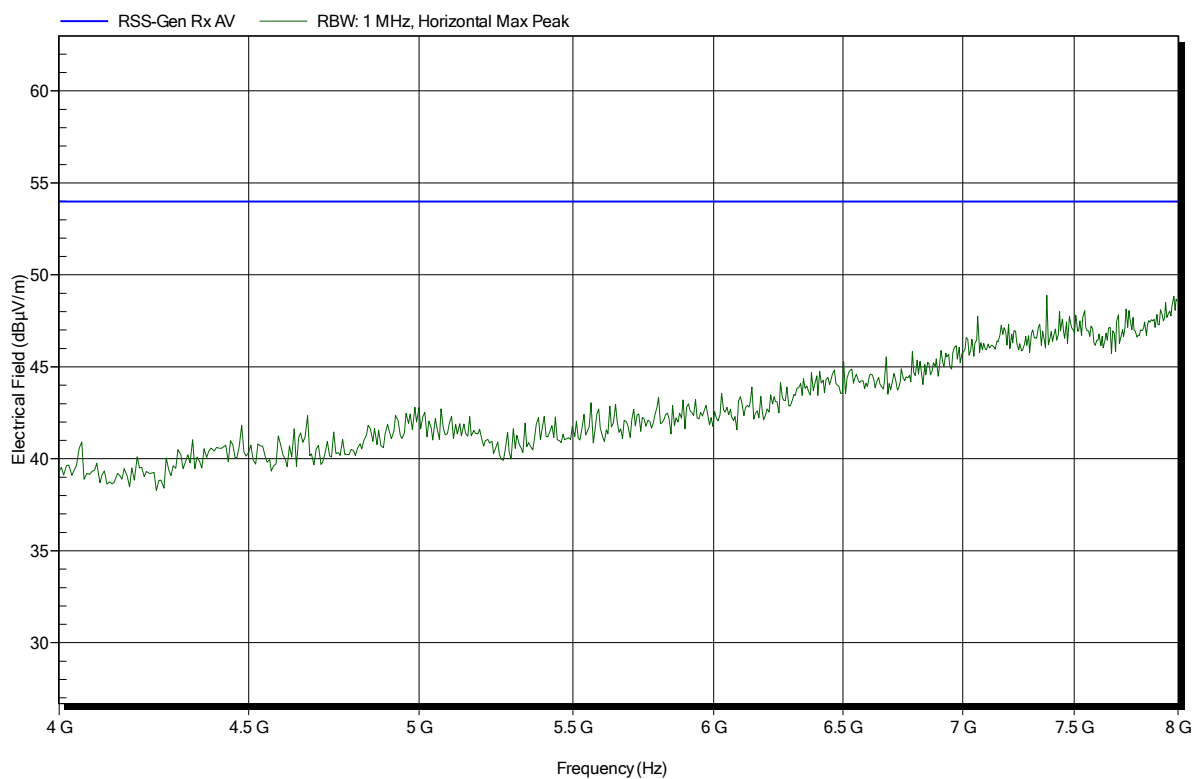

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG

EUT Name: Equine vital signs wireless monitoring device

Model: Piavita Measuring device

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: RX; BLE; GFSK; 2440 MHz

Test Date: 2019-03-18

Note:

Index 31

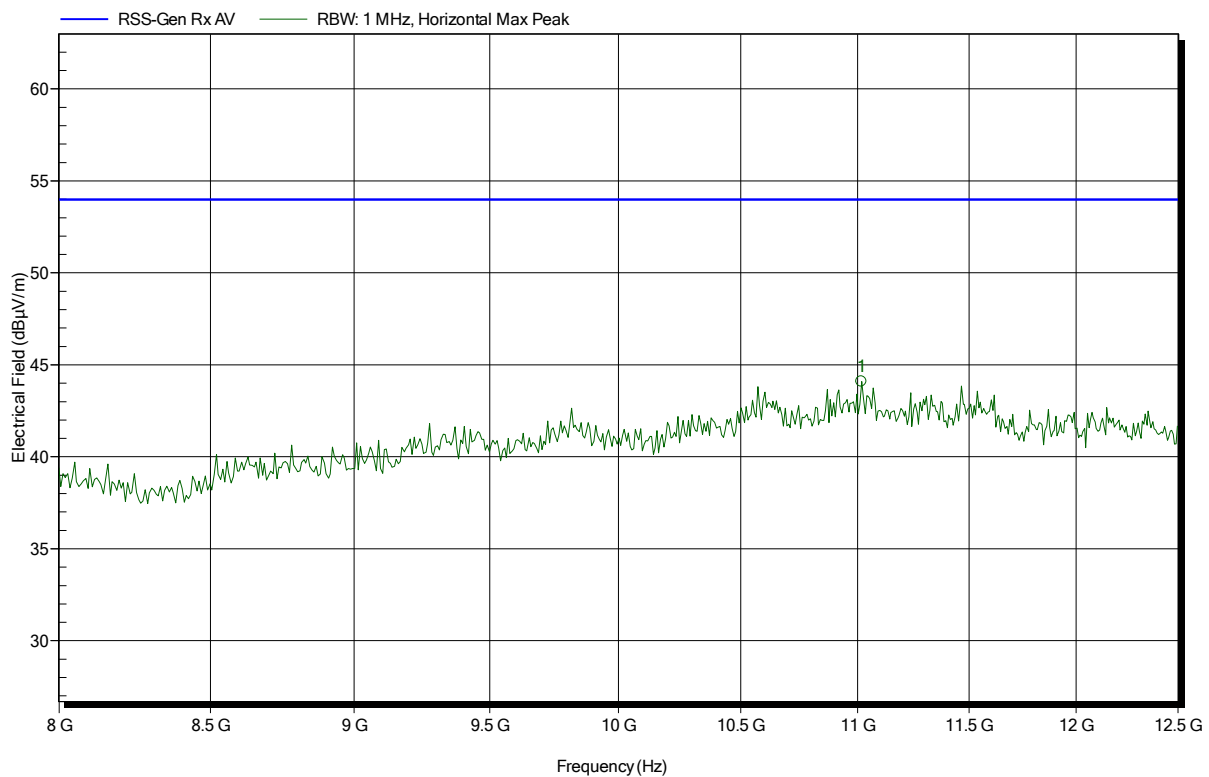


Frequency	Peak	Peak Limit	Peak Difference	Status
11.017 GHz	44.09 dBµV/m	53.98 dBµV/m	-9.89 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1902-8075

Applicant: Piavita AG
EUT Name: Equine vital signs wireless monitoring device
Model: Piavita Measuring device
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 21°C, Vnom: 3.7 VDC lithium polymer battery
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: RX; BLE; GFSK; 2440 MHz
Test Date: 2019-03-18
Note:

Index 34

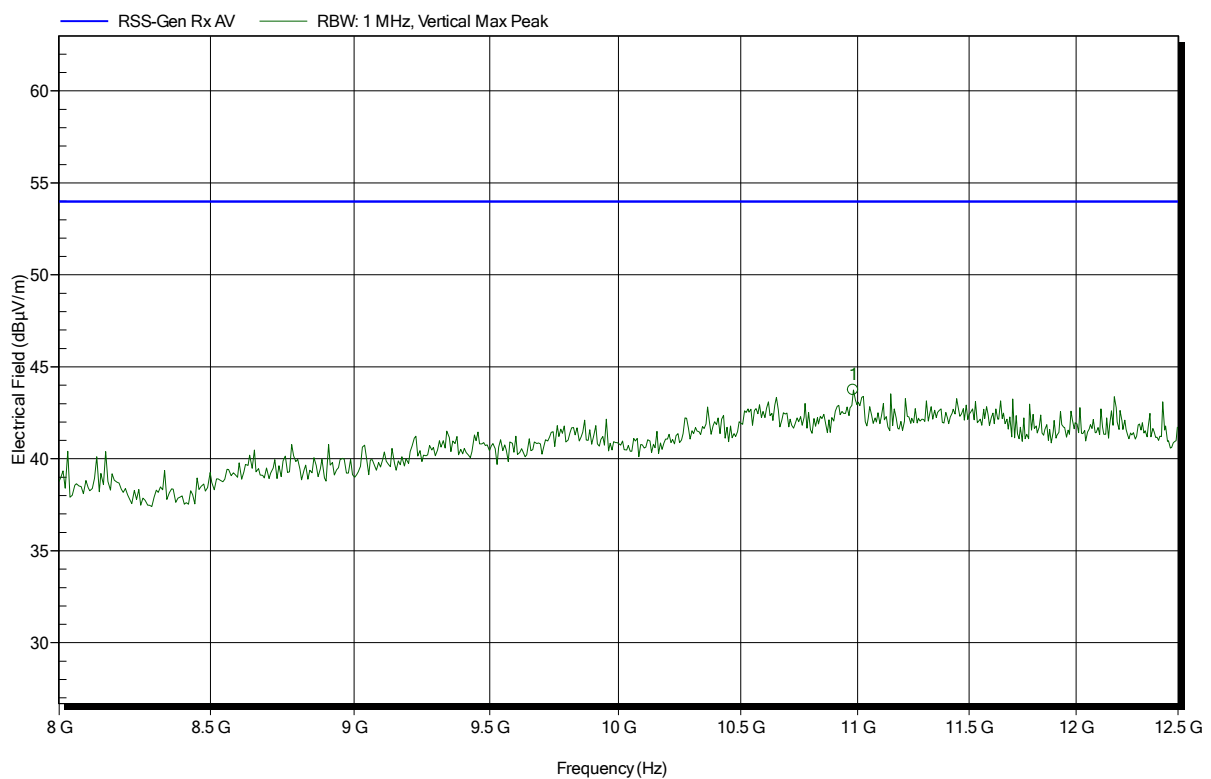

Frequency	Peak	Peak Limit	Peak Difference	Status
10.981 GHz	43.74 dBµV/m	53.98 dBµV/m	-10.24 dB	Pass