




Leviton Mfg Co, Inc

Zigbee BLE Module C0945

**FCC 15.247:2021
2.4 GHz DTS Radio**

Report: LEVT0137.2 Rev. 1, Issue Date: April 25, 2022

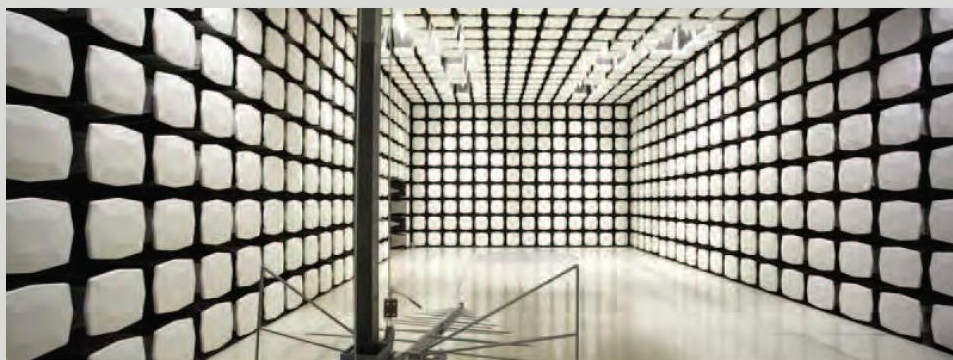

This report must not be used to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

EAR-Controlled Data - This document contains technical data whose export and reexport/retransfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations. The Department of Commerce's prior written approval may be required for the export or re-export/retransfer of such technical data to any foreign person, foreign entity or foreign organization whether in the United States or abroad.

CERTIFICATE OF TEST



Last Date of Test: November 10, 2021
Leviton Mfg Co, Inc
EUT: Zigbee BLE Module C0945

Radio Equipment Testing

Standards

Specification	Method
FCC 15.207:2021 FCC 15.247:2021	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	N/A	Characterization of radio operation
11.8.2	DTS Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY

Revision Number	Description	Date (yyyy-mm-dd)	Page Number
01	Changed Duty Cycle Results from Pass to N/A, add comments: "Characterization of radio operation"	2022-04-21	2
	Updated receipt date of samples	2022-04-21	10
	Channel naming convention is now consistent throughout the data module.	2022-04-21	50-53
	Remove "and power setting" from comments section	2022-04-21	51
	Updated the serial number from none to sample 1	2022-04-21	53-56
	Added mid channel to the operating mode.	2022-04-21	55
	Removed reference of the 99% occupied bandwidth measurement from the test description.	2022-04-21	2, 23-26
	Changed the title of the data module to DTS bandwidth, and updated the certificate of test to reference DTS bandwidth.	2022-04-21	2, 23-26
	Updated block diagrams with the correct sample formulas have been added to the test report.	2022-04-21	8, 52-56
	The power settings have been updated to show 19dBm	2022-04-21	11

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Each laboratory is accredited by A2LA to ISO / IEC 17025, and as a product certifier to ISO / IEC 17065 which allows Element to certify transmitters to FCC and IC specifications.

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

United Kingdom

BEIS – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

[California](#)

[Minnesota](#)

[Oregon](#)



[Texas](#)

[Washington](#)

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-11 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
A2LA				
Lab Code: 3310.04	Lab Code: 3310.05	Lab Code: 3310.02	Lab Code: 3310.03	Lab Code: 3310.06
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

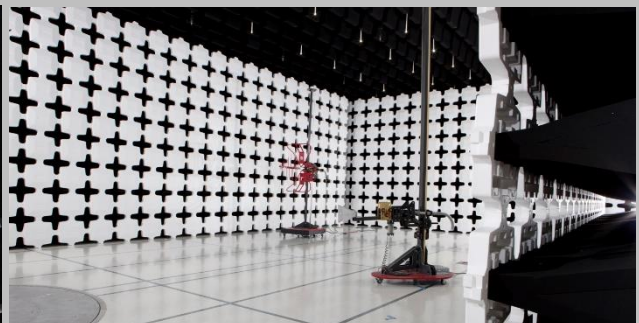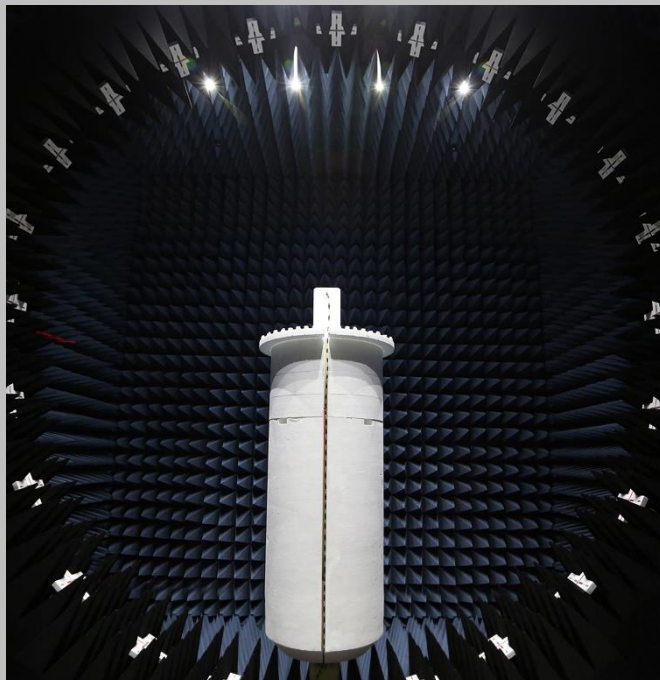

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	3.2 dB	-3.2 dB


TEST SETUP BLOCK DIAGRAMS

Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.


Antenna Port Conducted Measurements

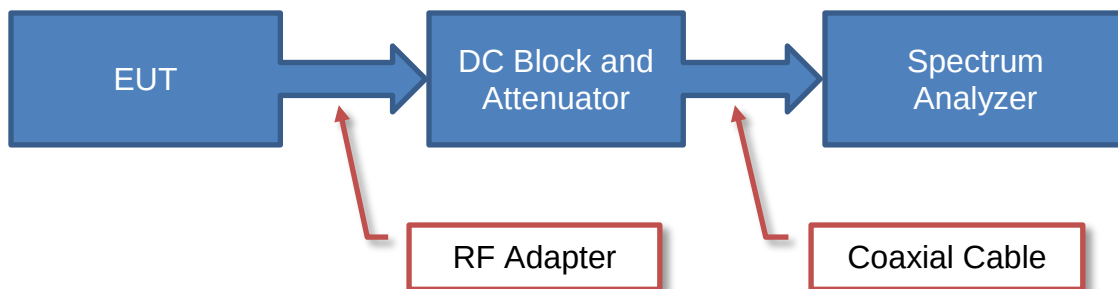

Sample Calculation (logarithmic units)

Measured Value		Measured Level		Reference Level Offset
71.2	=	42.6	+	28.6

Near Field Test Fixture Measurements

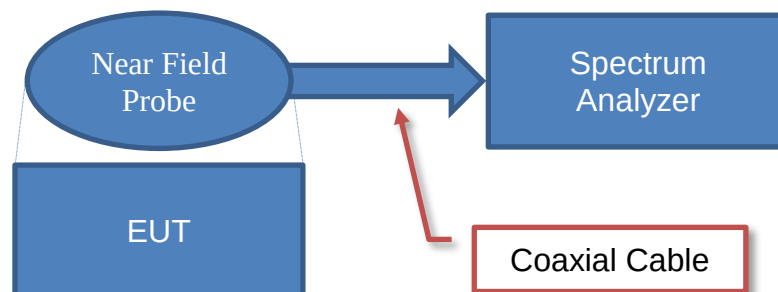


Sample Calculation (logarithmic units)

Measured Value		Measured Level		Reference Level Offset
71.2	=	42.6	+	28.6

TEST SETUP BLOCK DIAGRAMS

Emissions Measurements

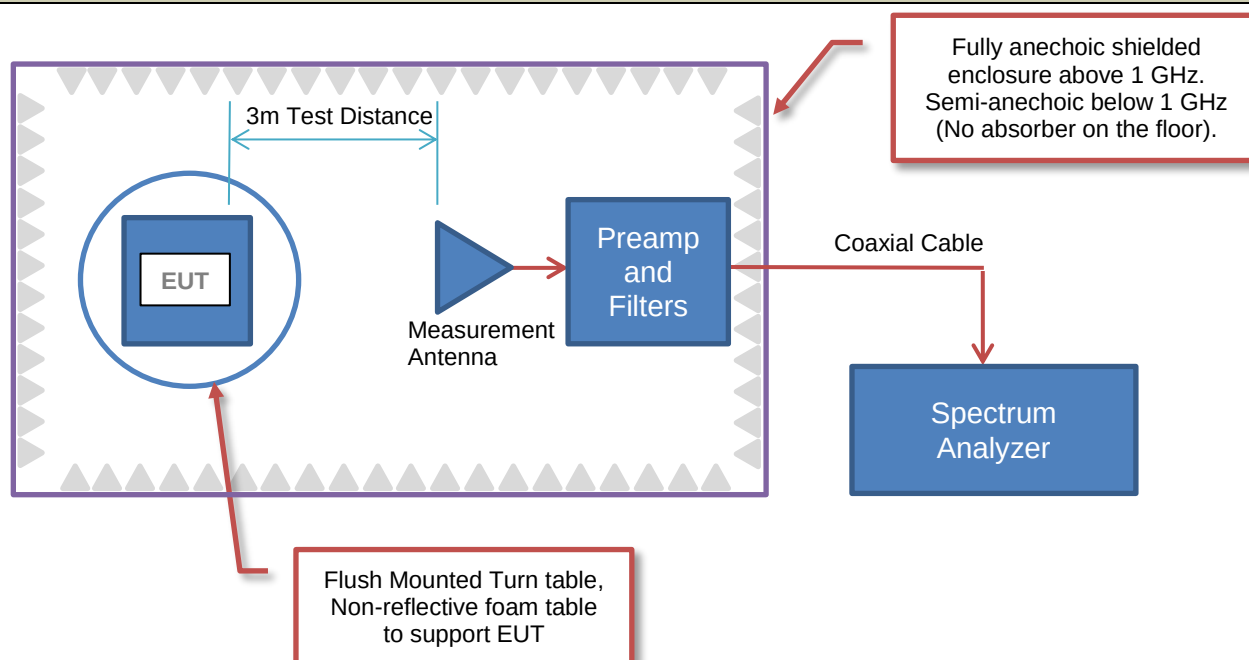

Sample Calculation (logarithmic units)

Radiated Emissions:

Measured Level (Amplitude)	Factor				Distance Adjustment Factor	External Attenuation	Field Strength
	Antenna Factor	Cable Factor	Amplifier Gain				
42.6	28.6	3.1	40.8	+	0.0	0.0	= 33.5


Conducted Emissions:

Measured Level (Amplitude)	Factor			External Attenuation	Adjusted Level
	Transducer Factor	Cable Factor			
26.7	0.3	0.1	+	20.0	= 47.1

TEST SETUP BLOCK DIAGRAMS

Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

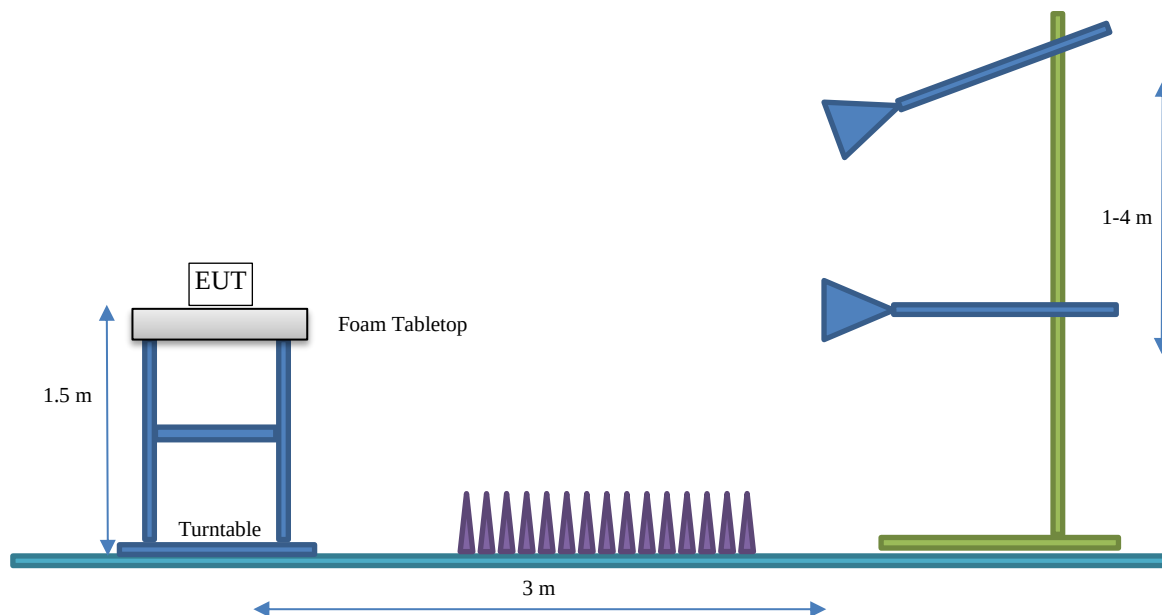

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Leviton Mfg Co, Inc
Address:	PO Box 10600
City, State, Zip:	Melville, OR 11747-3138
Test Requested By:	Dmitriy Moskovkin
EUT:	Zigbee BLE Module C0945
First Date of Test:	September 27, 2021
Last Date of Test:	November 10, 2021
Receipt Date of Samples:	September 27, 2021
Equipment Design Stage:	Prototype
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Bluetooth LE and Zigbee radio module
Testing Objective:
To demonstrate compliance of the 2.4 GHz DTS radio to FCC 15.247 requirements.

POWER SETTINGS AND ANTENNAS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information.

ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
Ceramic Chip	Manufacturer	2400 – 2500	1.5

The EUT was tested using the power settings provided by the manufacturer:

SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types	Position	Power Setting
OQPSK	Low Channel 2405 MHz	19 dBm
	Mid Channel 2440 MHz	19 dBm
	High Channel 2480 MHz	17 dBm

CONFIGURATIONS



Configuration LEVT0137- 1

Software/Firmware Running During Test	
Description	Version
Rail Test App	2.8.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BLE / ZigBee Module	Leviton MFG Co Inc.	C0945	Sample 1

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Host PCB	Leviton MFG Co Inc.	B2183	Sample 1
Switch Mode Power Supply	V-Infinity	EMSA050100	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	HP	Probook 640 G3	5CG72466R3

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	1.5 m	No	Host PCB	Switch Mode Power Supply

CONFIGURATIONS



Configuration LEVT0137- 2

Software/Firmware Running During Test	
Description	Version
Rail Test App	2.8.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BLE / ZigBee Module	Leviton MFG Co Inc.	C0945	Sample 2

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Host PCB	Leviton MFG Co Inc.	B2183	Sample 1
Host PCB	Leviton MFG Co Inc.	B2183	Sample 2

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Switch Mode Power Supply	V-Infinity	EMSA050100	None
Laptop	HP	Probook 640 G3	5CG72466R3

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
FTDI	Yes	1.5 m	No	Host PCB	Laptop
USB	Yes	1.5 m	No	Host PCB	Switch Mode Power Supply

CONFIGURATIONS



Configuration LEVT0137- 3

Software/Firmware Running During Test	
Description	Version
Rail Test App	2.8.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BLE / ZigBee Module	Leviton MFG Co Inc.	C0945	Sample 1

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Host PCB	Leviton MFG Co Inc.	B2183	Sample 1

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	HP	Probook 640 G3	5CG72466R3

CONFIGURATIONS



Configuration LEVT0136- 1

Software/Firmware Running During Test	
Description	Version
Rail Test App	2.8.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BLE / ZigBee Module	Leviton MFG Co Inc.	C0945	Sample 1

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Host PCB	Leviton MFG Co Inc.	B2183	Sample 1
Switch Mode Power Supply	V-Infinity	EMSA050100	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	HP	Probook 640 G3	5CG72466R3

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	1.5 m	No	Host PCB	Switch Mode Power Supply

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2021-09-27	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2021-11-10	DTS Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2021-11-10	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2021-11-10	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2021-11-10	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2021-11-10	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2021-11-10	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2021-11-10	Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

POWERLINE CONDUCTED EMISSIONS

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Receiver	Gauss Instruments	TDEMI 30M	ARN	2021-04-06	2022-04-06
Cable - Conducted Cable Assembly	Northwest EMC	EVG, HHD, RKT	EVGA	2021-01-05	2022-01-05
LISN	Solar Electronics	9252-50-R-24-BNC	LIR	2021-09-10	2022-09-10
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR

MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	3.2 dB	-3.2 dB

CONFIGURATIONS INVESTIGATED

LEVT0137-3

MODES INVESTIGATED

Tx - ZigBee, OQPSK, Mid Ch = 2440 MHz

POWERLINE CONDUCTED EMISSIONS

EUT:	Zigbee BLE Module C0945	Work Order:	LEVT0137
Serial Number:	Sample 1	Date:	2021-11-10
Customer:	Leviton Mfg Co, Inc	Temperature:	22.3°C
Attendees:	Vikas Asthana	Relative Humidity:	39.6%
Customer Project:	None	Bar. Pressure (PMSL):	1029 mb
Tested By:	Jeff Alcock	Job Site:	EV07
Power:	3.3VDC via 110VAC/60Hz	Configuration:	LEVT0137-3

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	4	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	---	-------	---------	-----------------------------	---

COMMENTS



Measuring AC mains of lab DC power supply.

EUT OPERATING MODES

Tx - ZigBee, OQPSK, Mid Ch = 2440 MHz

DEVIATIONS FROM TEST STANDARD

None

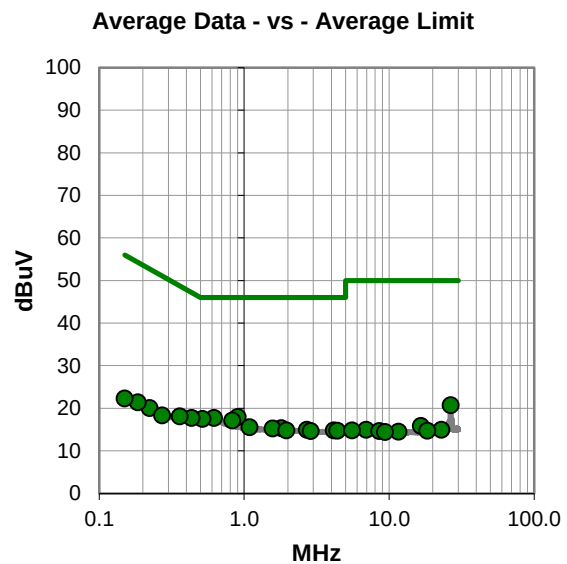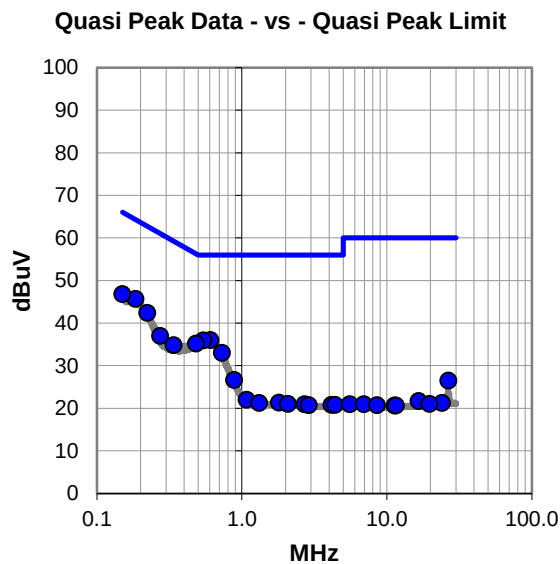

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #4

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.185	25.6	20.1	45.7	64.3	-18.6
0.150	26.7	20.1	46.8	66.0	-19.2
0.606	16.0	20.0	36.0	56.0	-20.0
0.542	15.9	20.0	35.9	56.0	-20.1
0.223	22.3	20.1	42.4	62.7	-20.3
0.484	15.2	20.0	35.2	56.3	-21.1
0.730	13.0	20.0	33.0	56.0	-23.0
0.274	17.0	20.0	37.0	61.0	-24.0
0.338	14.8	20.0	34.8	59.3	-24.5
0.885	6.6	20.0	26.6	56.0	-29.4
26.609	5.4	21.1	26.5	60.0	-33.5
1.078	2.0	20.0	22.0	56.0	-34.0
1.804	1.3	20.0	21.3	56.0	-34.7
1.314	1.2	20.0	21.2	56.0	-34.8
2.076	1.0	20.0	21.0	56.0	-35.0
2.706	0.9	20.0	20.9	56.0	-35.1
4.160	0.8	20.0	20.8	56.0	-35.2
4.390	0.7	20.1	20.8	56.0	-35.2
2.900	0.7	20.0	20.7	56.0	-35.3
16.630	1.1	20.6	21.7	60.0	-38.3
24.011	0.2	21.0	21.2	60.0	-38.8
19.764	0.2	20.8	21.0	60.0	-39.0
5.548	0.7	20.2	20.9	60.0	-39.1
6.934	0.7	20.2	20.9	60.0	-39.1
8.571	0.5	20.2	20.7	60.0	-39.3

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.902	-2.1	20.0	17.9	46.0	-28.1
0.620	-2.3	20.0	17.7	46.0	-28.3
0.516	-2.5	20.0	17.5	46.0	-28.5
0.827	-2.9	20.0	17.1	46.0	-28.9
26.609	-0.4	21.1	20.7	50.0	-29.3
0.434	-2.3	20.0	17.7	47.2	-29.5
1.091	-4.5	20.0	15.5	46.0	-30.5
0.359	-1.9	20.0	18.1	48.8	-30.7
1.802	-4.7	20.0	15.3	46.0	-30.7
1.571	-4.8	20.0	15.2	46.0	-30.8
2.704	-5.1	20.0	14.9	46.0	-31.1
1.958	-5.2	20.0	14.8	46.0	-31.2
4.160	-5.2	20.0	14.8	46.0	-31.2
4.390	-5.4	20.1	14.7	46.0	-31.3
2.881	-5.4	20.0	14.6	46.0	-31.4
0.223	-0.1	20.1	20.0	52.7	-32.7
0.272	-1.7	20.0	18.3	51.1	-32.8
0.185	1.3	20.1	21.4	54.3	-32.9
0.150	2.2	20.1	22.3	56.0	-33.7
16.630	-4.8	20.6	15.8	50.0	-34.2
6.934	-5.3	20.2	14.9	50.0	-35.1
23.028	-6.0	20.9	14.9	50.0	-35.1
5.545	-5.4	20.2	14.8	50.0	-35.2
18.388	-6.0	20.7	14.7	50.0	-35.3
8.569	-5.6	20.2	14.6	50.0	-35.4

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	Zigbee BLE Module C0945	Work Order:	LEVT0137
Serial Number:	Sample 1	Date:	2021-11-10
Customer:	Leviton Mfg Co, Inc	Temperature:	22.3°C
Attendees:	Vikas Asthana	Relative Humidity:	39.6%
Customer Project:	None	Bar. Pressure (PMSL):	1029 mb
Tested By:	Jeff Alcock	Job Site:	EV07
Power:	3.3VDC via 110VAC/60Hz	Configuration:	LEVT0137-3

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	5	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

COMMENTS



Measuring AC mains of lab DC power supply.

EUT OPERATING MODES

Tx - ZigBee, OQPSK, Mid Ch = 2440 MHz

DEVIATIONS FROM TEST STANDARD

None

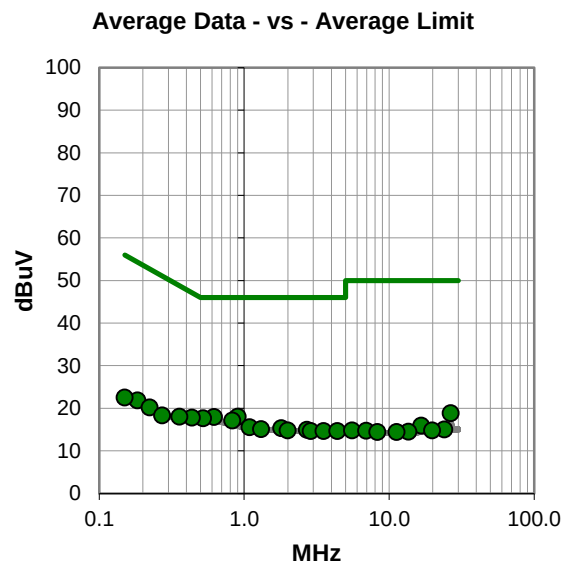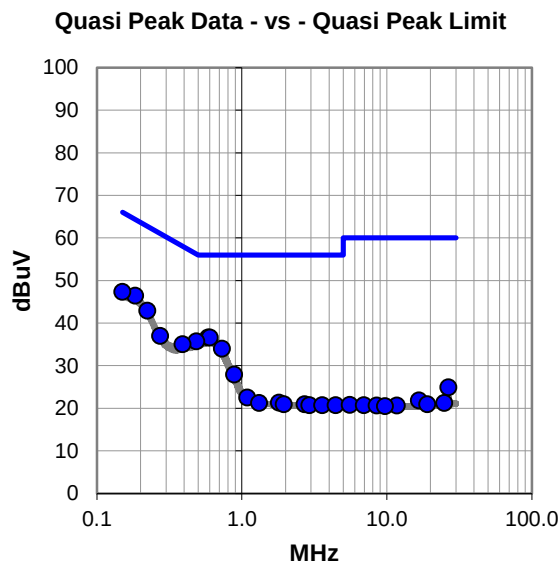

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #5

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.184	26.3	20.1	46.4	64.3	-17.9
0.150	27.2	20.1	47.3	66.0	-18.7
0.586	16.6	20.0	36.6	56.0	-19.4
0.600	16.6	20.0	36.6	56.0	-19.4
0.223	22.8	20.1	42.9	62.7	-19.8
0.486	15.7	20.0	35.7	56.2	-20.5
0.728	14.0	20.0	34.0	56.0	-22.0
0.390	15.0	20.0	35.0	58.1	-23.1
0.274	17.0	20.0	37.0	61.0	-24.0
0.884	7.9	20.0	27.9	56.0	-28.1
1.090	2.5	20.0	22.5	56.0	-33.5
1.802	1.3	20.0	21.3	56.0	-34.7
1.314	1.2	20.0	21.2	56.0	-34.8
1.952	0.9	20.0	20.9	56.0	-35.1
2.704	0.9	20.0	20.9	56.0	-35.1
26.609	3.8	21.1	24.9	60.0	-35.1
2.925	0.7	20.0	20.7	56.0	-35.3
3.582	0.7	20.0	20.7	56.0	-35.3
4.447	0.5	20.2	20.7	56.0	-35.3
16.635	1.2	20.6	21.8	60.0	-38.2
24.958	0.2	21.0	21.2	60.0	-38.8
18.997	0.2	20.7	20.9	60.0	-39.1
5.545	0.6	20.2	20.8	60.0	-39.2
6.934	0.5	20.2	20.7	60.0	-39.3
8.496	0.4	20.2	20.6	60.0	-39.4

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.902	-2.0	20.0	18.0	46.0	-28.0
0.618	-2.1	20.0	17.9	46.0	-28.1
0.522	-2.4	20.0	17.6	46.0	-28.4
0.827	-2.9	20.0	17.1	46.0	-28.9
0.435	-2.2	20.0	17.8	47.2	-29.4
1.088	-4.5	20.0	15.5	46.0	-30.5
1.802	-4.7	20.0	15.3	46.0	-30.7
0.358	-2.0	20.0	18.0	48.8	-30.8
1.311	-4.9	20.0	15.1	46.0	-30.9
2.704	-5.1	20.0	14.9	46.0	-31.1
1.996	-5.2	20.0	14.8	46.0	-31.2
26.609	-2.3	21.1	18.8	50.0	-31.2
2.881	-5.4	20.0	14.6	46.0	-31.4
3.539	-5.4	20.0	14.6	46.0	-31.4
4.390	-5.5	20.1	14.6	46.0	-31.4
0.184	1.7	20.1	21.8	54.3	-32.5
0.223	0.1	20.1	20.2	52.7	-32.5
0.272	-1.7	20.0	18.3	51.1	-32.8
0.150	2.4	20.1	22.5	56.0	-33.5
16.635	-4.7	20.6	15.9	50.0	-34.1
24.011	-6.0	21.0	15.0	50.0	-35.0
5.545	-5.4	20.2	14.8	50.0	-35.2
19.833	-6.0	20.8	14.8	50.0	-35.2
6.934	-5.5	20.2	14.7	50.0	-35.3
13.580	-6.0	20.5	14.5	50.0	-35.5

CONCLUSION

Pass



Tested By

DUTY CYCLE



TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

DTS BANDWIDTH



XMIT 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5181A	TIG	2020-04-16	2023-04-16
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	2021-03-14	2022-03-14
Attenuator	Fairview Microwave	SA26B-20	TWJ	2021-03-14	2022-03-14
Block - DC	Fairview Microwave	SD3379	AMX	2021-03-14	2022-03-14
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08

TEST DESCRIPTION

The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth.

DTS BANDWIDTH



TSTx 2021.03.19.1 XMR 2020.12.30.0


EUT: Zigbee BLE Module C0945		Work Order: LEVT0137	
Serial Number: Sample 2		Date: 10-Nov-21	
Customer: Leviton Mfg Co, Inc		Temperature: 22 °C	
Attendees: Vikas Asthana		Humidity: 39.8% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Jeff Alcock	Power: 3.3VDC via 110VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS			
FCC 15.247:2021		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC Block, 20 dB attenuator, and measurement cable.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Value	Limit (>)
ZigBee, OQPSK, Low Ch, 2405 MHz		1.66 MHz	500 kHz
ZigBee, OQPSK, Mid Ch, 2440 MHz		1.694 MHz	500 kHz
ZigBee, OQPSK, High Ch, 2480 MHz		1.663 MHz	500 kHz
			Result
			Pass
			Pass
			Pass

DTS BANDWIDTH




TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz						
				Value	Limit (>)	Result
				1.66 MHz	500 kHz	Pass

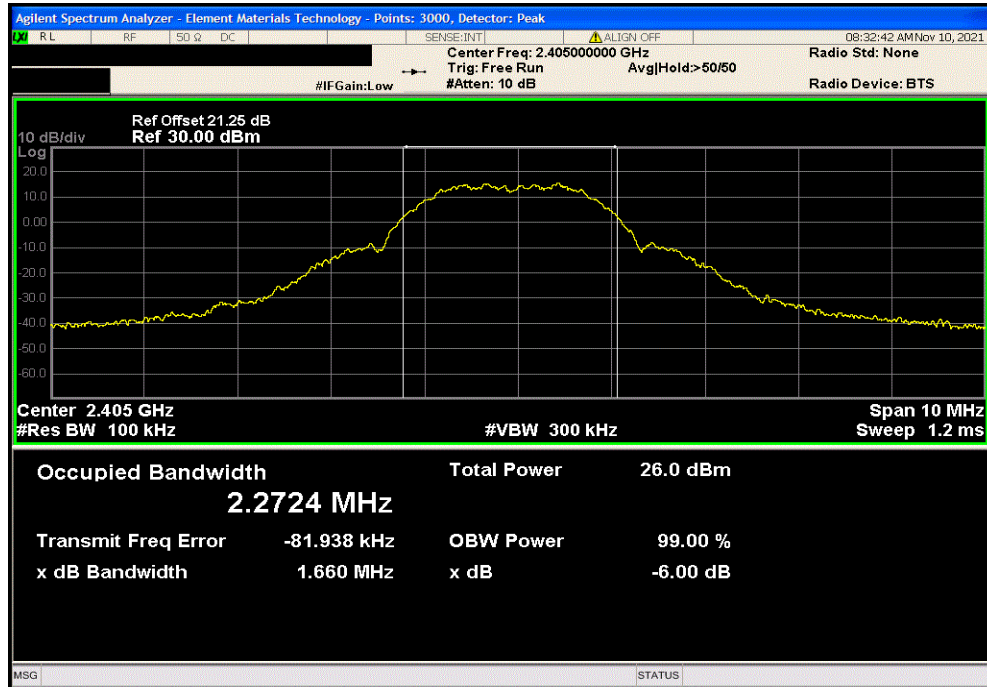

ZigBee, OQPSK, Mid Ch, 2440 MHz						
				Value	Limit (>)	Result
				1.694 MHz	500 kHz	Pass

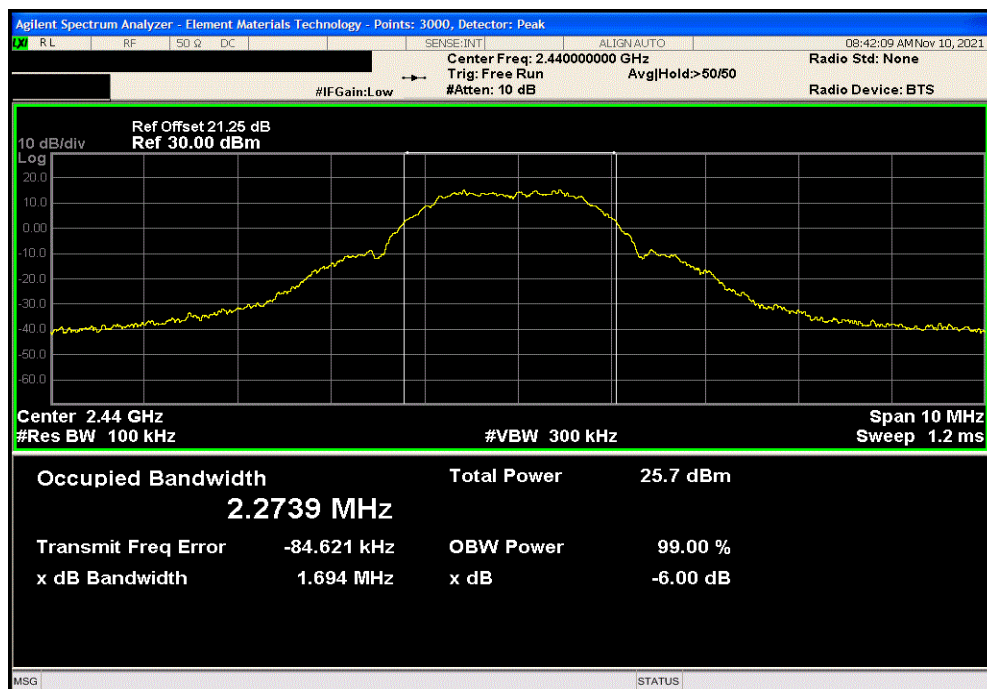


DTS BANDWIDTH



TbTx 2021.03.19.1 XMt 2020.12.30.0

ZigBee, OQPSK, High Ch, 2480 MHz						
Value				Limit	Result	
1.663 MHz				>	500 kHz	
					Pass	

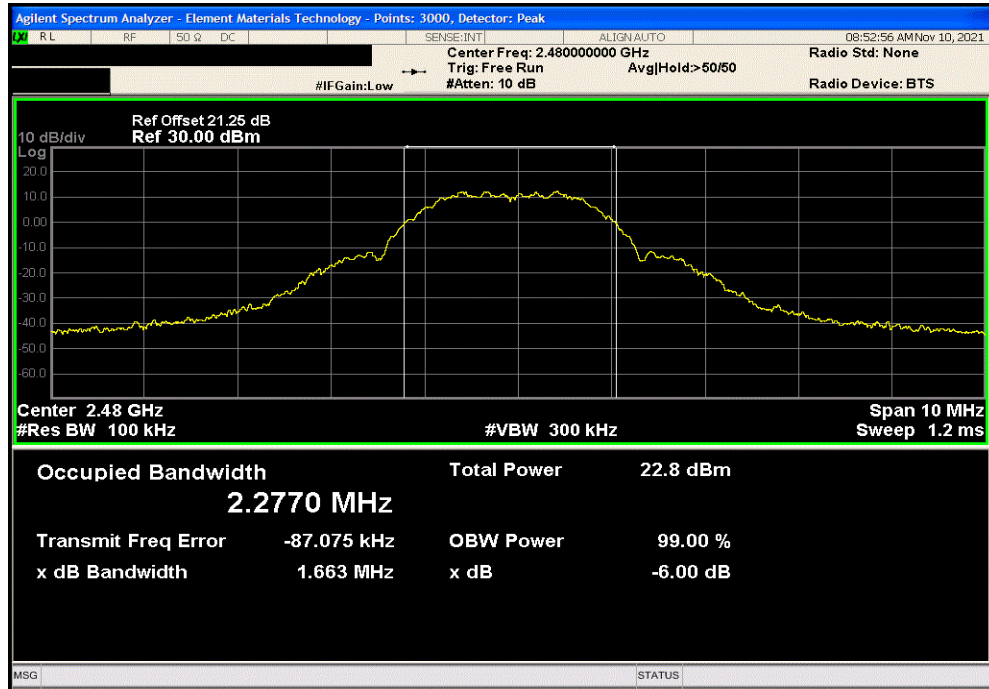

OUTPUT POWER



XMIT 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5181A	TIG	2020-04-16	2023-04-16
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	2021-03-14	2022-03-14
Attenuator	Fairview Microwave	SA26B-20	TWJ	2021-03-14	2022-03-14
Block - DC	Fairview Microwave	SD3379	AMX	2021-03-14	2022-03-14
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

OUTPUT POWER



TSTx 2021.03.19.1 XMR 2020.12.30.0


EUT: Zigbee BLE Module C0945		Work Order: LEVT0137	
Serial Number: Sample 2		Date: 10-Nov-21	
Customer: Leviton Mfg Co, Inc		Temperature: 22.6 °C	
Attendees: Vikas Asthana		Humidity: 39.3% RH	
Project: None		Barometric Pres.: 1029 mbar	
Tested by: Jeff Alcock	Power: 3.3VDC via 110VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS			
FCC 15.247:2021		Test Method: ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20 dB attenuator, and measurement cable.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Out Pwr (dBm)	Limit (dBm)
ZigBee, OQPSK, Low Ch, 2405 MHz		19.263	30
ZigBee, OQPSK, Mid Ch, 2440 MHz		19.004	30
ZigBee, OQPSK, High Ch, 2480 MHz		15.993	30
			Result
			Pass
			Pass
			Pass

OUTPUT POWER




TbTx 2021.03.19.1 XMt 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				19.263	30	Pass

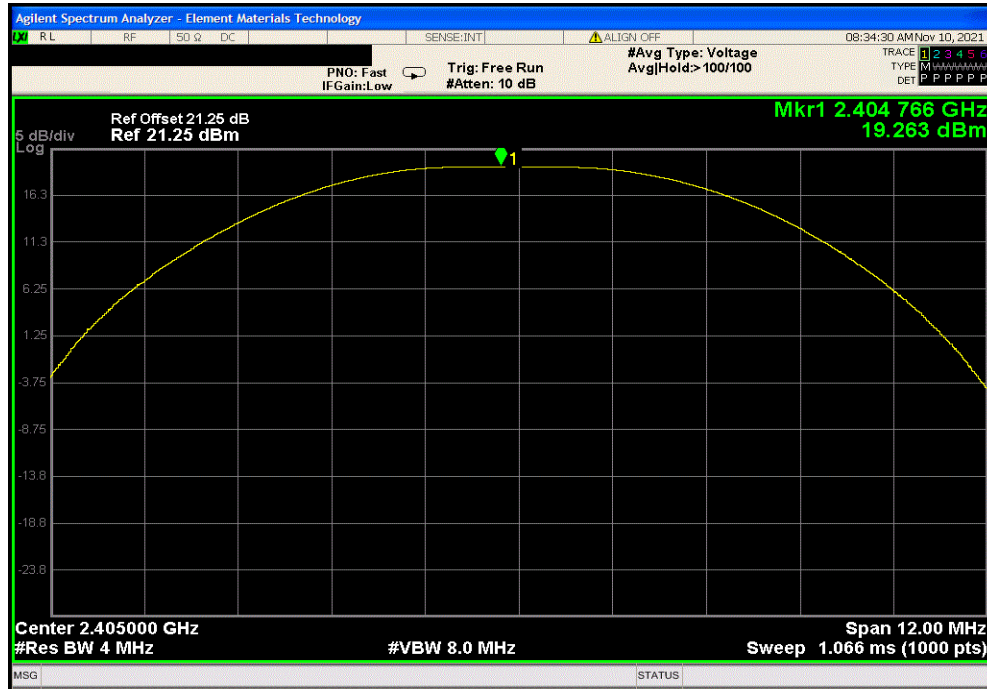

ZigBee, OQPSK, Mid Ch, 2440 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				19.004	30	Pass

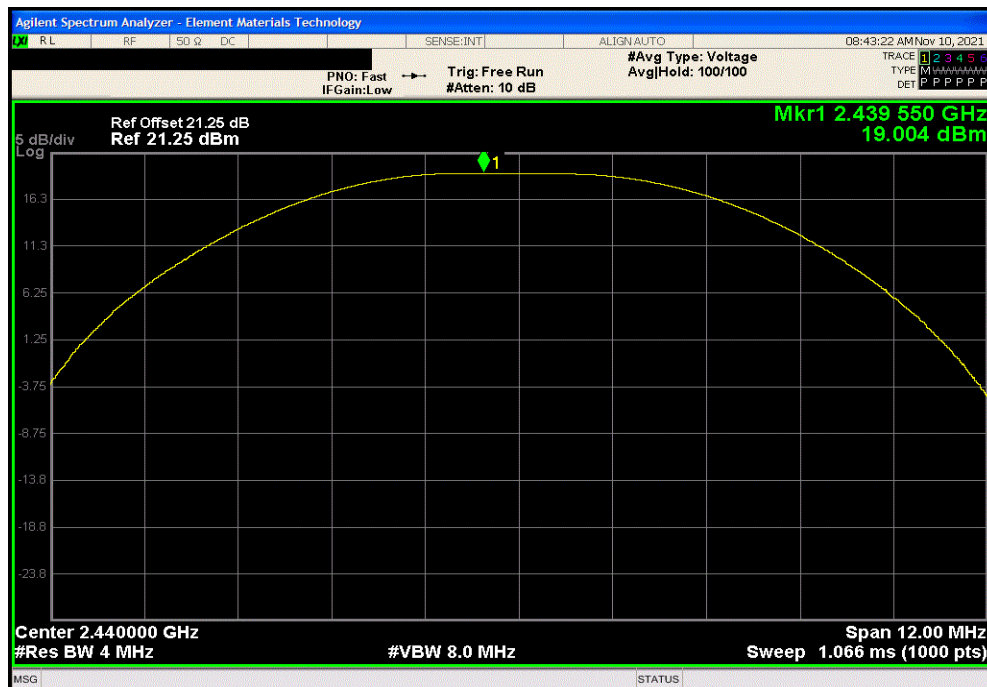


OUTPUT POWER



TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, High Ch, 2480 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				15.993	30	Pass

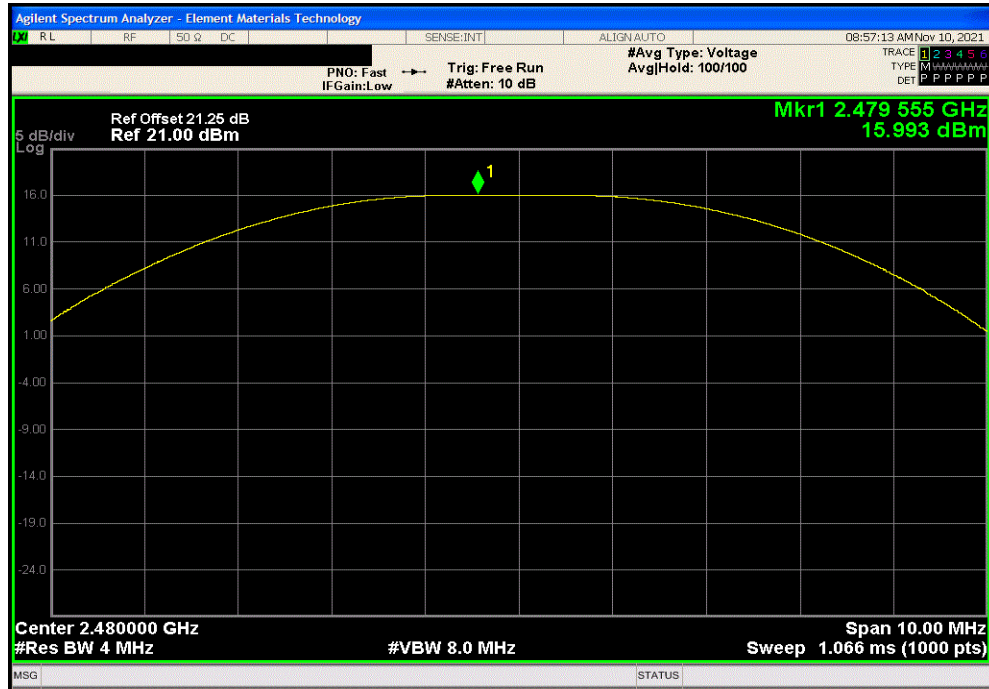

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMI 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5181A	TIG	2020-04-16	2023-04-16
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	2021-03-14	2022-03-14
Attenuator	Fairview Microwave	SA26B-20	TWJ	2021-03-14	2022-03-14
Block - DC	Fairview Microwave	SD3379	AMX	2021-03-14	2022-03-14
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TSTx 2021.03.19.1 XMR 2020.12.30.0


EUT: Zigbee BLE Module C0945		Work Order: LEVT0137	
Serial Number: Sample 2		Date: 10-Nov-21	
Customer: Leviton Mfg Co, Inc		Temperature: 22 °C	
Attendees: Vikas Asthana		Humidity: 39.9% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Jeff Alcock	Power: 3.3VDC via 110VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS			
FCC 15.247:2021		Test Method: ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC Block, 20 dB attenuator, and measurement cable.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature	
		Out Pwr (dBm)	Antenna Gain (dBi)
ZigBee, OQPSK, Low Ch, 2405 MHz		19.263	1.5
ZigBee, OQPSK, Mid Ch, 2440 MHz		19.004	1.5
ZigBee, OQPSK, High Ch, 2480 MHz		15.993	1.5
		EIRP (dBm)	EIRP Limit (dBm)
		20.763	36
		20.504	36
		17.493	36
			Result
			Pass
			Pass
			Pass

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
19.263	1.5	20.763	36	Pass		

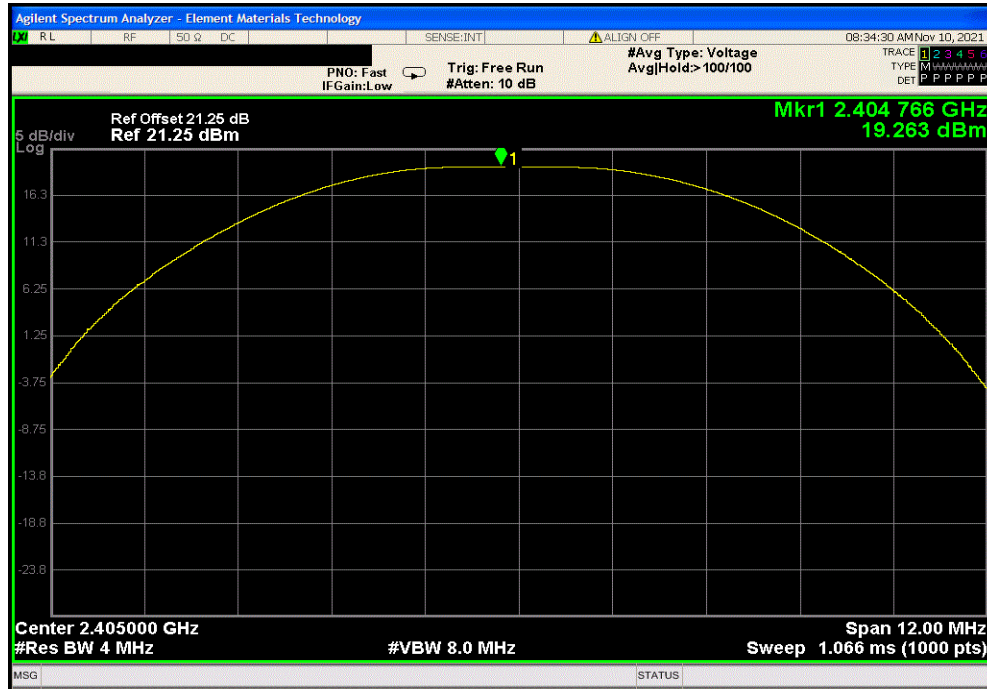

ZigBee, OQPSK, Mid Ch, 2440 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
19.004	1.5	20.504	36	Pass		

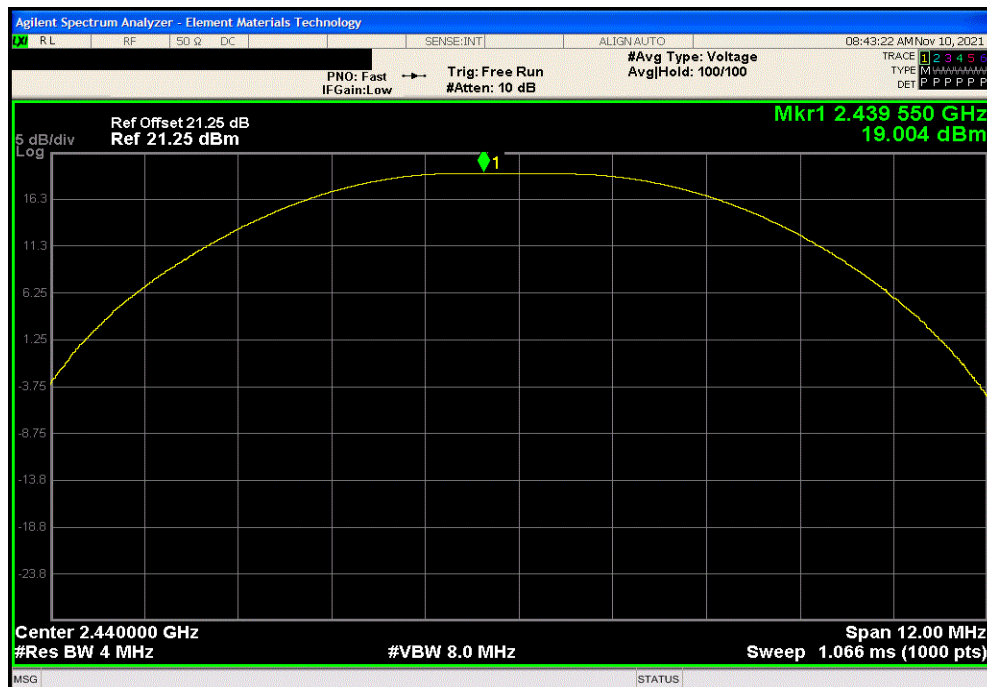


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, High Ch, 2480 MHz					
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
15.993	1.5	17.493	36	Pass	

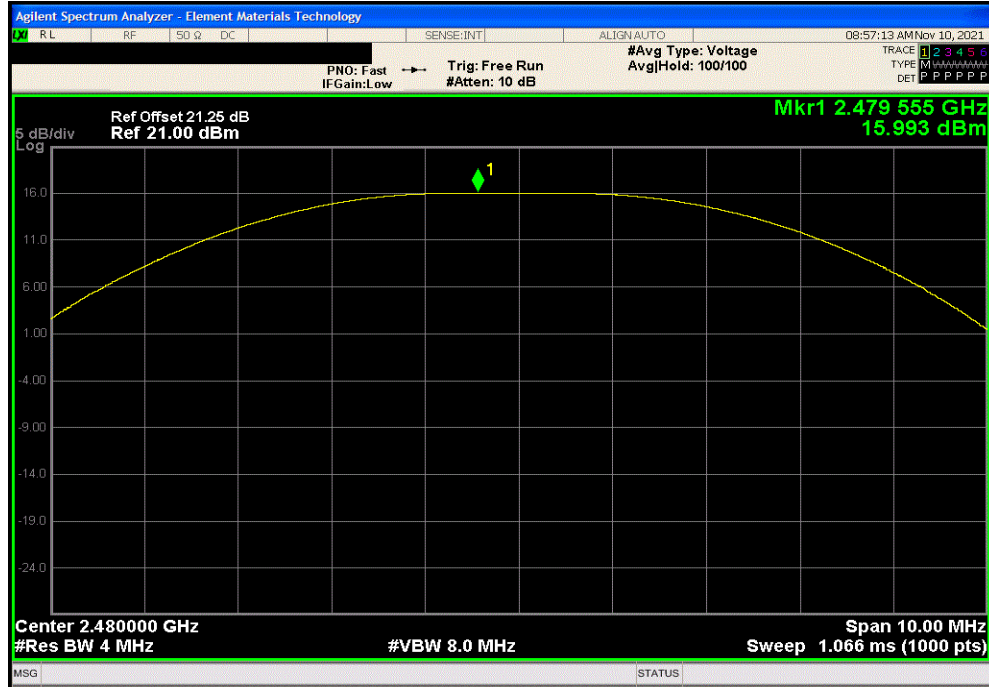

POWER SPECTRAL DENSITY



XMH 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5181A	TIG	2020-04-16	2023-04-16
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	2021-03-14	2022-03-14
Attenuator	Fairview Microwave	SA26B-20	TWJ	2021-03-14	2022-03-14
Block - DC	Fairview Microwave	SD3379	AMX	2021-03-14	2022-03-14
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08

TEST DESCRIPTION

The maximum power spectral density measurements were measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10:2013, clause 11.10.2, the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TSTx 2021.03.19.1 XMR 2020.12.30.0

EUT: Zigbee BLE Module C0945		Work Order: LEVT0137	
Serial Number: Sample 2		Date: 10-Nov-21	
Customer: Leviton Mfg Co, Inc		Temperature: 22 °C	
Attendees: Vikas Asthana		Humidity: 39.9% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Jeff Alcock	Power: 3.3VDC via 110VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS			
FCC 15.247:2021		Test Method: ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC Block, 20 dB attenuator, and measurement cable.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Value dBm/3kHz	Limit < dBm/3kHz
ZigBee, OQPSK, Low Ch, 2405 MHz		3.524	8
ZigBee, OQPSK, Mid Ch, 2440 MHz		3.85	8
ZigBee, OQPSK, High Ch, 2480 MHz		0.365	8
			Results
			Pass
			Pass
			Pass

POWER SPECTRAL DENSITY




TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	3.524	8	Pass			



ZigBee, OQPSK, Mid Ch, 2440 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	3.85	8	Pass			

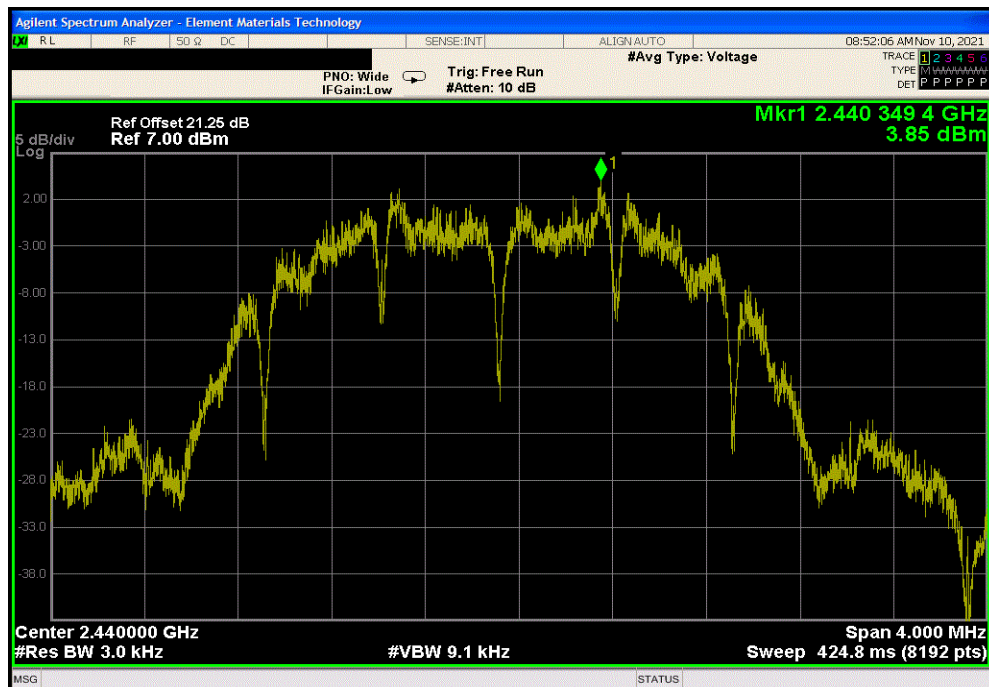


POWER SPECTRAL DENSITY



TbTx 2021.03.19.1 XMt 2020.12.30.0

ZigBee, OQPSK, High Ch, 2480 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	0.365	8	Pass			

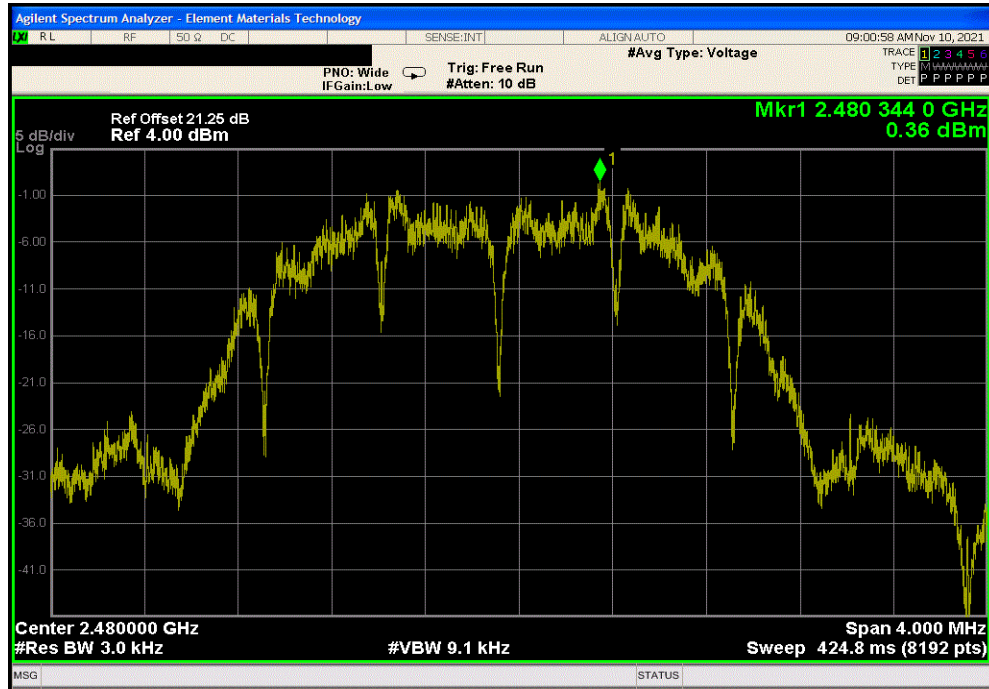

BAND EDGE COMPLIANCE



XMIT 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5181A	TIG	2020-04-16	2023-04-16
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	2021-03-14	2022-03-14
Attenuator	Fairview Microwave	SA26B-20	TWJ	2021-03-14	2022-03-14
Block - DC	Fairview Microwave	SD3379	AMX	2021-03-14	2022-03-14
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TSTx 2021.03.19.1 XMR 2020.12.30.0

EUT: Zigbee BLE Module C0945		Work Order: LEVT0137	
Serial Number: Sample 2		Date: 10-Nov-21	
Customer: Leviton Mfg Co, Inc		Temperature: 22 °C	
Attendees: Vikas Asthana		Humidity: 40% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Jeff Alcock	Power: 3.3VDC via 110VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS			
FCC 15.247:2021		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC Block, 20 dB attenuator, and measurement cable.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
ZigBee, OQPSK, Low Ch, 2405 MHz		-56.2	-20 Pass
ZigBee, OQPSK, High Ch, 2480 MHz		-51.04	-20 Pass

BAND EDGE COMPLIANCE



TbTx 2021.03.19.1 XMt 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-56.2	-20	Pass



ZigBee, OQPSK, High Ch, 2480 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-51.04	-20	Pass



SPURIOUS CONDUCTED EMISSIONS



XMIT 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5181A	TIG	2020-04-16	2023-04-16
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	2021-03-14	2022-03-14
Attenuator	Fairview Microwave	SA26B-20	TWJ	2021-03-14	2022-03-14
Block - DC	Fairview Microwave	SD3379	AMX	2021-03-14	2022-03-14
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08

TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the fundamental was measured with a 100 kHz resolution bandwidth and the highest value was recorded. The rest of the spectrum was then measured with a 100 kHz resolution bandwidth and the highest value was found. The difference between the value found on the fundamental and the rest of the spectrum was compared against the limit to determine compliance.

SPURIOUS CONDUCTED EMISSIONS



TSMTx 2021.03.19.1 XMR 2020.12.30.0


EUT: Zigbee BLE Module C0945		Work Order: LEVT0137	
Serial Number: Sample 2		Date: 10-Nov-21	
Customer: Leviton Mfg Co, Inc		Temperature: 22.1 °C	
Attendees: Vikas Asthana		Humidity: 39.7% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Jeff Alcock	Power: 3.3VDC via 110VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS			
FCC 15.247:2021		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC Block, 20 dB attenuator, and measurement cable.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature	
		Frequency Range	Measured Freq (MHz)
			Max Value (dBc)
			Limit ≤ (dBc)
			Result
ZigBee, OQPSK, Low Ch, 2405 MHz		Fundamental	2404.66
ZigBee, OQPSK, Low Ch, 2405 MHz		30 MHz - 12.5 GHz	4810.34
ZigBee, OQPSK, Low Ch, 2405 MHz		12.5 GHz - 25 GHz	24891.65
ZigBee, OQPSK, Mid Ch, 2440 MHz		Fundamental	2440.43
ZigBee, OQPSK, Mid Ch, 2440 MHz		30 MHz - 12.5 GHz	4878.85
ZigBee, OQPSK, Mid Ch, 2440 MHz		12.5 GHz - 25 GHz	24206.45
ZigBee, OQPSK, High Ch, 2480 MHz		Fundamental	2480.42
ZigBee, OQPSK, High Ch, 2480 MHz		30 MHz - 12.5 GHz	4959.54
ZigBee, OQPSK, High Ch, 2480 MHz		12.5 GHz - 25 GHz	24055.37

SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
Fundamental	2404.66	N/A	N/A	N/A		

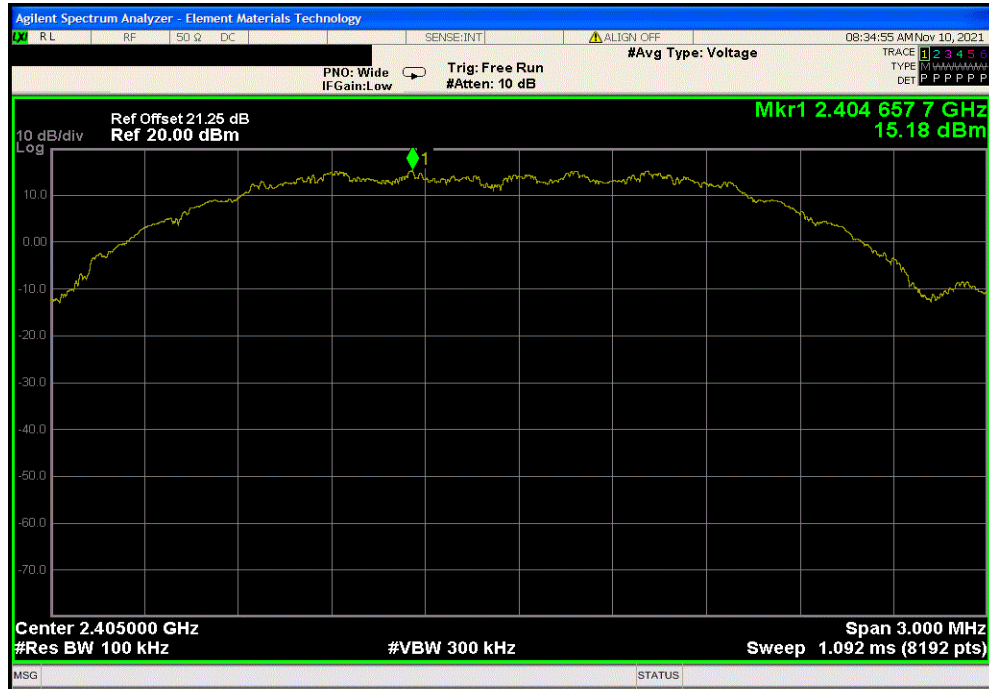

ZigBee, OQPSK, Low Ch, 2405 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
30 MHz - 12.5 GHz	4810.34	-39.67	-20	Pass		

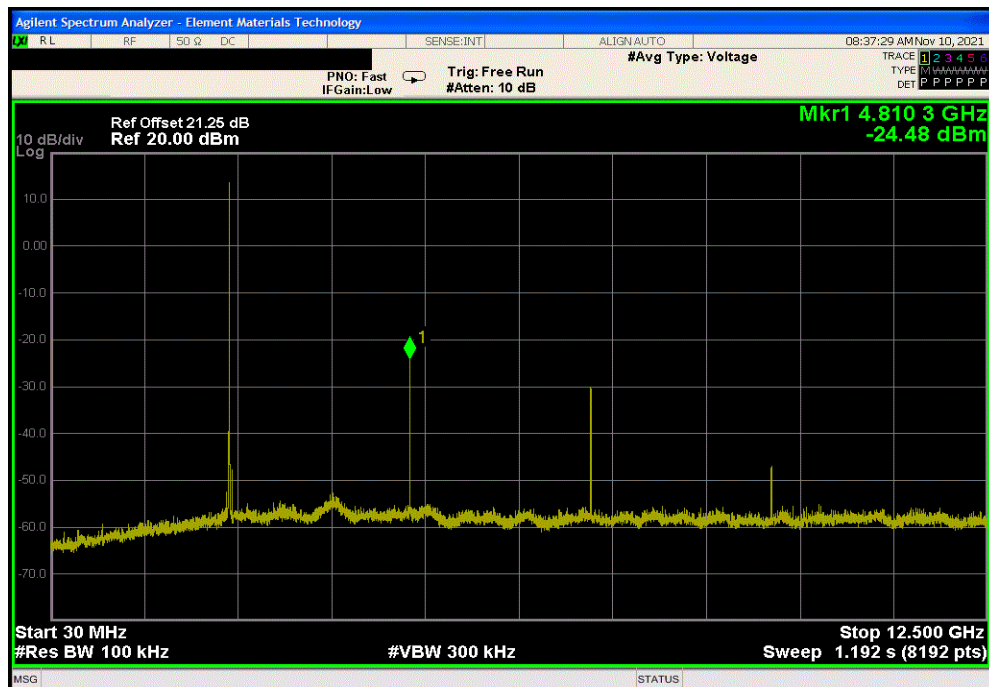


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMt 2020.12.30.0

ZigBee, OQPSK, Low Ch, 2405 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24891.65	-65.74	-20	Pass	

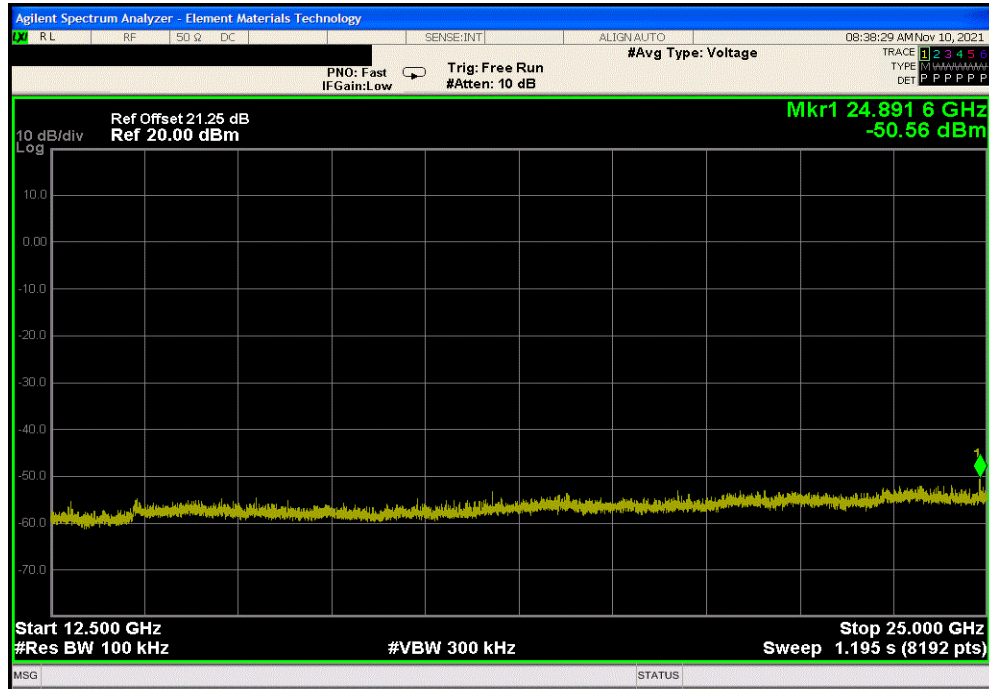

ZigBee, OQPSK, Mid Ch, 2440 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2440.43	N/A	N/A	N/A	

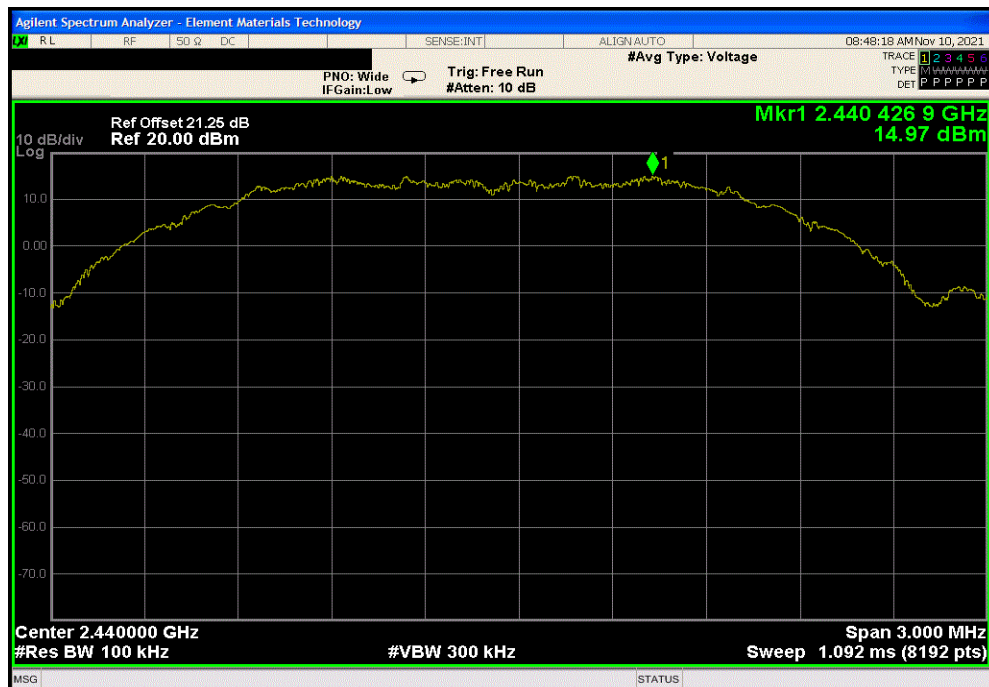


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMt 2020.12.30.0

ZigBee, OQPSK, Mid Ch, 2440 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	4878.85	-40.66	-20	Pass	

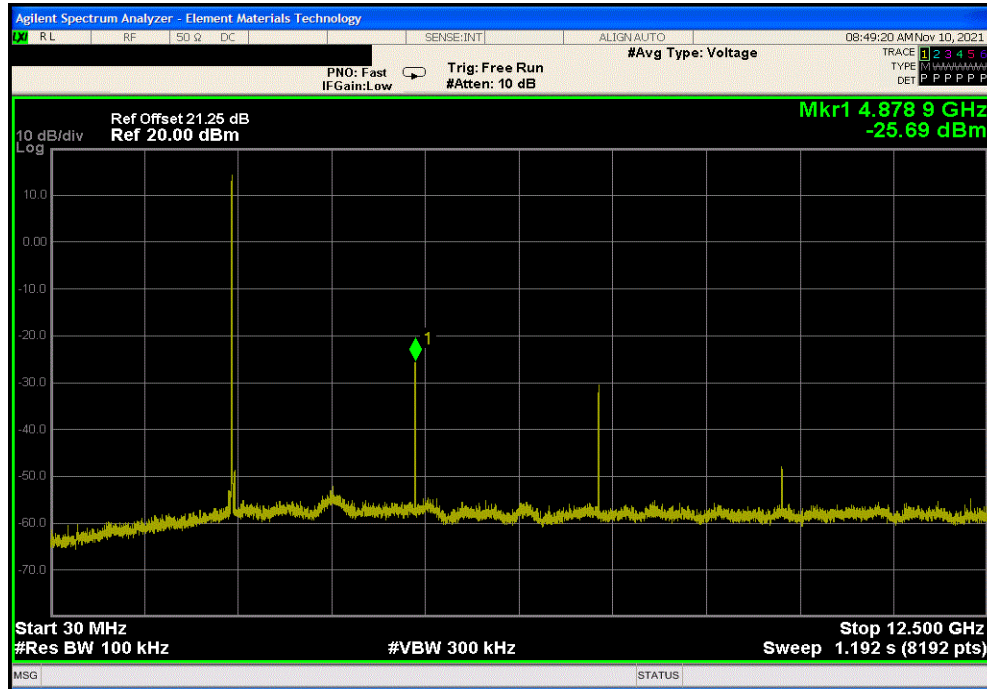

ZigBee, OQPSK, Mid Ch, 2440 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24206.45	-66.94	-20	Pass	

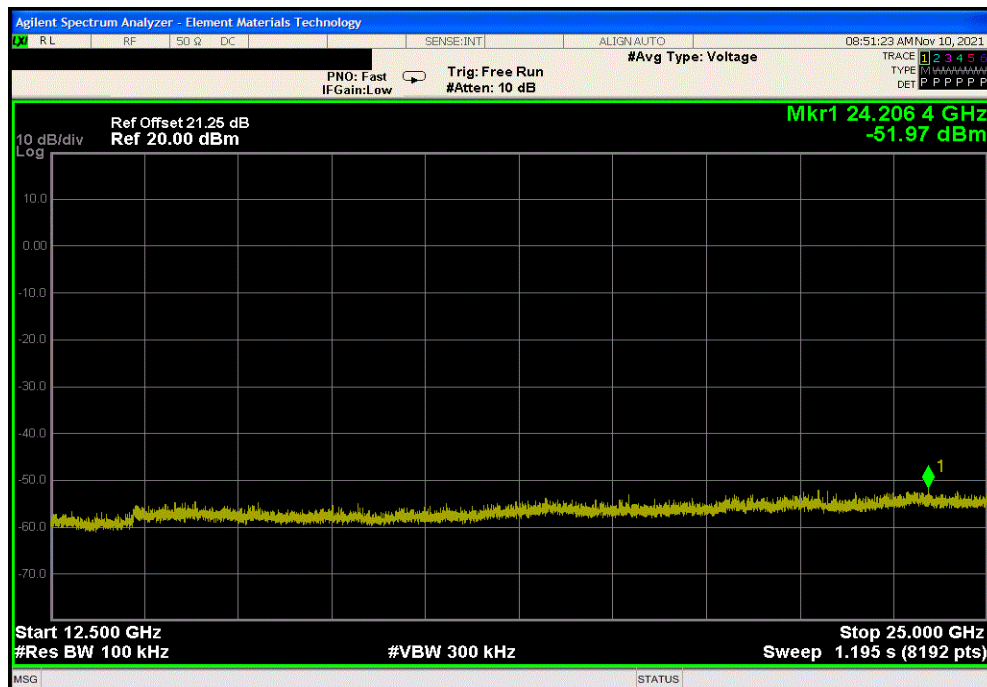


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, High Ch, 2480 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
Fundamental	2480.42	N/A	N/A	N/A		

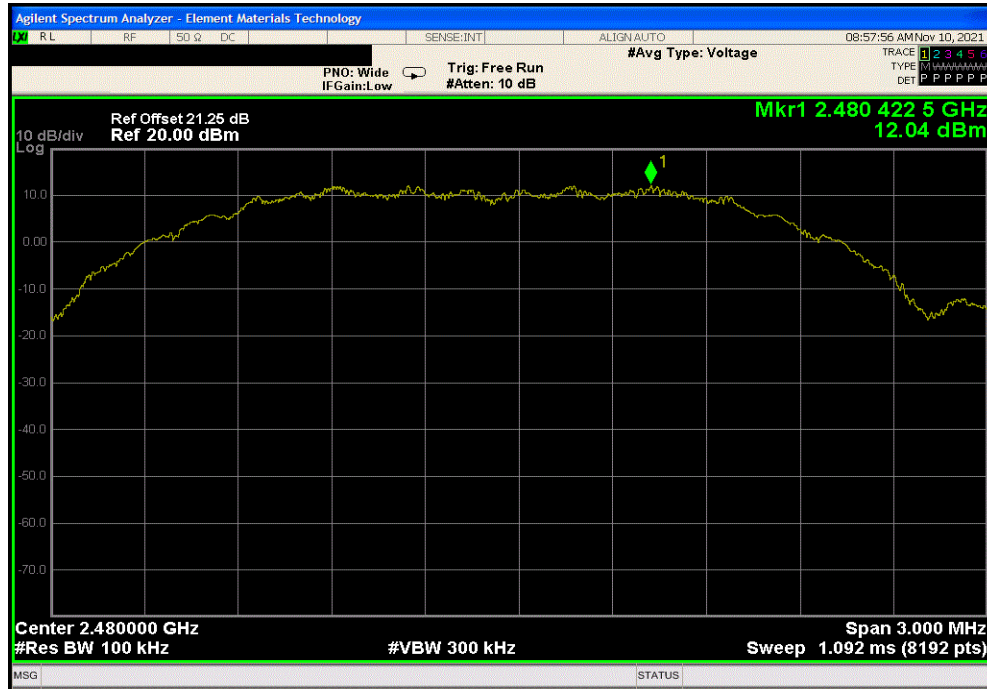

ZigBee, OQPSK, High Ch, 2480 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
30 MHz - 12.5 GHz	4959.54	-40.79	-20	Pass		

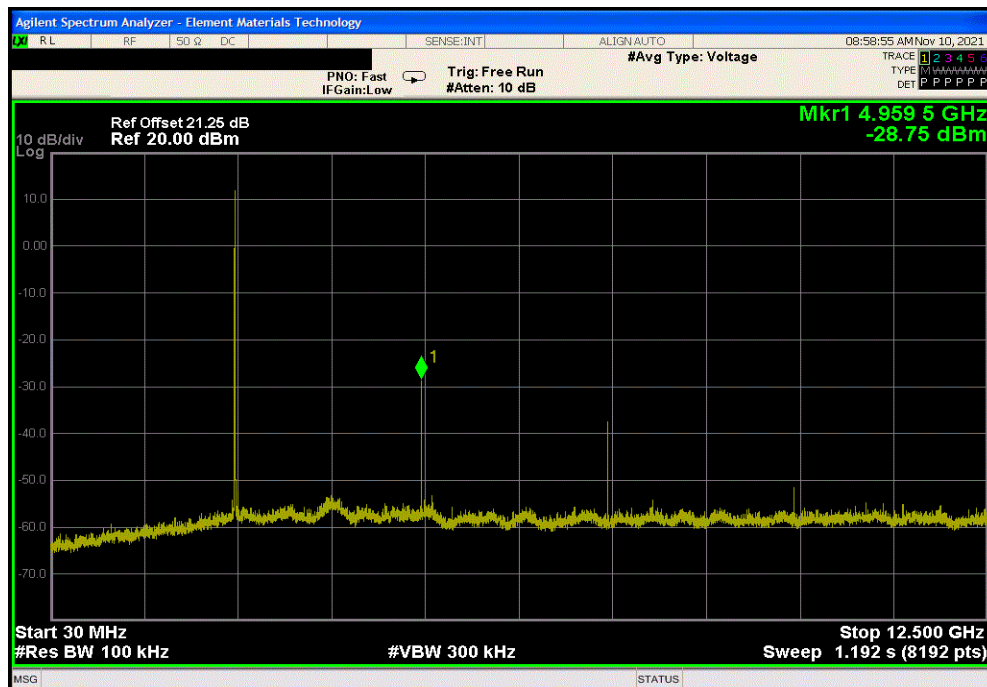


SPURIOUS CONDUCTED EMISSIONS



TbTx 2021.03.19.1 XMR 2020.12.30.0

ZigBee, OQPSK, High Ch, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24055.37	-64.07	-20	Pass	

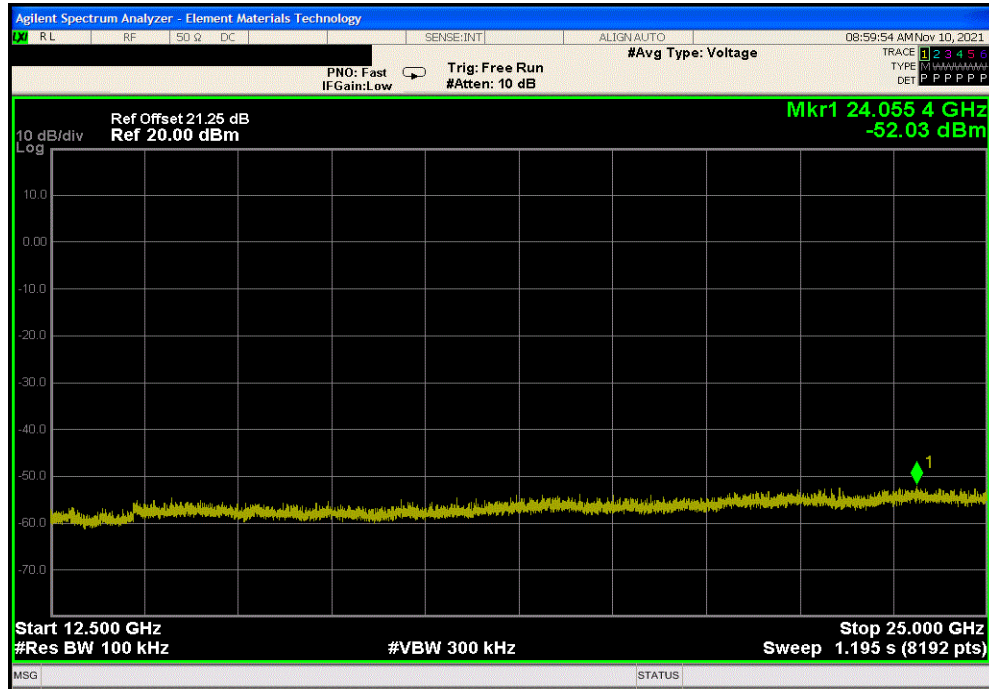

SPURIOUS RADIATED EMISSIONS

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10:2013). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector
PK = Peak Detector
AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements within 2 MHz of the allowable band may have been taken using the integration method from ANSI C63.10:2013, clause 11.13.3. This procedure uses the channel power feature of the spectrum analyzer to integrate the power of the emission within a 1 MHz bandwidth.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10 \cdot \log(1/dc)$.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	2020-12-08	2021-12-08
Antenna - Biconilog	EMCO	3142B	AXJ	2021-03-03	2023-03-03
Antenna - Double Ridge	EMCO	3115	AHC	2020-07-01	2022-07-01
Antenna - Standard Gain	ETS Lindgren	3160-07	AHU	NCR	NCR
Antenna - Standard Gain	ETS Lindgren	3160-08	AHV	NCR	NCR
Antenna - Standard Gain	ETS Lindgren	3160-09	AIV	NCR	NCR
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AOL	2020-11-17	2021-11-17
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAG	2020-11-17	2021-11-17
Amplifier - Pre-Amplifier	L-3 Narda-MITEQ	AMF-6F-08001200-30-10P	PAO	2020-11-18	2021-11-18
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	2020-11-18	2021-11-18
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	2021-07-16	2022-07-16
Cable	N/A	Bilog Cables	EVA	2020-11-17	2021-11-17
Cable	N/A	Double Ridge Horn Cables	EVB	2020-11-17	2021-11-17
Cable	None	Standard Gain Horn Cables	EVF	2020-11-18	2021-11-18
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	EVY	2021-07-16	2022-07-16
Attenuator	Coaxicom	3910-20	AXZ	2021-02-15	2022-02-15
Filter - Low Pass	Micro-Tronics	LPM50004	LFD	2021-02-15	2022-02-15
Filter - High Pass	Micro-Tronics	HPM50111	HFO	2020-11-17	2021-11-17

SPURIOUS RADIATED EMISSIONS

MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	5.2 dB	-5.2 dB

FREQUENCY RANGE INVESTIGATED

30 MHz TO 26500 MHz

POWER INVESTIGATED

3.3VDC via 110VAC/60Hz

CONFIGURATIONS INVESTIGATED

LEVT0136-1
LEVT0137-1

MODES INVESTIGATED

Tx - Zigbee, 100% duty cycle, OQPSK, Low Ch = 2405 MHz, Mid Ch = 2440MHz, High Ch = 2480 MHz
--

SPURIOUS RADIATED EMISSIONS

EUT:	Zigbee BLE Module C0945	Work Order:	LEVT0136
Serial Number:	Sample 1	Date:	2021-09-27
Customer:	Leviton Mfg Co, Inc	Temperature:	23.1°C
Attendees:	Vikas Asthana	Relative Humidity:	49.1%
Customer Project:	None	Bar. Pressure (PMSL):	1013 mb
Tested By:	Jeff Alcock	Job Site:	EV01
Power:	3.3VDC via 110VAC/60Hz	Configuration:	LEVT0136-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	14	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


Bandedge - please reference data comments below for channel and EUT orientation.

EUT OPERATING MODES

Tx - Zigbee, 100% duty cycle, OQPSK, Low Ch = 2405 MHz, High Ch = 2480 MHz

DEVIATIONS FROM TEST STANDARD

None

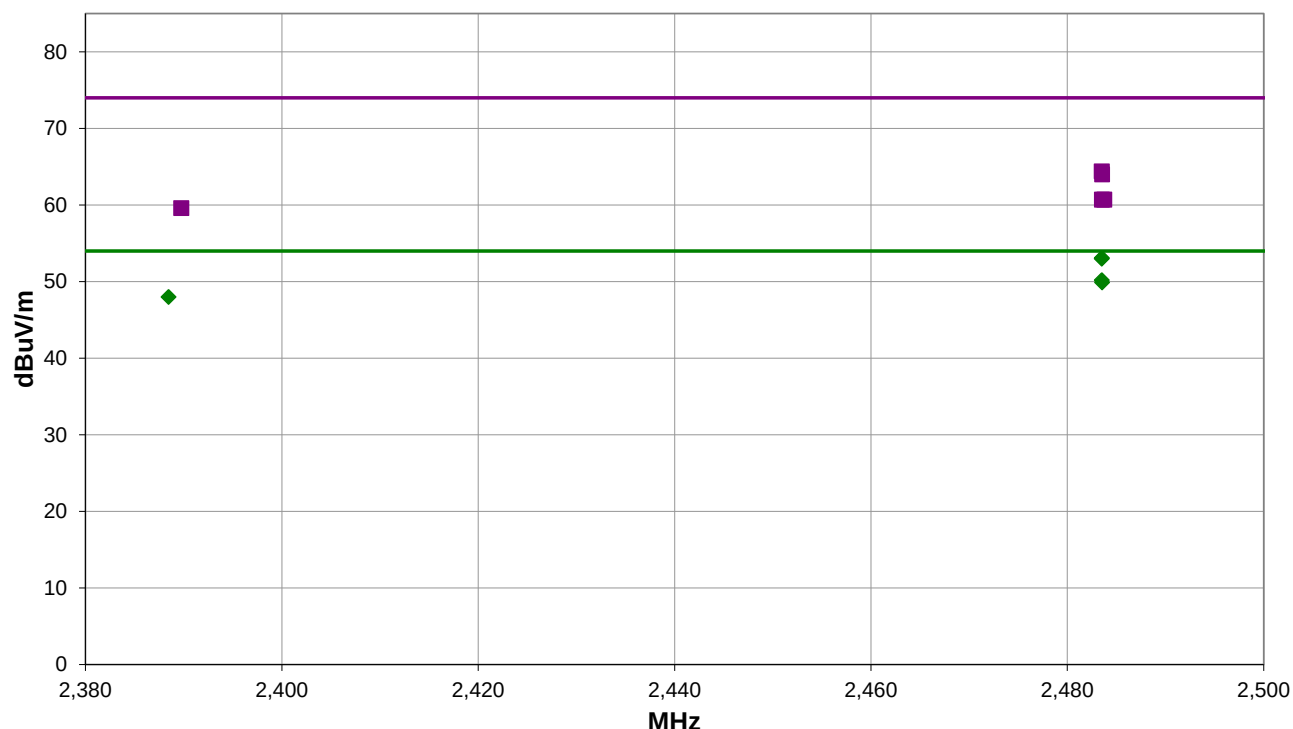

Run #: 14

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #14

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.513	36.7	-3.6	1.26	104.0	3.0	20.0	Vert	AV	0.0	53.1	54.0	-0.9	High Ch, EUT Vert
2483.507	36.6	-3.6	1.29	263.0	3.0	20.0	Vert	AV	0.0	53.0	54.0	-1.0	High Ch, EUT on Side
2483.510	33.8	-3.6	3.57	199.0	3.0	20.0	Horz	AV	0.0	50.2	54.0	-3.8	High Ch, EUT on Side
2483.540	33.5	-3.6	3.07	232.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	High Ch, EUT Horz
2388.457	31.5	-3.5	1.5	360.0	3.0	20.0	Vert	AV	0.0	48.0	54.0	-6.0	Low Ch, EUT on Side
2483.510	48.0	-3.6	1.29	263.0	3.0	20.0	Vert	PK	0.0	64.4	74.0	-9.6	High Ch, EUT on Side
2483.543	47.6	-3.6	1.26	104.0	3.0	20.0	Vert	PK	0.0	64.0	74.0	-10.0	High Ch, EUT Vert
2483.767	44.3	-3.6	3.57	199.0	3.0	20.0	Horz	PK	0.0	60.7	74.0	-13.3	High Ch, EUT on Side
2483.520	44.3	-3.6	3.07	232.0	3.0	20.0	Vert	PK	0.0	60.7	74.0	-13.3	High Ch, EUT Horz
2389.753	43.1	-3.5	1.5	360.0	3.0	20.0	Vert	PK	0.0	59.6	74.0	-14.4	Low Ch, EUT on Side

CONCLUSION

Pass


Tested By

SPURIOUS RADIATED EMISSIONS

EUT:	Zigbee BLE Module C0945	Work Order:	LEVT0136
Serial Number:	Sample 1	Date:	2021-09-27
Customer:	Leviton Mfg Co, Inc	Temperature:	23.1°C
Attendees:	Vikas Asthana	Relative Humidity:	49.1%
Customer Project:	None	Bar. Pressure (PMSL):	1013 mb
Tested By:	Jeff Alcock	Job Site:	EV01
Power:	3.3VDC via 110VAC/60Hz	Configuration:	LEVT0136-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	12	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


Please reference data comments below for channel and EUT orientation.

EUT OPERATING MODES

Tx - Zigbee, 100% duty cycle, OQPSK, Mid Ch = 2440 MHz

DEVIATIONS FROM TEST STANDARD

None

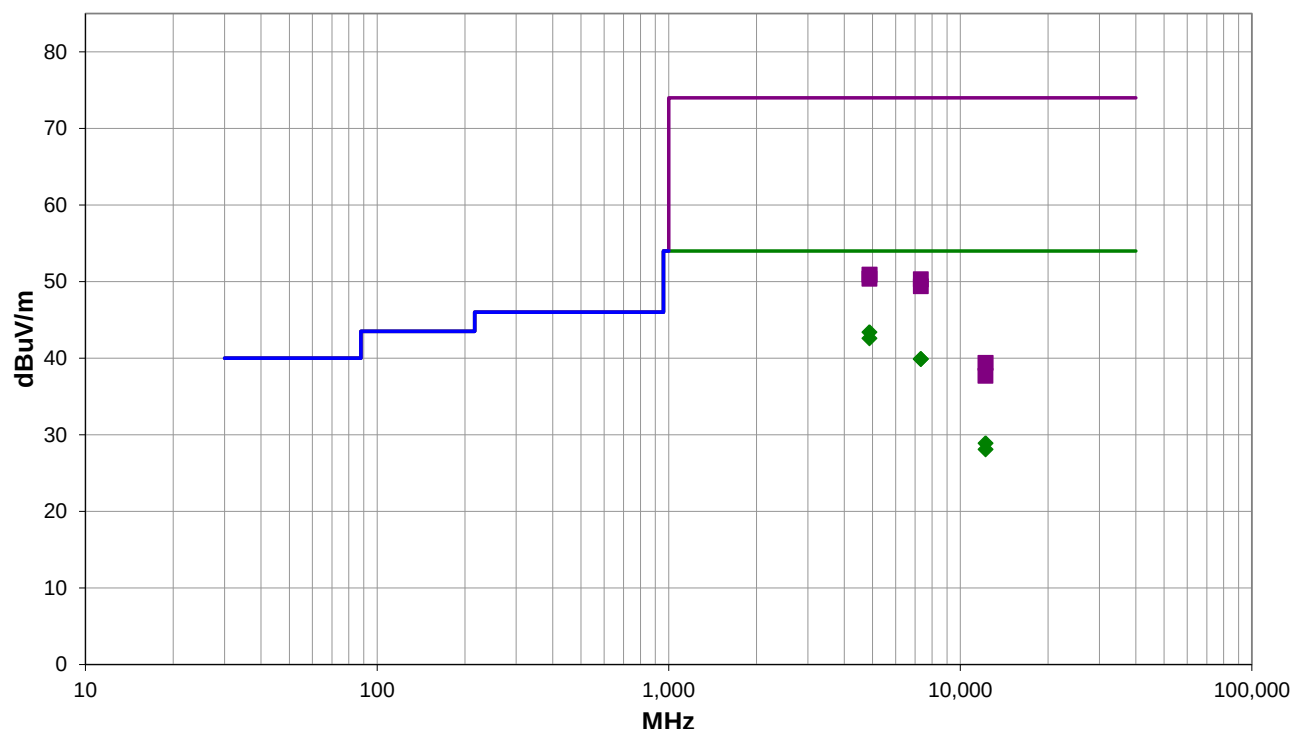

Run #: 12

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #12

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4878.717	37.4	6.0	2.84	253.0	3.0	0.0	Horz	AV	0.0	43.4	54.0	-10.6	Mid Ch, EUT on Side
4878.800	36.6	6.0	1.01	319.0	3.0	0.0	Vert	AV	0.0	42.6	54.0	-11.4	Mid Ch, EUT Vert
7318.250	28.3	11.6	1.5	324.0	3.0	0.0	Vert	AV	0.0	39.9	54.0	-14.1	Mid Ch, EUT Vert
7319.350	28.2	11.7	1.5	192.0	3.0	0.0	Horz	AV	0.0	39.9	54.0	-14.1	Mid Ch, EUT on Side
4881.017	44.9	6.0	1.01	319.0	3.0	0.0	Vert	PK	0.0	50.9	74.0	-23.1	Mid Ch, EUT Vert
4878.417	44.4	6.0	2.84	253.0	3.0	0.0	Horz	PK	0.0	50.4	74.0	-23.6	Mid Ch, EUT on Side
7319.517	38.6	11.7	1.5	324.0	3.0	0.0	Vert	PK	0.0	50.3	74.0	-23.7	Mid Ch, EUT Vert
7321.767	37.7	11.7	1.5	192.0	3.0	0.0	Horz	PK	0.0	49.4	74.0	-24.6	Mid Ch, EUT on Side
12204.780	28.0	0.9	1.0	36.0	3.0	0.0	Horz	AV	0.0	28.9	54.0	-25.1	Mid Ch, EUT on Side
12204.980	27.2	0.9	2.85	157.0	3.0	0.0	Vert	AV	0.0	28.1	54.0	-25.9	Mid Ch, EUT Vert
12196.950	38.5	0.9	1.0	36.0	3.0	0.0	Horz	PK	0.0	39.4	74.0	-34.6	Mid Ch, EUT on Side
12195.830	36.8	0.9	2.85	157.0	3.0	0.0	Vert	PK	0.0	37.7	74.0	-36.3	Mid Ch, EUT Vert

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS

EUT:	Zigbee BLE Module C0945	Work Order:	LEVT0137
Serial Number:	Sample 1	Date:	2021-11-09
Customer:	Leviton Mfg Co, Inc	Temperature:	22.2°C
Attendees:	Vikas Asthana	Relative Humidity:	40.3%
Customer Project:	None	Bar. Pressure (PMSL):	1011.85 mb
Tested By:	Kam Robertson & Jeff Alcoke	Job Site:	EV01
Power:	3.3VDC via 110VAC/60Hz	Configuration:	LEVT0137-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	18	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


See comments below for channel and EUT orientation

EUT OPERATING MODES

Tx - Zigbee, 100% duty cycle, OQPSK, Low Ch = 2405 MHz, Mid Ch = 2440MHz , High Ch = 2480 MHz

DEVIATIONS FROM TEST STANDARD

None

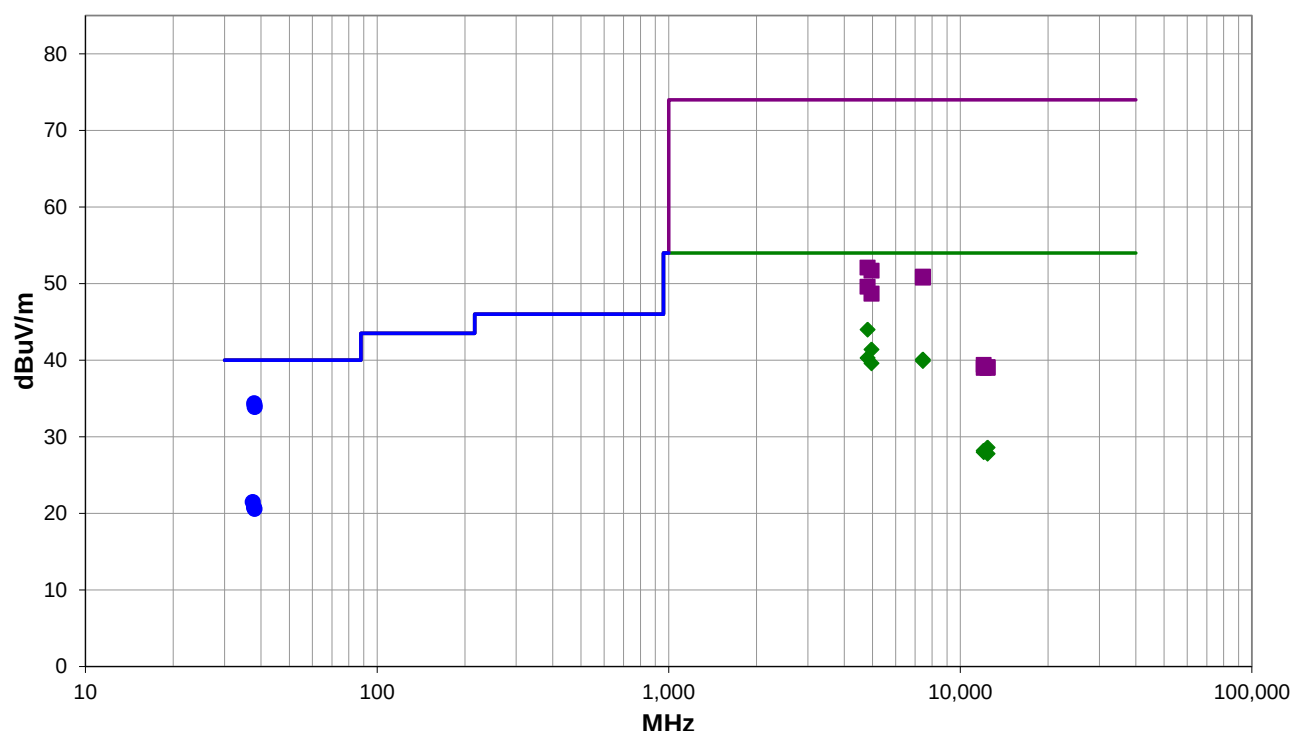

Run #: 18

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #18

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
37.879	38.4	-4.0	1.0	102.0	3.0	0.0	Vert	QP	0.0	34.4	40.0	-5.6	High Ch, EUT Horz
37.967	38.3	-4.1	1.01	137.0	3.0	0.0	Vert	QP	0.0	34.2	40.0	-5.8	Mid Ch, EUT Horz
38.021	38.0	-4.1	1.0	249.0	3.0	0.0	Vert	QP	0.0	33.9	40.0	-6.1	Low Ch, EUT Horz
4808.717	38.8	5.2	2.28	248.0	3.0	0.0	Horz	AV	0.0	44.0	54.0	-10.0	Low Ch, EUT on Side
4958.767	35.5	5.9	3.16	231.0	3.0	0.0	Vert	AV	0.0	41.4	54.0	-12.6	High Ch, EUT Horz
4808.792	35.1	5.2	1.12	149.0	3.0	0.0	Vert	AV	0.0	40.3	54.0	-13.7	Low Ch, EUT Horz
7438.050	27.9	12.2	1.5	337.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch, EUT Horz
7440.483	27.7	12.2	1.5	83.0	3.0	0.0	Horz	AV	0.0	39.9	54.0	-14.1	High Ch, EUT on Side
4958.775	33.7	5.9	2.13	133.0	3.0	0.0	Horz	AV	0.0	39.6	54.0	-14.4	High Ch, EUT on Side
37.442	25.3	-3.8	0.99	275.0	3.0	0.0	Horz	QP	0.0	21.5	40.0	-18.5	High Ch, EUT Horz
37.814	24.8	-4.0	1.0	297.0	3.0	0.0	Horz	QP	0.0	20.8	40.0	-19.2	Mid Ch, EUT Horz
38.001	24.7	-4.1	0.99	229.0	3.0	0.0	Horz	QP	0.0	20.6	40.0	-19.4	Low Ch, EUT Horz
4808.817	46.9	5.2	2.28	248.0	3.0	0.0	Horz	PK	0.0	52.1	74.0	-21.9	Low Ch, EUT on Side
4960.867	45.8	5.9	3.16	231.0	3.0	0.0	Vert	PK	0.0	51.7	74.0	-22.3	High Ch, EUT Horz
7440.525	38.7	12.2	1.5	83.0	3.0	0.0	Horz	PK	0.0	50.9	74.0	-23.1	High Ch, EUT on Side
7439.017	38.6	12.2	1.5	337.0	3.0	0.0	Vert	PK	0.0	50.8	74.0	-23.2	High Ch, EUT Horz
4808.325	44.4	5.2	1.12	149.0	3.0	0.0	Vert	PK	0.0	49.6	74.0	-24.4	Low Ch, EUT Horz
4958.742	42.8	5.9	2.13	133.0	3.0	0.0	Horz	PK	0.0	48.7	74.0	-25.3	High Ch, EUT on Side
12399.900	27.1	1.5	1.5	173.0	3.0	0.0	Horz	AV	0.0	28.6	54.0	-25.4	High Ch, EUT on Side
12027.440	27.0	1.2	1.18	197.0	3.0	0.0	Vert	AV	0.0	28.2	54.0	-25.8	Low Ch, EUT Horz
12026.920	26.8	1.2	1.02	218.0	3.0	0.0	Horz	AV	0.0	28.0	54.0	-26.0	Low Ch, EUT on Side
12399.810	26.3	1.5	1.05	47.0	3.0	0.0	Vert	AV	0.0	27.8	54.0	-26.2	High Ch, EUT Horz
12025.960	38.2	1.2	1.02	218.0	3.0	0.0	Horz	PK	0.0	39.4	74.0	-34.6	Low Ch, EUT on Side
12397.970	37.6	1.5	1.5	173.0	3.0	0.0	Horz	PK	0.0	39.1	74.0	-34.9	High Ch, EUT on Side
12026.860	37.8	1.2	1.18	197.0	3.0	0.0	Vert	PK	0.0	39.0	74.0	-35.0	Low Ch, EUT Horz
12399.430	37.5	1.5	1.05	47.0	3.0	0.0	Vert	PK	0.0	39.0	74.0	-35.0	High Ch, EUT Horz

CONCLUSION

Pass



Tested By

End of Test Report