

FCC REPORT

(UNII)

Applicant: Neusoft Corporation

Address of Applicant: No.2 Xinxu Street, Hunnan New District, Shenyang, Liaoning,
China Shenyang Liaoning CN 110179

Equipment Under Test (EUT)

Product Name: Wireless Digital Terminal

Model No.: S611G

Trade mark: Neusoft

FCC ID: 2ASMA-S611G

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: 17 Sep., 2019

Date of Test: 18 Sep., to 15 Oct., 2019

Date of report issued: 16 Oct., 2019

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	16 Oct., 2019	Original

Tested by:

Mike.ou

Date:

16 Oct., 2019

Test Engineer

Reviewed by:

Winner Zhang

Date:

16 Oct., 2019

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS.....	8
5.5 MEASUREMENT UNCERTAINTY.....	8
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	8
5.7 RELATED SUBMITTAL(S) / GRANT (S)	8
5.8 LABORATORY FACILITY	8
5.9 LABORATORY LOCATION	8
5.10 TEST INSTRUMENTS LIST	9
6 TEST RESULTS AND MEASUREMENT DATA.....	10
6.1 ANTENNA REQUIREMENT	10
6.2 CONDUCTED EMISSION	11
6.3 CONDUCTED OUTPUT POWER	14
6.4 OCCUPY BANDWIDTH	29
6.5 POWER SPECTRAL DENSITY	56
6.6 BAND EDGE	71
6.7 SPURIOUS EMISSION.....	97
6.7.1 Restricted Band.....	97
6.7.2 Unwanted Emissions out of the Restricted Bands	122
6.8 FREQUENCY STABILITY.....	150
7 TEST SETUP PHOTO.....	153
8 EUT CONSTRUCTIONAL DETAILS	154

4 Test Summary

Test Item	Section in CFR 47	Test Result
Antenna requirement	15.203 & 15.407 (a)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407 (a) (1) (iv) & (a) (2) & (a) (3)	Pass
26dB Occupied Bandwidth	15.407 (a) (5)	Pass
6dB Emission Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407 (a) (1) (iv) & (a) (2) & (a) (3)	Pass
Band Edge	15.407(b)	Pass
Spurious Emission	15.407 (b) & 15.205 & 15.209	Pass
Frequency Stability	15.407(g)	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).		
Test Method:	ANSI C63.4-2014 ANSI C63.10-2013 KDB 789033 D02 General UNII Test Procedures New Rules v02r01	

5 General Information

5.1 Client Information

Applicant:	Neusoft Corporation
Address:	No.2 Xinxu Street, Hunnan New District, Shenyang, Liaoning, China Shenyang Liaoning CN 110179
Manufacturer:	Neusoft Corporation
Address:	No.2 Xinxu Street, Hunnan New District, Shenyang, Liaoning, China Shenyang Liaoning CN 110179

5.2 General Description of E.U.T.

Product Name:	Wireless Digital Terminal
Model No.:	S611G
Operation Frequency:	Band 1: 5150MHz-5250MHz, Band 2: 5250MHz-5350MHz Band 3: 5470MHz-5725MHz, Band 4: 5725MHz-5825MHz
Channel numbers:	Band 1: 802.11a/802.11n/ac20: 4, 802.11n/ac40: 2, 802.11ac80: 1 Band 2: 802.11a/802.11n/ac20: 4, 802.11n/ac40: 2, 802.11ac80: 1 Band 3: 802.11a/802.11n/ac20: 11, 802.11n/ac40: 5, 802.11ac80: 2 Band 4: 802.11a/802.11n/ac20: 5, 802.11n/ac40: 2, 802.11ac80: 1
Channel separation:	802.11a/802.11n20: 20MHz, 802.11n40: 40MHz, 802.11ac: 80MHz
Modulation technology (IEEE 802.11a):	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology (IEEE 802.11n):	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology (IEEE 802.11ac):	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Data speed (IEEE 802.11a):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1: 13Mbps, MCS2: 19.5Mbps, MCS3: 26Mbps, MCS4: 39Mbps, MCS5: 52Mbps, MCS6: 58.5Mbps, MCS7: 65Mbps
Data speed (IEEE 802.11n40):	MCS0: 15Mbps, MCS1: 30Mbps, MCS2: 45Mbps, MCS3: 60Mbps, MCS4: 90Mbps, MCS5: 120Mbps, MCS6: 135Mbps, MCS7: 150Mbps
Data speed (IEEE 802.11ac):	Up to 433.3Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0.9 dBi
Power supply:	Rechargeable Lithium polymer Battery DC3.85V-4600mAh
AC adapter:	Model: ICP12-050-2000B Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2000mA
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel					
Band 1					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	42	5210MHz
40	5200MHz	46	5230MHz		
44	5220MHz				
48	5240MHz				
Band 2					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260MHz	54	5270MHz	58	5290MHz
56	5280MHz	62	5310MHz		
60	5300MHz				
64	5320MHz				
Band 3					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
100	5500MHz	102	5510MHz	106	5530MHz
104	5520MHz	110	5550MHz	122	5610MHz
108	5540MHz	118	5590MHz		
112	5560MHz	126	5630MHz		
116	5580MHz	134	5670MHz		
120	5600MHz				
124	5620MHz				
128	5640MHz				
132	5660MHz				
136	5680MHz				
140	5700MHz				
Band 4					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	155	5775MHz
153	5765MHz	159	5795MHz		
157	5785MHz				
161	5805MHz				
165	5825MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5180MHz	Lowest	5190MHz	Middle	5210MHz
Middle	5200MHz	Highest	5230MHz		
Highest	5240MHz				
Band 2					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5260MHz	Lowest	5270MHz	Middle	5290MHz
Middle	5280MHz	Highest	5310MHz		
Highest	5320MHz				
Band 3					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5500MHz	Lowest	5510MHz	Lowest	5530MHz
Middle	5600MHz	Middle	5590MHz	Highest	5610MHz
Highest	5700MHz	Highest	5670MHz		
Band 4					
802.11a/802.11n20		802.11n40		802.11ac	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5745MHz	Lowest	5755MHz	Middle	5775MHz
Middle	5785MHz	Highest	5795MHz		
Highest	5825MHz				

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate, and found the follow list were the worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps
802.11ac	29.3 Mbps

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX745	N/A	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.
--

5.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC - Designation No.: CN1211 Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L6048 Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

5.9 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd. Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

5.10 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-10-2018	11-09-2019
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-18-2019	03-17-2020
Signal Generator	R&S	SMR20	1008100050	03-18-2019	03-17-2020
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	10-31-2018	10-30-2019
				10-31-2019	10-30-2020
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	09-24-2018	09-23-2019
				09-24-2019	09-23-2020
Simulated Station	Rohde & Schwarz	CMW500	140493	07-16-2018	07-15-2019
				07-16-2019	07-15-2020


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2021
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part15 E Section 15.203 /407(a)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	
E.U.T Antenna:	
The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 0.9 dBi.	
	

6.2 Conducted Emission

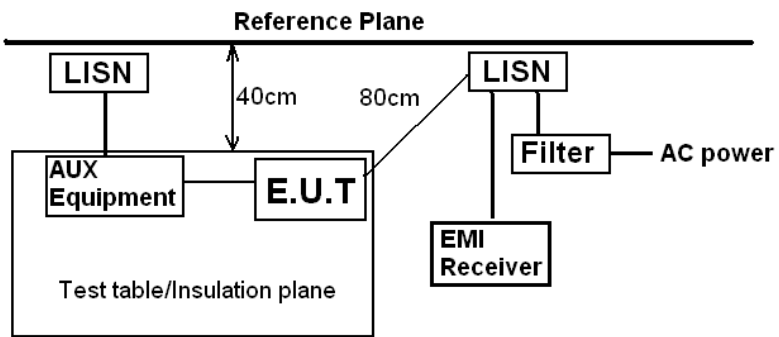Test Requirement:	FCC Part15 C Section 15.207		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	
	0.15-0.5	66 to 56*	0.15-0.5
	0.5-5	56	0.5-5
	5-30	60	5-30
* Decreases with the logarithm of the frequency.			
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.10 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Passed		

Measurement Data:

Product name:	Wireless Digital Terminal	Product model:	S611G
Test by:	Mike	Test mode:	5G Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

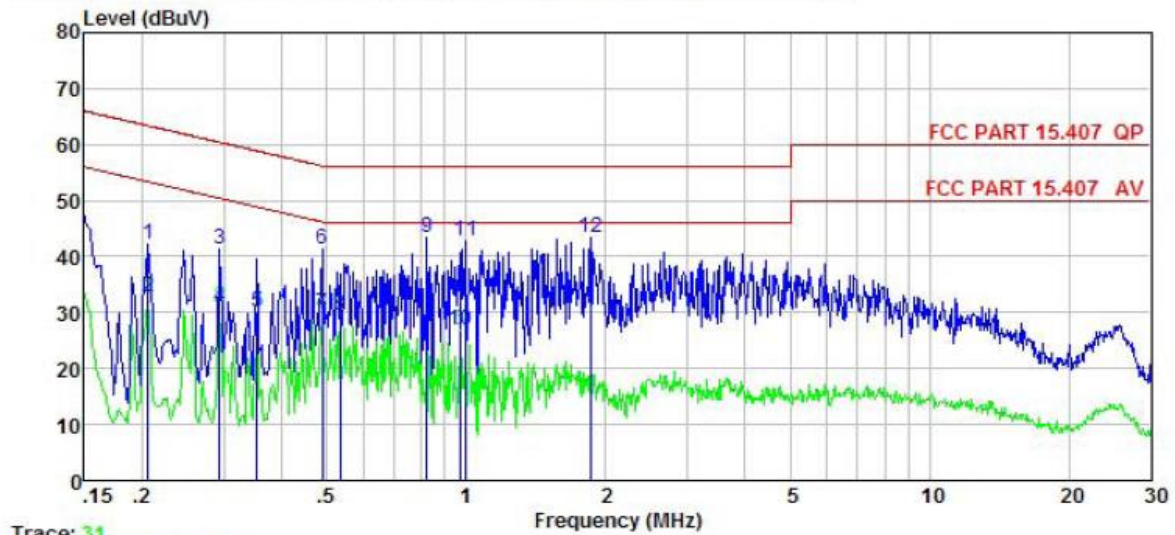


Trace: 31

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.206	31.77	-0.41	10.76	42.12	63.36	-21.24	QP
2	0.206	22.37	-0.41	10.76	32.72	53.36	-20.64	Average
3	0.294	30.92	-0.39	10.74	41.27	60.41	-19.14	QP
4	0.294	20.63	-0.39	10.74	30.98	50.41	-19.43	Average
5	0.354	19.83	-0.38	10.73	30.18	48.87	-18.69	Average
6	0.489	30.84	-0.39	10.76	41.21	56.19	-14.98	QP
7	0.489	19.56	-0.39	10.76	29.93	46.19	-16.26	Average
8	0.535	19.19	-0.39	10.76	29.56	46.00	-16.44	Average
9	0.822	32.88	-0.38	10.82	43.32	56.00	-12.68	QP
10	0.968	16.32	-0.38	10.86	26.80	46.00	-19.20	Average
11	0.994	32.42	-0.38	10.87	42.91	56.00	-13.09	QP
12	1.858	32.84	-0.41	10.95	43.38	56.00	-12.62	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	Wireless Digital Terminal	Product model:	S611G
Test by:	Mike	Test mode:	5G Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

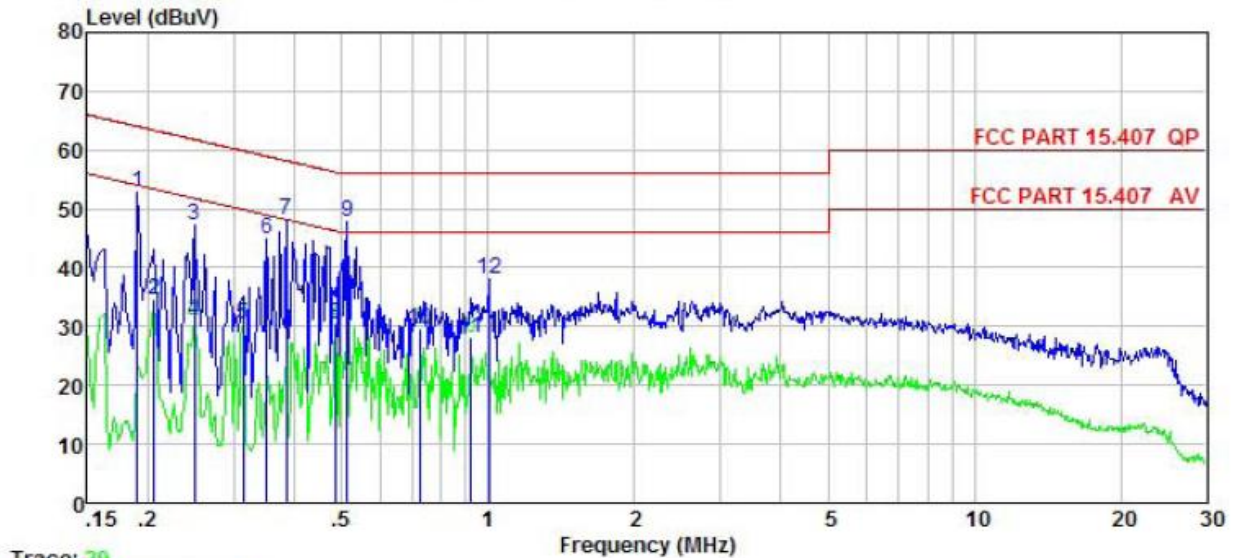


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.190	42.91	-0.69	10.76	52.98	64.02	-11.04	QP
2	0.206	24.52	-0.69	10.76	34.59	53.36	-18.77	Average
3	0.249	37.16	-0.66	10.75	47.25	61.78	-14.53	QP
4	0.249	21.05	-0.66	10.75	31.14	51.78	-20.64	Average
5	0.313	20.36	-0.63	10.74	30.47	49.88	-19.41	Average
6	0.350	34.89	-0.64	10.73	44.98	58.96	-13.98	QP
7	0.385	38.14	-0.64	10.72	48.22	58.17	-9.95	QP
8	0.486	20.32	-0.65	10.76	30.43	46.23	-15.80	Average
9	0.513	37.84	-0.65	10.76	47.95	56.00	-8.05	QP
10	0.727	19.36	-0.64	10.78	29.50	46.00	-16.50	Average
11	0.923	17.92	-0.63	10.85	28.14	46.00	-17.86	Average
12	1.005	27.77	-0.63	10.87	38.01	56.00	-17.99	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.3 Conducted Output Power

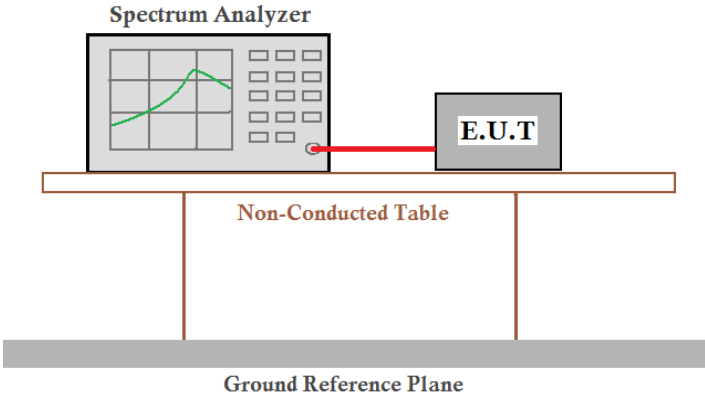Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (iv) & (a)(2) & (a) (3)
Limit:	Band 1: 24dBm Band 2: 24dBm Band 3: 24dBm Band 4: 30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Band 1				
Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	10.39	24.00	Pass
	Middle	10.47		
	Highest	10.80		
802.11n20	Lowest	10.38	24.00	Pass
	Middle	10.85		
	Highest	10.43		
802.11n40	Lowest	10.42	24.00	Pass
	Highest	10.43		
802.11ac20	Lowest	10.19	24.00	Pass
	Middle	10.33		
	Highest	10.34		
802.11ac40	Lowest	10.32	24.00	Pass
	Highest	10.88		
802.11ac80	Middle	10.87	24.00	Pass


Band 2				
Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	10.62	24.00	Pass
	Middle	10.73		
	Highest	10.85		
802.11n20	Lowest	10.32	24.00	Pass
	Middle	10.67		
	Highest	10.78		
802.11n40	Lowest	10.81	24.00	Pass
	Highest	10.59		
802.11ac20	Lowest	10.18	24.00	Pass
	Middle	10.67		
	Highest	10.82		
802.11ac40	Lowest	10.83	24.00	Pass
	Highest	10.86		
802.11ac80	Middle	10.37	24.00	Pass

Band 3				
Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	10.49	24.00	Pass
	Middle	10.35		
	Highest	10.59		
802.11n20	Lowest	10.72	24.00	Pass
	Middle	10.35		
	Highest	10.42		
802.11n40	Lowest	10.39	24.00	Pass
	Middle	10.29		
	Highest	10.59		
802.11ac20	Lowest	10.64	24.00	Pass
	Middle	10.50		
	Highest	10.56		
802.11ac40	Lowest	10.16	24.00	Pass
	Middle	10.29		
	Highest	10.52		
802.11ac80	Lowest	10.88	24.00	Pass
	Highest	10.46		


Band 4				
Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	10.80	30.00	Pass
	Middle	10.51		
	Highest	10.99		
802.11n20	Lowest	10.71	30.00	Pass
	Middle	10.66		
	Highest	10.47		
802.11n40	Lowest	10.58	30.00	Pass
	Highest	10.21		
802.11ac20	Lowest	10.64	30.00	Pass
	Middle	10.57		
	Highest	10.39		
802.11ac40	Lowest	10.59	30.00	Pass
	Highest	10.09		
802.11ac80	Middle	10.65	30.00	Pass

Test plot as follows:

Band 1:

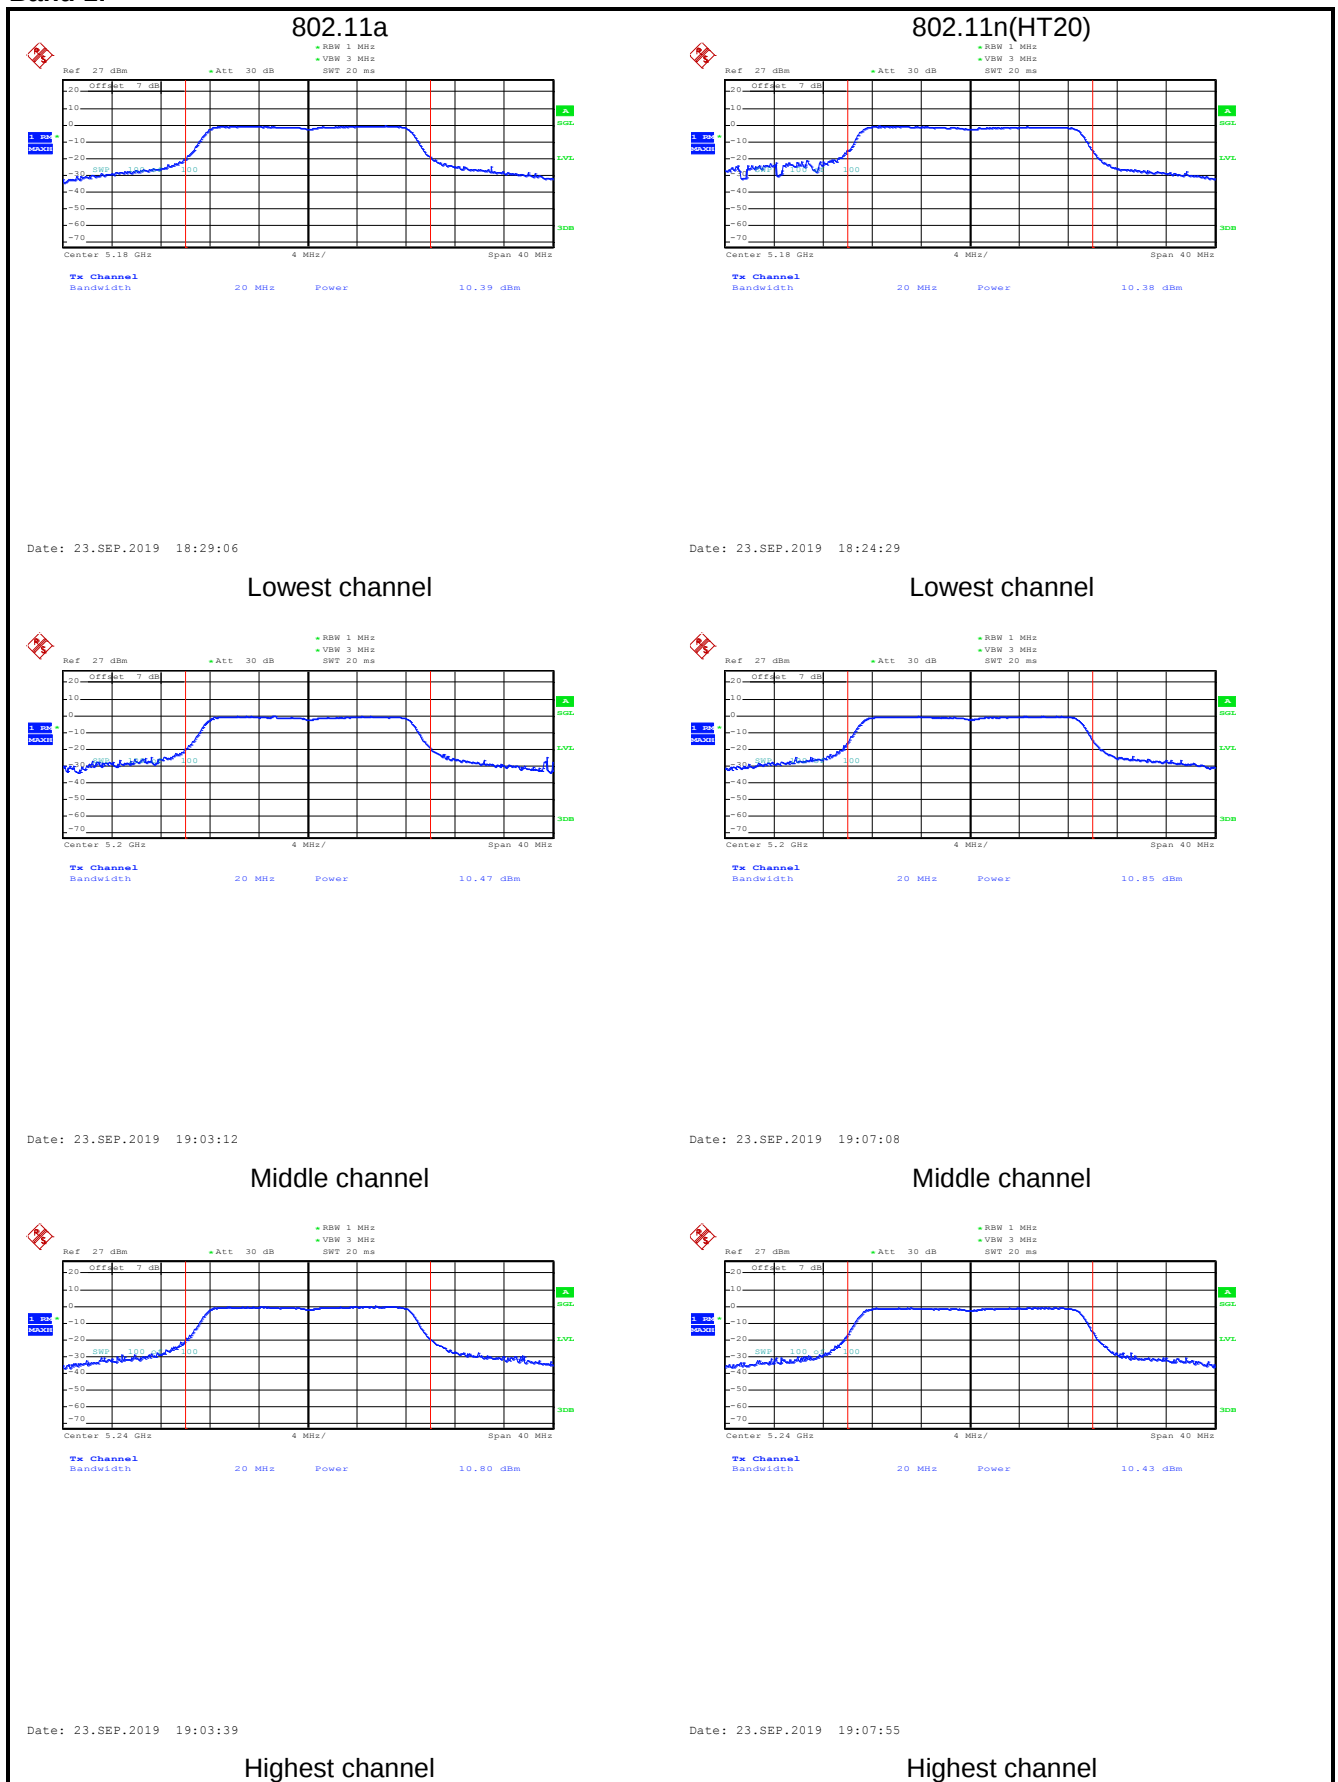


802.11n(HT40)

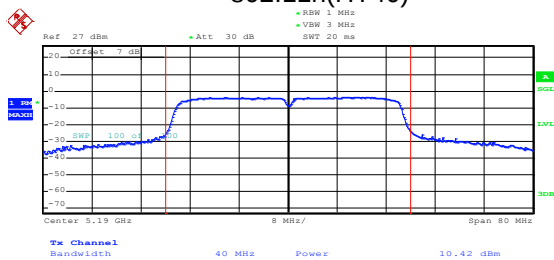


Date: 23.SEP.2019 19:44:04

802.11ac(HT20)

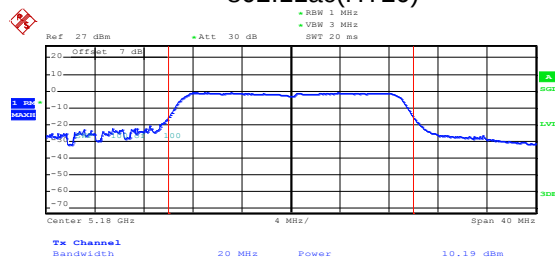


Date: 23.SEP.2019 18:22:41

Lowest channel

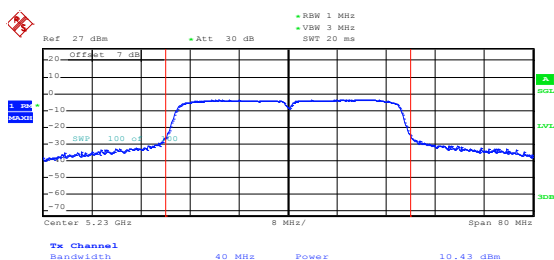


Date: 23.SEP.2019 19:43:29

Lowest channel

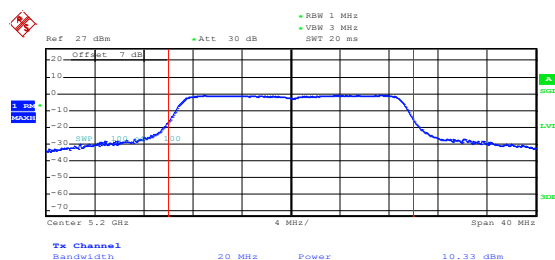

Date: 23.SEP.2019 19:05:10


Highest channel

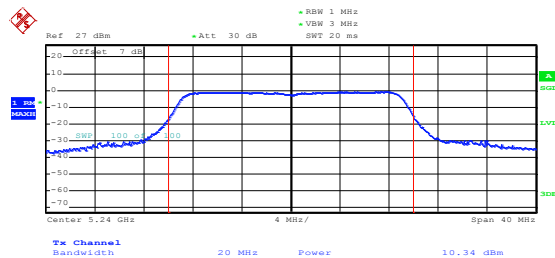

Date: 23.SEP.2019 19:04:23

Highest channel


802.11ac(HT40)

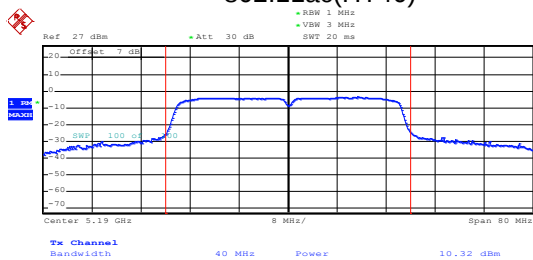

Date: 23.SEP.2019 19:45:38


Lowest channel

802.11ac(HT80)

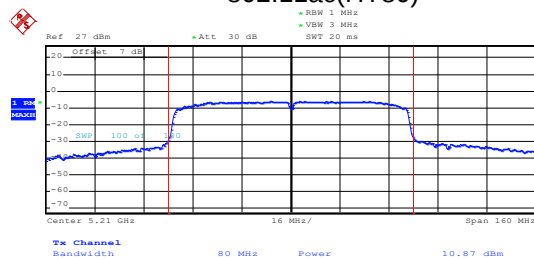

Date: 23.SEP.2019 19:47:36

Middle channel

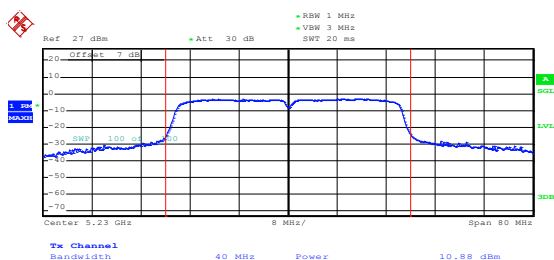


Date: 23.SEP.2019 19:46:05

Highest channel


Band 2:

802.11a

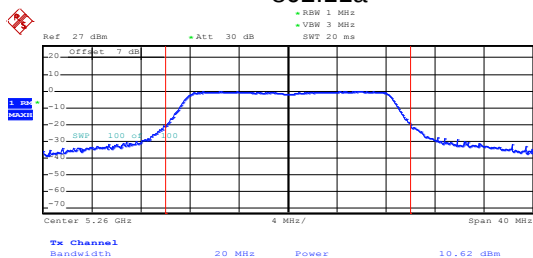


Date: 23.SEP.2019 18:30:04

802.11n(HT20)

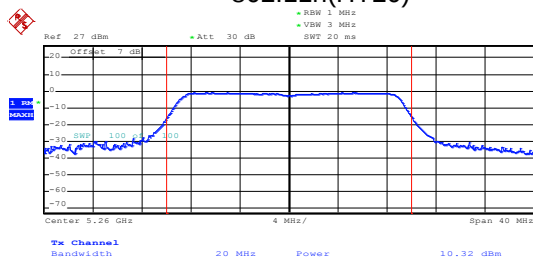


Date: 23.SEP.2019 18:25:57

Lowest channel

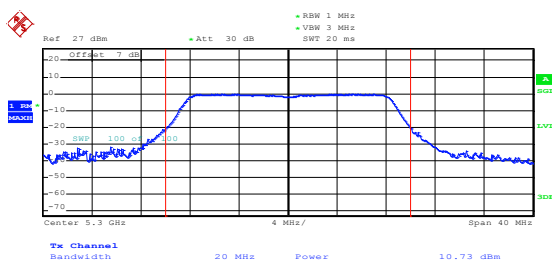


Date: 23.SEP.2019 19:11:38

Lowest channel

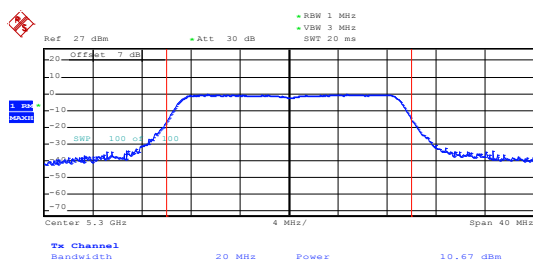


Date: 23.SEP.2019 19:09:09

Middle channel

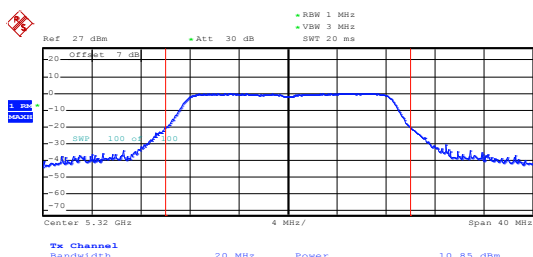

Date: 23.SEP.2019 19:12:27

Middle channel

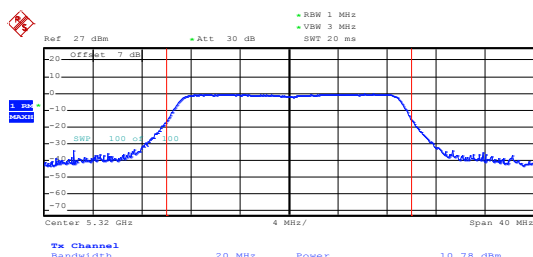


Date: 23.SEP.2019 19:09:37

Highest channel


Highest channel

802.11n(HT40)

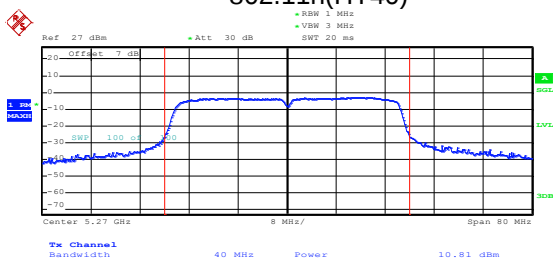


Date: 23.SEP.2019 19:42:23

802.11ac(HT20)

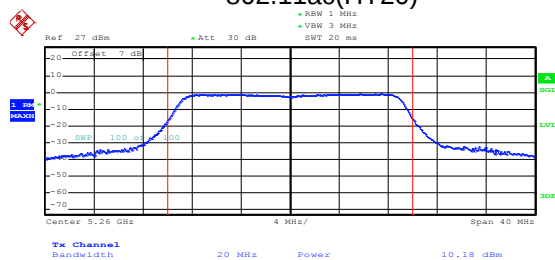


Date: 23.SEP.2019 18:20:59

Lowest channel

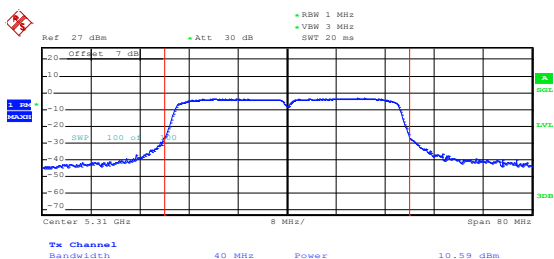

Date: 23.SEP.2019 19:41:27


Lowest channel

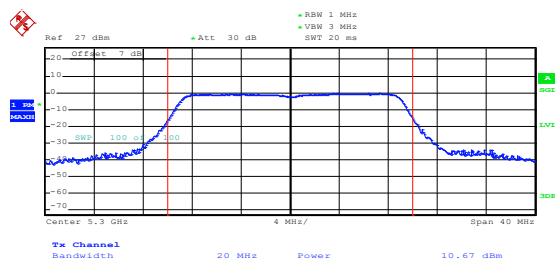

Date: 23.SEP.2019 19:10:53

Highest channel


Middle channel

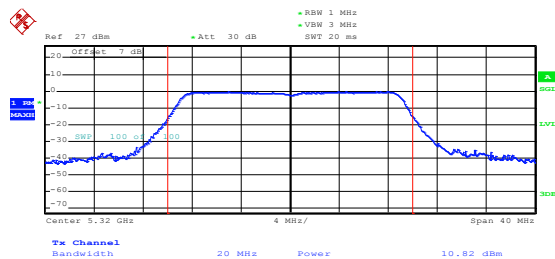

Date: 23.SEP.2019 19:10:19

Highest channel


802.11ac(HT40)

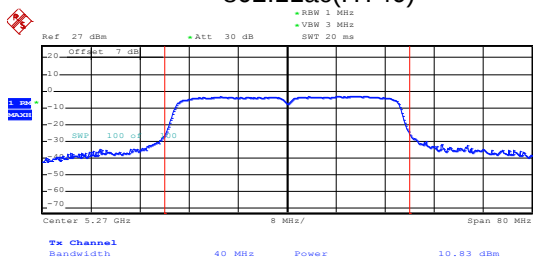

Date: 23.SEP.2019 19:39:29


Lowest channel

802.11ac(HT80)

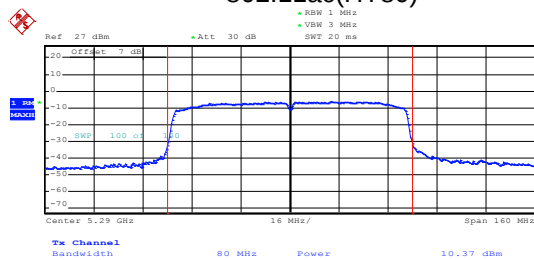

Date: 23.SEP.2019 19:48:17

Middle channel

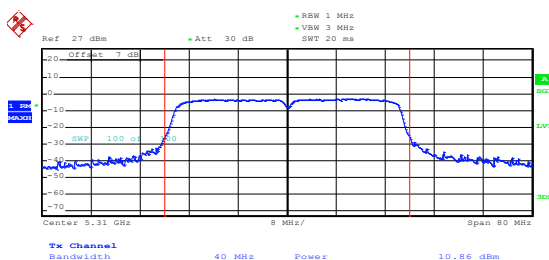


Date: 23.SEP.2019 19:40:42


Highest channel

Band 3:

802.11a

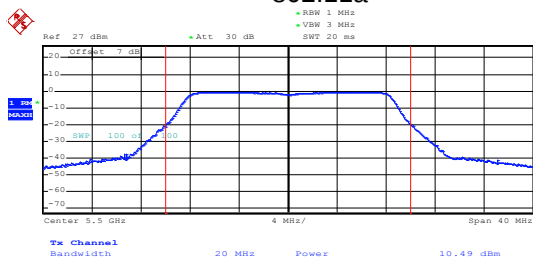


802.11n(HT20)

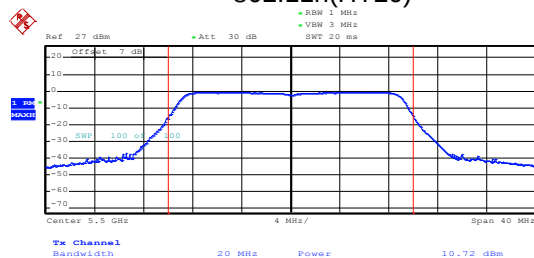


Date: 9.OCT.2019 18:01:43

Date: 9.OCT.2019 18:03:02

Lowest channel

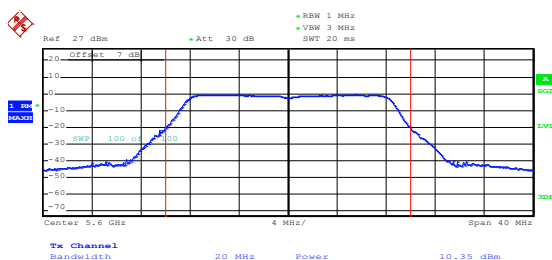


Lowest channel

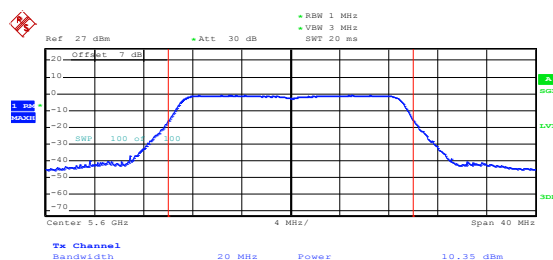


Date: 9.OCT.2019 18:02:04

Date: 9.OCT.2019 18:03:21

Middle channel

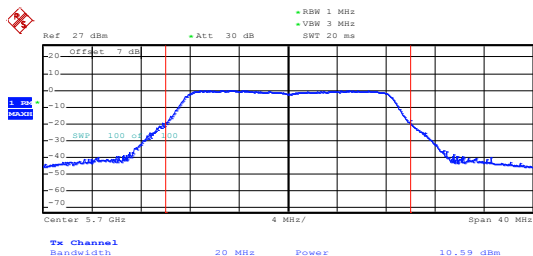

Middle channel

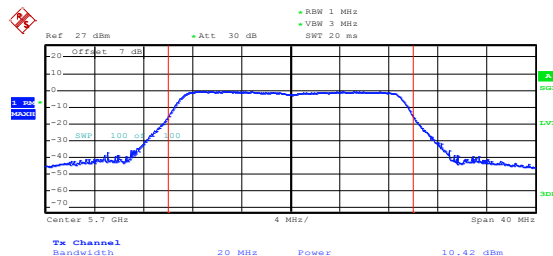


Date: 9.OCT.2019 16:43:33

Date: 9.OCT.2019 16:53:01


Highest channel

Highest channel

802.11n(HT40)

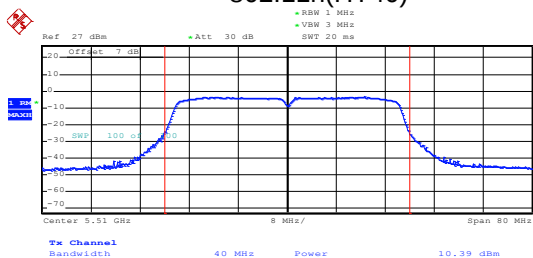


802.11ac(HT20)

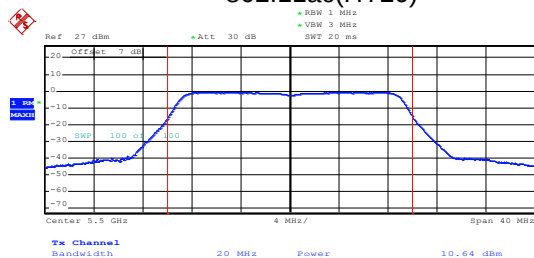


Date: 9.OCT.2019 16:54:57

Date: 9.OCT.2019 18:02:44

Lowest channel

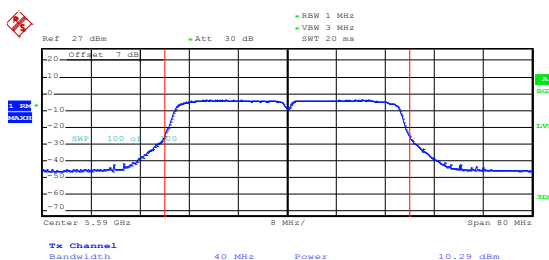


Lowest channel

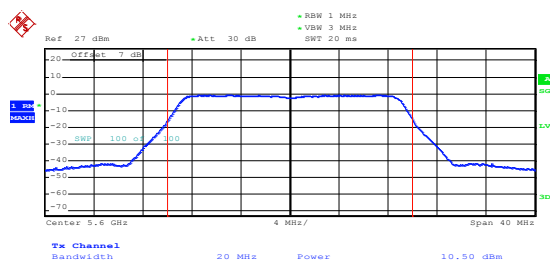


Date: 9.OCT.2019 16:55:47

Date: 9.OCT.2019 18:02:19

Middle channel

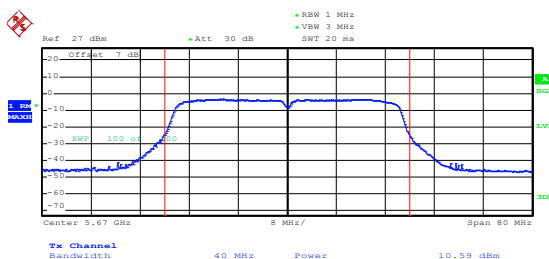

Middle channel

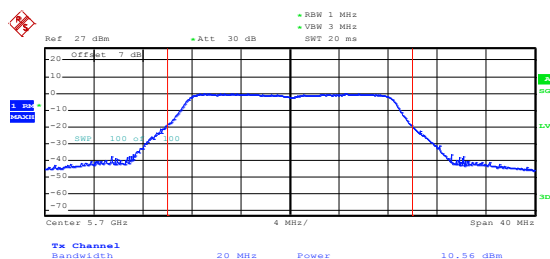


Date: 9.OCT.2019 16:57:23

Date: 9.OCT.2019 16:46:21

Highest channel


Highest channel

802.11ac(HT40)

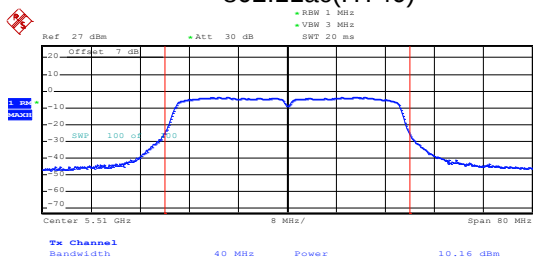


Date: 9.OCT.2019 17:02:19

802.11ac(HT80)

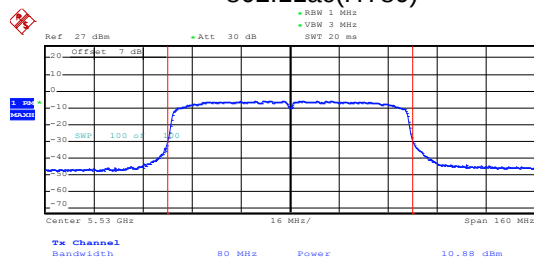


Date: 9.OCT.2019 17:03:36

Lowest channel

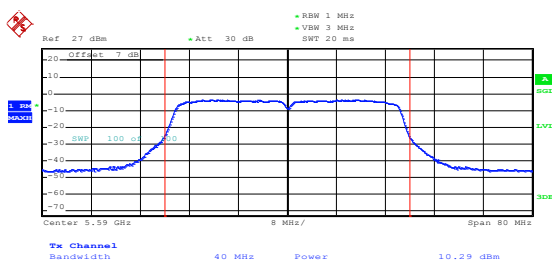


Date: 9.OCT.2019 17:01:52

Lowest channel

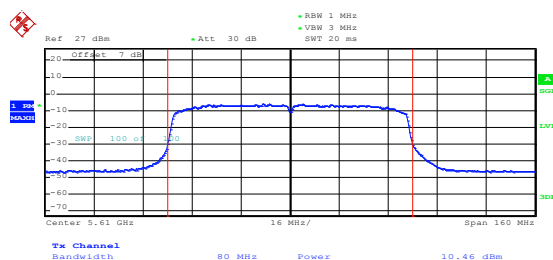

Date: 9.OCT.2019 17:04:23

Middle channel

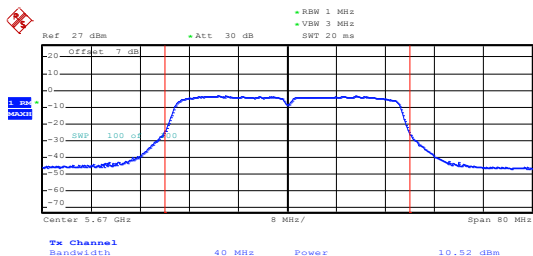


Date: 9.OCT.2019 17:01:01

Highest channel

Highest channel


Band 4:

802.11a

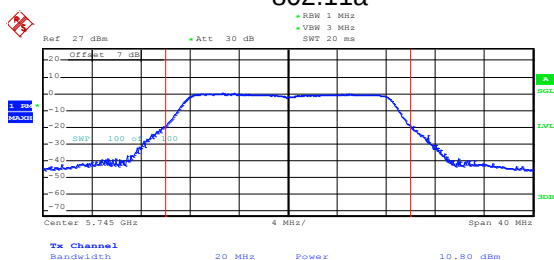


Date: 9.OCT.2019 16:42:45

802.11n(HT20)

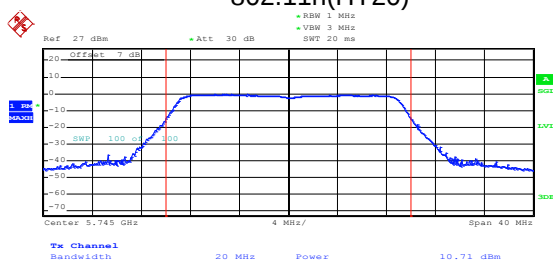


Date: 9.OCT.2019 16:49:20

Lowest channel

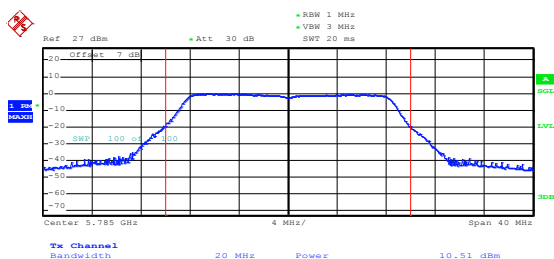


Date: 9.OCT.2019 16:42:05

Lowest channel

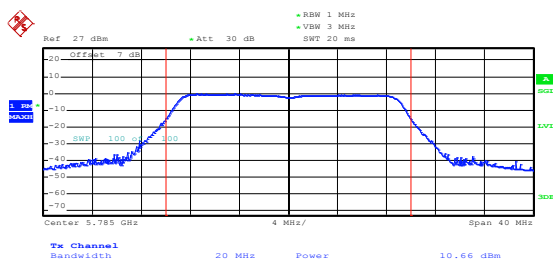


Date: 9.OCT.2019 16:48:54

Middle channel

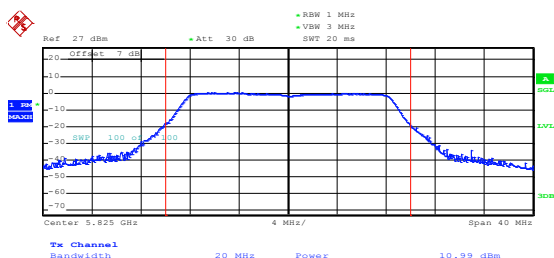

Date: 9.OCT.2019 16:41:05

Middle channel

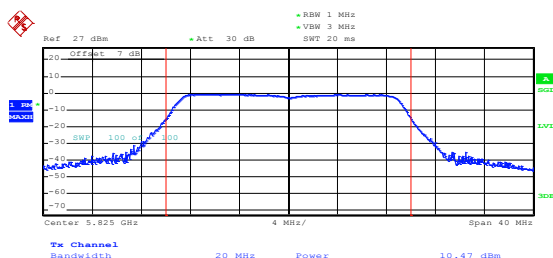


Date: 9.OCT.2019 16:48:17


Highest channel

Highest channel

802.11n(HT40)

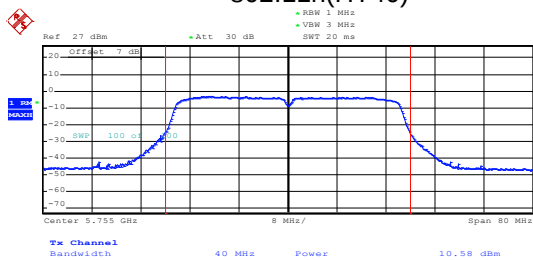


802.11ac(HT20)

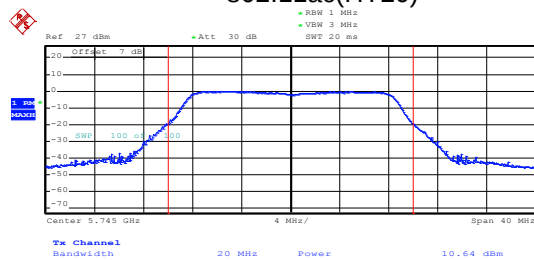


Date: 9.OCT.2019 16:58:10

Date: 9.OCT.2019 16:46:49

Lowest channel

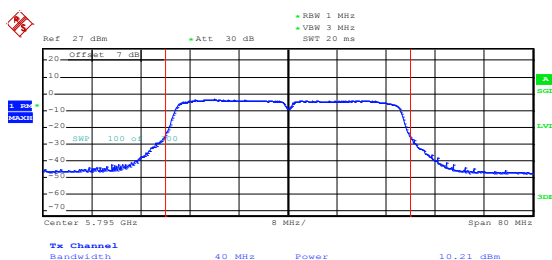

Lowest channel

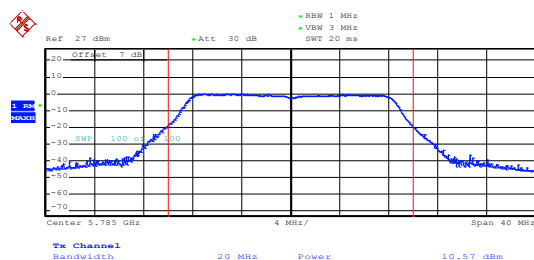


Date: 9.OCT.2019 16:59:03

Date: 9.OCT.2019 16:47:09

Highest channel


Middle channel

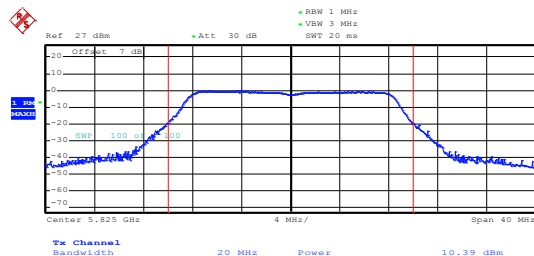

Date: 9.OCT.2019 16:47:54


Highest channel

802.11ac(HT40)

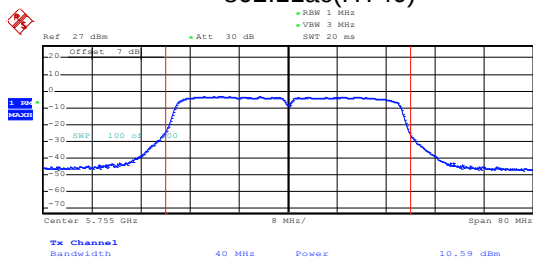


Date: 9.OCT.2019 17:00:29

802.11ac(HT80)

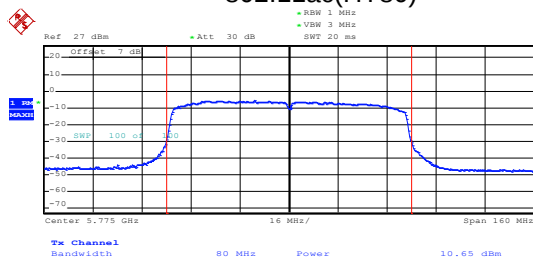

Date: 9.OCT.2019 17:05:27

Lowest channel

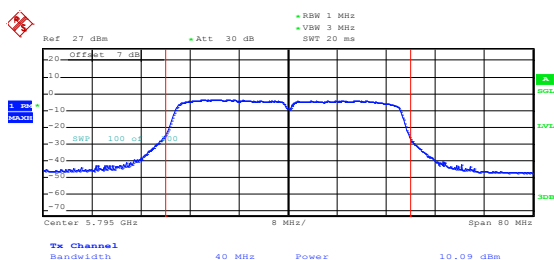


Date: 9.OCT.2019 16:59:54

Middle channel

Highest channel

6.4 Occupancy Bandwidth

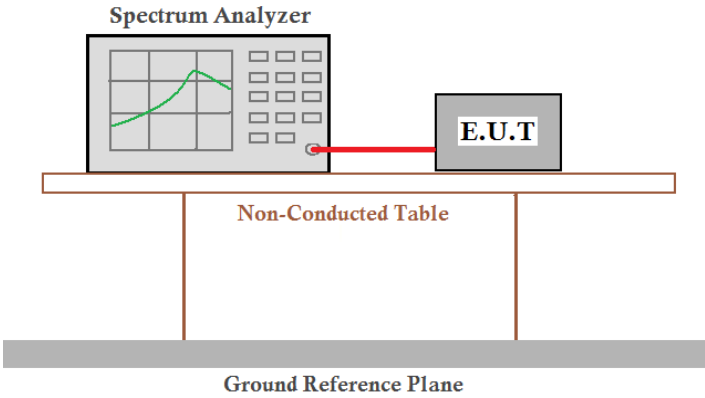Test Requirement:	FCC Part15 E Section 15.407 (a) (5) and Section 15.407 (e)
Limit:	Band 1/2/3/4: N/A (26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz (6dB Bandwidth)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Band 1:

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.21	21.43	42.56	21.73	43.74	---	N/A	PASS
Middle	21.36	21.72	---	21.69	---	81.20		
Highest	21.35	21.07	42.90	21.65	41.66	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.53	18.40	37.84	18.36	37.62	---	N/A	PASS
Middle	17.51	18.34	---	18.36	---	75.44		
Highest	17.37	18.23	37.28	18.30	37.58	---		

Band 2:

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	20.44	21.94	41.26	20.79	40.86	---	N/A	PASS
Middle	21.13	21.63	---	21.79	---	81.16		
Highest	20.42	21.01	40.18	21.06	40.64	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.30	18.29	37.46	18.31	37.18	---	N/A	PASS
Middle	17.25	18.21	---	18.23	---	75.08		
Highest	17.24	18.22	37.02	18.20	37.14	---		

Band 3:


Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.32	21.94	43.22	21.95	43.42	82.68	N/A	PASS
Middle	21.23	21.76	43.58	21.86	42.94	---		
Highest	21.24	21.62	43.28	21.74	43.08	81.96		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.18	18.13	36.70	18.17	36.80	74.80	N/A	PASS
Middle	17.16	18.11	36.70	18.15	36.74	---		
Highest	17.17	18.12	36.60	18.26	36.78	74.76		

Band 4:

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.32	21.69	43.32	21.86	43.24	---	N/A	PASS
Middle	21.10	21.63	---	21.80	---	82.52		
Highest	21.37	21.58	43.28	21.75	43.32	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.12	18.10	36.66	18.14	36.76	---	N/A	PASS
Middle	17.12	18.14	---	18.17	---	74.68		
Highest	17.17	18.13	36.72	18.17	36.80	---		
Test Channel	6dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.56	17.76	36.00	17.76	35.52	---	>500kHz	PASS
Middle	16.56	17.76	---	17.76	---	75.84		
Highest	16.56	17.60	35.84	17.76	35.68	---		


Test plot as follows:

Band 1:

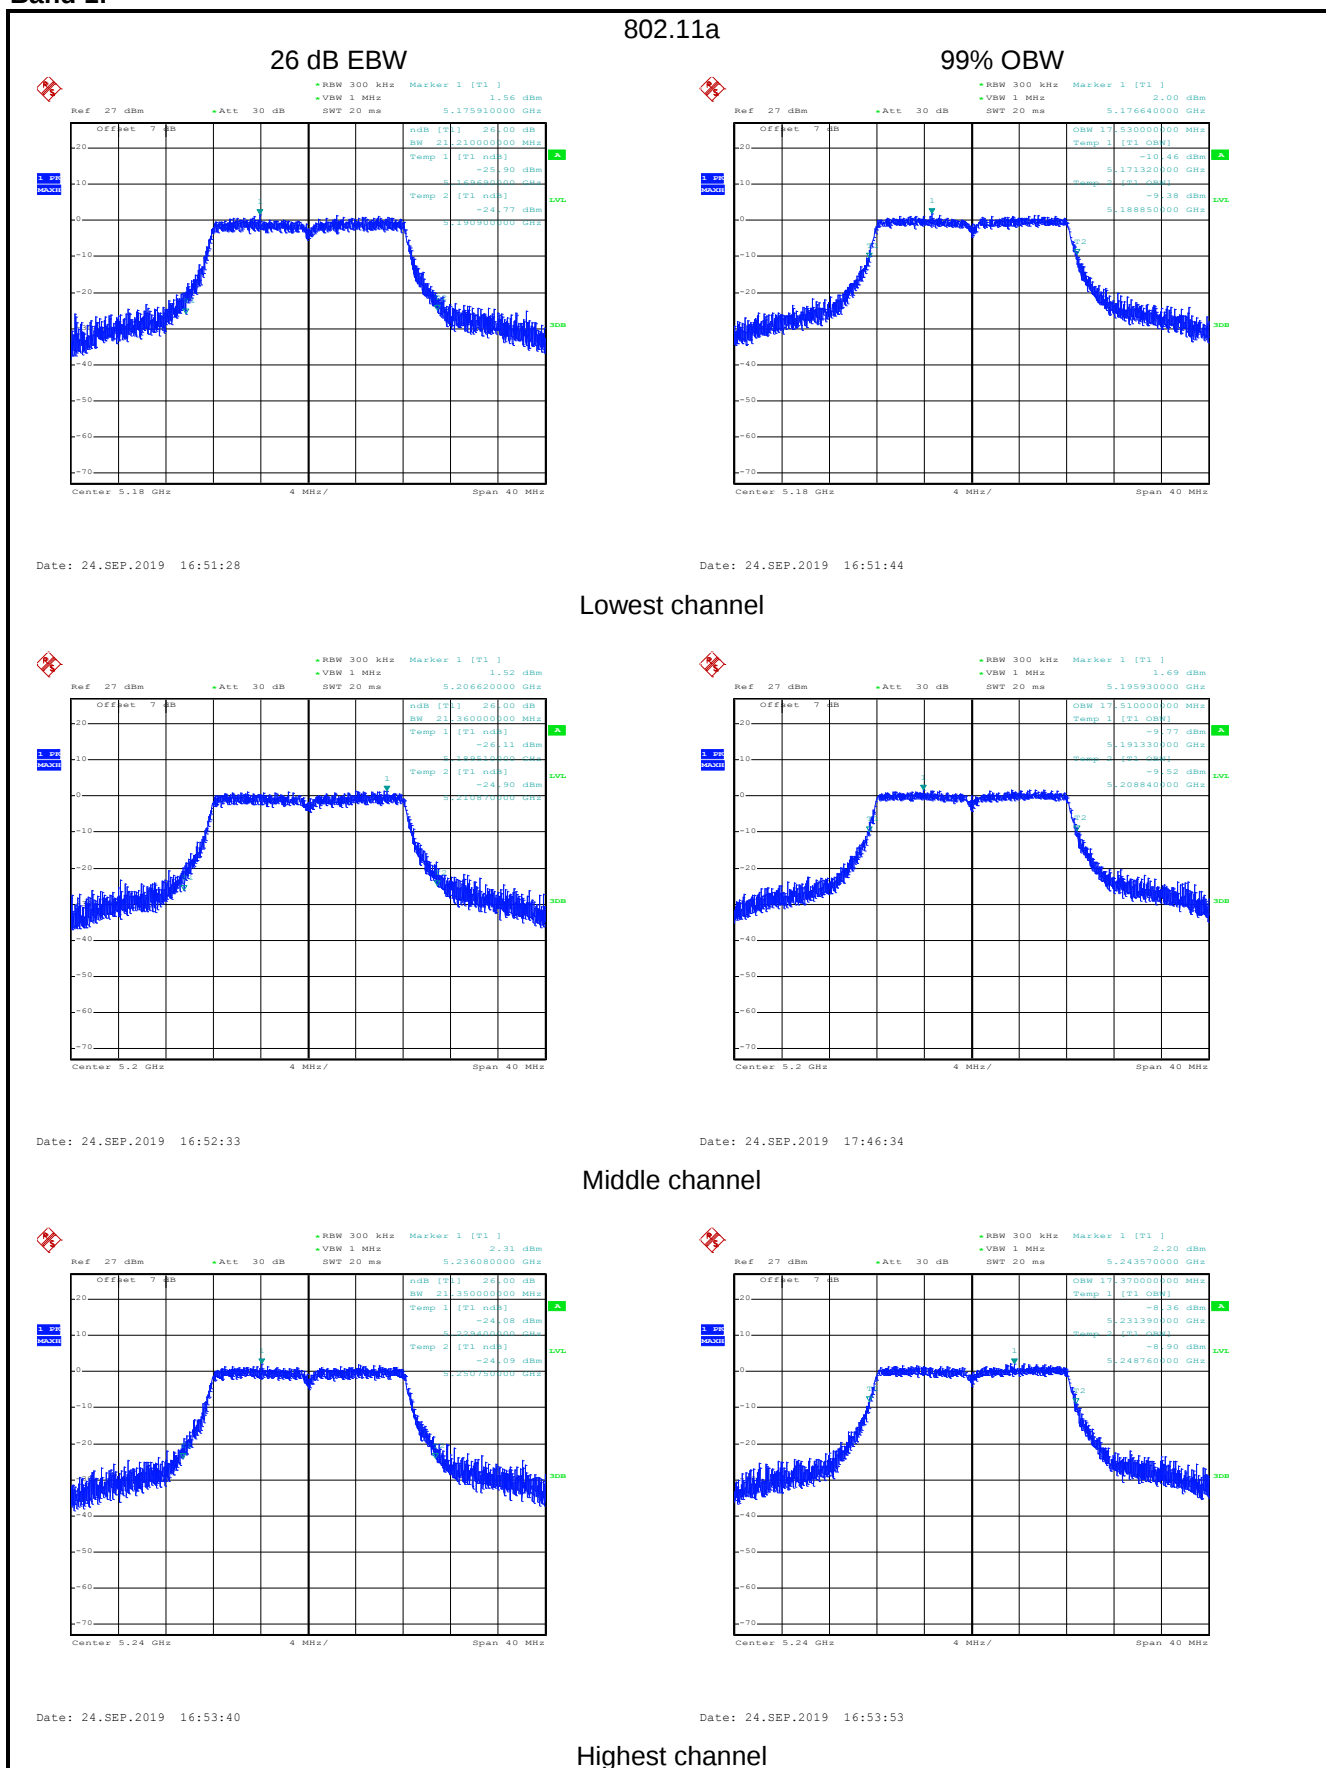


802.11n(HT20)

26 dB EBW

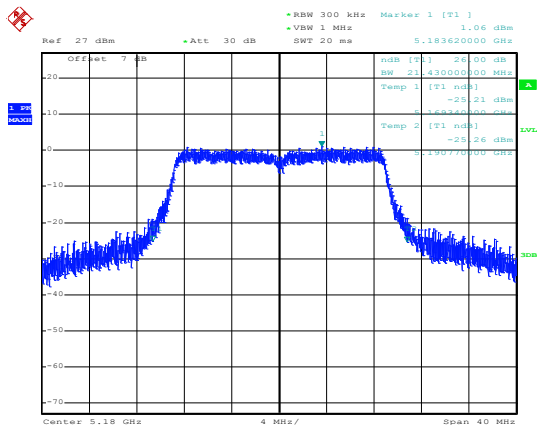


Date: 24.SEP.2019 16:58:10

99% OBW

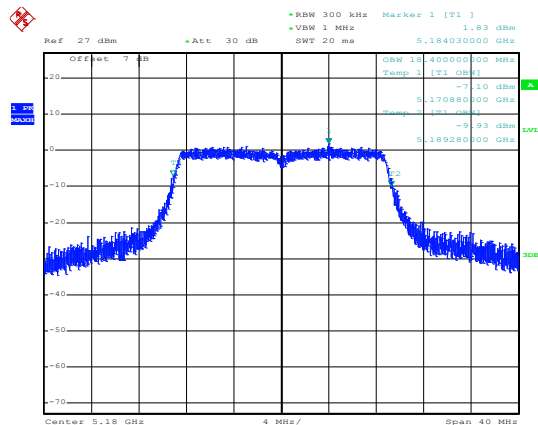


Date: 24.SEP.2019 16:58:20

Lowest channel

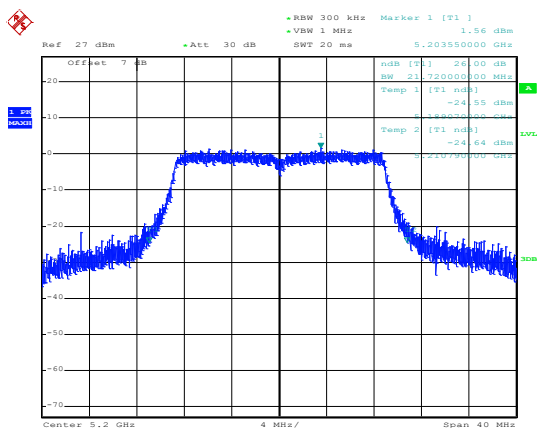


Date: 24.SEP.2019 16:58:53

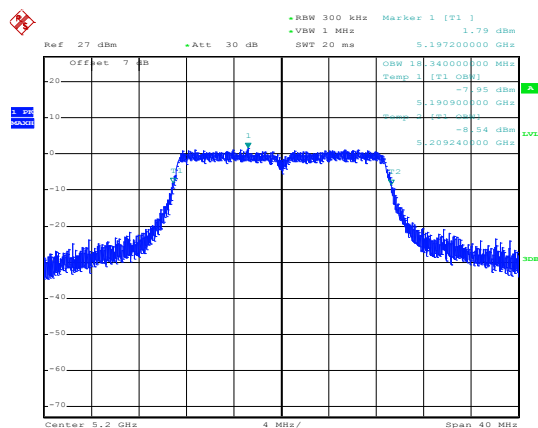


Date: 24.SEP.2019 16:58:42

Middle channel

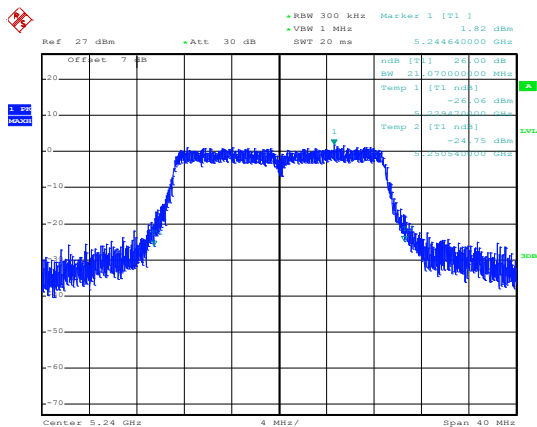

Date: 24.SEP.2019 16:59:17

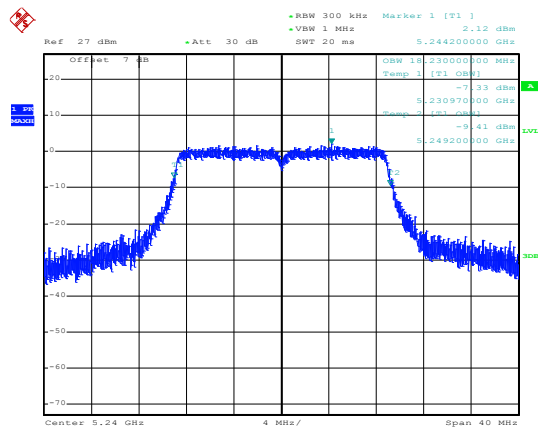


Date: 24.SEP.2019 16:59:26

Highest channel


802.11n(HT40)

26 dB EBW

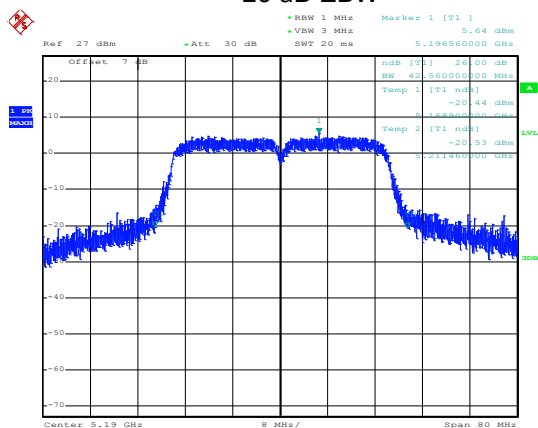


Date: 24.SEP.2019 17:00:57

99% OBW

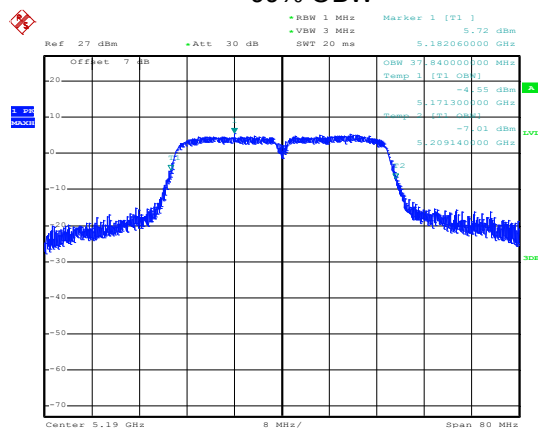


Date: 24.SEP.2019 17:00:28

Lowest channel

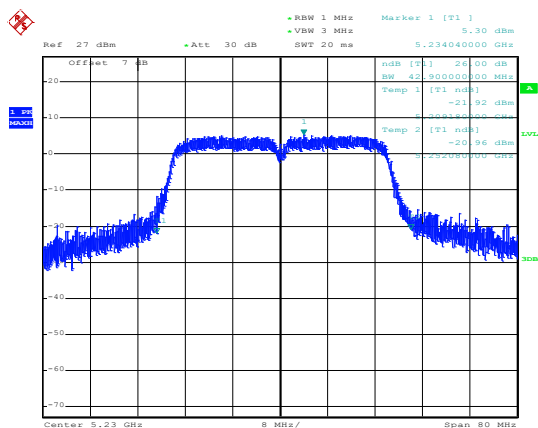

Date: 24.SEP.2019 17:01:27

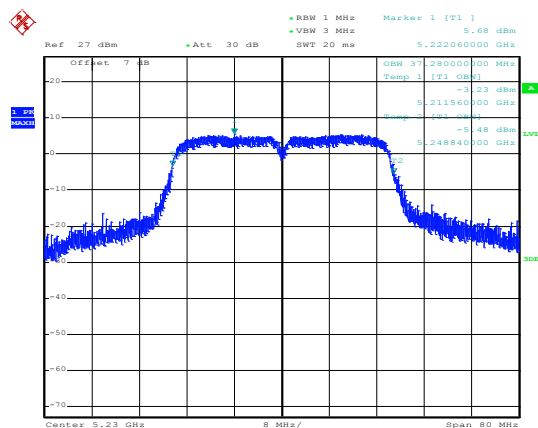


Date: 24.SEP.2019 17:01:36

Highest channel


802.11ac(HT20)

26 dB EBW

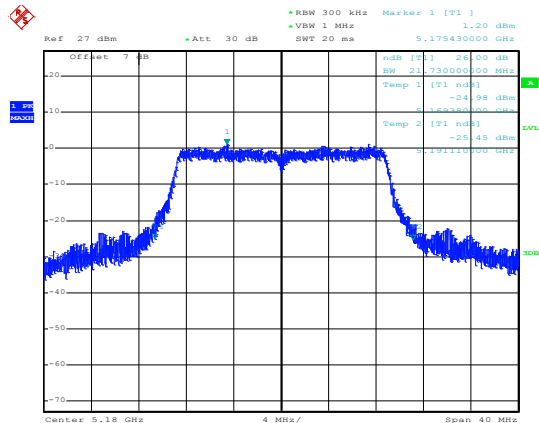


Date: 24.SEP.2019 16:57:46

99% OBW

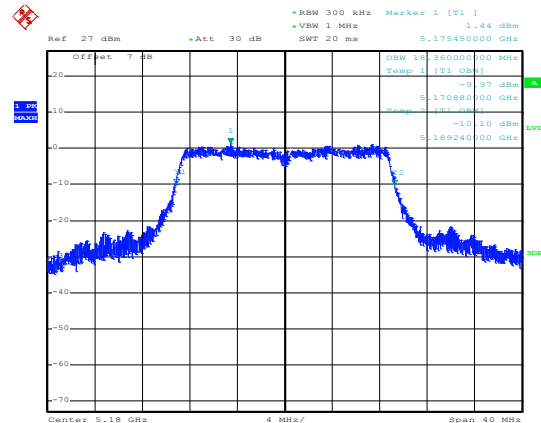


Date: 24.SEP.2019 16:57:19

Lowest channel

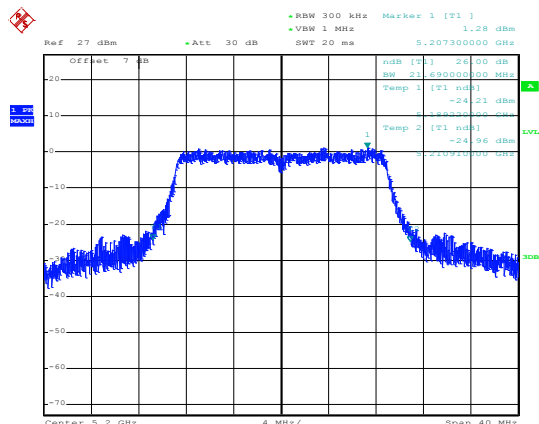


Date: 24.SEP.2019 16:56:46

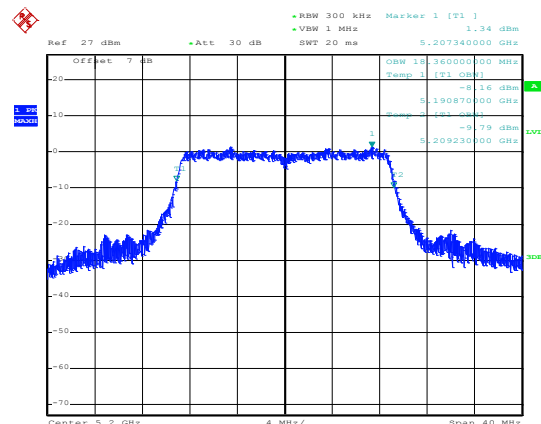


Date: 24.SEP.2019 16:56:58

Middle channel

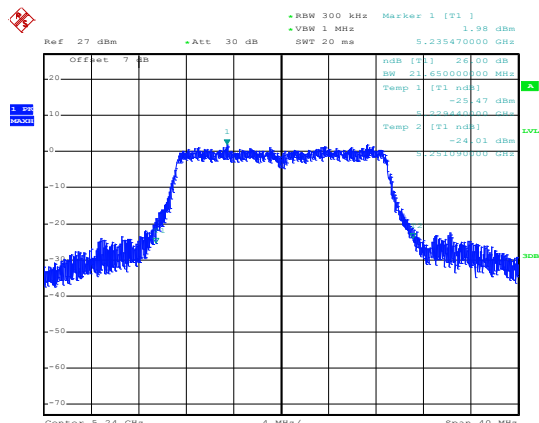

Date: 24.SEP.2019 16:56:23

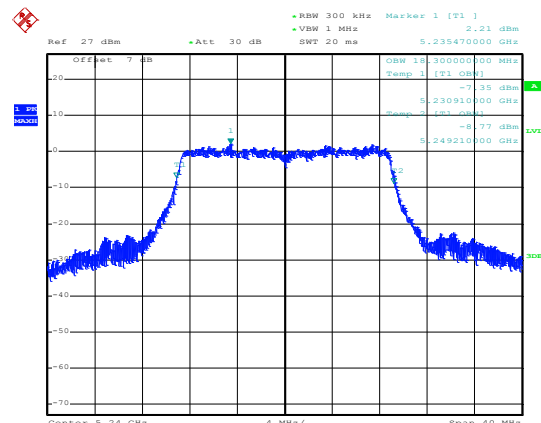


Date: 24.SEP.2019 16:56:06

Highest channel


802.11ac(HT40)

26 dB EBW

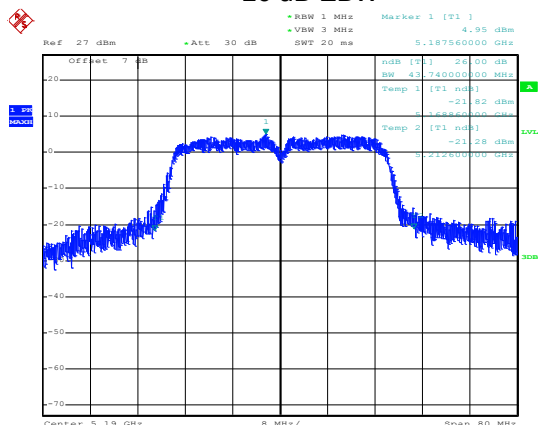


Date: 24.SEP.2019 17:02:59

99% OBW

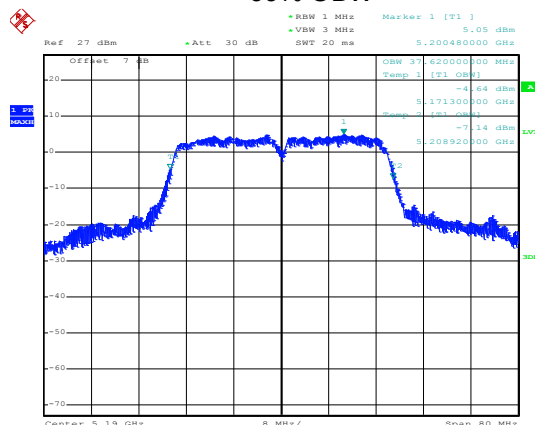


Date: 24.SEP.2019 17:03:07

Lowest channel

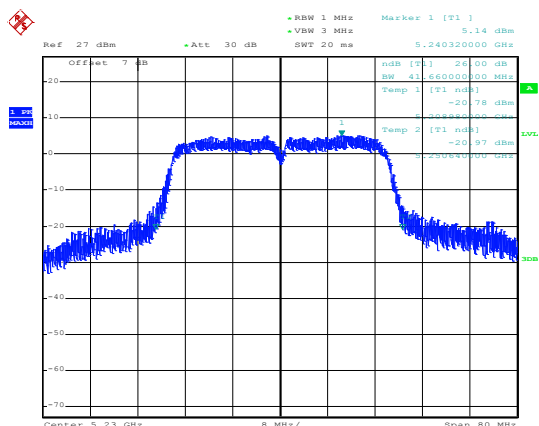


Date: 24.SEP.2019 17:02:23

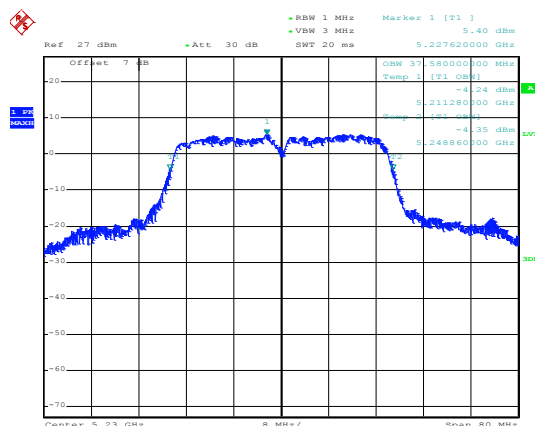


Date: 24.SEP.2019 17:02:05

Highest channel

802.11ac(HT80)

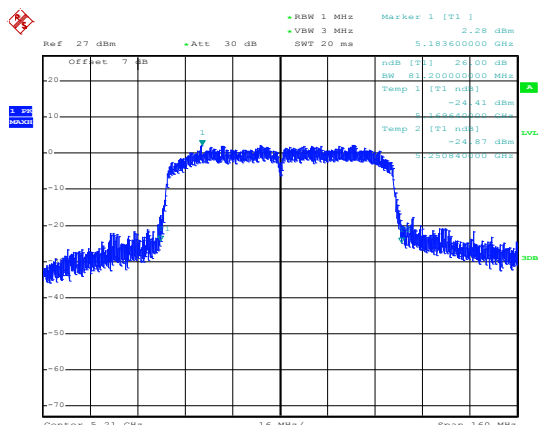

Date: 24.SEP.2019 17:04:09

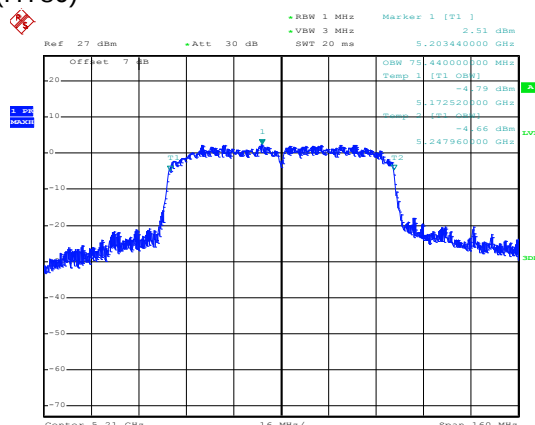


Date: 24.SEP.2019 17:03:53

Middle channel

Band 2:


802.11a

26 dB EBW

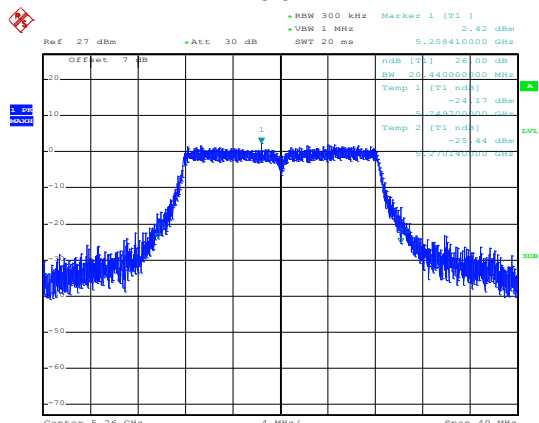


Date: 24.SEP.2019 17:32:59

99% OBW

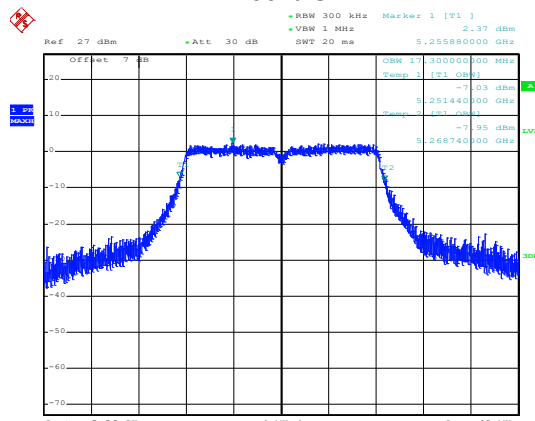


Date: 24.SEP.2019 17:32:44

Lowest channel

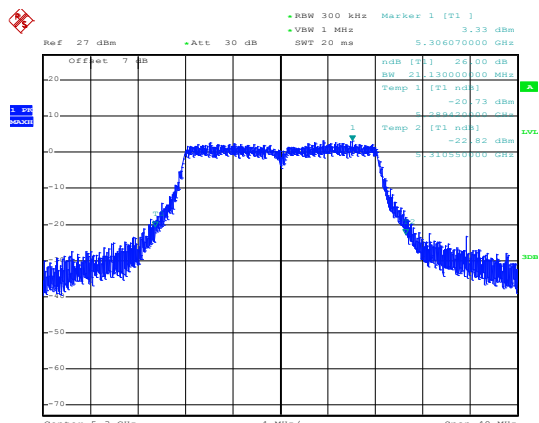


Date: 24.SEP.2019 17:33:19

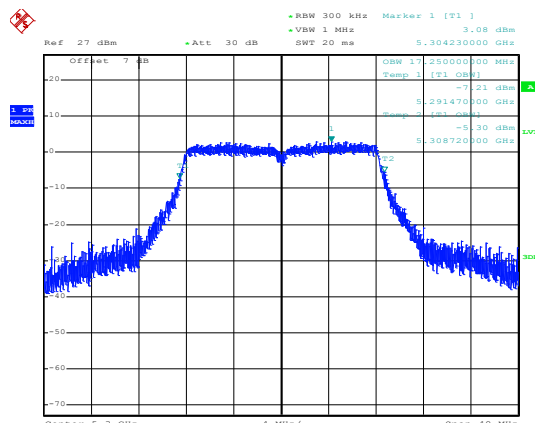


Date: 24.SEP.2019 17:33:29

Middle channel

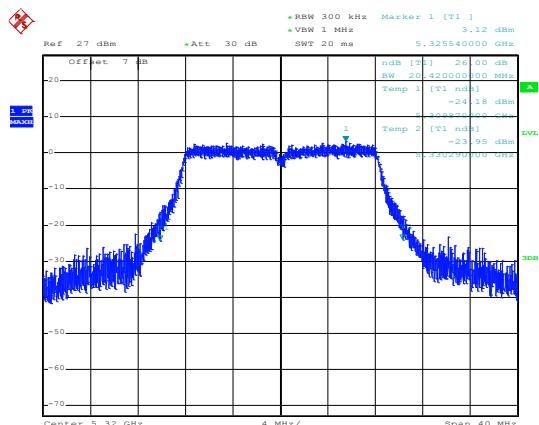

Date: 24.SEP.2019 17:34:01

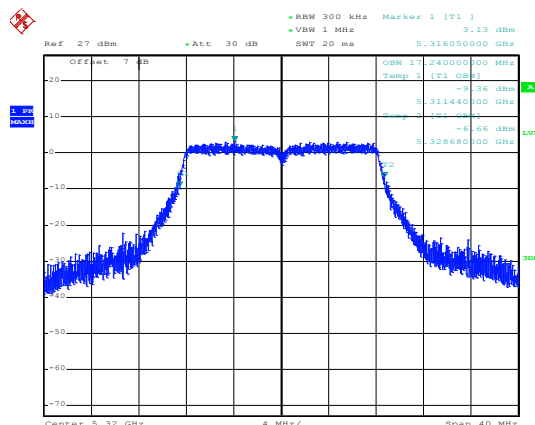


Date: 24.SEP.2019 17:33:47

Highest channel


802.11n(HT20)

26 dB EBW

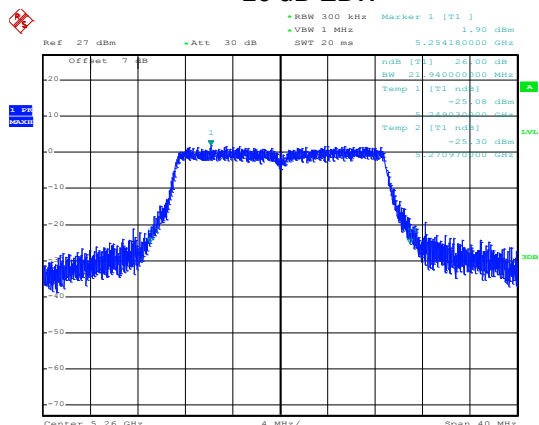


Date: 24.SEP.2019 17:32:15

99% OBW

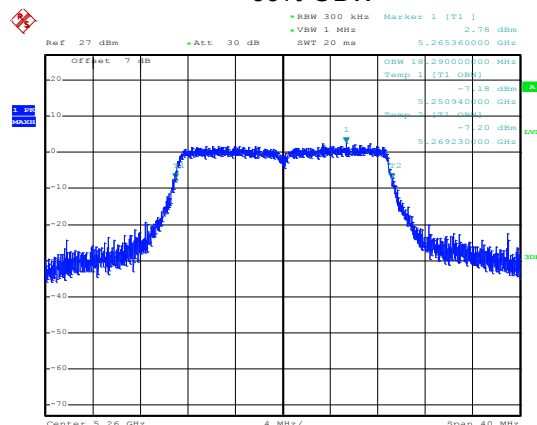


Date: 24.SEP.2019 17:32:26

Lowest channel

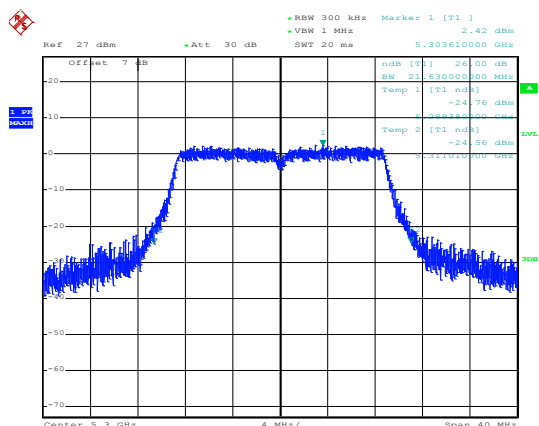


Date: 24.SEP.2019 17:31:42

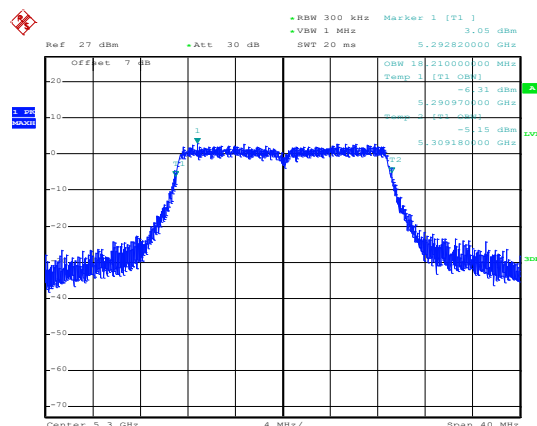


Date: 24.SEP.2019 17:31:28

Middle channel

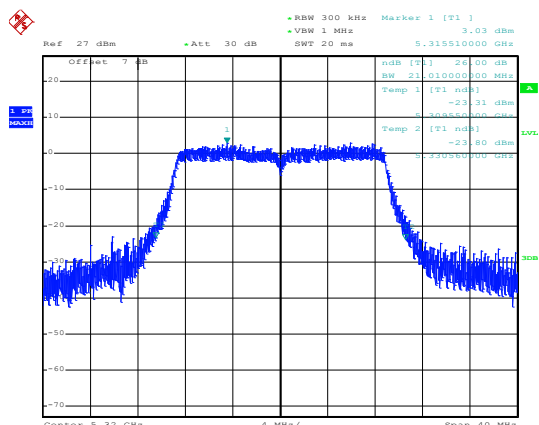

Date: 24.SEP.2019 17:30:53

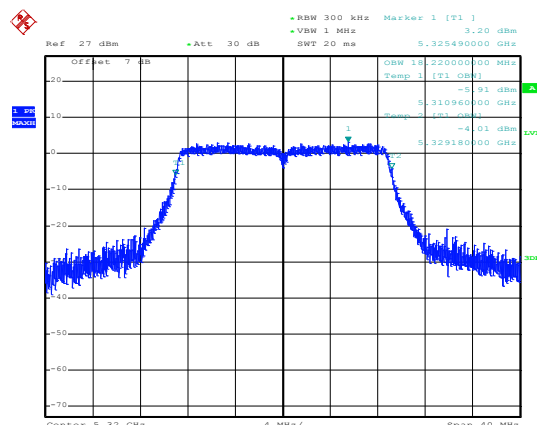


Date: 24.SEP.2019 17:31:05

Highest channel


802.11n(HT40)

26 dB EBW

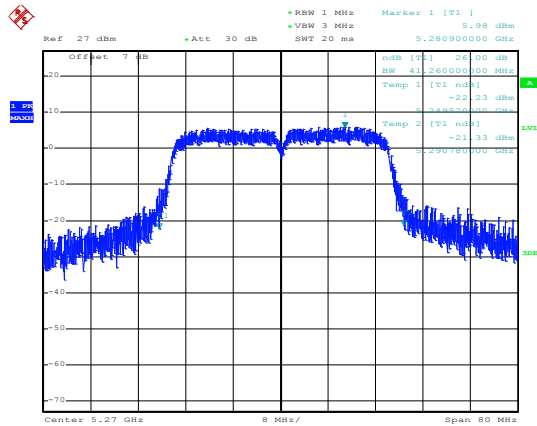


Date: 24.SEP.2019 17:26:17

99% OBW

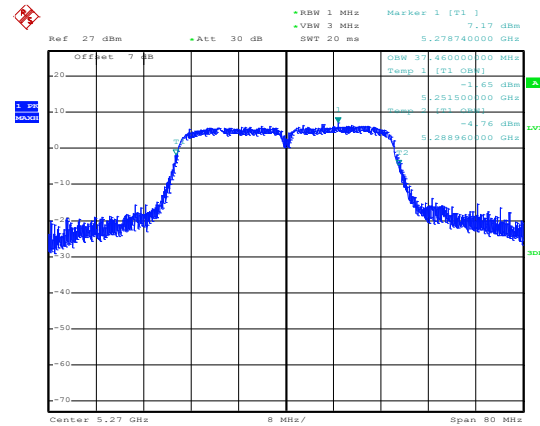


Date: 24.SEP.2019 17:26:03

Lowest channel

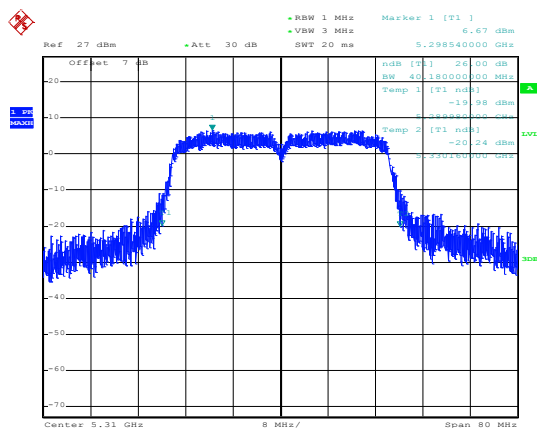

Date: 24.SEP.2019 17:26:46

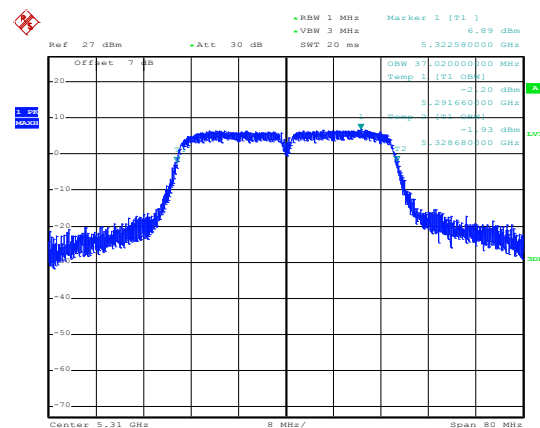


Date: 24.SEP.2019 17:26:54

Highest channel


802.11ac(HT20)

26 dB EBW

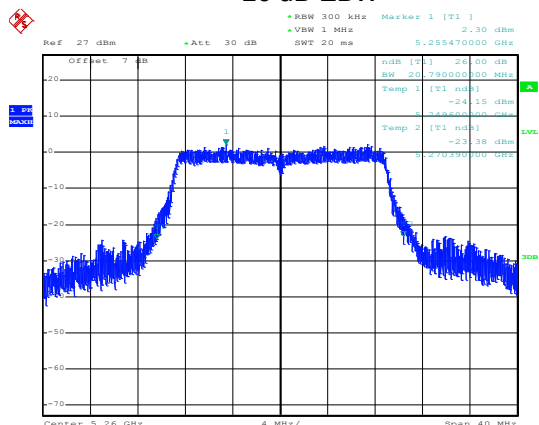


Date: 24.SEP.2019 17:29:10

99% OBW

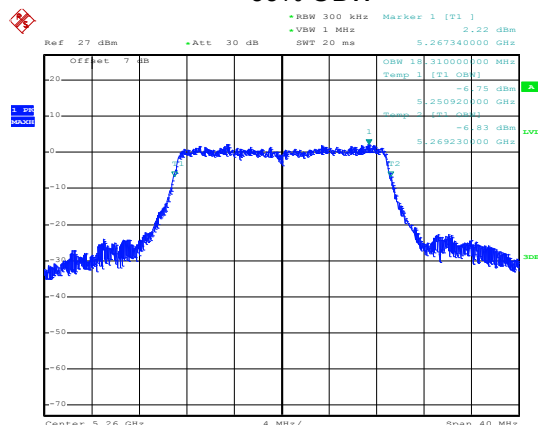


Date: 24.SEP.2019 17:28:55

Lowest channel

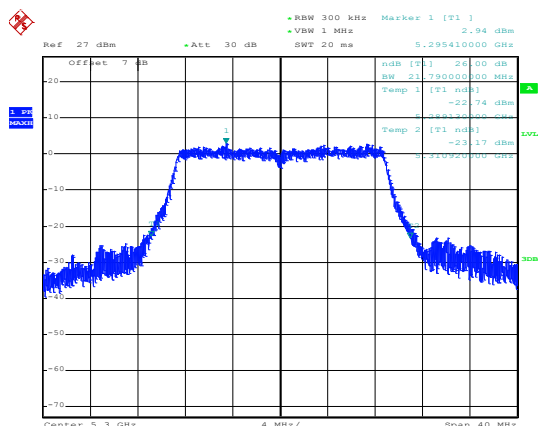


Date: 24.SEP.2019 17:29:37

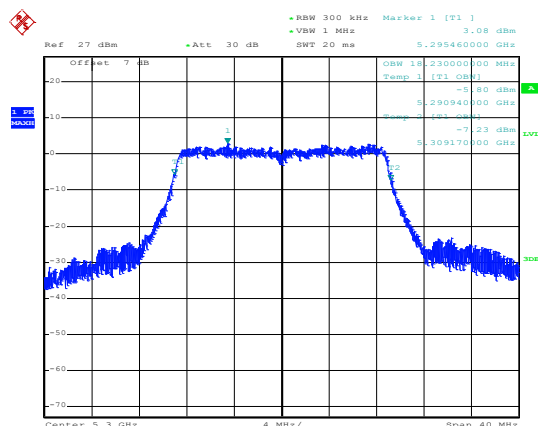


Date: 24.SEP.2019 17:29:48

Middle channel

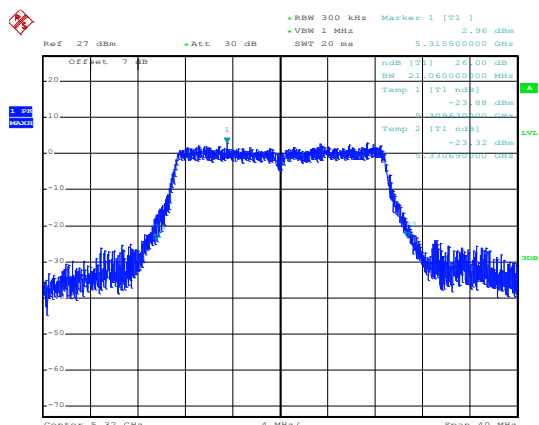

Date: 24.SEP.2019 17:30:31

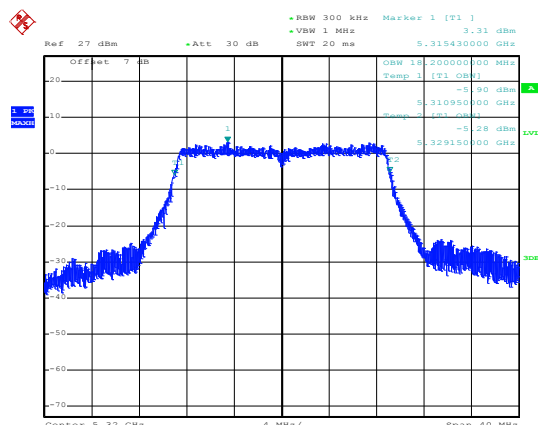


Date: 24.SEP.2019 17:30:07

Highest channel


802.11ac(HT40)

26 dB EBW

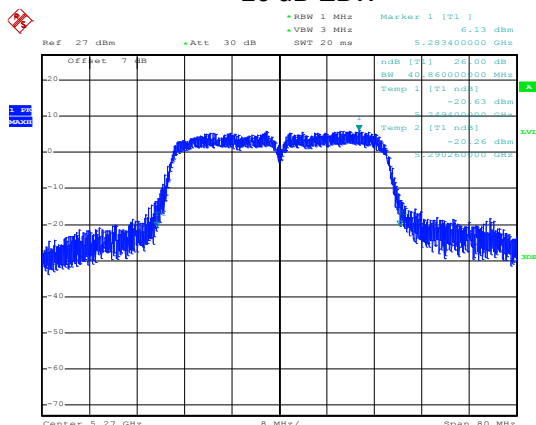


Date: 24.SEP.2019 17:27:56

99% OBW

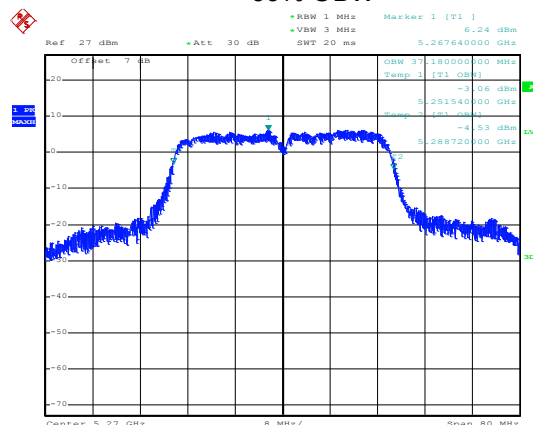


Date: 24.SEP.2019 17:28:04

Lowest channel

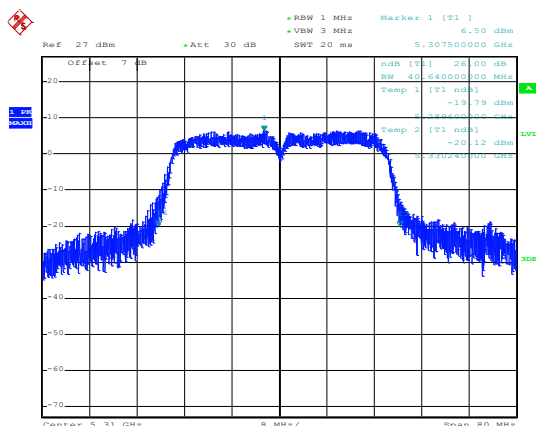


Date: 24.SEP.2019 17:27:30

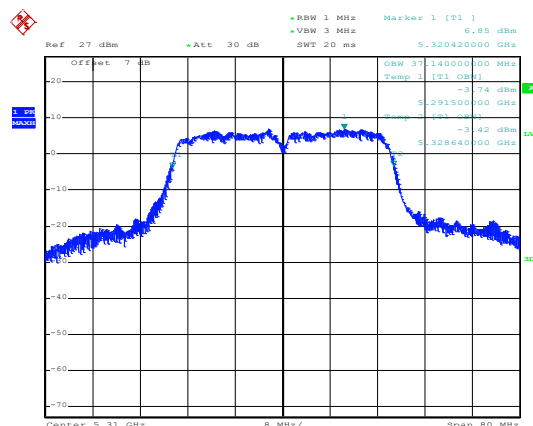


Date: 24.SEP.2019 17:27:14

Highest channel

802.11ac(HT80)

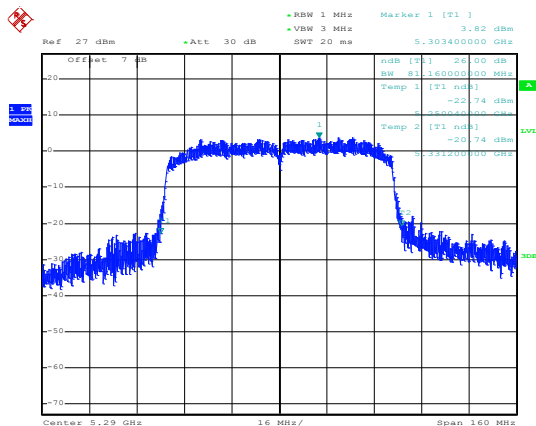

Date: 24.SEP.2019 17:39:23

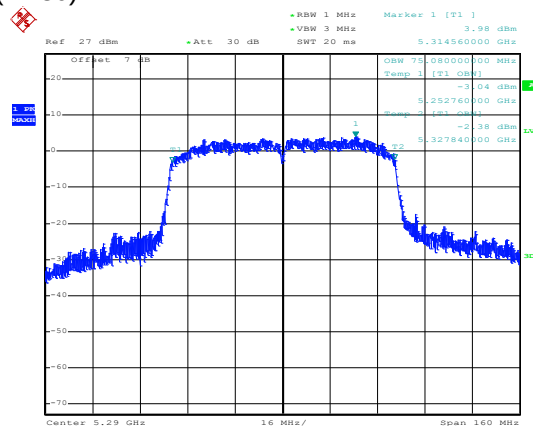


Date: 24.SEP.2019 17:39:34

Middle channel

Band 3:


802.11a

26 dB EBW

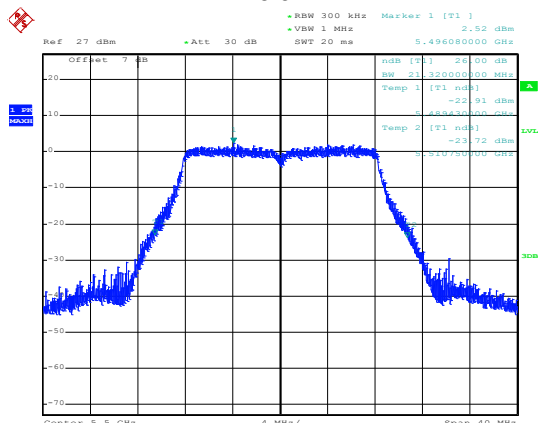


Date: 9.OCT.2019 17:24:48

99% OBW

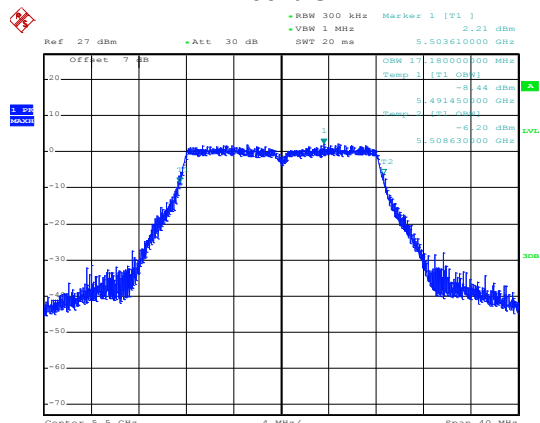


Date: 9.OCT.2019 17:24:39

Lowest channel

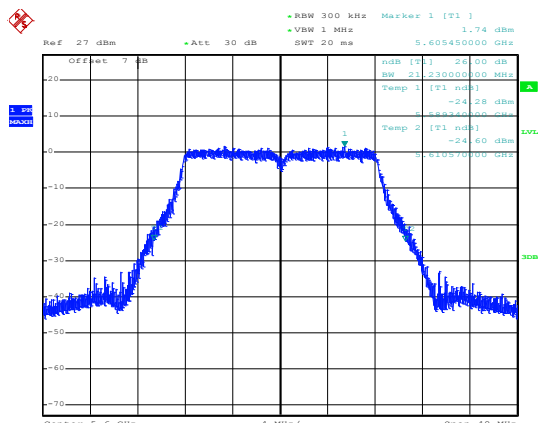


Date: 9.OCT.2019 17:25:07

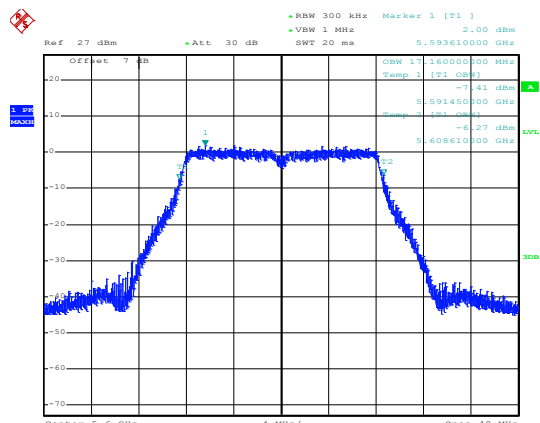


Date: 9.OCT.2019 17:25:14

Middle channel

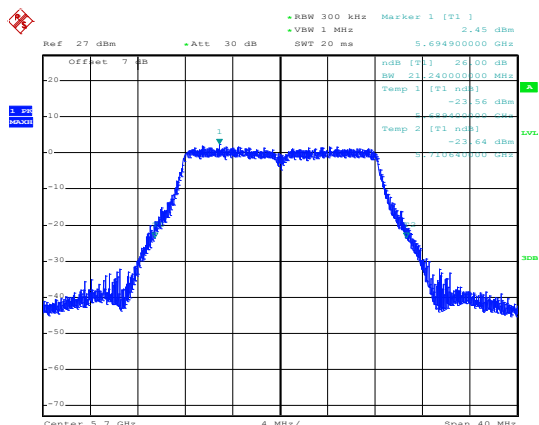

Date: 9.OCT.2019 17:25:47

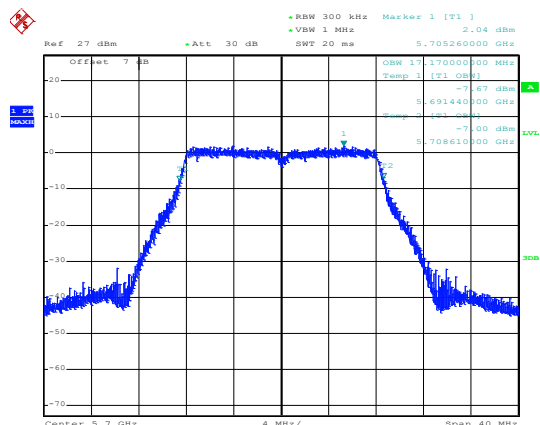


Date: 9.OCT.2019 17:25:37

Highest channel


802.11n(HT20)

26 dB EBW

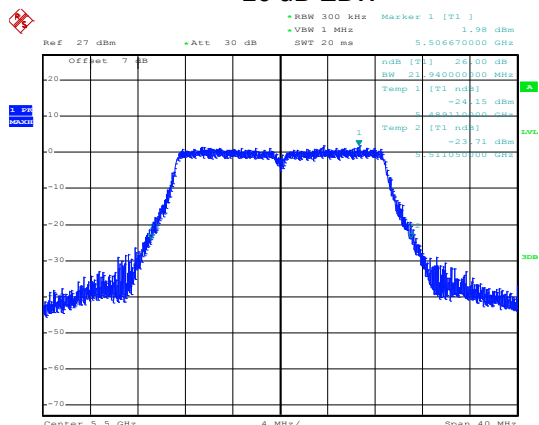


Date: 9.OCT.2019 17:17:28

99% OBW

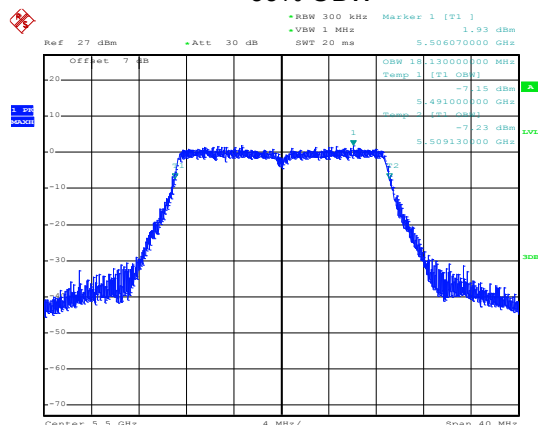


Date: 9.OCT.2019 17:17:19

Lowest channel

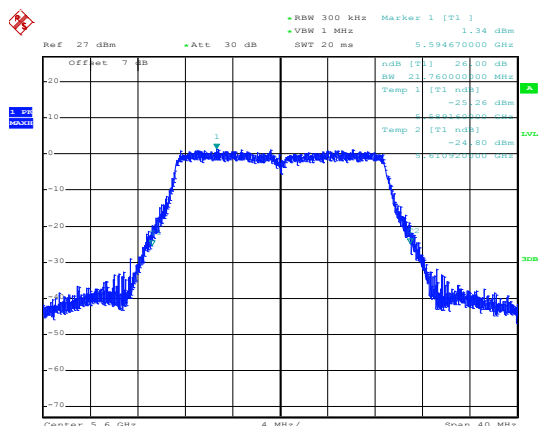


Date: 9.OCT.2019 17:17:56

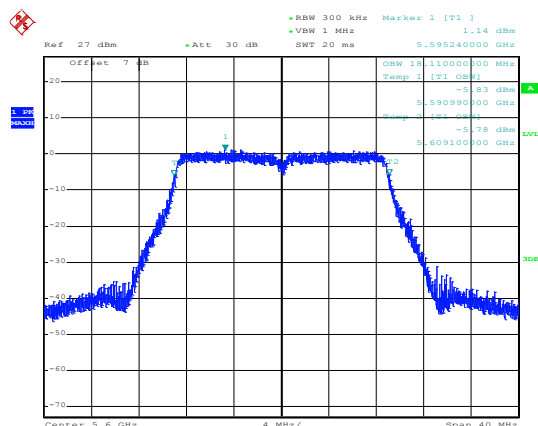


Date: 9.OCT.2019 17:18:02

Middle channel

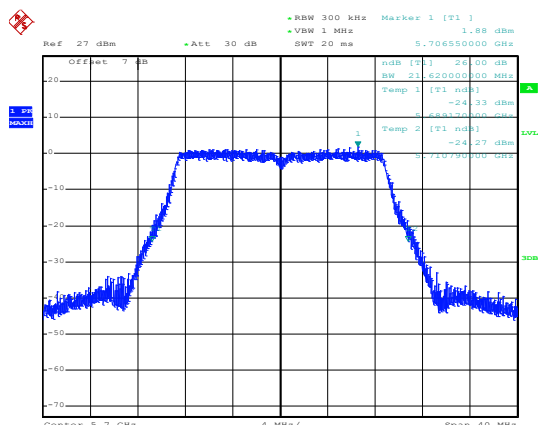

Date: 9.OCT.2019 17:18:32

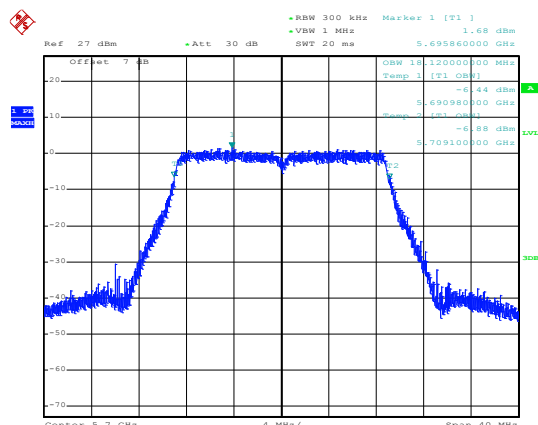


Date: 9.OCT.2019 17:18:24

Highest channel


802.11n(HT40)

26 dB EBW

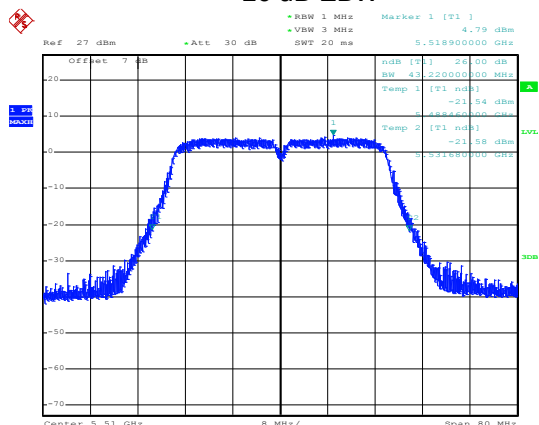


Date: 9.OCT.2019 17:16:10

99% OBW

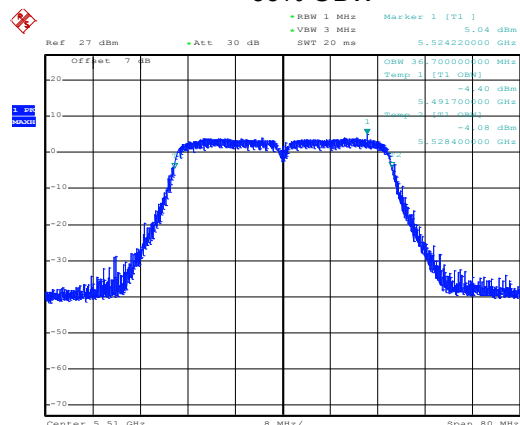


Date: 9.OCT.2019 17:16:17

Lowest channel

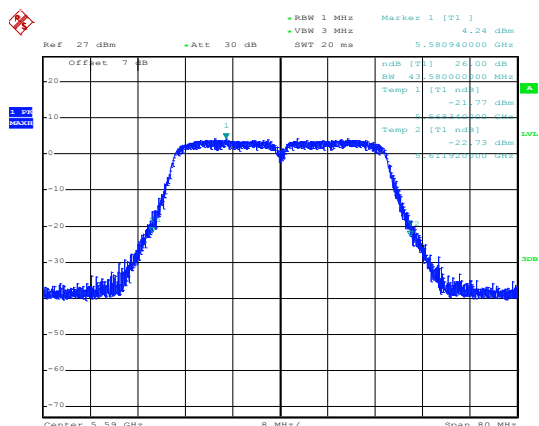


Date: 9.OCT.2019 17:15:44

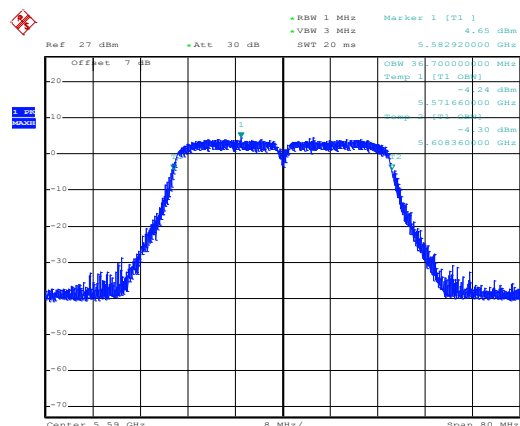


Date: 9.OCT.2019 17:15:35

Middle channel

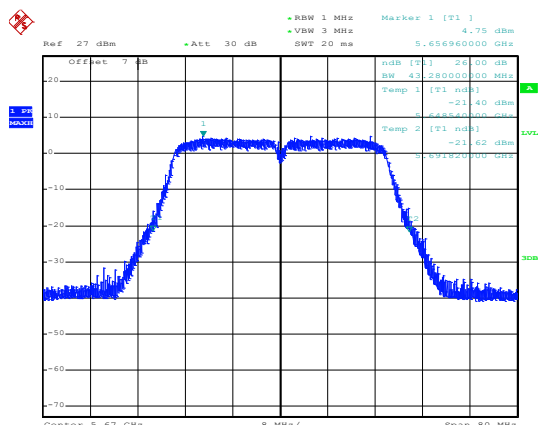

Date: 9.OCT.2019 17:14:59

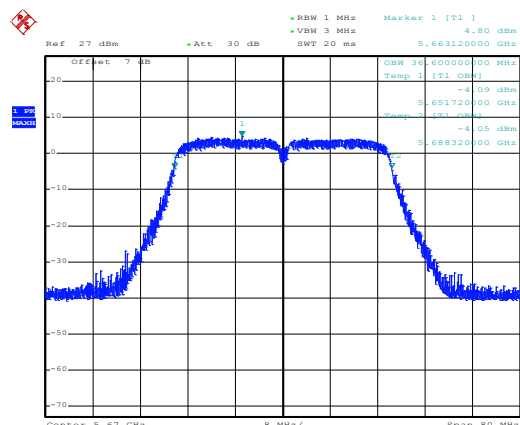


Date: 9.OCT.2019 17:15:07

Highest channel


802.11ac(HT20)

26 dB EBW

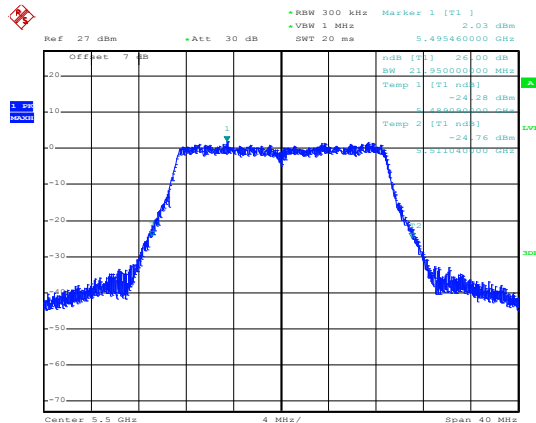


Date: 9.OCT.2019 17:24:12

99% OBW

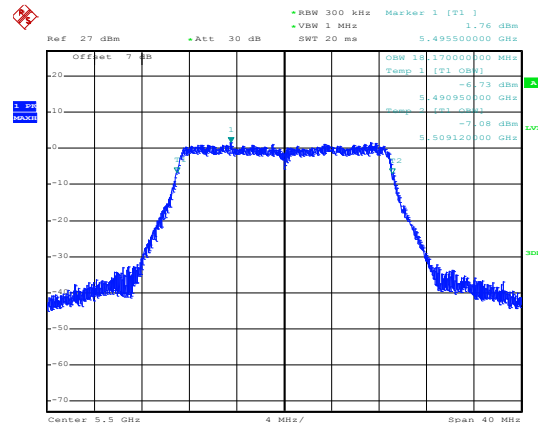


Date: 9.OCT.2019 17:24:21

Lowest channel

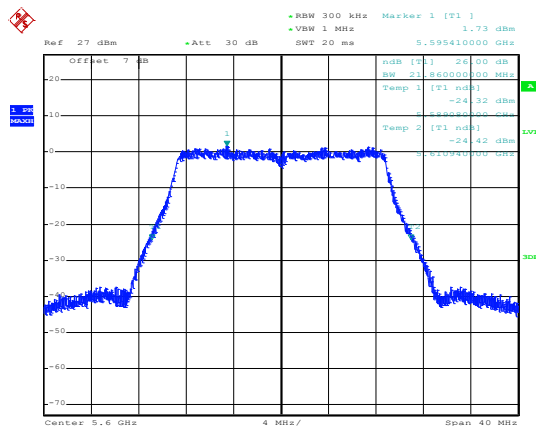


Date: 9.OCT.2019 17:23:48

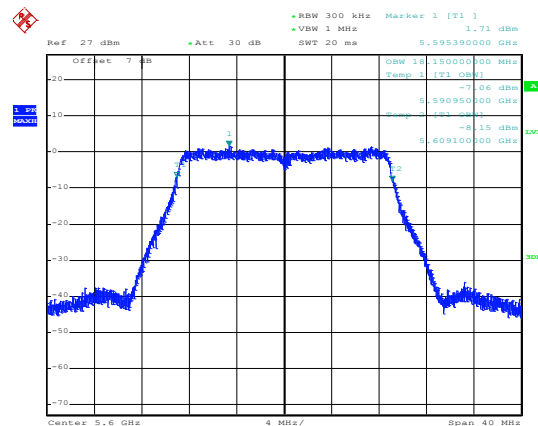


Date: 9.OCT.2019 17:23:39

Middle channel

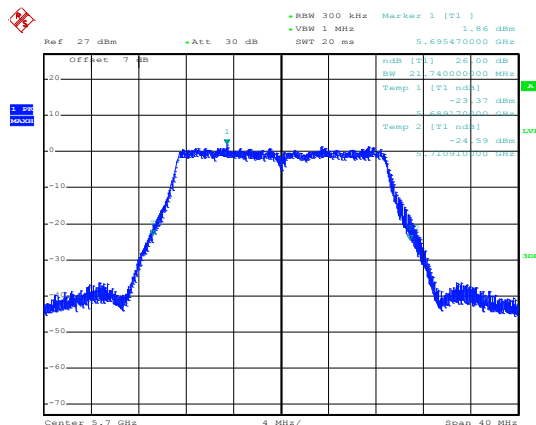

Date: 9.OCT.2019 17:23:07

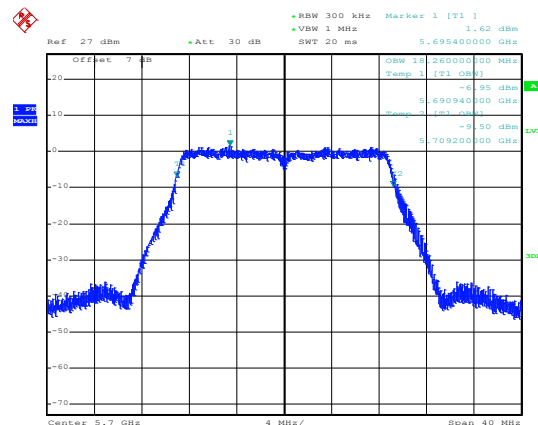


Date: 9.OCT.2019 17:23:15

Highest channel


802.11ac(HT40)

26 dB EBW

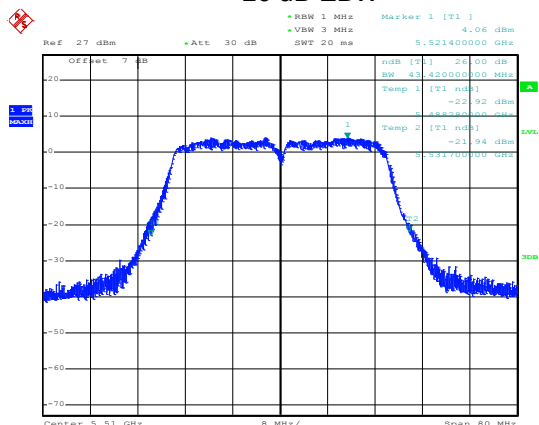


Date: 9.OCT.2019 17:10:41

99% OBW

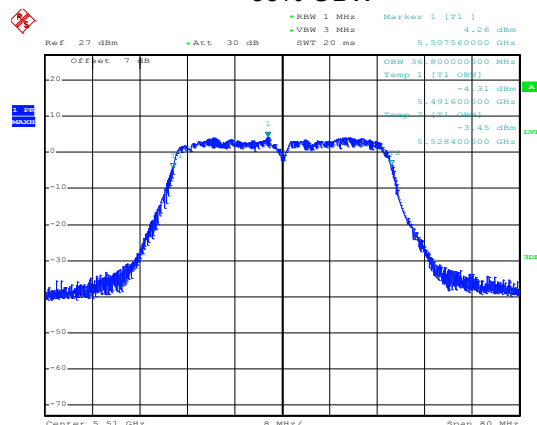


Date: 9.OCT.2019 17:10:33

Lowest channel

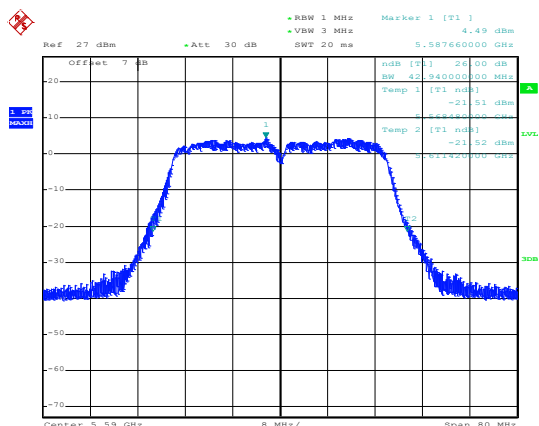


Date: 9.OCT.2019 17:11:12

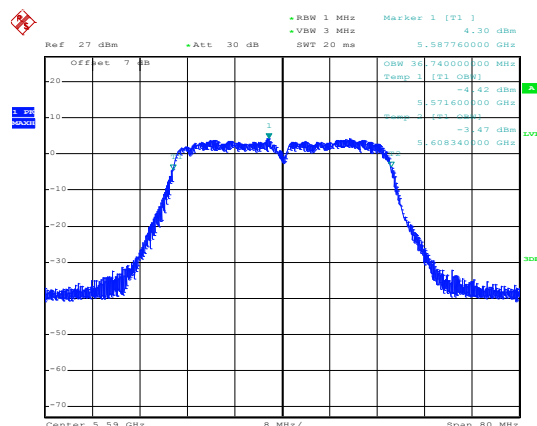


Date: 9.OCT.2019 17:11:19

Middle channel

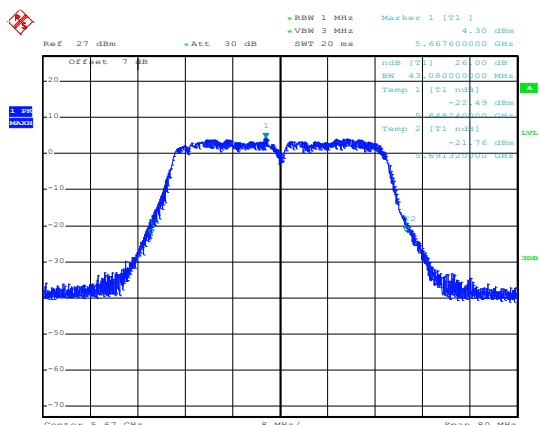

Date: 9.OCT.2019 17:11:55

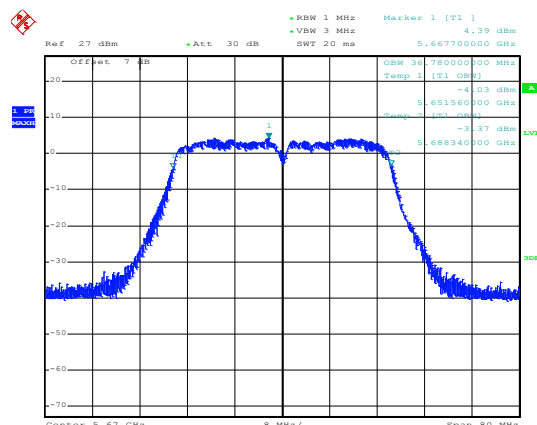


Date: 9.OCT.2019 17:11:46

Highest channel


802.11ac(HT80)

26 dB EBW

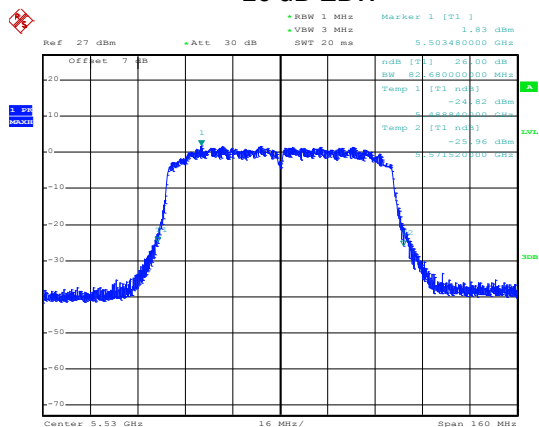


Date: 9.OCT.2019 17:09:22

99% OBW

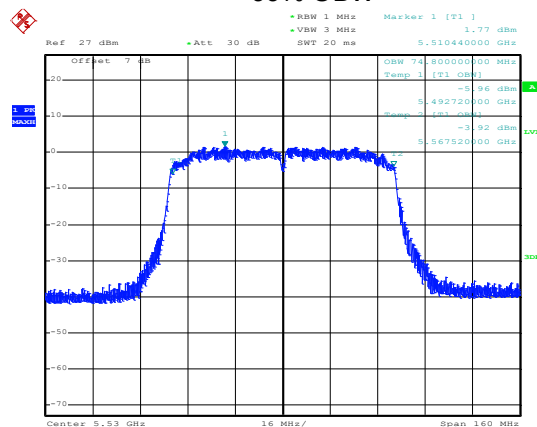


Date: 9.OCT.2019 17:09:30

Lowest channel

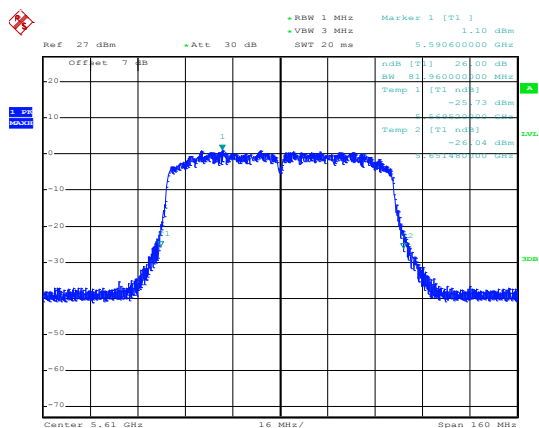

Date: 9.OCT.2019 17:08:34

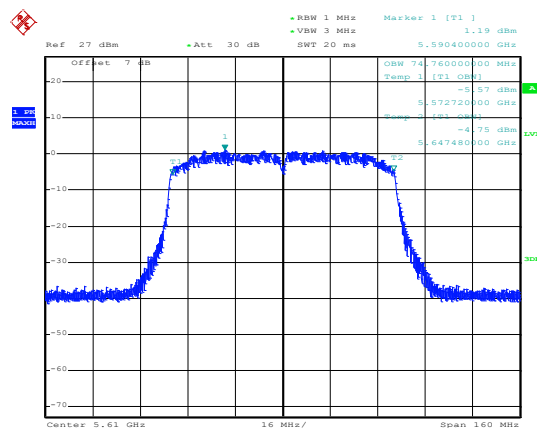

Date: 9.OCT.2019 17:08:25



Highest channel

Band 4:

802.11a

26 dB EBW



99% OBW

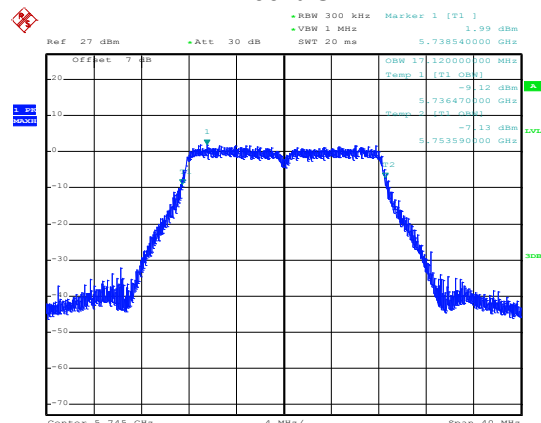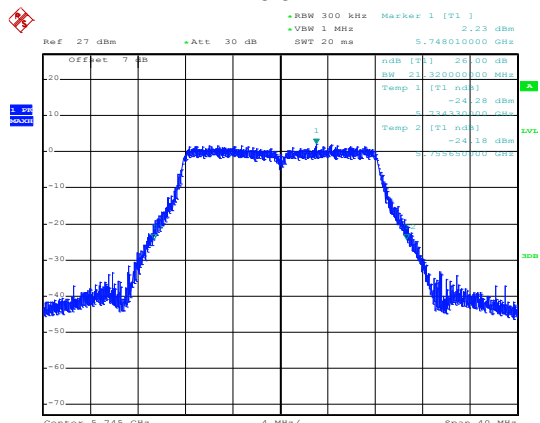

Date: 9.OCT.2019 17:26:10

Date: 9.OCT.2019 17:26:17



Lowest channel

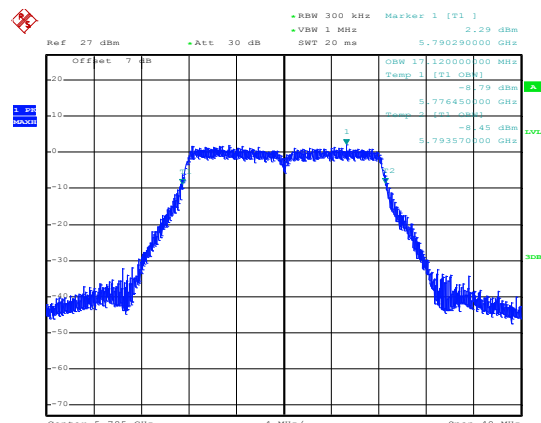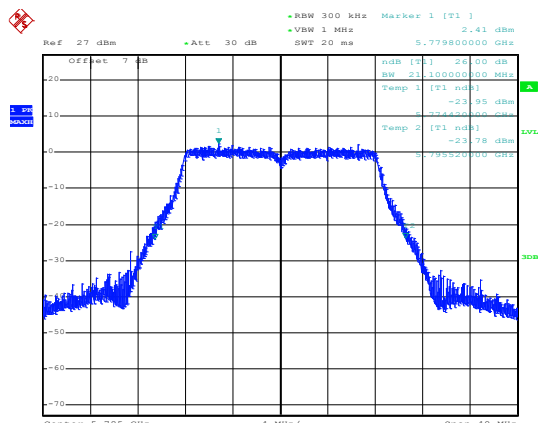

Date: 9.OCT.2019 17:26:46

Date: 9.OCT.2019 17:26:37

Middle channel

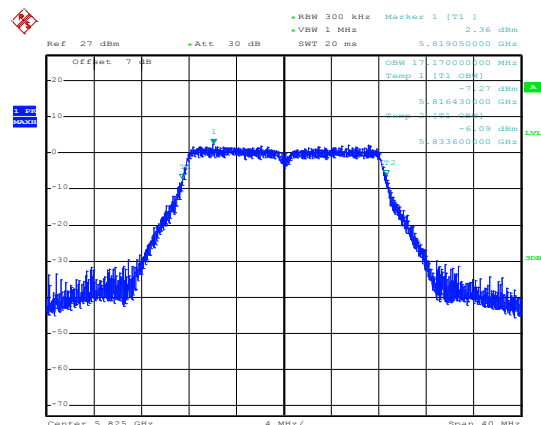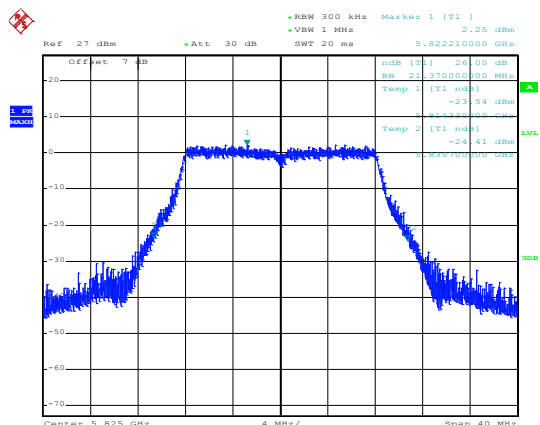


Date: 9.OCT.2019 17:27:05

Date: 9.OCT.2019 17:27:13

Highest channel


802.11n(HT20)

26 dB EBW

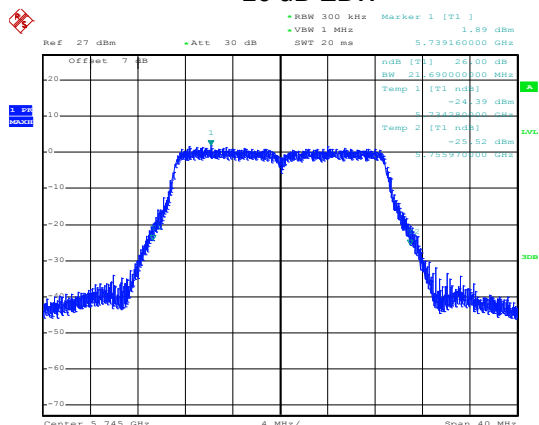


Date: 9.OCT.2019 17:18:56

99% OBW

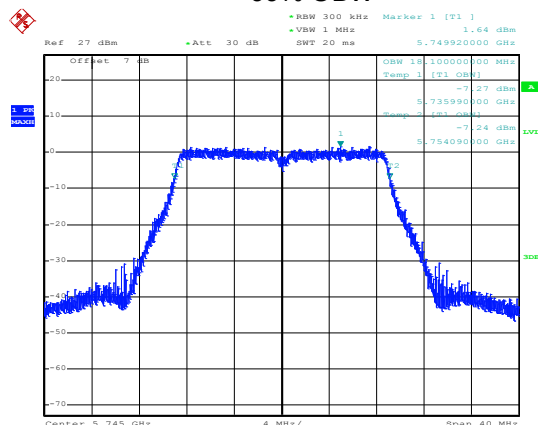


Date: 9.OCT.2019 17:19:03

Lowest channel

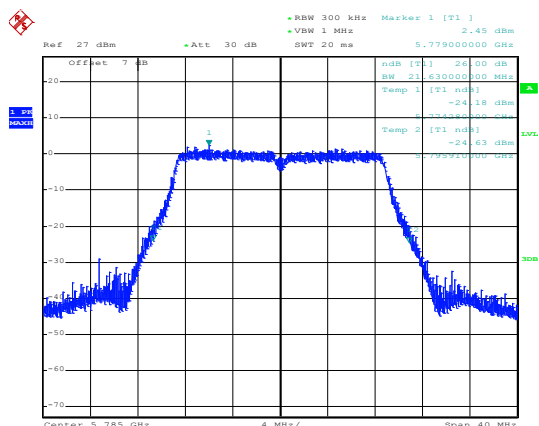


Date: 9.OCT.2019 17:19:56

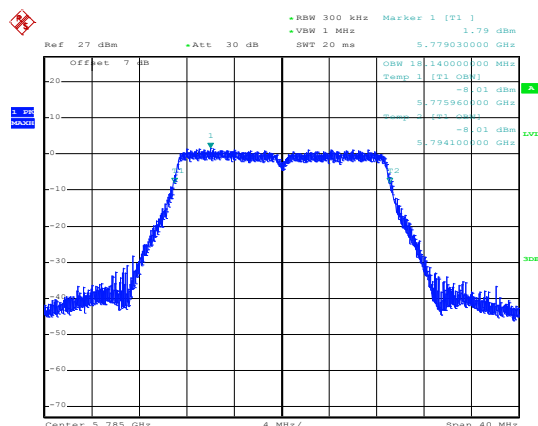


Date: 9.OCT.2019 17:19:48

Middle channel

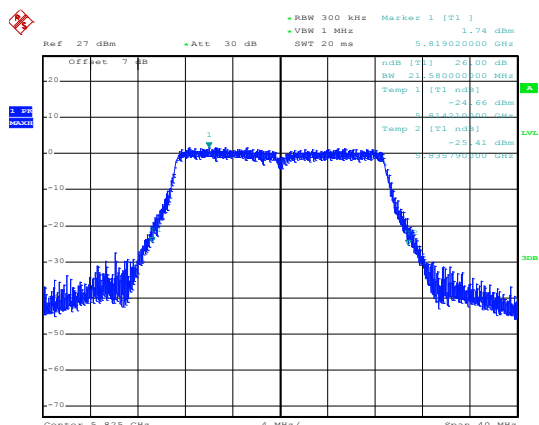

Date: 9.OCT.2019 17:20:29

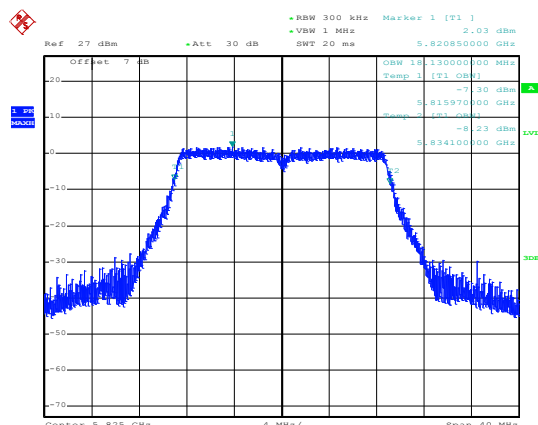


Date: 9.OCT.2019 17:20:35

Highest channel


802.11n(HT40)

26 dB EBW

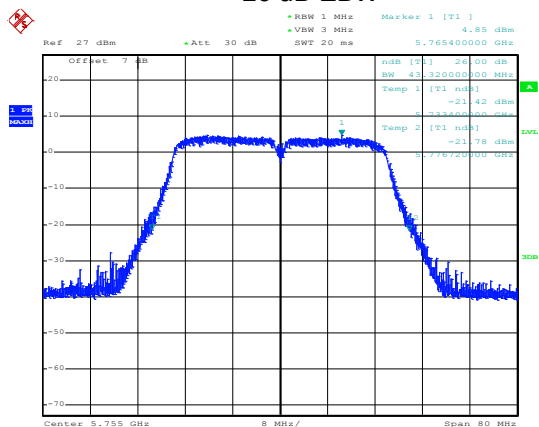


Date: 9.OCT.2019 17:14:35

99% OBW

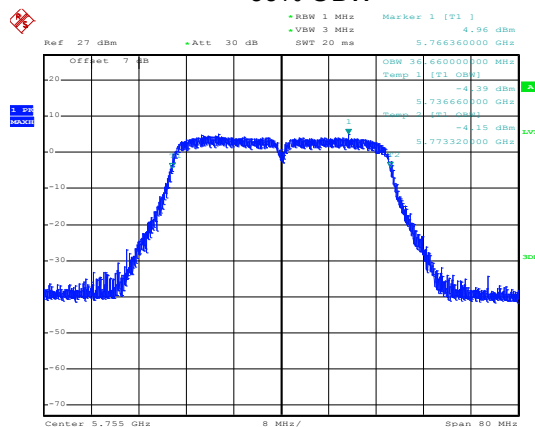


Date: 9.OCT.2019 17:14:24

Lowest channel

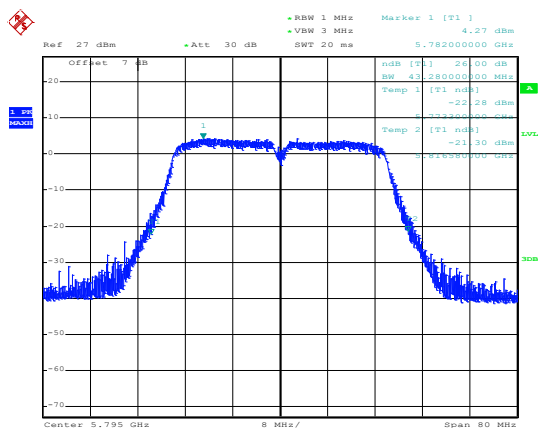

Date: 9.OCT.2019 17:13:32

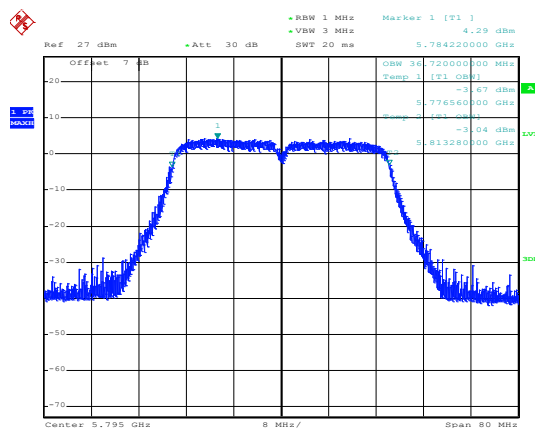


Date: 9.OCT.2019 17:13:40

Highest channel


802.11ac(HT20)

26 dB EBW

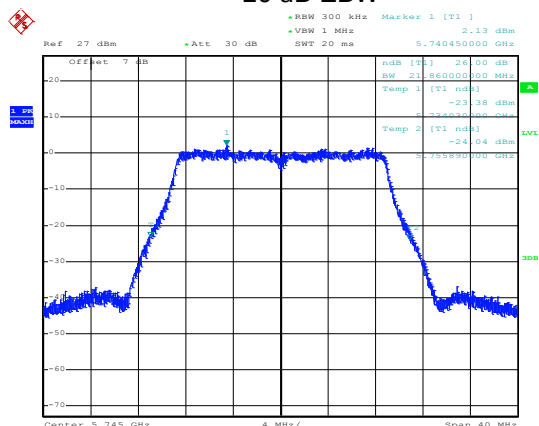


Date: 9.OCT.2019 17:22:36

99% OBW

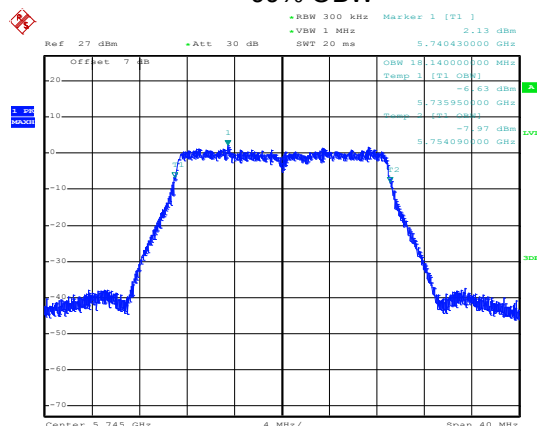


Date: 9.OCT.2019 17:22:28

Lowest channel

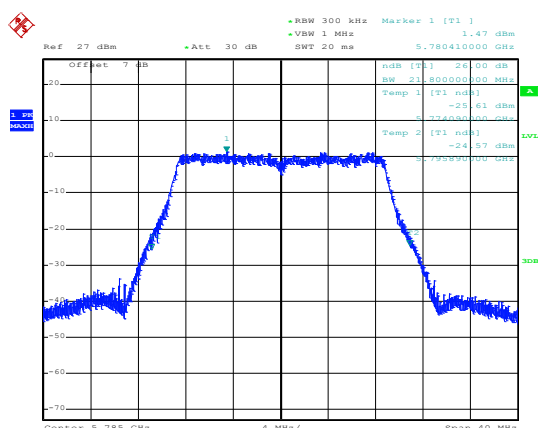


Date: 9.OCT.2019 17:21:54

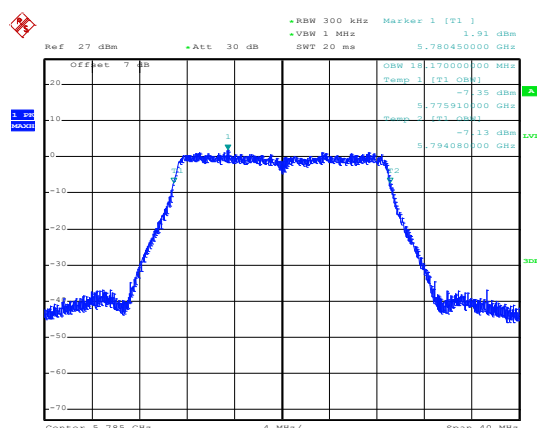


Date: 9.OCT.2019 17:22:04

Middle channel

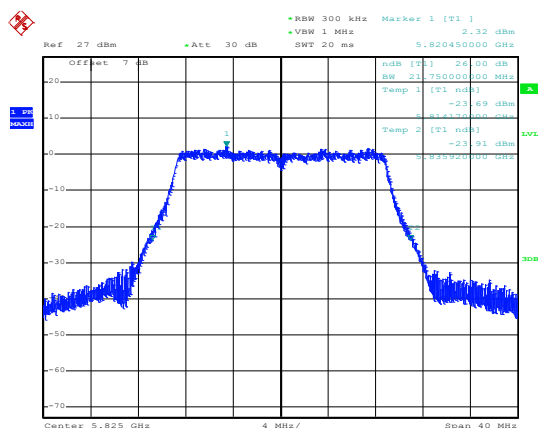

Date: 9.OCT.2019 17:21:06

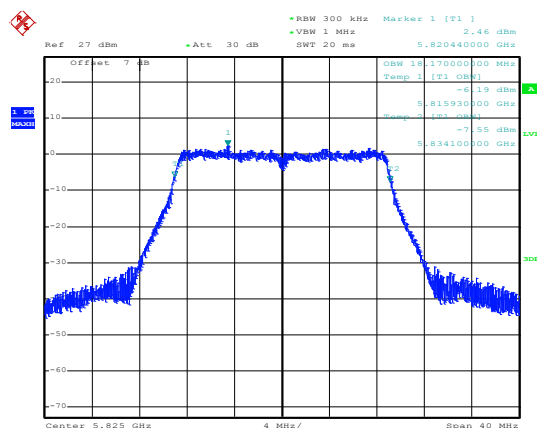


Date: 9.OCT.2019 17:20:58

Highest channel


802.11ac(HT40)

26 dB EBW

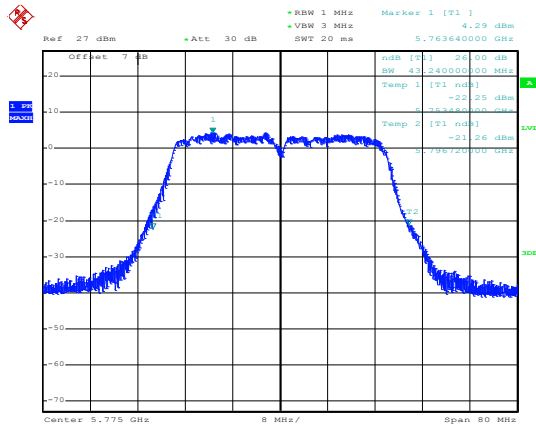


Date: 9.OCT.2019 17:12:24

99% OBW

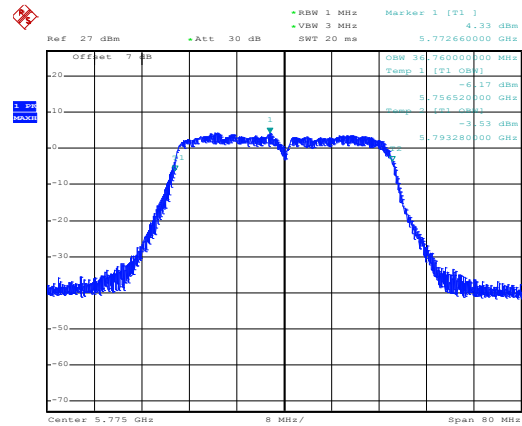


Date: 9.OCT.2019 17:12:33

Lowest channel

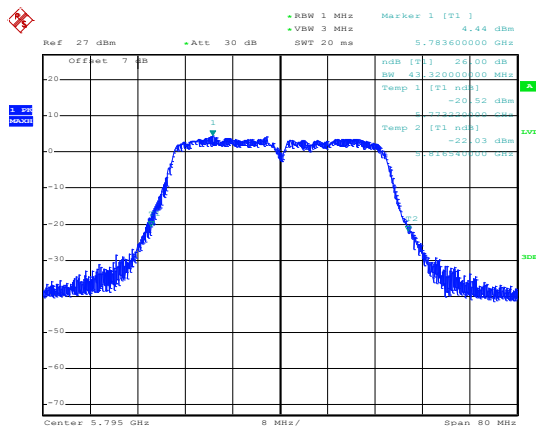


Date: 9.OCT.2019 17:13:06

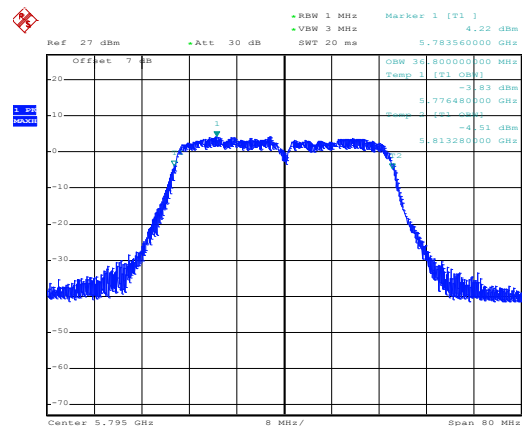


Date: 9.OCT.2019 17:12:56

Highest channel

802.11ac(HT80)

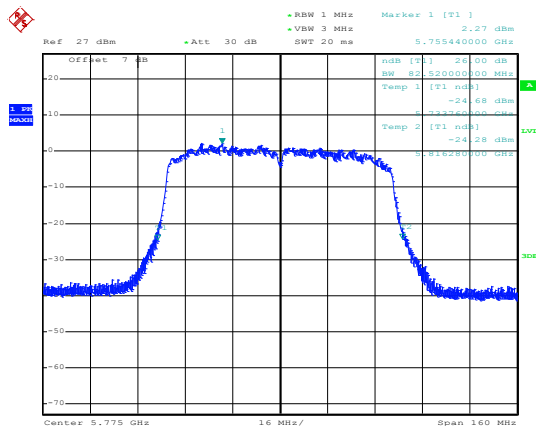


Date: 9.OCT.2019 17:07:24

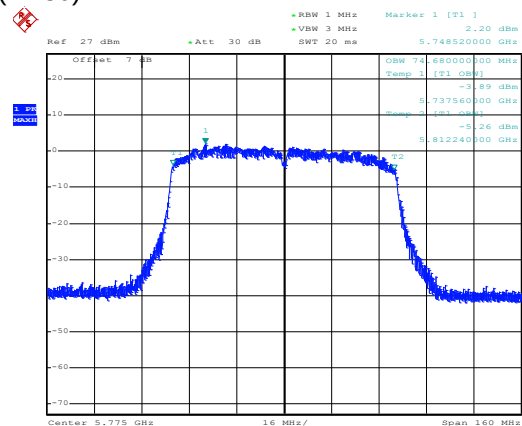

Date: 9.OCT.2019 17:07:34


Middle channel

6dB BW

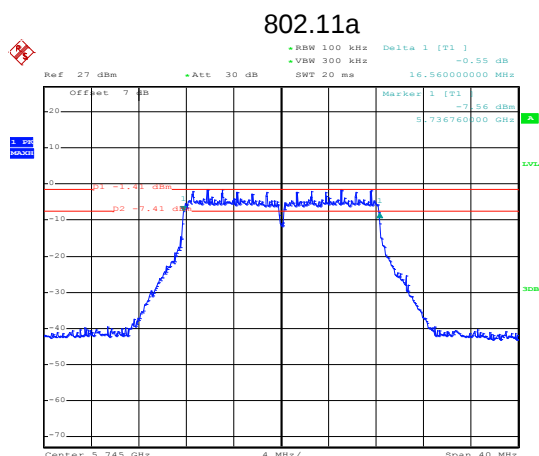


Date: 9.OCT.2019 17:30:45

Lowest channel

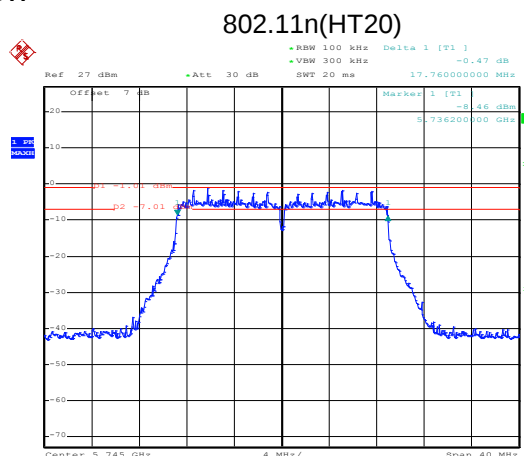


Date: 9.OCT.2019 17:35:18

Lowest channel

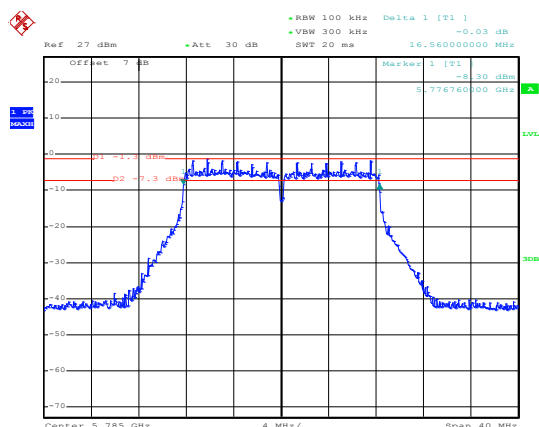


Date: 9.OCT.2019 17:29:56

Middle channel

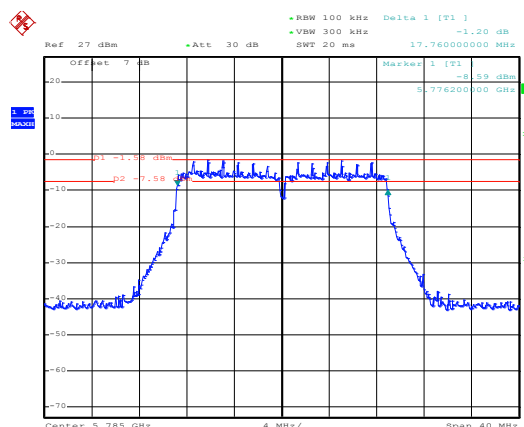


Date: 9.OCT.2019 17:34:36

Middle channel

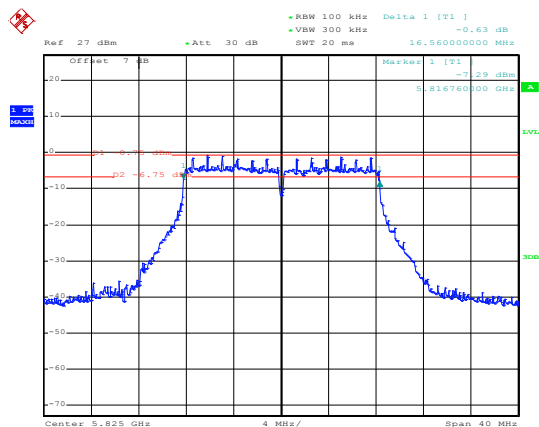


Date: 9.OCT.2019 17:29:08

Highest channel

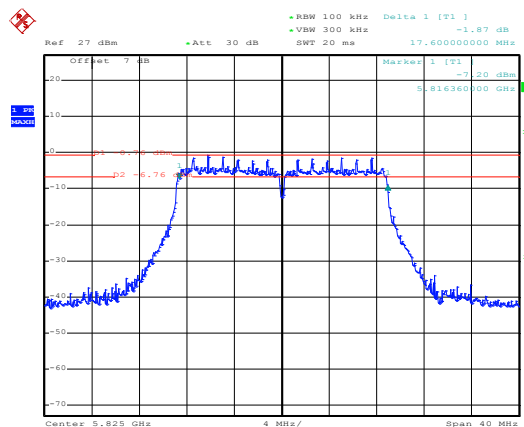


Date: 9.OCT.2019 17:33:52

Highest channel

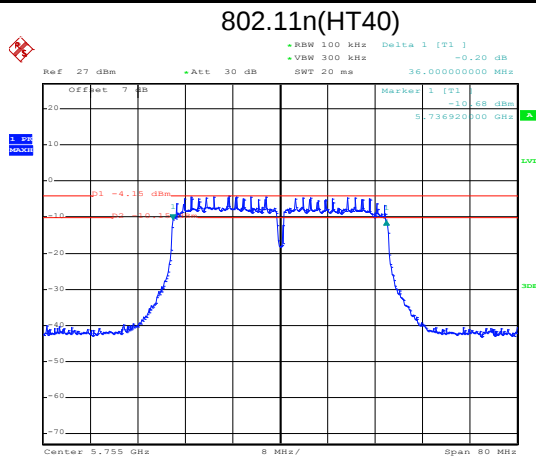


Date: 9.OCT.2019 17:38:00

Lowest channel

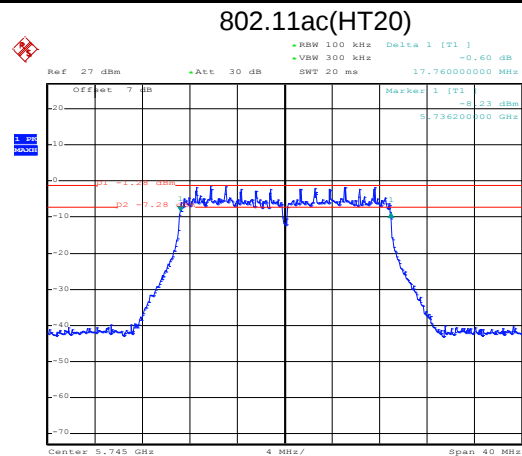


Date: 9.OCT.2019 17:31:38

Lowest channel

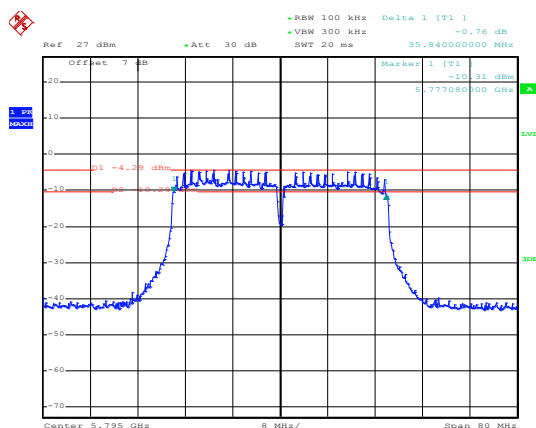


Date: 9.OCT.2019 17:39:16

Highest channel

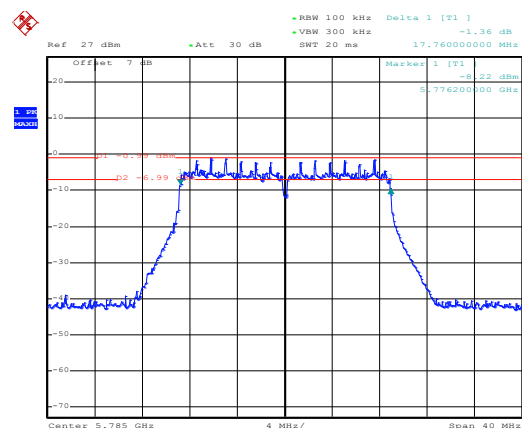


Date: 9.OCT.2019 17:32:31

Middle channel

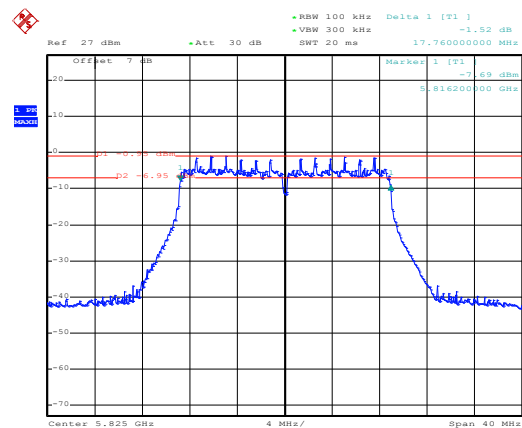


Date: 9.OCT.2019 17:33:12

Highest channel

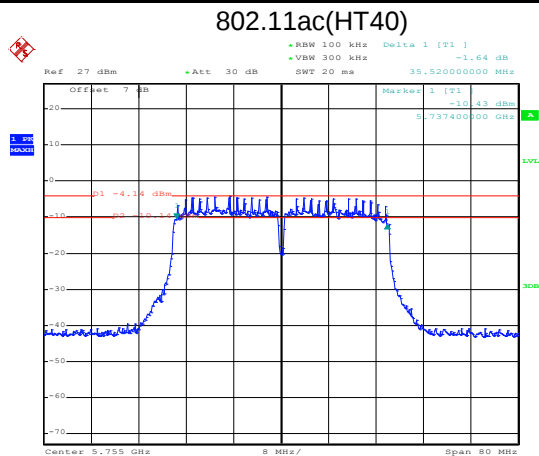


Date: 9.OCT.2019 17:40:53

Lowest channel

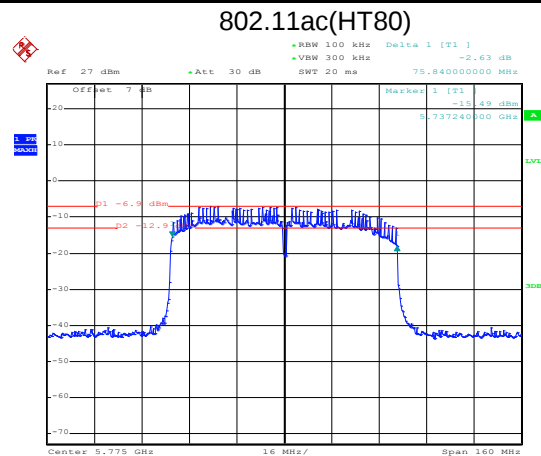

Date: 9.OCT.2019 17:42:06


Middle channel

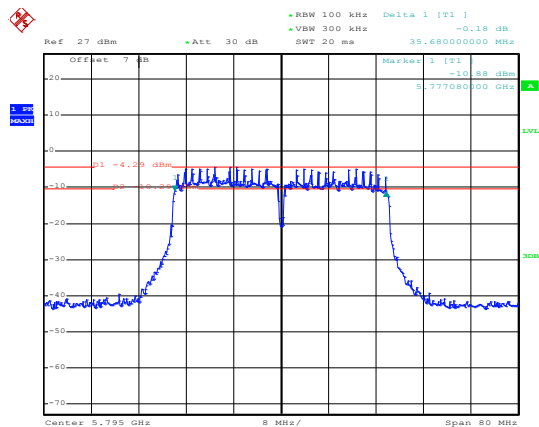

Date: 9.OCT.2019 17:39:57

Highest channel

6.5 Power Spectral Density

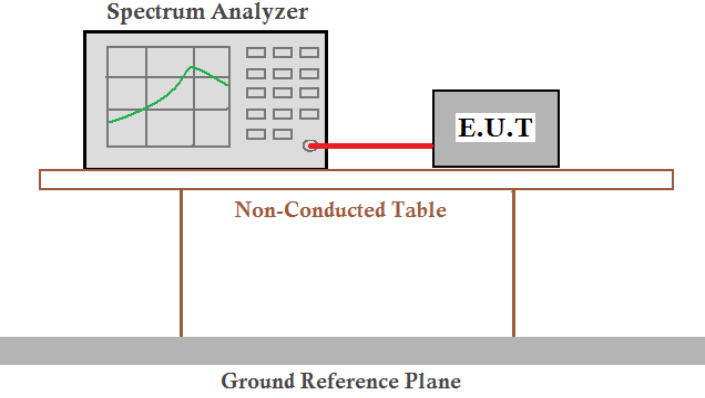Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (iv) & (a) (2) & (a)(3)
Limit:	Band 1: 11 dBm/MHz Band 2: 11 dBm/MHz Band 3: 11 dBm/MHz Band 4: 30 dBm/500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs that rest on a thick grey bar labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


Band 1				
Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	-0.82	11.00	Pass
	Middle	-0.85		
	Highest	-0.33		
802.11n(HT20)	Lowest	-1.32	11.00	Pass
	Middle	-0.92		
	Highest	-0.44		
802.11n(HT40)	Lowest	-3.20	11.00	Pass
	Highest	-2.62		
802.11ac(HT20)	Lowest	-1.26	11.00	Pass
	Middle	-0.90		
	Highest	-0.48		
802.11ac(HT40)	Lowest	-2.89	11.00	Pass
	Highest	-2.52		
802.11ac(HT80)	Middle	-5.65	11.00	Pass


Band 2				
Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	0.20	11.00	Pass
	Middle	0.71		
	Highest	0.90		
802.11n(HT20)	Lowest	-0.10	11.00	Pass
	Middle	0.40		
	Highest	0.76		
802.11n(HT40)	Lowest	-1.65	11.00	Pass
	Highest	-1.26		
802.11ac(HT20)	Lowest	-0.14	11.00	Pass
	Middle	0.42		
	Highest	0.94		
802.11ac(HT40)	Lowest	-1.69	11.00	Pass
	Highest	-1.22		
802.11ac(HT80)	Middle	-4.18	11.00	Pass

Band 3				
Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	-0.43	11.00	Pass
	Middle	-0.63		
	Highest	-0.44		
802.11n20	Lowest	-0.51	11.00	Pass
	Middle	-0.73		
	Highest	-0.50		
802.11n40	Lowest	-3.73	11.00	Pass
	Middle	-3.99		
	Highest	-3.78		
802.11ac20	Lowest	-0.57	11.00	Pass
	Middle	-0.78		
	Highest	-0.64		
802.11ac40	Lowest	-3.80	11.00	Pass
	Middle	-4.00		
	Highest	-3.67		
802.11ac80	Lowest	-6.24	11.00	Pass
	Highest	-6.93		


Band 4				
Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	3.39	30.00	Pass
	Middle	2.24		
	Highest	2.50		
802.11n20	Lowest	2.22	30.00	Pass
	Middle	1.50		
	Highest	1.91		
802.11n40	Lowest	-0.55	30.00	Pass
	Highest	-0.88		
802.11ac20	Lowest	1.94	30.00	Pass
	Middle	-0.21		
	Highest	1.93		
802.11ac40	Lowest	-1.12	30.00	Pass
	Highest	2.10		
802.11ac80	Middle	-3.70	30.00	Pass

Test plot as follows:

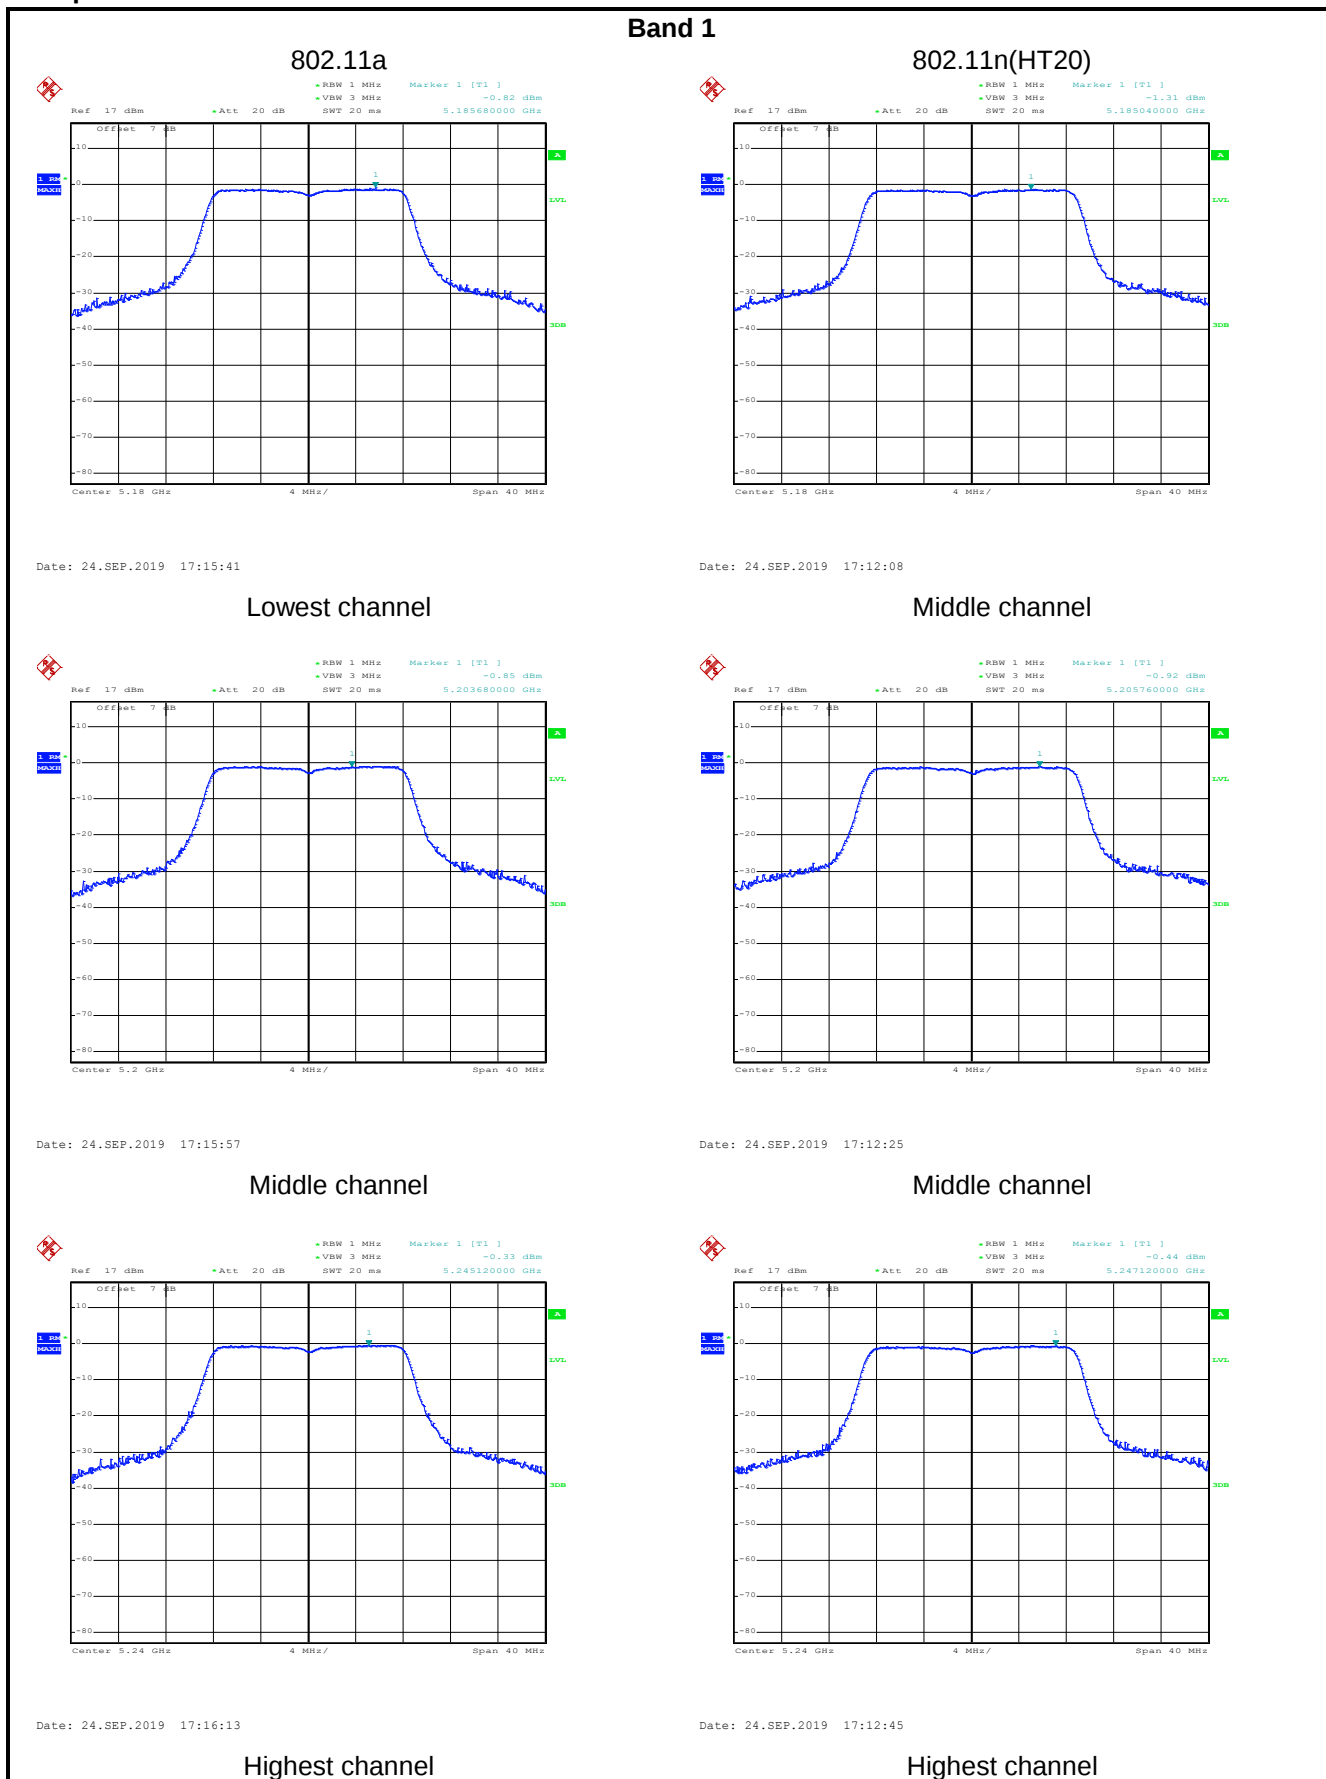

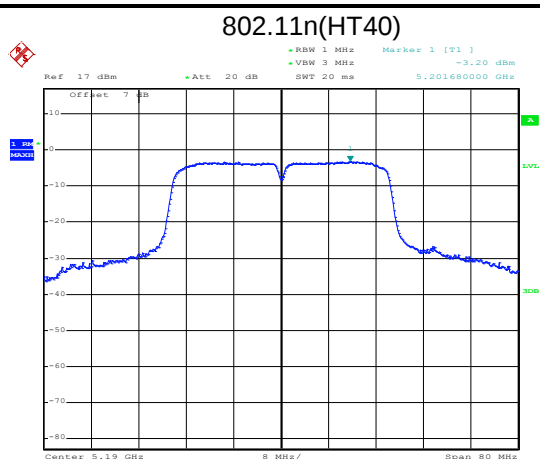


Date: 24.SEP.2019 17:10:57

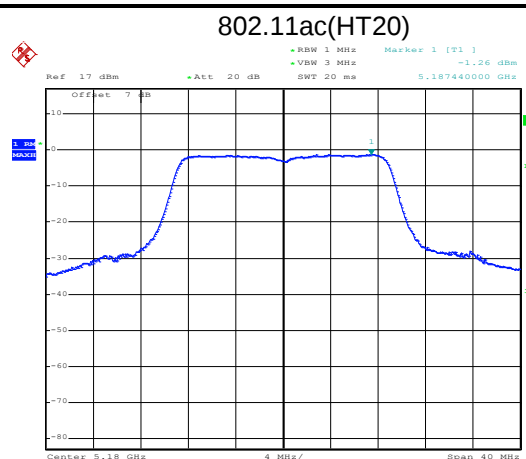


Date: 24.SEP.2019 17:15:26

Lowest channel

Middle channel

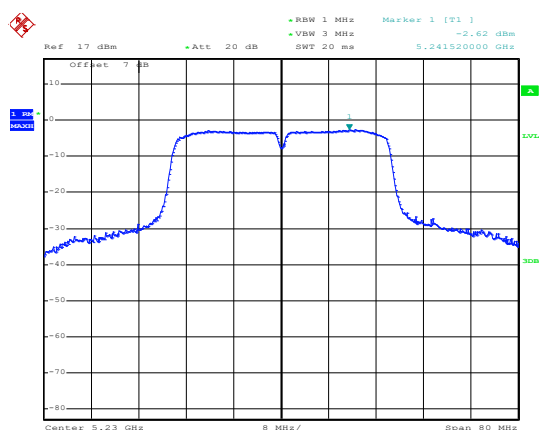


Date: 24.SEP.2019 17:10:22

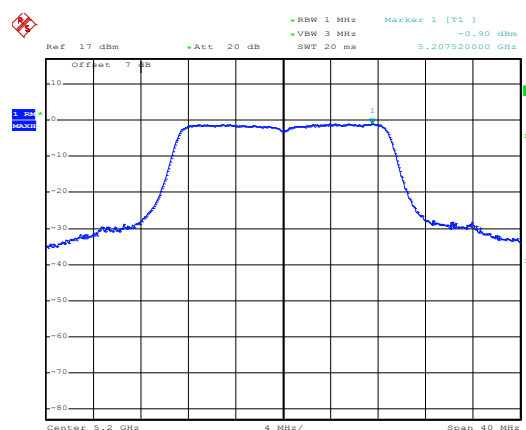

Date: 24.SEP.2019 17:15:09

Highest channel


Middle channel

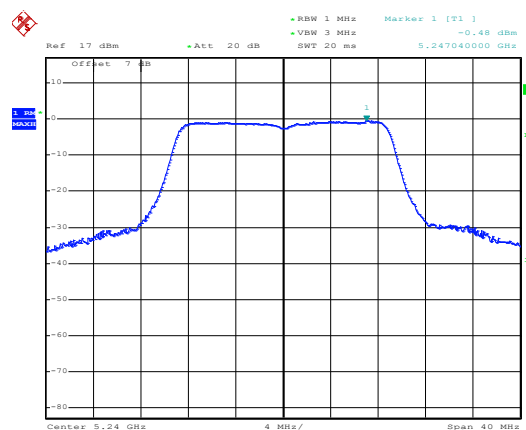

Date: 24.SEP.2019 17:14:48

Highest channel


802.11ac(HT40)

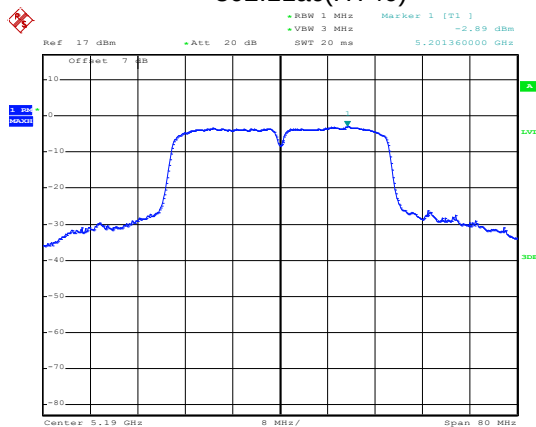

Date: 24.SEP.2019 17:07:15


Lowest channel

802.11ac(HT80)

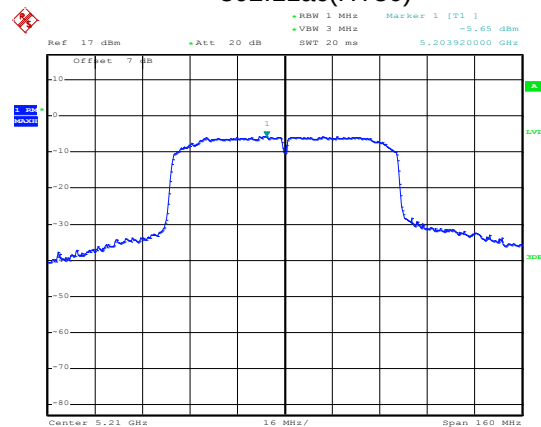

Date: 24.SEP.2019 17:05:51

Middle channel

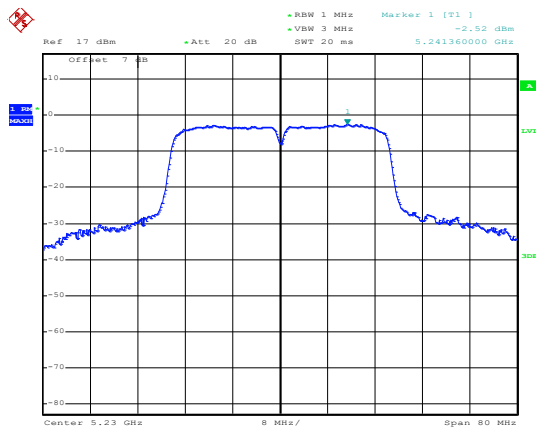


Date: 24.SEP.2019 17:07:47

Highest channel


Band 2

802.11a

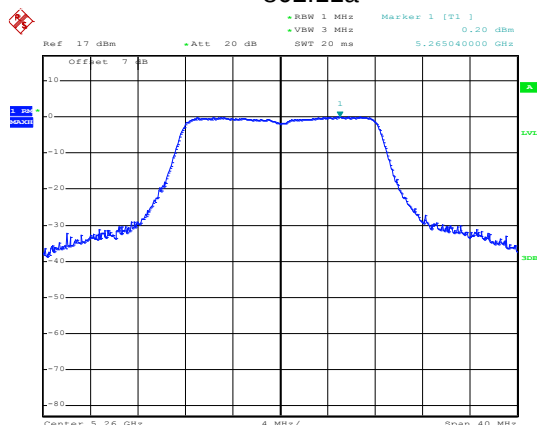


Date: 24.SEP.2019 17:16:31

802.11n(HT20)

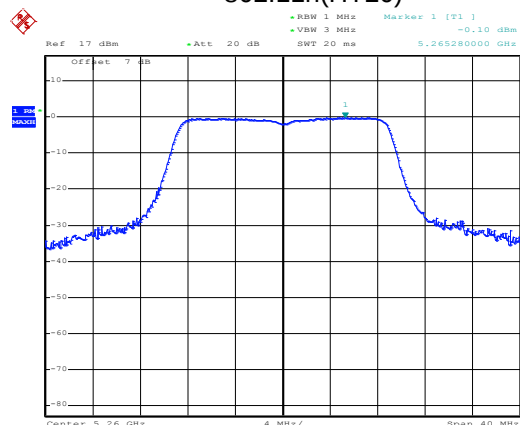


Date: 24.SEP.2019 17:13:02

Lowest channel

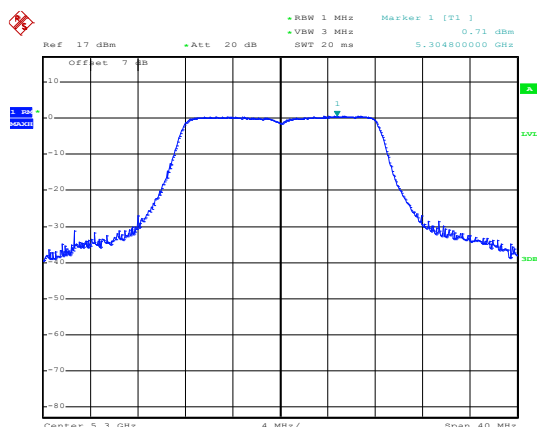


Date: 24.SEP.2019 17:16:48

Middle channel

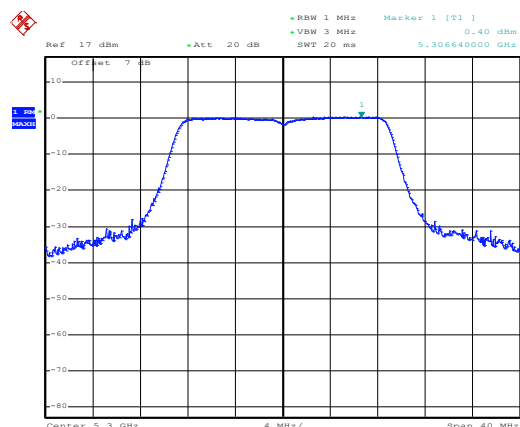


Date: 24.SEP.2019 17:13:21

Middle channel

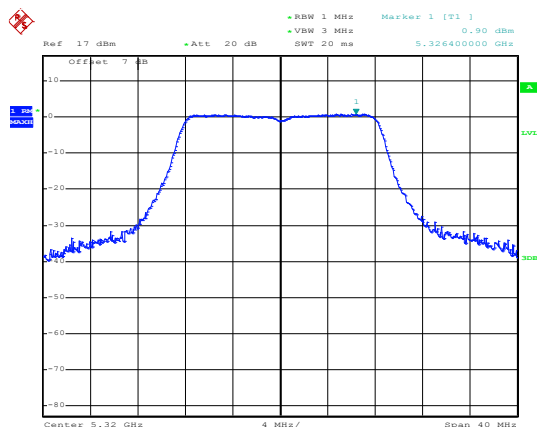

Date: 24.SEP.2019 17:17:03

Middle channel

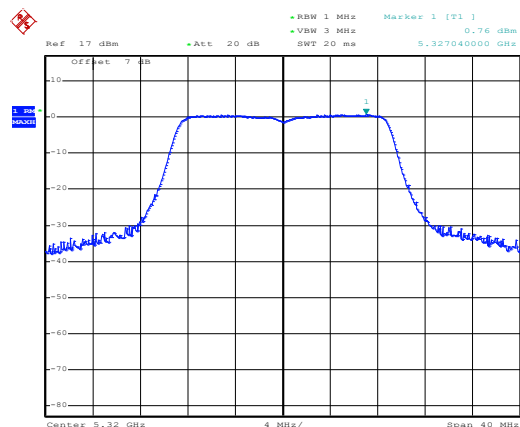


Date: 24.SEP.2019 17:13:37

Highest channel


Highest channel

802.11n(HT40)

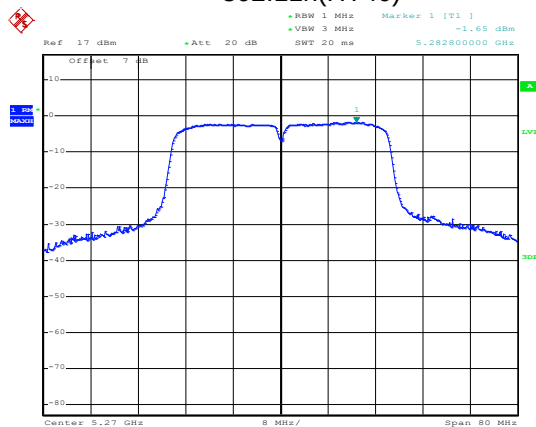

Date: 24.SEP.2019 17:09:55


Lowest channel

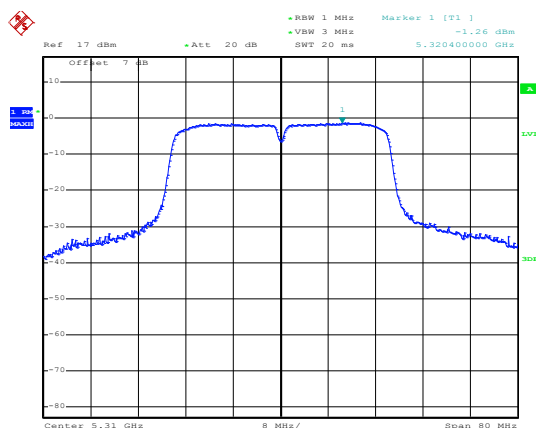

Date: 24.SEP.2019 17:09:29


Highest channel

802.11ac(HT20)

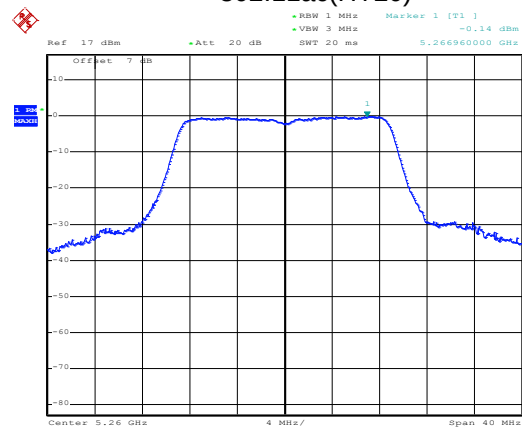


Date: 24.SEP.2019 17:14:29

Middle channel

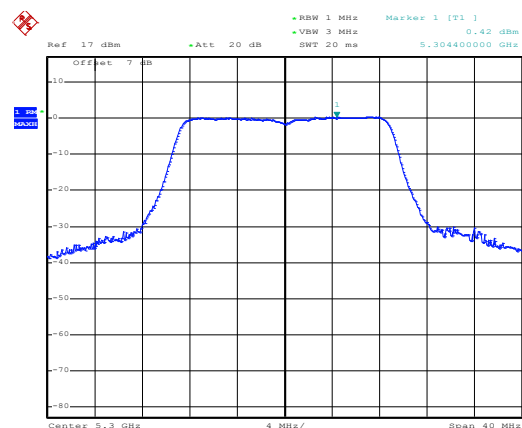

Date: 24.SEP.2019 17:14:11


Middle channel

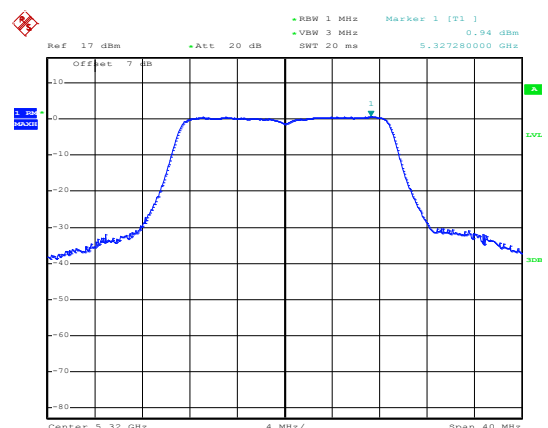

Date: 24.SEP.2019 17:13:56

Highest channel


802.11ac(HT40)

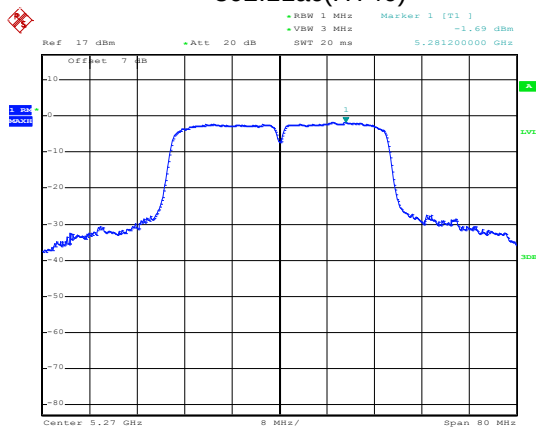

Date: 24.SEP.2019 17:08:10


Lowest channel

802.11ac(HT80)

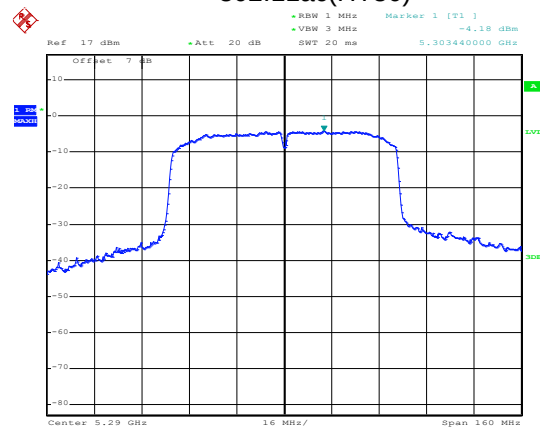

Date: 24.SEP.2019 17:06:28

Middle channel

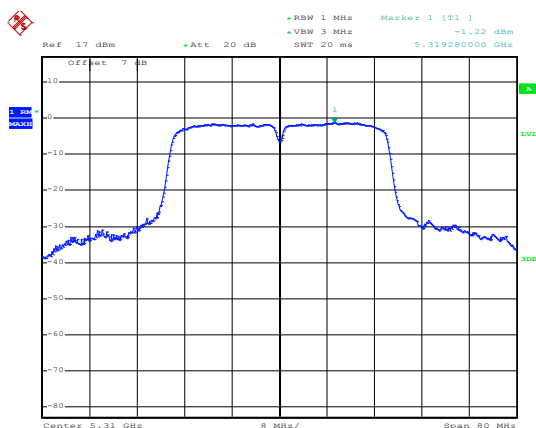


Date: 24.SEP.2019 17:08:32

Highest channel


Band 3

802.11a

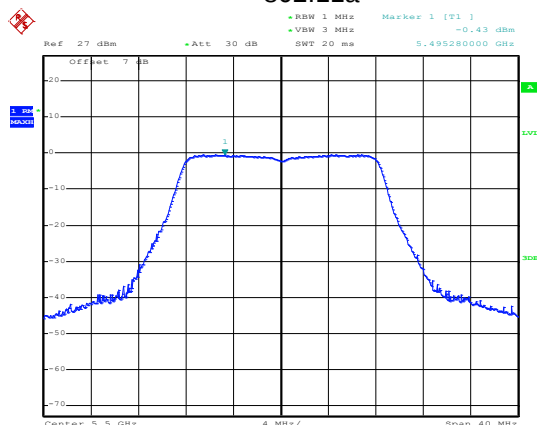


Date: 9.OCT.2019 17:49:17

802.11n(HT20)

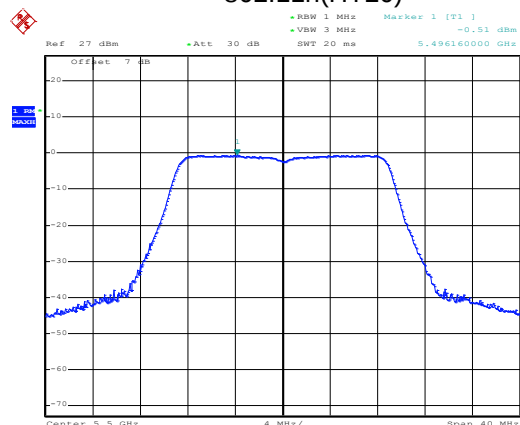


Date: 9.OCT.2019 17:47:21

Lowest channel

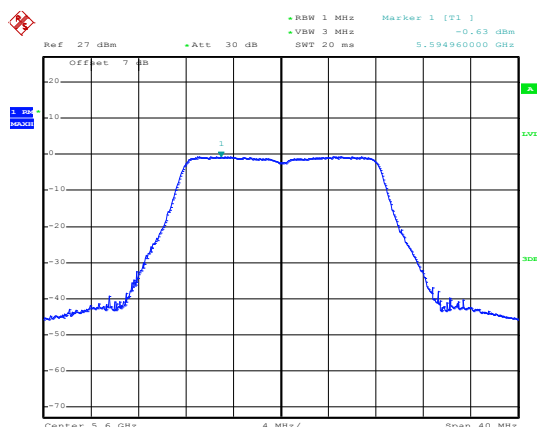


Date: 9.OCT.2019 17:49:33

Middle channel

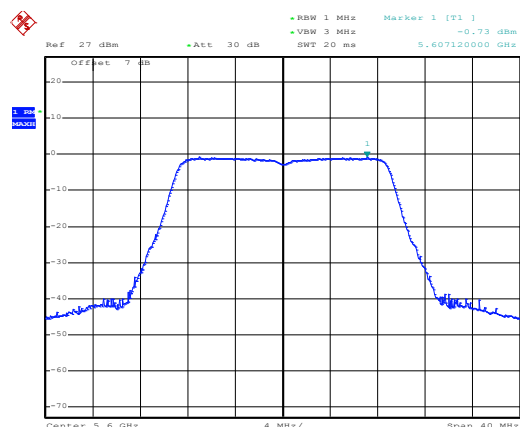


Date: 9.OCT.2019 17:47:44

Middle channel

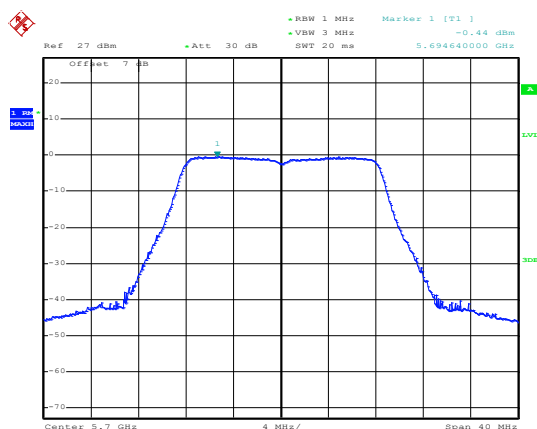

Date: 9.OCT.2019 17:49:49

Middle channel

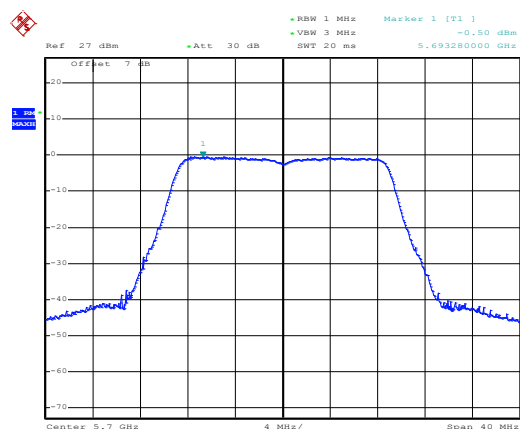


Date: 9.OCT.2019 17:48:03

Highest channel

Highest channel


802.11n(HT40)

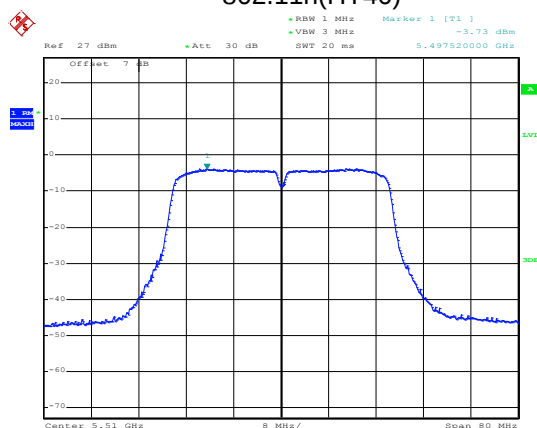

Date: 9.OCT.2019 17:46:45


Lowest channel

802.11ac(HT20)

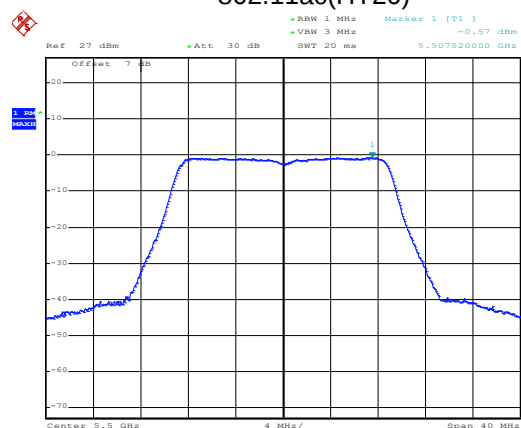


Date: 9.OCT.2019 17:49:05

Middle channel

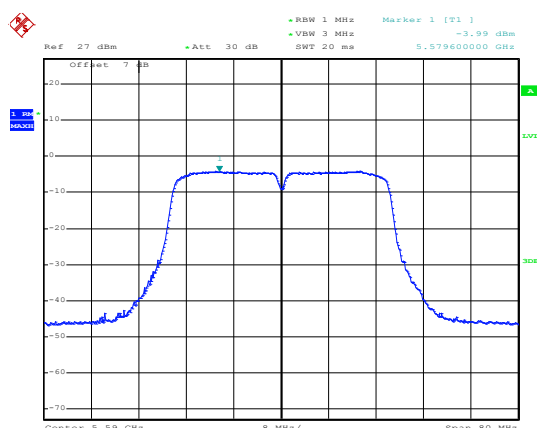


Date: 9.OCT.2019 17:46:18

Middle channel

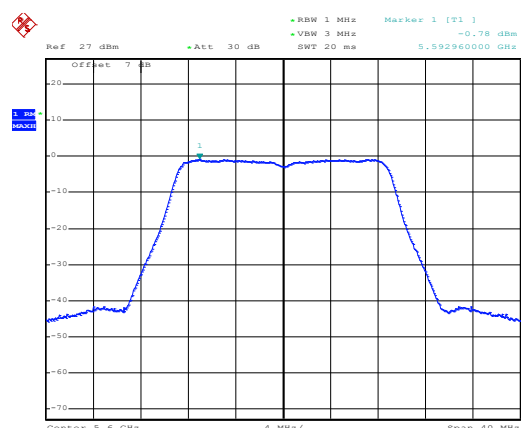


Date: 9.OCT.2019 17:48:45

Middle channel

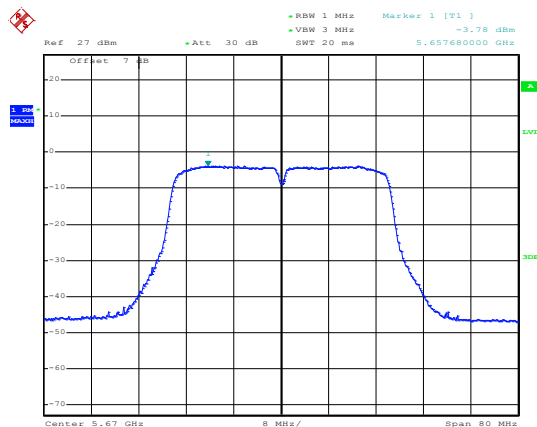

Date: 9.OCT.2019 17:45:53


Highest channel

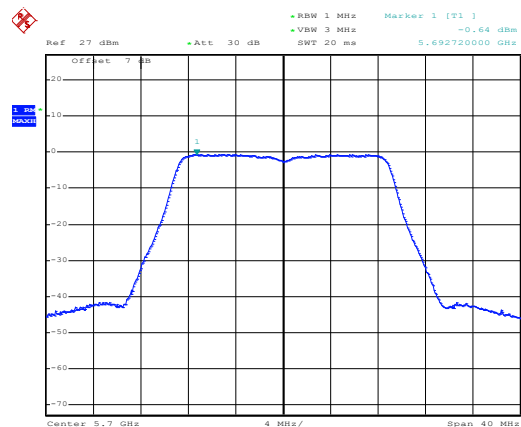

Date: 9.OCT.2019 17:48:21

Highest channel


802.11ac(HT40)

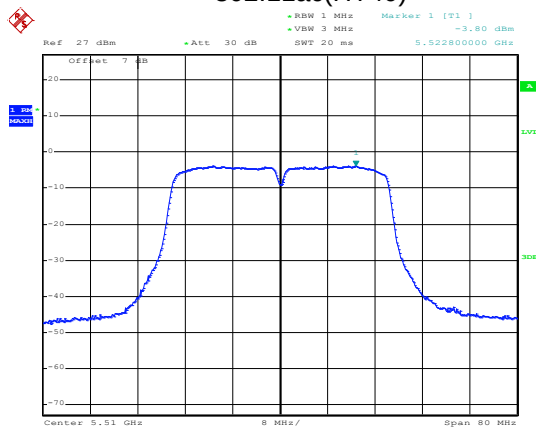

Date: 9.OCT.2019 17:44:42


Lowest channel

802.11ac(HT80)

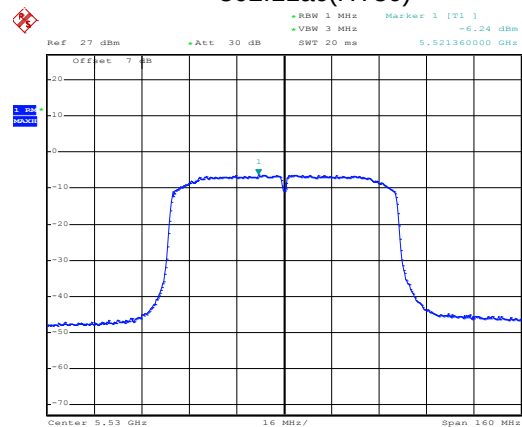


Date: 9.OCT.2019 17:43:55

Middle channel

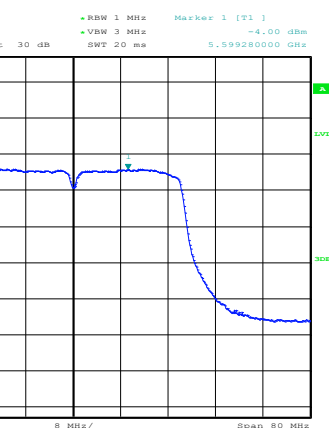


Date: 9.OCT.2019 17:45:11

Middle channel

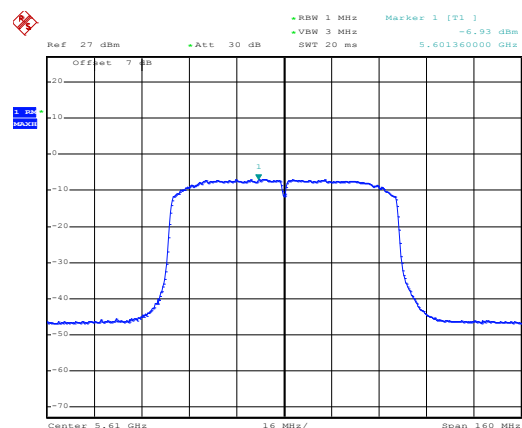

Date: 9.OCT.2019 17:43:32

Highest channel

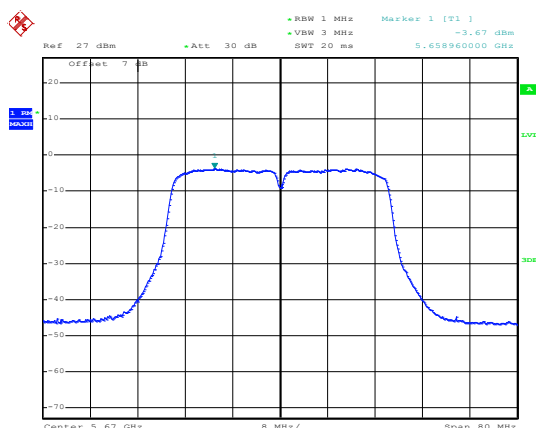


Date: 9.OCT.2019 17:45:34

Highest channel

Band 4


802.11a

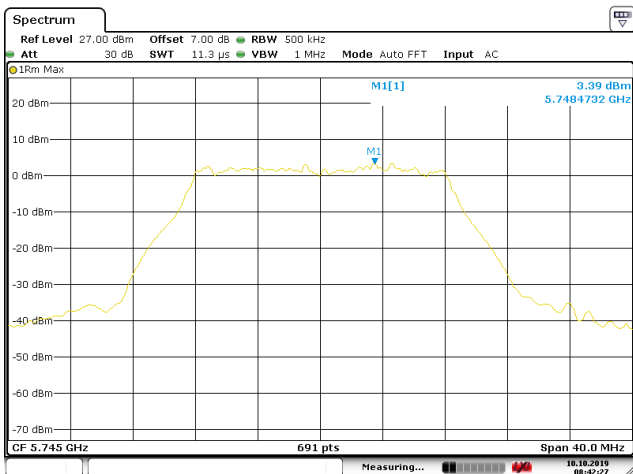

Date: 10.OCT.2019 08:42:27


Lowest channel

802.11n(HT20)

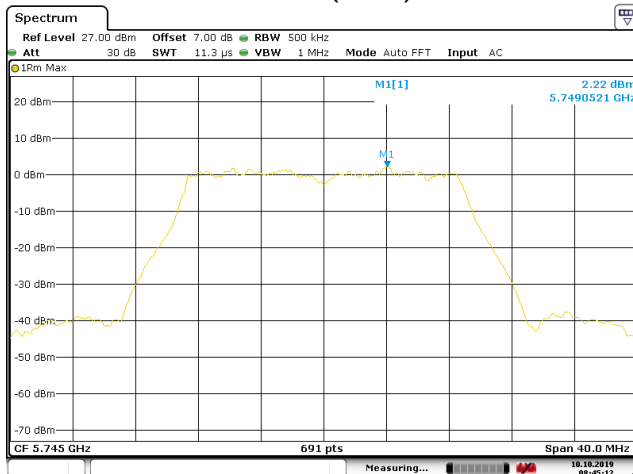


Date: 10.OCT.2019 08:45:12

Middle channel

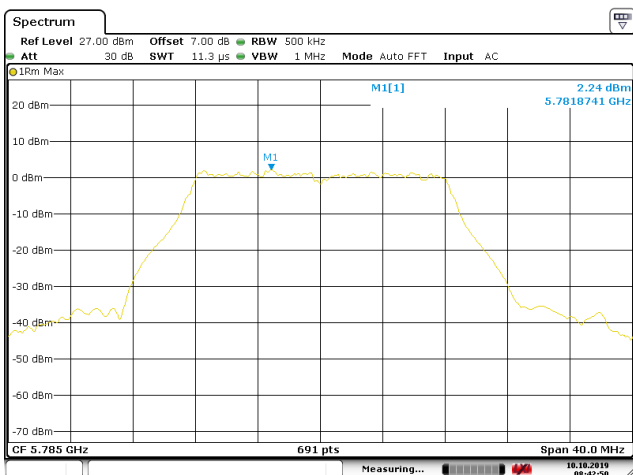


Date: 10.OCT.2019 08:42:50

Middle channel

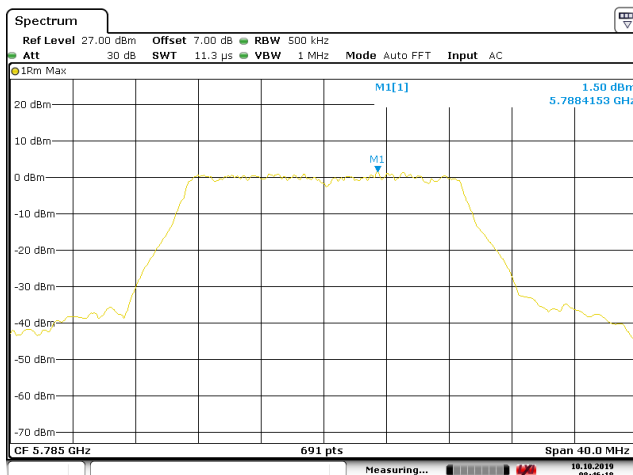


Date: 10.OCT.2019 08:46:18

Middle channel

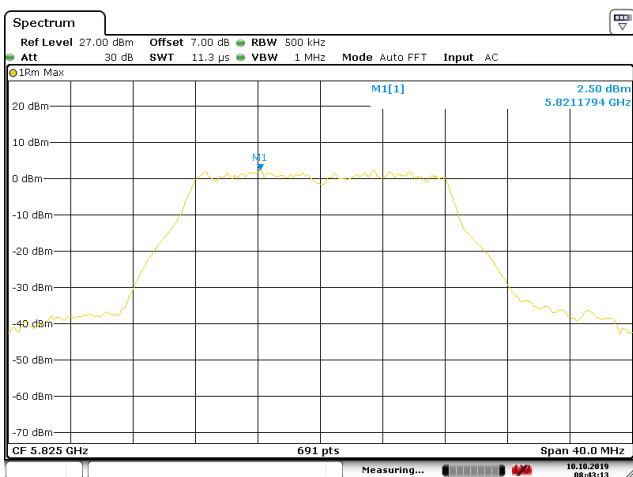


Date: 10.OCT.2019 08:43:13


Highest channel

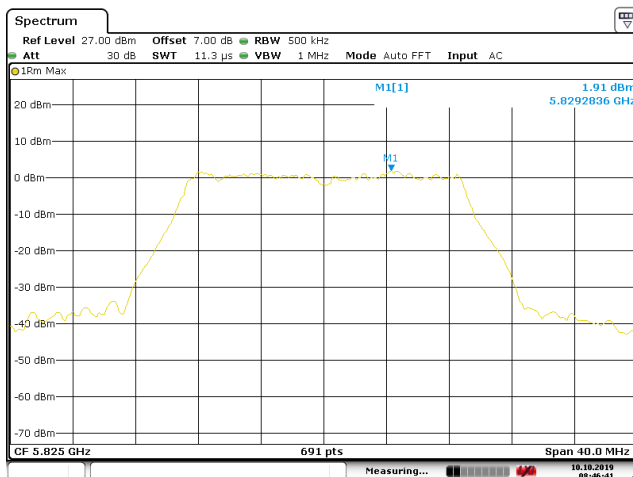

Date: 10.OCT.2019 08:46:41


Highest channel

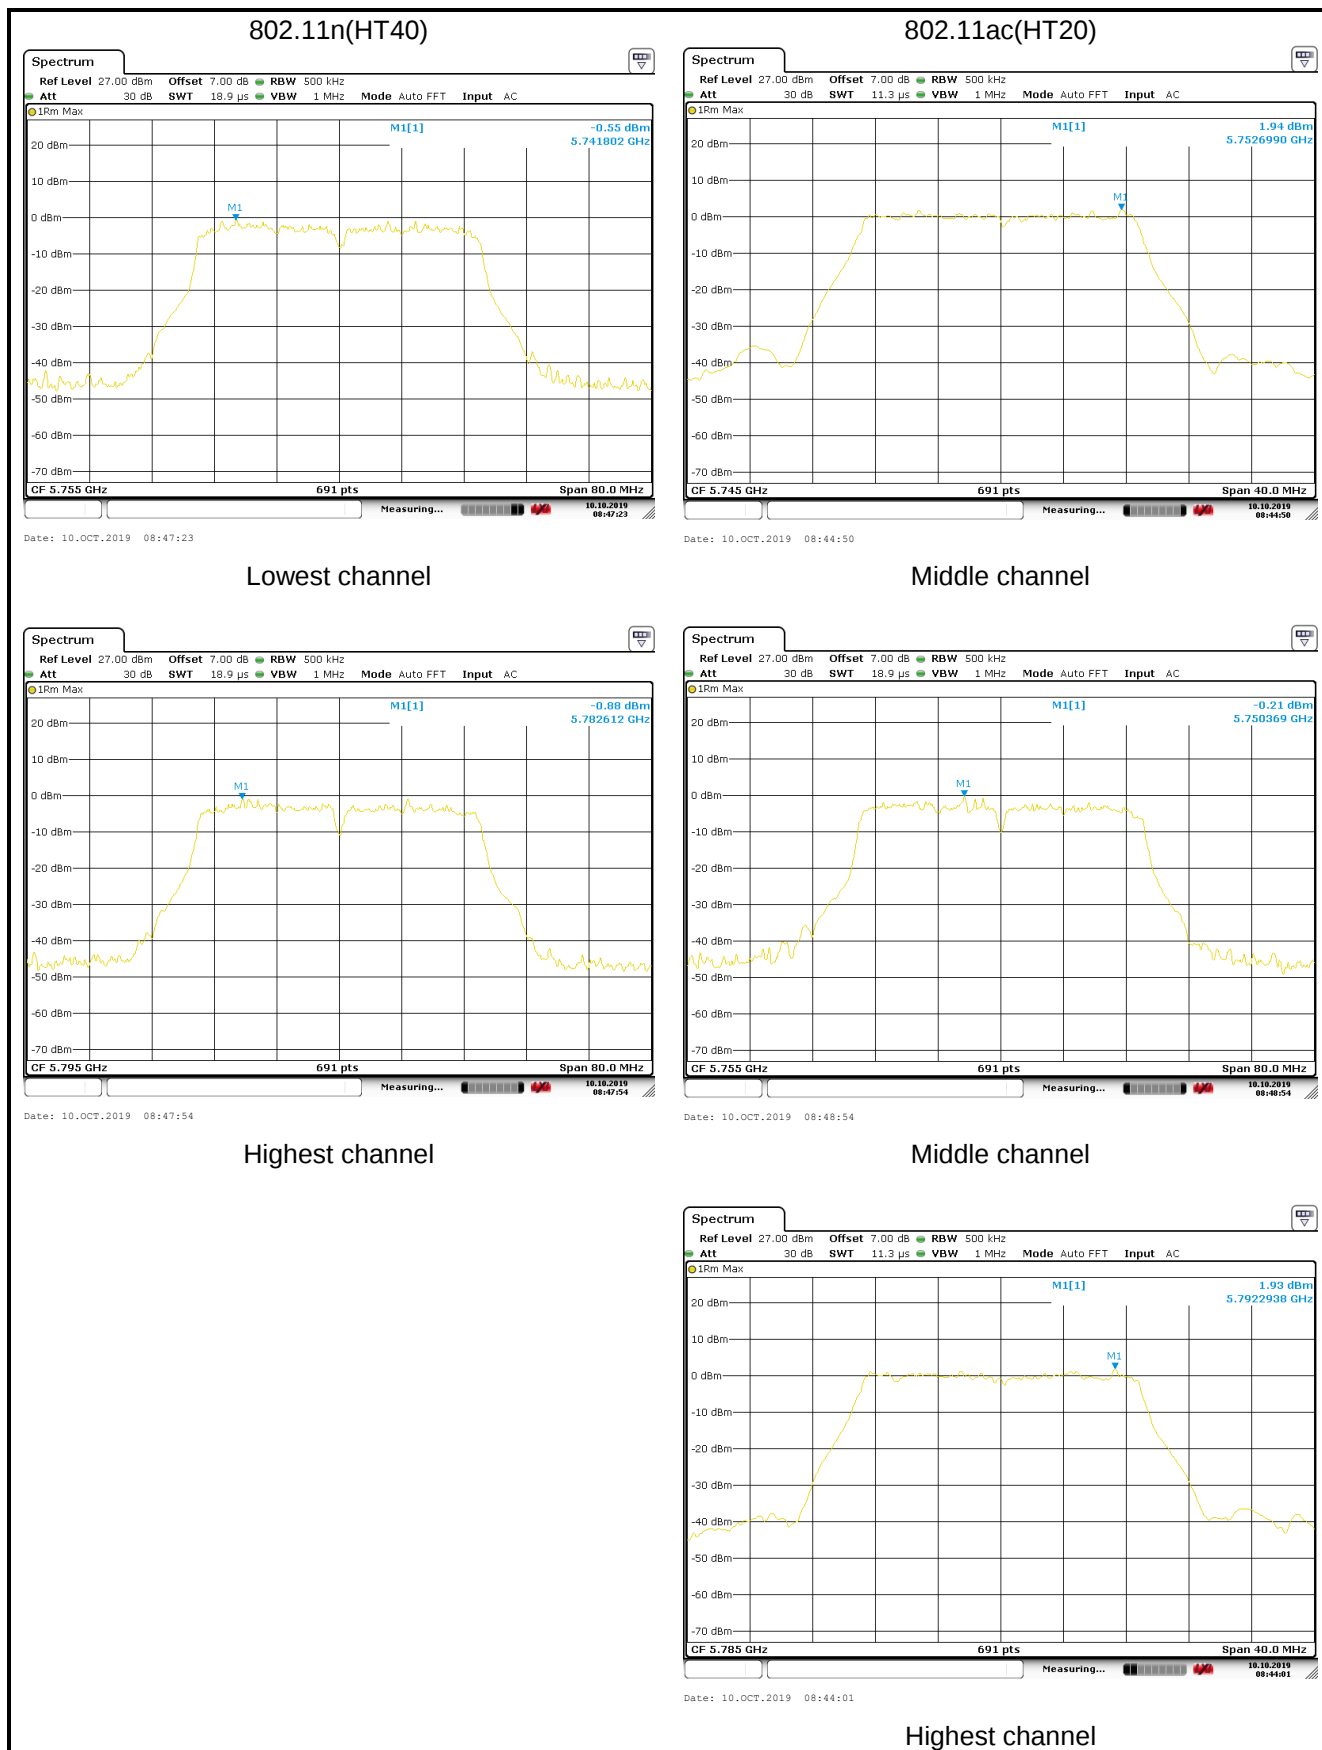

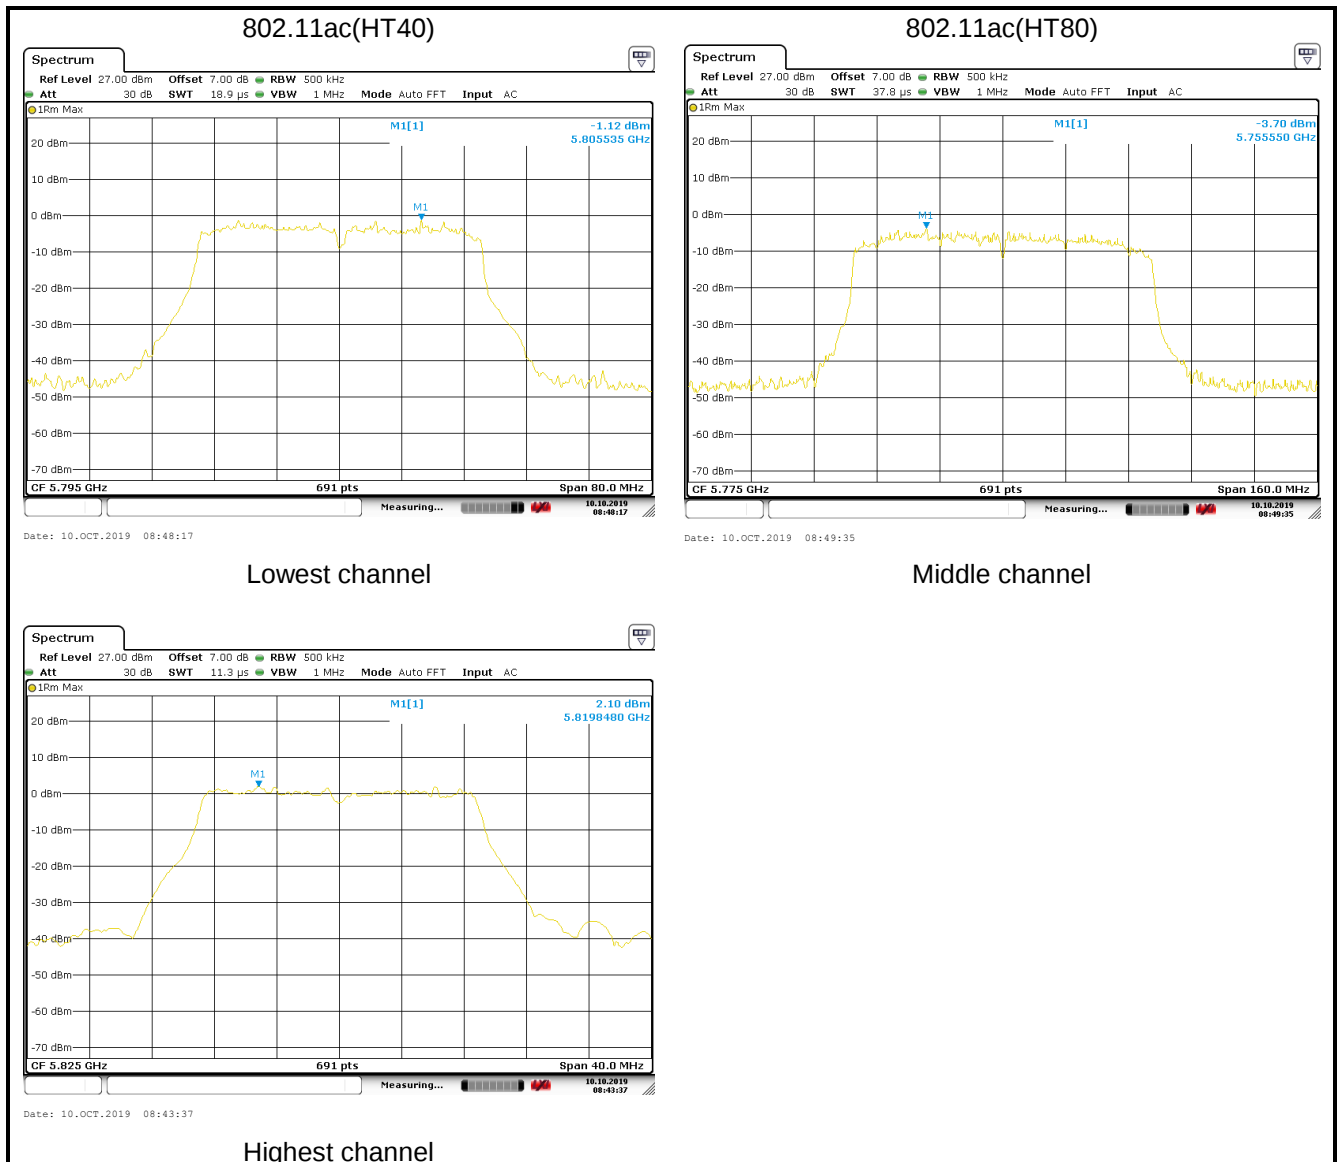

6.6 Band Edge

Test Requirement:	FCC Part 15 E Section 15.407 (b)			
Receiver setup:	Detector	RBW	VBW	Remark
	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	RMS	1MHz	3MHz	Average Value
Limit:	Band	Limit (dBuV/m @3m)		Remark
	Band 1/2/3	68.20		Peak Value
		54.00		Average Value
	Band 4	78.20		Peak Value
		54.00		Average Value
	Band 4 limit: For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	Remark: 1. Band 1/2/3 limit: E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBuV/m, for EIPR[dBm]=-27dBm.			
2. Band 4 limit: E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBuV/m, for EIPR[dBm]=-27dBm. E[dBμV/m] = EIRP[dBm] + 95.2=105.2 dBuV/m, for EIPR[dBm]=10dBm. E[dBμV/m] = EIRP[dBm] + 95.2=110.8 dBuV/m, for EIPR[dBm]=15.6dBm. E[dBμV/m] = EIRP[dBm] + 95.2=122.2 dBuV/m, for EIPR[dBm]=27dBm.				
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.			

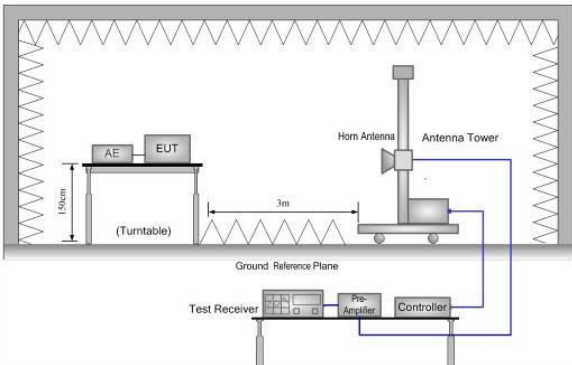Test setup:		
Test Instruments:	Refer to section 5.10 for details	
Test mode:	Refer to section 5.3 for details	
Test results:	Passed	

Measurement Data (worst case):

Band 1:

Band 1 – 802.11a								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.92	31.77	7.05	41.93	46.81	68.20	-21.39	Horizontal
5150.00	49.03	31.77	7.05	41.93	45.92	68.20	-22.28	Vertical
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	40.56	31.77	7.05	41.93	37.45	54.00	-16.55	Horizontal
5150.00	40.65	31.77	7.05	41.93	37.54	54.00	-16.46	Vertical
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.87	32.24	7.11	41.89	47.33	68.20	-20.87	Horizontal
5350.00	49.26	32.24	7.11	41.89	46.72	68.20	-21.48	Vertical
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.64	35.37	7.11	41.89	41.23	54.00	-12.77	Horizontal
5350.00	40.25	35.37	7.11	41.89	40.84	54.00	-13.16	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Band 1 – 802.11n(HT20)								
Test channel: Lowest channel								
Detector: Peak								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.85	31.77	7.05	41.93	46.74	68.20	-21.46	Horizontal
5150.00	49.64	31.77	7.05	41.93	46.53	68.20	-21.67	Vertical
Detector: Average								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	40.28	31.77	7.05	41.93	37.17	54.00	-16.83	Horizontal
5150.00	40.37	31.77	7.05	41.93	37.26	54.00	-16.74	Vertical
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.91	32.24	7.11	41.89	47.37	68.20	-20.83	Horizontal
5350.00	49.34	32.24	7.11	41.89	46.80	68.20	-21.40	Vertical
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.71	32.24	7.11	41.89	38.17	54.00	-15.83	Horizontal
5350.00	40.36	32.24	7.11	41.89	37.82	54.00	-16.18	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Band 1 – 802.11n(HT40)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.68	31.77	7.05	41.93	46.57	68.20	-21.63	Horizontal
5150.00	49.43	31.77	7.05	41.93	46.32	68.20	-21.88	Vertical
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	40.19	31.77	7.05	41.93	37.08	54.00	-16.92	Horizontal
5150.00	40.07	31.77	7.05	41.93	36.96	54.00	-17.04	Vertical
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.87	32.24	35.37	7.11	41.89	68.20	-26.31	Horizontal
5350.00	49.38	32.24	35.37	7.11	41.89	68.20	-26.31	Vertical
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.86	32.24	7.11	41.89	38.32	54.00	-15.68	Horizontal
5350.00	40.67	32.24	7.11	41.89	38.13	54.00	-15.87	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								