


Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT 40 Channel 151-159	Temperature	: 30 °C
Humidity	: 65%		

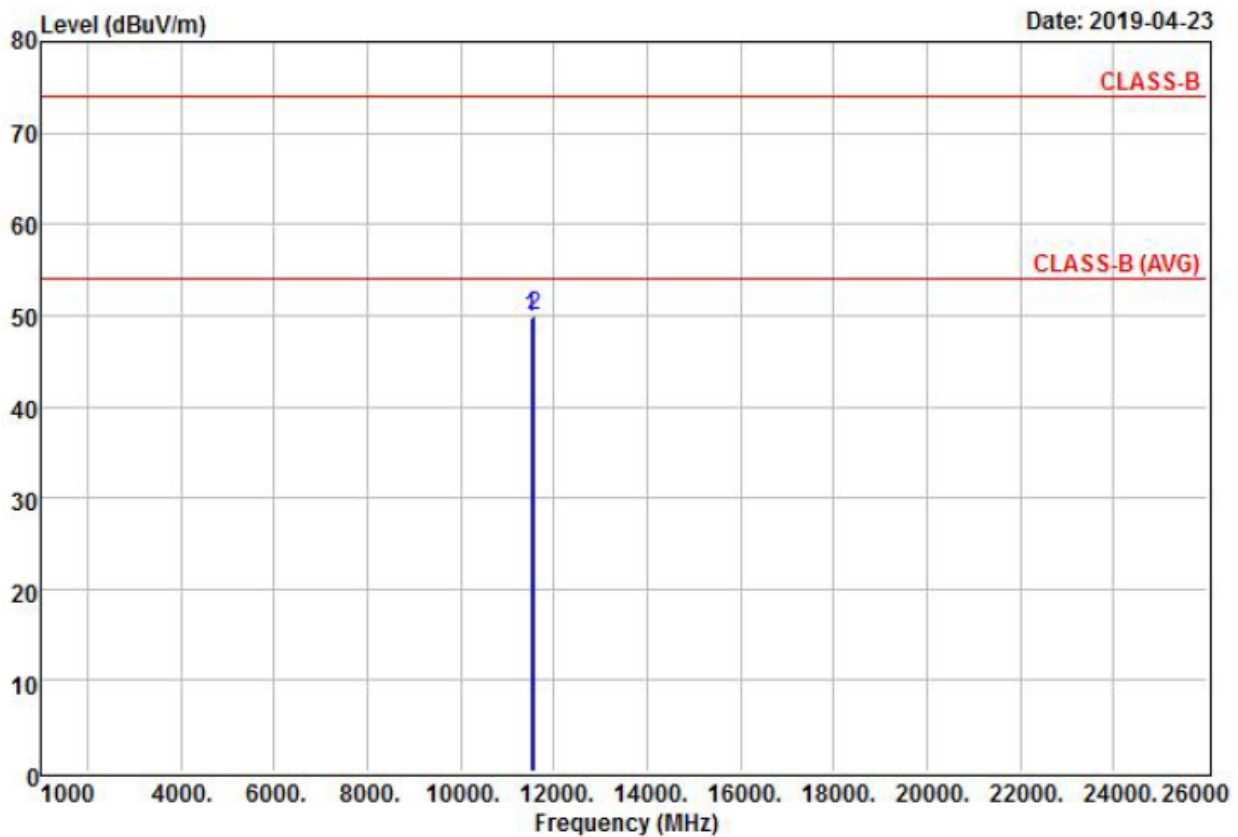

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	11510.00	41.35	8.40	49.75	74.00	-24.25 Peak
2 @	11590.00	41.58	8.40	49.98	74.00	-24.02 Peak

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

AS-AP515914DPK-W


Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a Channel 149-157-165	Temperature	: 30 °C
Humidity	: 65%		

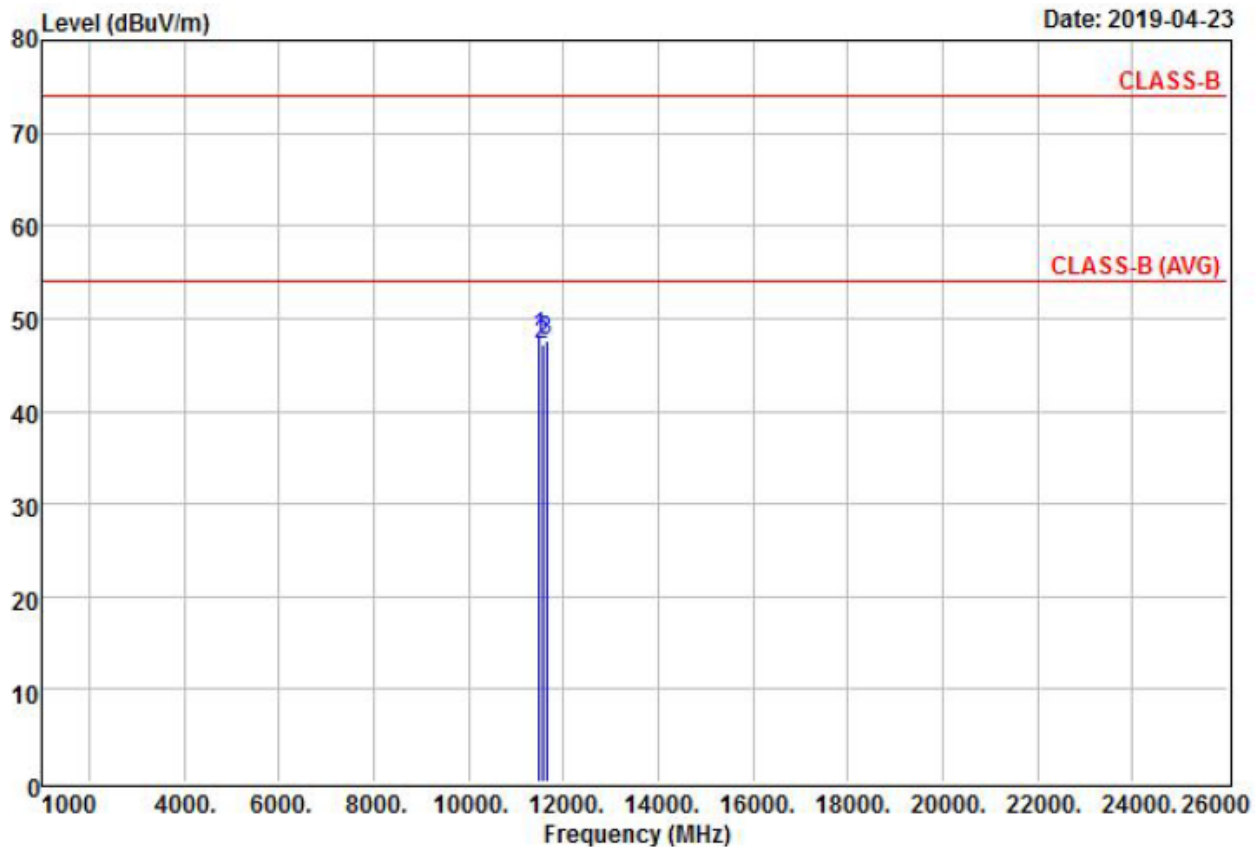

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read	Factor	Level	Limit	Over	
	MHz	Level			Line	Limit	Remark
		dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	11490.00	39.62	8.39	48.01	74.00	-25.99	Peak
2	11570.00	38.87	8.40	47.27	74.00	-26.73	Peak
3	11650.00	39.18	8.51	47.69	74.00	-26.31	Peak

Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11a Channel 149-157-165	Temperature	: 30 °C
Humidity	: 65%		

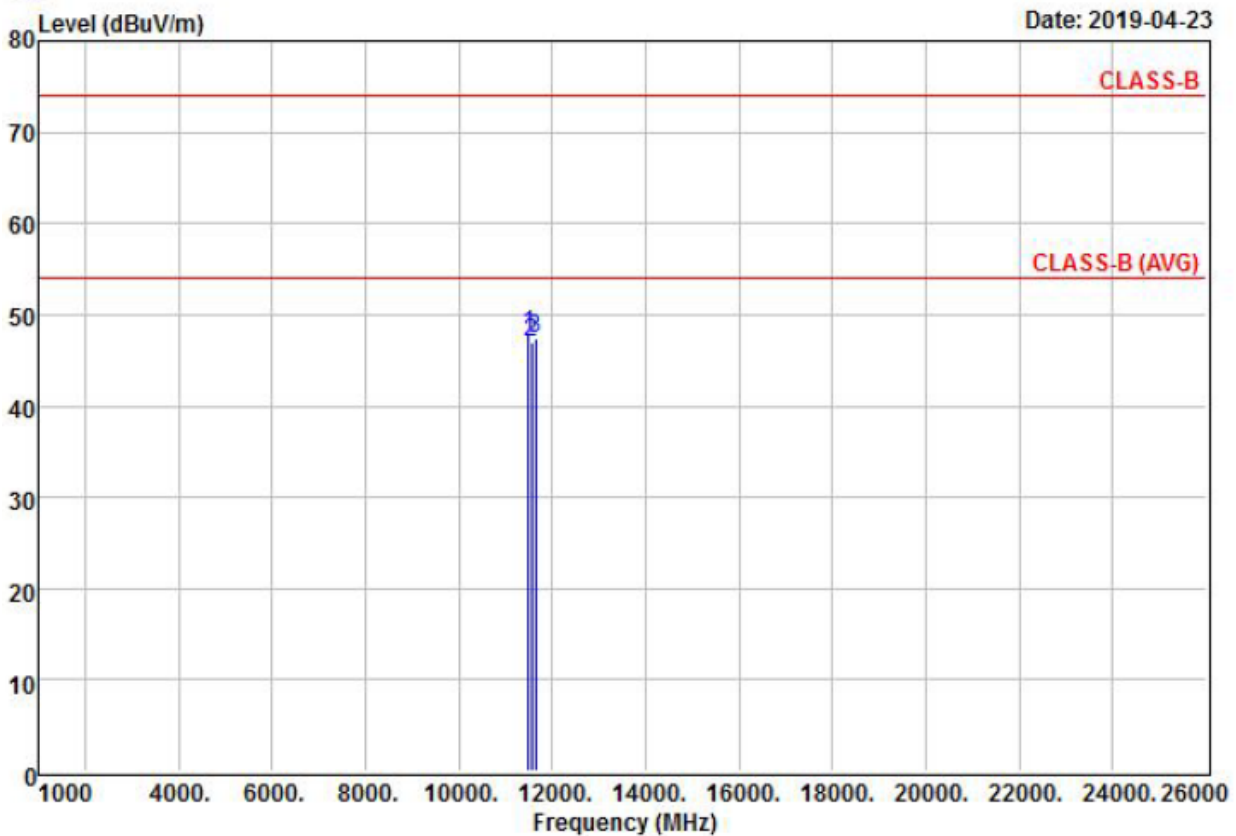


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	11490.00	39.43	8.39	47.82	74.00	-26.18	Peak
2	11570.00	38.47	8.40	46.87	74.00	-27.13	Peak
3	11650.00	38.79	8.51	47.30	74.00	-26.70	Peak

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.


Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT 20 Channel 149-157-165	Temperature	: 30 °C
Humidity	: 65%		

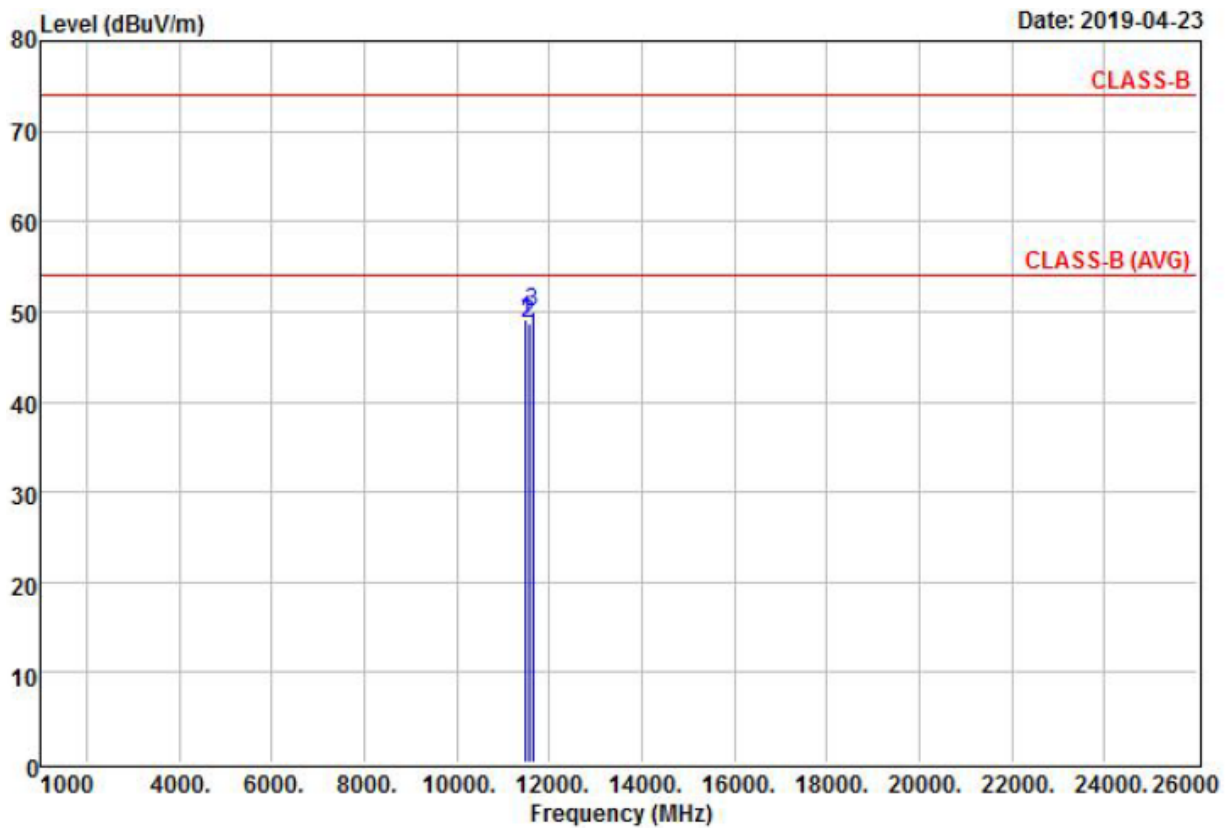

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	11490.00	40.81	8.39	49.20	74.00	-24.80	Peak
2	11570.00	40.39	8.40	48.79	74.00	-25.21	Peak
3 @	11650.00	41.46	8.51	49.97	74.00	-24.03	Peak

Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT 20 Channel 149-157-165	Temperature	: 30 °C
Humidity	: 65%		

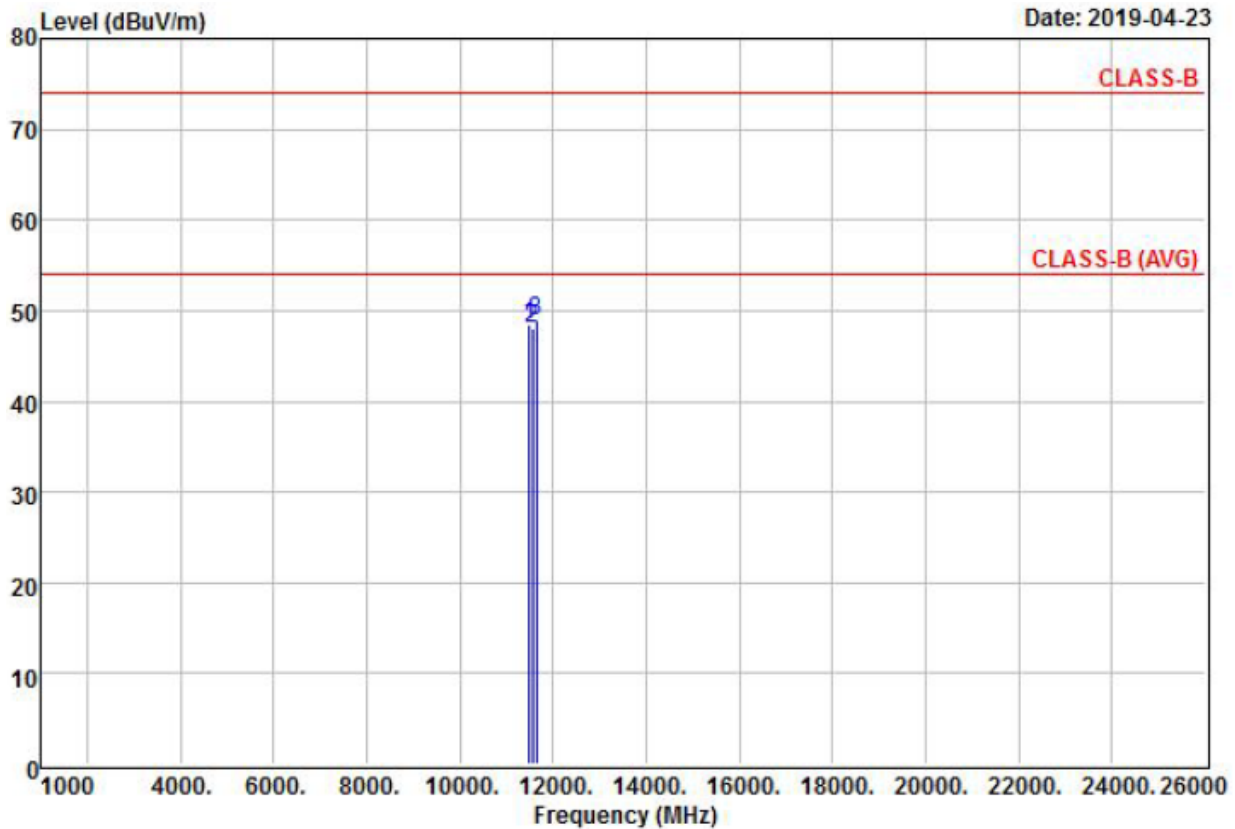


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	11490.00	40.16	8.39	48.55	74.00	-25.45	Peak
2	11570.00	39.63	8.40	48.03	74.00	-25.97	Peak
3 @	11650.00	40.38	8.51	48.89	74.00	-25.11	Peak

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT 40 Channel 151-159	Temperature	: 30 °C
Humidity	: 65%		

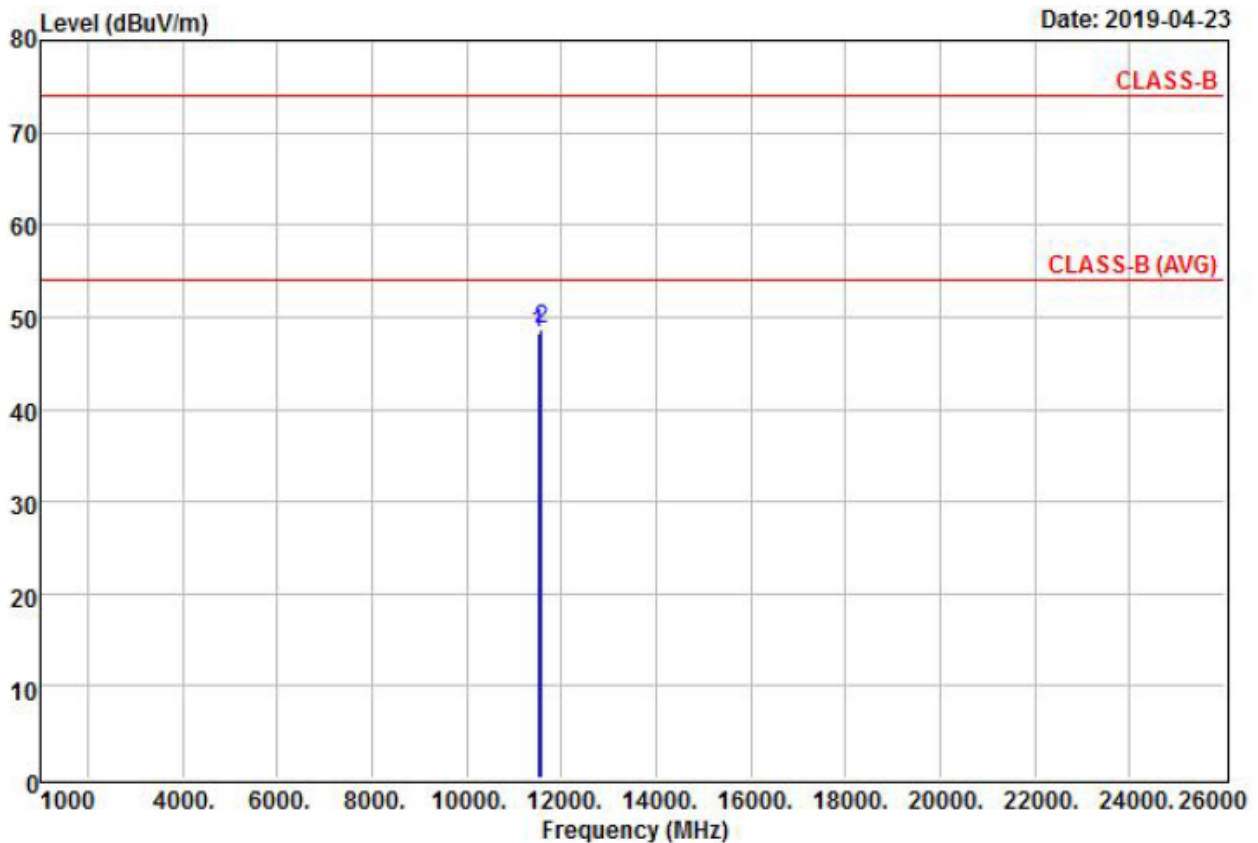


Remarks

: 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	11510.00	39.94	8.40	48.34	74.00	-25.66	Peak
2 @	11590.00	40.39	8.40	48.79	74.00	-25.21	Peak

Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT 40 Channel 151-159	Temperature	: 30 °C
Humidity	: 65%		

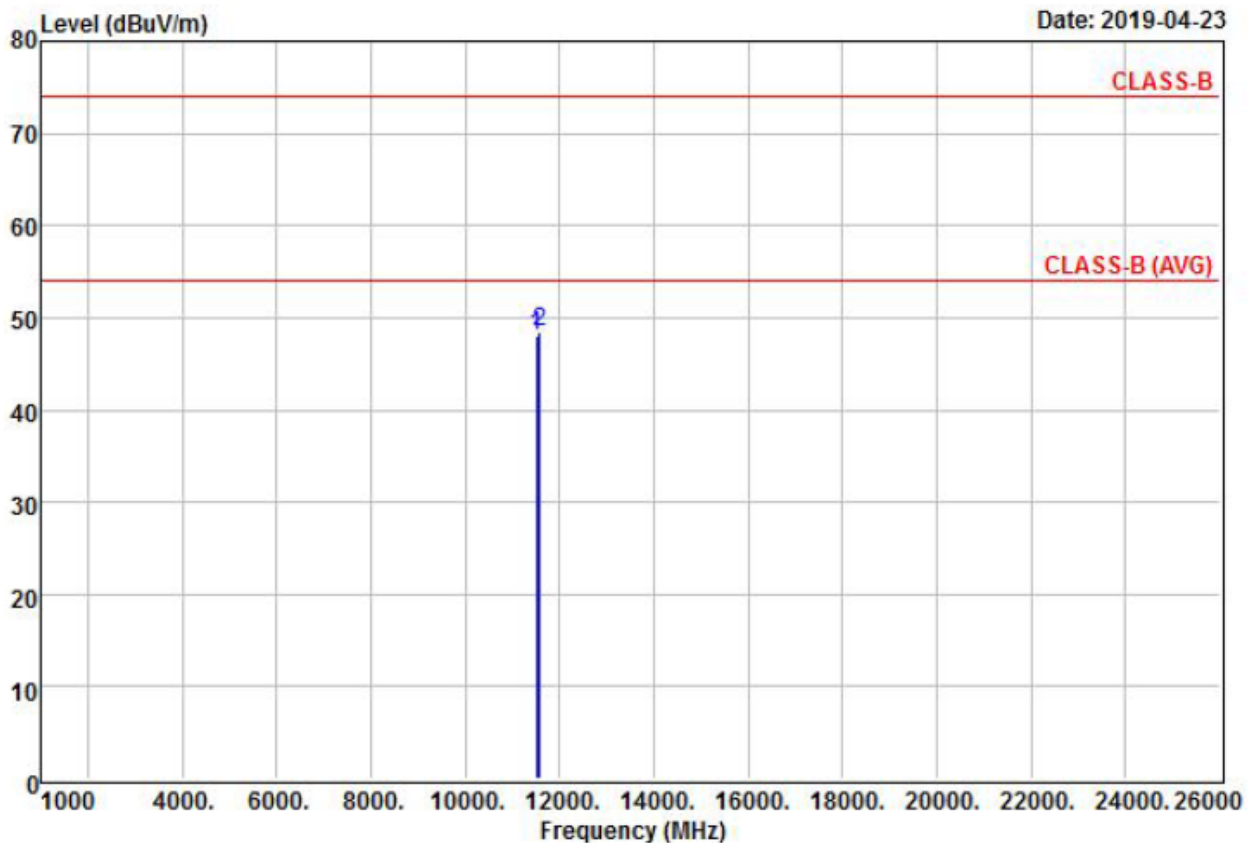

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	11510.00	39.66	8.40	48.06	74.00	-25.94	Peak
2 @	11590.00	40.01	8.40	48.41	74.00	-25.59	Peak


Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

7.7 Restricted Bands Test Result and Data

AS-AP515923DPK-W


Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

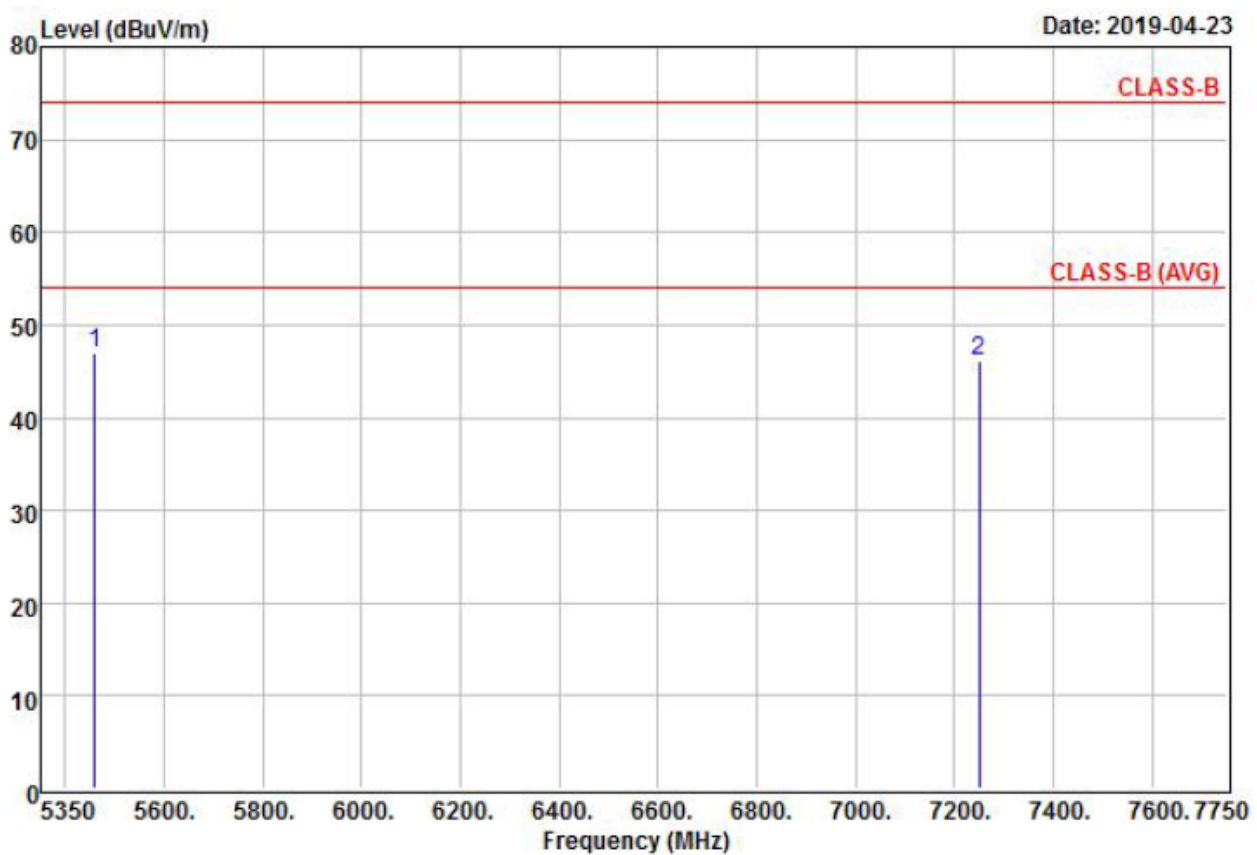

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	5460.00	51.05	-4.13	46.92	74.00	-27.08	Peak
2	7250.00	44.82	1.19	46.01	74.00	-27.99	Peak


Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11a Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

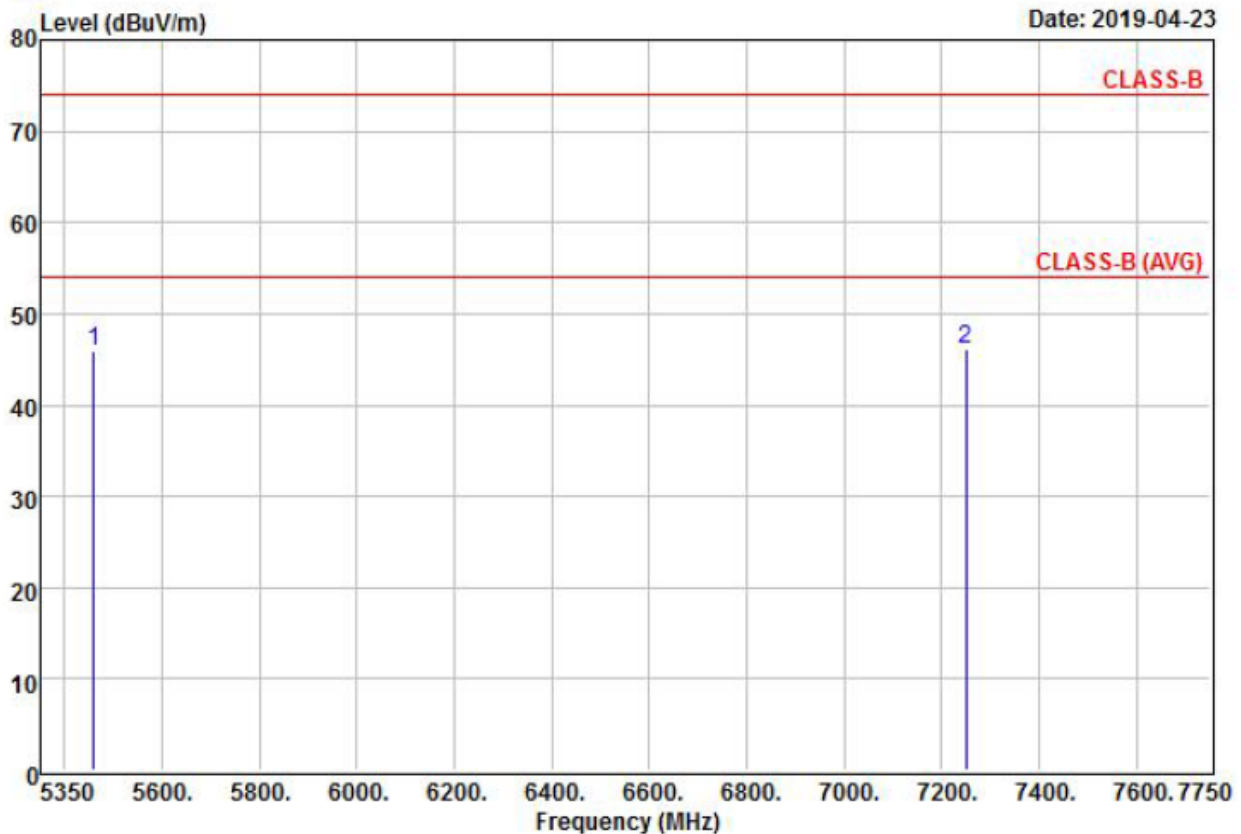

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5460.00	50.02	-4.13	45.89	74.00	-28.11	Peak
2 @	7250.00	44.84	1.19	46.03	74.00	-27.97	Peak

Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT 20 Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

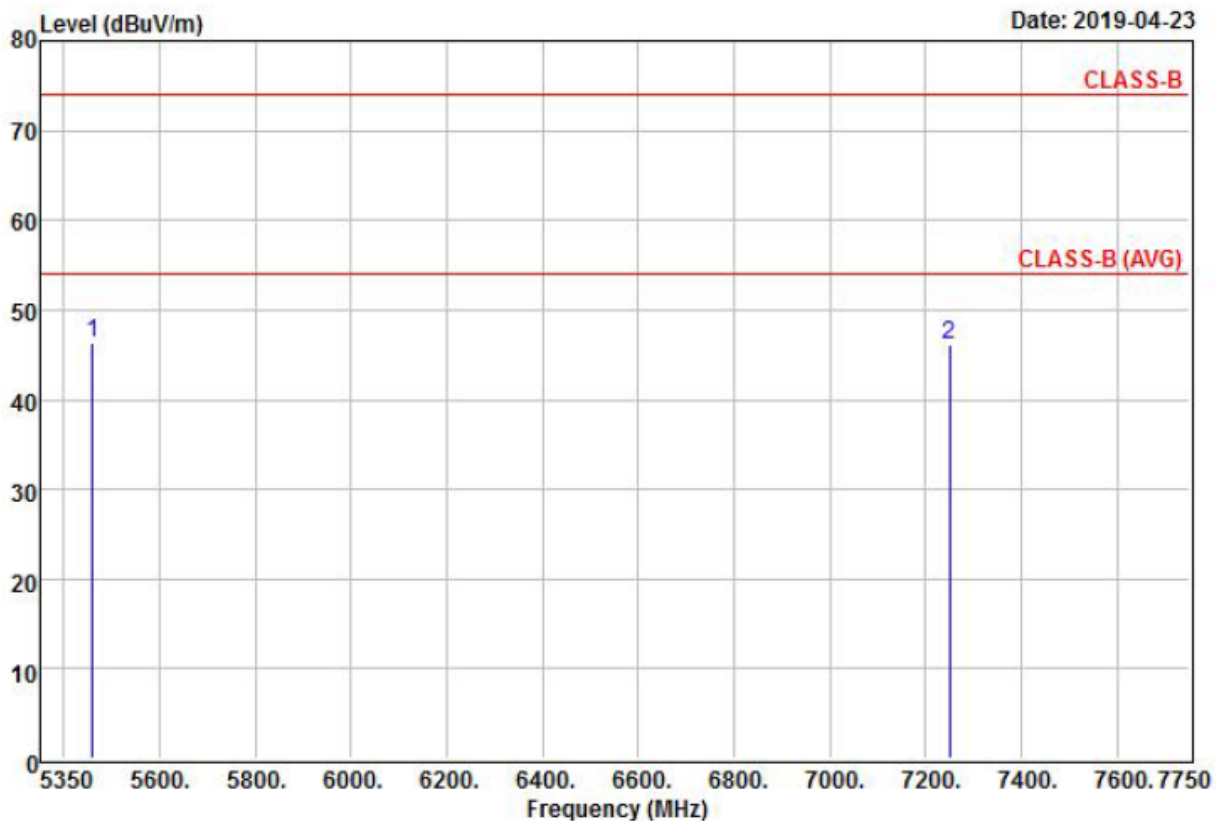


Remarks

: 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	5460.00	50.37	-4.13	46.24	74.00	-27.76	Peak
2	7250.00	44.99	1.19	46.18	74.00	-27.82	Peak

Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT 20 Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

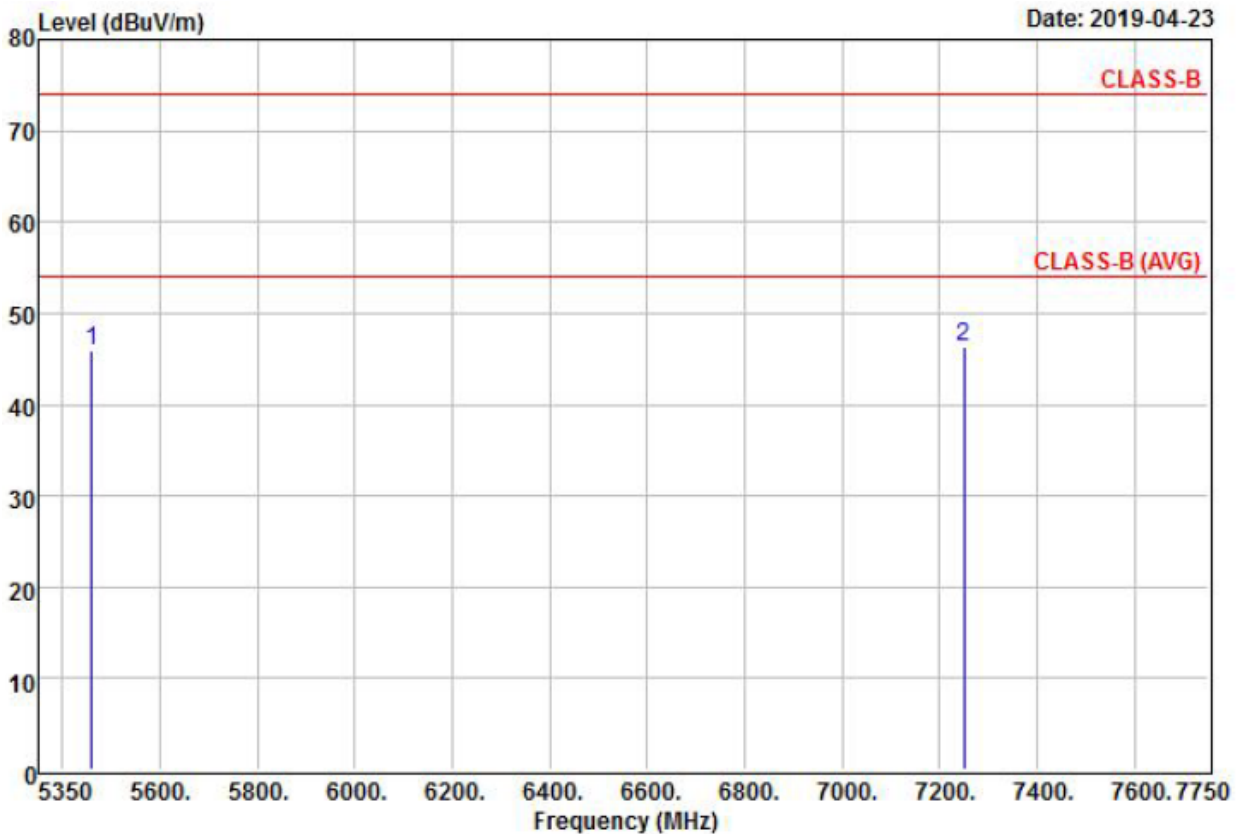


Remarks

: 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5460.00	50.06	-4.13	45.93	74.00	-28.07	Peak
2 @	7250.00	45.14	1.19	46.33	74.00	-27.67	Peak

Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT 40 Channel 151-159	Temperature	: 30 °C
Humidity	: 65%		

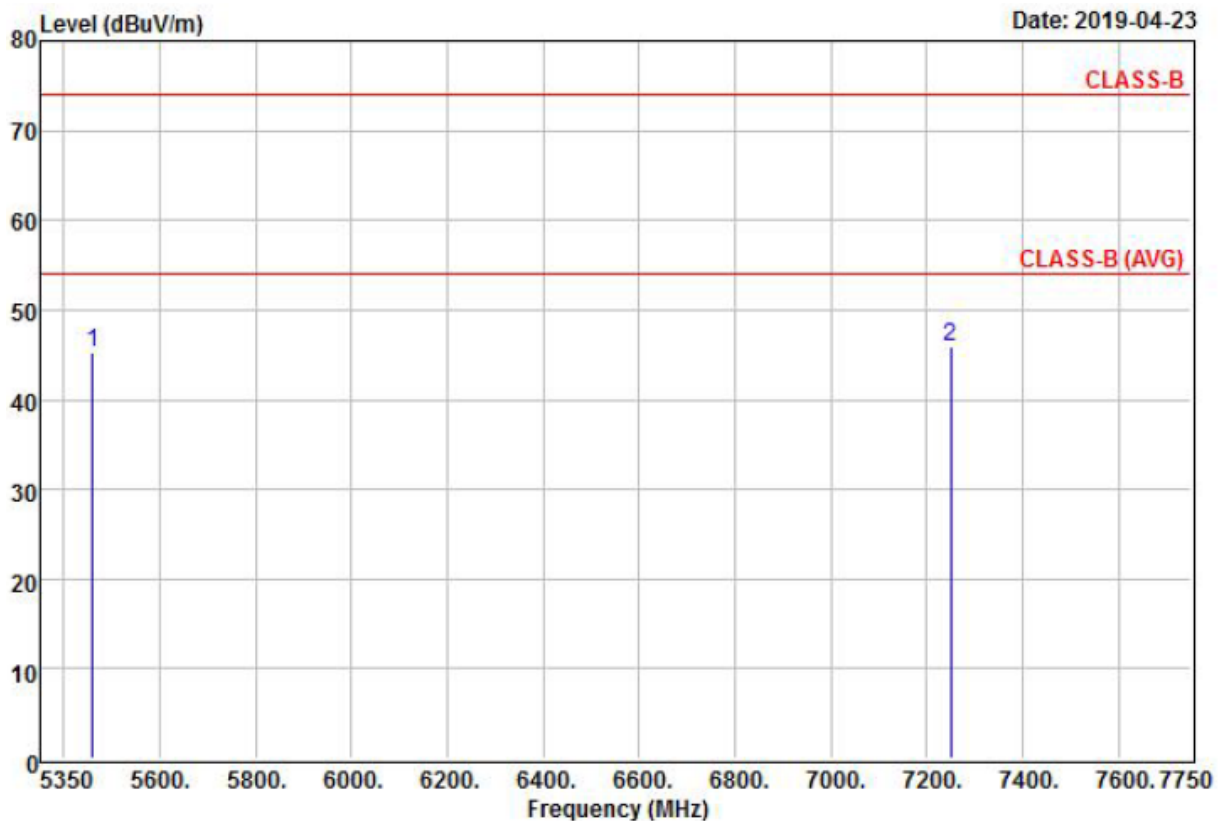


Remarks

: 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5460.00	49.41	-4.13	45.28	74.00	-28.72	Peak
2 @	7250.00	44.65	1.19	45.84	74.00	-28.16	Peak

Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT 40 Channel 151-159	Temperature	: 30 °C
Humidity	: 65%		

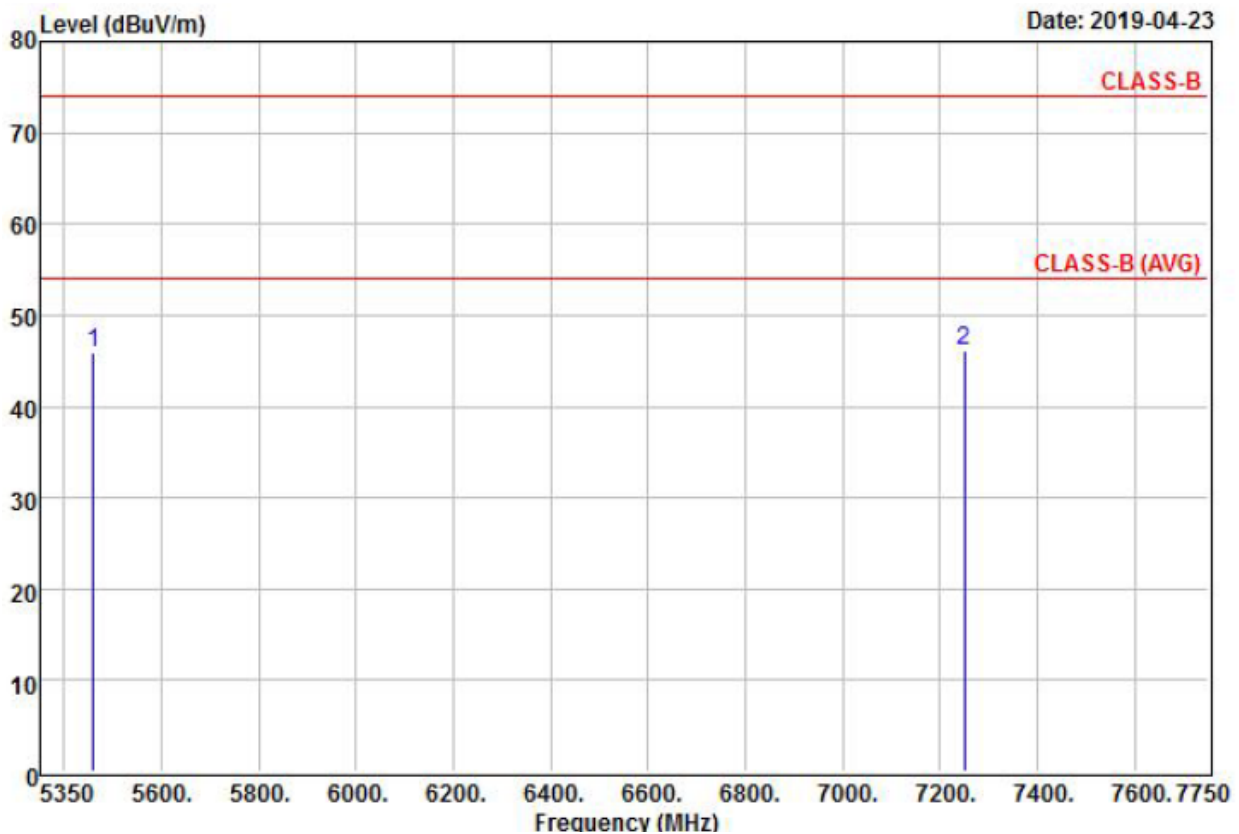


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5460.00	50.01	-4.13	45.88	74.00	-28.12	Peak
2 @	7250.00	44.97	1.19	46.16	74.00	-27.84	Peak

AS-AP515918DPK-W


Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

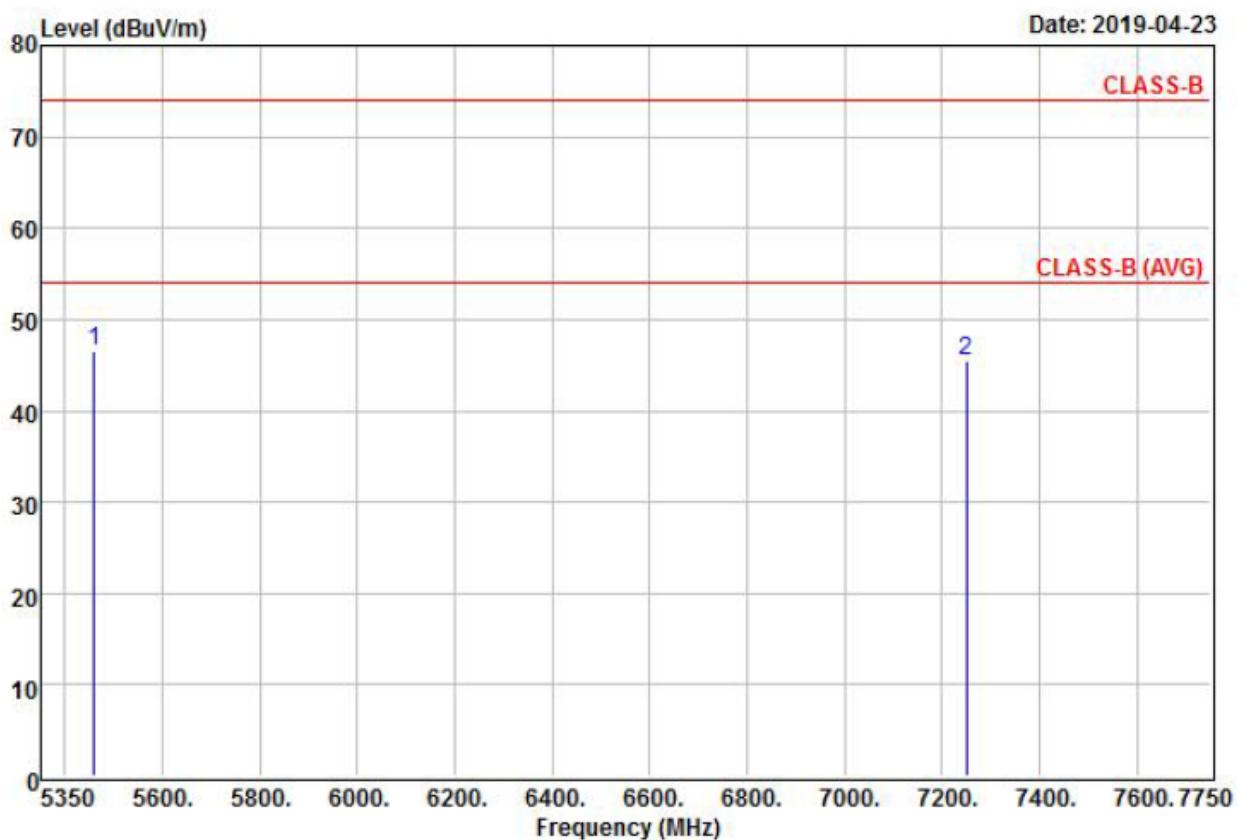

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	5460.00	50.71	-4.13	46.58	74.00	-27.42	Peak
2	7250.00	44.30	1.19	45.49	74.00	-28.51	Peak


Power	: POE	Pol/Phase	: VERTICAL
Test Mode	: 802.11a Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

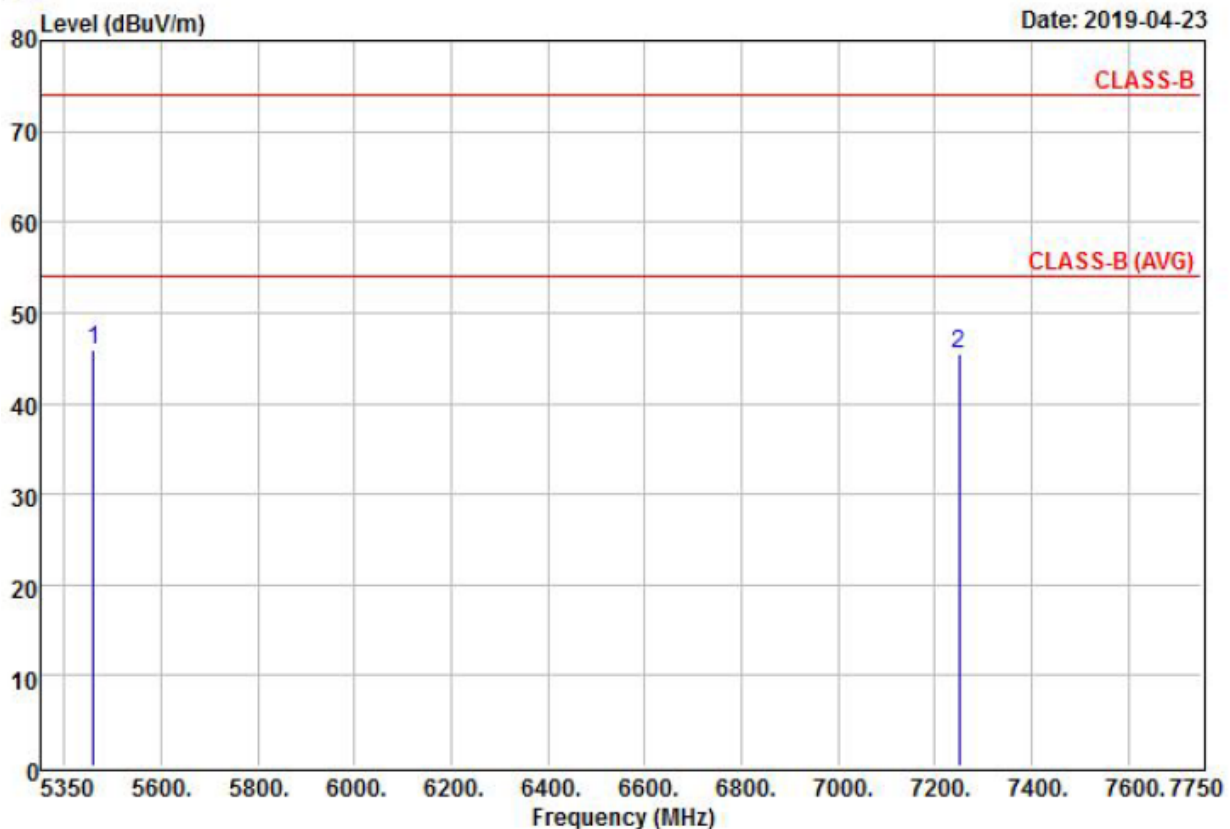

Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	5460.00	50.10	-4.13	45.97	74.00	-28.03	Peak
2	7250.00	44.24	1.19	45.43	74.00	-28.57	Peak

Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT 20 Channel 149-165	Temperature	: 30 °C
Humidity	: 65%		

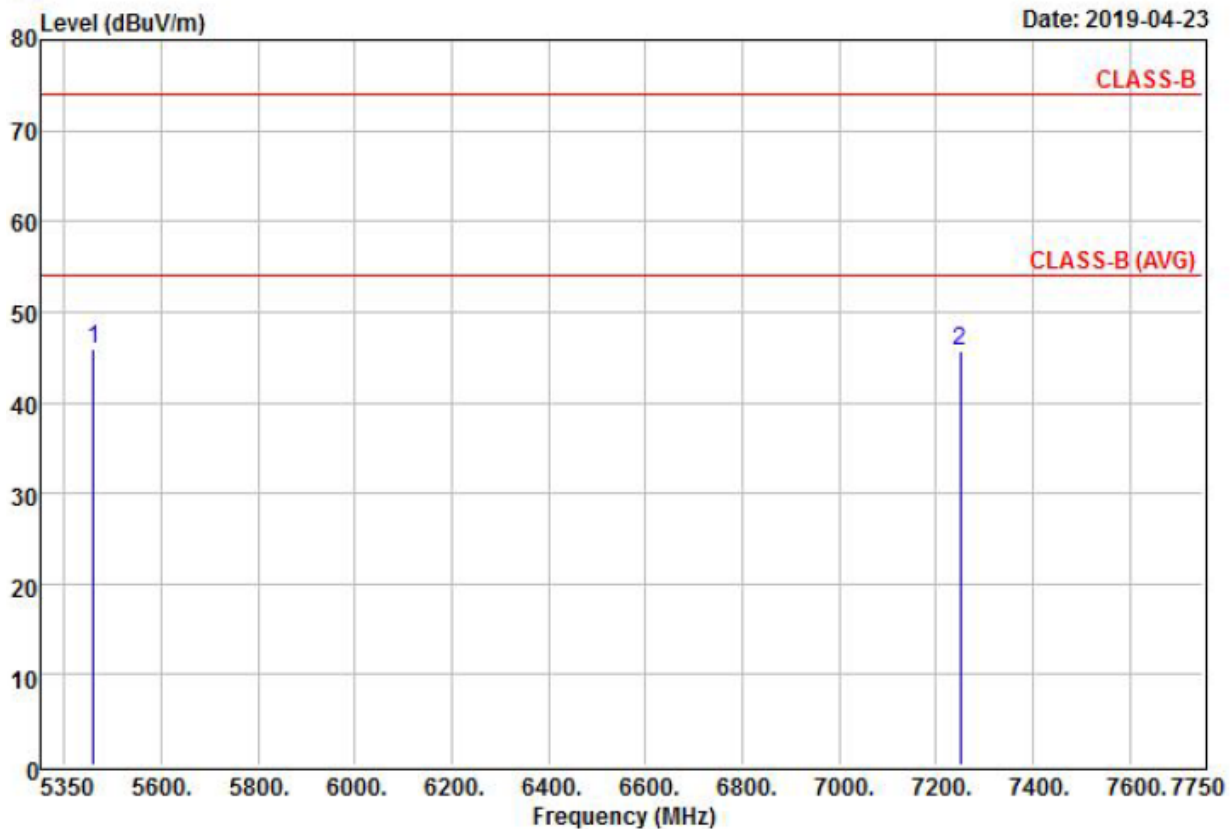

Remarks

: 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	5460.00	50.13	-4.13	46.00	74.00	-28.00	Peak
2	7250.00	44.58	1.19	45.77	74.00	-28.23	Peak