



FCC Test Report

Product Name : Handheld Remote Methane Leak Detector

Model No. : HS4000

Applicant : Hesai Photonics Technology Co.,Ltd.

Address : Rm. J385, Building 6, No. 1288, Yecheng Rd., Jiading Dist.,
Shanghai City, China

Date of Receipt : Jun.13, 2019

Test Date : Jun.14, 2019 ~ Jun.19, 2019

Issued Date : Jul. 02, 2019

Report No. : 1962024E-IT-US-P01V01

Report Version : V1.0

The test results presented in this report relate only to the object tested.

This report is not used for social proof in China (or Mainland China) market

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.

This report must not be used to claim product endorsement by TAF or any agency of the government.


This report shall not be reproduced, except in full, without the written approval of the Issuing DEKRA Testing and Certification (Suzhou) Co., Ltd.


Issued Date : Jul. 02, 2019
Report No. : 1962024E-IT-US-P01V01



Product Name : Handheld Remote Methane Leak Detector
Applicant : Hesai Photonics Technology Co.,Ltd.
Address : Rm. J385, Building 6, No. 1288, Yecheng Rd., Jiading Dist.,
Shanghai City, China
Manufacturer(1) : Hesai Photonics Technology Co., Ltd.
Address(1) : Building B, 468 Xinlai Rd, Xuhang Town, Jiading District,
Shanghai City, China
Manufacturer(2) : Oxigraf, Inc.
Address(2) : 238 East Caribbean Drive Sunnyvale, CA 94089 USA
Model No. : HS4000
Brand Name : N/A
EUT Voltage : AC 100-240V / 50-60Hz, DC 7.2V
Test Voltage : AC 120V/60Hz,DC 7.2V
Applicable Standard : FCC CFR Title 47 Part 15 Subpart B: 2018 Class B
ANSI C63.4: 2014
ICES-003 Issue 6: 2017 Class B
Test Result : Complied
Performed Location : DEKRA Testing and Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou,215006,
Jiangsu, China
TEL: +86-512-62515088 / FAX: +86-512-62515098

This report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

Documented By : 
(Project Officer: Angila Zhang)

Reviewed By : 
(Supervisor: Black Hao)


Approved By : 
(Manager: Jerry Pan)

TABLE OF CONTENTS

Description	Page
1. General Information	4
1.1. EUT Description	4
1.2. Mode of Operation	4
1.3. Tested System Details	4
1.4. Configuration of Tested System	5
1.5. EUT Exercise Software	5
2. Technical Test	6
2.1. Summary of Test Result	6
2.2. List of Test Equipment	7
2.3. Measurement Uncertainty	7
3. Conducted disturbance	10
3.1. Test Specification	10
3.2. Test Setup	10
3.3. Limit	11
3.4. Test Procedure	11
3.5. Deviation from Test Standard	11
3.6. Test Result	12
3.7. Test Photograph	14
4. Radiated disturbance	15
4.1. Test Specification	15
4.2. Test Setup	15
4.3. Limit	16
4.4. Test Procedure	17
4.5. Deviation from Test Standard	18
4.6. Test Result	19
4.7. Test Photograph	23
5. Attachment	25
EUT Photograph	25

1. General Information

1.1. EUT Description

Product Name	Handheld Remote Methane Leak Detector
Model No.	HS4000
Brand Name	N/A

Note 1: This appendix report was based on report No. 1932089E, only add an adapter.

Component	
AC Adapter	MFR: Phihong Technology Co.,Ltd. M/N: PSAA20R-120L6 Input: AC 100-240V, 50/60Hz, 0.5A, 32-46VA Output: DC 12V,1.67A

1.2. Mode of Operation

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Final Test Mode
Mode 1: Battery Charging

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
N/A	N/A	N/A	N/A	N/A

1.4. Configuration of Tested System

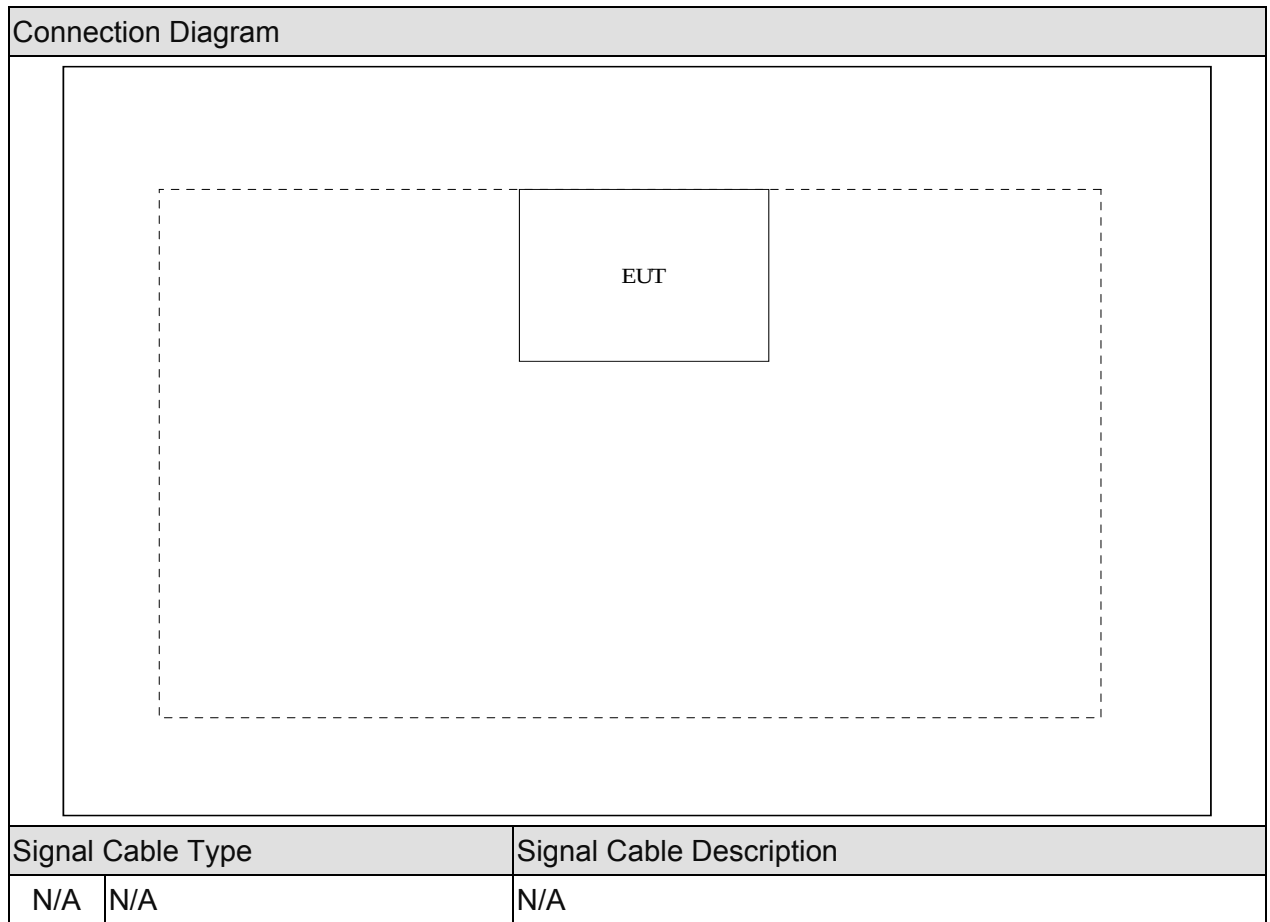

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Confirm the EUT working normally.
4	Start test.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
☐ Deviations from the test standards as below description:

Emission			
Performed Test Item	Normative References	Test Performed	Deviation
Conducted disturbance	FCC CFR Title 47 Part 15 Subpart B: 2018 Class B ANSI C63.4: 2014 ICES-003 Issue 6: 2017 Class B	Yes	No
Radiated disturbance	FCC CFR Title 47 Part 15 Subpart B: 2018 Class B ANSI C63.4: 2014 ICES-003 Issue 6: 2017 Class B	Yes	No

2.2. List of Test Equipment

Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cali. Date	Cali. Due Date
EMI Test Receiver	R&S	ESCI	100906	2019.04.20	2020.04.19
Two-Line V-Network	R&S	ENV216	101190	2019.05.25	2020.05.24
Two-Line V-Network	R&S	ENV216	101044	2019.05.25	2020.05.24
Current Probe	R&S	EZ-17	100678	2019.03.12	2020.03.11
50ohm Termination	SHX	TF2	07081402	2018.09.08	2019.09.07
50ohm Termination	SHX	TF2	07081403	2018.09.08	2019.09.07
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Coaxial Cable	Suhner	RG 223	TR1-C1	2018.09.27	2019.09.26
Temperature/Humidity Meter	ruitesi	RTS-8S	TR1-TH	2018.10.24	2019.10.23
Software	Quietek	EMI_V3	V3.0.0	N/A	N/A

Radiated Emission / AC1

Instrument	Manufacturer	Model No.	Serial No.	Cali. Date	Cali. Due Date
EMI Test Receiver	R&S	ESCI	100175	2018.09.08	2019.09.07
EMI Test Receiver	R&S	ESCI	100726	2019.05.25	2020.05.24
Preamplifier	Quietek	AP-025C	CHM-0602008	2019.04.13	2020.04.12
Preamplifier	Quietek	AP-025C	CHM-0503006	2019.04.13	2020.04.12
Bilog Antenna	Schaffner	CBL6112B	2931	2019.05.11	2019.05.10
Bilog Antenna	Schaffner	CBL6112B	2933	2019.05.11	2019.05.10
Coaxial Cable	Huber+Suhner	RG 214_U	AC1-L	2018.10.10	2019.10.09
Coaxial Cable	Huber+Suhner	RG 214_U	AC1-R	2018.10.10	2019.10.09
Temperature/Humidity Meter	ruitesi	RTS-8S	AC1-TH	2018.10.24	2019.10.23
Software	Quietek	EMI_V3	V3.0.0	N/A	N/A

Radiated Emission / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cali. Date	Cali. Due Date
EMI Test Receiver	R&S	ESCI	100573	2019.03.03	2020.03.02
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2019.05.25	2020.05.24
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2019.04.13	2020.04.12
Temperature/Humidity Meter	ruitesi	RTS-8S	AC2-TH	2018.10.24	2019.10.23
Software	Quietek	EMI_V3	V3.0.0	N/A	N/A

Radiated Emission / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cali. Date	Cali. Due Date
EMI Test Receiver	R&S	ESCI	100176	2018.09.08	2019.09.07
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2019.05.25	2020.05.24
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2019.04.13	2020.04.12
Temperature/Humidity Meter	ruitesi	RTS-8S	AC3-TH	2018.10.24	2019.10.23

Software	Quietek	EMI_V3	V3.0.0	N/A	N/A
----------	---------	--------	--------	-----	-----

Radiated Emission / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cali. Date	Cali. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2019.05.25	2020.05.24
low Noise Amplifier	BXT	NA2651D	LNA17040209	2018.07.16	2019.07.15
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2019.05.25	2020.05.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2019.04.13	2020.04.12
Pre-Amplifier		EMC184045SE	980263	2018.09.08	2019.09.07
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2019.04.25	2020.04.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2019.03.23	2021.03.22
Temperature/Humidity Meter	ruitesi	RTS-8S	AC5-TH	2018.10.24	2019.10.23
Software	Quietek	EMI_V3	V3.0.0	N/A	N/A

2.3. List of Test Equipment

Tests have been performed in a controlled laboratory environment, where the environmental conditions are maintained within the applicable ranges.

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10-40	
	Humidity (%RH)	25-75	
	Barometric pressure (mbar)	860-1060	
Radiated Emission (30~1000MHz)	Temperature (°C)	10-40	
	Humidity (%RH)	25-75	
	Barometric pressure (mbar)	860-1060	
Radiated Emission (1~400GHz)	Temperature (°C)	10-40	
	Humidity (%RH)	25-75	
	Barometric pressure (mbar)	860-1060	

2.4. Measurement Uncertainty


Conducted disturbance / TR1	
The maximum measurement uncertainty is evaluated as:	
9kHz~150kHz: 2.80dB	
150kHz~30MHz: 2.40dB	
Radiated disturbance / AC1	
The maximum measurement uncertainty is evaluated as:	
Horizontal:	30MHz~300MHz: 3.50 dB
	300MHz~1GHz: 3.20 dB
	1GHz~18GHz: 4.80 dB
Vertical:	30MHz~300MHz: 3.60 dB
	300MHz~1GHz: 3.10 dB
	1GHz~18GHz: 4.50 dB
Radiated disturbance / AC2	
The maximum measurement uncertainty is evaluated as:	
Horizontal:	30MHz~300MHz: 3.60 dB
	300MHz~1GHz: 3.10 dB
Vertical:	30MHz~300MHz: 3.20 dB
	300MHz~1GHz: 3.20 dB
Radiated disturbance / AC3	
The maximum measurement uncertainty is evaluated as:	
Horizontal:	30MHz~300MHz: 3.50 dB
	300MHz~1GHz: 3.60 dB
Vertical:	30MHz~300MHz: 3.60 dB
	300MHz~1GHz: 3.50 dB
Radiated disturbance / AC5	
The maximum measurement uncertainty is evaluated as:	
Horizontal:	30MHz~300MHz: 3.90 dB
	300MHz~1GHz: 3.60 dB
	1GHz~18GHz: 5.00 dB
Vertical:	30MHz~300MHz: 3.80 dB
	300MHz~1GHz: 3.50 dB
	1GHz~18GHz: 4.80 dB

3. Conducted disturbance

3.1. Test Specification

According to Standard: FCC Part 15.107 Class B, ANSI C63.4 and ICES-003

3.2. Test Setup

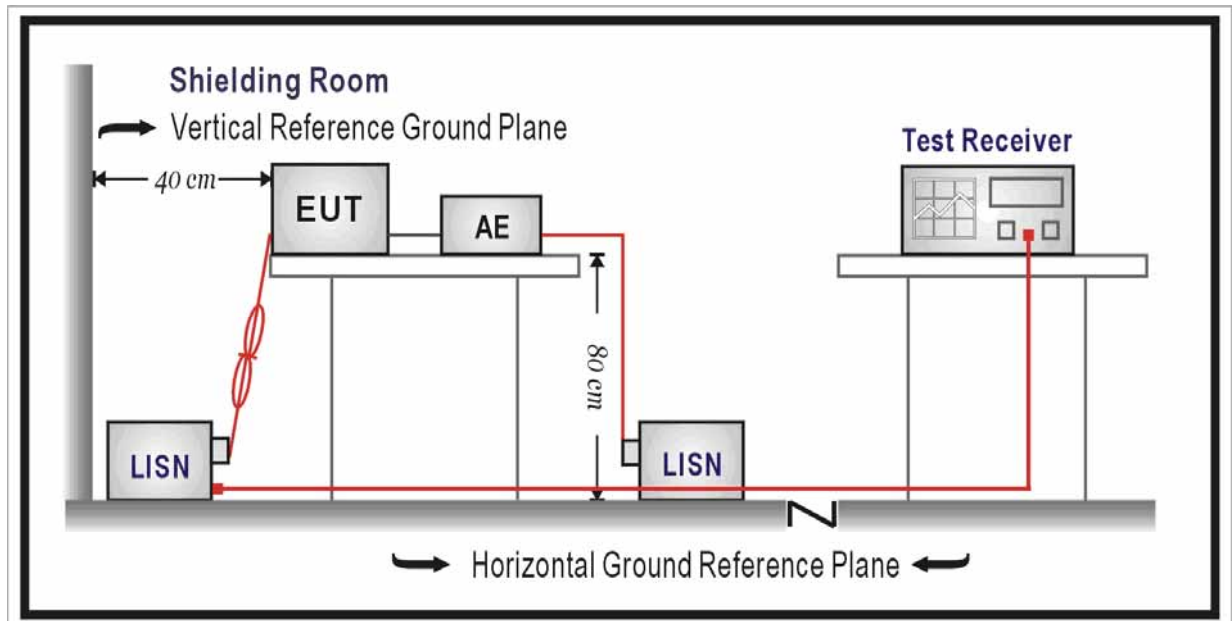

3.3. Limit

Limits for conducted disturbance of class A ITE		
Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	79	66
0.50 to 30	73	60

NOTE: The lower limit shall apply at the transition frequency.

Limits for conducted disturbance of class B ITE		
Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1: The lower limit shall apply at the transition frequencies.
NOTE 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50Ω / 50μH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω / 50μH coupling impedance with 50Ω termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Deviation from Test Standard

No deviation.

3.6. Test Result

Engineer: Tina	
Site: TR1	Time: 2019/06/14
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: Handheld Remote Methane Leak Detector	Power: AC 120V/60Hz
Note: Mode 1	

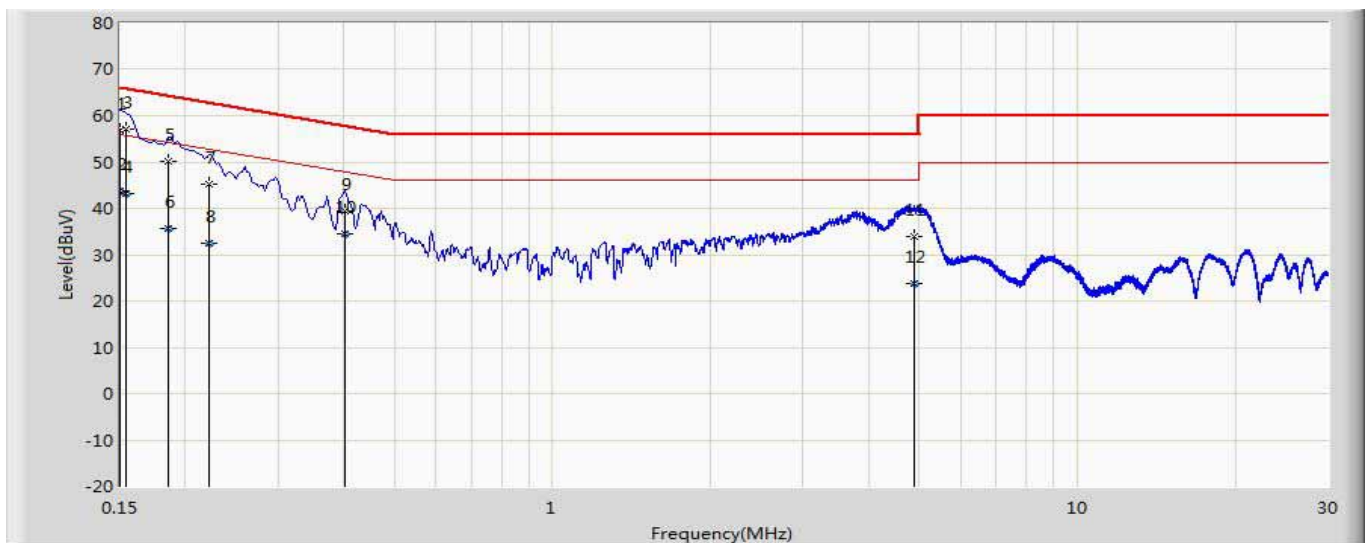


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.150	56.891	47.252	-9.109	66.000	9.610	0.029	0.000	QP
2		0.150	43.732	34.093	-12.268	56.000	9.610	0.029	0.000	AV
3	*	0.154	56.978	47.341	-8.776	65.754	9.609	0.029	0.000	QP
4		0.154	43.107	33.469	-12.648	55.754	9.609	0.029	0.000	AV
5		0.186	50.024	40.393	-14.190	64.213	9.603	0.028	0.000	QP
6		0.186	35.585	25.954	-18.628	54.213	9.603	0.028	0.000	AV
7		0.222	45.230	35.600	-17.514	62.744	9.600	0.029	0.000	QP
8		0.222	32.560	22.930	-20.184	52.744	9.600	0.029	0.000	AV
9		0.402	39.429	29.790	-18.383	57.812	9.600	0.038	0.000	QP
10		0.402	34.371	24.732	-13.441	47.812	9.600	0.038	0.000	AV
11		4.884	33.808	24.009	-22.192	56.000	9.658	0.141	0.000	QP
12		4.884	23.736	13.937	-22.264	46.000	9.658	0.141	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Tina	
Site: TR1	Time: 2019/06/14
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: Handheld Remote Methane Leak Detector	Power: AC 120V/60Hz
Note: Mode 1	

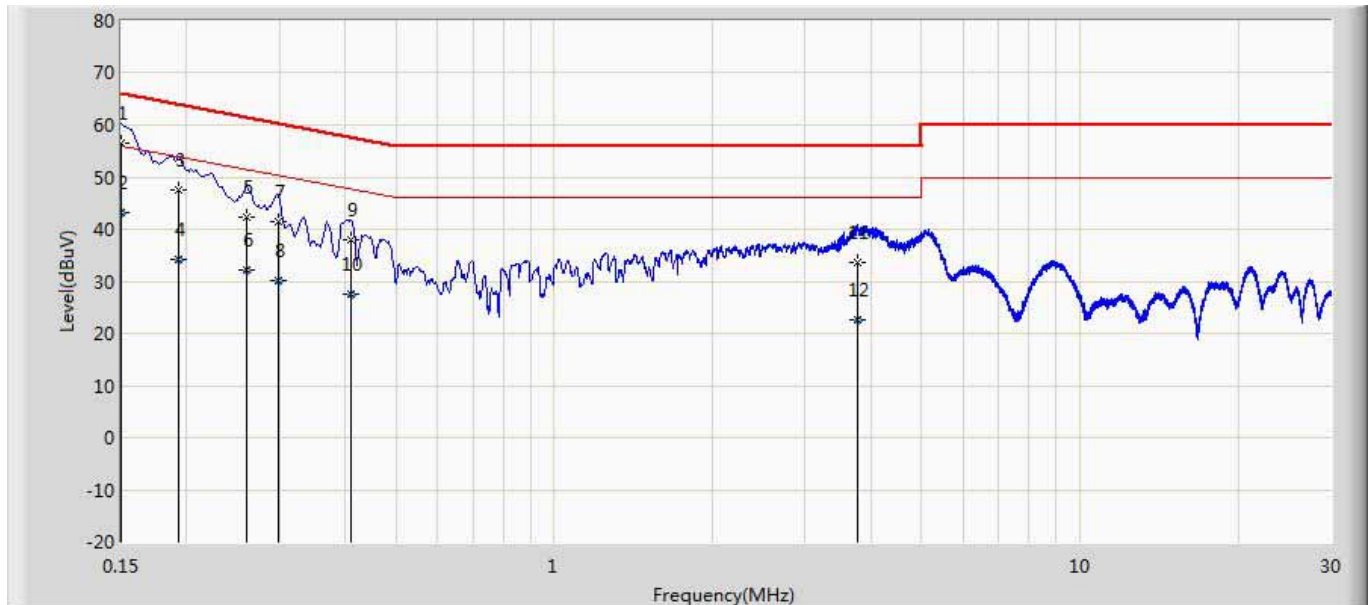

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1	*	0.150	56.477	46.854	-9.523	66.000	9.594	0.029	0.000	QP
2		0.150	43.241	33.618	-12.759	56.000	9.594	0.029	0.000	AV
3		0.193	47.476	37.850	-16.441	63.917	9.598	0.028	0.000	QP
4		0.193	34.303	24.677	-19.614	53.917	9.598	0.028	0.000	AV
5		0.260	42.393	32.764	-19.030	61.423	9.598	0.032	0.000	QP
6		0.260	32.137	22.507	-19.287	51.423	9.598	0.032	0.000	AV
7		0.298	41.503	31.873	-18.782	60.284	9.596	0.034	0.000	QP
8		0.298	30.055	20.424	-20.230	50.284	9.596	0.034	0.000	AV
9		0.411	37.903	28.272	-19.725	57.628	9.593	0.039	0.000	QP
10		0.411	27.407	17.776	-20.221	47.628	9.593	0.039	0.000	AV
11		3.779	33.611	23.855	-22.389	56.000	9.634	0.123	0.000	QP
12		3.779	22.600	12.843	-23.400	46.000	9.634	0.123	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

3.7. Test Photograph

Test Mode: Mode 1: Full System

Description: Front View of Conducted Disturbance Test Setup



Test Mode: Mode 1: Full System

Description: Side View of Conducted Disturbance Test Setup




4. Radiated disturbance

4.1. Test Specification


According to Standard: FCC Part 15.109 Class B, ANSI C63.4 and ICES-003

4.2. Test Setup

Below 1GHz Test Setup

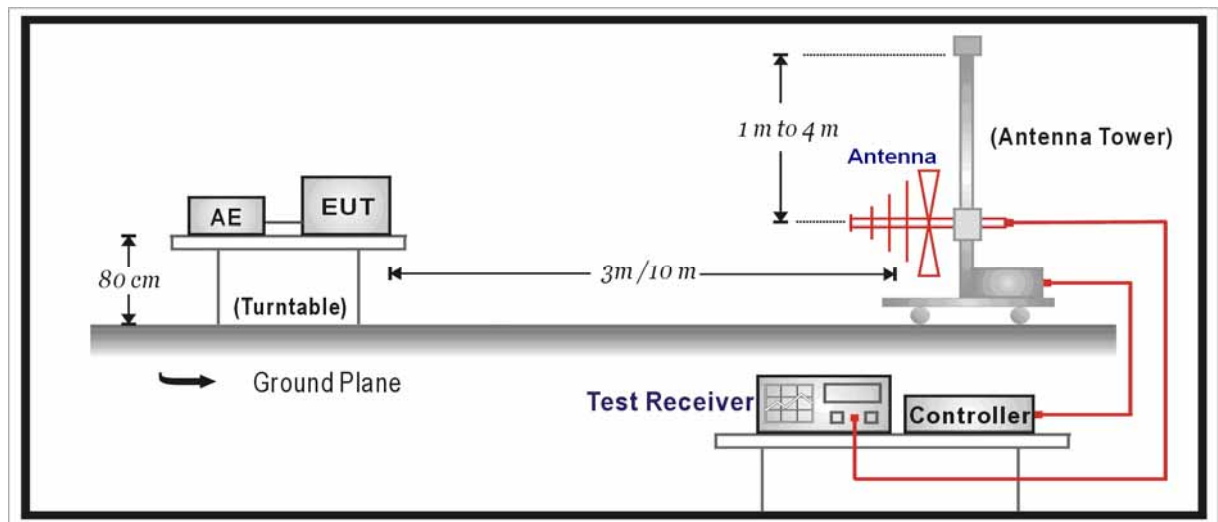

Above 1GHz Test Setup

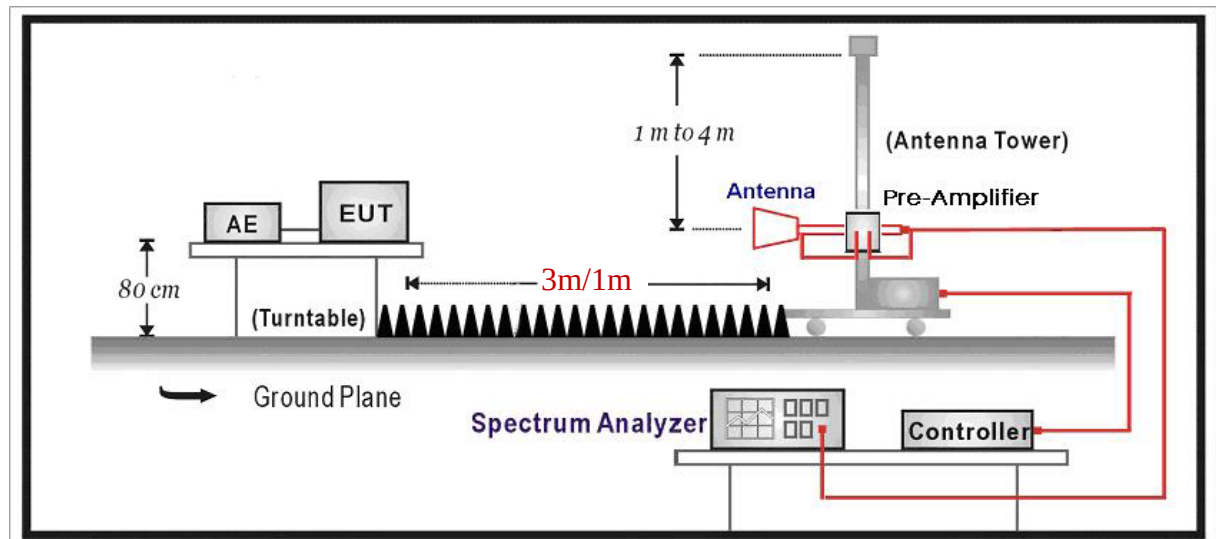

4.3. Limit

Limits for Radiated disturbance of class A ITE at a measuring distance of 10m	
Frequency of Emission (MHz)	Field Strength dB(μV/m)
30 to 88	39
88 to 216	43.5
216 to 960	46.4
Above 960	49.5
NOTE: The lower limit shall apply at the transition frequency.	

Limits for Radiated disturbance of class A ITE at a measuring distance of 3m	
Frequency of Emission (MHz)	Field Strength dB(μV/m)
1000 to 18000	60
NOTE: The lower limit shall apply at the transition frequency.	

Limits for Radiated disturbance of class A ITE at a measuring distance of 1m	
Frequency of Emission (MHz)	Field Strength dB(μV/m)
18000 to 40000	69.5
NOTE: The lower limit shall apply at the transition frequency.	

Limits for Radiated disturbance of class B ITE at a measuring distance of 3m	
Frequency of Emission (MHz)	Field Strength dB(μV/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
960 to 18000	54
NOTE: The lower limit shall apply at the transition frequency.	

Limits for Radiated disturbance of class B ITE at a measuring distance of 1m	
Frequency of Emission (MHz)	Field Strength dB(μ V/m)
18000-40000	63.5
NOTE: The lower limit shall apply at the transition frequency.	

4.4. Test Procedure

The EUT and its simulators are placed on a turntable which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be changed during radiated measurement.

The bandwidth below 1GHz setting on the receiver is 120kHz and above 1GHz is 1MHz.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

On any frequency or frequencies below or equal to 1000MHz, the radiated limits shown are based on measuring equipment employing a quasi-peak detector function and above 1000MHz, the radiated limits shown are based measuring equipment employing an average detector function.

When average radiated emission measurement are included emission measurement Above 1000MHz, there also is a limit on the radio frequency emissions, as measured using


instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

4.5. Deviation from Test Standard

No deviation.

4.6. Test Result

Engineer: Canon	
Site: AC2	Time: 2019/06/14
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: Handheld Remote Methane Leak Detector	Power: AC 120V/60Hz
Note: Mode 1	

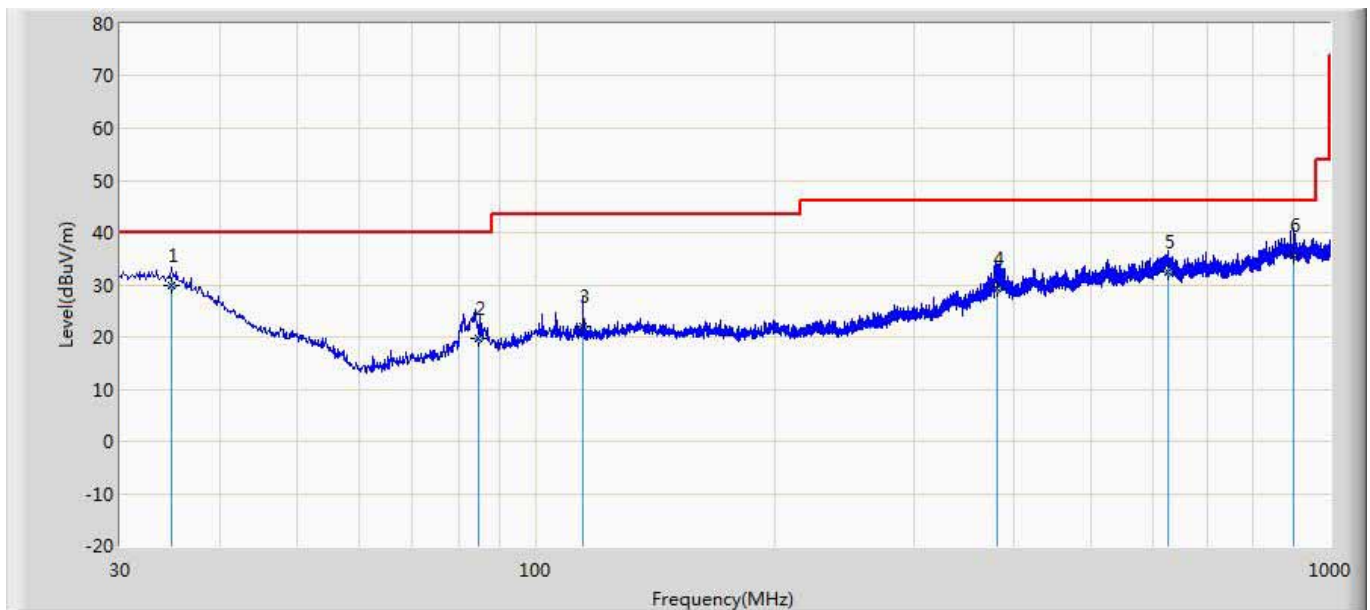


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	34.840	29.944	2.600	-10.056	40.000	20.674	6.670	0.000	200	81	QP
2		84.687	19.628	5.300	-20.372	40.000	7.634	6.694	0.000	193	360	QP
3		114.684	21.957	5.300	-21.543	43.500	9.684	6.973	0.000	200	52	QP
4		380.641	29.194	4.600	-16.806	46.000	16.709	7.885	0.000	100	257	QP
5		626.841	32.377	1.800	-13.623	46.000	22.004	8.574	0.000	100	17	QP
6		898.621	35.578	2.600	-10.422	46.000	23.731	9.246	0.000	100	124	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Canon	
Site: AC2	Time: 2019/06/14
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: Handheld Remote Methane Leak Detector	Power: AC 120V/60Hz
Note: Mode 1	

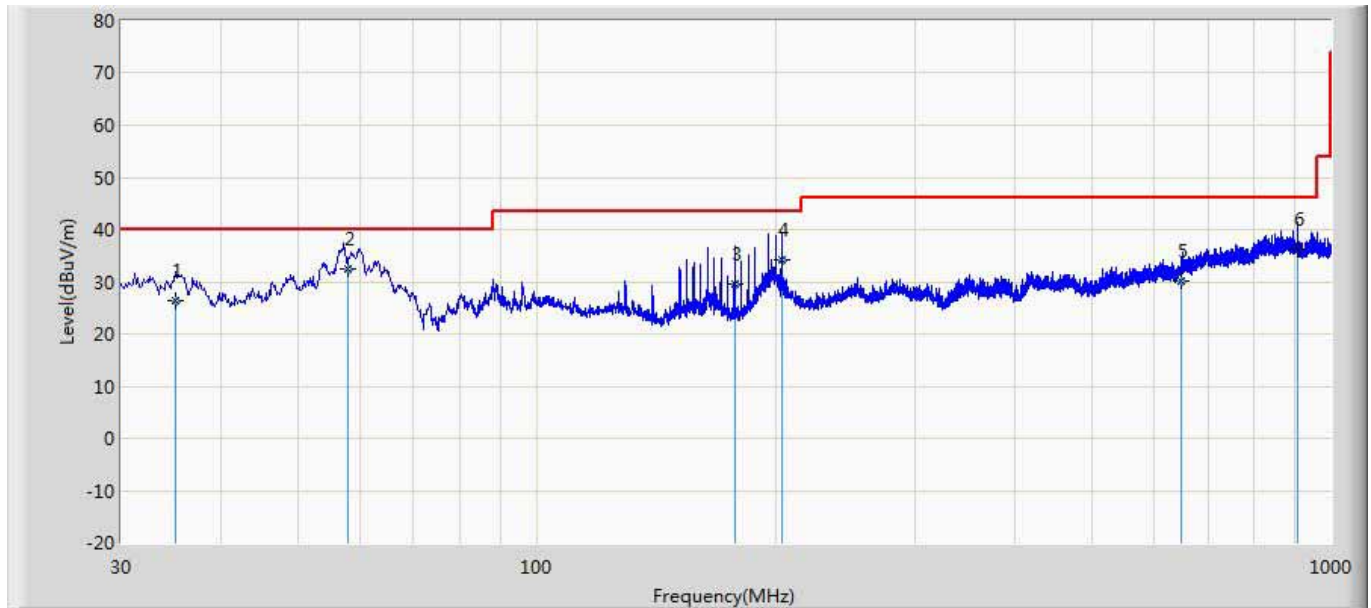


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		35.067	26.412	3.600	-13.588	40.000	16.146	6.666	0.000	100	3	QP
2	*	57.861	32.409	15.600	-7.591	40.000	10.127	6.681	0.000	100	354	QP
3		177.621	29.437	10.974	-14.063	43.500	11.170	7.293	0.000	100	269	QP
4		203.641	34.194	10.600	-9.306	43.500	16.236	7.358	0.000	100	1	QP
5		648.010	30.258	1.600	-15.742	46.000	20.034	8.624	0.000	200	268	QP
6		907.654	36.284	3.600	-9.716	46.000	23.418	9.266	0.000	100	359	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Canon	
Site: AC5	Time: 2019/06/19
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Handheld Remote Methane Leak Detector	Power: AC 120V/60Hz
Note: Mode 1	

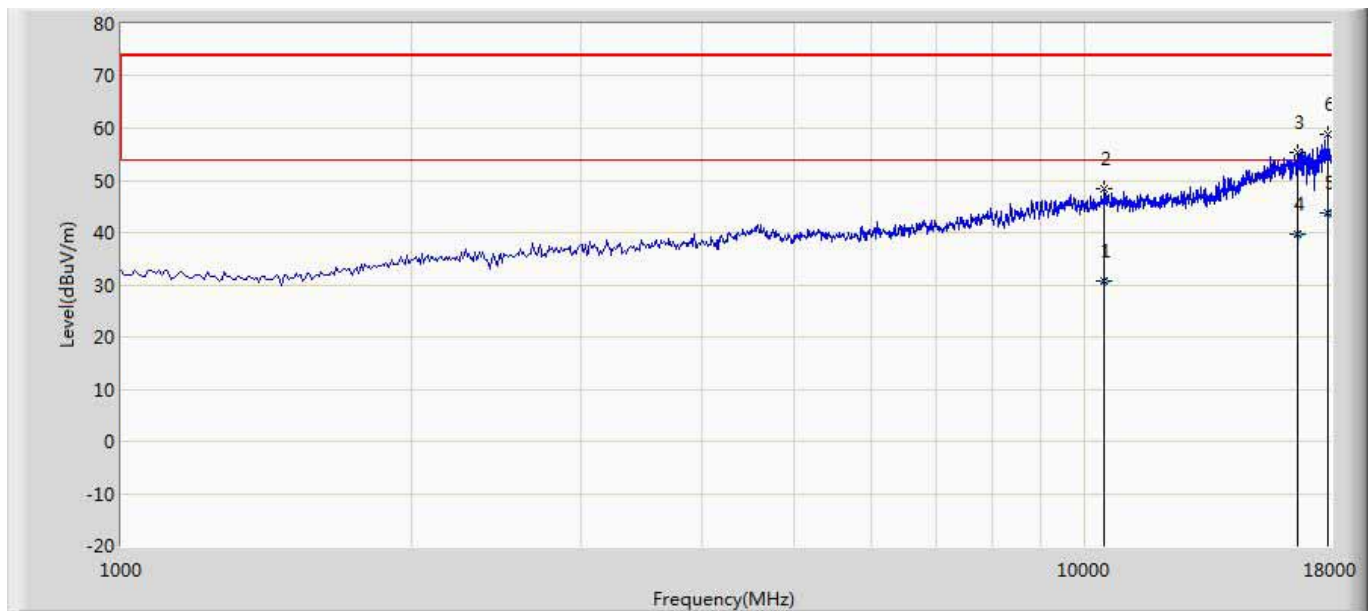


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		10485.121	30.864	20.251	-23.136	54.000	37.685	11.480	38.552	100	153	AV
2		10486.000	48.473	37.792	-25.527	74.000	37.686	11.483	38.488	100	153	PK
3		16623.000	55.411	35.537	-18.589	74.000	41.325	14.439	35.890	100	154	PK
4		16625.215	39.812	20.155	-14.188	54.000	41.325	14.342	36.010	100	154	AV
5	*	17860.151	43.628	21.151	-10.372	54.000	41.044	17.286	35.853	100	15	AV
6		17864.000	58.970	35.688	-15.030	74.000	41.046	17.961	35.725	100	15	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Canon	
Site: AC5	Time: 2019/06/19
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Handheld Remote Methane Leak Detector	Power: AC 120V/60Hz
Note: Mode 1	

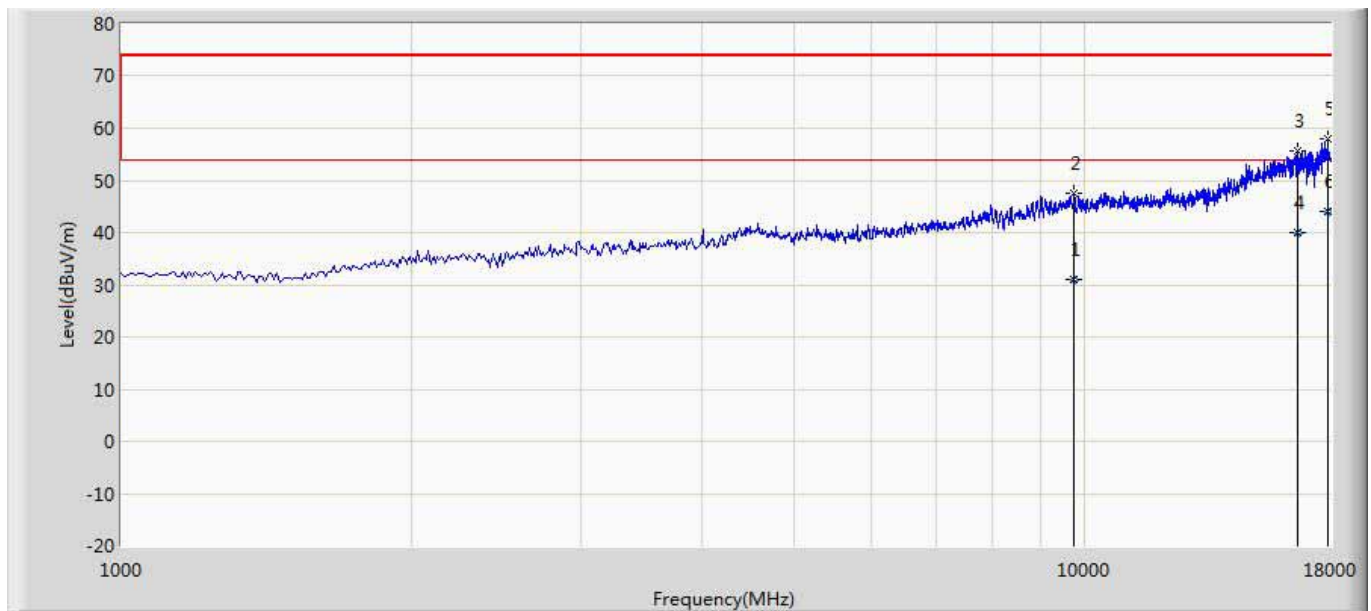

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		9754.151	31.094	21.515	-22.906	54.000	36.905	11.770	39.096	100	140	AV
2		9755.000	47.445	37.837	-26.555	74.000	36.906	11.770	39.068	100	140	PK
3		16623.000	55.575	35.701	-18.425	74.000	41.325	14.439	35.890	100	150	PK
4		16625.151	39.878	20.215	-14.122	54.000	41.325	14.344	36.007	100	150	AV
5		17864.000	57.978	34.696	-16.022	74.000	41.046	17.961	35.725	100	135	PK
6	*	17865.150	44.199	21.215	-9.801	54.000	41.046	17.628	35.690	100	135	AV


Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.7. Test Photograph

Test Mode: Mode 1: Full System

Description: Front View of Radiated Disturbance Test Setup (Below 1GHz)

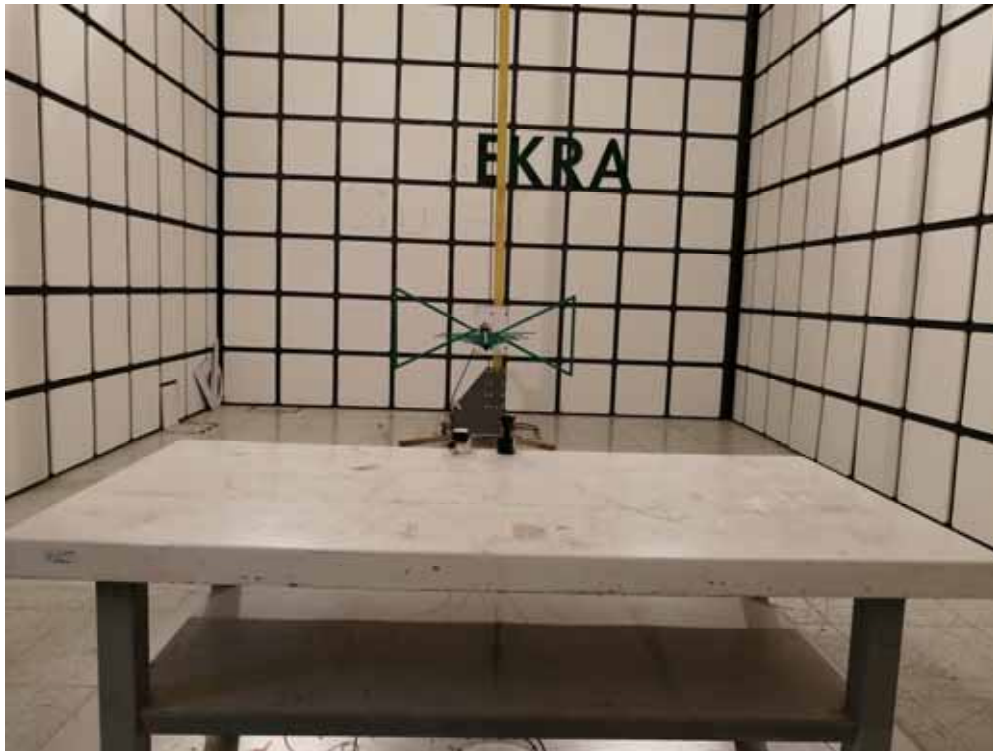

Test Mode: Mode 1: Full System

Description: Rear View of Radiated Disturbance Test Setup (Below 1GHz)



Test Mode: Mode 1: Full System

Description: Front View of Radiated Disturbance Test Setup (Above 1GHz)



Test Mode: Mode 1: Full System

Description: Rear View of Radiated Disturbance Test Setup (Above 1GHz)



5. Attachment

EUT Photograph

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo



(4) EUT Photo



(5) EUT Photo



(6) EUT Photo



(7) EUT Photo



(8) EUT Photo



(9) EUT Photo



(10) EUT Photo



(11) EUT Photo



(12) EUT Photo



(13) EUT Photo



The End