



Report No.: FCC 1903017 File reference No.: 2019-03-14

Applicant: NINGBO QIYANG ELECTROMECHANICAL

TECHNOLOGY CO.,LTD

Product: CookPerfect Comfort

Model No.: CP-100

Trademark: CookPerfect

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: March 14, 2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1903017 Page 2 of 49

Date: 2019-03-14



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 49

Report No.: FCC1903017

Date: 2019-03-14



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	12
5.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	6dB Bandwidth Measurement Bandwidth	22
8.0	Maximum Peak Output Power	27
9.0	Power Spectral Density Measurement	29
10.0	Out of Band Measurement.	34
11.0	Antenna Requirement.	41
12.0	FCC ID Label.	42
13.0	Photo of Test Setup and EUT View.	43

Date: 2019-03-14



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: NINGBO QIYANG ELECTROMECHANICAL TECHNOLOGY CO.,LTD

Address: No.475, HeXiao east road, DongQiao town, HaiShu district, NingBo, ZheJiang, China

Telephone: --Fax: ---

1.3 Description of EUT

Product: CookPerfect Comfort

Manufacturer: NINGBO QIYANG ELECTROMECHANICAL TECHNOLOGY CO.,LTD

Address: No.475, HeXiao east road, DongQiao, HaiShu district, NingBo, ZheJiang, China

Brand Name: CookPerfect

Additional Brand Name: N/A
Model Number: CP-100
Additional Model Number: N/A

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2019-03-04 to 2019-03-14

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

The report refers only to the sample tested and does not apply to the bulk.

Page 5 of 49 Report No.: FCC1903017

Date: 2019-03-14



1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 49 Report No.: FCC1903017

Date: 2019-03-14



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2018-01-20	2019-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Date: 2019-03-14



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Page 8 of 49

Report No.: FCC1903017

Date: 2019-03-14



5.Power Line Conducted Emission Test

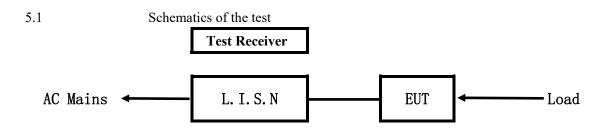


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

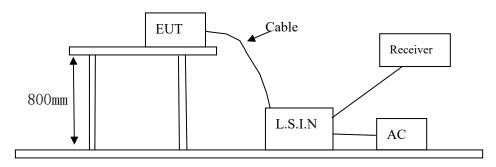

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
CookPerfect	NINGBO QIYANG		
	ELECTROMECHANICAL	CP-100	2ASOZCP-100
Comfort	TECHNOLOGY CO.,LTD		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1903017 Page 9 of 49

Date: 2019-03-14



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	AoHai	A68-50200	Input:100-240VV~, 50/60Hz, 0.35A;
			Output:DC5V,2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2019-03-14



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

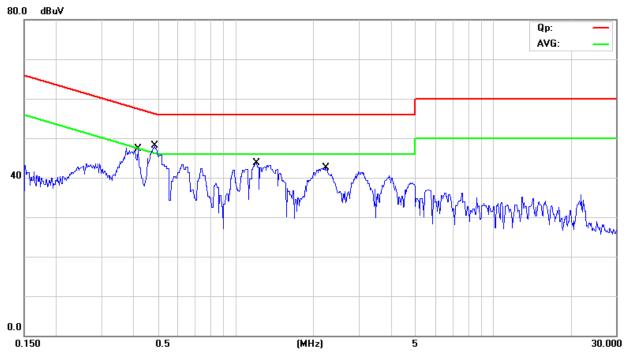

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.4143	26.70	9.76	36.46	57.56	-21.10	QP	
2	0.4143	-2.10	9.76	7.66	47.56	-39.90	AVG	
3 *	0.4820	31.10	9.77	40.87	56.30	-15.43	QP	
4	0.4820	2.00	9.77	11.77	46.30	-34.53	AVG	
5	1.2038	26.30	9.79	36.09	56.00	-19.91	QP	
6	1.2038	-5.90	9.79	3.89	46.00	-42.11	AVG	
7	2.2398	24.70	9.81	34.51	56.00	-21.49	QP	
8	2.2398	-6.30	9.81	3.51	46.00	-42.49	AVG	

Date: 2019-03-14



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

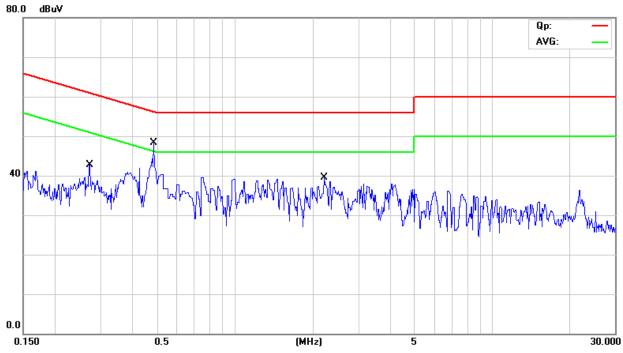

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Limit Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.2714	18.20	9.75	27.95	61.07	-33.12	QP	
2	0.2714	-13.30	9.75	-3.55	51.07	-54.62	AVG	
3 *	0.4810	24.20	9.77	33.97	56.32	-22.35	QP	
4	0.4810	-4.60	9.77	5.17	46.32	-41.15	AVG	
5	2.2214	16.30	9.81	26.11	56.00	-29.89	QP	
6	2.2214	-13.70	9.81	-3.89	46.00	-49.89	AVG	

Report No.: FCC1903017 Page 12 of 49


Date: 2019-03-14



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

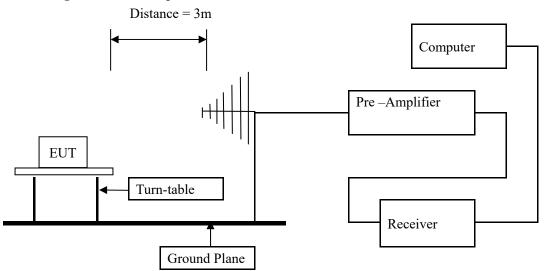

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC1903017 Page 13 of 49

Date: 2019-03-14



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2019-03-14



Page 14 of 49

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

Keep Bluetooth Transmitting EUT set Condition:

Results: Pass

Page 15 of 49


Report No.: FCC1903017

Date: 2019-03-14



Test Figure:



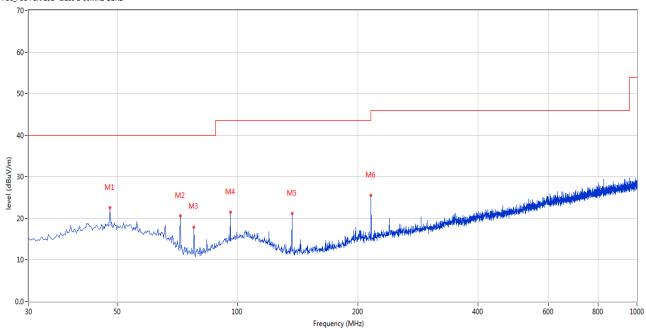


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	47.941	22.52	-11.30	40.0	-17.48	Peak	360.00	200	Н	Pass
2	71.942	20.61	-16.53	40.0	-19.39	Peak	360.00	200	Н	Pass
3	77.761	17.92	-17.54	40.0	-22.08	Peak	357.00	200	Н	Pass
4	95.944	21.47	-14.16	43.5	-22.03	Peak	357.00	200	Н	Pass
5	136.916	21.19	-17.19	43.5	-22.31	Peak	360.00	200	Н	Pass
6	215.951	25.50	-13.60	43.5	-18.00	Peak	225.00	100	Н	Pass

Report No.: FCC1903017 Page 16 of 49

Date: 2019-03-14



Test Figure:

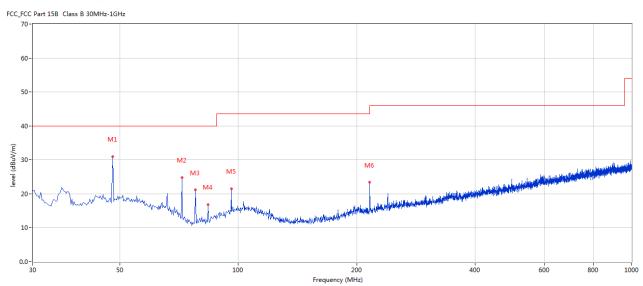

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	47.941	31.01	-11.30	40.0	-8.99	Peak	288.00	100	V	Pass
2	71.942	24.85	-16.53	40.0	-15.15	Peak	249.00	200	V	Pass
3	77.761	21.15	-17.54	40.0	-18.85	Peak	240.00	100	V	Pass
4	83.822	16.86	-16.78	40.0	-23.14	Peak	218.00	100	V	Pass
5	95.944	21.53	-14.16	43.5	-21.97	Peak	0.00	100	V	Pass
6	215.951	23.38	-13.60	43.5	-20.12	Peak	302.00	100	V	Pass

Report No.: FCC1903017 Page 17 of 49

Date: 2019-03-14



Operation Mode: Transmitting under Low Channel (2402MHz)

	8	` '	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		H/V	74(Peak)/ 54(AV)
7206		H/V	74(P ak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2440MHz)

	88		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4880		H/V	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 18 of 49 Report No.: FCC1903017

Date: 2019-03-14



Operation Mode: Transmitting under High Channel (2480MHz)

	0 0	· , , , , , , , , , , , , , , , , , , ,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4960		H/V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Date: 2019-03-14




Please refer to the following test plots for details:

Low Channel: Horizontal

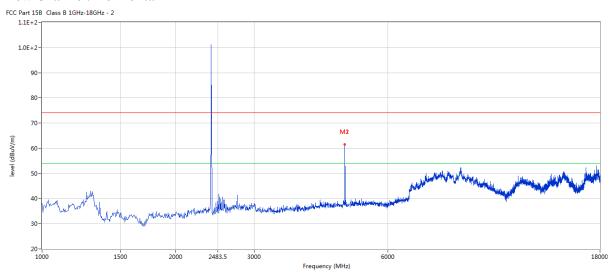

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/	(dB)	(dBuV/m	Limit			(cm)		
		m))	(dB)					
1	4802.799	61.60	3.12	74.0	-12.40	Peak	225.00	100	Н	Pass
2	4802.799	48.59	3.12	54.0	-5.41	AV	225.00	100	Н	Pass

Low Channel: Vertical

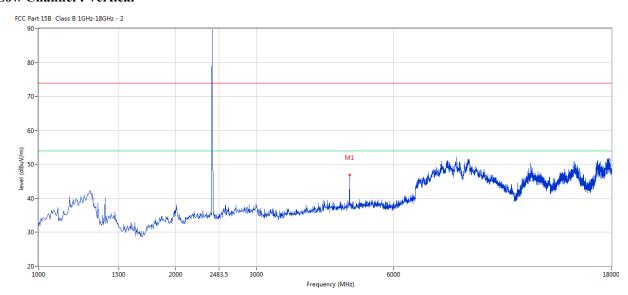

Ν	No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1		4802.799	46.95	3.12	74.0	-27.05	Peak	85.00	100	V	Pass


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2019-03-14




Middle Channel: Horizontal

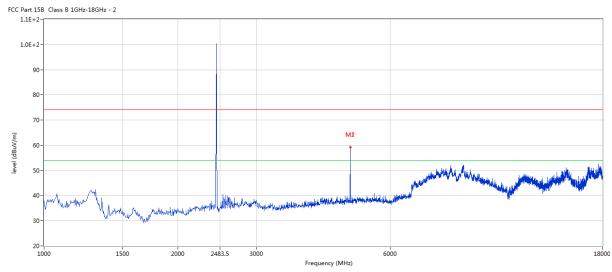

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/	(dB)	(dBuV/m	Limit			(cm)		
		m))	(dB)					
1	4879.280	59.28	3.20	74.0	-14.72	Peak	231.00	100	I	Pass
2	4879.280	46.33	3.20	54.0	-7.67	AV	231.00	100	H	Pass

Middle Channel: Vertical

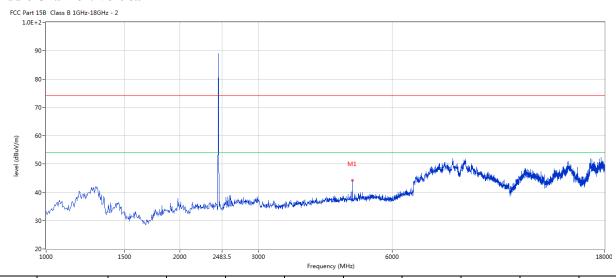

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4879.280	44.22	3.20	74.0	-29.78	Peak	90.00	100	V	Pass


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2019-03-14




High Channel: Horizontal

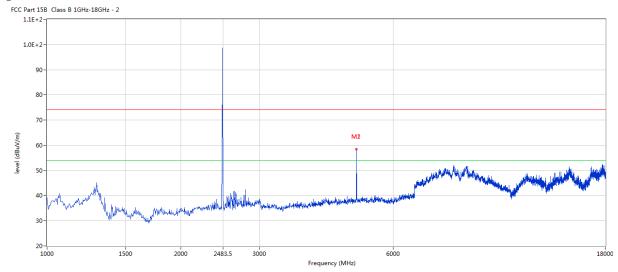

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/	(dB)	(dBuV/m	Limit			(cm)		
		m))	(dB)					
1	4960.010	58.45	3.36	74.0	-15.55	Peak	222.00	100	Н	Pass
2	4960.010	45.32	3.36	54.0	-8.68	AV	222.00	100	Н	Pass

High Channel: Vertical

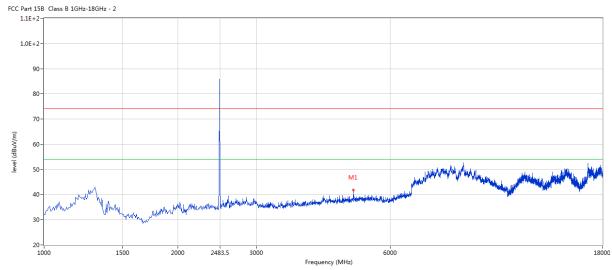

Ī	No.	Frequenc	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
		y (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
ſ	1	4960.010	41.91	3.36	74.0	-32.09	Peak	92.00	100	V	Pass

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 22 of 49


Report No.: FCC1903017

Date: 2019-03-14



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 23 of 49 Report No.: FCC1903017

Date: 2019-03-14



6dB BW

Jub D II							
EUT	Coo	Perf	ect Comfort	Mod	lel		CP-100
Mode	Ke	ep Tr	ransmitting	Input Voltage			DC3.0V
Temperati	perature 24		deg. C,		idity		56% RH
Channel	Channel Frequency (MHz)		6 dB Bandwidth (kHz)			num Limit (kHz)	Pass/ Fail
Low	2402		703		0.5		Pass
Middle	2440	2440				0.5	Pass
High	2480	2480 721				0.5	Pass


Report No.: FCC1903017 Page 24 of 49

Date: 2019-03-14



Test Figure:

1. Condition: Low Channel

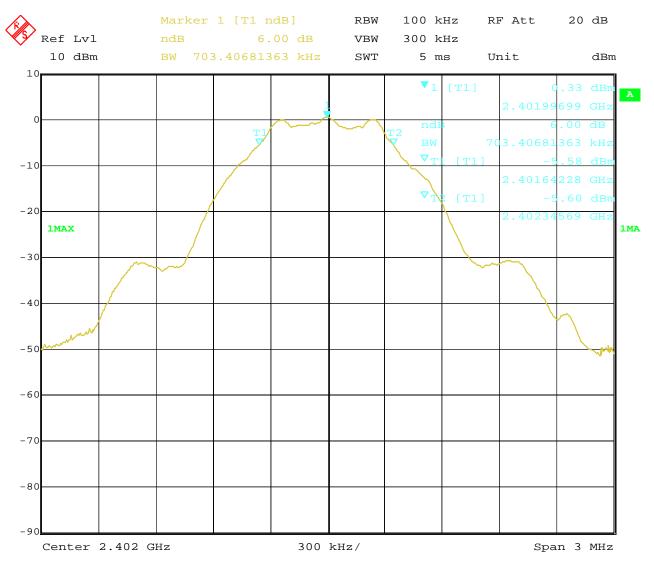


Date: 12.MAR.2019 14:43:40

Report No.: FCC1903017 Page 25 of 49

Date: 2019-03-14



2. Condition: Middle Channel

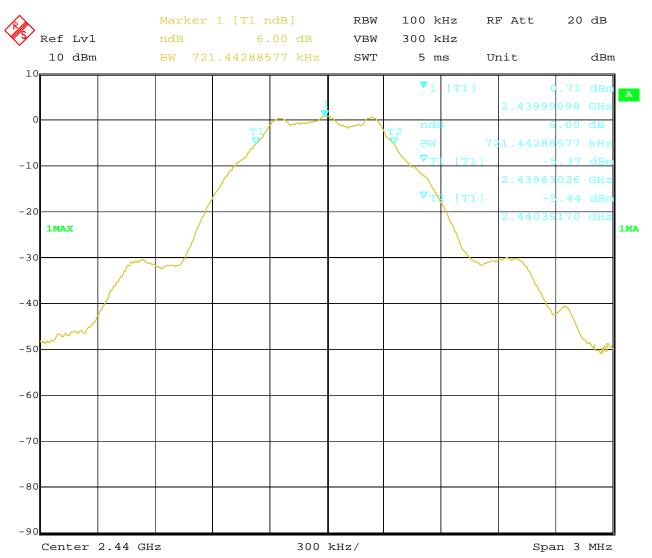


Date: 12.MAR.2019 14:46:08

Report No.: FCC1903017 Page 26 of 49

Date: 2019-03-14



3. High Channel

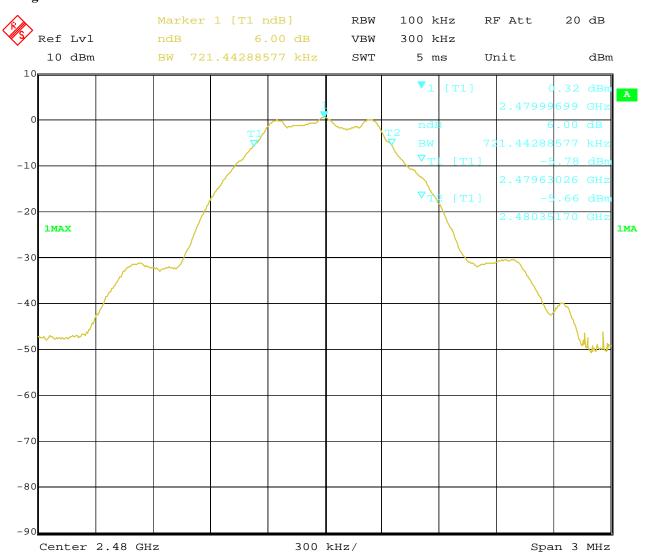

Date: 12.MAR.2019 14:47:45


Report No.: FCC1903017 Page 27 of 49

Date: 2019-03-14



8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Page 28 of 49 Report No.: FCC1903017

Date: 2019-03-14



8.4Test Results

EUT		CookPeri	fect Comfort	Model	CP	-100	
Mode		Keep Tı	ransmitting	Input Voltage	DC3.0V		
Temperatu	Temperature 24		deg. C, Humidity		56% RH		
Channel	Cł	nannel Frequency	Max. Power O	output (dBm)	Peak Power Limit	Pass/ Fail	
Chamer		(MHz)	Pea	ık	(dBm)		
Low		2402	1.0	8	30	Pass	
Middle		2440	2440 1.		30	Pass	
High		2480	0.9	7	30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Report No.: FCC1903017 Page 29 of 49

Date: 2019-03-14



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 30 of 49 Report No.: FCC1903017

Date: 2019-03-14



9.4Test Result

EUT		CookP	erfect Comfo	ort	Model	(CP-100
Mode		Keep	Transmitting	g	Input Voltage	Ι	OC3.0V
Temperat	emperature 2		24 deg. C, Hun		Humidity	5	6% RH
Channel	Peak Power Reading (dBm)		Cable Loss (dB)		nal Power Spectral Density (dBm)	Maximum Limit (dBm)	Pass/ Fail
Low	-:	8.47	0.2		-8.27	8	Pass
Middle	-′	7.88	0.2		-7.68	8	Pass
High	-:	8.68	0.2		-8.48	8	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss


Report No.: FCC1903017 Page 31 of 49

Date: 2019-03-14



Test Figure:

1. Condition: Low Channel

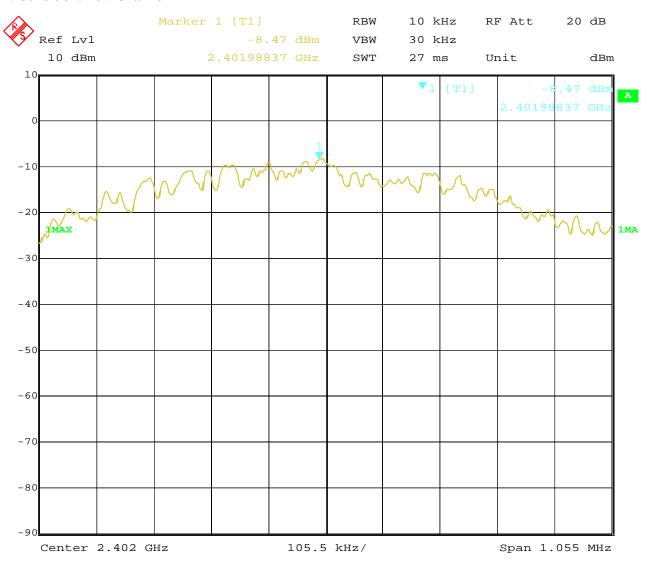


Date: 12.MAR.2019 14:53:26

Report No.: FCC1903017 Page 32 of 49

Date: 2019-03-14



2. Condition: Middle Channel

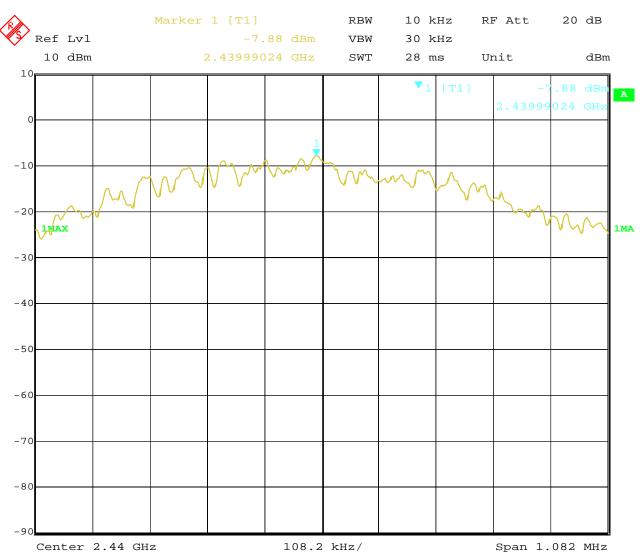


Date: 12.MAR.2019 14:54:27

Report No.: FCC1903017 Page 33 of 49

Date: 2019-03-14



3. High Channel

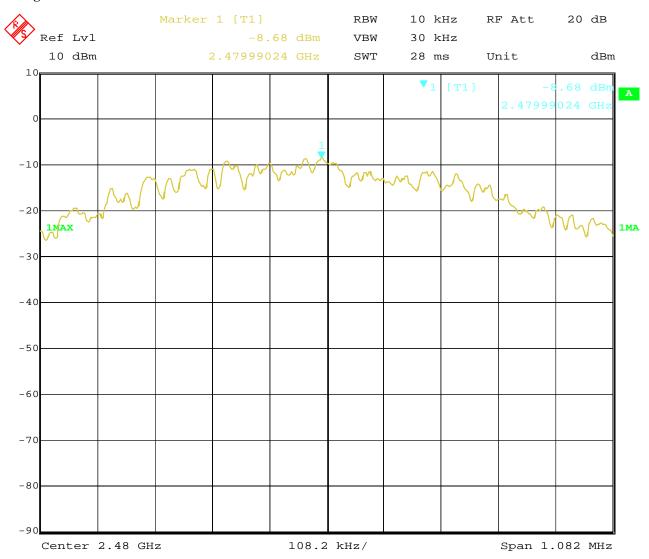


Date: 12.MAR.2019 14:56:29

Report No.: FCC1903017 Page 34 of 49

Date: 2019-03-14



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: FCC1903017 Page 35 of 49


Date: 2019-03-14



10.4 Band-edge Measurement

EUT	CookPerfect Comfort	Model	CP-100
Mode	Keep Transmitting	Input Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

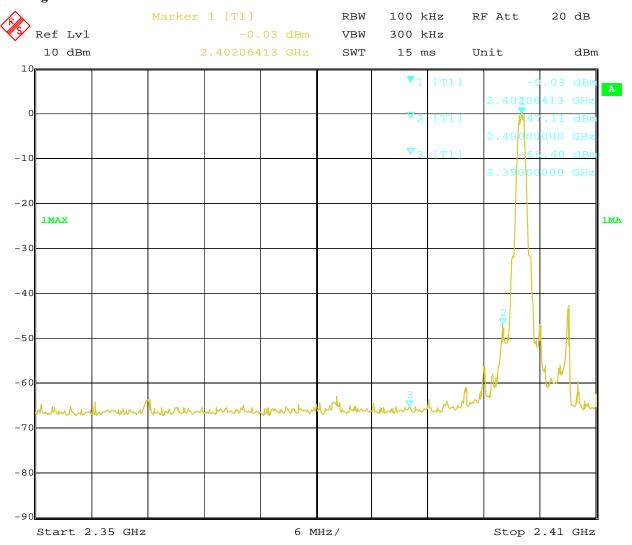

Date: 12.MAR.2019 14:59:35

Note: The Max. FS in Restrict Band are measured in conventional method.

Report No.: FCC1903017 Page 36 of 49


Date: 2019-03-14



10.4 Band-edge Measurement

EUT	CookPerfect Comfort	Model	CP-100
Mode	Keeping Transmitting	Input Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

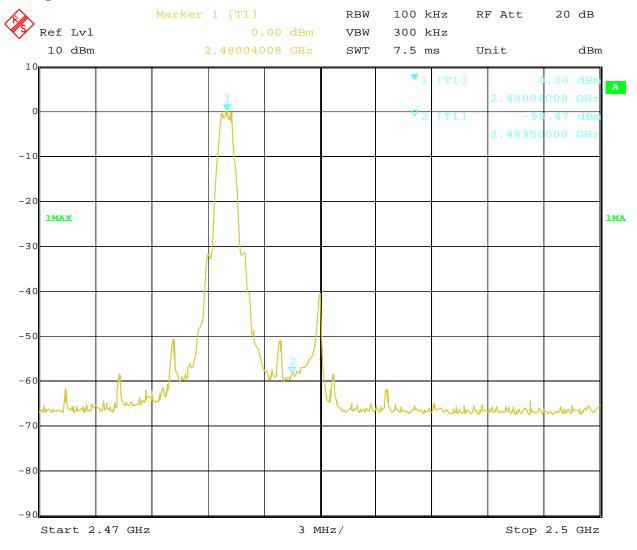

Date: 12.MAR.2019 14:57:46

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 37 of 49 Report No.: FCC1903017

Date: 2019-03-14



EUT		CookPerfect Comfort			Model			CP-100				
Mode Temperature		Keep Transmitting 24 deg. C,			Input	Voltage		DC3.0V				
					Hui	midity		56% RH				
Test	Result:		Pass									
	Class B 1GHz-18GHz - 2			•			•					
1.1E+2-												
1.0E+2-												
90-												
50									/ \			
80-									/			
70-								/				
									\			
70- 60-										\		
50-										W		
40-	<u>, </u>											
4	1											
30- 235	0									2		
					Frequency ((MHz)						
			Γ	Т	T		Т	т	T			
No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdi		
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)				
))	(dB)							
		39.04	-3.53	74.0	-34.96	Peak	88.00	100	Н	Pass		

Page 38 of 49 Report No.: FCC1903017

Date: 2019-03-14



EUT		CookPerfect Comfort			Model			CP-100				
Mode		Keep Transmitting			Input	Voltage		DC3.0V				
7	Гетре	rature	24 deg. C, Pass			Hui	midity		56% RH			
,	Test R	esult:										
	art 15B Clas	s B 1GHz-18GHz - 2			·			•				
1.0	0E+2-											
	90-									\sim		
	80-											
(m/A	70-											
level (dBuV/m)	60-									· \		
	50-										Julia.	
	40-		na kala a			181		al traces	15 (16)		W	
	30-	hannik dang kalanda Mirida yan Burak sadi			hidaduki kitaka jirinda da ka jirinda ka jirinda ka ka jirinda ka ka jirinda ka ka jirinda ka jirin	d distributed and second second	adaderesiji kadiberrijai ajaklikasilisid		HAND AND AND AND AND AND AND AND AND AND		Melkelada	
	2350					Frequency ((MHz)				24	
No).	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdi	
		cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)			
1		2390	35.82	-3.53	74.0	(dB) -38.18	Peak	347.00	100	V	Pass	

Page 39 of 49 Report No.: FCC1903017

Date: 2019-03-14



	E	UT	T CookPerfect Comfort				odel		CP-100				
Mode Temperature			Keep Transmitting ure 24 deg. C,			Input	Voltage		DC3.0V 56% RH				
						Hui	midity						
	Test :	Result:		Pass									
		Class B 1GHz-18GHz - 2						•					
1.1	E+2-												
1.0	E+2-												
	90-	300-											
	80-	10-											
	70-												
(iii/apap) isasi	60-			-/-									
	50-		/										
	40-												
	30-		A PART OF THE PARTY OF THE PART			4	Michigan Laboratory	ydawydd lyddigolydd dail dai	roman dikandan menelip	والمهابية المناطقة والمناطقة والمناطقة	and and all the		
	2470)				2483.5 Frequency (MHz)				25		
No		Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdi		
		(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)				
))	(dB)							
1		2483.5	50.75	-3.57	74.0	-23.25	Peak	27.00	100	Н	Pass		

Report No.: FCC1903017 Page 40 of 49

Date: 2019-03-14



	Е	CUT	Γ CookPerfect Comfort				odel		CP-100				
Mode			Keep Transmitting			Input	Voltage		DC3.0V				
Temperature		erature	24 deg. C,			Hui	midity		569	% RH			
-	Test :	Result:		Pass									
		Class B 1GHz-18GHz - 2											
1.1	1E+2-												
1.0	DE+2-												
	90-	90-											
	80-	80-											
	70-												
(100)	60-												
	50-												
	40-					Millim	tu.						
	щ	سيطعط استعادتها المساف	المعملين المعلقة المارية المعليدة			11	Marial dilignosistiquestation	andradami birdiya ababa bilang	ing the plant have	باسطهاب إطعابها وياهدنا أأيناه			
	30- 2470)				2483.5 Frequency (MHz)				25		
No).	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdi		
		(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)				
))	(dB)							
1		2483.5	50.01	-3.57	74.0	-23.99	Peak	114.00	100	٧	Pass		

Report No.: FCC1903017

Date: 2019-03-14



Page 41 of 49

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is 0dBi.

Report No.: FCC1903017 Page 42 of 49

Date: 2019-03-14




12.0 FCC ID Label

FCC ID: 2ASOZCP-100

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

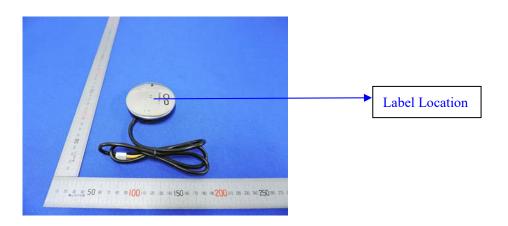


Page 43 of 49 Report No.: FCC1903017

Date: 2019-03-14



13.0 **Photo of testing**

Conducted Emission Test Setup:

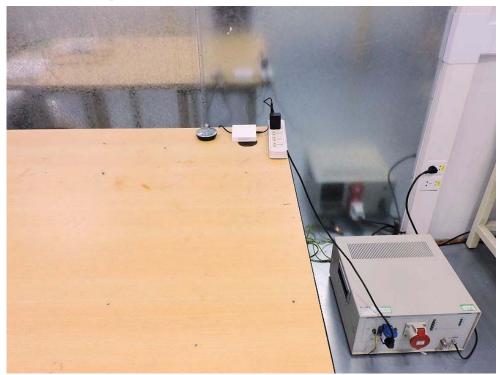



Report No.: FCC1903017

Date: 2019-03-14



Radiated Emission Test Setup:

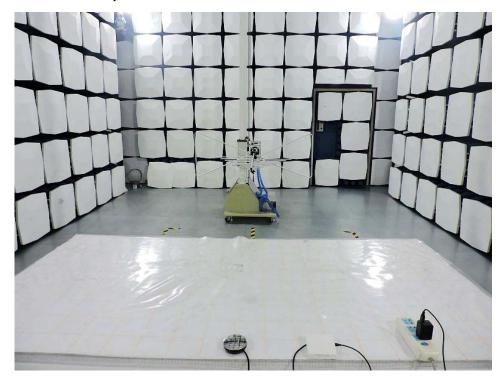

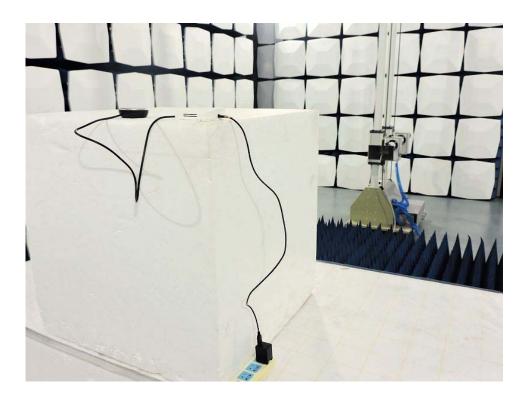

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1903017

Date: 2019-03-14



Photographs - EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 46 of 49

Report No.: FCC1903017

Date: 2019-03-14



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 47 of 49 Report No.: FCC1903017

Date: 2019-03-14



Outside View



Page 48 of 49

Report No.: FCC1903017

Date: 2019-03-14



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1903017 Page 49 of 49

Date: 2019-03-14



Inside View

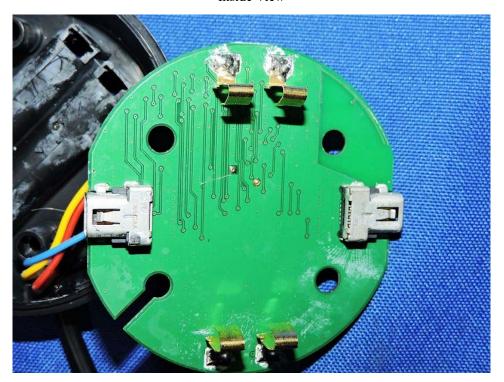

End of the report