

Test Plot1#: GSM 850_Head Right Cheek_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.628$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.6 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.324 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

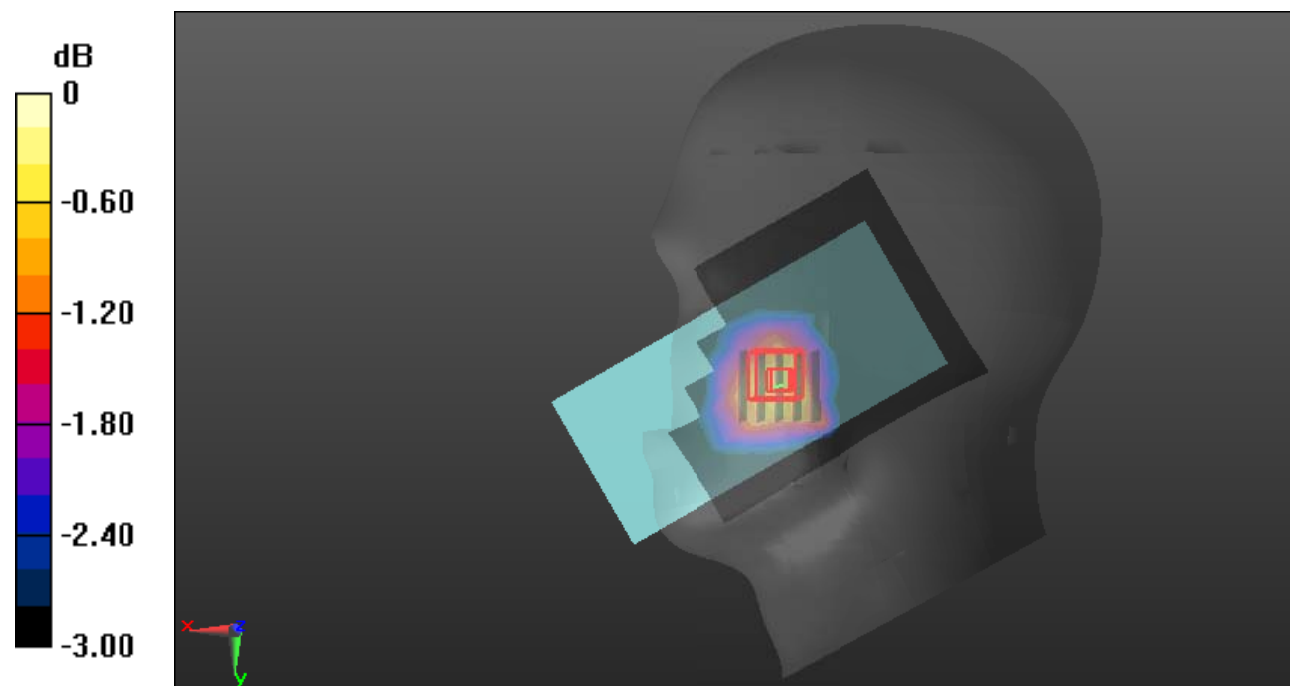

0 dB = 0.174 W/kg = -7.59 dB dBW/kg

Test Plot2#: GSM 850_Body Back_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.628$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.6 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.68 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.351 W/kg

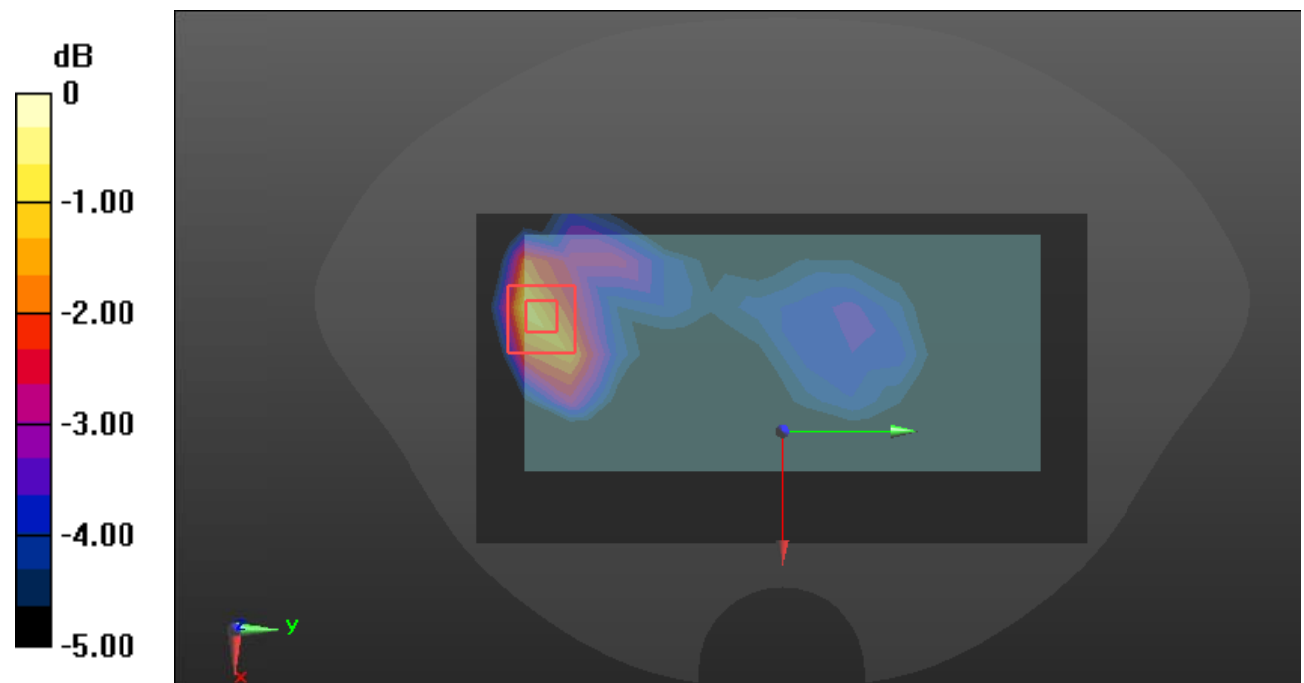

0 dB = 0.351 W/kg = -4.55 dB dBW/kg

Test Plot3#: PCS 1900_Head Right Cheek_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.522$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.492 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.49 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

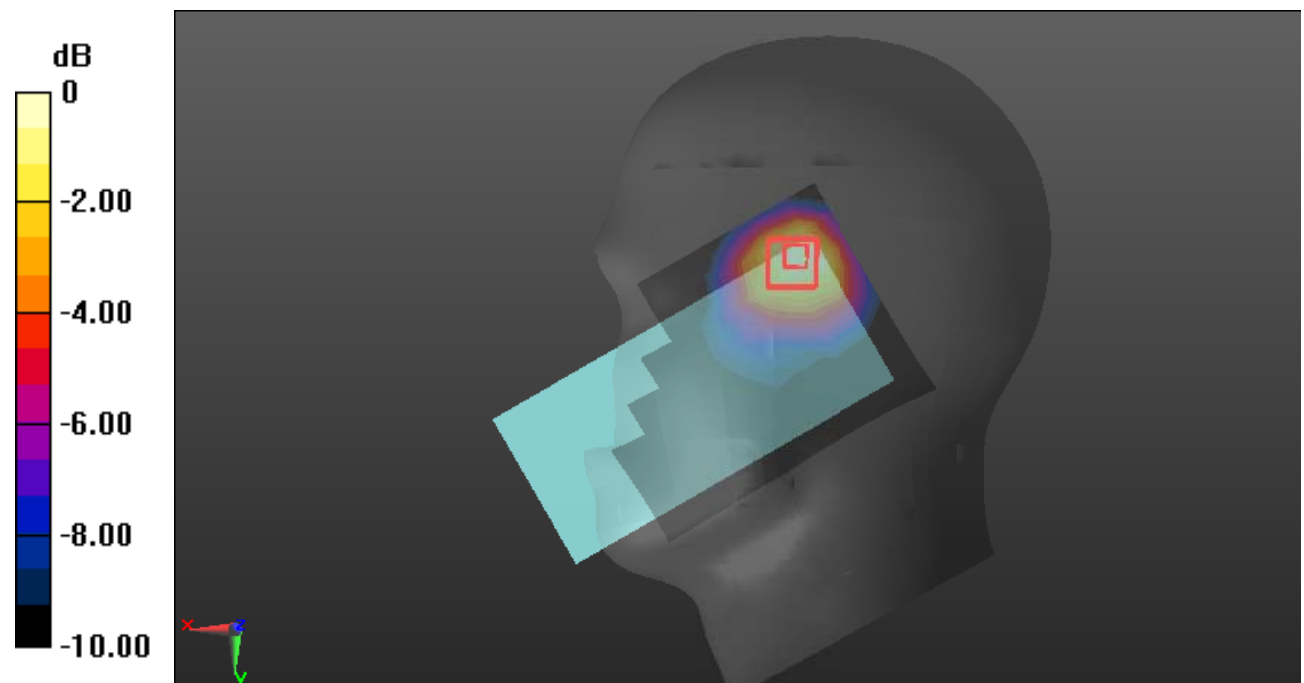

0 dB = 0.482 W/kg = -3.17 dB dBW/kg

Test Plot4#: PCS 1900_Body Back_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f=1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.522$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.185 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.819 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

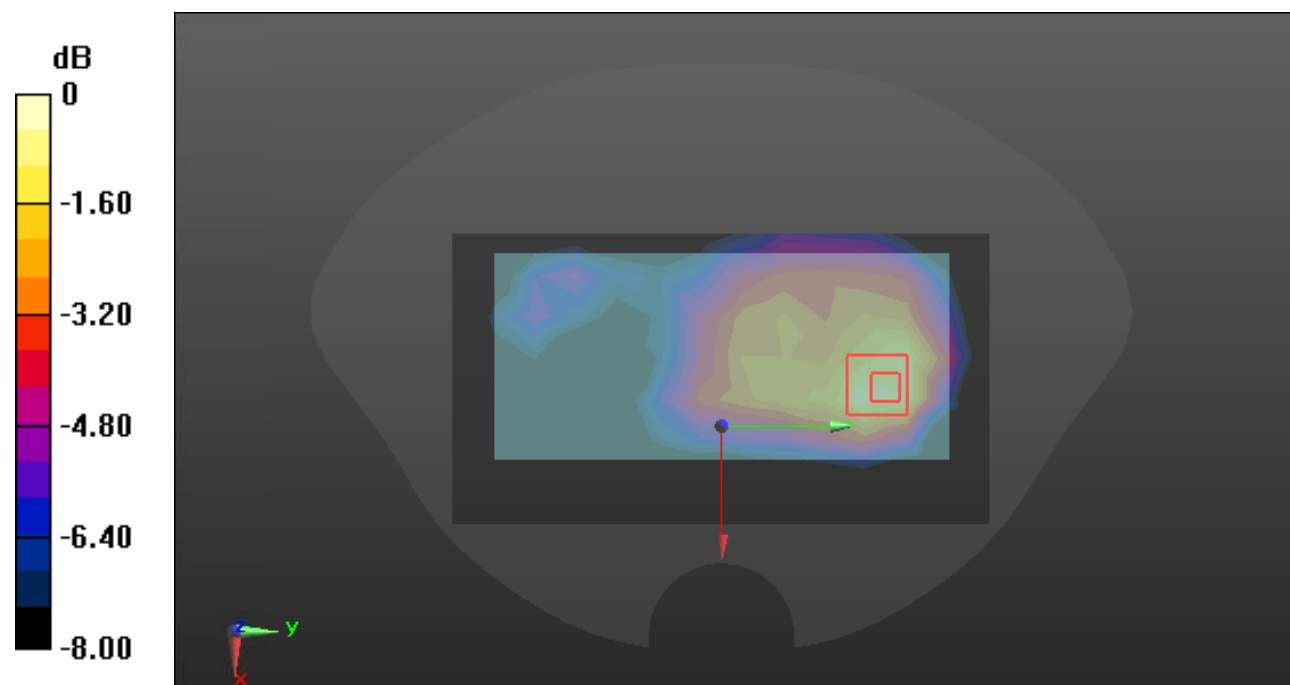

0 dB = 0.205 W/kg = -6.88 dB dBW/kg

Test Plot5#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 41.308$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.766 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.04 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.936 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 0.791 W/kg

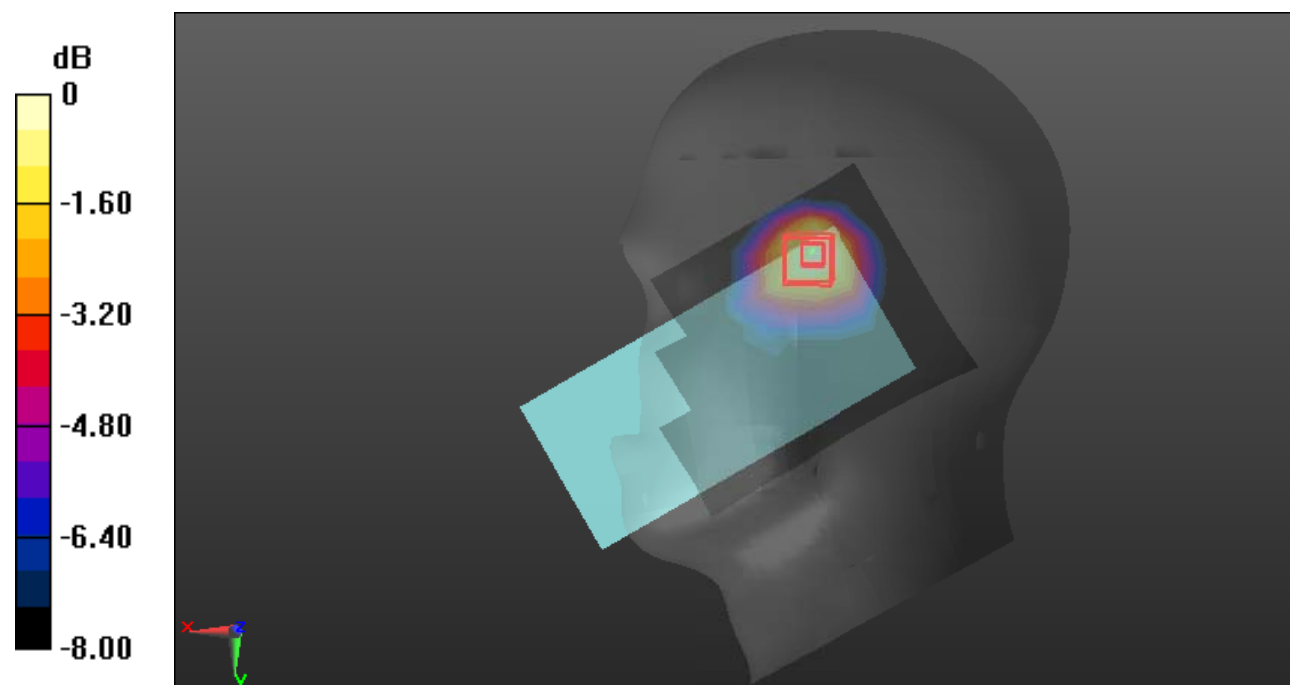

0 dB = 0.791 W/kg = -1.02 dB dBW/kg

Test Plot6#: WCDMA Band 2_Body Back_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 41.308$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.506 W/kg


Zoom Scan (6x6x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.80 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.517 W/kg

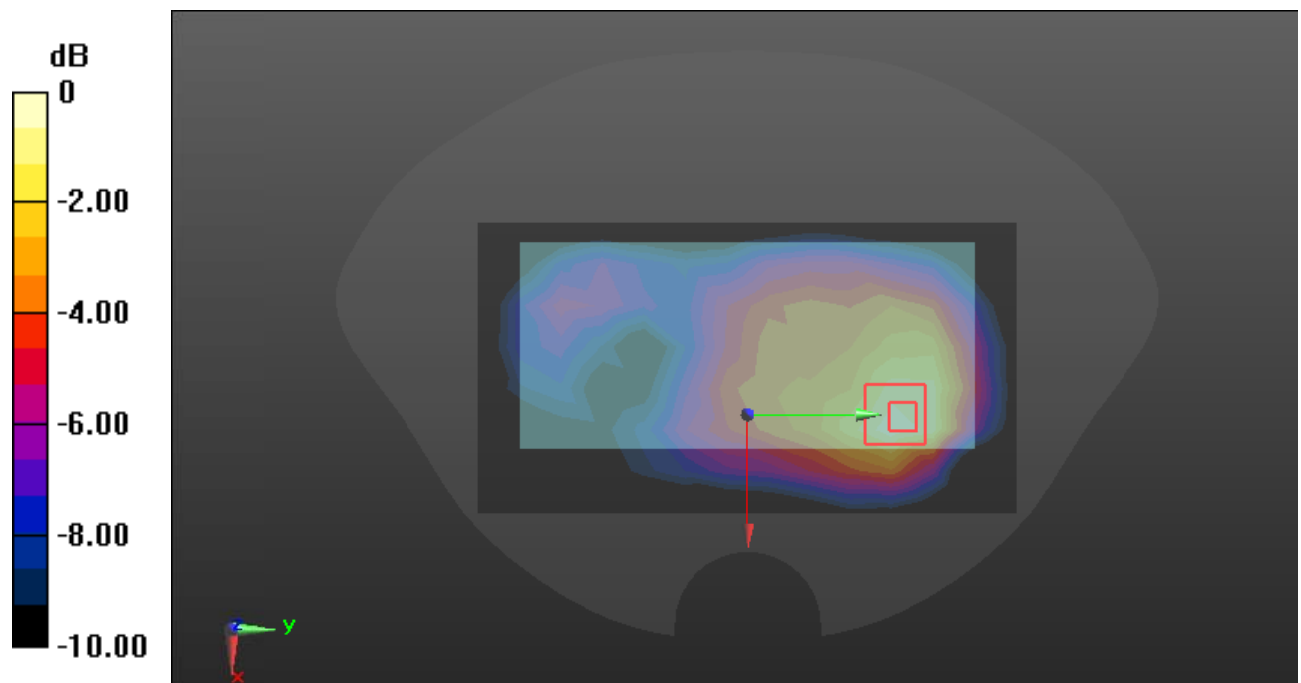

0 dB = 0.517 W/kg = -2.87 dB dBW/kg

Test Plot7#: WCDMA Band 4_Head Right Cheek_Low**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic WCDMA (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1712.4$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1712.4 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.14 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.583 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

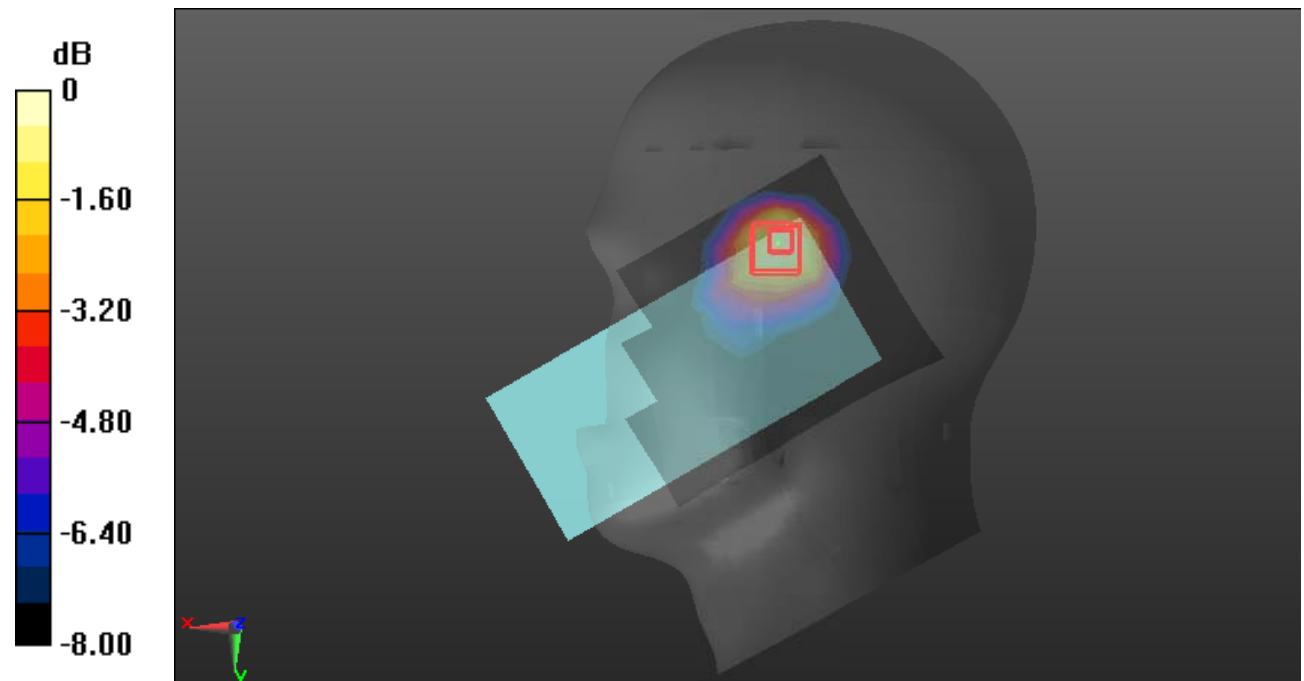

0 dB = 1.22 W/kg = 0.86 dB dBW/kg

Test Plot8#: WCDMA Band 4_Body Back_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1732.6$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 41.539$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1732.6 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 W/kg


Zoom Scan (6x6x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.94 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.651 W/kg

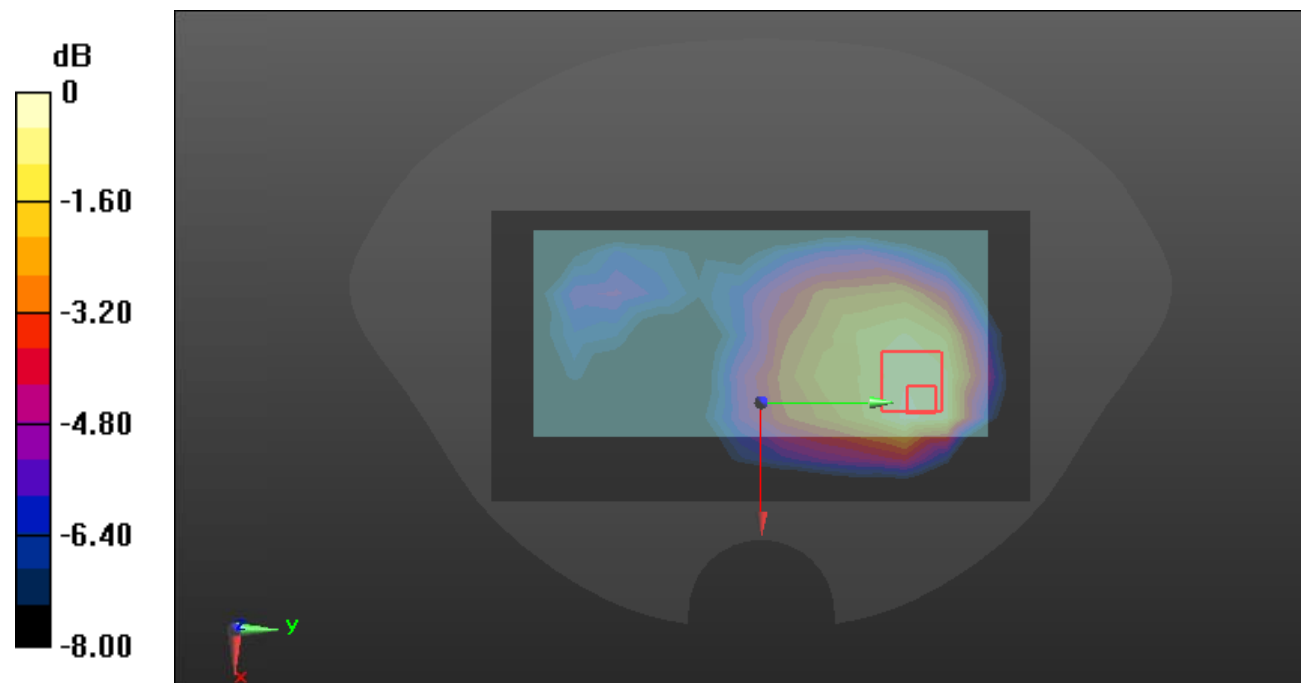

0 dB = 0.651 W/kg = -1.86 dB dBW/kg

Test Plot9#: WCDMA Band 5_Head Right Cheek_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.933$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.6 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0923 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.902 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

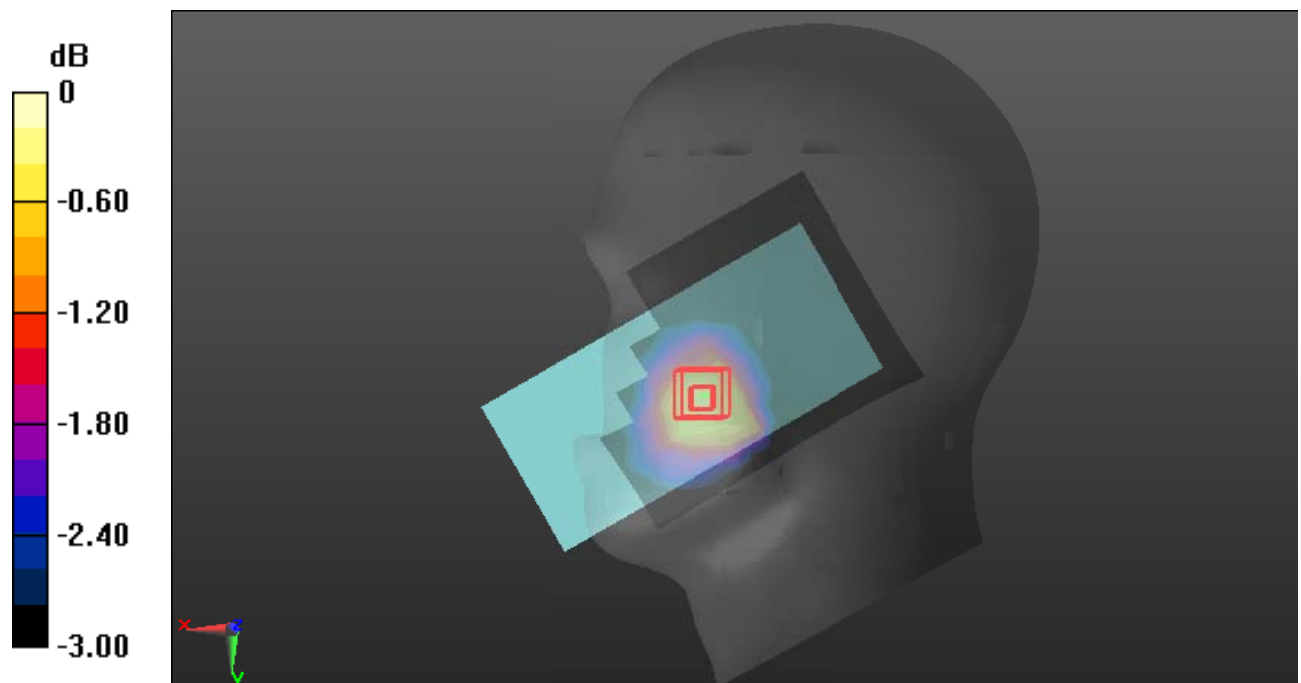

0 dB = 0.101 W/kg = -9.96 dB dBW/kg

Test Plot10#: WCDMA Band 5_Body Back_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.933$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.6 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.303 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.04 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

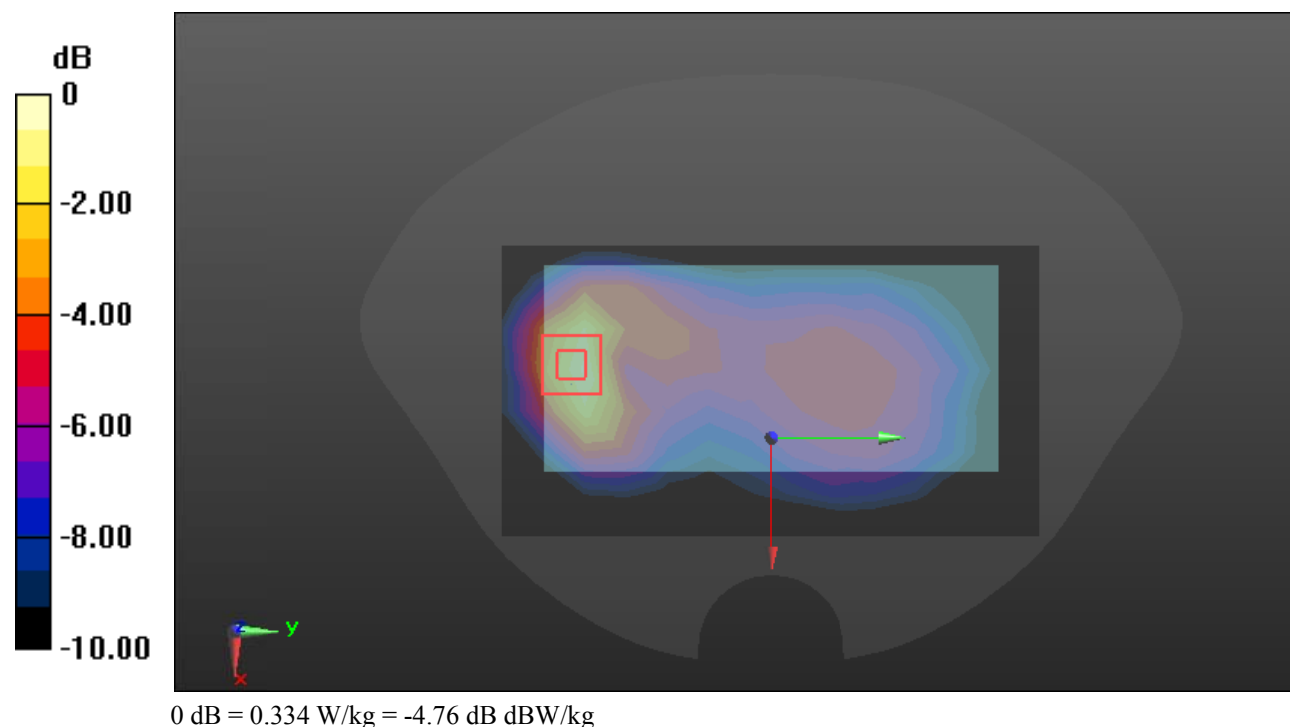

Test Plot11#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.522$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.21 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.541 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

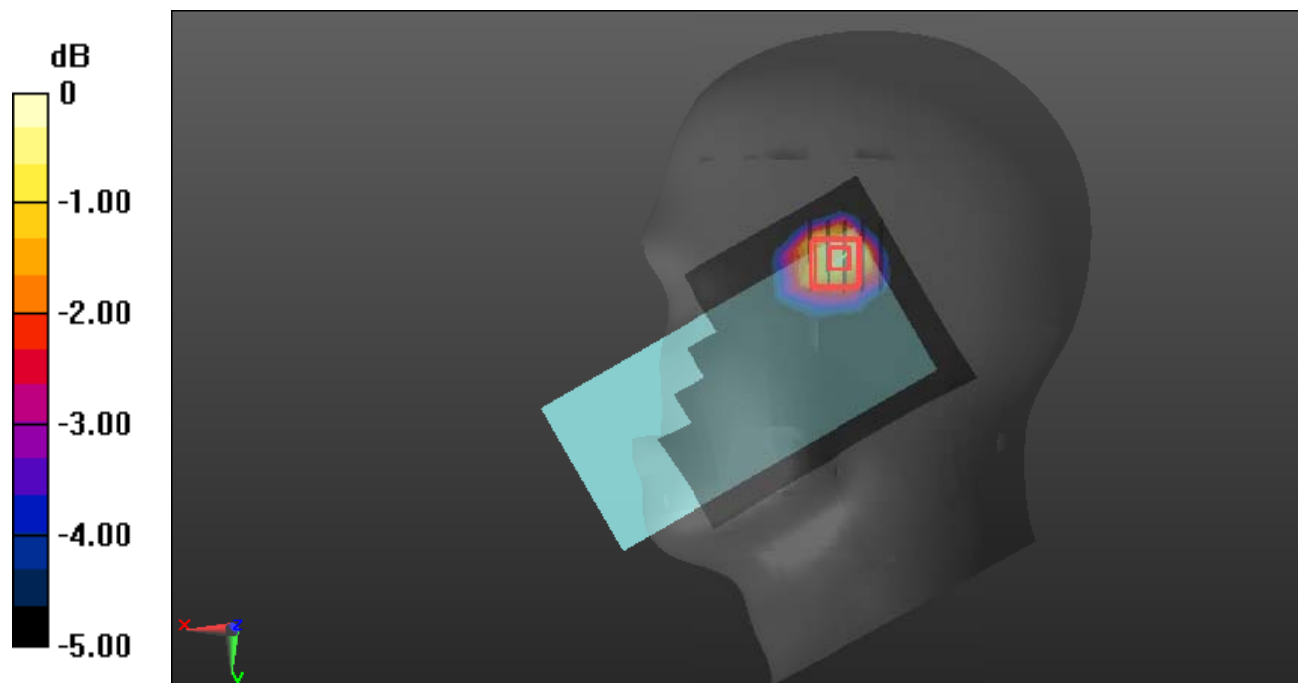

0 dB = 1.14 W/kg = 0.57 dB dBW/kg

Test Plot12#: LTE Band 2_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f=1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.522$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.588 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.80 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.639 W/kg

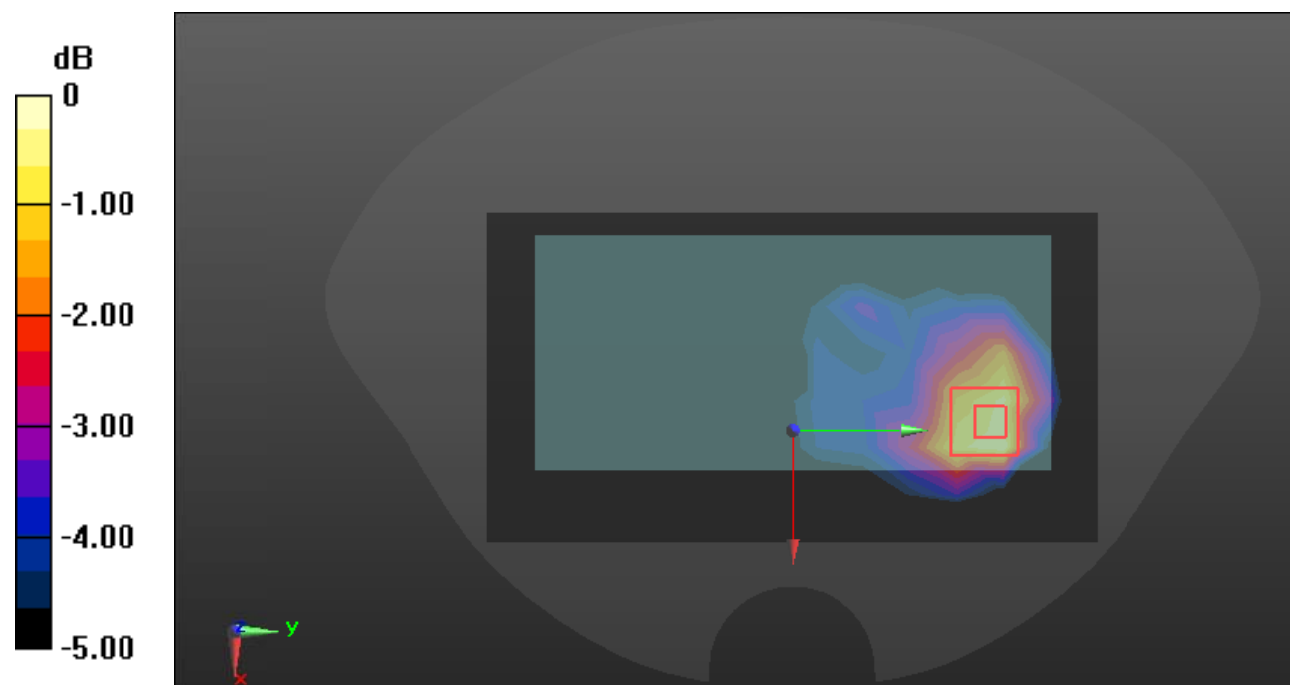

0 dB = 0.639 W/kg = -1.94 dB dBW/kg

Test Plot13#: LTE Band 5_Head Right Cheek_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.756$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.5 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0806 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.583 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.0906 W/kg

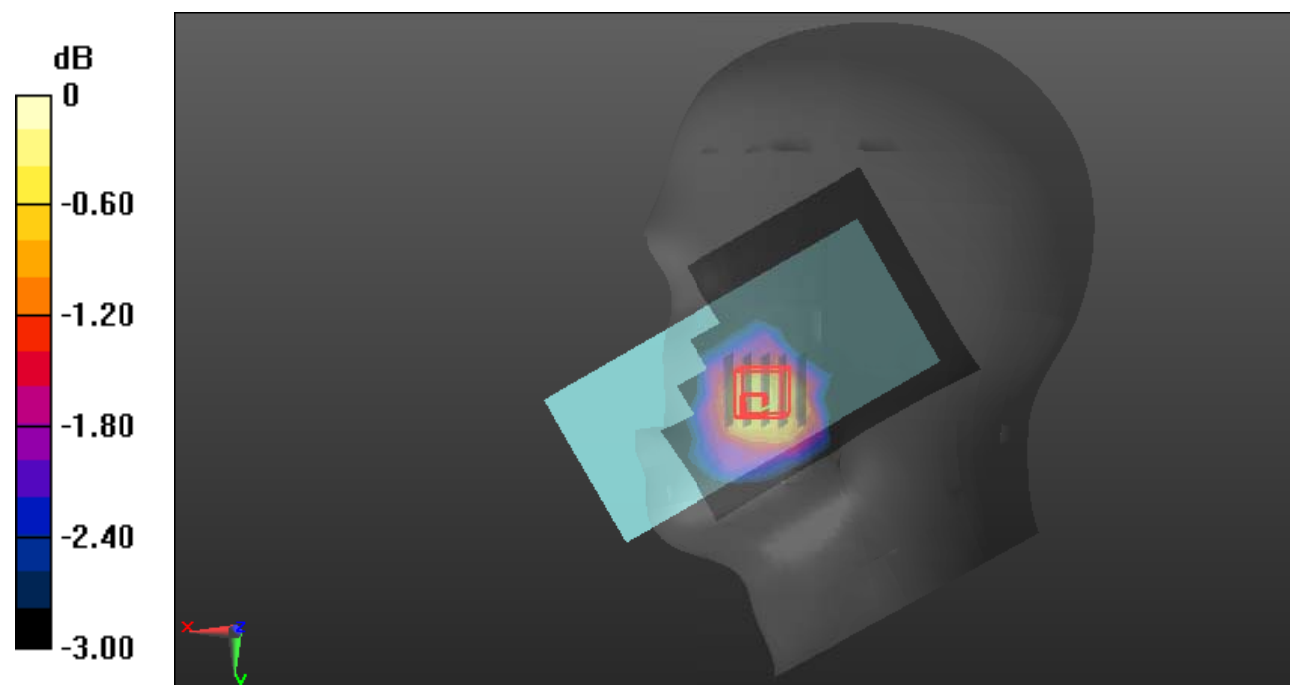

0 dB = 0.0906 W/kg = -10.43 dB dBW/kg

Test Plot14#: LTE Band 5_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.756$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.5 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.444 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.80 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

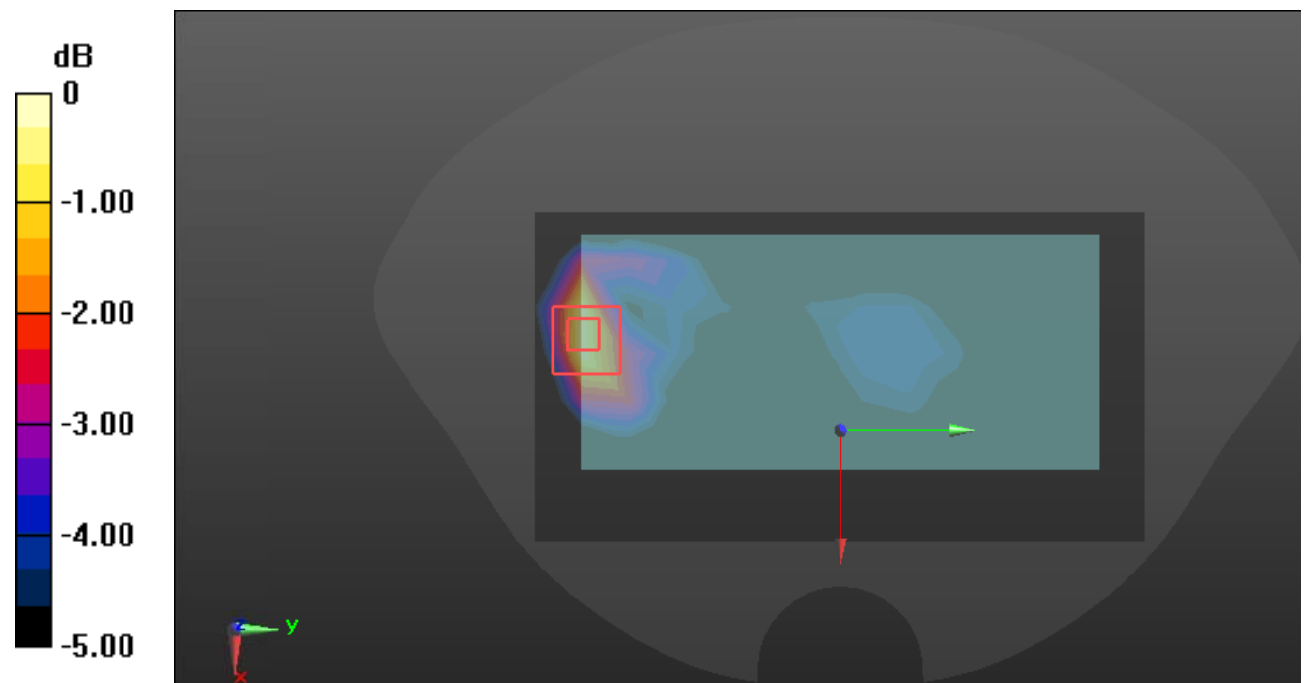

0 dB = 0.478 W/kg = -3.21 dB dBW/kg

Test Plot15#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f=2535$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 39.597$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27) @2535 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.689 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.119 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.707 W/kg

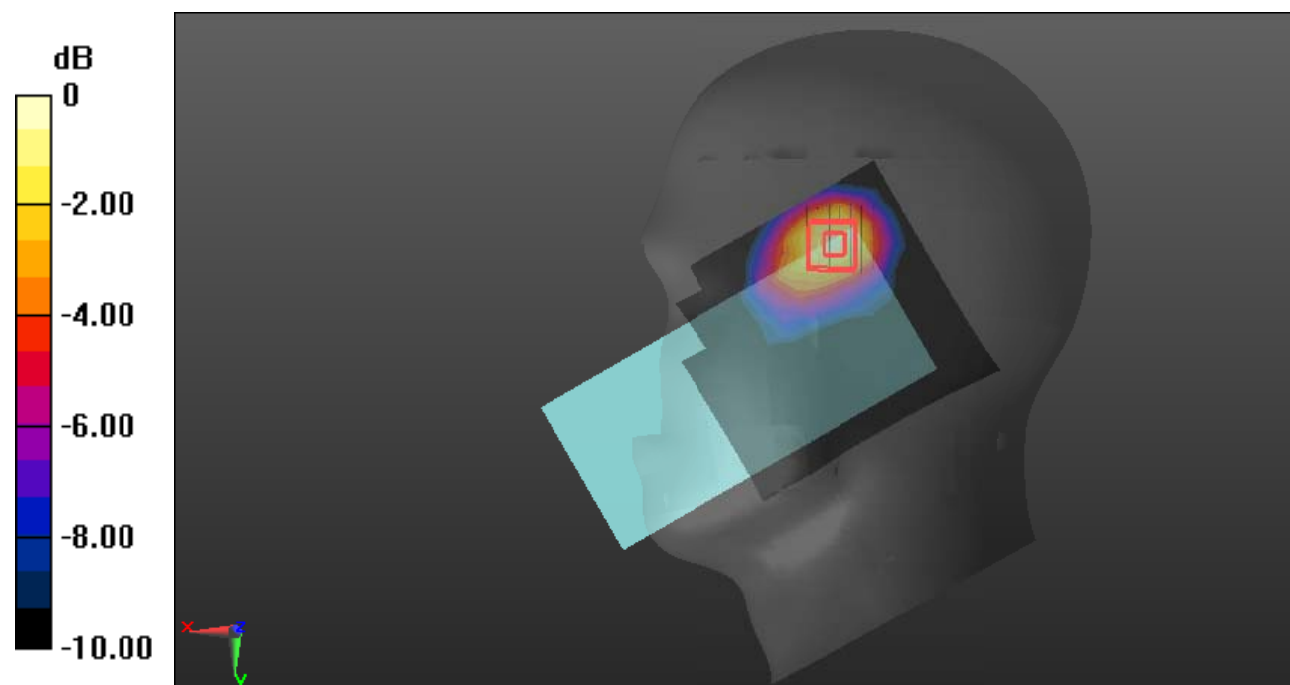

0 dB = 0.707 W/kg = -1.51 dB dBW/kg

Test Plot16#: LTE Band 7_Body Left_50%RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 39.597$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27) @2535 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.409 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.087 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

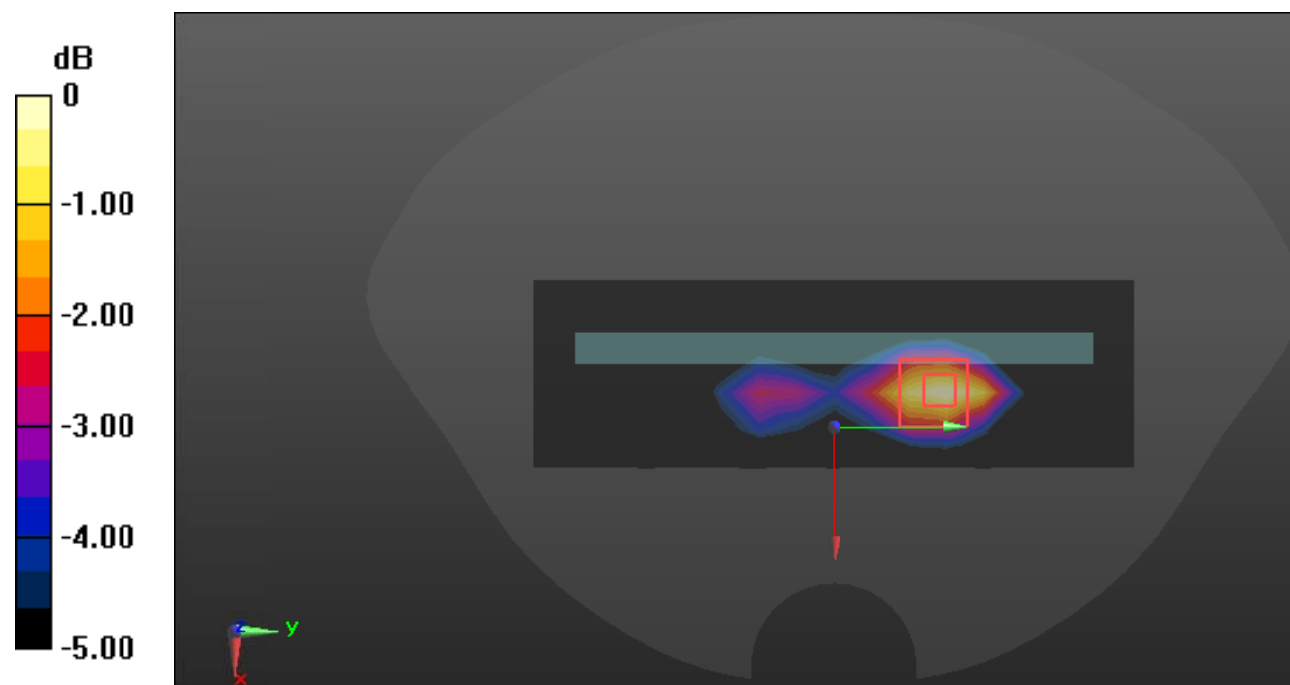

0 dB = 0.393 W/kg = -4.06 dB dBW/kg

Test Plot17#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.499$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @707.5 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0442 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6910 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0499 W/kg

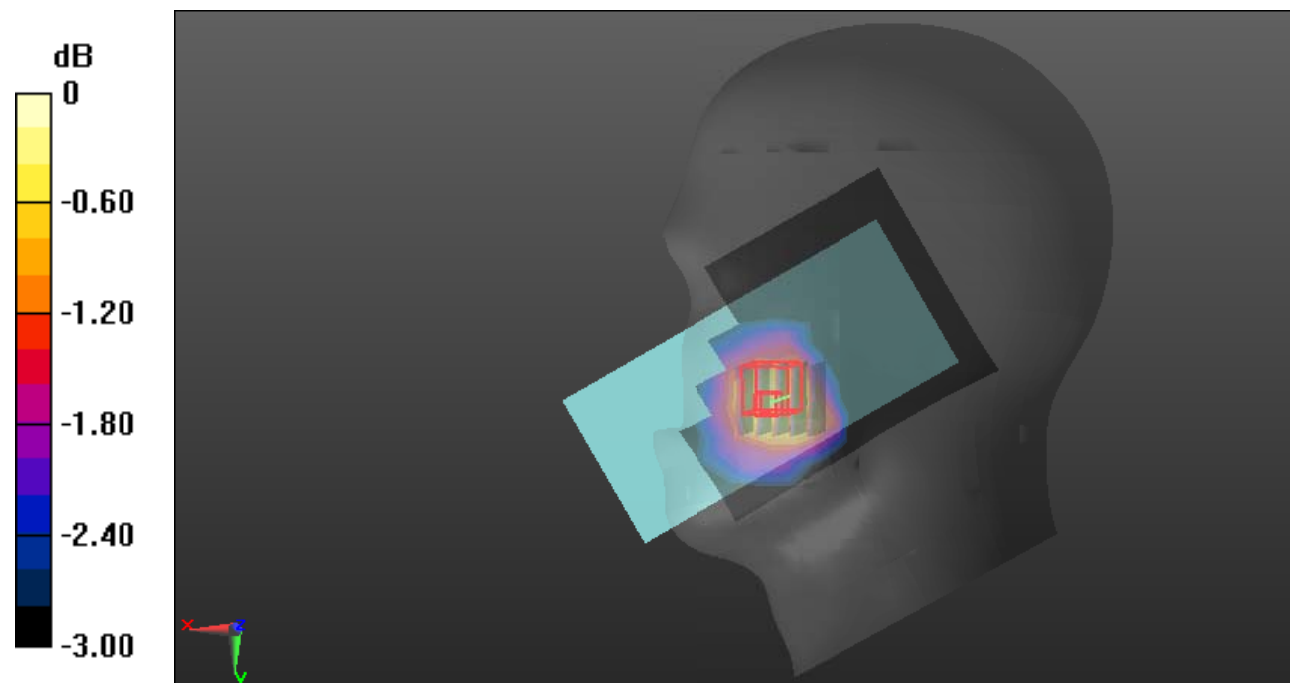

0 dB = 0.0499 W/kg = -13.02 dB dBW/kg

Test Plot18#: LTE Band 12_Body Back_50%RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.499$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @707.5 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.188 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.34 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

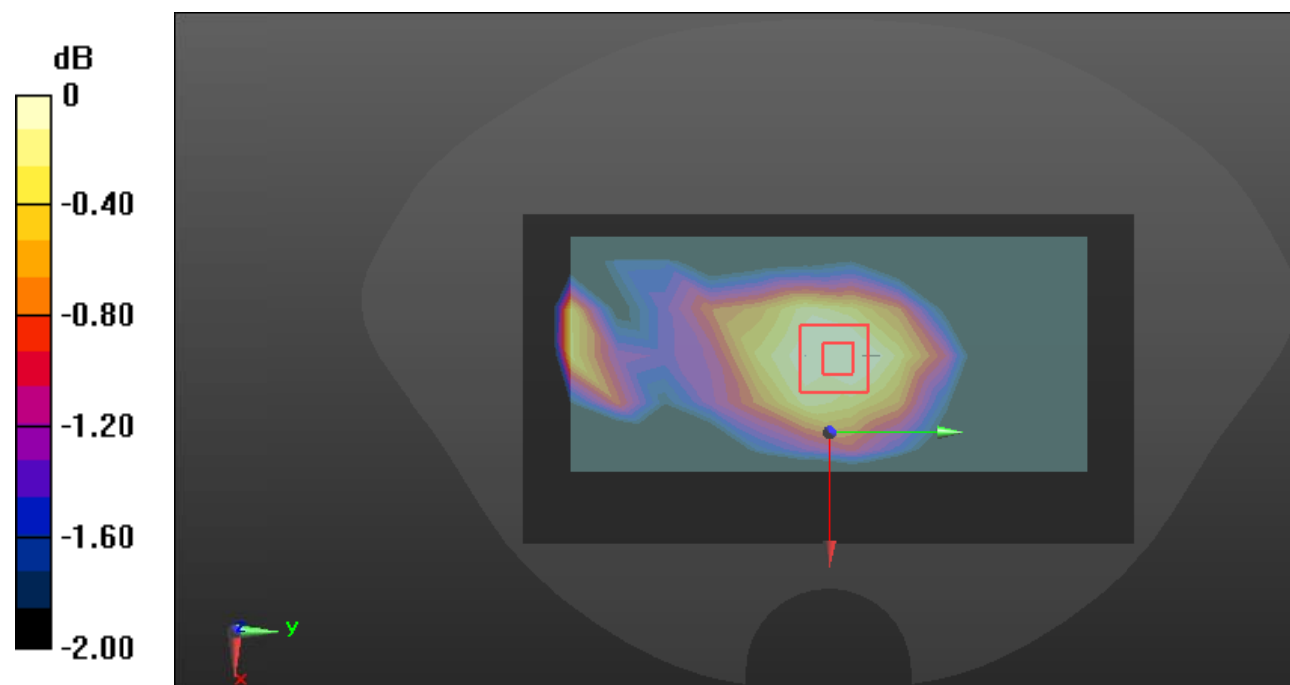

0 dB = 0.180 W/kg = -7.45 dB dBW/kg

Test Plot19#: LTE Band 41_Head Right Cheek_50%RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f=2595$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 38.343$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02) @2595 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.781 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.082 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.767 W/kg

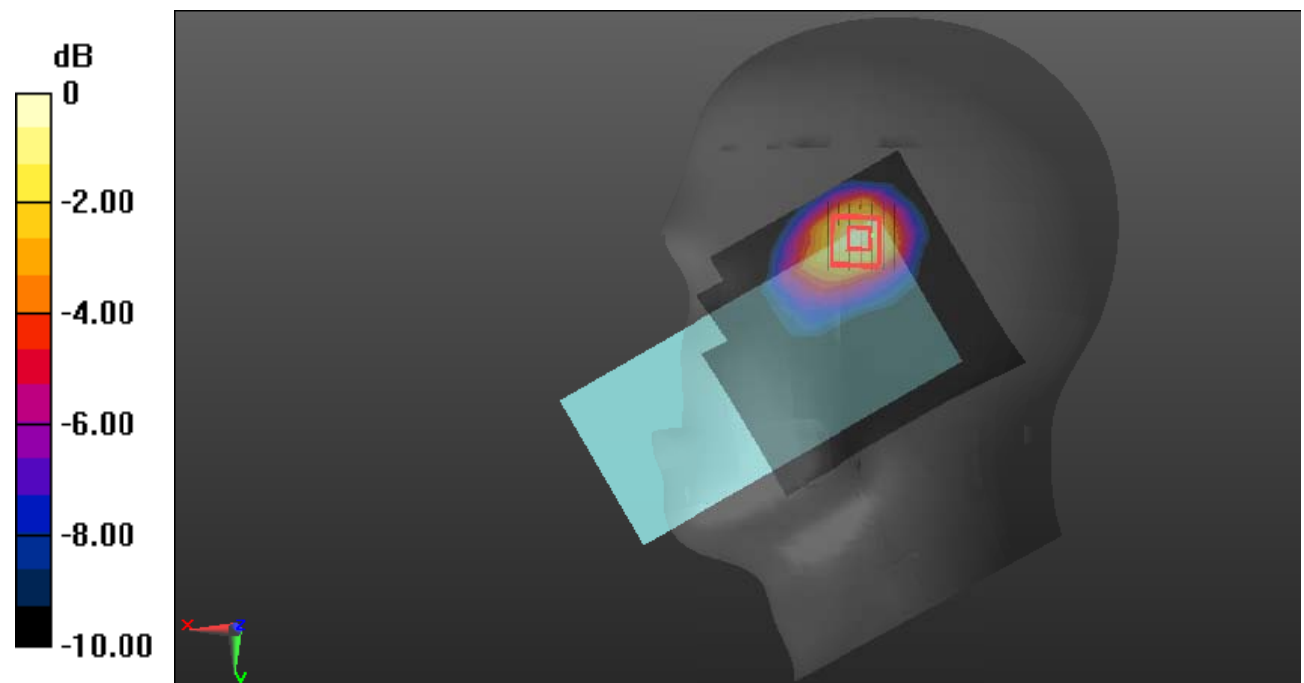

0 dB = 0.767 W/kg = -1.15 dB dBW/kg

Test Plot20#: LTE Band 41_Body Left_50%RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 38.343$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02) @2595 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.288 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.890 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

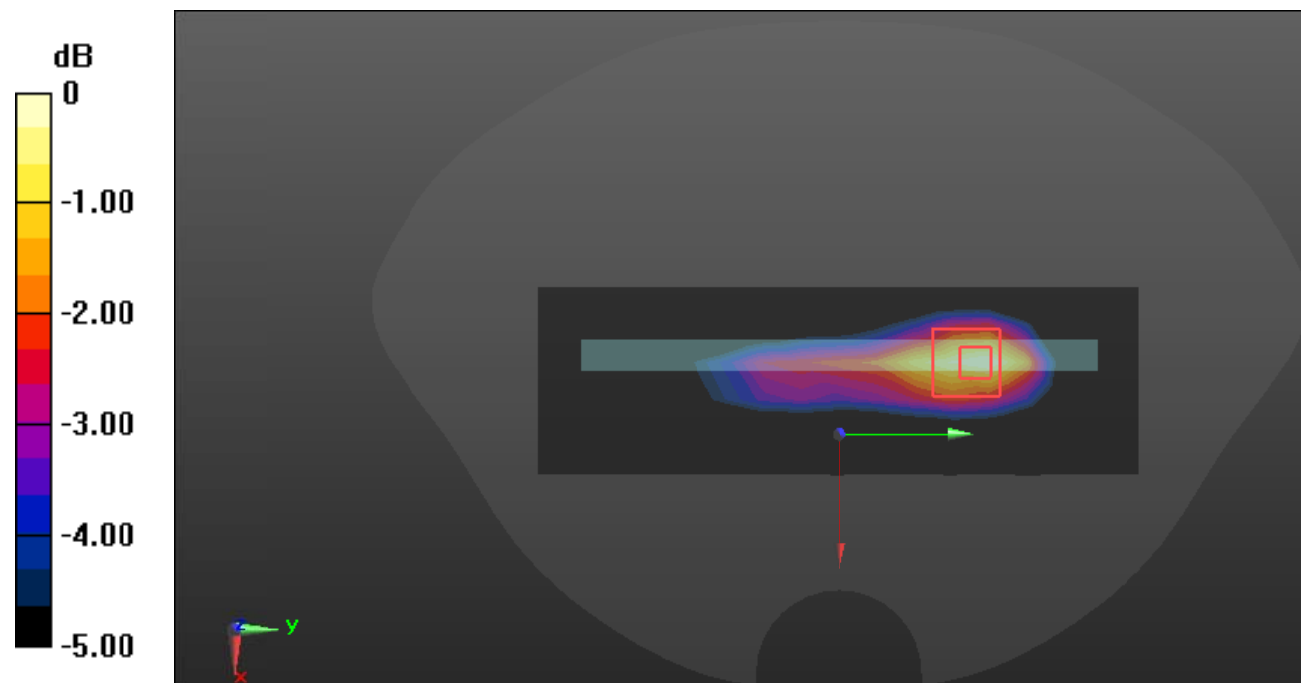

0 dB = 0.278 W/kg = -5.56 dB dBW/kg

Test Plot21#: LTE Band 66_Head Right Cheek_1RB_Low**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1720$ MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 41.672$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1720 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.36 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.90 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.690 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

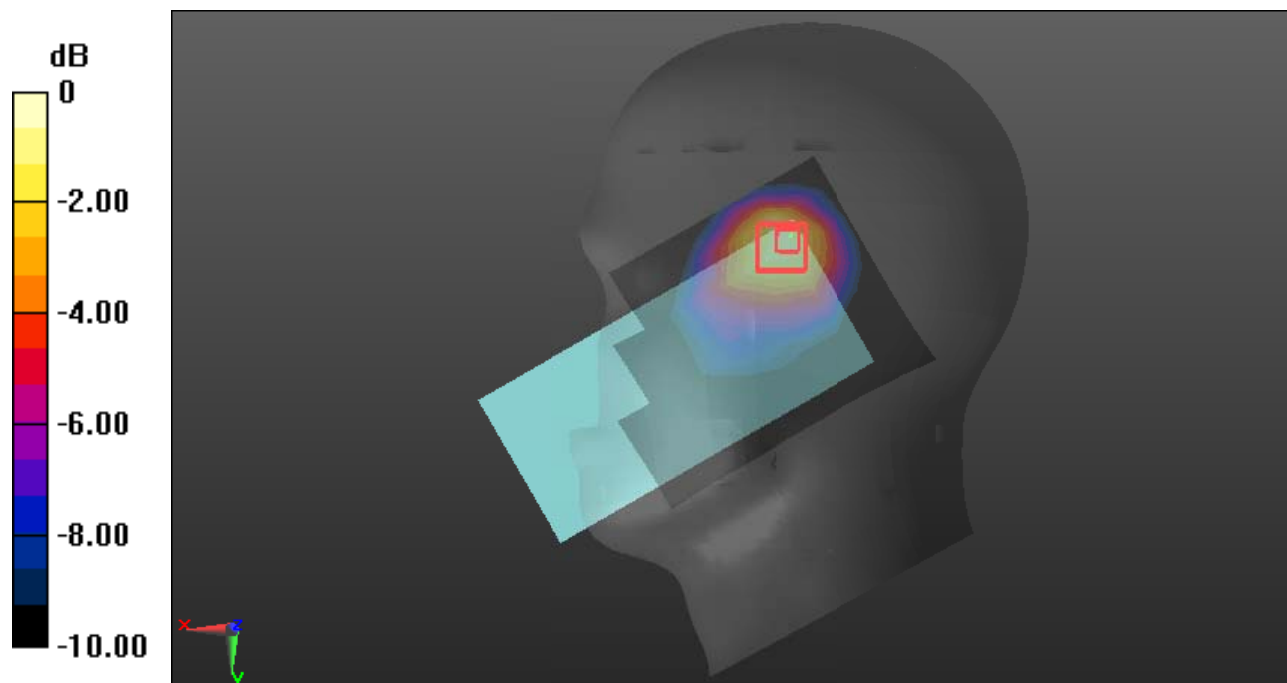

0 dB = 1.55 W/kg = 1.90 dB dBW/kg

Test Plot22#: LTE Band 66_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1745$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 41.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1745 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.589 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.33 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.628 W/kg

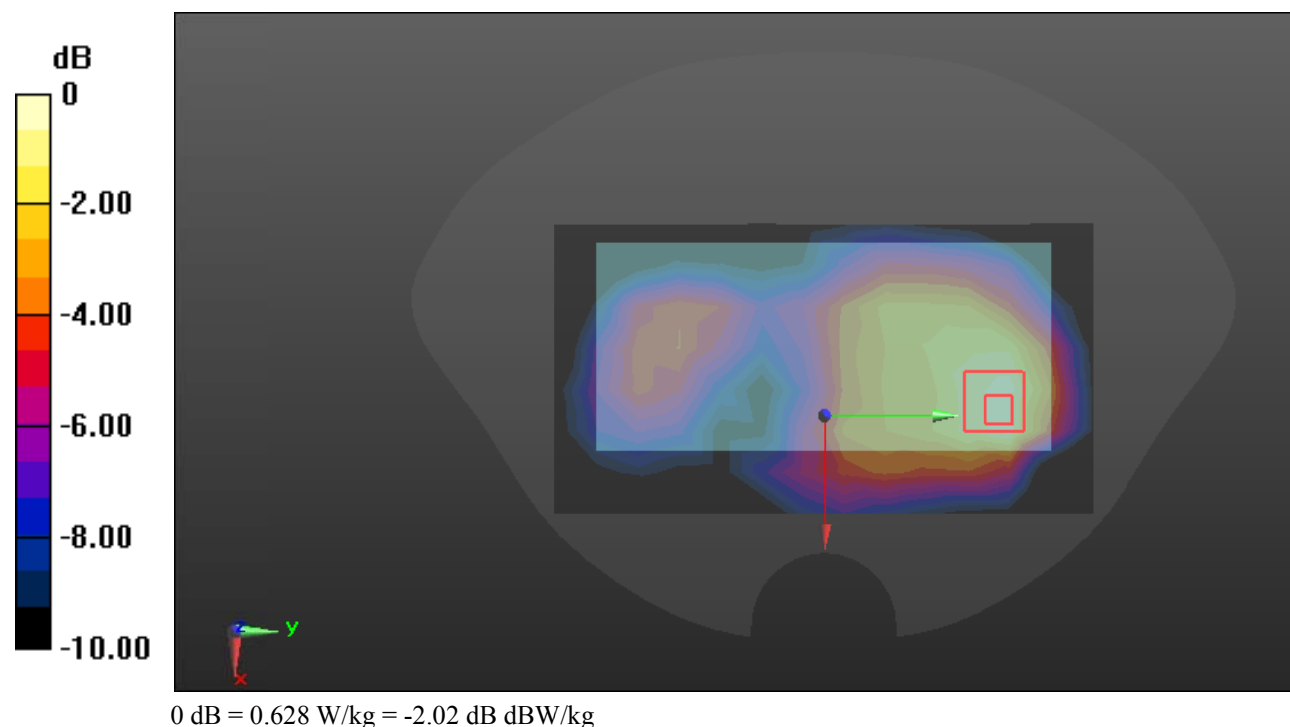

Test Plot23#: LTE Band 71_Head Right Cheek_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 43.851$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @680.5 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.162 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.650 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

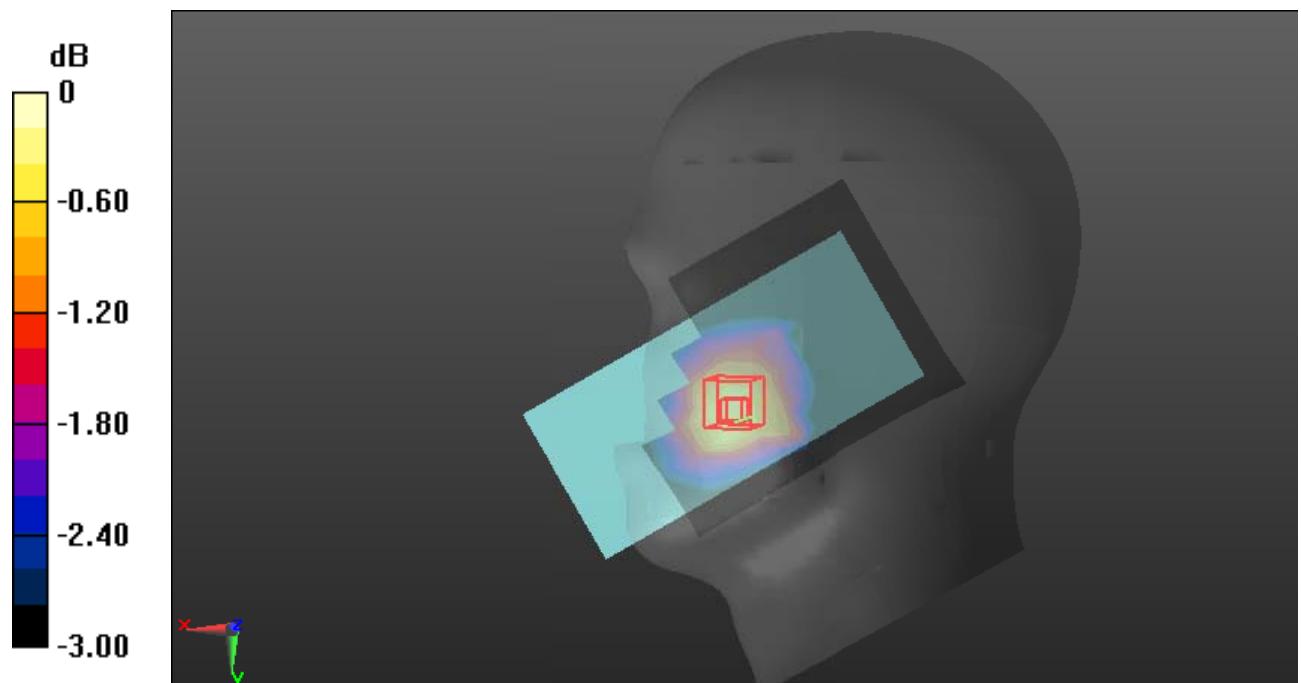

0 dB = 0.173 W/kg = -7.62 dB dBW/kg

Test Plot24#: LTE Band 71_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 43.851$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @680.5 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.254 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.25 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

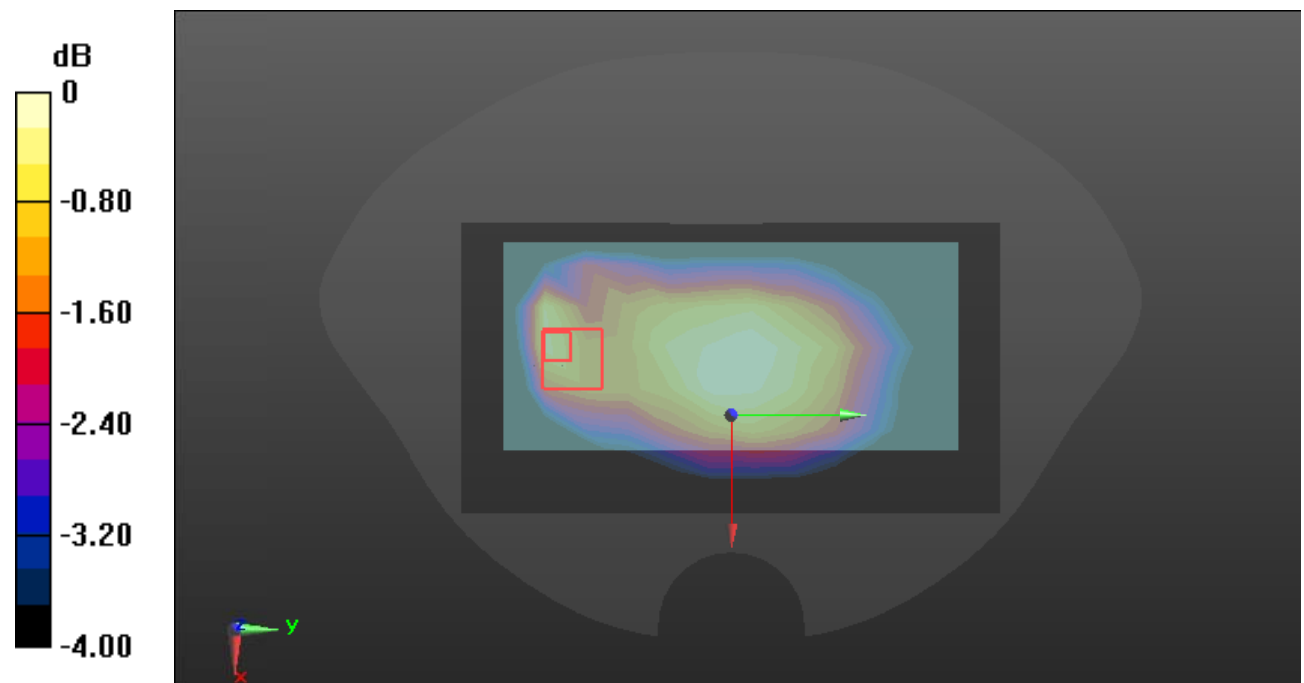

0 dB = 0.253 W/kg = -5.97 dB dBW/kg

Test Plot 25#: 2.4G WiFi High _ Head Left Cheek**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: UID 0, 802.11 b(0); Frequency: 2462 MHz;Duty Cycle: 1:1.005

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.878 \text{ S/m}$; $\epsilon_r = 38.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27) @ 2462 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.765 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.069 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.852 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 0.722 W/kg

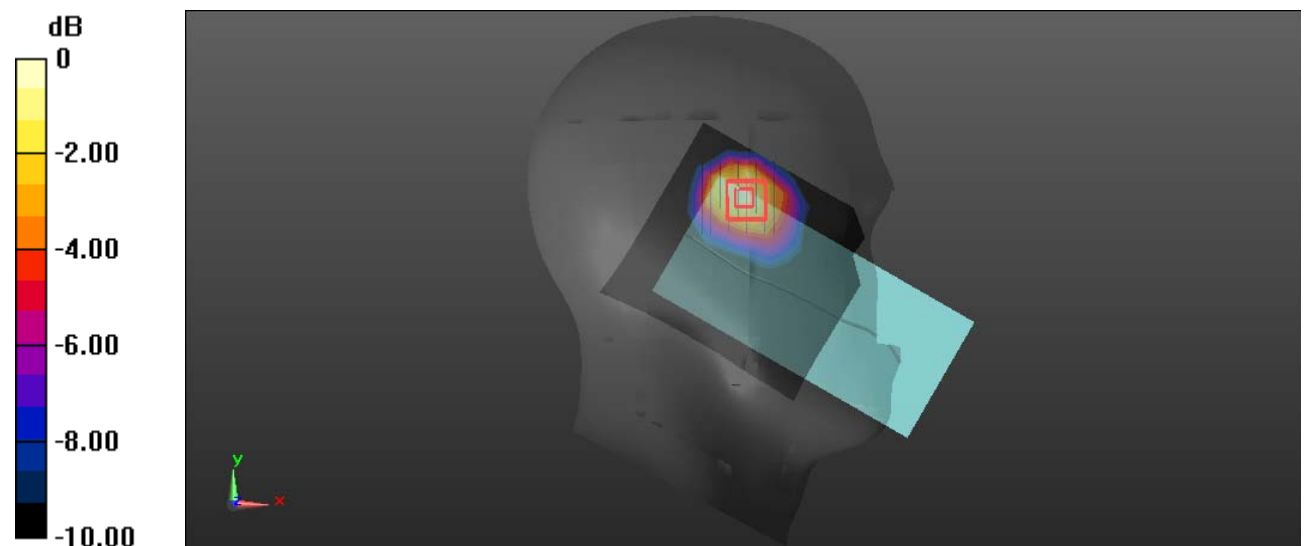 $0 \text{ dB} = 0.722 \text{ W/kg} = -1.41 \text{ dBW/kg}$

Test Plot 26#: 2.4G WiFi High _ Body Right**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-1;**

Communication System: UID 0, 802.11 b(0); Frequency: 2462 MHz;Duty Cycle: 1:1.005

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.878 \text{ S/m}$; $\epsilon_r = 38.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27) @ 2462 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.251 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.240 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

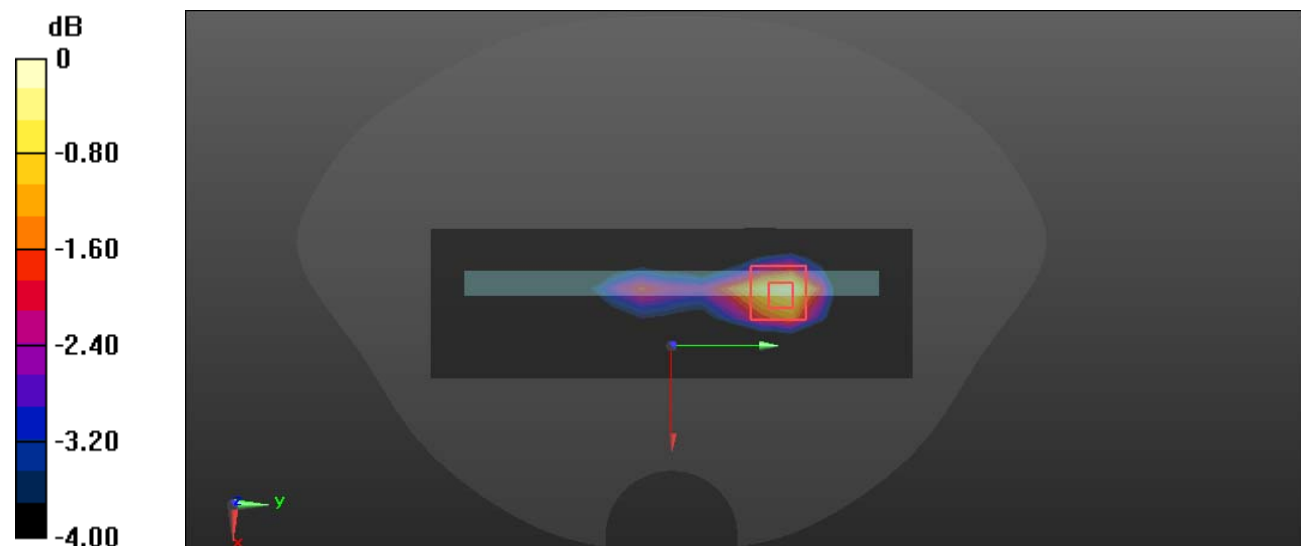 $0 \text{ dB} = 0.254 \text{ W/kg} = -5.95 \text{ dBW/kg}$

Test Plot27#: LTE Band 66_Head Right Cheek_1RB_Low(Configuration 1 worst case)**DUT: Phone; Type: GRAVITY G64; Serial: RDG240702002-2;**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 41.672$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1720 MHz; Calibrated: 2024/3/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527;Calibrated: 2024/3/26
- Phantom: Twin-SAM; Type: Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.12 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.636 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

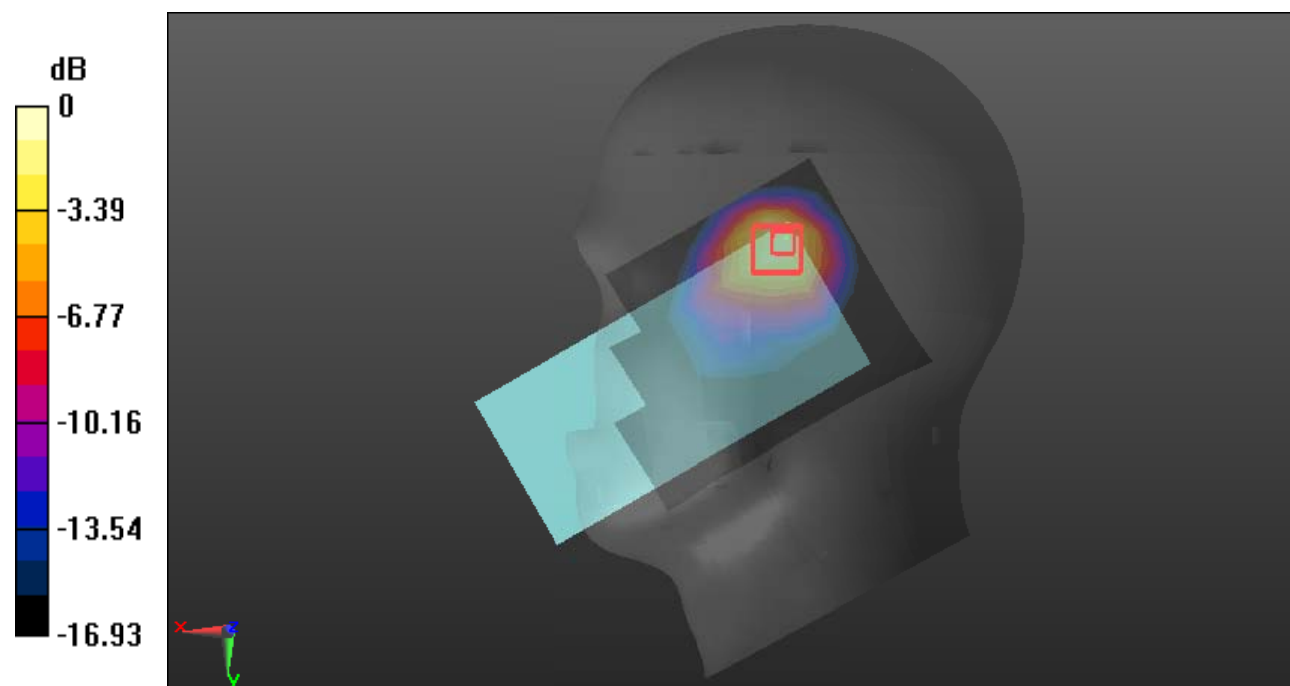

0 dB = 1.45 W/kg = 1.61 dB dBW/kg