



TESTING LABORATORY  
CERTIFICATE #4820.01



# FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

## MAXWEST COMMUNICATION LIMITED

ROOM 1802B FORTRESS TOWER 250 KING'S ROAD, NORTH POINT, Hong Kong

**FCC ID: 2ASP8NEOFLIPJR**

|                                                                                                                                                                                                                                                                               |                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                        | <b>Product Type:</b><br>Mobile Phone |
| <b>Report Number:</b> RDG190314003-00D                                                                                                                                                                                                                                        |                                      |
| <b>Report Date:</b> 2019-04-16                                                                                                                                                                                                                                                |                                      |
| <b>Reviewed By:</b>                                                                                                                                                                                                                                                           | Jerry Zhang<br>EMC Manager           |
| <b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                      |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## **TABLE OF CONTENTS**

|                                                                                                 |           |
|-------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                 | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                        | 4         |
| OBJECTIVE .....                                                                                 | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                              | 4         |
| TEST METHODOLOGY .....                                                                          | 4         |
| MEASUREMENT UNCERTAINTY.....                                                                    | 5         |
| TEST FACILITY .....                                                                             | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                           | <b>6</b>  |
| JUSTIFICATION .....                                                                             | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                        | 6         |
| CONFIGURATION OF TEST SETUP .....                                                               | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                               | 7         |
| <b>SUMMARY OF TEST RESULTS.....</b>                                                             | <b>8</b>  |
| <b>FCC §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>                                             | <b>9</b>  |
| APPLICABLE STANDARD .....                                                                       | 9         |
| TEST RESULT .....                                                                               | 9         |
| <b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>                                            | <b>10</b> |
| <b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>                     | <b>11</b> |
| APPLICABLE STANDARD .....                                                                       | 11        |
| TEST PROCEDURE .....                                                                            | 11        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 12        |
| TEST DATA .....                                                                                 | 12        |
| <b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - OCCUPIED BANDWIDTH .....</b>                   | <b>14</b> |
| APPLICABLE STANDARD .....                                                                       | 14        |
| TEST PROCEDURE .....                                                                            | 14        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 14        |
| TEST DATA .....                                                                                 | 15        |
| <b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b> | <b>17</b> |
| APPLICABLE STANDARD .....                                                                       | 17        |
| TEST PROCEDURE .....                                                                            | 17        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 17        |
| TEST DATA .....                                                                                 | 18        |
| <b>FCC §2.1053, §22.917 &amp; §24.238 - SPURIOUS RADIATED EMISSIONS .....</b>                   | <b>21</b> |
| APPLICABLE STANDARD .....                                                                       | 21        |
| TEST PROCEDURE .....                                                                            | 21        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 22        |
| TEST DATA .....                                                                                 | 22        |
| <b>FCC §22.917(A) &amp; §24.238(A)- BAND EDGES.....</b>                                         | <b>24</b> |
| APPLICABLE STANDARD .....                                                                       | 24        |
| TEST PROCEDURE .....                                                                            | 24        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 24        |
| TEST DATA .....                                                                                 | 25        |
| <b>FCC §2.1055, §22.355 &amp; §24.235 - FREQUENCY STABILITY .....</b>                           | <b>28</b> |

APPLICABLE STANDARD .....28

TEST PROCEDURE .....28

TEST EQUIPMENT LIST AND DETAILS.....29

TEST DATA .....29

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                              |                |                                                                                             |
|----------------------------------------------|----------------|---------------------------------------------------------------------------------------------|
| <b>EUT Name:</b>                             |                | Mobile Phone                                                                                |
| <b>EUT Model:</b>                            |                | NEO Flip JR                                                                                 |
| <b>Operation modes:</b>                      |                | GSM Voice, GPRS Data                                                                        |
| <b>Operation Frequency:</b>                  |                | GSM 850: 824-849 MHz(TX); 869-894 MHz(RX)<br>PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) |
| <b>Maximum Output Power:<br/>(Conducted)</b> |                | GSM 850 : 31.4 dBm; PCS 1900: 28.9 dBm                                                      |
| <b>Modulation Type:</b>                      |                | GMSK                                                                                        |
| <b>Rated Input Voltage:</b>                  |                | 3.7VDC from battery and 5VDC from adapter                                                   |
| <b>Adapter<br/>Information</b>               | <b>Input:</b>  | AC 100-240V, 50/60Hz, 0.15A                                                                 |
|                                              | <b>Output:</b> | DC 5V-500mA                                                                                 |
| <b>External Dimension:</b>                   |                | 102mm(L)* 52mm(W)*16mm(H)                                                                   |
| <b>Serial Number:</b>                        |                | 190314003                                                                                   |
| <b>EUT Received Date:</b>                    |                | 2019/03/14                                                                                  |

### Objective

This report is prepared on behalf of *MAXWEST COMMUNICATION LIMITED* in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ASP8NEOFLIPJR.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

**Measurement Uncertainty**

| Parameter                     | Measurement Uncertainty                      |
|-------------------------------|----------------------------------------------|
| Occupied Channel Bandwidth    | $\pm 5\%$                                    |
| RF output power, conducted    | $\pm 0.61\text{dB}$                          |
| Unwanted Emissions, radiated  | 30MHz ~ 1GHz: 5.85 dB<br>1G~26.5GHz: 5.23 dB |
| Unwanted Emissions, conducted | $\pm 1.5\text{ dB}$                          |
| Temperature                   | $\pm 1^\circ\text{C}$                        |
| Humidity                      | $\pm 5\%$                                    |
| DC and low frequency voltages | $\pm 0.4\%$                                  |
| Duty Cycle                    | 1%                                           |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode. The device supports GSM/GPRS 850 and 1900 Bands.


### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description                          | Model    | Serial Number |
|--------------|--------------------------------------|----------|---------------|
| R&S          | Universal Radio Communication Tester | CMU200   | 106 891       |
| Un-known     | ANTENNA                              | Un-known | /             |

### Configuration of Test Setup

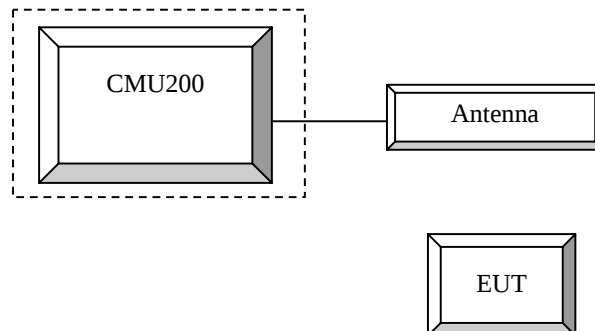

Block Diagram of Test Setup

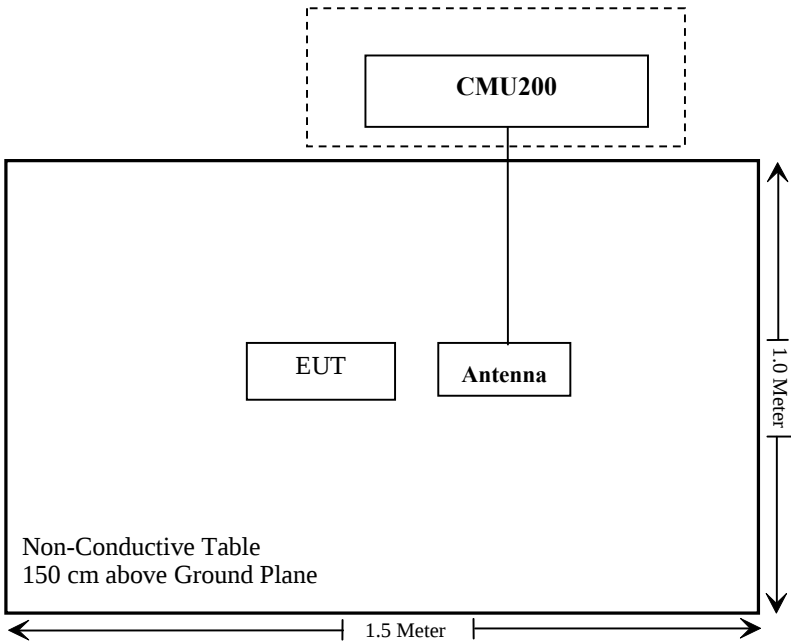

**SUMMARY OF TEST RESULTS**

| FCC Rules                                | Description of Test                                                    | Result         |
|------------------------------------------|------------------------------------------------------------------------|----------------|
| §1.1310, §2.1093                         | RF Exposure                                                            | Compliance     |
| §2.1046;<br>§ 22.913 (a); § 24.232 (c);  | RF Output Power                                                        | Compliance     |
| § 2.1047                                 | Modulation Characteristics                                             | Not Applicable |
| § 2.1049; § 22.905<br>§ 22.917; § 24.238 | Occupied Bandwidth                                                     | Compliance     |
| § 2.1051,<br>§ 22.917 (a); § 24.238 (a)  | Spurious Emissions at Antenna Terminal                                 | Compliance     |
| § 2.1053<br>§ 22.917 (a); § 24.238 (a)   | Spurious Radiation Emissions                                           | Compliance     |
| § 22.917 (a); § 24.238 (a)               | Out of band emission, Band Edge                                        | Compliance     |
| § 2.1055<br>§ 22.355; § 24.235           | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliance     |

---

## **FCC §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RDG190314003-20.

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## **FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**

### **Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **Test Procedure**

#### **GSM/GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

**Test Equipment List and Details**

| Manufacturer   | Description                          | Model                | Serial Number    | Calibration Date | Calibration Due Date |
|----------------|--------------------------------------|----------------------|------------------|------------------|----------------------|
| R&S            | EMI Test Receiver                    | ESCI                 | 100224           | 2018-12-10       | 2019-12-10           |
| Sunol Sciences | Antenna                              | JB3                  | A060611-1        | 2017-11-10       | 2020-11-10           |
| EMCO           | Adjustable Dipole Antenna            | 3121C                | 9109-753         | Not required     | N/A                  |
| Unknown        | Coaxial Cable                        | C-NJNJ-50            | C-0400-01        | 2018-09-05       | 2019-09-05           |
| Unknown        | Coaxial Cable                        | C-NJNJ-50            | C-0075-01        | 2018-09-05       | 2019-09-05           |
| Unknown        | Coaxial Cable                        | C-NJNJ-50            | C-1400-01        | 2018-05-06       | 2019-05-06           |
| Unknown        | Coaxial Cable                        | C-NJNJ-50            | C-0200-02        | 2018-09-05       | 2019-09-05           |
| R&S            | Spectrum Analyzer                    | FSP 38               | 100478           | 2018-12-10       | 2019-12-10           |
| TDK RF         | Horn Antenna                         | HRN-0118             | 130 084          | 2019-01-05       | 2021-01-04           |
| ETS-Lindgren   | Horn Antenna                         | 3115                 | 000 527 35       | 2019-01-05       | 2021-01-04           |
| R&S            | Universal Radio Communication Tester | CMU200               | 106 891          | 2018-12-14       | 2019-12-14           |
| MICRO-COAX     | Coaxial Cable                        | UFA147-1-2362-100100 | 64639 231029-001 | 2019-02-24       | 2020-02-28           |
| Unknown        | Coaxial Cable                        | C-SJ00-0010          | C0010/01         | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.8 °C   |
| <b>Relative Humidity:</b> | 39%       |
| <b>ATM Pressure:</b>      | 100.2 kPa |

\* The testing was performed by Blake Yang on 2019-03-18.

Test Result: Compliance

**Conducted Output Power****Cellular Band & PCS Band**

| Band     | Channel No. | Conducted Peak Output Power (dBm) |                |                |                |                |
|----------|-------------|-----------------------------------|----------------|----------------|----------------|----------------|
|          |             | GSM                               | GPRS 1 TX Slot | GPRS 2 TX Slot | GPRS 3 TX Slot | GPRS 4 TX Slot |
| Cellular | 128         | 31.1                              | 27.59          | 27.47          | 26.13          | 21.98          |
|          | 190         | 31.2                              | 28.31          | 27.58          | 26.26          | 22.10          |
|          | 251         | 31.4                              | 28.38          | 27.62          | 26.36          | 22.16          |
| PCS      | 512         | 28.9                              | 25.54          | 24.52          | 23.14          | 21.51          |
|          | 661         | 28.2                              | 25.38          | 24.41          | 23.08          | 21.61          |
|          | 810         | 28.1                              | 23.97          | 23.89          | 22.59          | 21.12          |

**ERP & EIRP****Part 22H**

| Frequency<br>(MHz)     | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                        |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM 850 Middle Channel |                |                               |                               |                              |                    |                            |                |                |
| 836.60                 | H              | 89.44                         | 15.21                         | 0.00                         | 0.50               | 14.71                      | 38.45          | 23.74          |
| 836.60                 | V              | 98.35                         | 27.09                         | 0.00                         | 0.50               | 26.59                      | 38.45          | 11.86          |

**Part 24E**

| Frequency<br>(MHz)      | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                         |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| PCS 1900 Middle Channel |                |                               |                               |                              |                    |                            |                |                |
| 1880.00                 | H              | 89.03                         | 16.42                         | 11.66                        | 2.66               | 25.42                      | 33.00          | 7.58           |
| 1880.00                 | V              | 85.92                         | 13.45                         | 11.66                        | 2.66               | 22.45                      | 33.00          | 10.55          |

**Note:**

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

**FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH****Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

**Test Equipment List and Details**

| Manufacturer    | Description      | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------|---------------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer  | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |
| E-Microwave     | Two-way Splitter | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |
| yzjingcheng     | Coaxial Cable    | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| Unknown         | Coaxial Cable    | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.4 °C   |
| <b>Relative Humidity:</b> | 57 %      |
| <b>ATM Pressure:</b>      | 100.2 kPa |

\* The testing was performed by Blake Yang on 2019-03-18.


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

| Band     | Test Channel | Mode | 99% Occupied Bandwidth (MHz) | 26 dB Occupied Bandwidth (MHz) |
|----------|--------------|------|------------------------------|--------------------------------|
| Cellular | M            | GSM  | 0.246                        | 0.321                          |
| PCS      |              | PCS  | 0.246                        | 0.313                          |

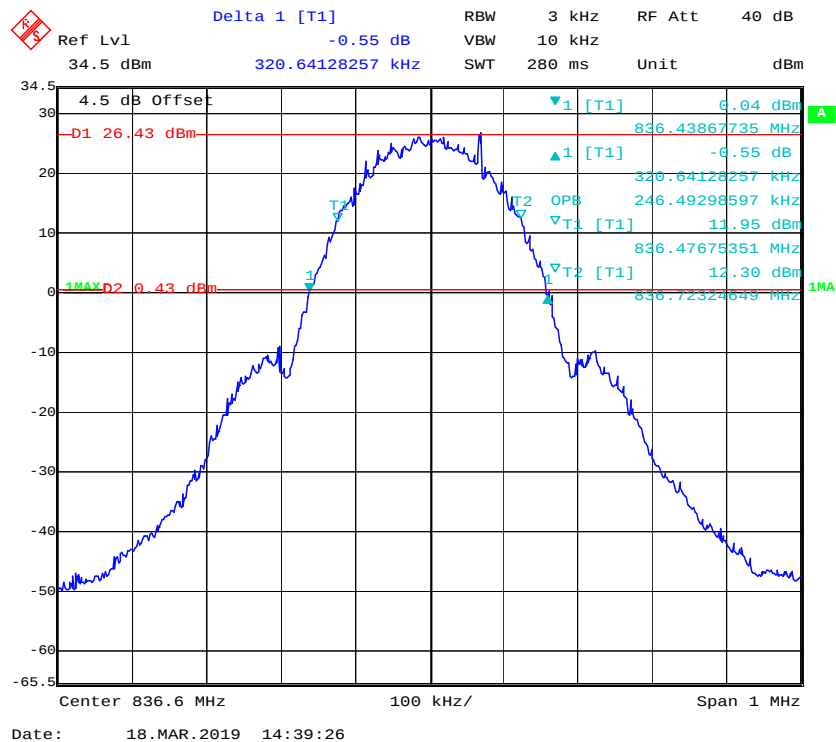**GSM 850 Cellular Band**

### GSM PCS1900 Cellular Band

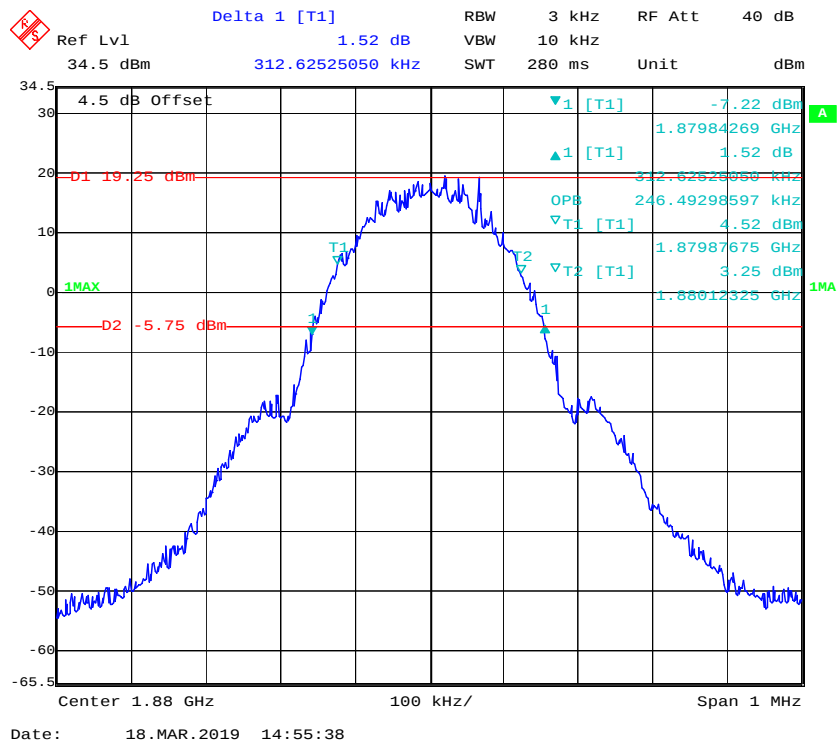

## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

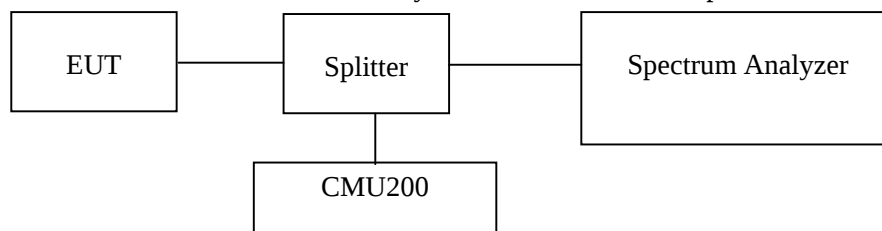

### Test Equipment List and Details

| Manufacturer    | Description      | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------|---------------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer  | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |
| E-Microwave     | Two-way Splitter | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |
| yzjingcheng     | Coaxial Cable    | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| Unknown         | Coaxial Cable    | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |


\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.4 °C   |
| Relative Humidity: | 57 %      |
| ATM Pressure:      | 100.2 kPa |


\* The testing was performed by Blake Yang on 2019-03-18.


Test Result: Compliance. Please refer to the following plots.

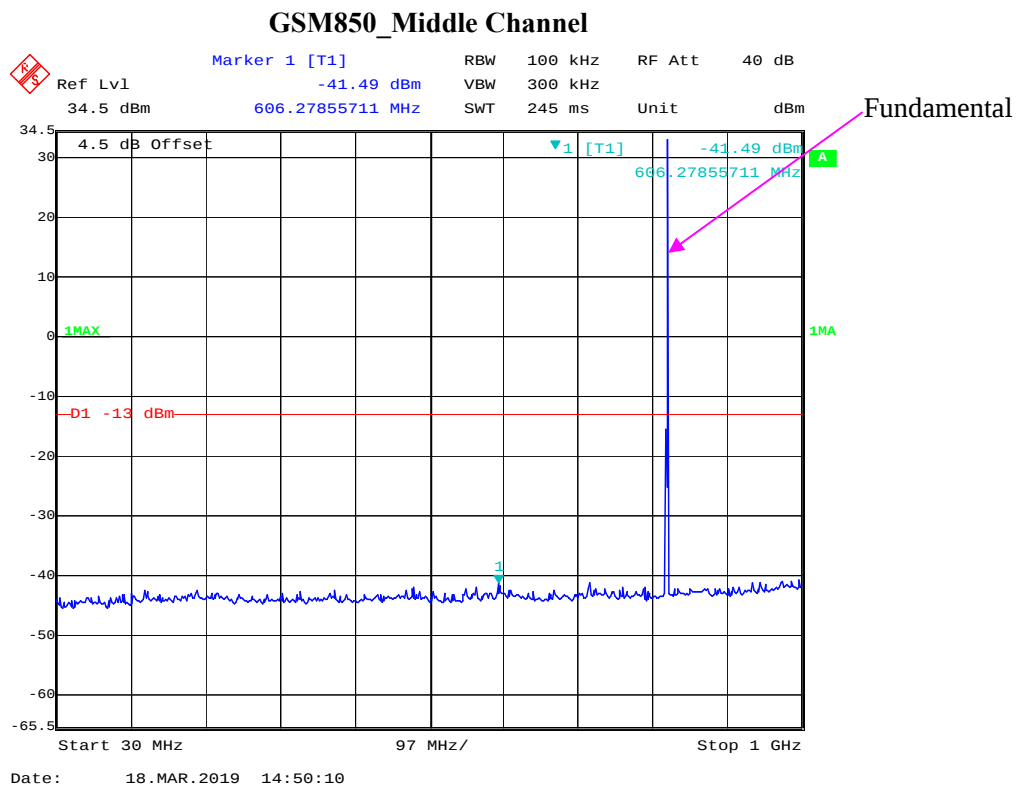

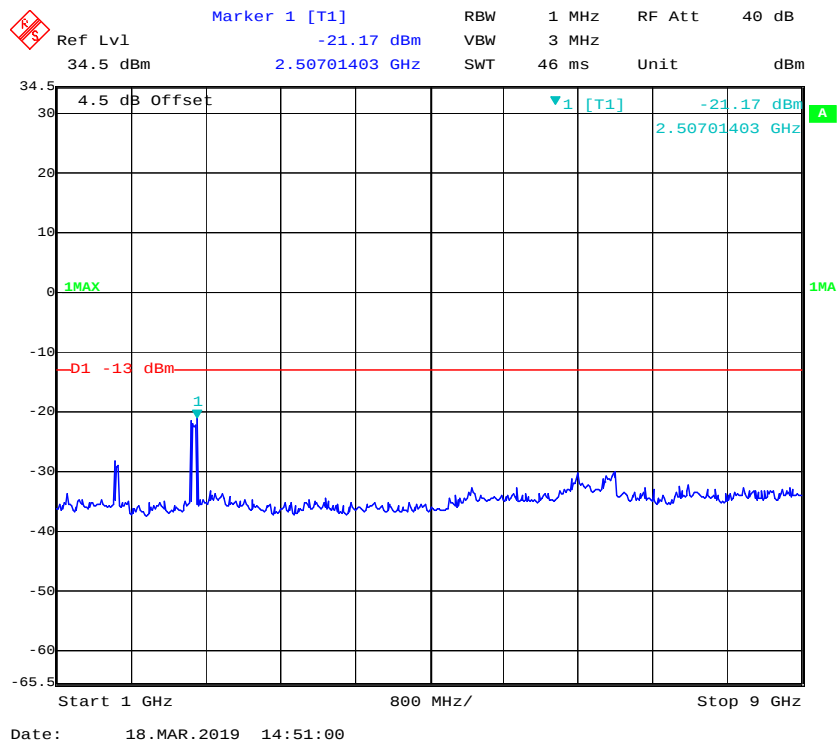

### PCS 1900\_Middle Channel

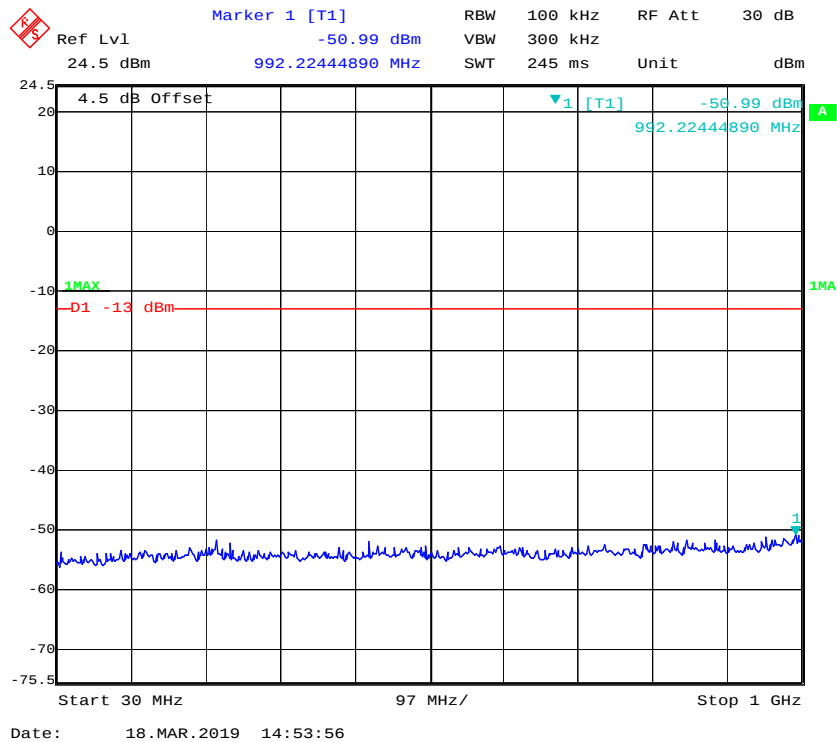

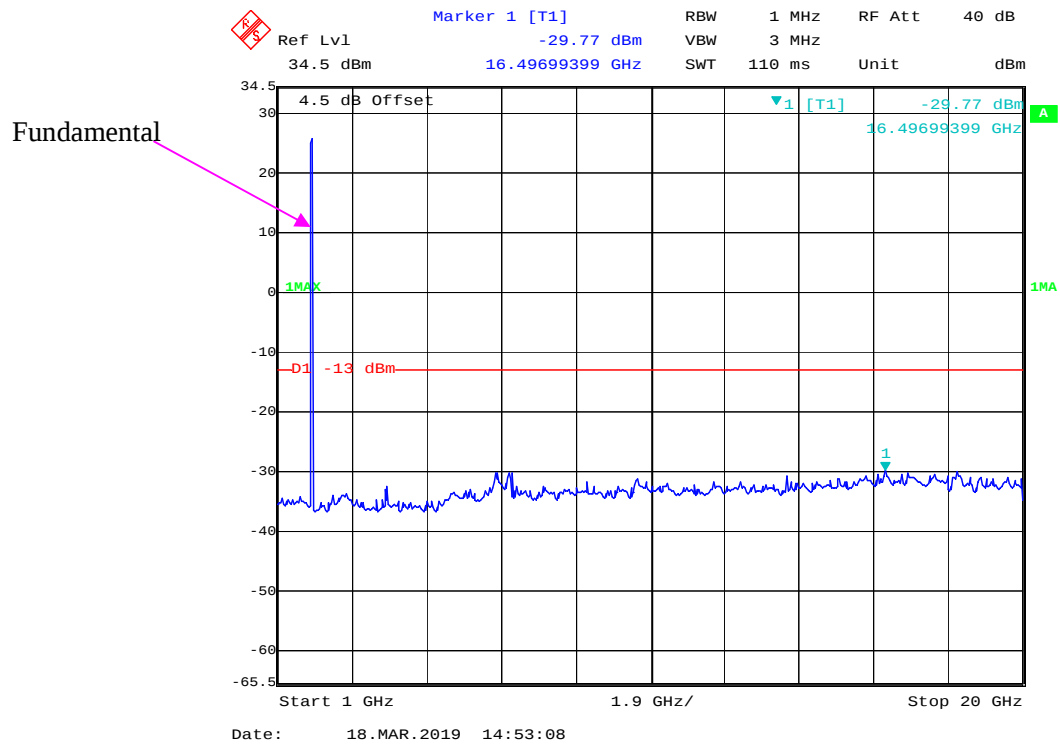

---

**FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS**

---

**Applicable Standard**

FCC § 2.1053, §22.917, § 24.238.

**Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

**Test Equipment List and Details**

| Manufacturer          | Description               | Model                 | Serial Number    | Calibration Date | Calibration Due Date |
|-----------------------|---------------------------|-----------------------|------------------|------------------|----------------------|
| R&S                   | EMI Test Receiver         | ESCI                  | 100224           | 2018-12-10       | 2019-12-10           |
| Sunol Sciences        | Antenna                   | JB3                   | A060611-1        | 2017-11-10       | 2020-11-10           |
| EMCO                  | Adjustable Dipole Antenna | 3121C                 | 9109-753         | Not Required     | N/A                  |
| Unknown               | Coaxial Cable             | C-NJNJ-50             | C-0400-01        | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable             | C-NJNJ-50             | C-0075-01        | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable             | C-NJNJ-50             | C-1400-01        | 2018-05-06       | 2019-05-06           |
| Unknown               | Coaxial Cable             | C-NJNJ-50             | C-0200-02        | 2018-09-05       | 2019-09-05           |
| HP                    | Amplifier                 | 8447D                 | 2727A05902       | 2018-09-05       | 2019-09-05           |
| Sinoscite             | Band-stop filter          | BSF824-862MS-1438-001 | 1438001          | 2018-06-16       | 2019-06-16           |
| Sinoscite             | Band-stop filter          | BSF1850-1910MS-0935V2 | 0935V2           | 2018-06-16       | 2019-06-16           |
| Agilent               | Signal Generator          | E8247C                | MY43321350       | 2018-12-10       | 2019-12-10           |
| R&S                   | Spectrum Analyzer         | FSP 38                | 100478           | 2018-12-10       | 2019-12-10           |
| TDK RF                | Horn Antenna              | HRN-0118              | 130 084          | 2019-01-05       | 2021-01-04           |
| ETS-Lindgren          | Horn Antenna              | 3115                  | 000 527 35       | 2019-01-05       | 2021-01-04           |
| MICRO-COAX            | Coaxial Cable             | UFA147-1-2362-100100  | 64639 231029-001 | 2019-02-24       | 2020-02-28           |
| Quinstar              | Amplifier                 | QLW-18405536-JO       | 15964001001      | 2018-06-27       | 2019-06-27           |
| Ducommun Technologies | Horn Antenna              | ARH-4223-02           | 1007726-01 1304  | 2016-11-18       | 2019-11-18           |
| Ducommun Technologies | Horn Antenna              | ARH-4223-02           | 1007726-02 1304  | 2016-11-18       | 2019-11-18           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.8 °C   |
| <b>Relative Humidity:</b> | 39 %      |
| <b>ATM Pressure:</b>      | 100.2 kPa |

\* The testing was performed by Neil Liao and Vern Shen on 2019-03-19.

Test Result: Compliance.

EUT Operation Mode: Transmitting

**Cellular Band (PART 22H)****30 MHz-10 GHz:**

| Frequency<br>(MHz)            | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                               |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM850, Frequency:836.600 MHz |                |                               |                               |                              |                    |                            |                |                |
| 1673.200                      | H              | 64.12                         | -50.09                        | 10.6                         | 0.73               | -40.2                      | -13.0          | 27.2           |
| 1673.200                      | V              | 63.51                         | -51.3                         | 10.6                         | 0.73               | -41.4                      | -13.0          | 28.4           |
| 2509.800                      | H              | 64.55                         | -48.47                        | 13.1                         | 1.25               | -36.6                      | -13.0          | 23.6           |
| 2509.800                      | V              | 63.22                         | -49.83                        | 13.1                         | 1.25               | -38.0                      | -13.0          | 25.0           |
| 3346.400                      | H              | 47.45                         | -63.21                        | 13.8                         | 1.61               | -51.0                      | -13.0          | 38.0           |
| 3346.400                      | V              | 48.09                         | -62.62                        | 13.8                         | 1.61               | -50.4                      | -13.0          | 37.4           |
| 1255.000                      | H              | 89.96                         | -23.19                        | 7.9                          | 1.15               | -16.5                      | -13.0          | 3.5            |
| 1255.000                      | V              | 78.62                         | -35.52                        | 7.9                          | 1.15               | -28.8                      | -13.0          | 15.8           |
| 701.240                       | H              | 39.26                         | -61.61                        | 0.0                          | 0.38               | -62.0                      | -13.0          | 49.0           |
| 701.240                       | V              | 44.82                         | -52.68                        | 0.0                          | 0.38               | -53.1                      | -13.0          | 40.1           |

**PCS Band (PART 24E)****30 MHz-20 GHz:**

| Frequency<br>(MHz)              | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                                 |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM1900, Frequency:1880.000 MHz |                |                               |                               |                              |                    |                            |                |                |
| 3760.000                        | H              | 50.03                         | -58.77                        | 13.8                         | 1.63               | -46.6                      | -13.0          | 33.6           |
| 3760.000                        | V              | 54.40                         | -54.27                        | 13.8                         | 1.63               | -42.1                      | -13.0          | 29.1           |
| 5640.000                        | H              | 58.65                         | -47.38                        | 14.0                         | 1.31               | -34.7                      | -13.0          | 21.7           |
| 5640.000                        | V              | 55.06                         | -50.85                        | 14.0                         | 1.31               | -38.1                      | -13.0          | 25.1           |
| 516.770                         | H              | 44.03                         | -60.88                        | 0.0                          | 0.35               | -61.2                      | -13.0          | 48.2           |
| 701.240                         | V              | 45.12                         | -52.38                        | 0.0                          | 0.38               | -52.8                      | -13.0          | 39.8           |

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

## FCC §22.917(a) & §24.238(a)- BAND EDGES


### Applicable Standard

FCC § 2.1053, §22.917, § 24.238.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

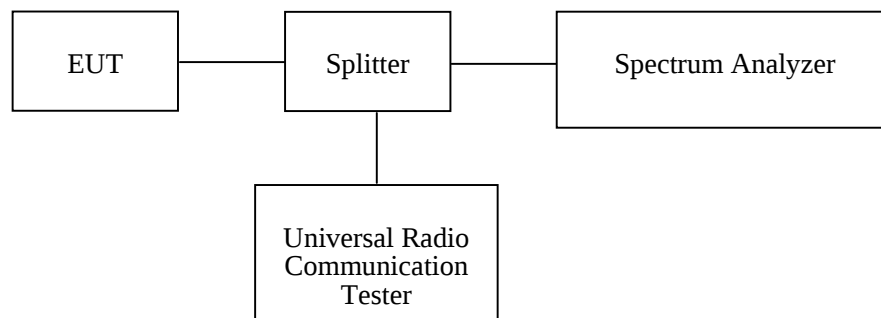

### Test Equipment List and Details

| Manufacturer    | Description      | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------|---------------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer  | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |
| E-Microwave     | Two-way Splitter | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |
| yzjingcheng     | Coaxial Cable    | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| Unknown         | Coaxial Cable    | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.4 °C   |
| Relative Humidity: | 57 %      |
| ATM Pressure:      | 100.2 kPa |


\* The testing was performed by Blake Yang on 2019-03-18.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

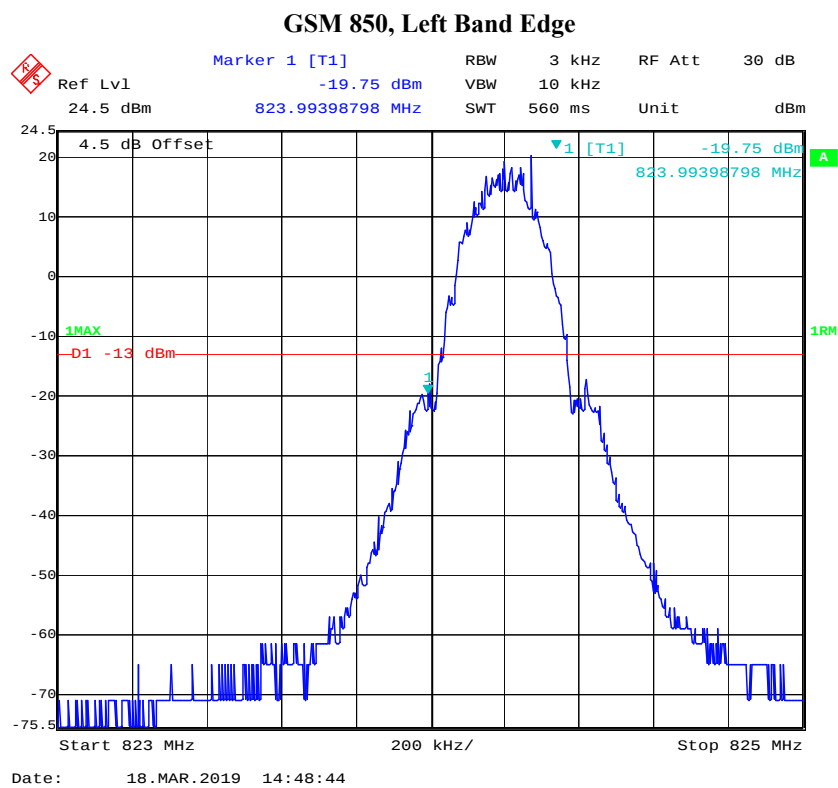


## GSM 850, Right Band Edge

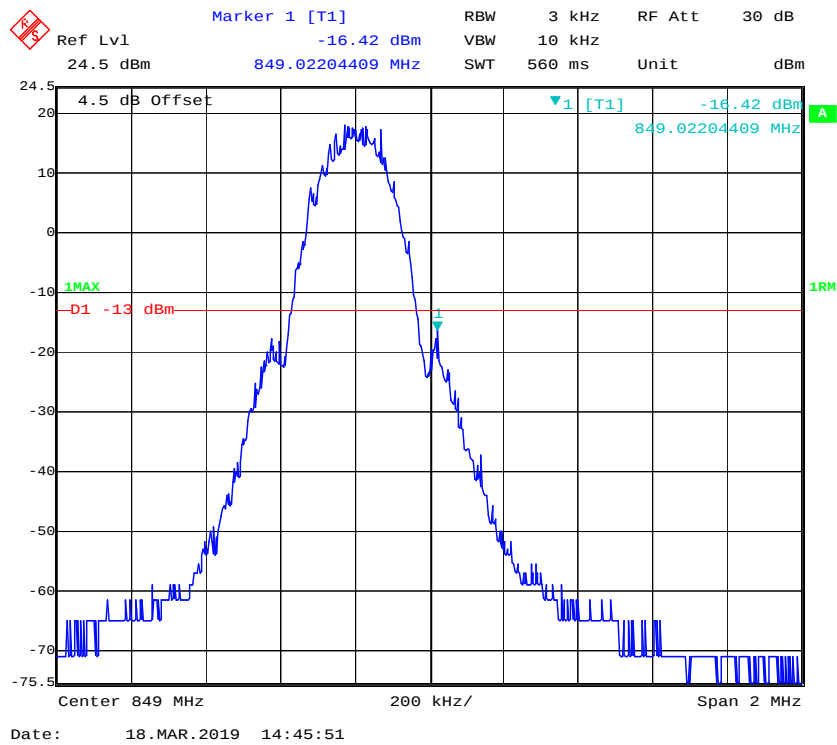

## GSM 1900, Left Band Edge

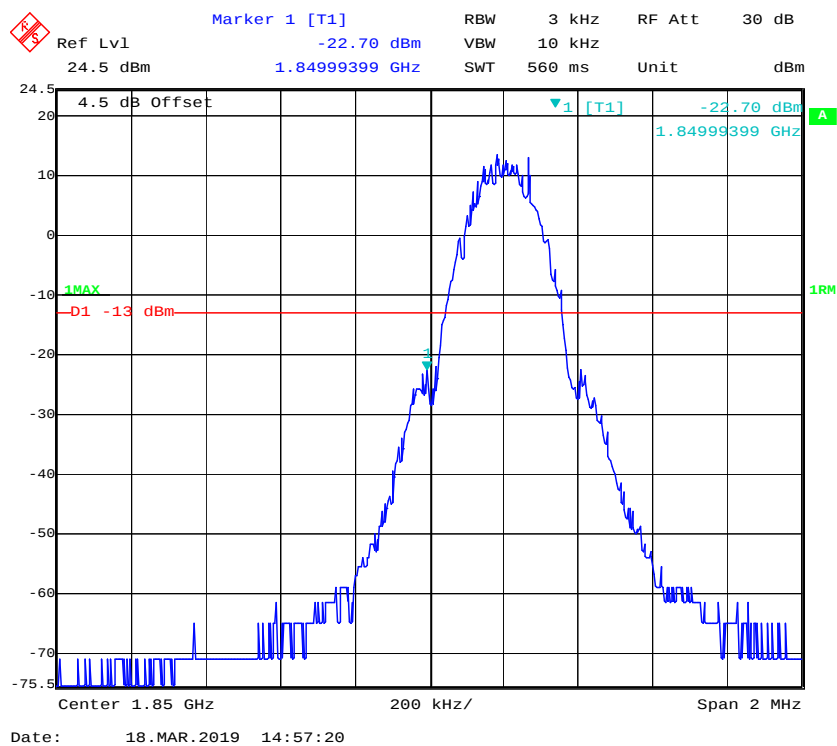

### GSM 1900, Right Band Edge

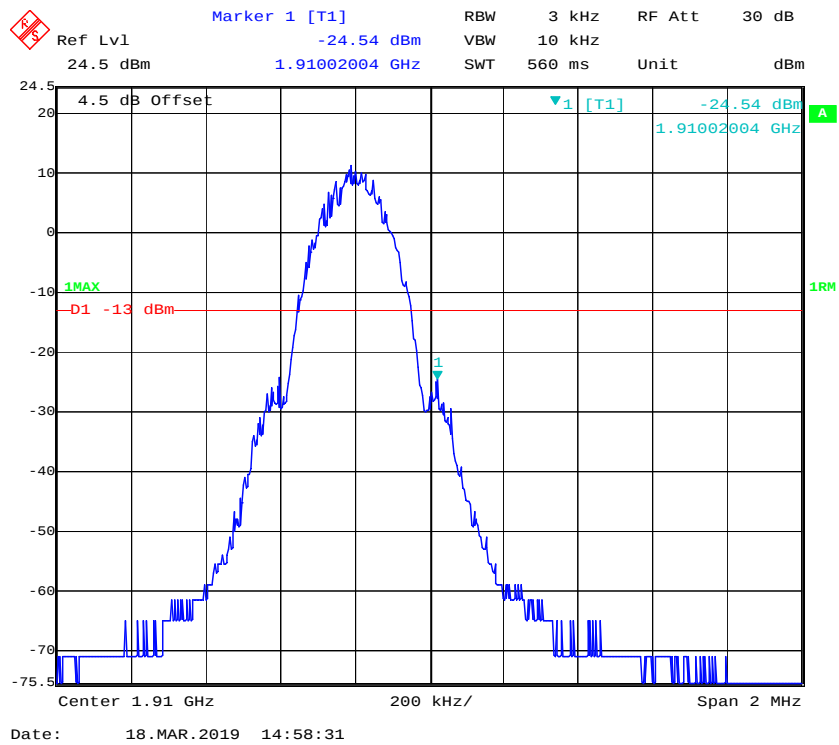

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY****Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency Range (MHz) | Base, fixed (ppm) | Mobile > 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50              | 20.0              | 20.0                   | 50.0                   |
| 50 to 450             | 5.0               | 5.0                    | 50.0                   |
| 450 to 512            | 2.5               | 5.0                    | 5.0                    |
| 821 to 896            | 1.5               | 2.5                    | 2.5                    |
| 928 to 929.           | 5.0               | N/A                    | N/A                    |
| 929 to 960.           | 1.5               | N/A                    | N/A                    |
| 2110 to 2220          | 10.0              | N/A                    | N/A                    |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

**Frequency Stability vs. Temperature:** The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

**Frequency Stability vs. Voltage:** An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

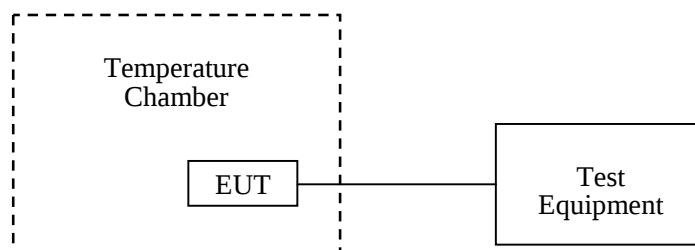

**Test Equipment List and Details**

| Manufacturer   | Description                              | Model       | Serial Number | Calibration Date | Calibration Due Date |
|----------------|------------------------------------------|-------------|---------------|------------------|----------------------|
| R&S            | Universal Radio Communication Tester     | CMU200      | 106 891       | 2018-12-14       | 2019-12-14           |
| ESPEC          | Constant temperature and humidity Tester | ESX-4CA     | 018 463       | 2018-03-26       | 2019-03-26           |
| Unknown        | Coaxial Cable                            | C-SJ00-0010 | C0010/02      | Each time        | N/A                  |
| UNI-T          | Multimeter                               | UT39A       | M130199938    | 2018-07-24       | 2019-07-24           |
| Pro instrument | DC Power Supply                          | pps3300     | 3300012       | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.4 °C   |
| <b>Relative Humidity:</b> | 57 %      |
| <b>ATM Pressure:</b>      | 100.2 kPa |

\* The testing was performed by Blake Yang on 2019-03-18.

Test Result: Compliance.

**Cellular Band**

| GMSK, Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                             | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                      | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                                     | 3.7             | 2               | 0.00239         | 2.5   |
| -20                                     |                 | 4               | 0.00478         |       |
| -10                                     |                 | 3               | 0.00359         |       |
| 0                                       |                 | 1               | 0.00120         |       |
| 10                                      |                 | 2               | 0.00239         |       |
| 20                                      |                 | 6               | 0.00717         |       |
| 30                                      |                 | 2               | 0.00239         |       |
| 40                                      |                 | 4               | 0.00478         |       |
| 50                                      |                 | 3               | 0.00359         |       |
| 20                                      | 3.5             | 4               | 0.00478         |       |
| 20                                      | 4.2             | 5               | 0.00598         |       |

**PCS Band**

| GMSK, Middle Channel, $f_c = 1880.0$ MHz |                 |                 |                 |         |
|------------------------------------------|-----------------|-----------------|-----------------|---------|
| Temperature                              | Voltage         | Frequency Error | Frequency Error | Results |
| °C                                       | V <sub>DC</sub> | Hz              | ppm             |         |
| -30                                      | 3.7             | 24              | 0.01277         | Pass    |
| -20                                      |                 | 28              | 0.01489         |         |
| -10                                      |                 | 26              | 0.01383         |         |
| 0                                        |                 | 27              | 0.01436         |         |
| 10                                       |                 | 25              | 0.01330         |         |
| 20                                       |                 | 30              | 0.01596         |         |
| 30                                       |                 | 24              | 0.01277         |         |
| 40                                       |                 | 23              | 0.01223         |         |
| 50                                       |                 | 22              | 0.01170         |         |
| 20                                       | 3.5             | 25              | 0.01330         |         |
| 20                                       | 4.2             | 26              | 0.01383         |         |

\*\*\*\*\* END OF REPORT \*\*\*\*\*