


|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/16 |
| <b>Test Channel :</b> | CH64(5320MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

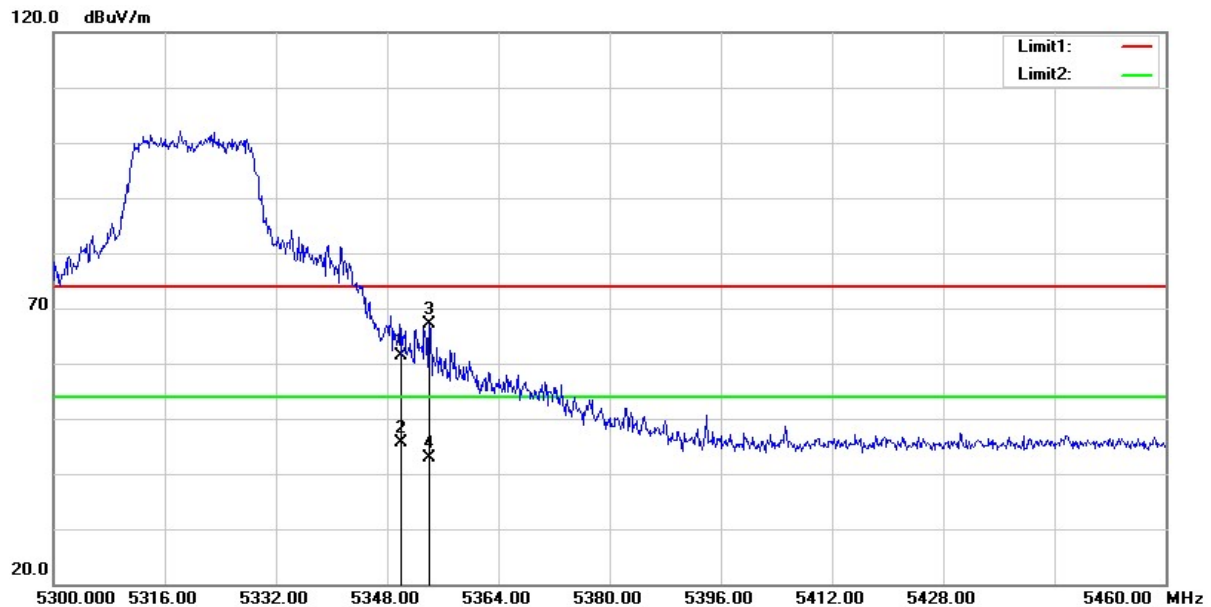


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 56.15            | 5.16                  | 61.31           | 74.00          | -12.69      | peak   |
| 2   | 5350.000        | 40.52            | 5.16                  | 45.68           | 54.00          | -8.32       | AVG    |
| 3   | 5354.080        | 61.91            | 5.16                  | 67.07           | 74.00          | -6.93       | peak   |
| 4   | 5354.080        | 37.67            | 5.16                  | 42.83           | 54.00          | -11.17      | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/16 |
| <b>Test Channel :</b> | CH100(5500MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

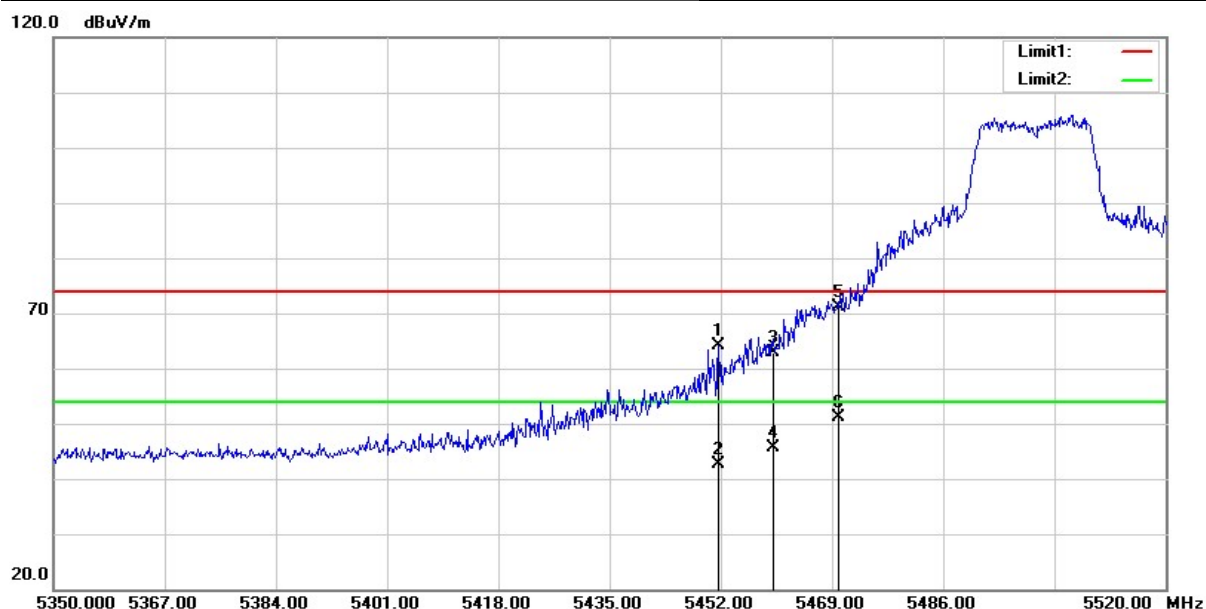


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5451.660        | 58.82            | 5.29                  | 64.11           | 74.00          | -9.89       | peak   |
| 2   | 5451.660        | 37.26            | 5.29                  | 42.55           | 54.00          | -11.45      | AVG    |
| 3   | 5460.000        | 57.67            | 5.32                  | 62.99           | 74.00          | -11.01      | peak   |
| 4   | 5460.000        | 40.31            | 5.32                  | 45.63           | 54.00          | -8.37       | AVG    |
| 5   | 5470.000        | 65.65            | 5.36                  | 71.01           | 74.00          | -2.99       | peak   |
| 6   | 5470.000        | 45.86            | 5.36                  | 51.22           | 54.00          | -2.78       | AVG    |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/16 |
| <b>Test Channel :</b> | CH100(5500MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

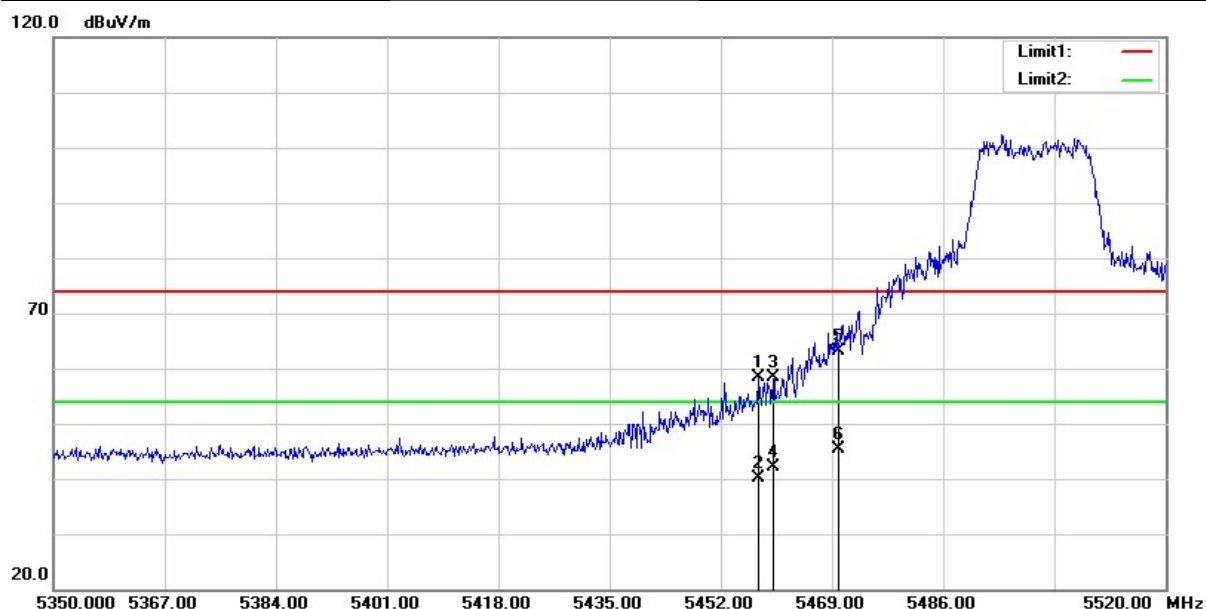


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5457.780        | 53.07            | 5.31                  | 58.38           | 74.00          | -15.62      | peak   |
| 2   | 5457.780        | 34.77            | 5.31                  | 40.08           | 54.00          | -13.92      | AVG    |
| 3   | 5460.000        | 53.11            | 5.32                  | 58.43           | 74.00          | -15.57      | peak   |
| 4   | 5460.000        | 36.79            | 5.32                  | 42.11           | 54.00          | -11.89      | AVG    |
| 5   | 5470.000        | 57.86            | 5.36                  | 63.22           | 74.00          | -10.78      | peak   |
| 6   | 5470.000        | 39.92            | 5.36                  | 45.28           | 54.00          | -8.72       | AVG    |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH149(5745MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

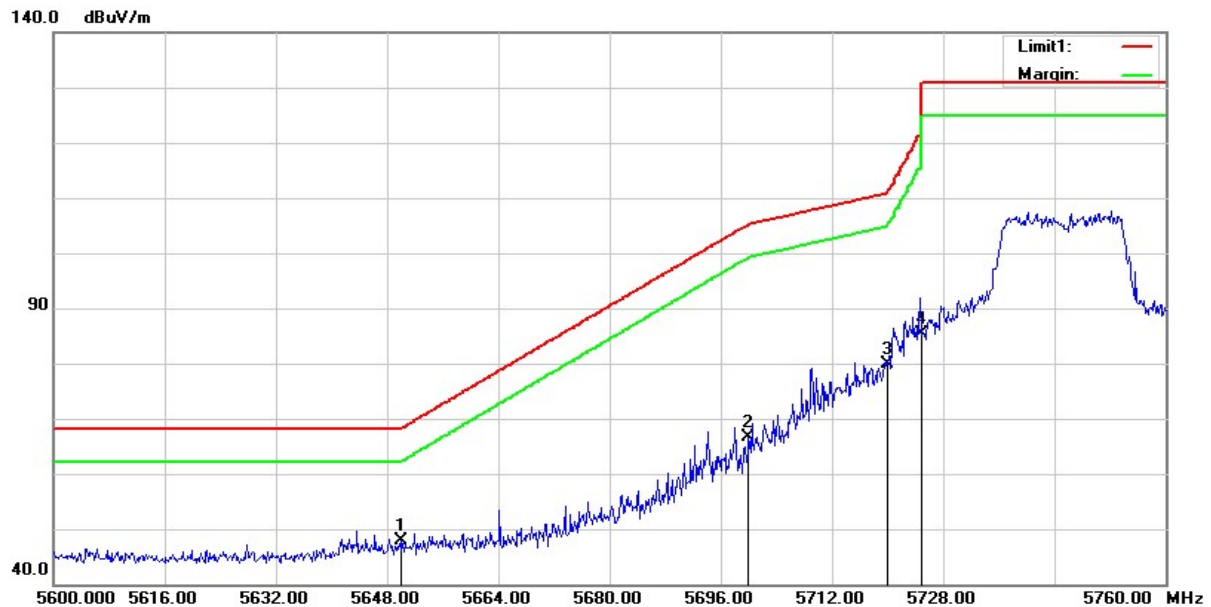


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5650.000        | 42.32            | 5.48                  | 47.80           | 68.20          | -20.40      | peak   |
| 2   | 5700.000        | 61.05            | 5.61                  | 66.66           | 105.20         | -38.54      | peak   |
| 3   | 5720.000        | 74.11            | 5.70                  | 79.81           | 110.80         | -30.99      | peak   |
| 4   | 5725.000        | 79.75            | 5.73                  | 85.48           | 122.20         | -36.72      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH149(5745MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

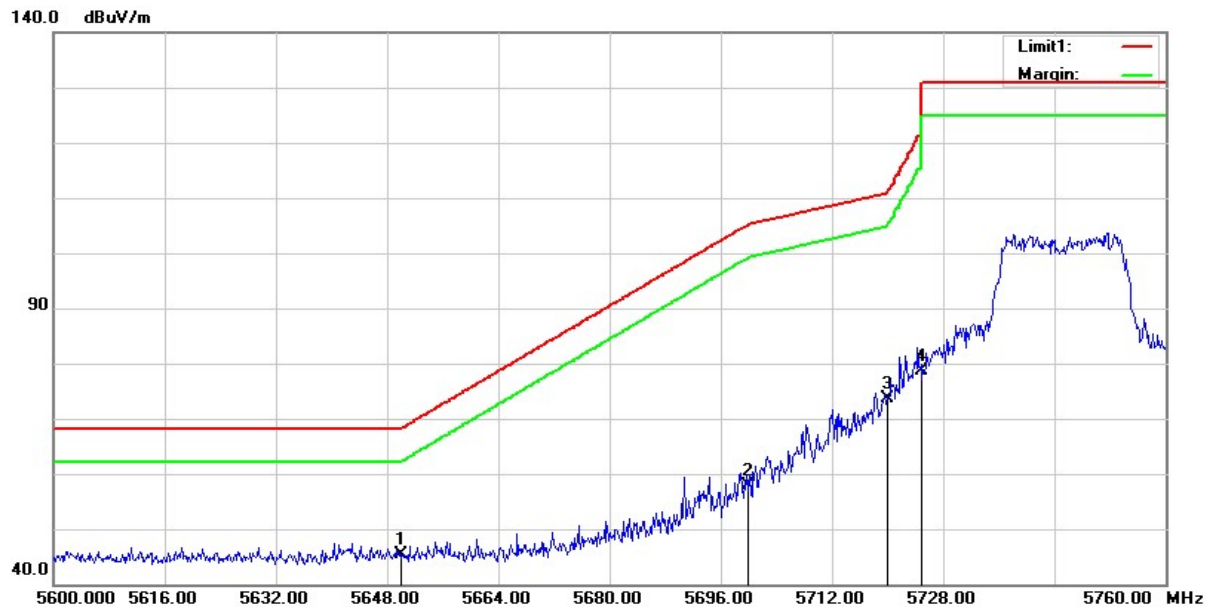

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5650.000        | 39.89            | 5.48                  | 45.37           | 68.20          | -22.83      | peak   |
| 2   | 5700.000        | 52.25            | 5.61                  | 57.86           | 105.20         | -47.34      | peak   |
| 3   | 5720.000        | 67.92            | 5.70                  | 73.62           | 110.80         | -37.18      | peak   |
| 4   | 5725.000        | 73.00            | 5.73                  | 78.73           | 122.20         | -43.47      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH165(5825MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.000        | 78.02            | 6.20                  | 84.22           | 122.20         | -37.98      | peak   |
| 2   | 5855.000        | 76.03            | 6.21                  | 82.24           | 110.80         | -28.56      | peak   |
| 3   | 5875.000        | 64.24            | 6.26                  | 70.50           | 105.20         | -34.70      | peak   |
| 4   | 5925.000        | 43.54            | 6.45                  | 49.99           | 68.20          | -18.21      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH165(5825MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

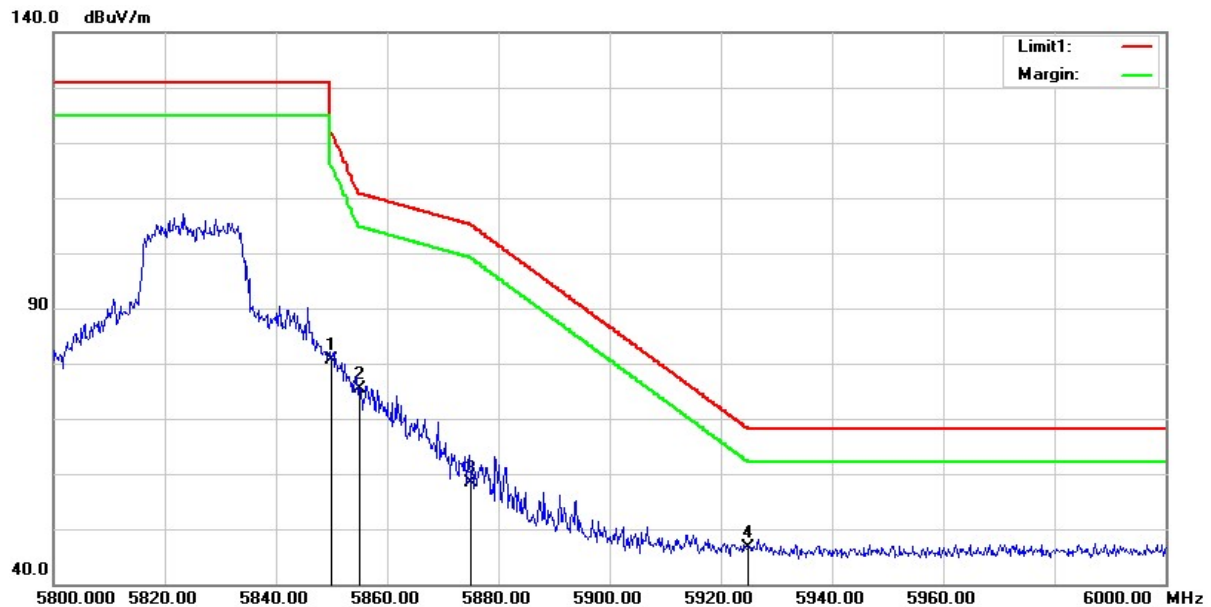


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.000        | 74.46            | 6.20                  | 80.66           | 122.20         | -41.54      | peak   |
| 2   | 5855.000        | 69.13            | 6.21                  | 75.34           | 110.80         | -35.46      | peak   |
| 3   | 5875.000        | 52.11            | 6.26                  | 58.37           | 105.20         | -46.83      | peak   |
| 4   | 5925.000        | 40.24            | 6.45                  | 46.69           | 68.20          | -21.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH38(5190MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

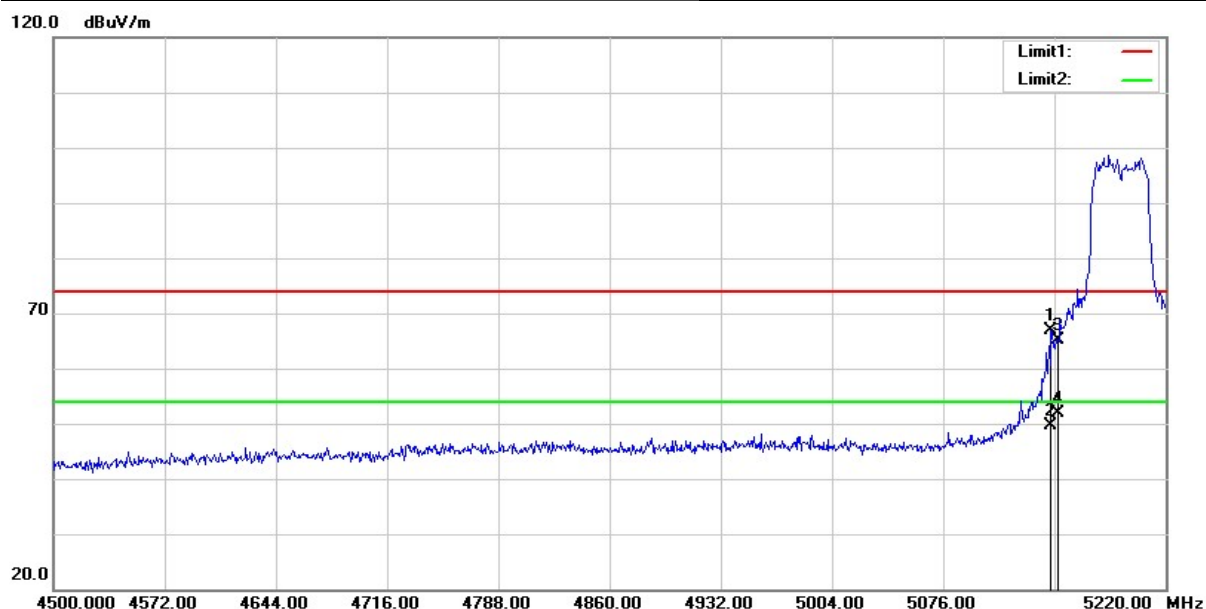


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5145.840        | 61.29            | 5.53                  | 66.82           | 74.00          | -7.18       | peak   |
| 2   | 5145.840        | 44.18            | 5.53                  | 49.71           | 54.00          | -4.29       | AVG    |
| 3   | 5150.000        | 59.52            | 5.53                  | 65.05           | 74.00          | -8.95       | peak   |
| 4   | 5150.000        | 46.37            | 5.53                  | 51.90           | 54.00          | -2.10       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH38(5190MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

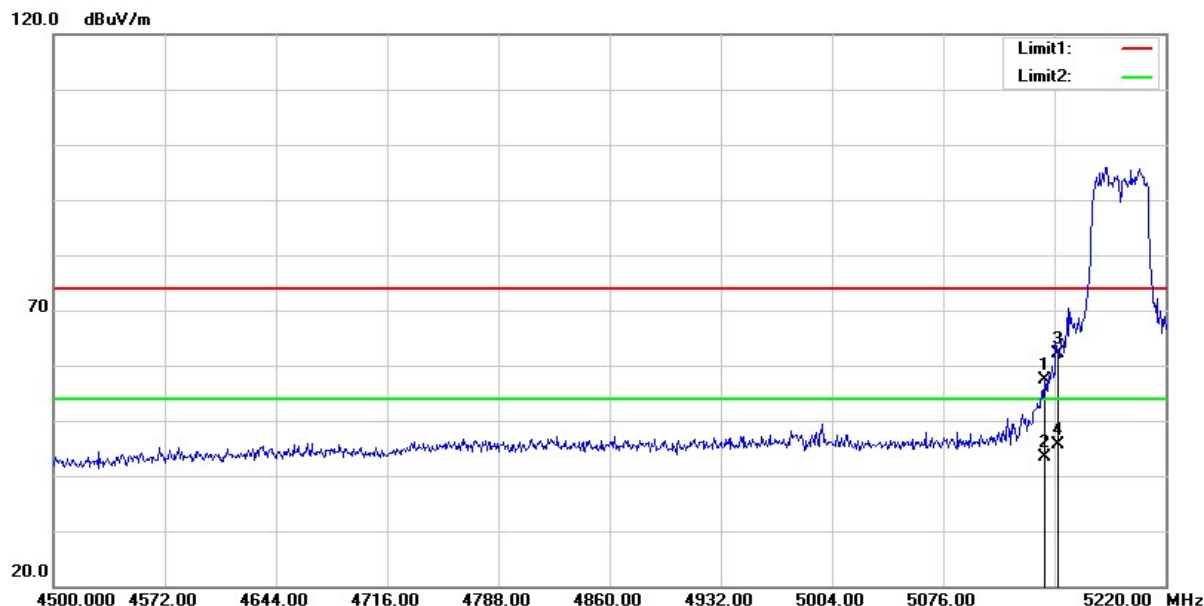


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5141.520        | 51.87            | 5.52                  | 57.39           | 74.00          | -16.61      | peak   |
| 2   | 5141.520        | 37.76            | 5.52                  | 43.28           | 54.00          | -10.72      | AVG    |
| 3   | 5150.000        | 56.72            | 5.53                  | 62.25           | 74.00          | -11.75      | peak   |
| 4   | 5150.000        | 40.14            | 5.53                  | 45.67           | 54.00          | -8.33       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH62(5310MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

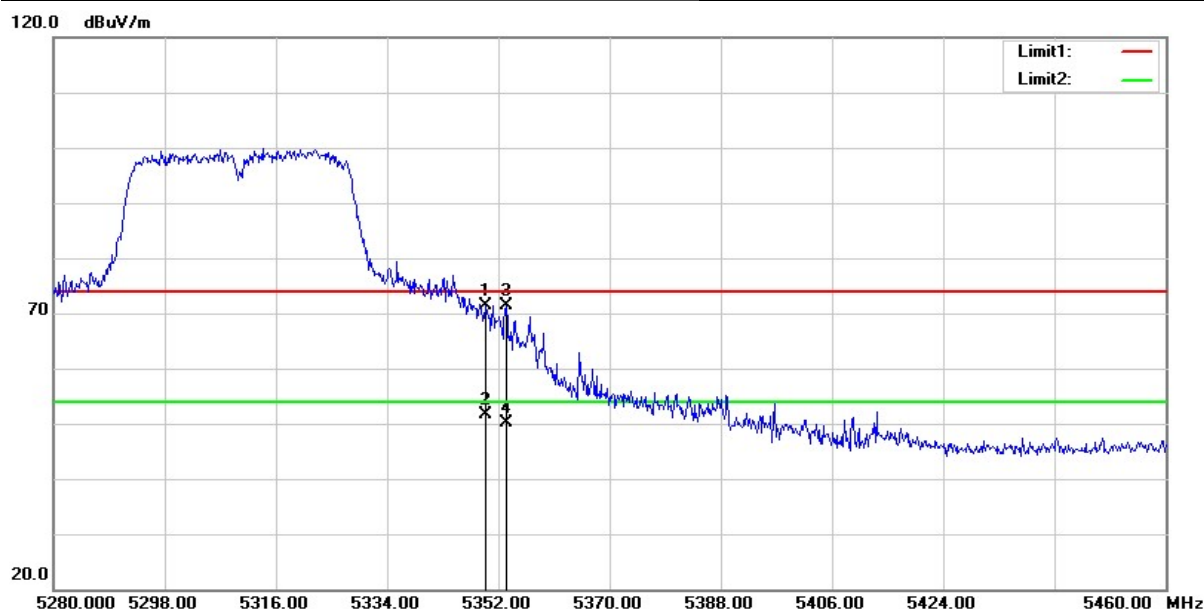

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 66.18            | 5.16                  | 71.34           | 74.00          | -2.66       | peak   |
| 2   | 5350.000        | 46.46            | 5.16                  | 51.62           | 54.00          | -2.38       | AVG    |
| 3   | 5353.260        | 66.10            | 5.16                  | 71.26           | 74.00          | -2.74       | peak   |
| 4   | 5353.260        | 44.90            | 5.16                  | 50.06           | 54.00          | -3.94       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH62(5310MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 58.64            | 5.16                  | 63.80           | 74.00          | -10.20      | peak   |
| 2   | 5350.000        | 40.47            | 5.16                  | 45.63           | 54.00          | -8.37       | AVG    |
| 3   | 5353.980        | 63.15            | 5.16                  | 68.31           | 74.00          | -5.69       | peak   |
| 4   | 5353.980        | 38.71            | 5.16                  | 43.87           | 54.00          | -10.13      | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH102(5510MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

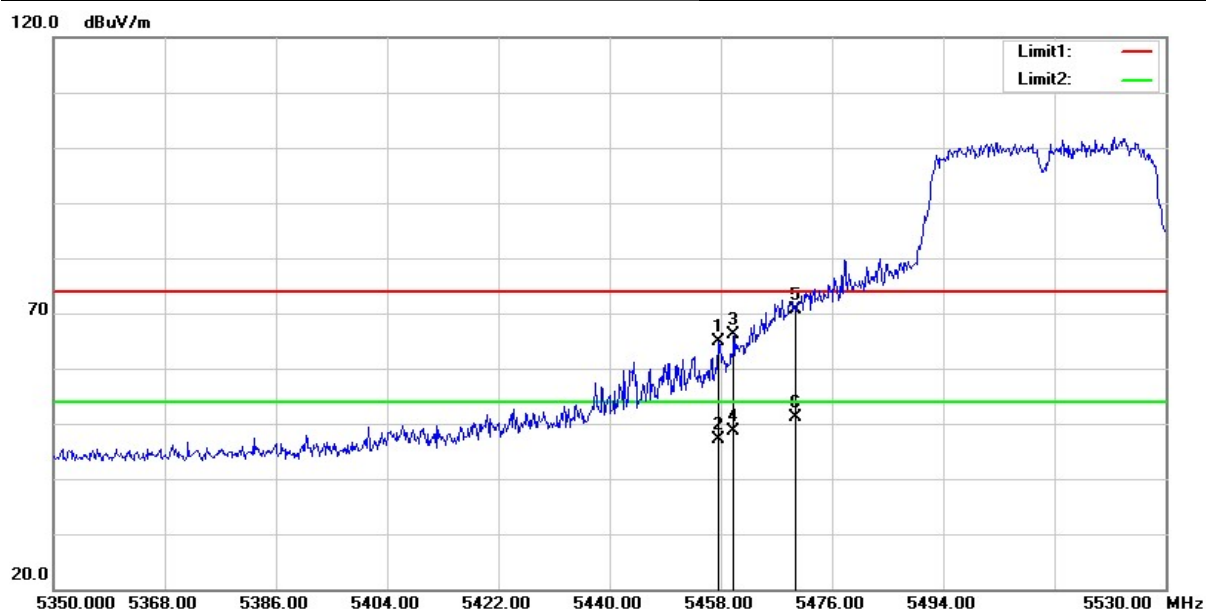


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5457.640        | 59.49            | 5.31                  | 64.80           | 74.00          | -9.20       | peak   |
| 2   | 5457.640        | 41.79            | 5.31                  | 47.10           | 54.00          | -6.90       | AVG    |
| 3   | 5460.000        | 60.75            | 5.32                  | 66.07           | 74.00          | -7.93       | peak   |
| 4   | 5460.000        | 43.27            | 5.32                  | 48.59           | 54.00          | -5.41       | AVG    |
| 5   | 5470.000        | 65.22            | 5.36                  | 70.58           | 74.00          | -3.42       | peak   |
| 6   | 5470.000        | 45.79            | 5.36                  | 51.15           | 54.00          | -2.85       | AVG    |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH102(5510MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

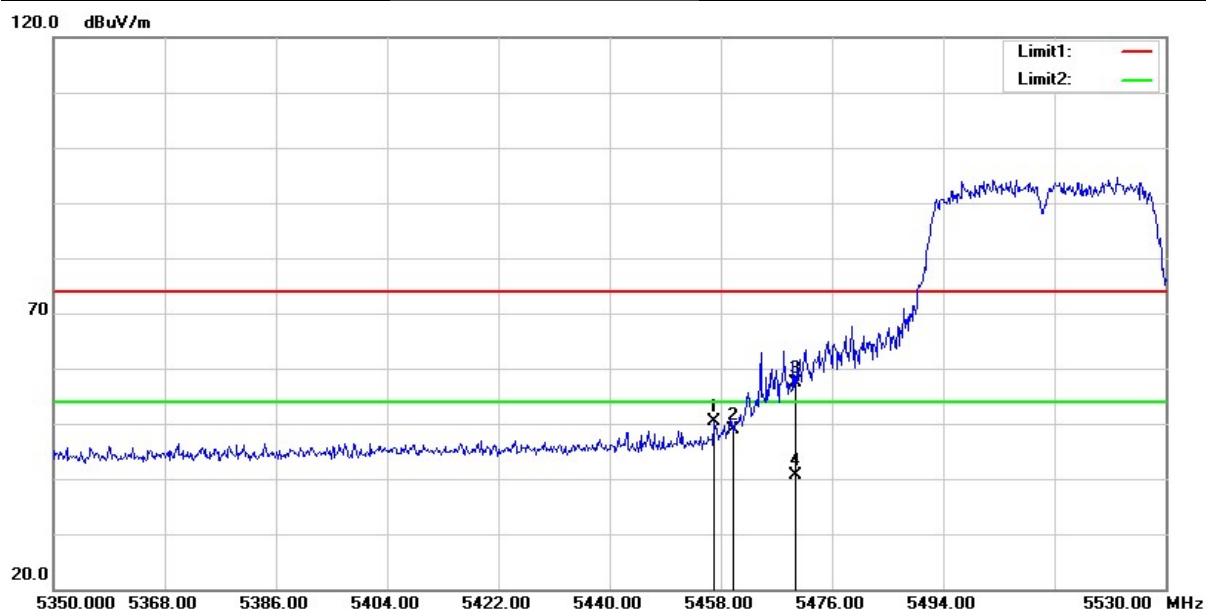


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.920        | 44.95            | 5.31                  | 50.26           | 74.00          | -23.74      | peak   |
| 2   | 5460.000        | 43.53            | 5.32                  | 48.85           | 74.00          | -25.15      | peak   |
| 3   | 5470.000        | 52.08            | 5.36                  | 57.44           | 74.00          | -16.56      | peak   |
| 4   | 5470.000        | 35.31            | 5.36                  | 40.67           | 54.00          | -13.33      | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH151(5755MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

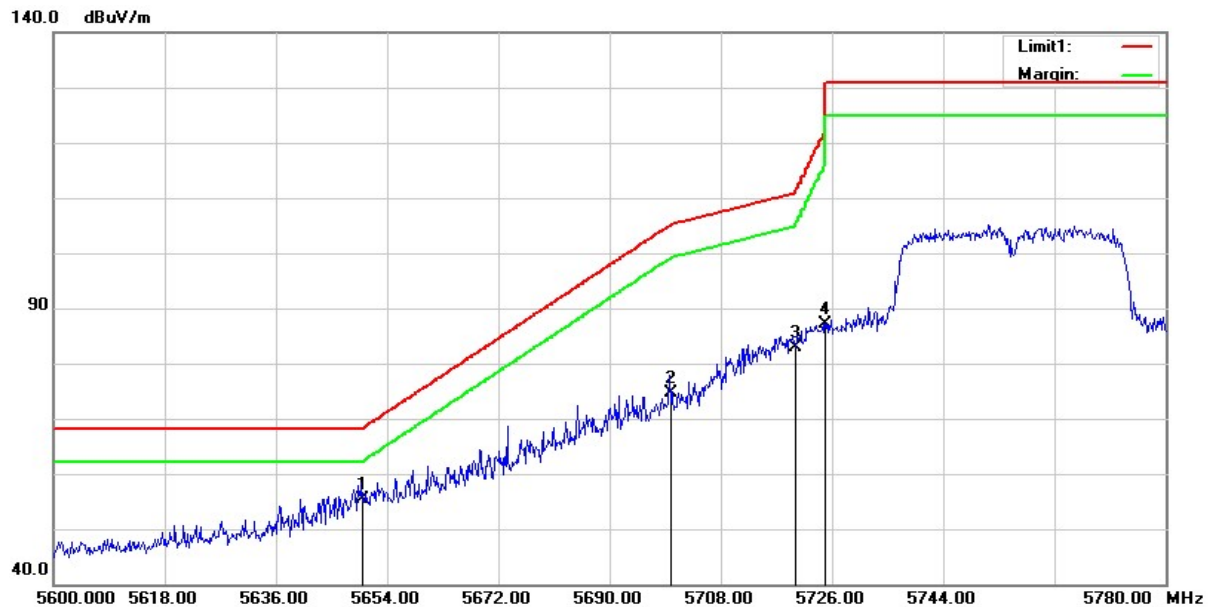


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5650.000        | 50.01            | 5.48                  | 55.49           | 68.20          | -12.71      | peak   |
| 2   | 5700.000        | 69.14            | 5.61                  | 74.75           | 105.20         | -30.45      | peak   |
| 3   | 5720.000        | 77.27            | 5.70                  | 82.97           | 110.80         | -27.83      | peak   |
| 4   | 5725.000        | 81.50            | 5.73                  | 87.23           | 122.20         | -34.97      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH151(5755MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

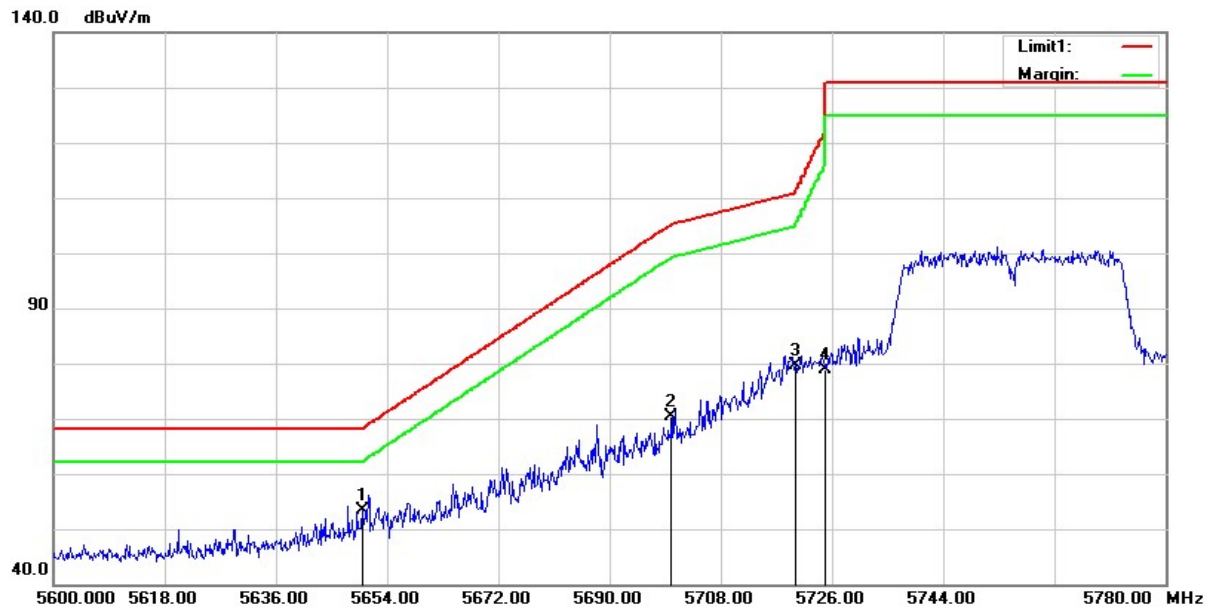


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5650.000        | 47.85            | 5.48                  | 53.33           | 68.20          | -14.87      | peak   |
| 2   | 5700.000        | 64.73            | 5.61                  | 70.34           | 105.20         | -34.86      | peak   |
| 3   | 5720.000        | 73.99            | 5.70                  | 79.69           | 110.80         | -31.11      | peak   |
| 4   | 5725.000        | 73.15            | 5.73                  | 78.88           | 122.20         | -43.32      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH159(5795MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

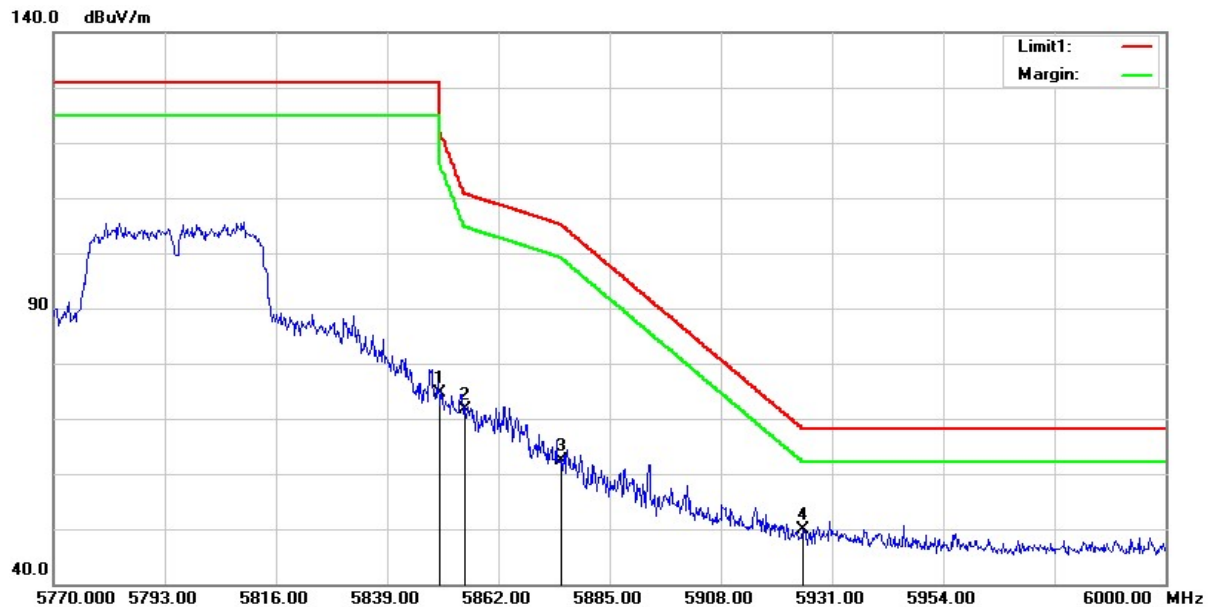


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.000        | 68.33            | 6.20                  | 74.53           | 122.20         | -47.67      | peak   |
| 2   | 5855.000        | 65.30            | 6.21                  | 71.51           | 110.80         | -39.29      | peak   |
| 3   | 5875.000        | 56.02            | 6.26                  | 62.28           | 105.20         | -42.92      | peak   |
| 4   | 5925.000        | 43.34            | 6.45                  | 49.79           | 68.20          | -18.41      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/05/15 |
| <b>Test Channel :</b> | CH159(5795MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

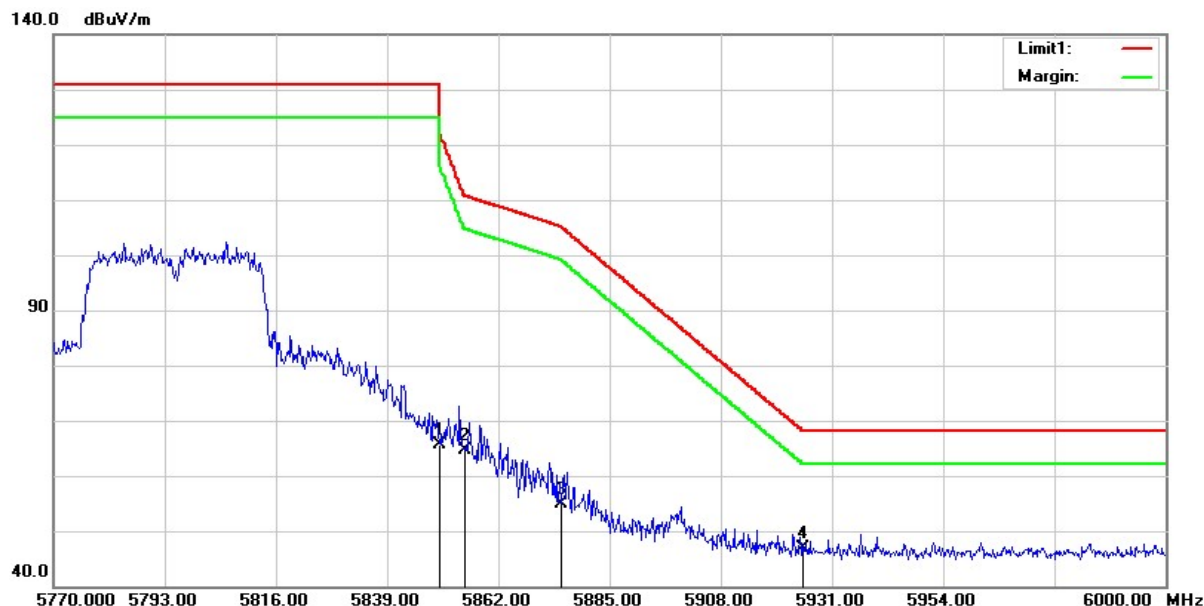

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.000        | 59.38            | 6.20                  | 65.58           | 122.20         | -56.62      | peak   |
| 2   | 5855.000        | 58.33            | 6.21                  | 64.54           | 110.80         | -46.26      | peak   |
| 3   | 5875.000        | 48.64            | 6.26                  | 54.90           | 105.20         | -50.30      | peak   |
| 4   | 5925.000        | 40.48            | 6.45                  | 46.93           | 68.20          | -21.27      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


## 2.4.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 40GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

| Test Frequency |                        |                 |
|----------------|------------------------|-----------------|
| RF             | 802.11a / 802.11n HT20 | 802.11n HT40    |
| Tx             | CH36 (5180MHz)         |                 |
|                | CH44 (5220MHz)         |                 |
|                | CH48 (5240MHz)         | CH38 (5190MHz)  |
|                | CH52 (5260MHz)         | CH46 (5230MHz)  |
|                | CH56 (5300MHz)         | CH54 (5270MHz)  |
|                | CH64 (5320MHz)         | CH62 (5310MHz)  |
|                | CH100 (5500MHz)        | CH102 (5510MHz) |
|                | CH112 (5580MHz)        | CH110 (5550MHz) |
|                | CH140 (5700MHz)        | CH134 (5670MHz) |
|                | CH149 (5745MHz)        | CH151 (5755MHz) |
|                | CH157 (5785MHz)        | CH159 (5795MHz) |
|                | CH165 (5825MHz)        |                 |

### Above 1GHz Data

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH36(5180MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

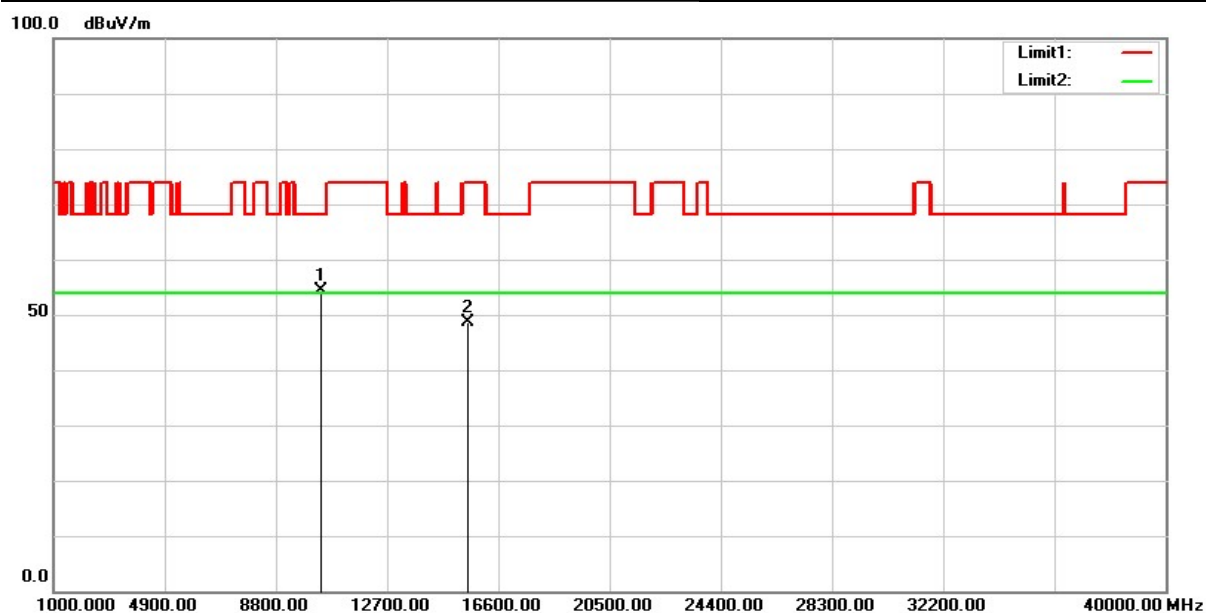


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 51.73            | 2.73                  | 54.46           | 68.20          | -13.74      | peak   |
| 2   | 15540.000       | 41.34            | 7.35                  | 48.69           | 74.00          | -25.31      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH36(5180MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

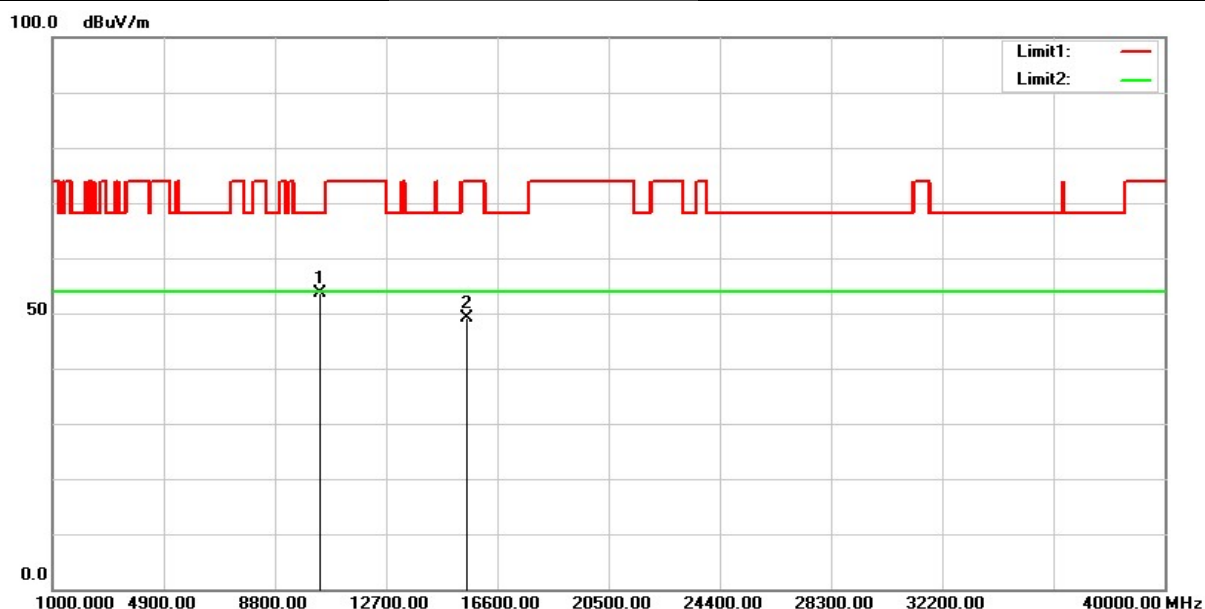


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 50.82            | 2.73                  | 53.55           | 68.20          | -14.65      | peak   |
| 2   | 15540.000       | 41.73            | 7.35                  | 49.08           | 74.00          | -24.92      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH44(5220MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

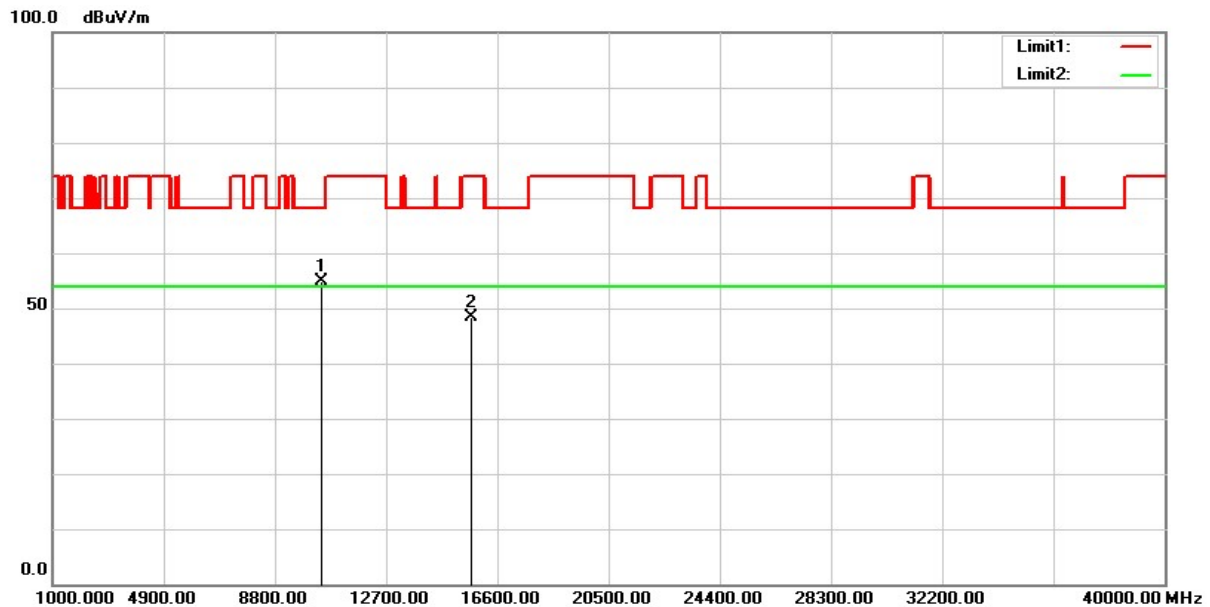


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10440.000       | 51.77            | 3.05                  | 54.82           | 68.20          | -13.38      | peak   |
| 2   | 15660.000       | 41.32            | 6.97                  | 48.29           | 74.00          | -25.71      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH44(5220MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

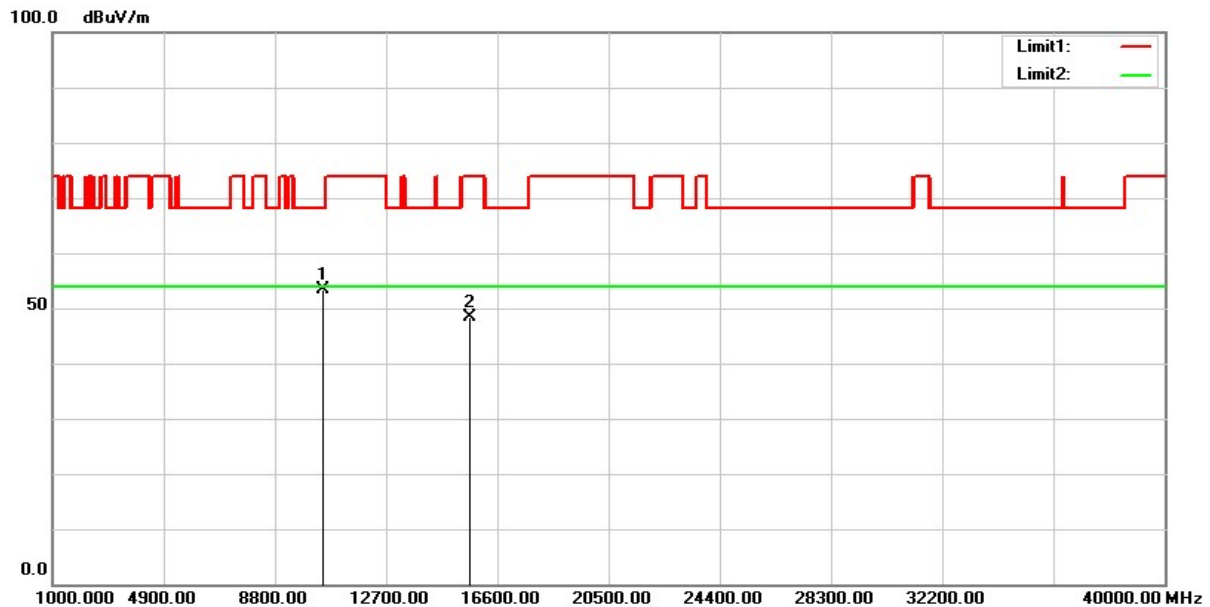


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10440.000       | 50.35            | 3.05                  | 53.40           | 68.20          | -14.80      | peak   |
| 2   | 15660.000       | 41.52            | 6.97                  | 48.49           | 74.00          | -25.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH48(5240MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

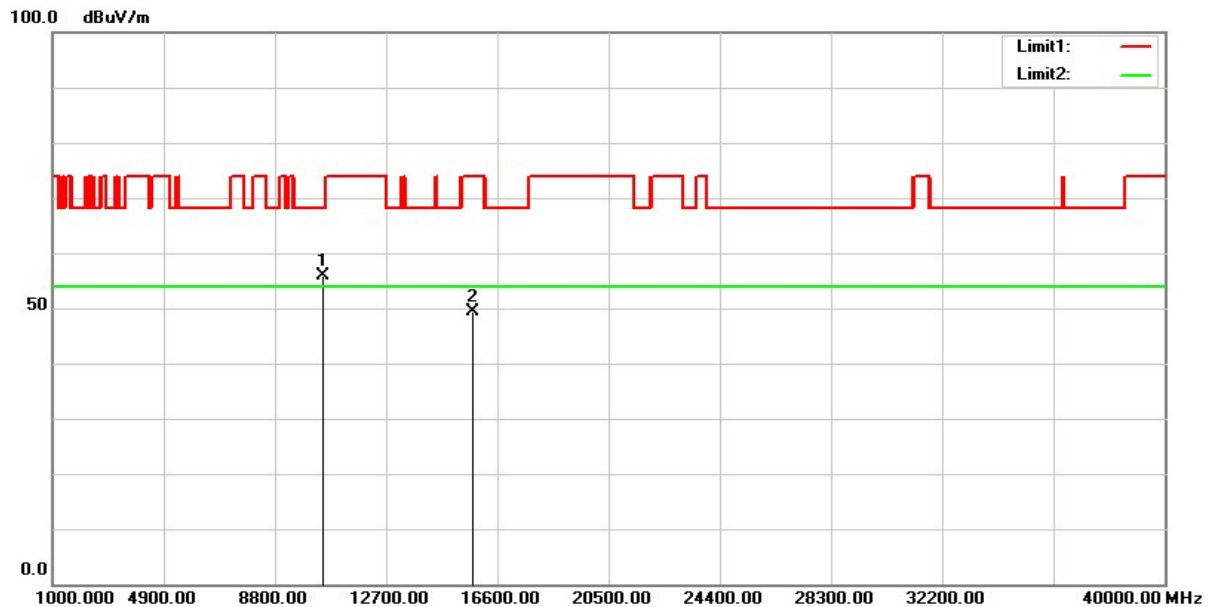


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 52.66            | 3.17                  | 55.83           | 68.20          | -12.37      | peak   |
| 2   | 15720.000       | 42.63            | 6.81                  | 49.44           | 74.00          | -24.56      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH48(5240MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

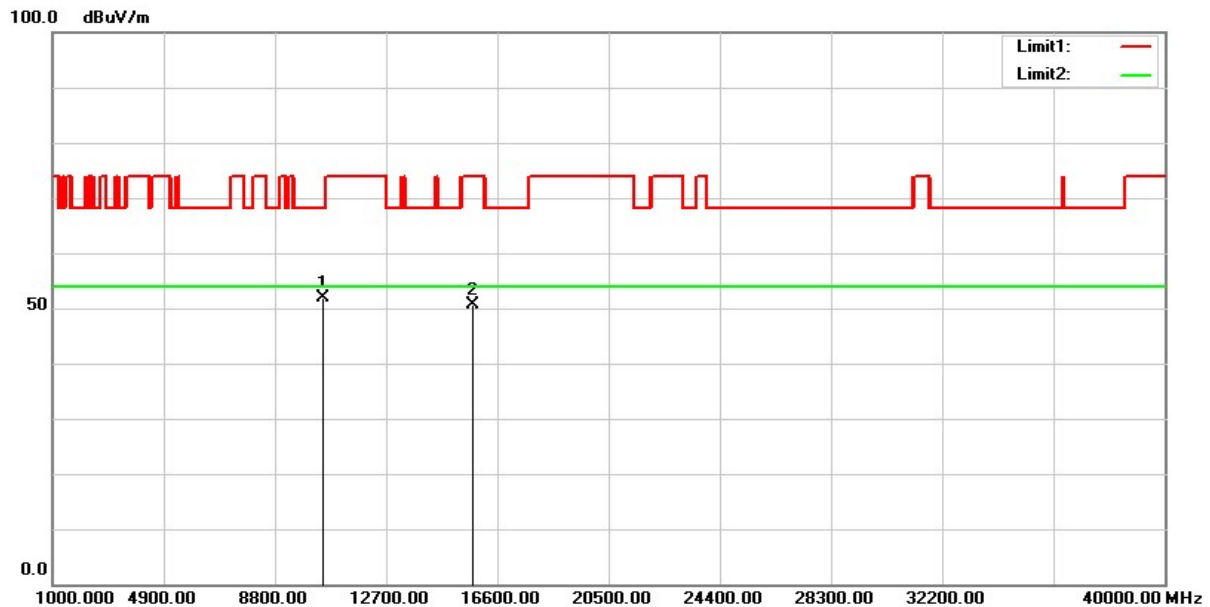


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 48.71            | 3.17                  | 51.88           | 68.20          | -16.32      | peak   |
| 2   | 15720.000       | 43.91            | 6.81                  | 50.72           | 74.00          | -23.28      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH52(5260MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

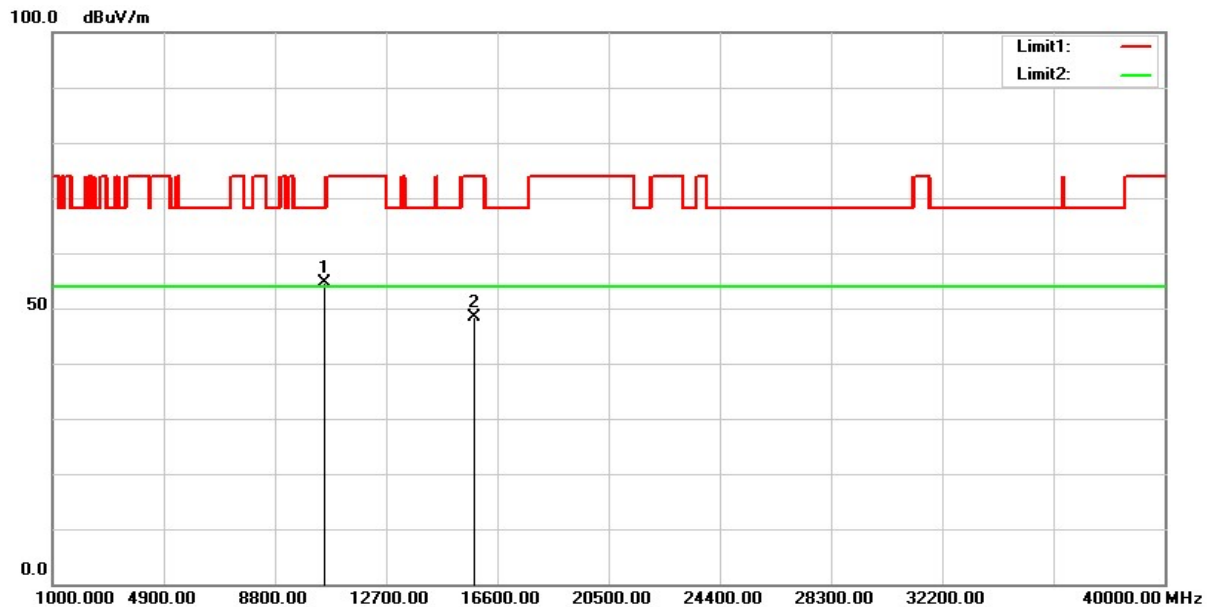


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 51.35            | 3.20                  | 54.55           | 68.20          | -13.65      | peak   |
| 2   | 15780.000       | 41.82            | 6.62                  | 48.44           | 74.00          | -25.56      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH52(5260MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

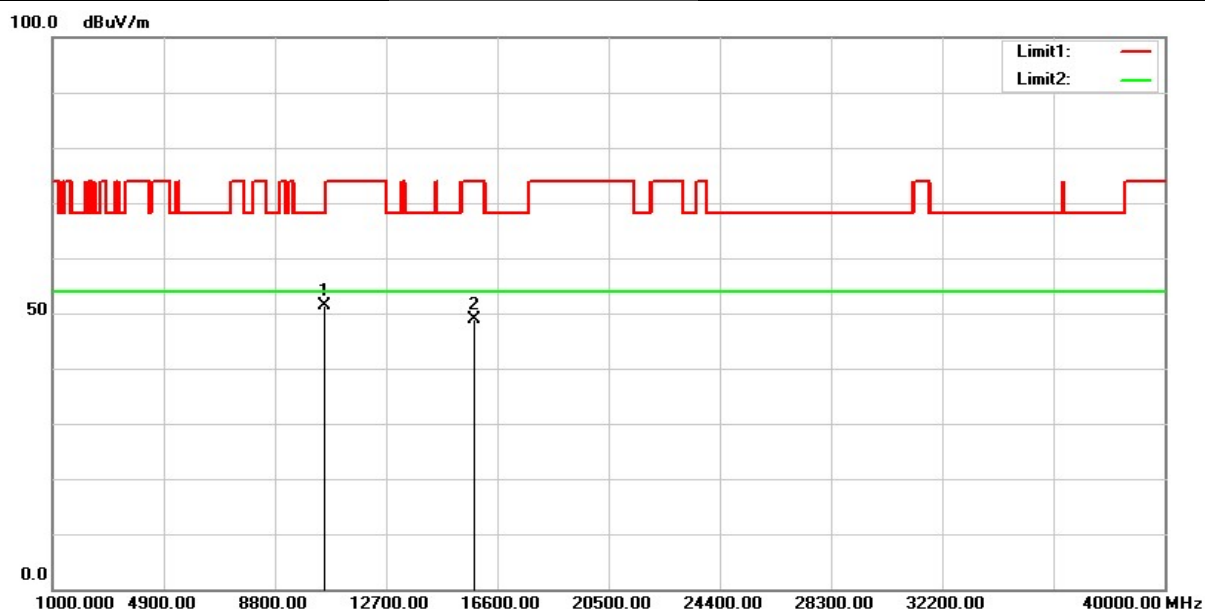


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 48.23            | 3.20                  | 51.43           | 68.20          | -16.77      | peak   |
| 2   | 15780.000       | 42.32            | 6.62                  | 48.94           | 74.00          | -25.06      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH56(5300MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

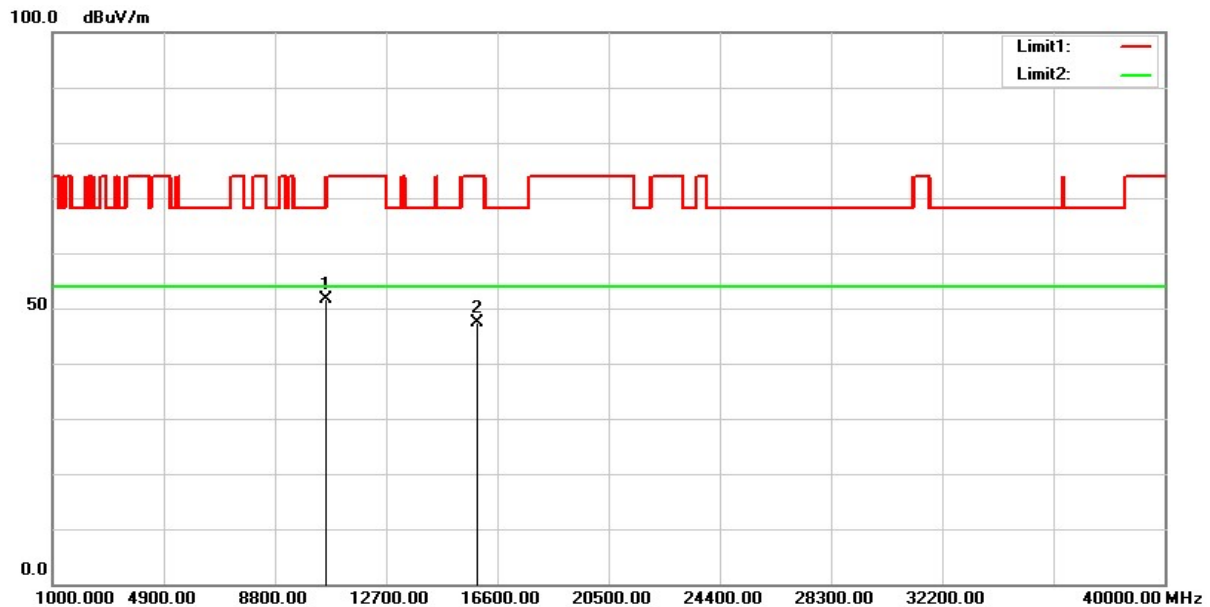


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 48.55            | 3.01                  | 51.56           | 68.20          | -16.64      | peak   |
| 2   | 15900.000       | 40.73            | 6.53                  | 47.26           | 74.00          | -26.74      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH56(5300MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

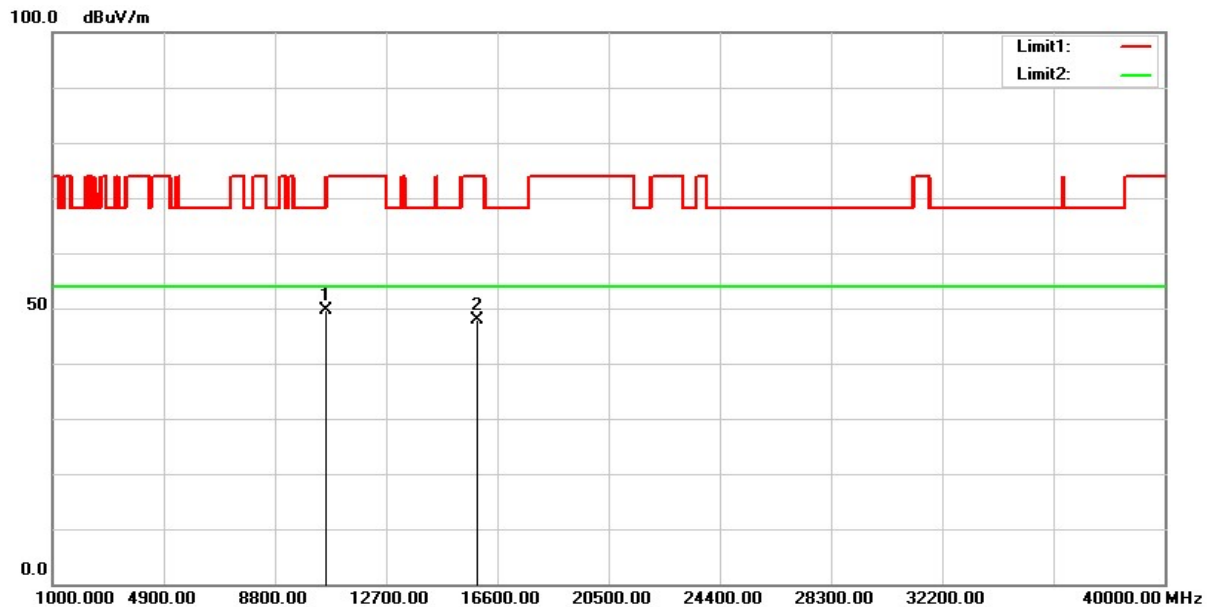


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 46.65            | 3.01                  | 49.66           | 68.20          | -18.54      | peak   |
| 2   | 15900.000       | 41.42            | 6.53                  | 47.95           | 74.00          | -26.05      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH64(5320MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

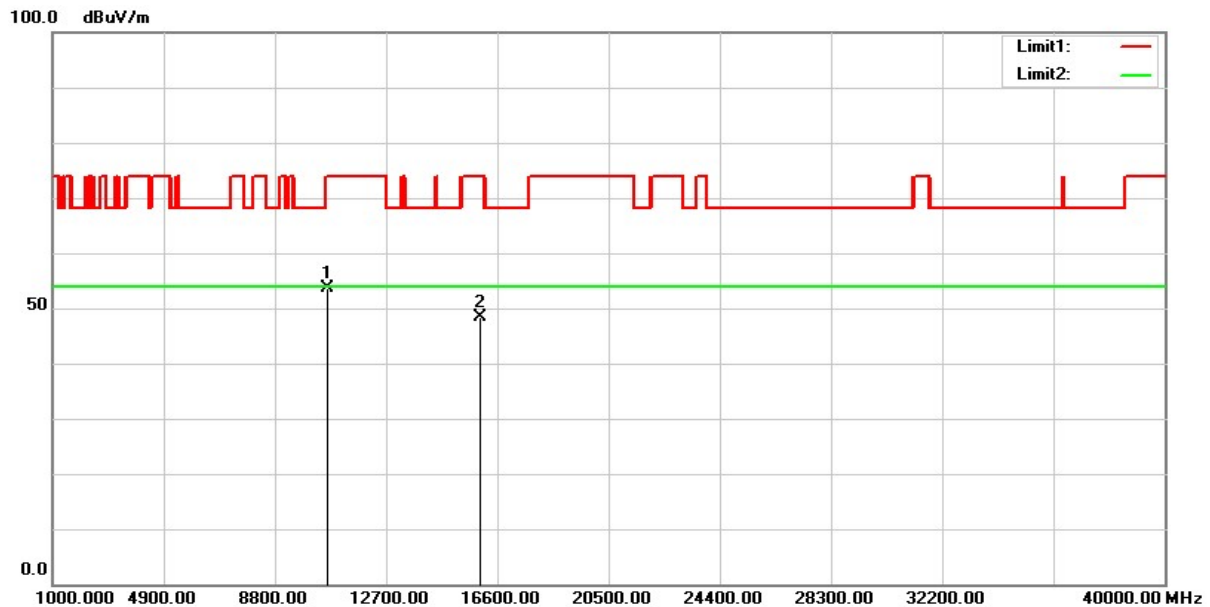


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 50.66            | 3.08                  | 53.74           | 74.00          | -20.26      | peak   |
| 2   | 15960.000       | 41.98            | 6.40                  | 48.38           | 74.00          | -25.62      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH64(5320MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

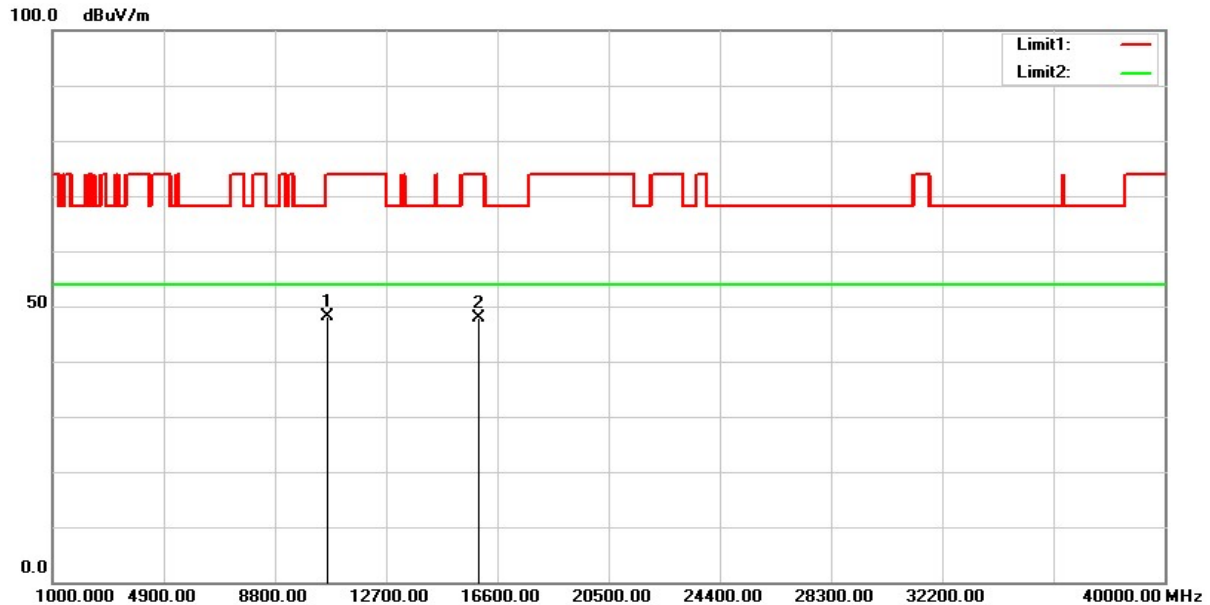


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 45.08            | 3.08                  | 48.16           | 74.00          | -25.84      | peak   |
| 2   | 15960.000       | 41.55            | 6.40                  | 47.95           | 74.00          | -26.05      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH100(5500MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

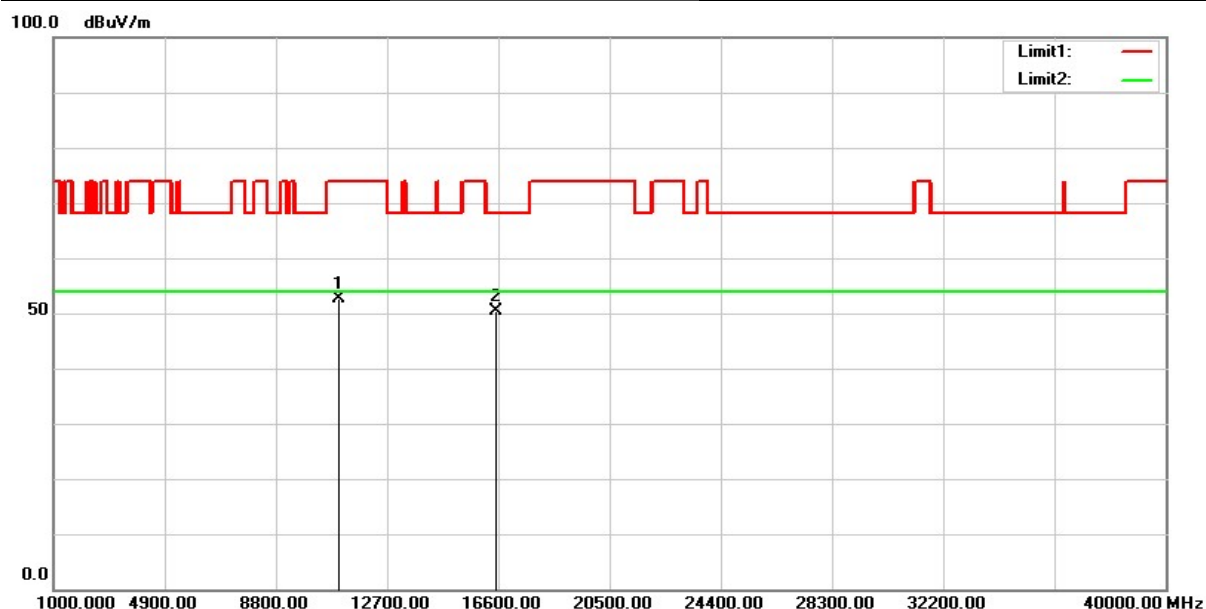


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 49.15            | 3.59                  | 52.74           | 74.00          | -21.26      | peak   |
| 2   | 16500.000       | 42.31            | 7.98                  | 50.29           | 68.20          | -17.91      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH100(5500MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

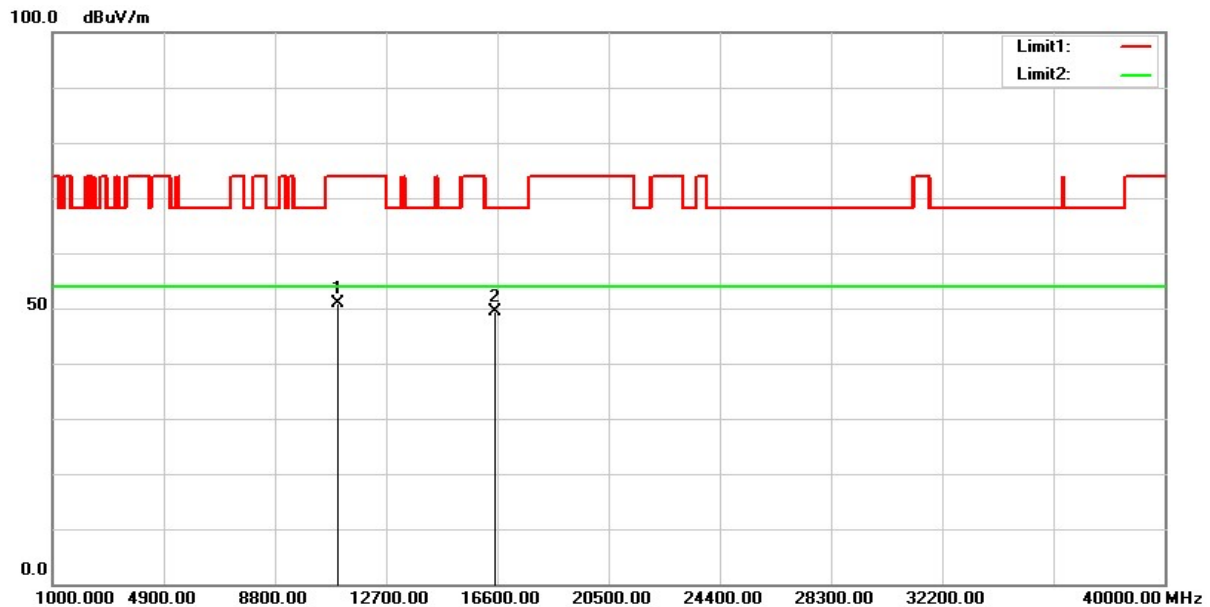


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 47.23            | 3.59                  | 50.82           | 74.00          | -23.18      | peak   |
| 2   | 16500.000       | 41.30            | 7.98                  | 49.28           | 68.20          | -18.92      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH112(5580MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

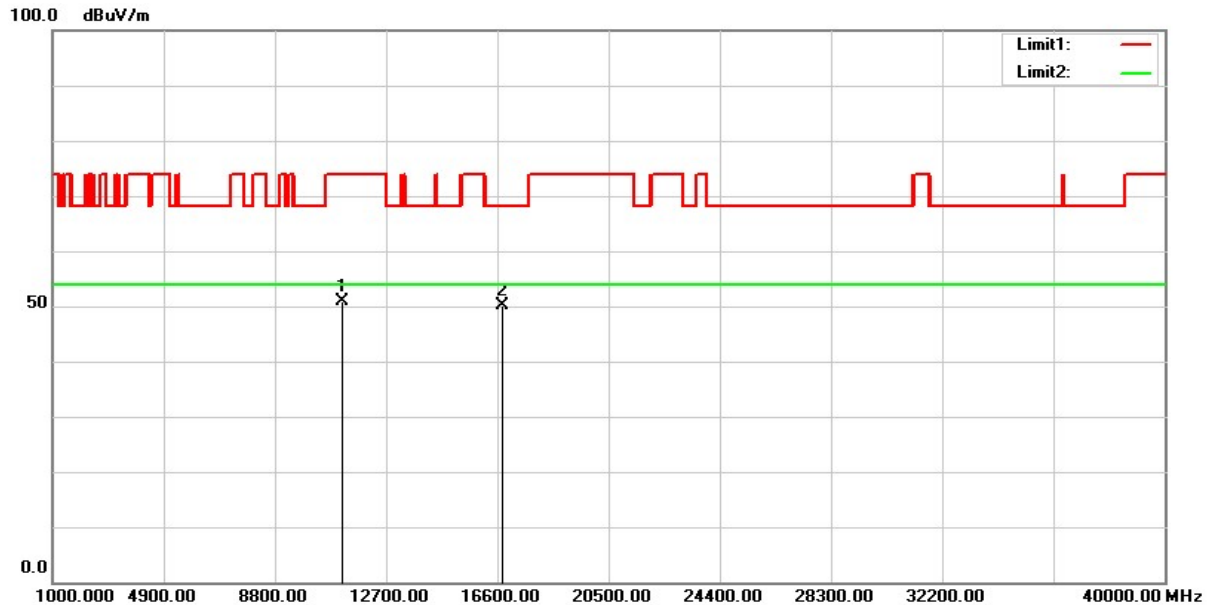


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 47.91            | 3.08                  | 50.99           | 74.00          | -23.01      | peak   |
| 2   | 16740.000       | 40.73            | 9.51                  | 50.24           | 68.20          | -17.96      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH112(5580MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

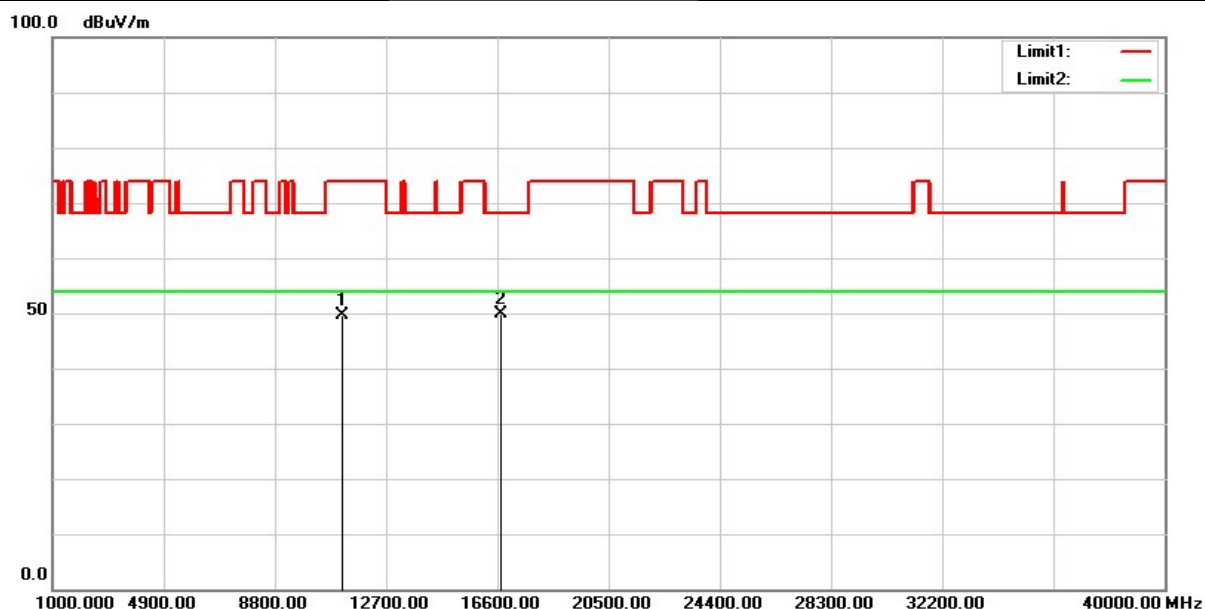


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 46.47            | 3.08                  | 49.55           | 74.00          | -24.45      | peak   |
| 2   | 16740.000       | 40.32            | 9.51                  | 49.83           | 68.20          | -18.37      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH140(5700MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

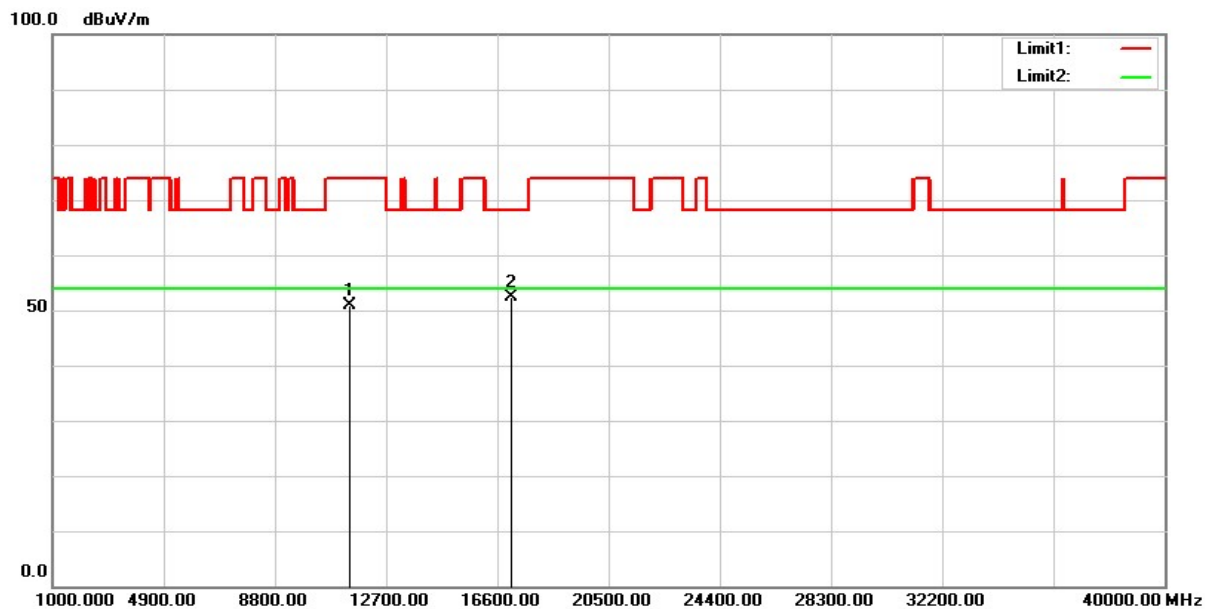


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 47.28            | 3.72                  | 51.00           | 74.00          | -23.00      | peak   |
| 2   | 17100.000       | 41.24            | 11.08                 | 52.32           | 68.20          | -15.88      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH140(5700MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

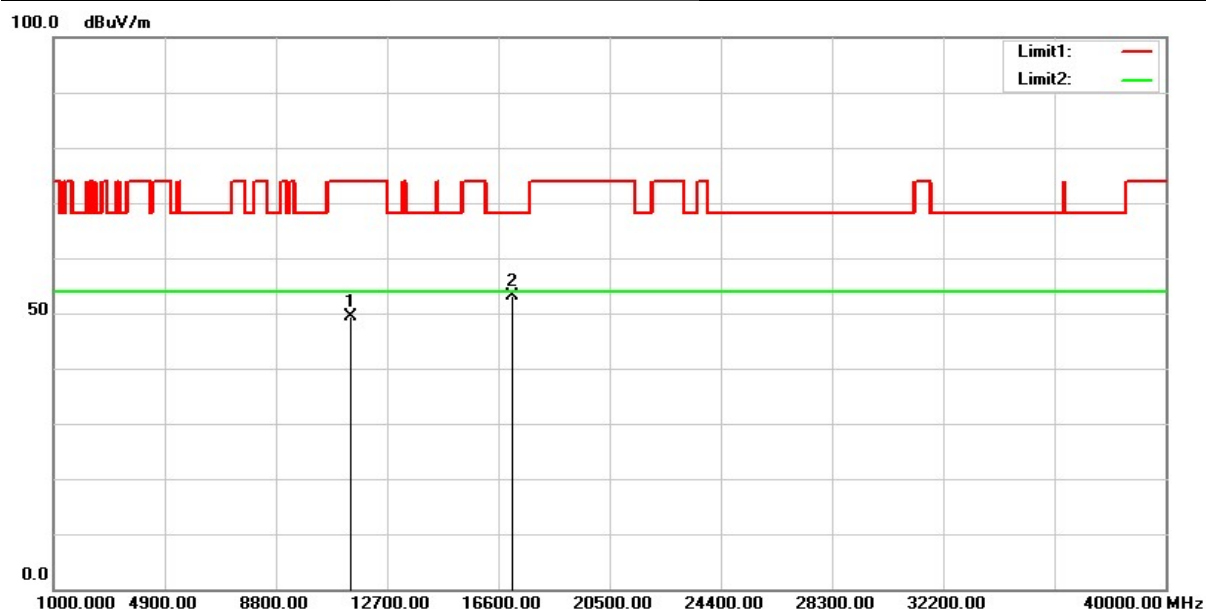


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 45.58            | 3.72                  | 49.30           | 74.00          | -24.70      | peak   |
| 2   | 17100.000       | 42.04            | 11.08                 | 53.12           | 68.20          | -15.08      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH149(5745MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

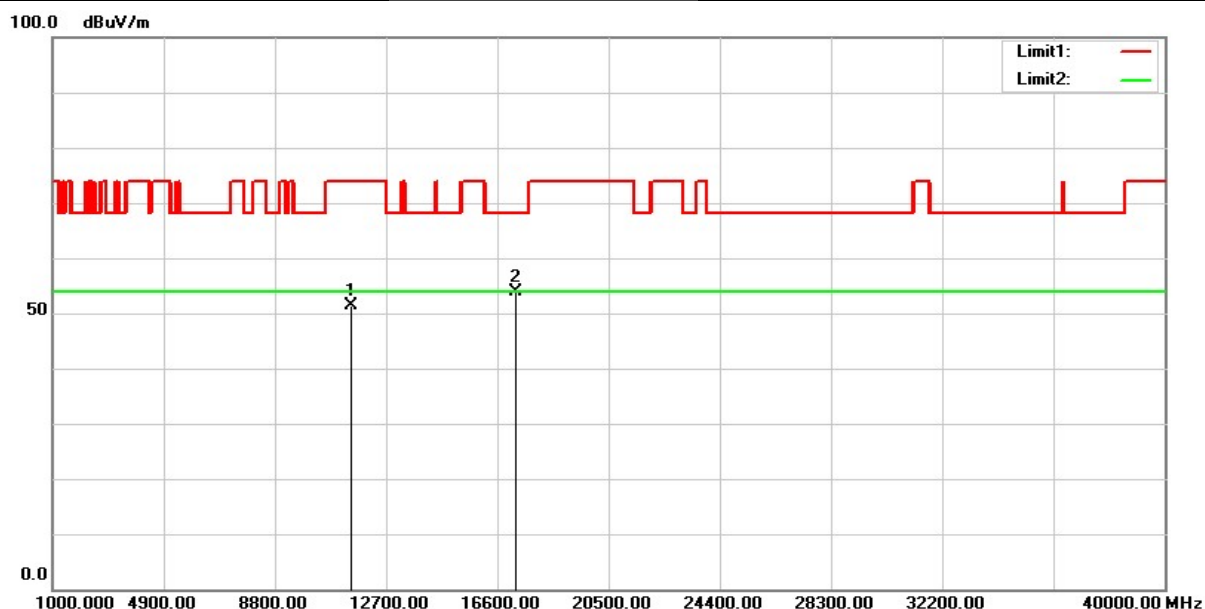


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 47.45            | 3.88                  | 51.33           | 74.00          | -22.67      | peak   |
| 2   | 17235.000       | 42.01            | 11.81                 | 53.82           | 68.20          | -14.38      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH149(5745MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

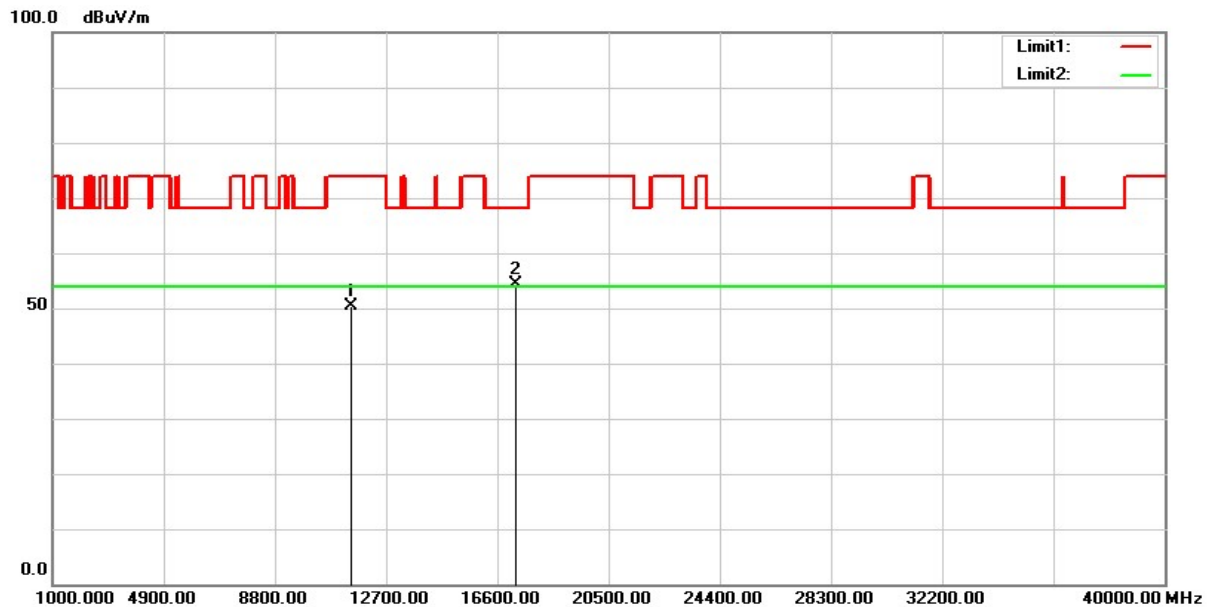


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 46.45            | 3.88                  | 50.33           | 74.00          | -23.67      | peak   |
| 2   | 17235.000       | 42.64            | 11.81                 | 54.45           | 68.20          | -13.75      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH157(5785MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

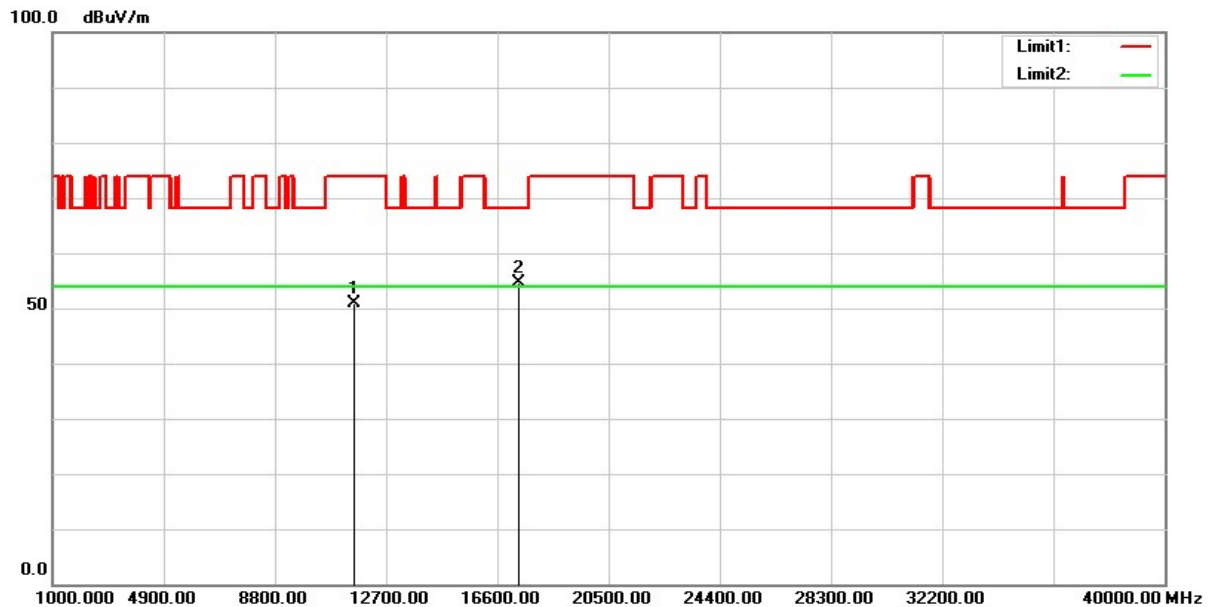


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 46.99            | 3.89                  | 50.88           | 74.00          | -23.12      | peak   |
| 2   | 17355.000       | 41.88            | 12.71                 | 54.59           | 68.20          | -13.61      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH157(5785MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

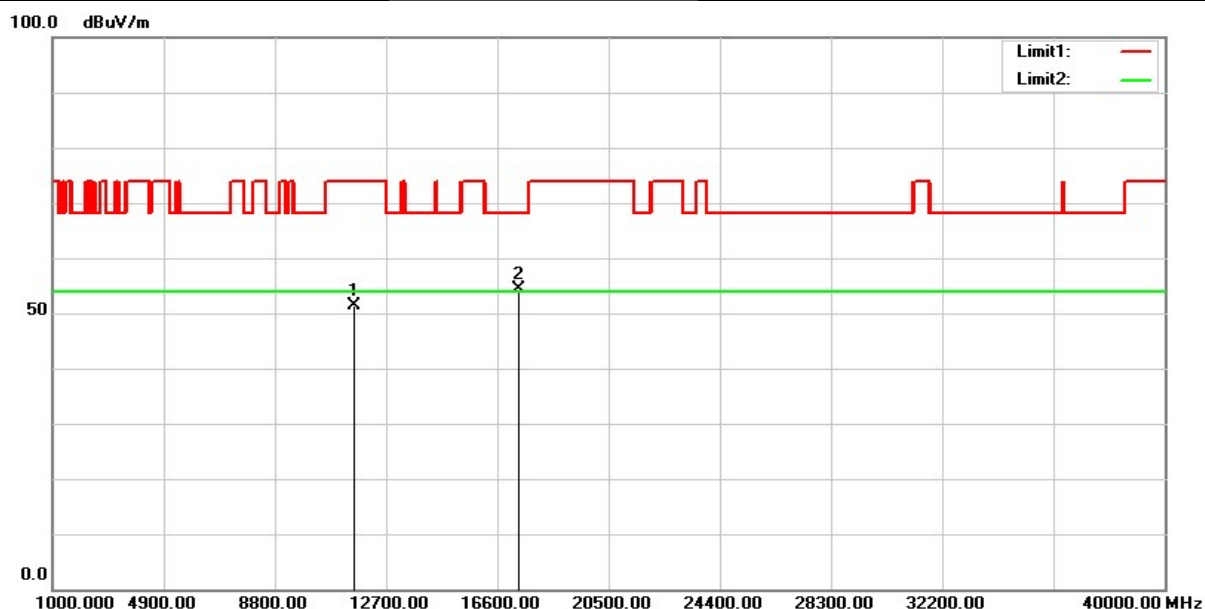


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 47.49            | 3.89                  | 51.38           | 74.00          | -22.62      | peak   |
| 2   | 17355.000       | 41.59            | 12.71                 | 54.30           | 68.20          | -13.90      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH165(5825MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal        | <b>Relative Humidity :</b> | 65 %       |

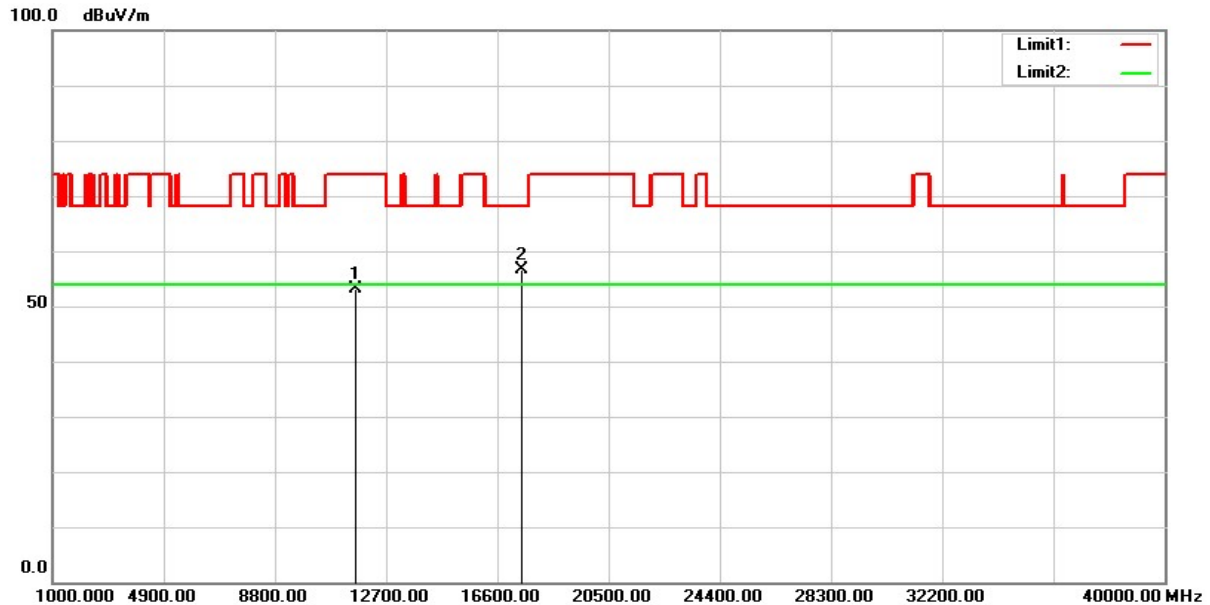


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 49.40            | 3.66                  | 53.06           | 74.00          | -20.94      | peak   |
| 2   | 17450.000       | 43.18            | 13.48                 | 56.66           | 68.20          | -11.54      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH165(5825MHz)    | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

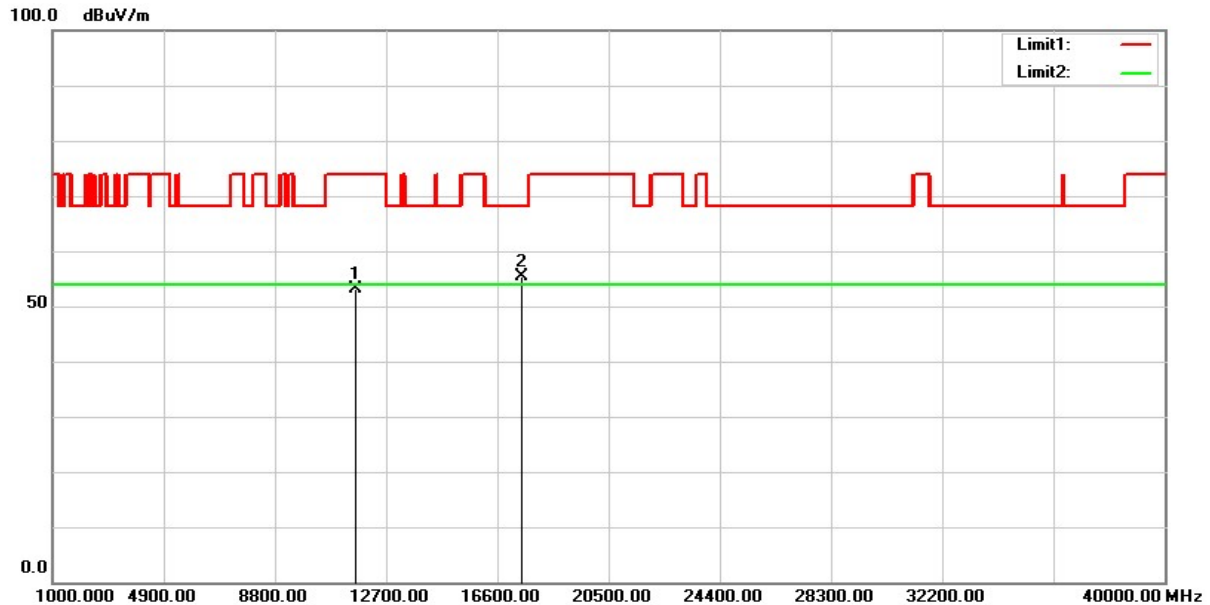


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 49.48            | 3.66                  | 53.14           | 74.00          | -20.86      | peak   |
| 2   | 17475.000       | 41.80            | 13.67                 | 55.47           | 68.20          | -12.73      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH36(5180MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

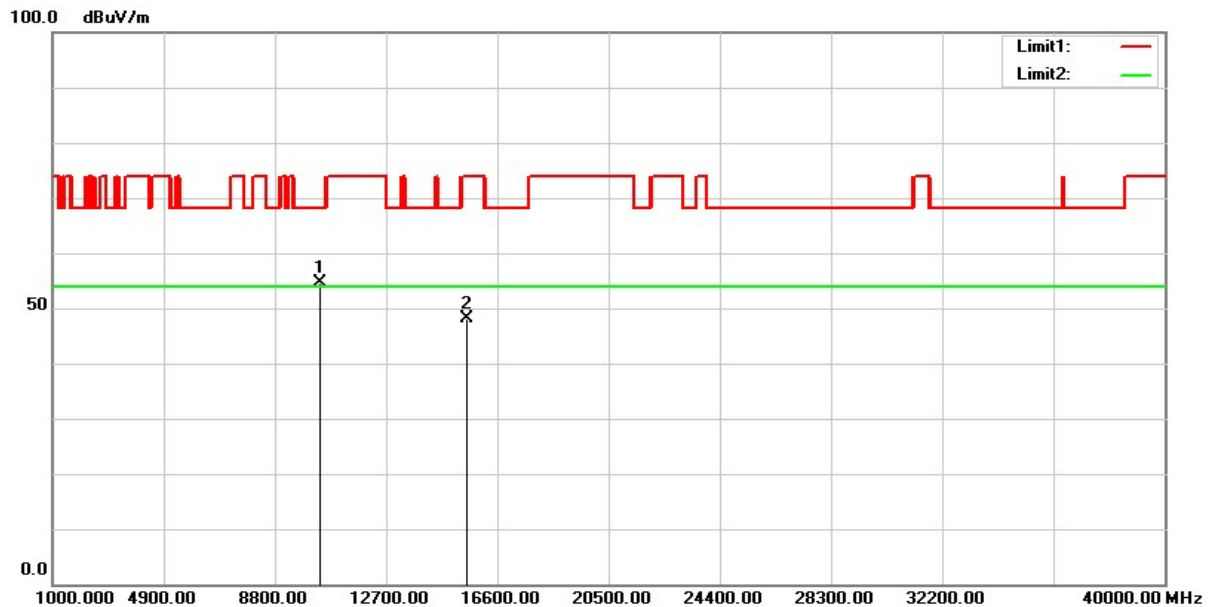


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 51.82            | 2.73                  | 54.55           | 68.20          | -13.65      | peak   |
| 2   | 15540.000       | 40.86            | 7.35                  | 48.21           | 74.00          | -25.79      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH36(5180MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

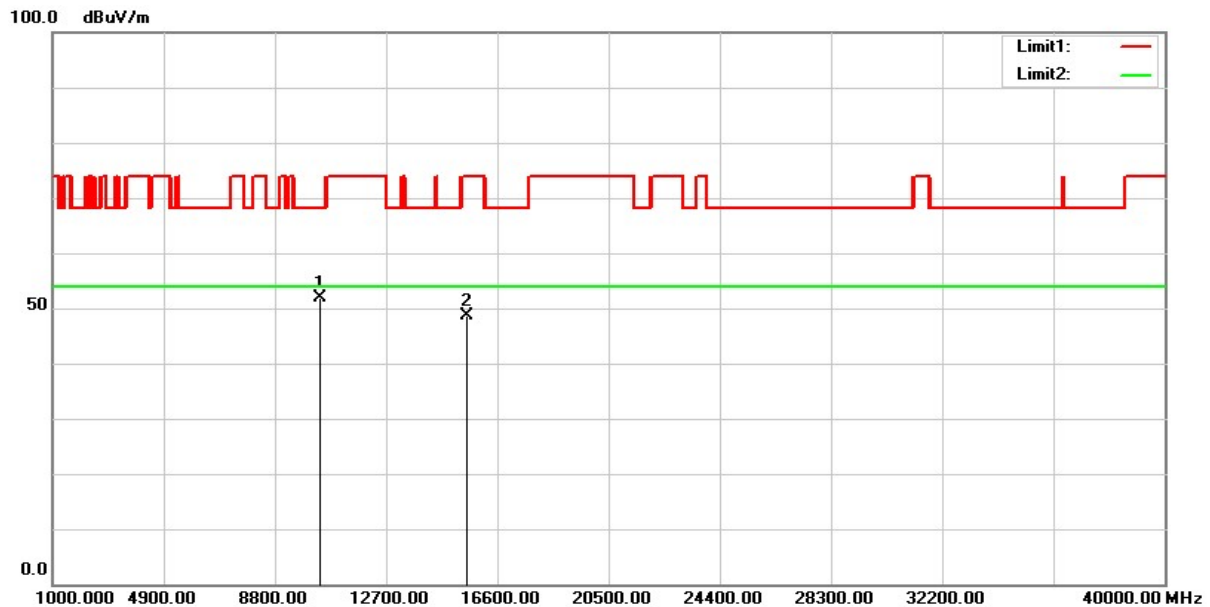


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 49.13            | 2.73                  | 51.86           | 68.20          | -16.34      | peak   |
| 2   | 15540.000       | 41.28            | 7.35                  | 48.63           | 74.00          | -25.37      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH44(5220MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

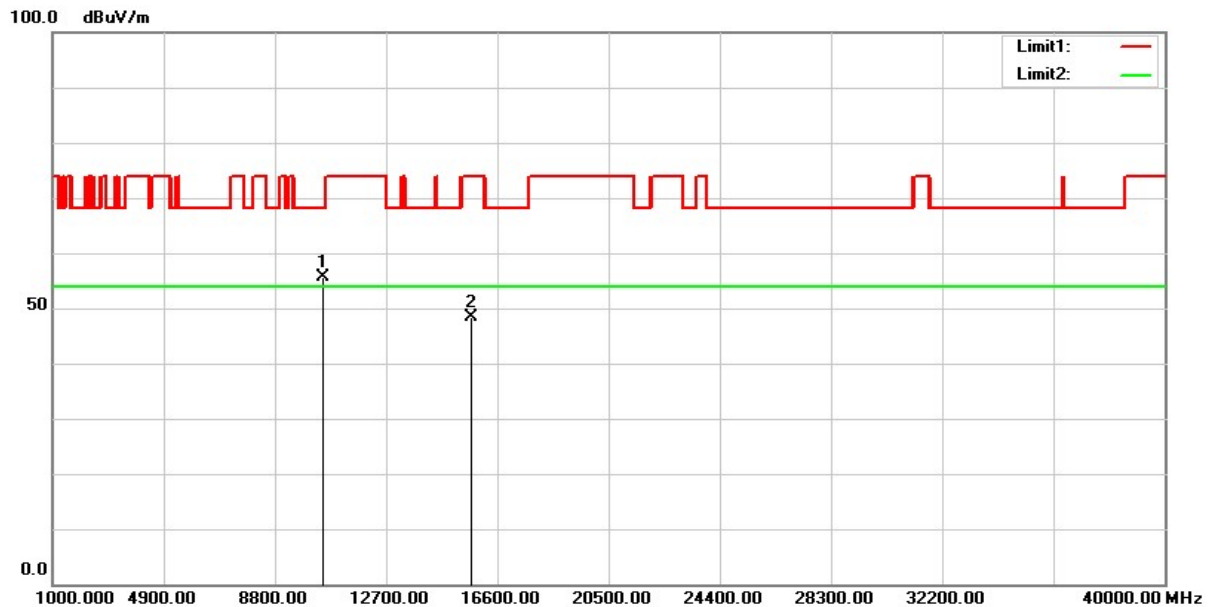


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10440.000       | 52.68            | 3.05                  | 55.73           | 68.20          | -12.47      | peak   |
| 2   | 15660.000       | 41.47            | 6.97                  | 48.44           | 74.00          | -25.56      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH44(5220MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

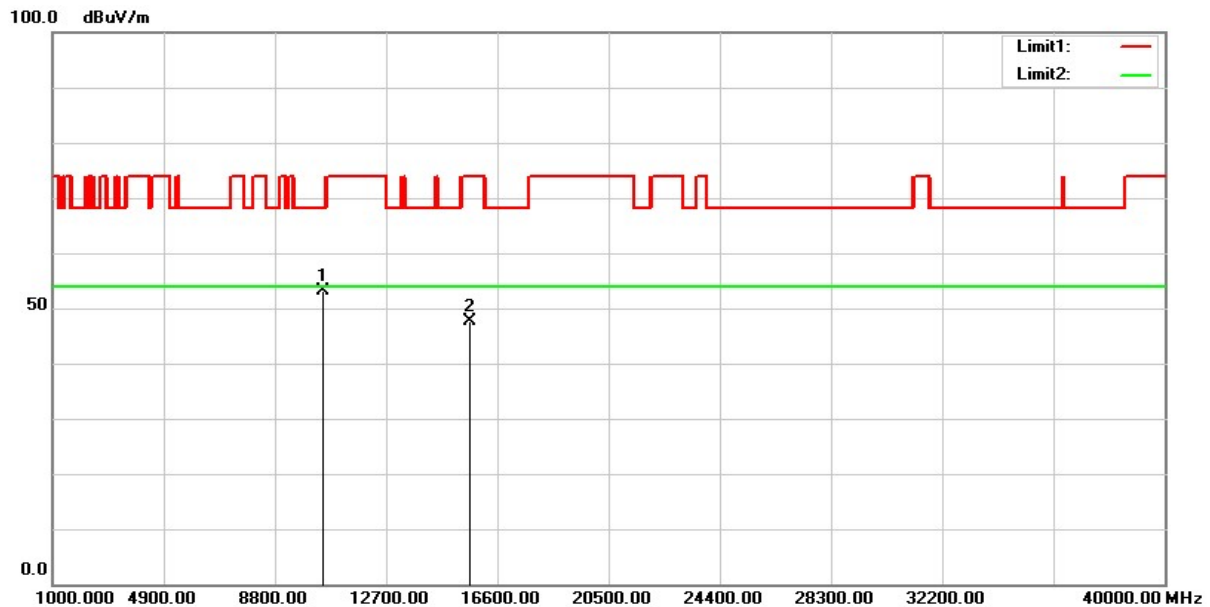


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10440.000       | 50.16            | 3.05                  | 53.21           | 68.20          | -14.99      | peak   |
| 2   | 15660.000       | 40.75            | 6.97                  | 47.72           | 74.00          | -26.28      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH48(5240MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

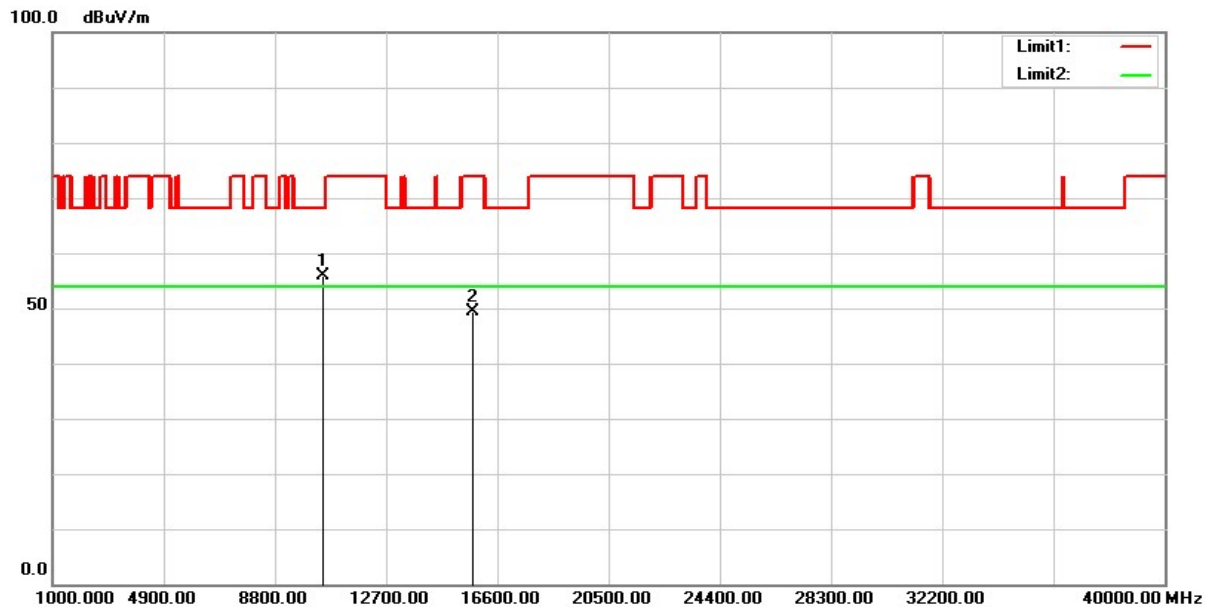


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 52.74            | 3.17                  | 55.91           | 68.20          | -12.29      | peak   |
| 2   | 15720.000       | 42.55            | 6.81                  | 49.36           | 74.00          | -24.64      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH48(5240MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

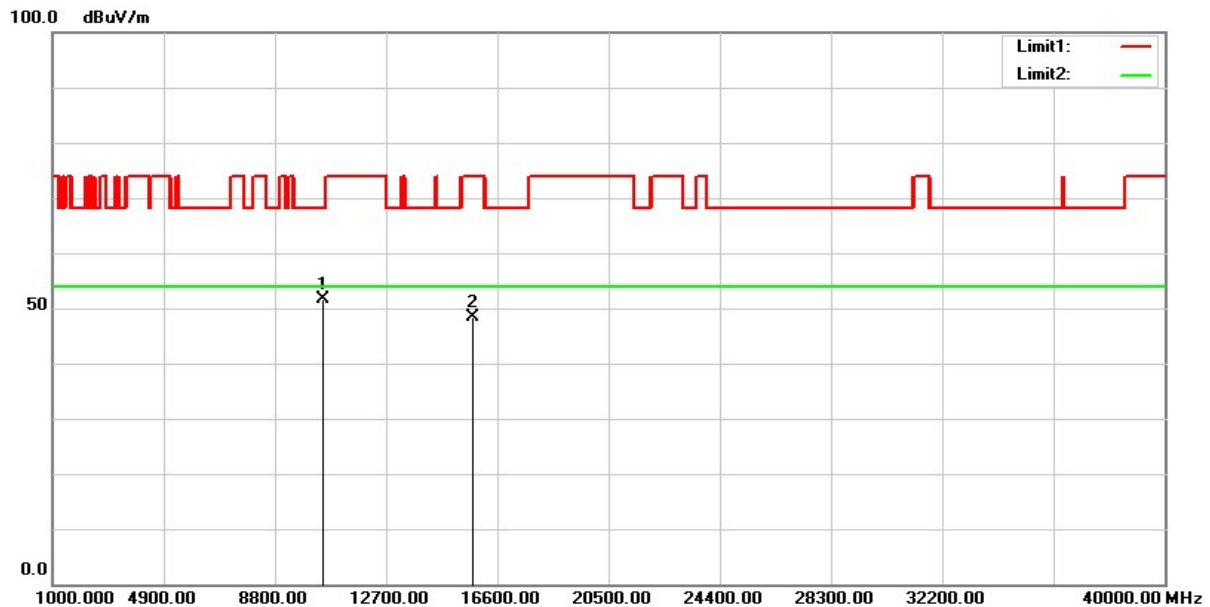


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 48.40            | 3.17                  | 51.57           | 68.20          | -16.63      | peak   |
| 2   | 15720.000       | 41.54            | 6.81                  | 48.35           | 74.00          | -25.65      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH52(5260MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

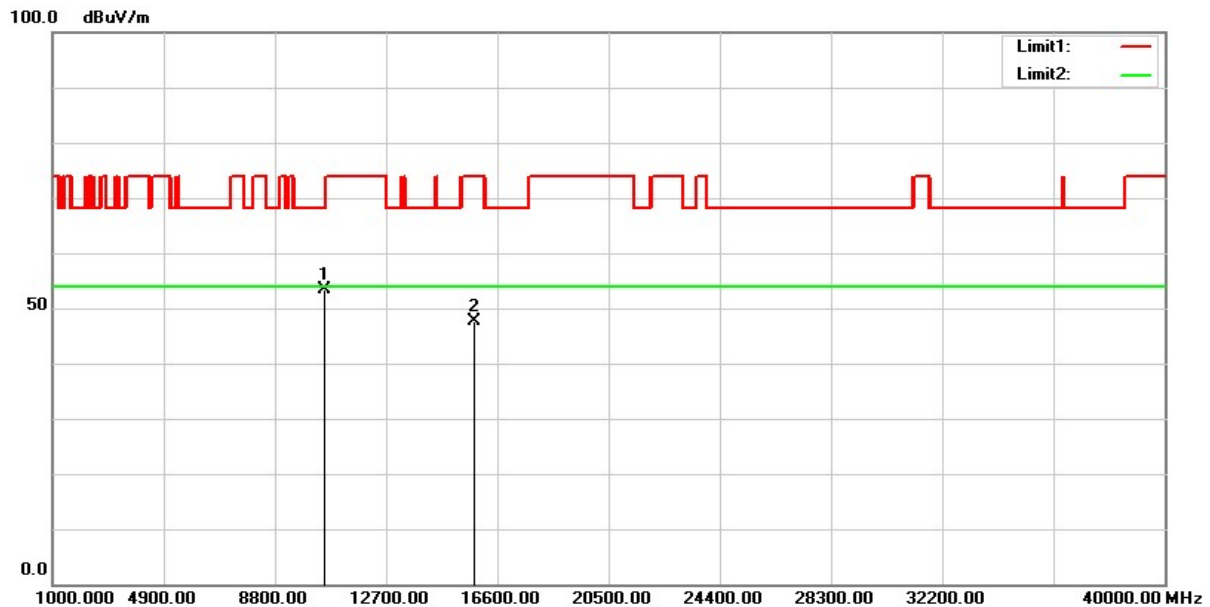


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 50.28            | 3.20                  | 53.48           | 68.20          | -14.72      | peak   |
| 2   | 15780.000       | 41.03            | 6.62                  | 47.65           | 74.00          | -26.35      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                   |                            |            |
|-----------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11a) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH52(5260MHz)     | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical          | <b>Relative Humidity :</b> | 65 %       |

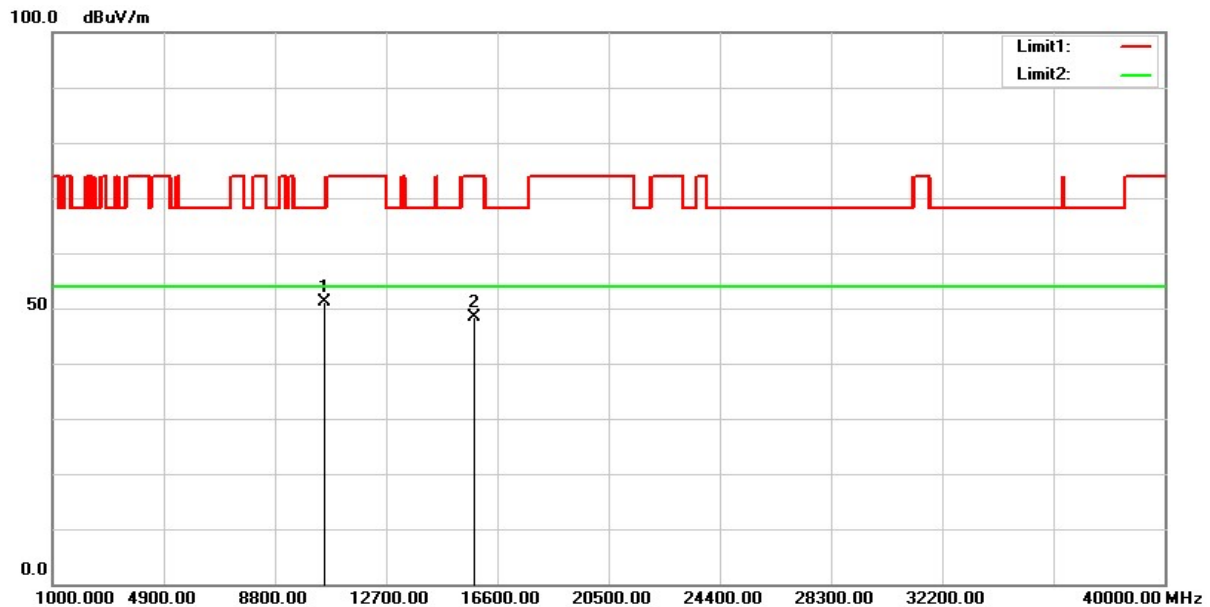


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 48.00            | 3.20                  | 51.20           | 68.20          | -17.00      | peak   |
| 2   | 15780.000       | 41.88            | 6.62                  | 48.50           | 74.00          | -25.50      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH56(5300MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

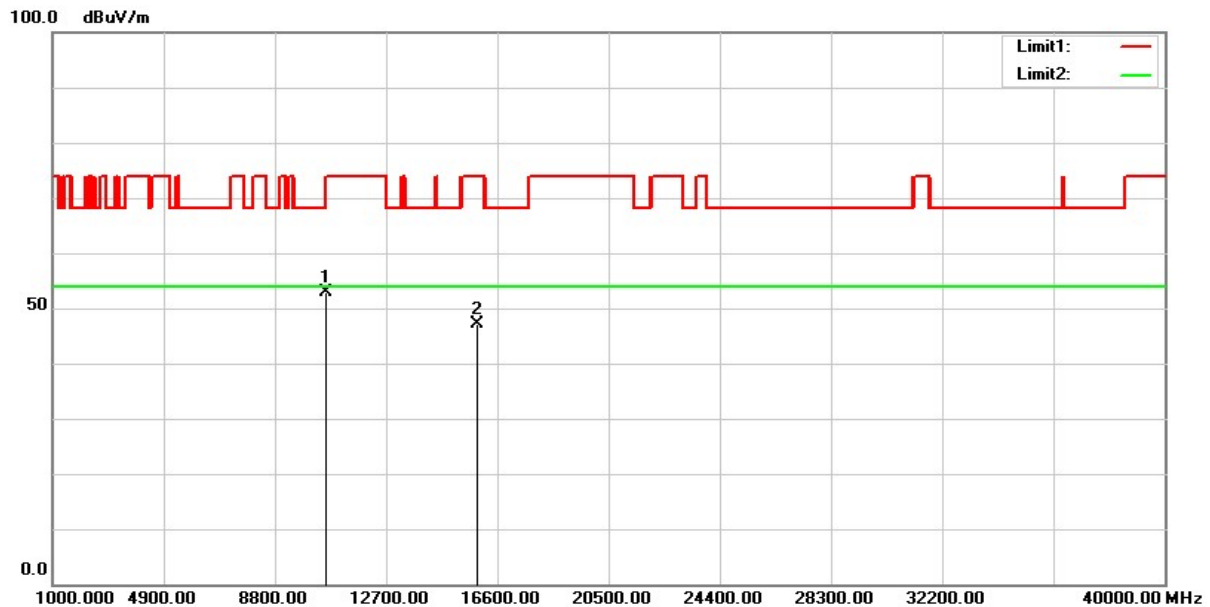


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 49.93            | 3.01                  | 52.94           | 68.20          | -15.26      | peak   |
| 2   | 15900.000       | 40.48            | 6.53                  | 47.01           | 74.00          | -26.99      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH56(5300MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

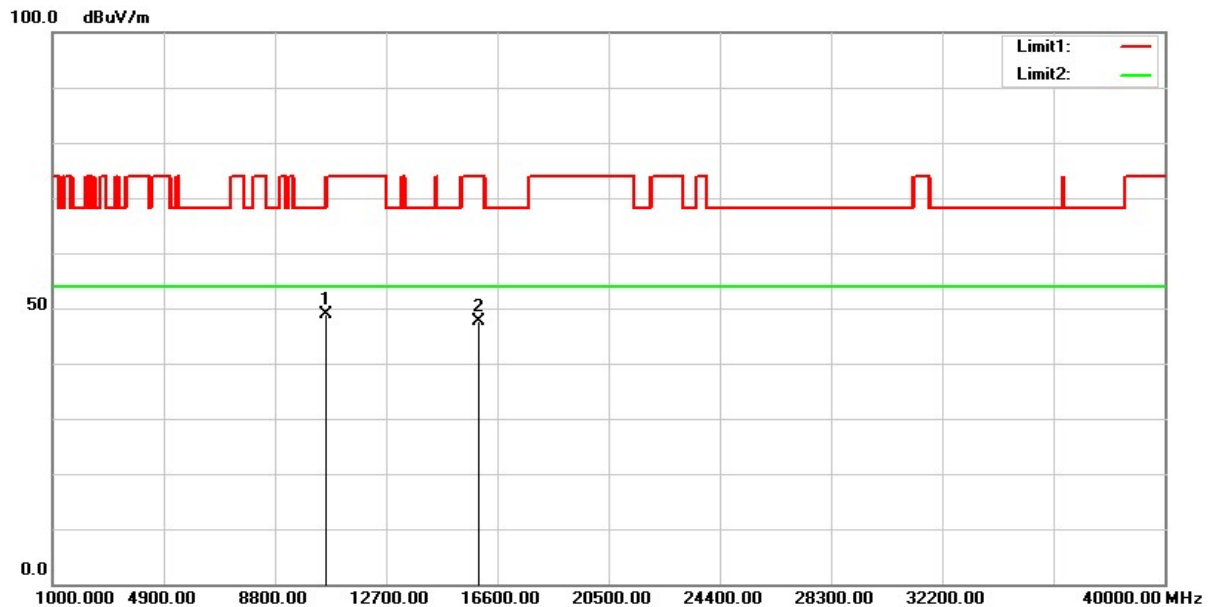


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 45.87            | 3.01                  | 48.88           | 68.20          | -19.32      | peak   |
| 2   | 15900.000       | 41.08            | 6.53                  | 47.61           | 74.00          | -26.39      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH64(5320MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

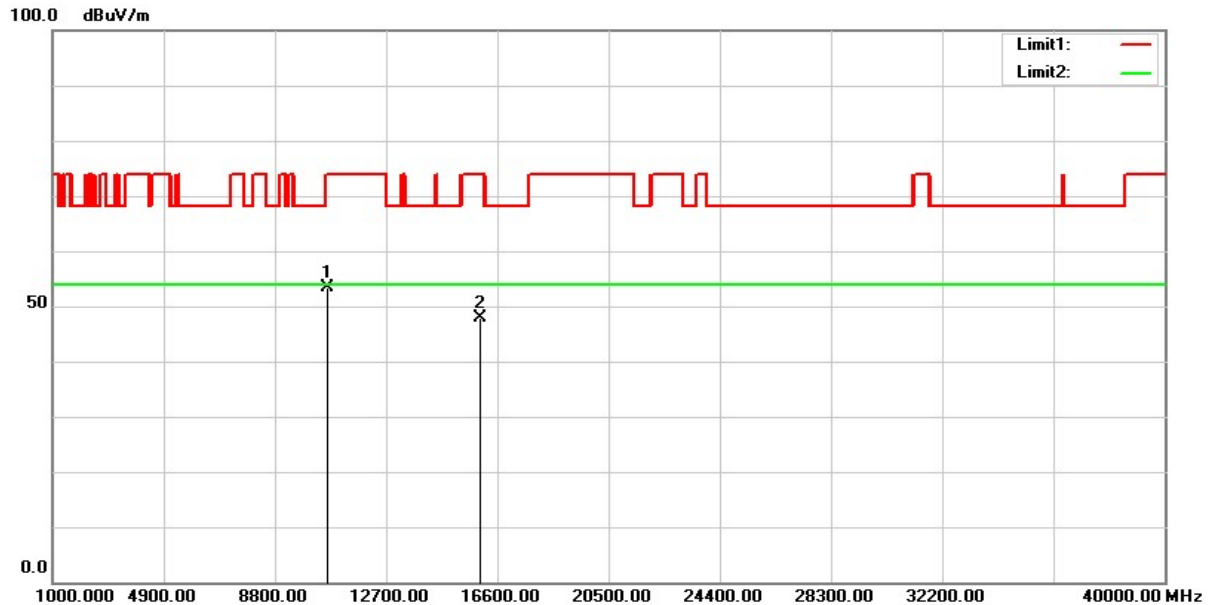


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 50.40            | 3.08                  | 53.48           | 74.00          | -20.52      | peak   |
| 2   | 15960.000       | 41.38            | 6.40                  | 47.78           | 74.00          | -26.22      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH64(5320MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

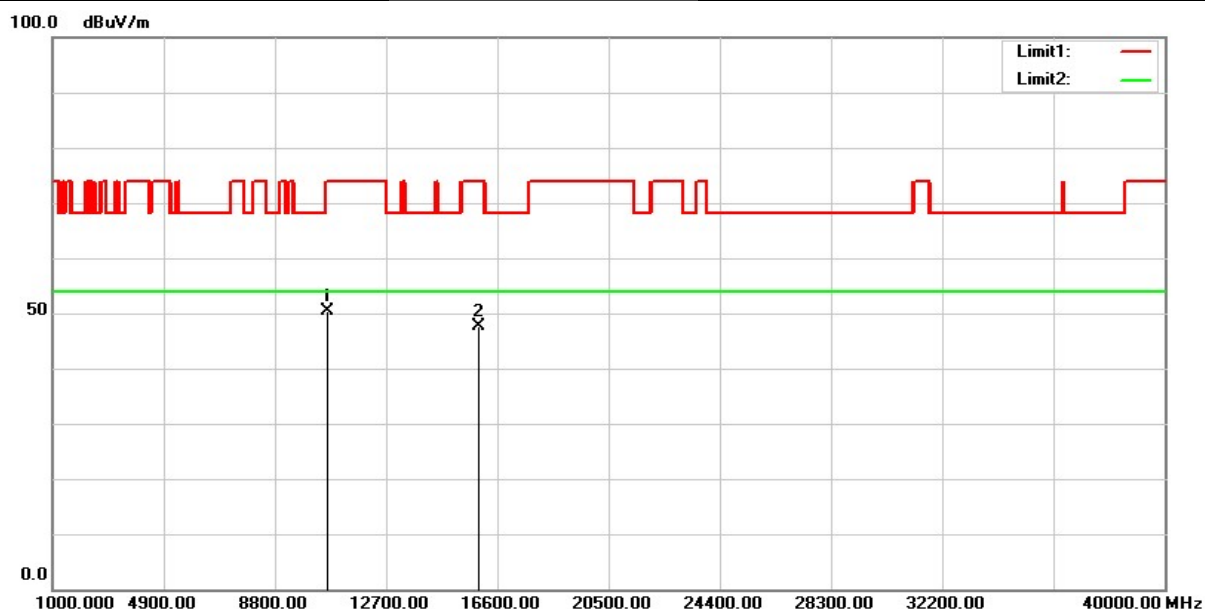


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 47.36            | 3.08                  | 50.44           | 74.00          | -23.56      | peak   |
| 2   | 15960.000       | 41.30            | 6.40                  | 47.70           | 74.00          | -26.30      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH100(5500MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

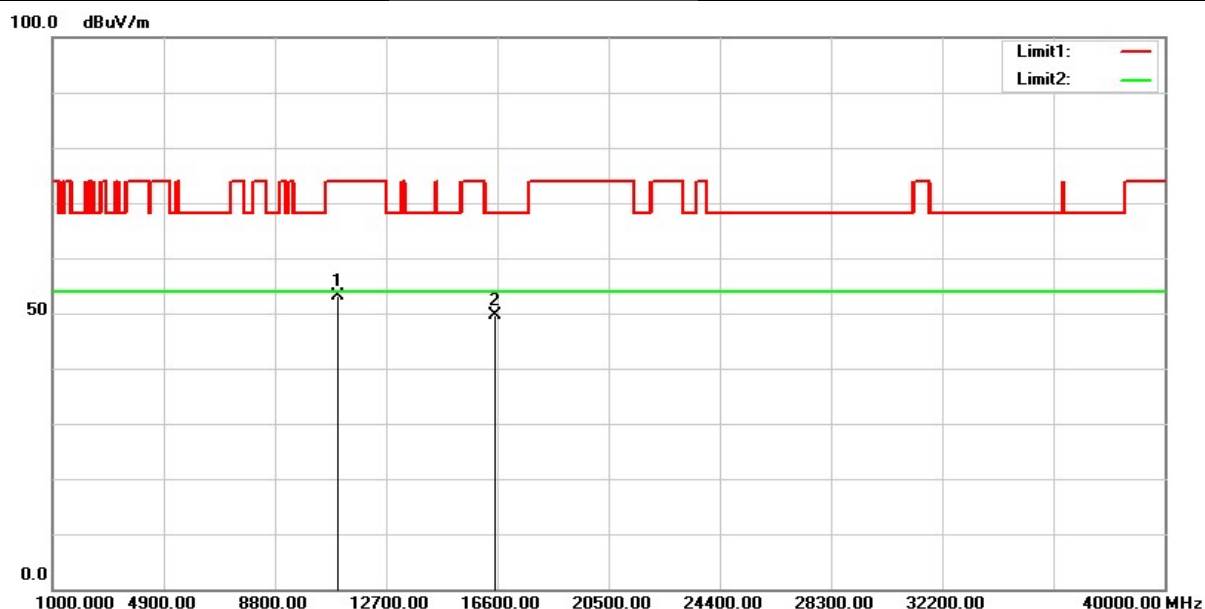


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 49.46            | 3.59                  | 53.05           | 74.00          | -20.95      | peak   |
| 2   | 16500.000       | 41.65            | 7.98                  | 49.63           | 68.20          | -18.57      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH100(5500MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

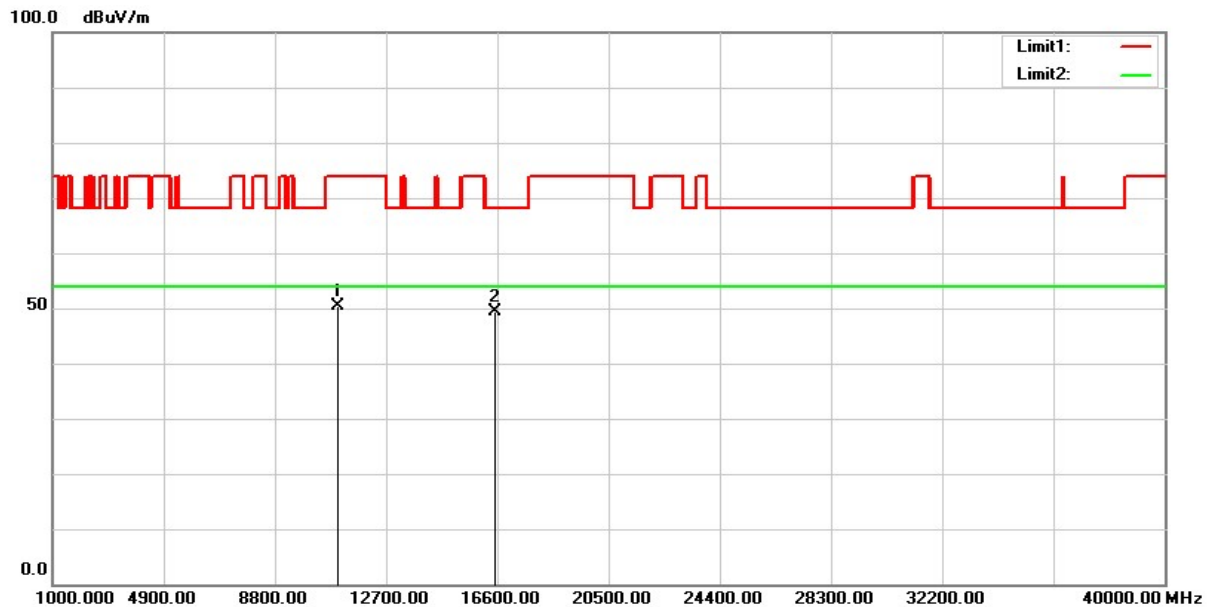


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 46.69            | 3.59                  | 50.28           | 74.00          | -23.72      | peak   |
| 2   | 16500.000       | 41.41            | 7.98                  | 49.39           | 68.20          | -18.81      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH112(5580MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

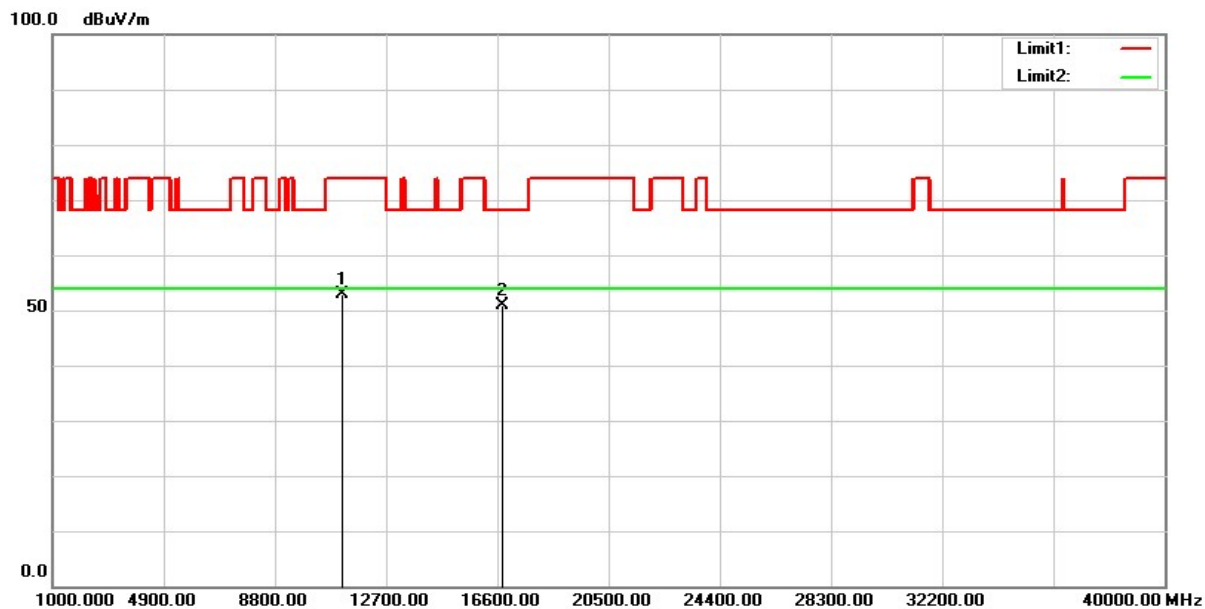


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 49.82            | 3.08                  | 52.90           | 74.00          | -21.10      | peak   |
| 2   | 16740.000       | 41.36            | 9.51                  | 50.87           | 68.20          | -17.33      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH112(5580MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

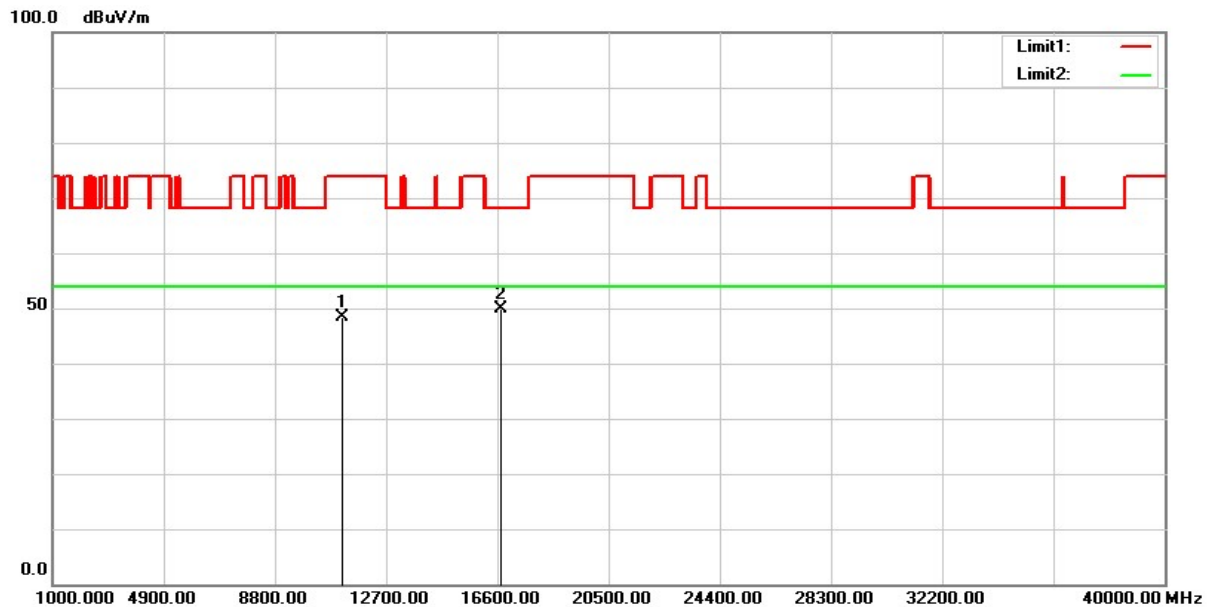


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 45.19            | 3.08                  | 48.27           | 74.00          | -25.73      | peak   |
| 2   | 16740.000       | 40.25            | 9.51                  | 49.76           | 68.20          | -18.44      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH140(5700MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

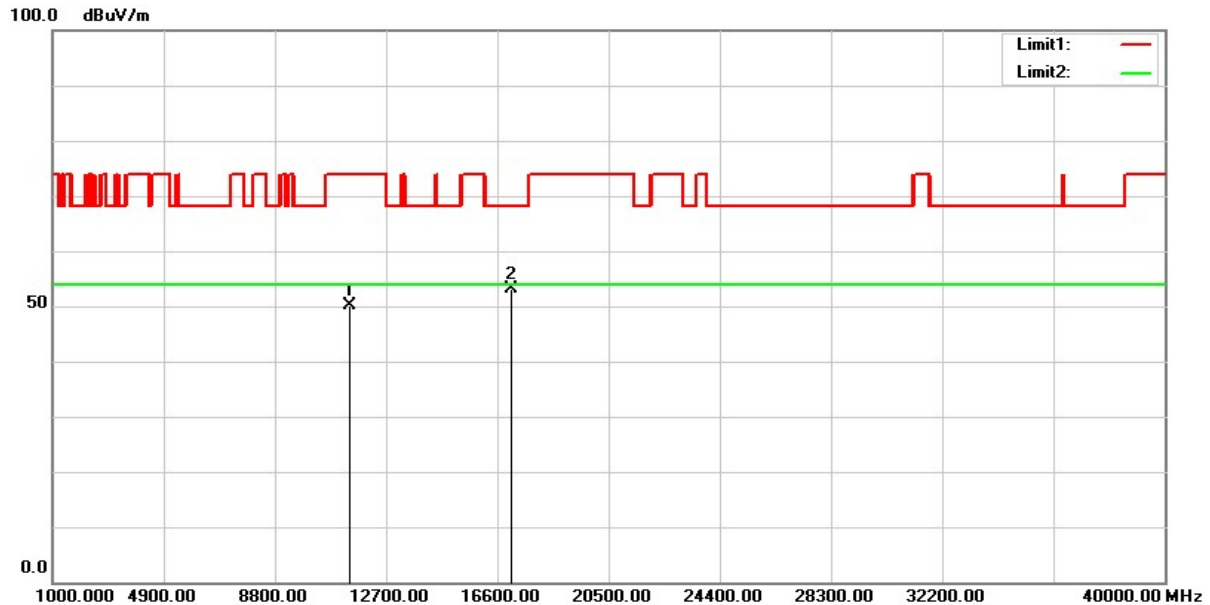


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 46.49            | 3.72                  | 50.21           | 74.00          | -23.79      | peak   |
| 2   | 17100.000       | 42.09            | 11.08                 | 53.17           | 68.20          | -15.03      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH140(5700MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

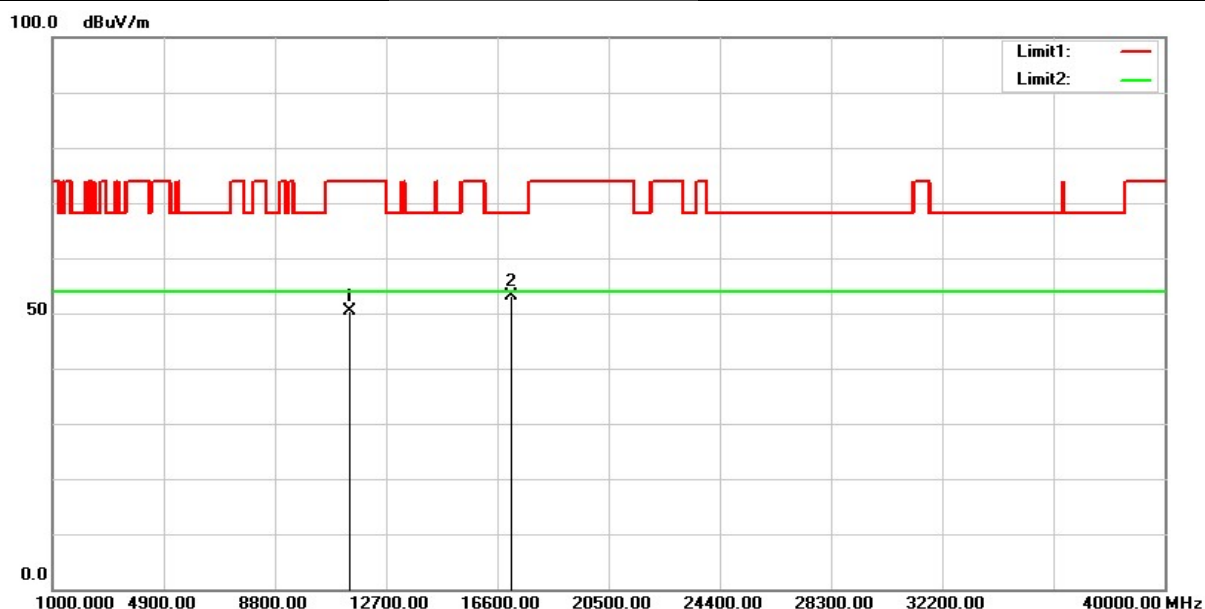


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 46.55            | 3.72                  | 50.27           | 74.00          | -23.73      | peak   |
| 2   | 17100.000       | 42.11            | 11.08                 | 53.19           | 68.20          | -15.01      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH149(5745MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

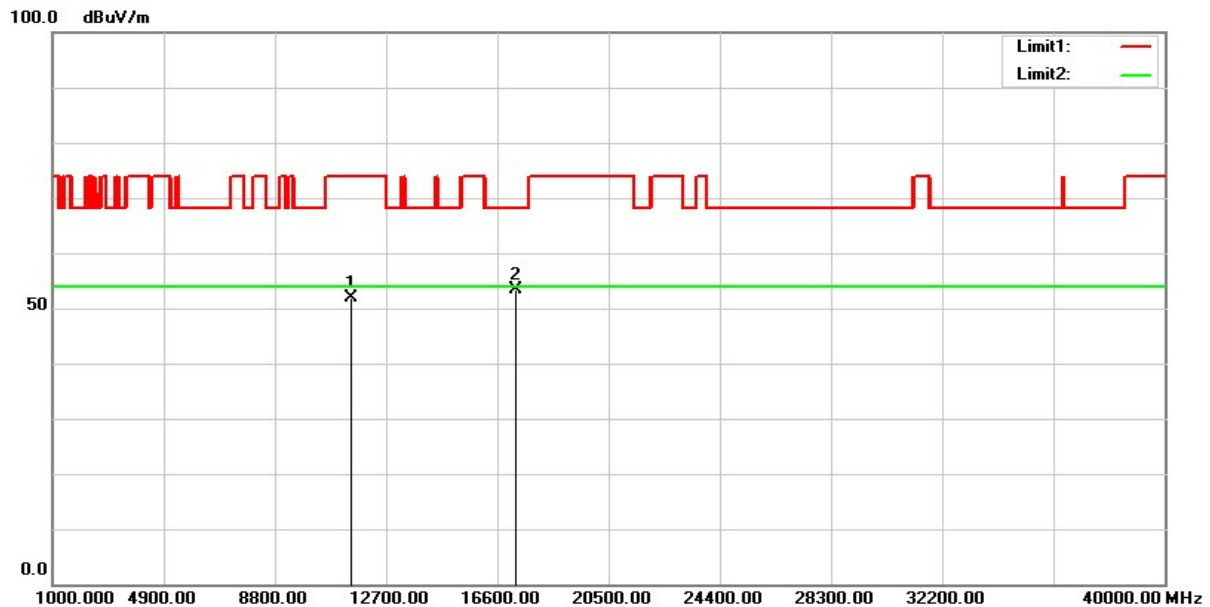


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 48.05            | 3.88                  | 51.93           | 74.00          | -22.07      | peak   |
| 2   | 17235.000       | 41.57            | 11.81                 | 53.38           | 68.20          | -14.82      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH149(5745MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

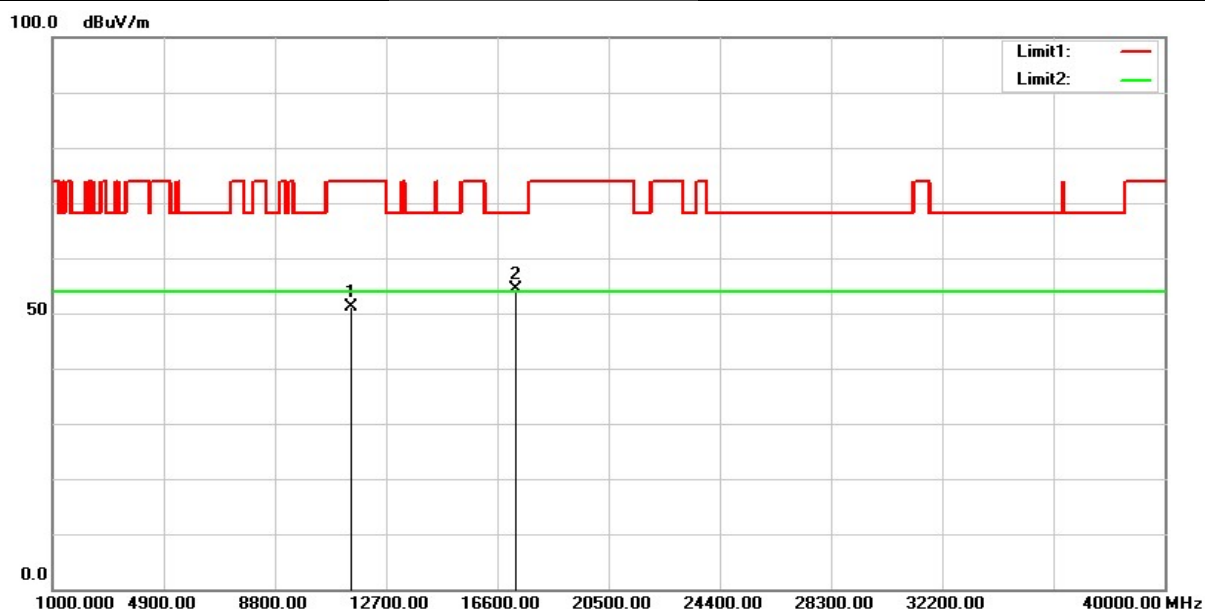


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 47.32            | 3.88                  | 51.20           | 74.00          | -22.80      | peak   |
| 2   | 17235.000       | 42.57            | 11.81                 | 54.38           | 68.20          | -13.82      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH157(5785MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

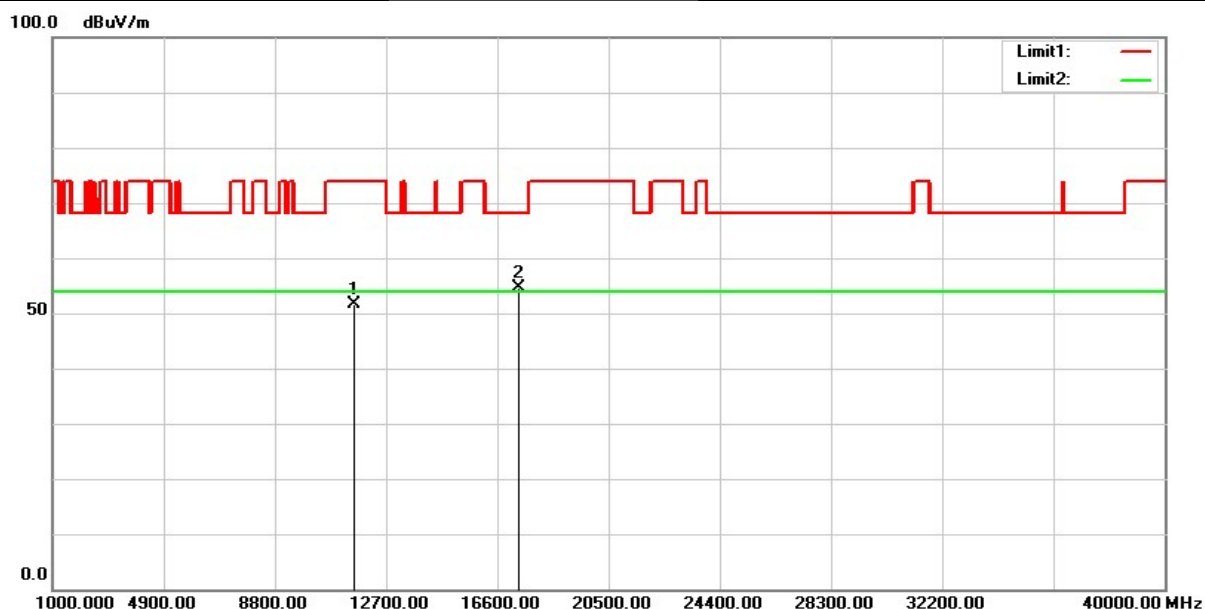


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 47.75            | 3.89                  | 51.64           | 74.00          | -22.36      | peak   |
| 2   | 17355.000       | 41.88            | 12.71                 | 54.59           | 68.20          | -13.61      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH157(5785MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

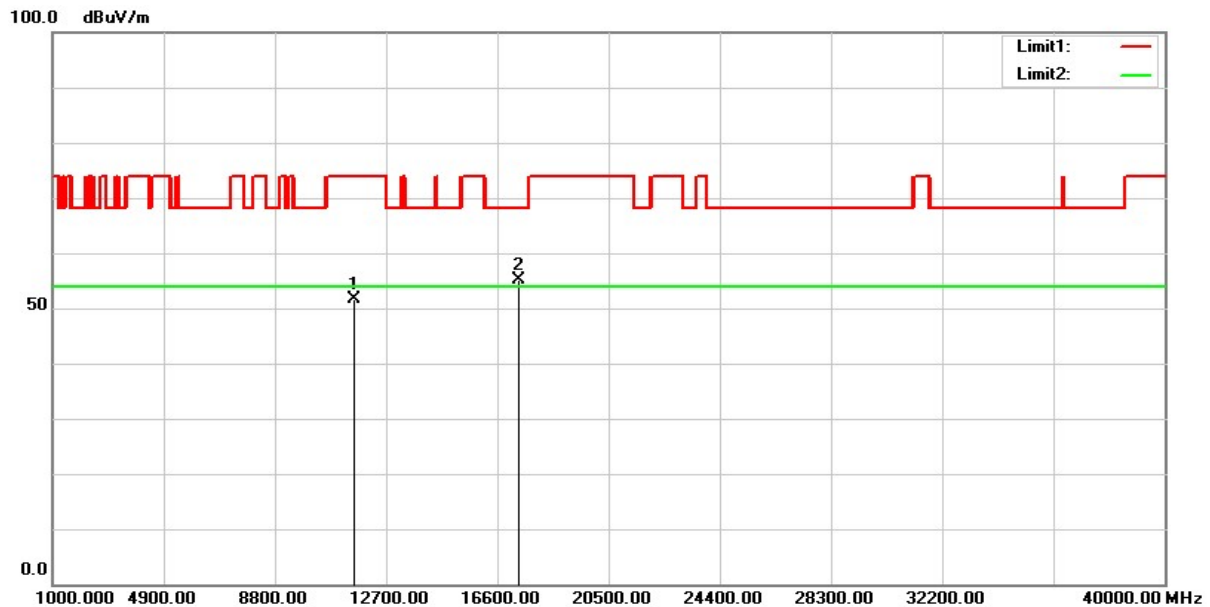


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 47.76            | 3.89                  | 51.65           | 74.00          | -22.35      | peak   |
| 2   | 17355.000       | 42.42            | 12.71                 | 55.13           | 68.20          | -13.07      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH165(5825MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

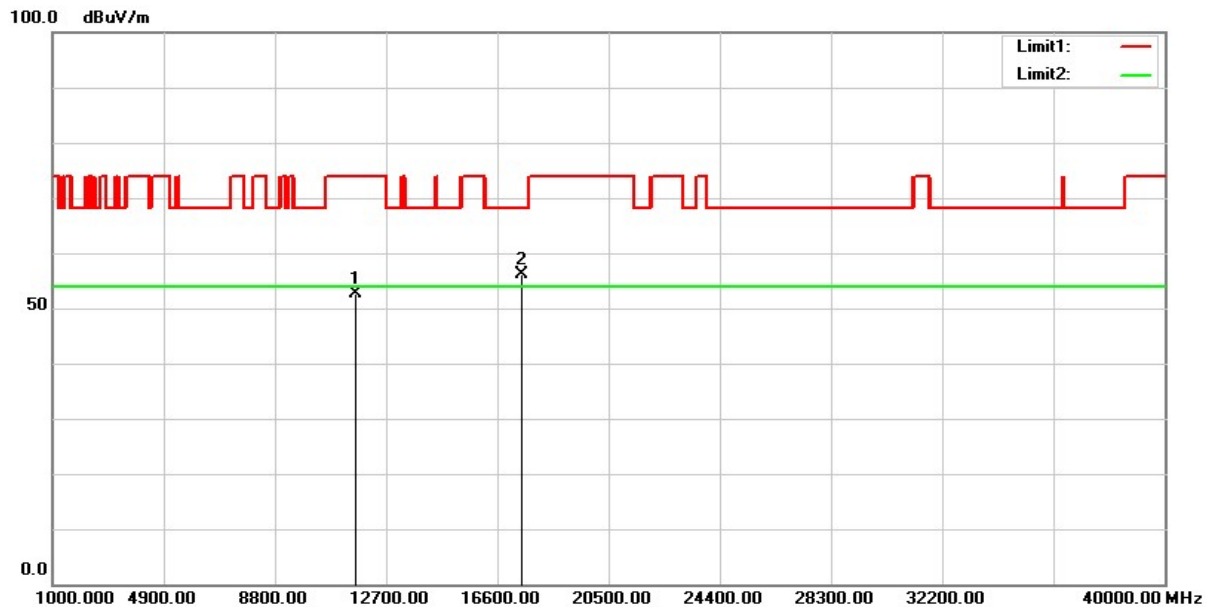


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 48.94            | 3.66                  | 52.60           | 74.00          | -21.40      | peak   |
| 2   | 17475.000       | 42.47            | 13.67                 | 56.14           | 68.20          | -12.06      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT20) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH165(5825MHz)         | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Vertical               | <b>Relative Humidity :</b> | 65 %       |

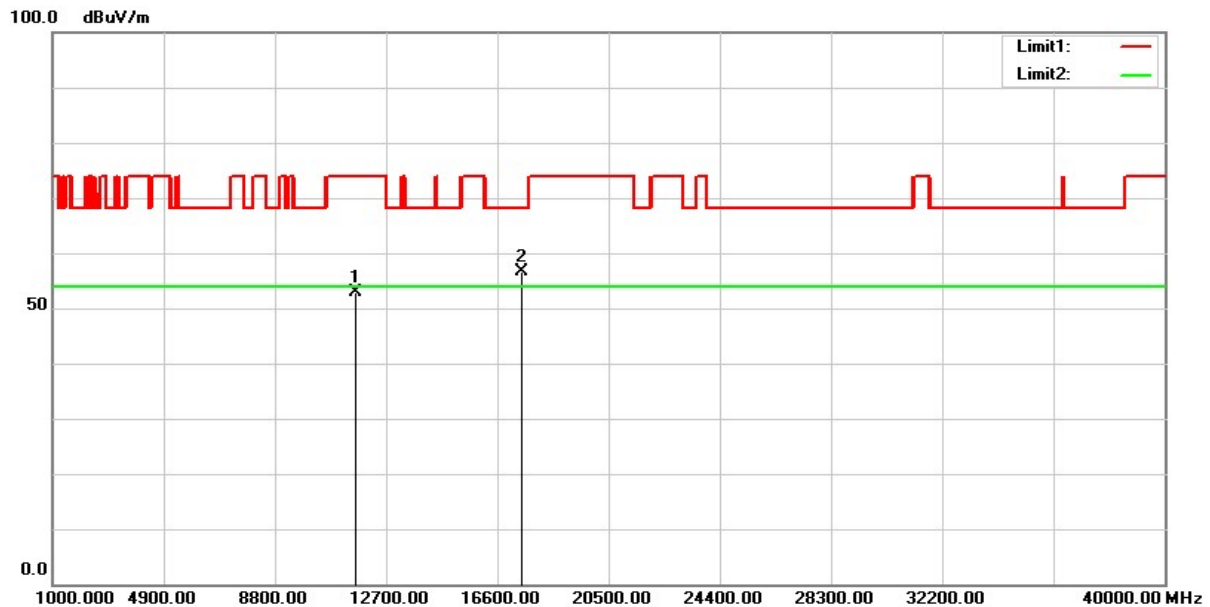


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 49.15            | 3.66                  | 52.81           | 74.00          | -21.19      | peak   |
| 2   | 17475.000       | 43.03            | 13.67                 | 56.70           | 68.20          | -11.50      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

|                       |                        |                            |            |
|-----------------------|------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Transmit(802.11n HT40) | <b>Test Date :</b>         | 2019/06/24 |
| <b>Test Channel :</b> | CH38(5190MHz)          | <b>Temperature :</b>       | 25 °C      |
| <b>Polarization :</b> | Horizontal             | <b>Relative Humidity :</b> | 65 %       |

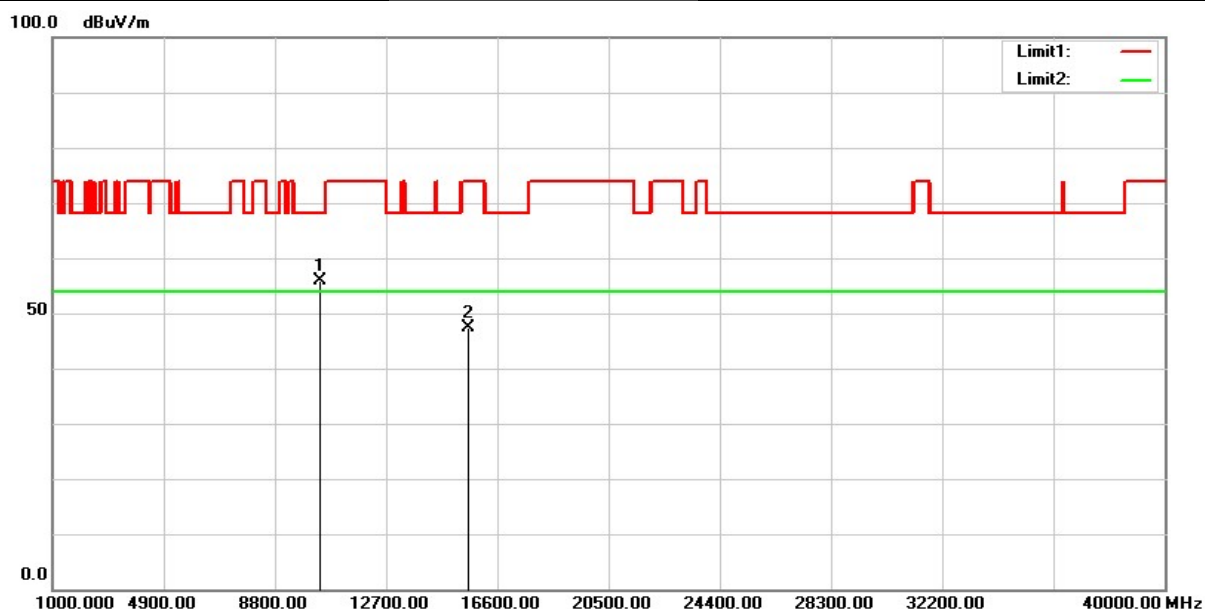

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10380.000       | 53.16            | 2.82                  | 55.98           | 68.20          | -12.22      | peak   |
| 2   | 15570.000       | 40.27            | 7.22                  | 47.49           | 74.00          | -26.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit