

Test Report

FCC ID: 2ASPB-UNWBK03

Date of issue: Mar. 15, 2019

Report Number: MTi190308E021

Sample Description: UNRAVEL

Model(s): UNWBK03, UNWBL03, UNWRE03, UNWPU03, UNWGN03,
UNWGL03

Applicant: GOGOTORO LLC

Address: 60 Broadway 10M Brooklyn NY 11249 USA

Date of Test: Jan. 17, 2019 – Mar. 15, 2019

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Table of Contents

1	GENERAL INFORMATION	4
1.1	FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2	TEST MODE	4
1.3	EUT TEST SETUP.....	5
1.4	ANCILLARY EQUIPMENT	5
1.5	MEASUREMENT UNCERTAINTY	5
2	SUMMARY OF TEST RESULT	6
2.1	TEST CHANNEL	6
3	TEST FACILITIES AND ACCREDITATIONS	7
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY.....	7
3.4	TEST SOFTWARE	7
4	LIST OF TEST EQUIPMENT	8
5	TEST RESULTS.....	9
5.1	ANTENNA REQUIREMENT	9
5.1.1	<i>Standard requirement</i>	9
5.1.2	<i>EUT Antenna</i>	9
5.2	CONDUCTED EMISSION	10
5.2.1	<i>Limits</i>	10
5.2.2	<i>Test Procedures</i>	10
5.2.3	<i>Test Setup</i>	10
5.2.4	<i>Test Result</i>	10
5.3	RADIATED EMISSION.....	15
5.3.1	<i>Limits</i>	15
5.3.2	<i>Test Procedures</i>	16
5.3.3	<i>Test Setup</i>	17
5.3.4	<i>Test Result</i>	17
5.4	OCCUPIED BANDWIDTH.....	22
5.4.1	<i>Test method</i>	22
5.4.2	<i>Test result</i>	22
	PHOTOGRAPHS OF THE TEST SETUP	24
	PHOTOGRAPHS OF THE EUT.....	26

Test Result Certification

Applicant's name: GOGOTORO LLC

Address: 60 Broadway 10M Brooklyn NY 11249 USA

Manufacture's name: Shenzhen Savori Intelligent System Technology Co., Ltd.

Address: The 1st Building, Guanfeng Industrial Park, Jiuwei Village, Xixiang Street, Baoan District, Shenzhen City, China.

Product name: UNRAVEL

Trademark: AMPERE


Model name: UNWBK03, UNWBL03, UNWRE03, UNWPU03, UNWGN03, UNWGL03

Standards: FCC Part 15C

Test Procedure: ANSI C63.10-2013

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by:



Jack Le

Mar. 15, 2019

Reviewed by:



Blue Zheng

Mar. 15, 2019

Approved by:



Smith Chen

Mar. 15, 2019

1 GENERAL INFORMATION

1.1 Feature of equipment under test (EUT)

Product name:	UNRAVEL
Model name:	UNWBK03
Series model:	UNWBL03, UNWRE03, UNWPU03, UNWGN03, UNWGL03
Deference in serial model:	All the model are the same circuit and RF module, except the appearance, color and model No
Operation frequency:	115–205 kHz
Modulation type:	Load modulation
Antenna type:	Coil Antenna (Met 15.203 Antenna requirement)
Power supply:	DC 5V or 9V from adapter
Battery:	N/A
Adapter information:	N/A

1.2 Test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test mode	Description
Mode 1	Wireless charging

Note1: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

Note2: EUT is tested under full load and belongs to the worst mode.

1.3 EUT test setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary equipment

Equipment	Model	S/N	Manufacturer
Adapter	TYPE-C601C	/	/
Mobile phone	S8	/	SAMSUNG
Mobile phone	IPHONE X	/	Apple
Wireless Loading	/	/	/

1.5 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

2 SUMMARY OF TEST RESULT

Item	FCC Part No.	Description of Test	Result
1	FCC PART 15.203	Antenna requirement	Pass
2	FCC PART 15.207	Conducted emission	Pass
3	FCC PART 15.209	Radiated emission	Pass
4	FCC Part 15.215	20dB bandwidth	Pass

2.1 Test channel

Channel	Frequency (kHz)
Middle	148

3 TEST FACILITIES AND ACCREDITATIONS

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	20°C~30°C
Humidity	30%~70%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Farad	LZ-RF	Lz_Rf 3A3

4 LIST OF TEST EQUIPMENT

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E001	Spectrum Analyzer	Agilent	E4407B	MY41441082	2018/09/18	2019/09/17
MTI-E002	CMU 200 universal radio communication tester	Rohde&schwarz	CMU 200	114587	2018/09/18	2019/09/17
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI	1000314	2018/09/18	2019/09/17
MTI-E006	Broadband antenna	schwarabeck	VULB9163	872	2018/09/18	2019/09/17
MTI-E007	Horn antenna	schwarabeck	BBHA9120D	1201	2018/09/18	2019/09/17
MTI-E014	amplifier	America	8447D	3113A06150	2018/09/18	2019/09/17
MTI-E015	Conduction Immunity Signal Generator	Schloder	CDG6000	126A1343/2015	2018/09/18	2019/09/17
MTI-E016	Coupled decoupling network	Schloder	CDA M2/M3	A2210332/2015	2018/09/18	2019/09/17
MTI-E032	Comprehensive test instrument	Rohde&schwarz	CMW500	124192	2018/09/18	2019/09/17
MTI-E034	amplifier	Agilent	8449B	3008A02400	2018/09/18	2019/09/17
MTI-E037	Artificial power network	Schwarzbeck	NSLK8127	#841	2018/09/18	2019/09/17
MTI-E040	Spectrum analyzer	Agilent	N9020A	MY49100060	2018/09/18	2019/09/17
MTI-E041	Signal generator	Agilent	N5182A	MY49060455	2018/09/18	2019/09/17
MTI-E042	Analog signal generator	Agilent	E4421B	GB40051240	2018/09/18	2019/09/17
MTI-E043	Power probe	Dare Instruments	RPR3006W	16I00054SN016	2018/09/18	2019/09/17
MTI-E047	10dB attenuator	Mini-Circuits	UNAT-10+	15542	2018/09/18	2019/09/17
MTI-E049	spectrum analyzer	Rohde&schwarz	FSP-38	100019	2018/09/18	2019/09/17
MTI-E050	PSG Signal generator	Agilent	E8257D	MY46520873	2018/09/18	2019/09/17
MTI-E051	Active Loop Antenna 9kHz - 30MHz	Schwarzbeek	FMZB 1519 B	00044	2018/09/18	2019/09/17
MTI-E052	18-40GHz amplifier	Chengdu step Micro Technology	ZLNA-18-40G-21	1608001	2018/09/18	2019/09/17
MTI-E053	15-40G Antenna	Schwarzbeek	BBHA9170	BBHA9170582	2018/09/18	2019/09/17
MTI-E058	Artificial power network	Schwarzbeck	NSLK8127	#841	2018/09/18	2019/09/17
Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).						

5 TEST RESULTS

5.1 Antenna requirement


5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna


The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

Temperature:	27℃	Relative Humidity:	65%
Pressure:	101kPa	Phase:	L
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

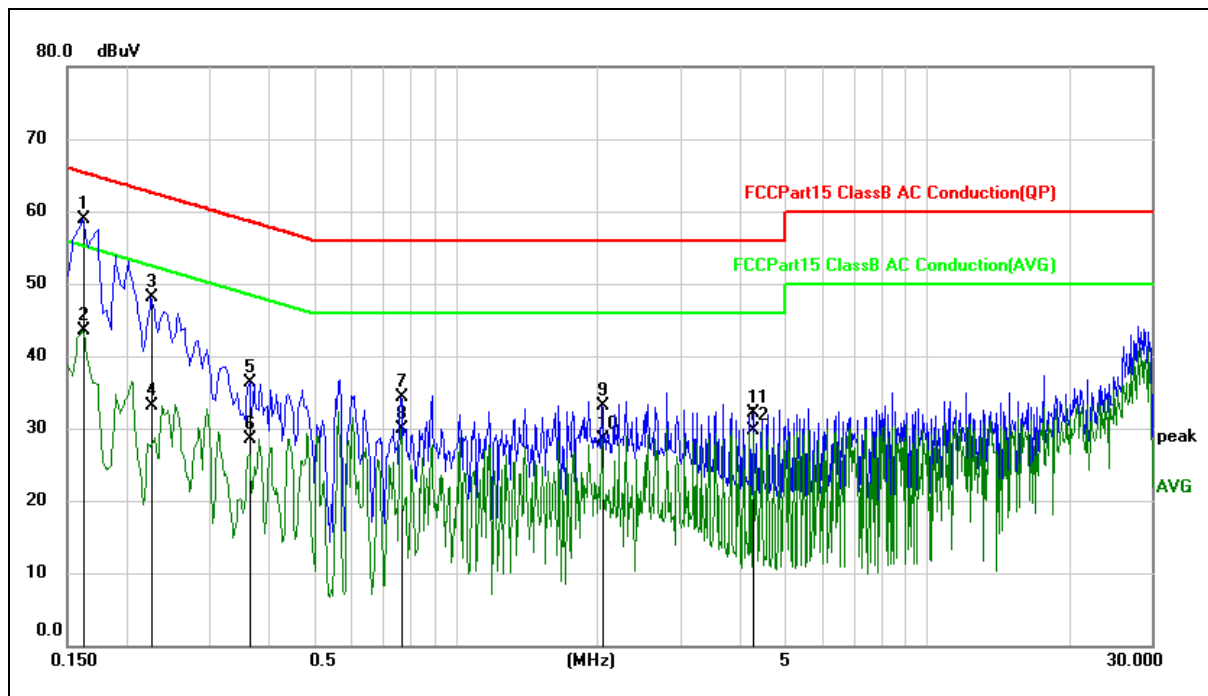


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1620	48.65	10.23	58.88	65.36	-6.48	QP	
2		0.1620	33.28	10.23	43.51	55.36	-11.85	AVG	
3		0.2260	37.90	10.23	48.13	62.60	-14.47	QP	
4		0.2260	22.82	10.23	33.05	52.60	-19.55	AVG	
5		0.3660	26.02	10.23	36.25	58.59	-22.34	QP	
6		0.3660	18.35	10.23	28.58	48.59	-20.01	AVG	
7		0.7660	24.08	10.22	34.30	56.00	-21.70	QP	
8		0.7660	19.69	10.22	29.91	46.00	-16.09	AVG	
9		2.0460	22.80	10.22	33.02	56.00	-22.98	QP	
10		2.0460	18.21	10.22	28.43	46.00	-17.57	AVG	
11		4.2900	21.92	10.23	32.15	56.00	-23.85	QP	
12		4.2900	19.45	10.23	29.68	46.00	-16.32	AVG	

Temperature:	27°C	Relative Humidity:	65%
Pressure:	101kPa	Phase:	N
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

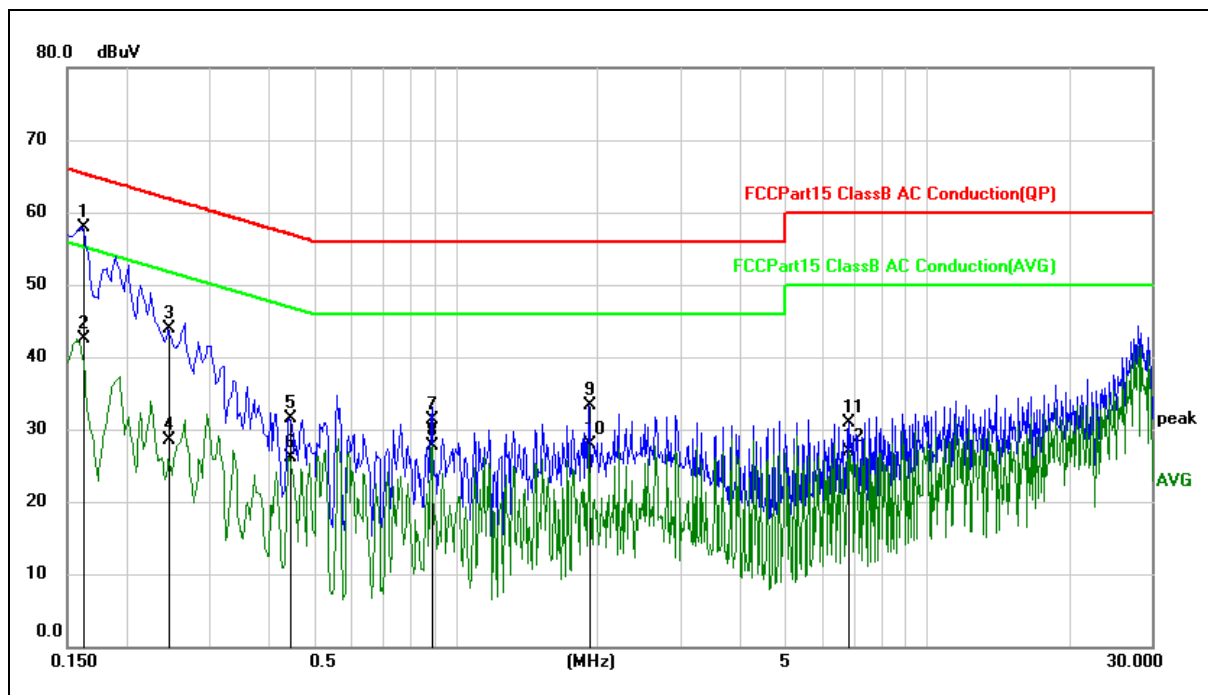


No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1	*	0.1620	47.73	10.23	57.96	65.36	-7.40	QP	
2		0.1620	32.27	10.23	42.50	55.36	-12.86	AVG	
3		0.2460	33.64	10.23	43.87	61.89	-18.02	QP	
4		0.2460	18.25	10.23	28.48	51.89	-23.41	AVG	
5		0.4460	21.20	10.23	31.43	56.95	-25.52	QP	
6		0.4460	15.92	10.23	26.15	46.95	-20.80	AVG	
7		0.8860	21.01	10.21	31.22	56.00	-24.78	QP	
8		0.8860	17.40	10.21	27.61	46.00	-18.39	AVG	
9		1.9220	23.19	10.21	33.40	56.00	-22.60	QP	
10		1.9220	17.64	10.21	27.85	46.00	-18.15	AVG	
11		6.8060	20.68	10.23	30.91	60.00	-29.09	QP	
12		6.8060	16.77	10.23	27.00	50.00	-23.00	AVG	

Temperature:	27°C	Relative Humidity:	65%
Pressure:	101kPa	Phase:	L
Test voltage:	DC 9V from adapter AC 240V/60Hz	Test mode:	Mode 1

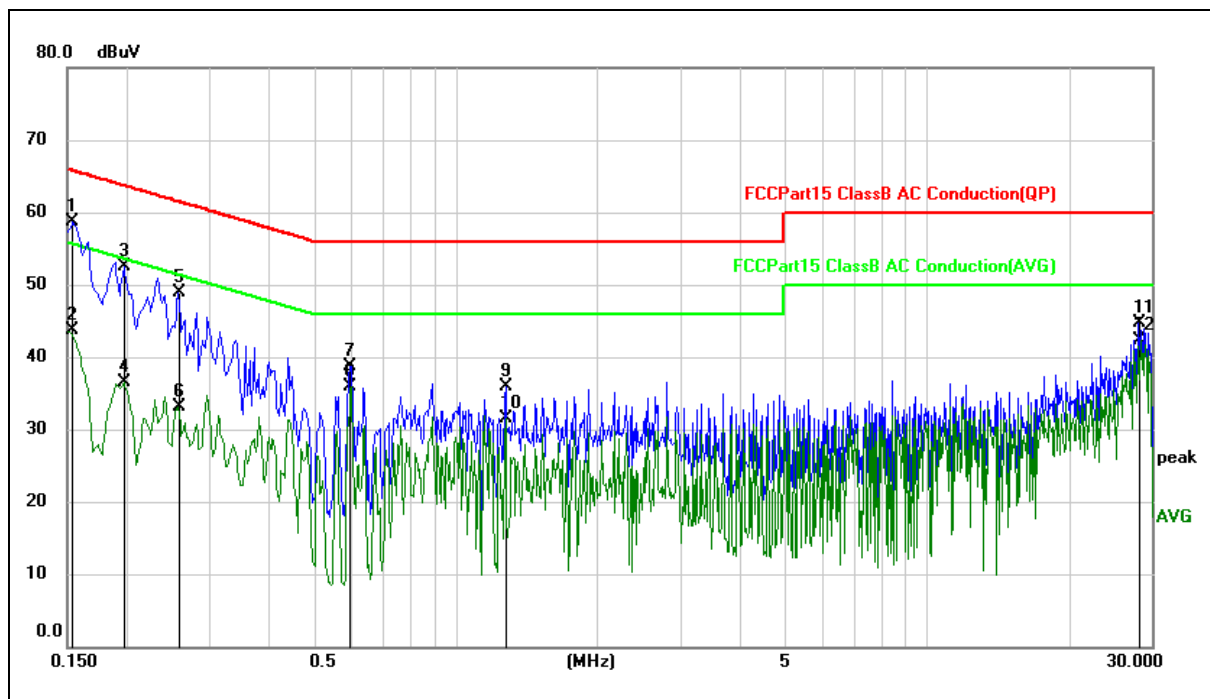

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1539	48.38	10.23	58.61	65.79	-7.18	QP	
2		0.1539	33.47	10.23	43.70	55.79	-12.09	AVG	
3		0.1980	42.36	10.23	52.59	63.69	-11.10	QP	
4		0.1980	26.24	10.23	36.47	53.69	-17.22	AVG	
5		0.2580	38.68	10.23	48.91	61.50	-12.59	QP	
6		0.2580	22.80	10.23	33.03	51.50	-18.47	AVG	
7		0.5977	28.47	10.23	38.70	56.00	-17.30	QP	
8		0.5977	25.77	10.23	36.00	46.00	-10.00	AVG	
9		1.2780	25.71	10.21	35.92	56.00	-20.08	QP	
10		1.2780	21.38	10.21	31.59	46.00	-14.41	AVG	
11		28.1060	34.40	10.27	44.67	60.00	-15.33	QP	
12		28.1060	31.96	10.27	42.23	50.00	-7.77	AVG	

Temperature:	27℃	Relative Humidity:	65%
Pressure:	101kPa	Phase:	N
Test voltage:	DC 9V from adapter AC 240V/60Hz	Test mode:	Mode 1

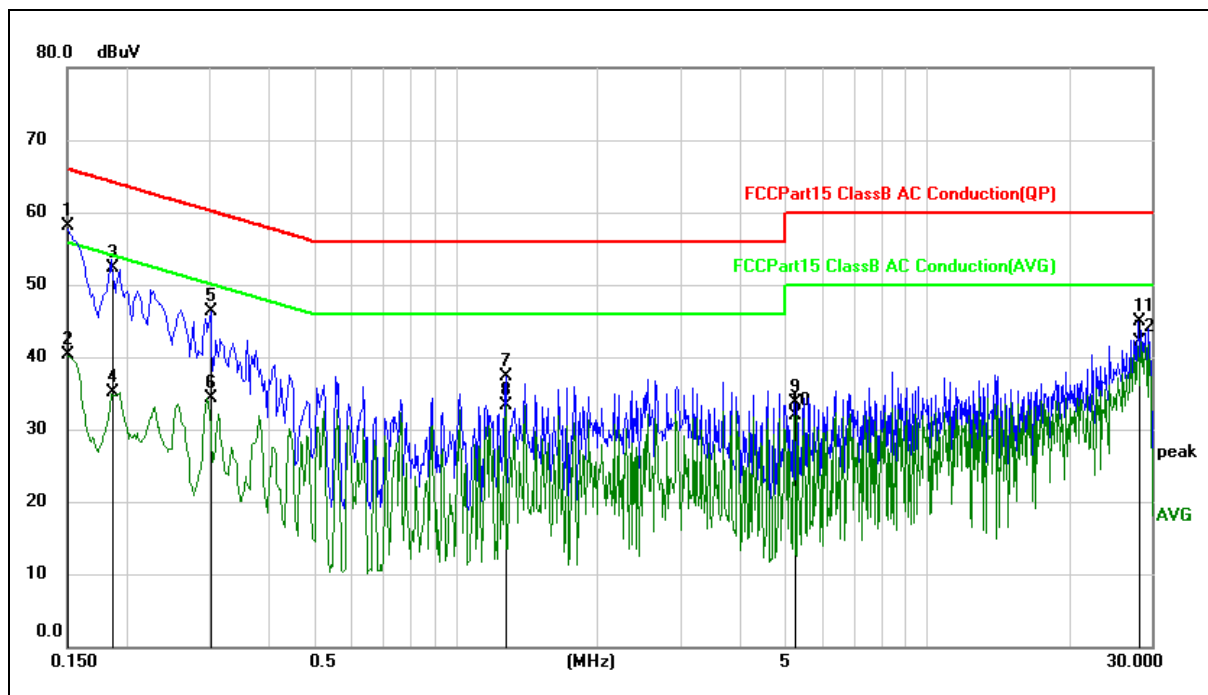

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1		0.1500	47.78	10.23	58.01	66.00	-7.99	QP	
2		0.1500	30.06	10.23	40.29	56.00	-15.71	AVG	
3		0.1864	42.17	10.23	52.40	64.20	-11.80	QP	
4		0.1864	24.90	10.23	35.13	54.20	-19.07	AVG	
5		0.3019	36.01	10.23	46.24	60.19	-13.95	QP	
6		0.3019	24.07	10.23	34.30	50.19	-15.89	AVG	
7		1.2780	27.12	10.21	37.33	56.00	-18.67	QP	
8		1.2780	23.09	10.21	33.30	46.00	-12.70	AVG	
9		5.2378	23.46	10.23	33.69	60.00	-26.31	QP	
10		5.2378	21.77	10.23	32.00	50.00	-18.00	AVG	
11		28.1100	34.62	10.27	44.89	60.00	-15.11	QP	
12	*	28.1100	31.82	10.27	42.09	50.00	-7.91	AVG	

5.3 Radiated emission

5.3.1 Limits

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

The limit for radiated test was performed according to FCC PART 15C.

The tighter limit applies at the band edges.

Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP

Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP
------------------------	----------------------------------


5.3.2 Test Procedures

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
- h. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

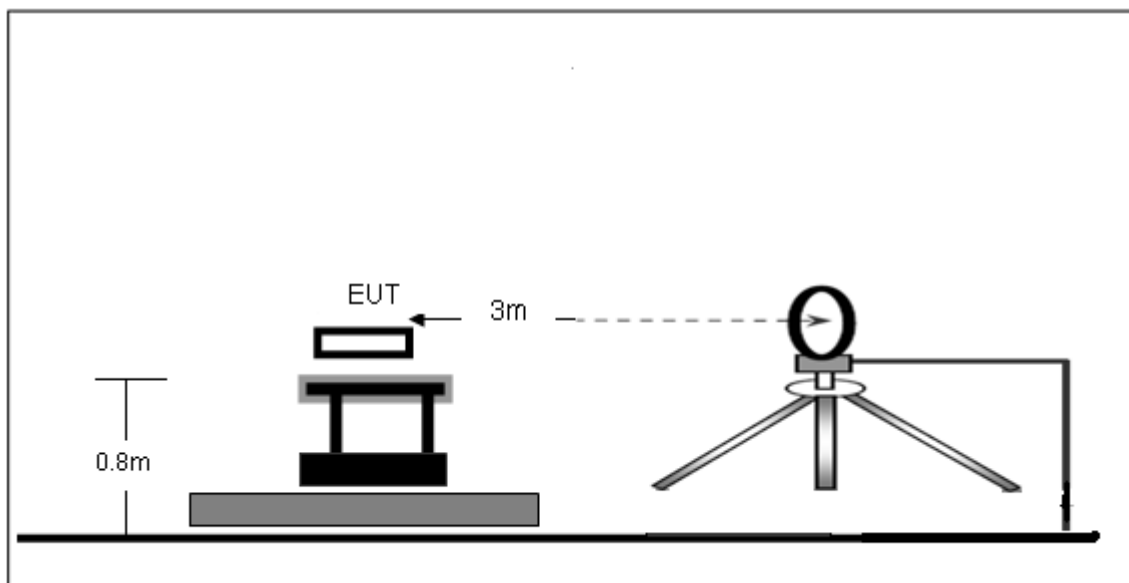

Radiated Emission Test-Up Frequency 30MHz~1GHz

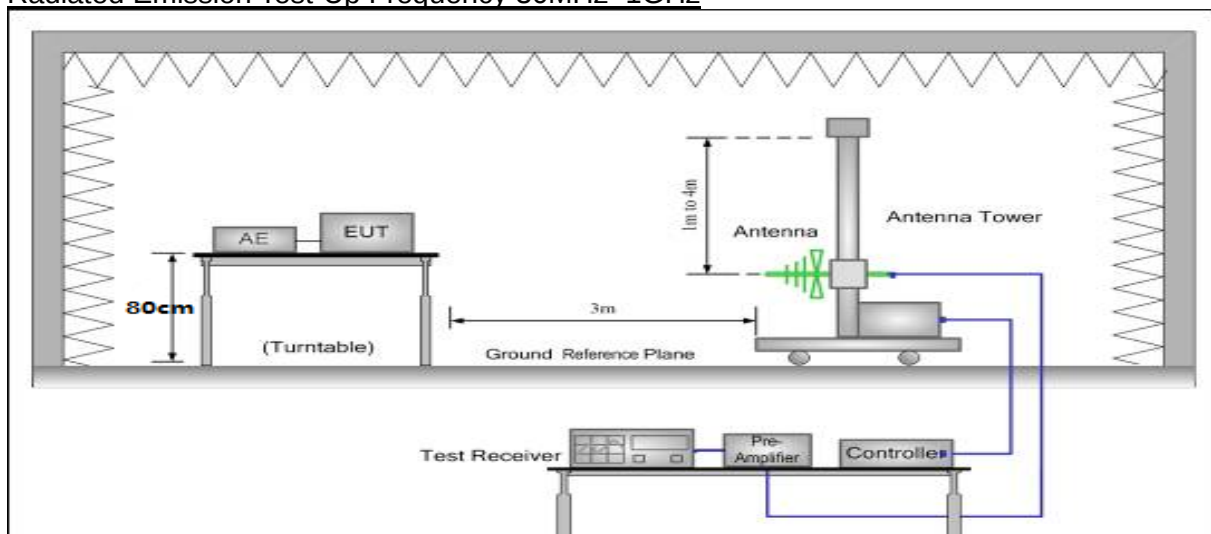


5.3.4 Test Result

Note: After a variety of mode tests, the result is that the three wireless charging emitters operate simultaneously with a voltage of 9V, with the worst results. After evaluation, the report only shows the worst mode.


Frequency range (9kHz – 30MHz)

Temperature:	23℃	Relative Humidity:	59%
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 9V from adapter AC 120V/60Hz		

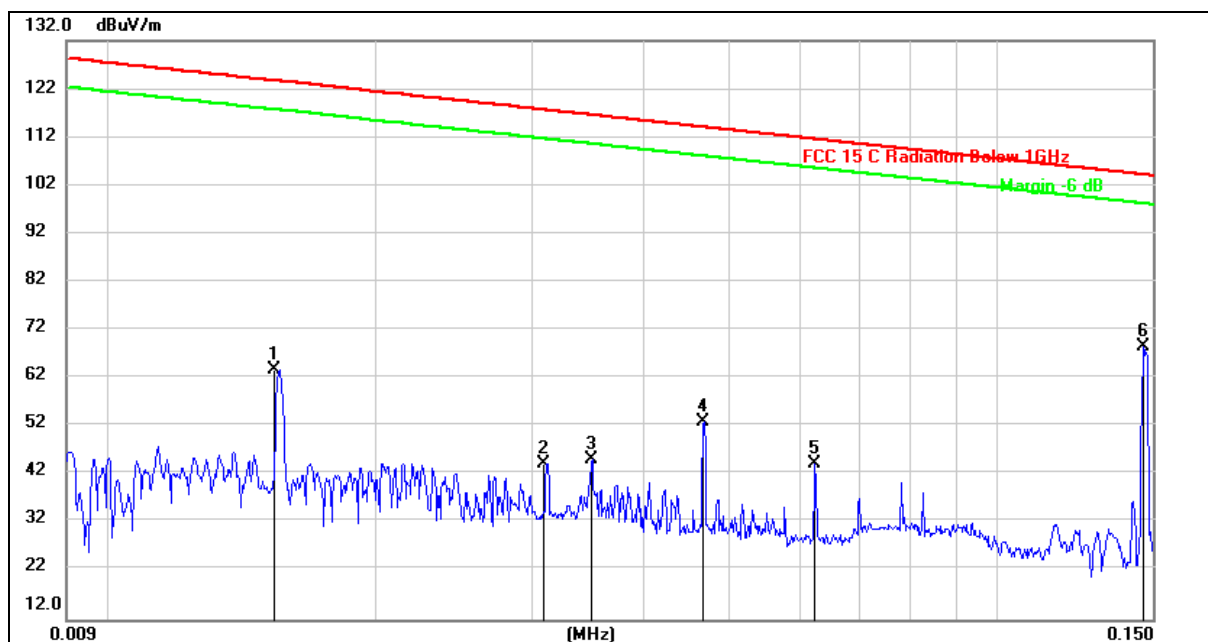

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		0.0154	43.08	20.62	63.70	123.69	-59.99	peak
2		0.0309	23.80	20.42	44.22	117.67	-73.45	peak
3		0.0350	24.63	20.42	45.05	116.59	-71.54	peak
4		0.0468	32.47	20.43	52.90	114.09	-61.19	peak
5		0.0625	23.69	20.43	44.12	111.59	-67.47	peak
6	*	0.1461	48.23	20.40	68.63	104.25	-35.62	peak


Temperature:	23℃	Relative Humidity:	59%
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 9V from adapter AC 120V/60Hz		

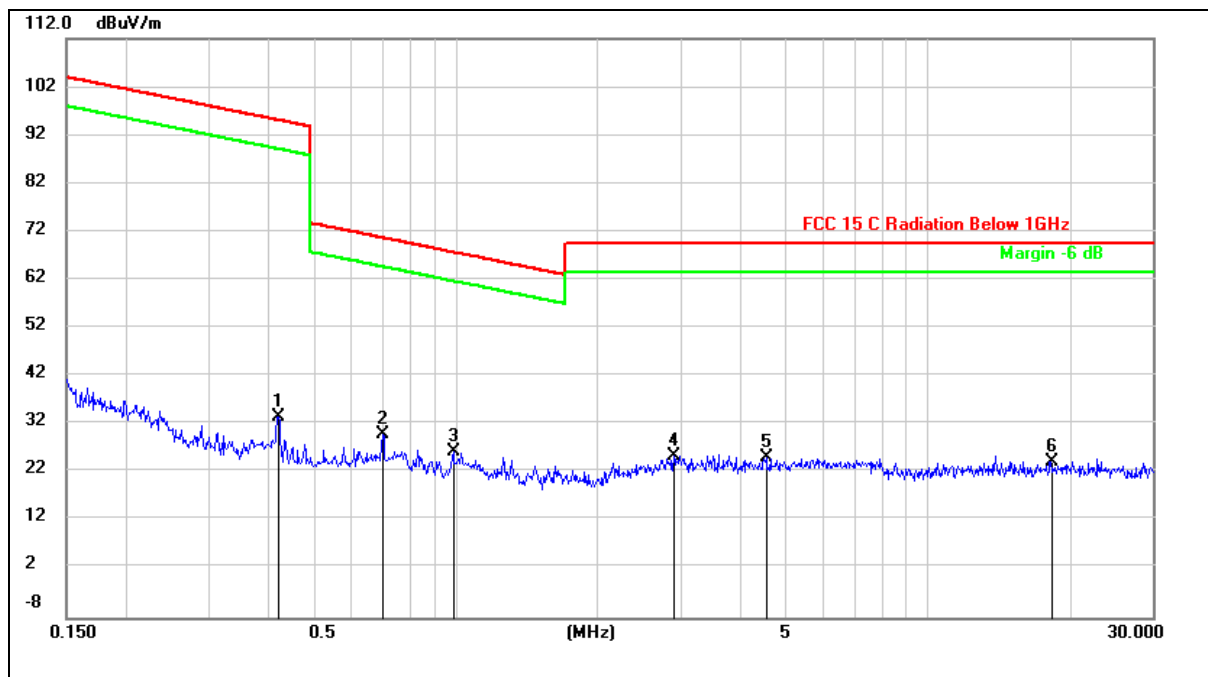

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.4193	13.35	20.31	33.66	95.15	-61.49	peak
2	*	0.7006	9.62	20.28	29.90	70.70	-40.80	peak
3		0.9889	5.97	20.26	26.23	67.72	-41.49	peak
4		2.8997	5.07	20.27	25.34	69.50	-44.16	peak
5		4.5494	4.82	20.31	25.13	69.50	-44.37	peak
6		18.2316	4.00	20.29	24.29	69.50	-45.21	peak


Frequency range (30MHz – 1GHz)

Temperature:	23℃	Relative Humidity:	59%
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

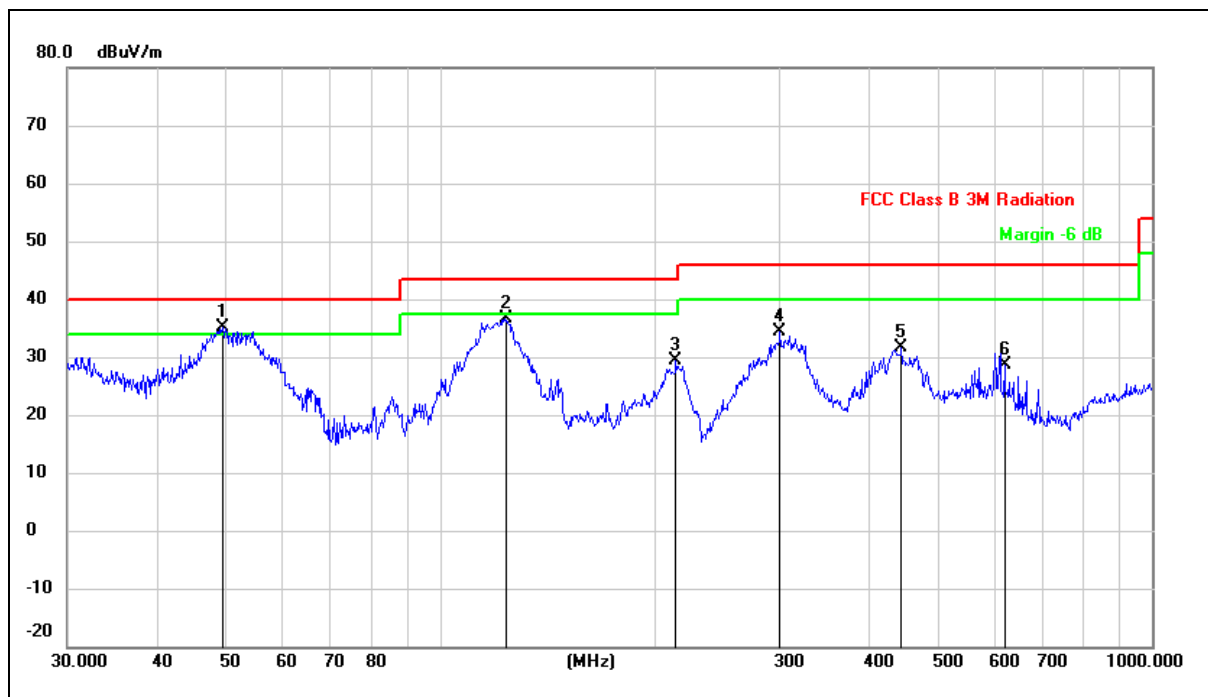

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	49.5328	44.79	-9.66	35.13	40.00	-4.87	QP
2		123.2655	49.16	-12.54	36.62	43.50	-6.88	QP
3		214.5141	39.73	-10.23	29.50	43.50	-14.00	QP
4		300.3672	42.08	-7.65	34.43	46.00	-11.57	QP
5		444.8514	37.61	-5.88	31.73	46.00	-14.27	QP
6		620.7096	33.64	-5.10	28.54	46.00	-17.46	QP

Temperature:	23℃	Relative Humidity:	59%
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

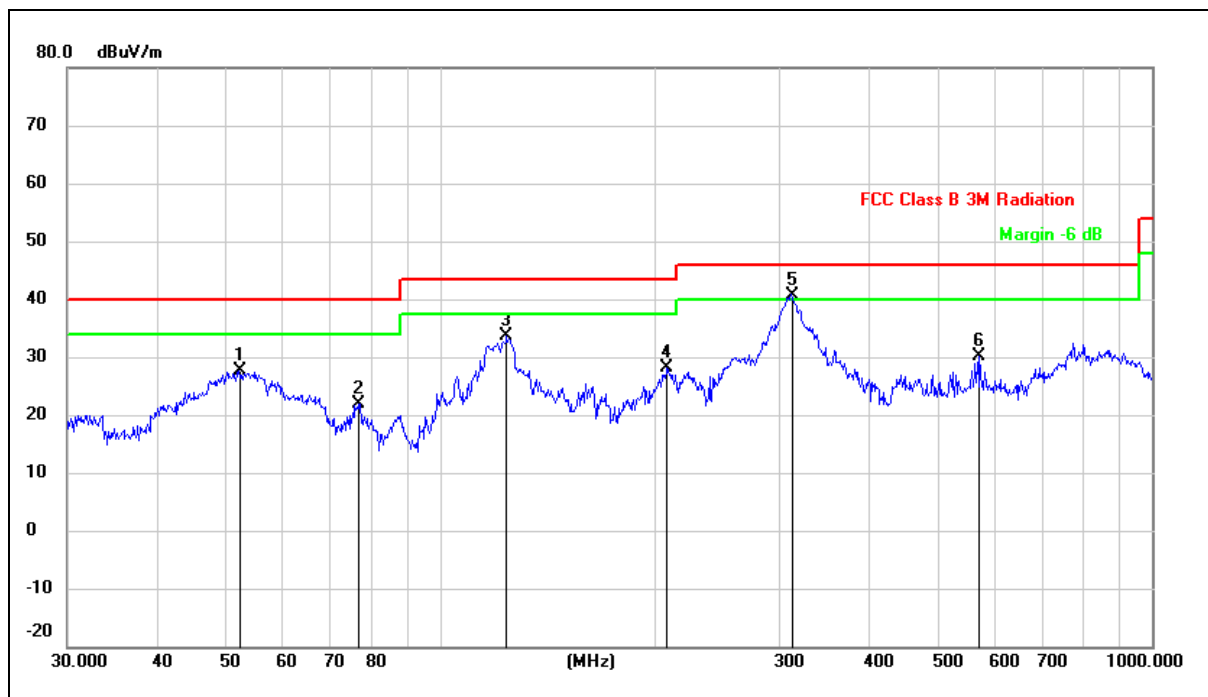

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		52.2079	37.72	-9.99	27.73	40.00	-12.27	QP
2		76.7806	36.92	-14.92	22.00	40.00	-18.00	QP
3		124.1329	47.31	-13.65	33.66	43.50	-9.84	QP
4		208.5800	39.63	-11.44	28.19	43.50	-15.31	QP
5	*	311.0867	49.15	-8.40	40.75	46.00	-5.25	QP
6		572.6144	35.31	-5.26	30.05	46.00	-15.95	QP

5.4 Occupied bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

5.4.2 Test result


Model	Frequency (kHz)	20dB emission bandwidth (kHz)	99% occupied bandwidth (kHz)
Left	138	8.114	6.887
Middle	148	8.094	6.872
Right	142	8.105	6.889

Test plots as below


Left:

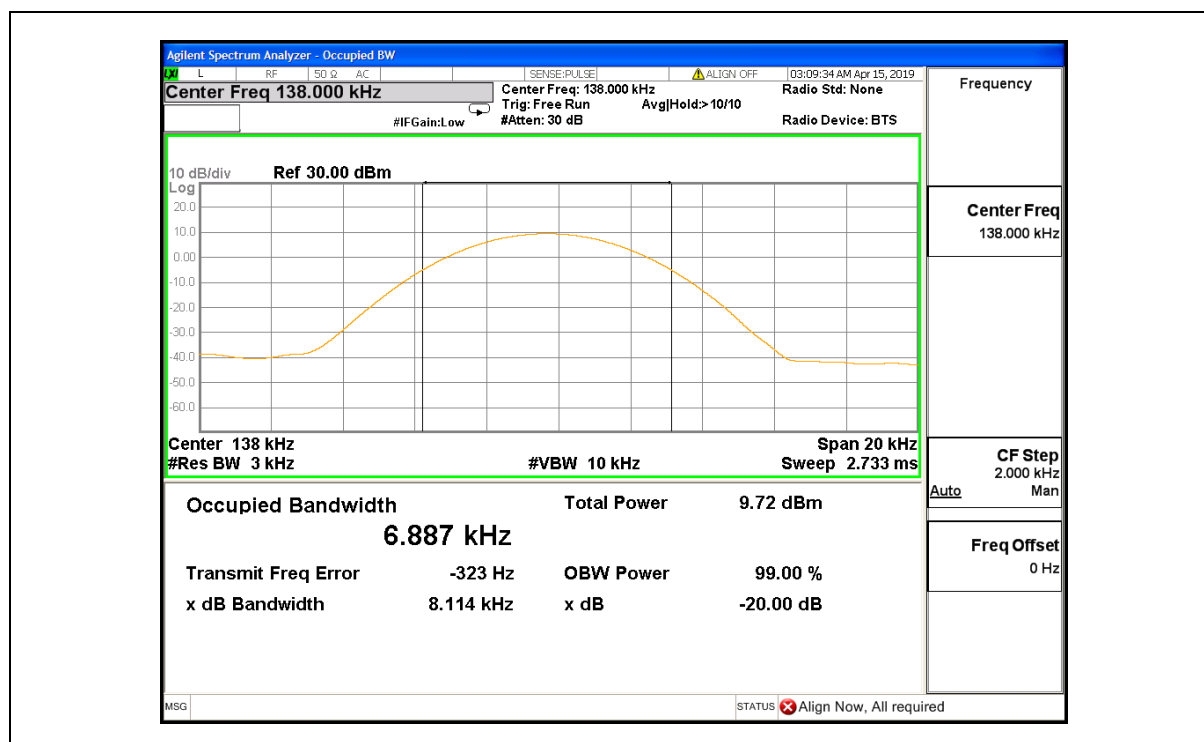

Middle:


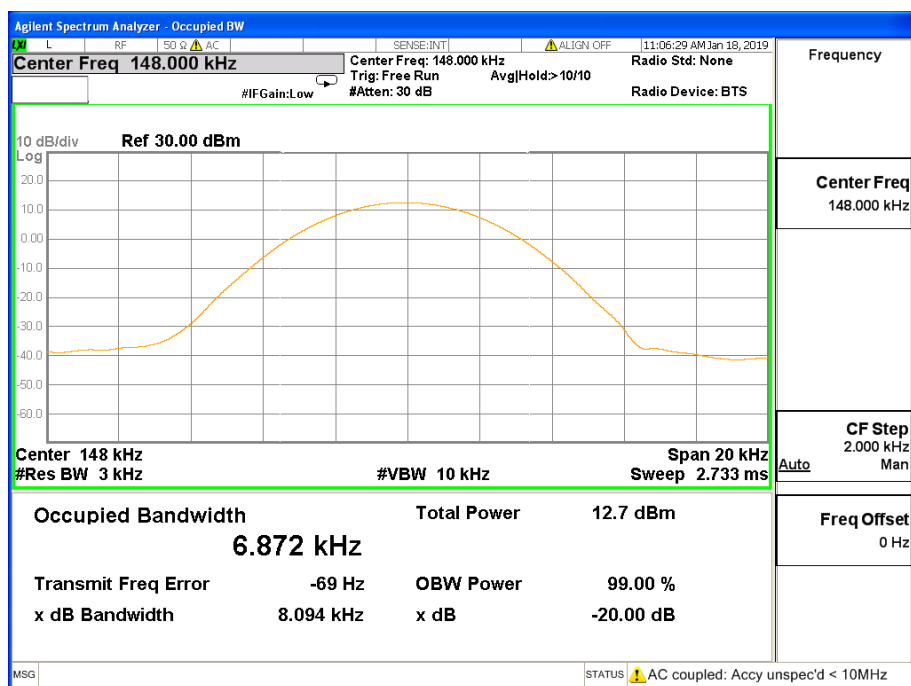


Right:

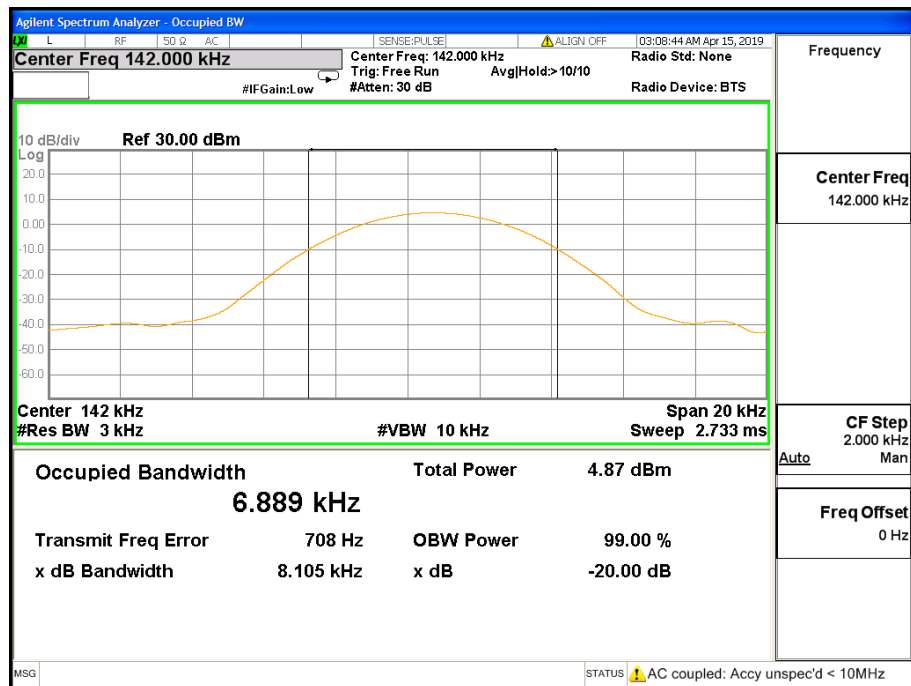

Photographs of the Test Setup

Radiated emission

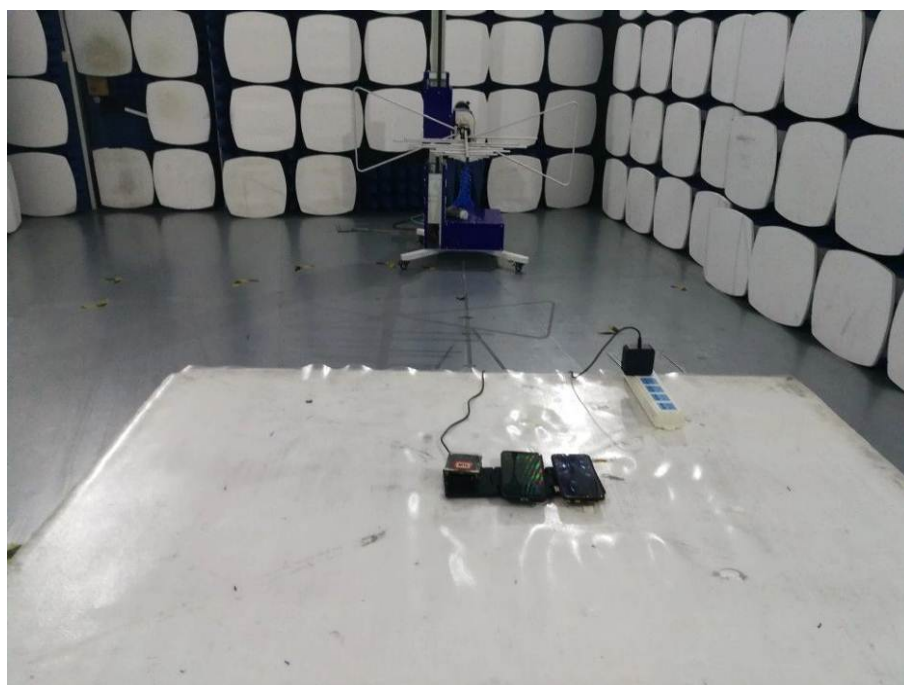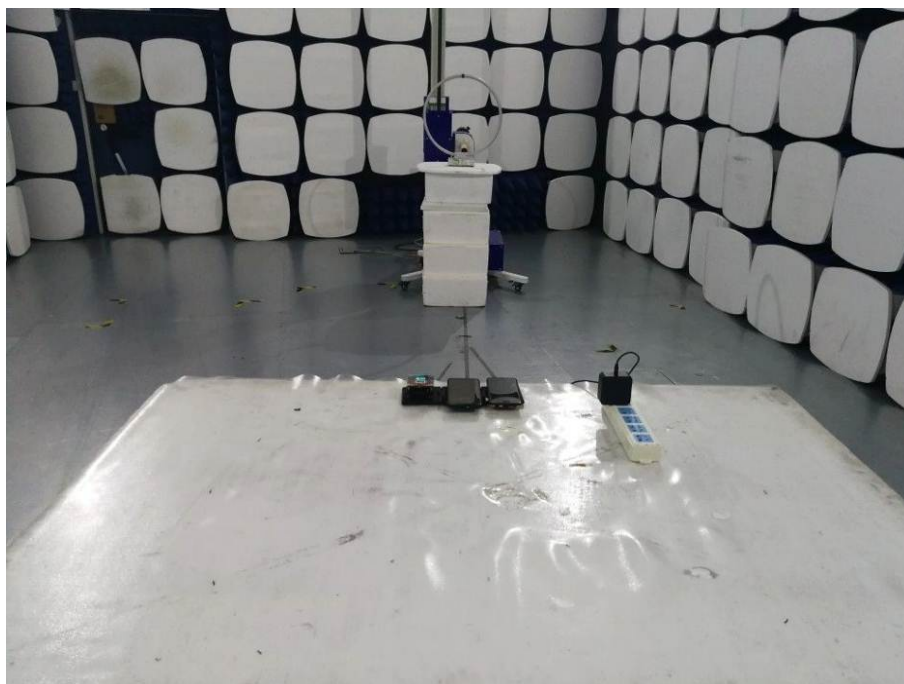

Conducted emission



Photographs of the EUT

See the APPENDIX 1: EUT PHOTO in the report No.: MTi190308E021-1.

----END OF REPORT----