

1 Compact 2.4 GHz PCB Antenna

1.1 Layout and Implementation

Small changes of the antenna dimensions may have large impact on the performance. Therefore it is strongly recommended to make an exact copy of the reference design to achieve optimum performance. The easiest way to implement the antenna is to import the gerber or DXF file showing the antenna layout. These files are named IFA_USB.spl and IFA_USB.dxf respectively and are included in the CC2511 USB dongle reference design available from <http://www.ti.com/lpw>. The imported file can be used as a template when drawing the antenna. By using this procedure it should be possible to make an exact copy. If the PCB CAD tool being used does not support import of DXF or gerber files, Figure 3 and Table 1 should be used to ensure correct implementation. It is recommended to generate a gerber file for comparison with IFA_USB.spl when making a manual implementation. Most gerber viewers have the possibility to import several gerber files at the same time. Thus by placing the gerber file, showing the manually implemented antenna, on top of IFA_USB.spl it is easy to verify that the antenna is correctly implemented. It is also recommended to use the same thickness and type of PCB material as used in the reference design. Information about the PCB can be found in a separate readme file included in the reference design. To compensate for a thicker/thinner PCB the antenna could be made slightly shorter/longer.

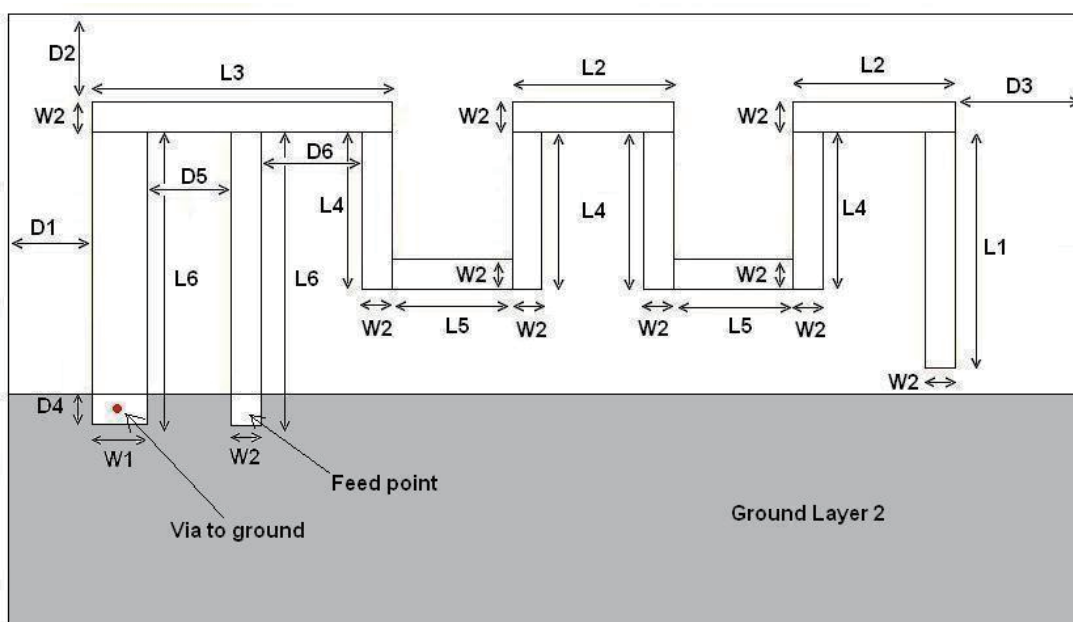


Figure 3: Antenna Dimensions

L1	3.94 mm
L2	2.70 mm
L3	5.00 mm
L4	2.64 mm
L5	2.00 mm
L6	4.90 mm
W1	0.90 mm
W2	0.50 mm
D1	0.50 mm
D2	0.30 mm
D3	0.30 mm
D4	0.50 mm
D5	1.40mm
D6	1.70 mm

Table 1: Antenna Dimensions

2 Compact 2.4 GHz PCB Antenna

2.1 2.40 GHz

OTA Evaluation Results (2.40 GHz)

Test Description	Test Result
Total Radiated Power	-1.96 dBm
Peak EIRP	2.67 dBm
Directivity	4.63 dBi
Efficiency	-1.96 dB
Efficiency	63.62 %
Peak Gain	2.67 dBi
NHPRP 45°	-3.81 dBm
NHPRP 45°/TRP	-1.85 dB
NHPRP 45°/TRP	65.30%
NHPRP 30°	-5.64 dBm
NHPRP 30°/TRP	-3.68 dB
NHPRP 30°/TRP	42.89%
NHPRP 22.5°	-6.91 dBm
NHPRP 22.5°/TRP	-4.95 dB
NHPRP 22.5°/TRP	32.00%
UHRP	-5.36 dBm
UHRP/TRP	-3.40 dB
UHRP/TRP	45.75%
LHRP	-4.62 dBm
LHRP/TRP	-2.66 dB
LHRP /TRP	54.25%
PGRP (0-120°)	-3.63 dBm
PGRP/TRP	-1.67 dB
PGRP/TRP	68.15%
Front/Back Ratio	4.81
PhiBW	91.1°
PhiBW Up	40.6°
PhiBW Down	50.6°
ThetaBW	30.3°
ThetaBW Up	13.8°
ThetaBW Down	16.5°
Boresight Phi	105°
Boresight Theta	150°
Maximum Power	2.67 dBm
Minimum Power	-12.21 dBm
Average Power	-1.78 dBm
Max/Min Ratio	14.88 dB
Max/Avg Ratio	4.44 dB
Min/Avg Ratio	-10.43 dB
Worst Single Value	-21.64 dBm
Worst Position	Azi = 255°; Elev = 105°; Pol = Horizontal
Best Single Value	2.23 dBm
Best Position	Azi = 0°; Elev = 135°; Pol = Vertical

RP_2400.000_tot


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-2.5	-0.68	-0.38	1.07	-0.99	-0.34	-0.22	-0.4	0.48	2.56	-1.49	-3.14	-1.66
15	-2.55	-0.78	0.25	0.38	-0.84	-2.53	-0.75	0.26	1.51	0.27	-1.64	-4	-2.28
30	-2.19	-0.99	0.08	-2.92	-1.64	-2	-2.55	-1	0.85	-2.25	-0.41	-4.67	-2.79
45	-1.89	-1.32	-2.06	-5.25	-5.92	-1.14	-0.15	-2.27	-4.67	1.22	-0.87	-3.81	-3.05
60	-1.99	-1.95	-4.15	-4.6	-4.77	-3.27	-1.14	-0.9	-2.2	1.6	-0.02	-2.48	-2.25
75	-2.05	-2.26	-4.2	-3.84	-1.9	-2.25	-4.79	-3.83	-0.83	0.28	1.55	-0.89	-1.7
90	-1.59	-2.37	-3.1	-3.37	-1.13	-1.98	-6.72	-10.4	-3.47	0.09	2.34	-0.29	-1.9
105	-1.57	-2.75	-2.13	-2.23	-1.44	-3.71	-7.59	-6.77	-5.35	0.21	2.67	-0.59	-1.78
120	-1.84	-3.35	-1.85	-1.68	-2.06	-4.25	-4.72	-3.15	-3.19	-0.19	2.36	-0.92	-1.16
135	-1.85	-3.23	-1.37	-1.32	-2.55	-3.47	-1.25	-0.55	-1.73	-1.11	1.04	-1.54	-1.1
150	-1.65	-2.82	-0.76	-0.81	-3.24	-3.58	-0.05	1.12	-1.4	-0.86	-0.91	-2.73	-1.27
165	-1.3	-2.12	-0.25	-0.4	-2.42	-5.47	-1.98	0.92	-3.48	0.41	-0.69	-4.1	-1.56
180	-1.36	-1.84	0.05	0.03	-0.21	-4.32	-4.97	-3.04	-4.11	-1.23	0.29	-4.61	-1.64
195	-1.98	-2.41	-0.7	-0.02	0.13	-2.6	-1.62	-3.47	-7.52	-8.79	-1.98	-4.17	-1.81
210	-2.29	-3.57	-2.15	-1.8	-1.31	-1.94	-1.2	-2.95	-7.6	-5.16	-7.24	-3.48	-2.37
225	-2.28	-4.34	-3.46	-6.77	-3.45	-4.22	-6.28	-6.83	-4.15	-2.95	-4.24	-3.82	-2.76
240	-2.35	-3.72	-3.81	-10.56	-5.55	-9.93	-8.66	-9.89	-6.3	-3.67	-1.41	-4.81	-2.22
255	-2.47	-3.06	-3.62	-9.29	-10.87	-7.9	-6.08	-8.95	-7.68	-4.53	-0.57	-5.35	-1.2
270	-2.89	-3.12	-3.26	-7.16	-12.21	-7.97	-8.29	-4.86	-2.51	-3.63	-0.64	-6.39	-0.71
285	-2.9	-2.97	-2.15	-4.74	-6.66	-9.42	-10.24	-4.57	-0.13	-1.36	-0.29	-6.3	-0.35
300	-2.26	-2.23	-0.83	-3.02	-3.19	-5.64	-6.22	-4.43	0.51	-0.15	0.54	-5.69	-0.28
315	-2.64	-1.47	0.26	-1.24	-0.66	-2.24	-2	-4.15	0.54	0.4	1.49	-5.31	-0.53
330	-2.59	-0.67	0.46	-0.82	1.08	-1.63	-0.4	-3.03	0.23	0.16	1.92	-4.43	-1.02
345	-2.64	-0.59	-0.17	-0.66	1.52	-1	-0.87	-1.99	0.67	0.87	1.18	-4.25	-1.39
360	-2.5	-0.68	-0.38	1.07	-0.99	-0.34	-0.22	-0.4	0.48	2.56	-1.49	-3.14	-1.66

RP_2400.000_hor


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-11.9	-12.18	-11.87	-14.98	-11.88	-15.6	-9.79	-9.21	-9.63	-8.75	-12.13	-15.08	-12.39
15	-7.9	-7.5	-10.68	-12.87	-14.55	-20.21	-14.17	-10.14	-7.36	-12.59	-9.27	-17.29	-8.81
30	-4.97	-5.24	-9.21	-14.34	-21.06	-14.65	-17.64	-15.47	-8.91	-10.17	-8.3	-8.5	-6.13
45	-3.2	-4.03	-7.4	-13.26	-13.73	-10.45	-10.76	-15.34	-12.3	-7.82	-4.39	-4.44	-3.93
60	-2.41	-3.63	-5.99	-8.23	-7.72	-9.42	-6.68	-13.49	-7.76	-4.51	-0.51	-2.57	-2.52
75	-2.18	-3.03	-4.47	-4.94	-3.42	-7.28	-11.15	-18.53	-6.27	-1.3	1.49	-1.38	-2.06
90	-2.19	-2.84	-3.41	-3.96	-2.37	-5.99	-13.97	-15.35	-6.82	0.01	1.88	-1.65	-2.6
105	-3.24	-3.7	-3.71	-4	-3.22	-6.95	-13.28	-17.4	-8.33	-0.43	1.25	-3.54	-3.73
120	-5.71	-5.68	-4.8	-5.23	-5.08	-9.64	-11.82	-14.26	-12.47	-2.37	-0.35	-6.35	-5.07
135	-8.92	-9.87	-6.3	-6.82	-8.25	-15.24	-9.39	-13.65	-20.01	-7.31	-3.74	-11.38	-7.14
150	-12.48	-17.16	-8.64	-8.25	-10.35	-14.99	-9.27	-13.78	-9.8	-13.87	-9.05	-17.63	-10.04
165	-19.23	-14.18	-13.95	-11.89	-9.85	-11.23	-11.51	-12.85	-9.45	-12.97	-10.7	-13.56	-13.8
180	-13.53	-8.92	-10.99	-9.61	-12.85	-10.05	-9.79	-13.04	-11.45	-17.7	-8.6	-10.28	-11.13
195	-9.01	-6.46	-5.2	-5.57	-10.58	-10.63	-11.9	-8.75	-13.39	-13.06	-9.48	-8.66	-6.93
210	-6.23	-6.02	-3.39	-5.29	-4.42	-8.11	-17.14	-9.7	-13.08	-7.64	-11.71	-7.69	-4.85
225	-4.19	-5.9	-3.9	-7.61	-3.76	-8.11	-13.2	-12.62	-7.71	-6.59	-6.81	-7.35	-3.7
240	-3.15	-4.96	-5.46	-11.92	-7.12	-11.08	-10.36	-13.93	-7.34	-5.82	-2.87	-7.05	-2.87
255	-2.67	-3.91	-5.66	-12.86	-16.41	-12.98	-10.6	-21.64	-14.7	-5.34	-0.97	-6.59	-2.26
270	-3.37	-3.66	-4.31	-9.71	-16.49	-14.9	-12.05	-12.98	-15.71	-5.75	-0.73	-7.09	-2.51
285	-4.41	-3.6	-3.24	-8.39	-13.16	-15.51	-12.65	-10.25	-10.06	-7.81	-1.51	-6.79	-3.31
300	-5.02	-3.68	-3.1	-9.44	-13.7	-16.45	-11.39	-9.26	-7.7	-11.05	-3.15	-6.69	-4.38
315	-7.33	-5.54	-5.09	-13.94	-14.88	-15.46	-10.78	-9.86	-6.87	-15.35	-5.35	-7.07	-6.76
330	-10.94	-9.08	-8.58	-20.15	-16.44	-11.66	-9.53	-10.4	-6.86	-14.51	-8.64	-6.37	-10.67
345	-18.91	-13.78	-14.44	-19.62	-16.03	-11.53	-6.68	-10.26	-7.98	-10.79	-17.66	-7.33	-16.81
360	-11.9	-12.18	-11.87	-14.98	-11.88	-15.6	-9.79	-9.21	-9.63	-8.75	-12.13	-15.08	-12.39

RP_2400.000_ver


Azimuth (deg)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-3.03	-1	-0.7	0.96	-1.36	-0.47	-0.73	-1.02	0.04	2.23	-1.88	-3.43	-2.04
15	-4.05	-1.82	-0.11	0.17	-1.03	-2.6	-0.96	-0.16	0.91	0.03	-2.46	-4.2	-3.37
30	-5.44	-3.03	-0.46	-3.24	-1.69	-2.24	-2.69	-1.16	0.36	-3.02	-1.19	-6.99	-5.5
45	-7.76	-4.65	-3.56	-6	-6.7	-1.68	-0.55	-2.49	-5.49	0.65	-3.43	-12.48	-10.4
60	-12.34	-6.88	-8.76	-7.07	-7.83	-4.48	-2.56	-1.14	-3.61	0.38	-9.71	-19.31	-14.45
75	-17.44	-10.14	-16.4	-10.32	-7.21	-3.89	-5.94	-3.98	-2.29	-4.89	-17.19	-10.63	-12.68
90	-10.47	-12.34	-14.75	-12.33	-7.21	-4.18	-7.63	-12.07	-6.16	-17.23	-7.67	-5.97	-10.13
105	-6.53	-9.81	-7.27	-6.96	-6.17	-6.5	-8.95	-7.16	-8.4	-8.4	-2.88	-3.65	-6.19
120	-4.13	-7.16	-4.92	-4.21	-5.06	-5.73	-5.67	-3.5	-3.74	-4.22	-0.96	-2.39	-3.42
135	-2.8	-4.29	-3.06	-2.75	-3.92	-3.76	-1.97	-0.77	-1.79	-2.3	-0.72	-2.01	-2.34
150	-2.02	-2.98	-1.53	-1.67	-4.18	-3.9	-0.61	0.98	-2.07	-1.08	-1.64	-2.88	-1.89
165	-1.37	-2.4	-0.44	-0.72	-3.29	-6.81	-2.49	0.74	-4.75	0.2	-1.14	-4.62	-1.83
180	-1.63	-2.79	-0.3	-0.47	-0.45	-5.67	-6.7	-3.5	-5	-1.33	-0.31	-5.98	-2.16
195	-2.94	-4.59	-2.61	-1.44	-0.25	-3.34	-2.05	-5	-8.82	-10.82	-2.83	-6.07	-3.41
210	-4.53	-7.23	-8.2	-4.37	-4.22	-3.13	-1.31	-3.99	-9.04	-8.78	-9.16	-5.56	-5.98
225	-6.77	-9.54	-13.55	-14.33	-15.07	-6.51	-7.27	-8.16	-6.68	-5.41	-7.74	-6.37	-9.85
240	-10.12	-9.78	-8.82	-16.27	-10.73	-16.26	-13.57	-12.07	-13.01	-7.75	-6.87	-8.76	-10.83
255	-15.86	-10.56	-7.89	-11.81	-12.29	-9.51	-7.98	-9.19	-8.64	-12.22	-11.2	-11.39	-7.86
270	-12.65	-12.4	-9.96	-10.69	-14.24	-8.96	-10.66	-5.59	-2.73	-7.76	-17.34	-14.63	-5.42
285	-8.22	-11.69	-8.68	-7.19	-7.77	-10.64	-13.95	-5.93	-0.6	-2.48	-6.42	-15.99	-3.4
300	-5.54	-7.72	-4.75	-4.14	-3.59	-6.02	-7.79	-6.16	-0.2	-0.51	-1.88	-12.54	-2.41
315	-4.45	-3.63	-1.24	-1.48	-0.83	-2.46	-2.61	-5.51	-0.33	0.28	0.48	-10.09	-1.72
330	-3.27	-1.35	-0.12	-0.87	1	-2.08	-0.96	-3.9	-0.72	0.01	1.53	-8.87	-1.52
345	-2.75	-0.8	-0.34	-0.72	1.44	-1.4	-2.19	-2.69	0.04	0.56	1.12	-7.19	-1.52
360	-3.03	-1	-0.7	0.96	-1.36	-0.47	-0.73	-1.02	0.04	2.23	-1.88	-3.43	-2.04

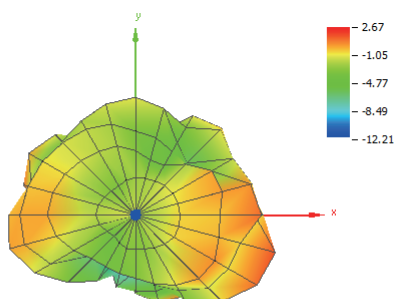


(2.40 GHz): Theta = 0, Phi = 0

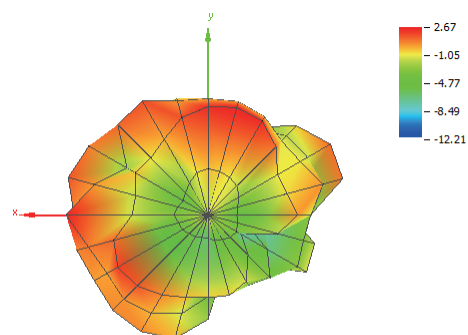


(2.40 GHz): Theta = 180, Phi = 0

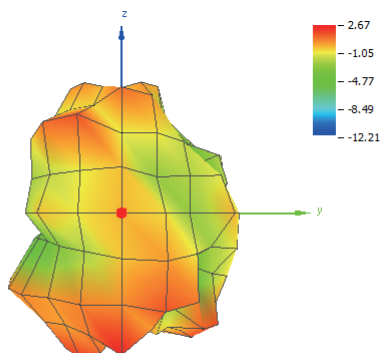


(2.40 GHz): Theta = 90, Phi = 0

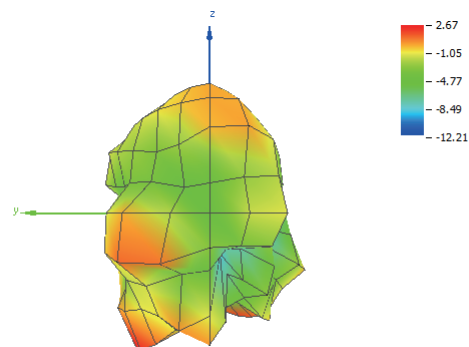

(2.40 GHz): Theta = 90, Phi = 180

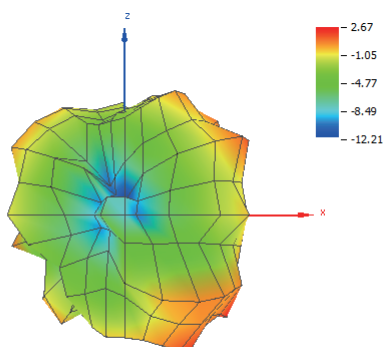

(2.40 GHz): Theta = 90, Phi = 270

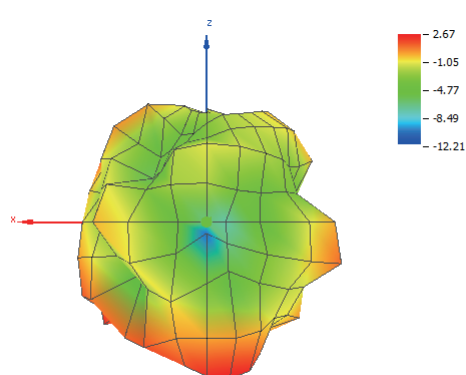

(2.40 GHz): Theta = 90, Phi = 90

2.2 2.44 GHz

OTA Evaluation Results (2.44 GHz)

Test Description	Test Result
Total Radiated Power	-2.06 dBm
Peak EIRP	2.78 dBm
Directivity	4.84 dBi
Efficiency	-2.06 dB
Efficiency	62.30 %
Peak Gain	2.78 dBi
NHPRP 45°	-4.02 dBm
NHPRP 45° / TRP	-1.96 dB
NHPRP 45° / TRP	63.68 %
NHPRP 30°	-5.85 dBm
NHPRP 30° / TRP	-3.80 dB
NHPRP 30° / TRP	41.71 %
NHPRP 22.5°	-7.15 dBm
NHPRP 22.5° / TRP	-5.09 dB
NHPRP 22.5° / TRP	30.97 %
UHRP	-5.52 dBm
UHRP / TRP	-3.47 dB
UHRP / TRP	45.03 %
LHRP	-4.65 dBm
LHRP / TRP	-2.60 dB
LHRP / TRP	54.97 %
PGRP (0-120°)	-3.80 dBm
PGRP / TRP	-1.74 dB
PGRP / TRP	66.93 %
Front/Back Ratio	7.63
PhiBW	121.5°
PhiBW Up	44.7°
PhiBW Down	76.8°
ThetaBW	43.3°
ThetaBW Up	29.8°
ThetaBW Down	13.6°
Boresight Phi	105°
Boresight Theta	150°
Maximum Power	2.78 dBm
Minimum Power	-14.52 dBm
Average Power	-1.66 dBm
Max/Min Ratio	17.30 dB
Max/Avg Ratio	4.44 dB
Min/Avg Ratio	-12.86 dB
Worst Single Value	-21.71 dBm
Worst Position	Azi = 270°; Elev = 60°; Pol = Horizontal
Best Single Value	2.13 dBm
Best Position	Azi = 90°; Elev = 150°; Pol = Horizontal

RP_2440.000_tot


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-1.86	-0.49	0.34	-0.59	-1.22	-0.73	-1.31	-2.79	-0.13	0.74	-1.68	-3.42	-1.74
15	-1.1	-0.49	-0.36	-0.85	-2.32	-3.69	-1.83	-1.46	-0.26	-1.59	-2.78	-2.69	-0.86
30	-0.57	-1.11	-0.43	-2.28	-1.8	-5.6	-4.21	-2.28	0.86	-5.91	0.14	-1.54	0
45	-0.61	-2.06	-0.64	-3.95	-2.39	-1.79	0.47	-2.79	-3.02	-0.5	1.35	-0.95	0.33
60	-1.16	-2.58	-1.52	-3.96	-3.36	-4	-1.47	0.66	-2.76	1.93	1.18	-0.79	0.69
75	-1.36	-3.04	-2.75	-3.19	-1.89	-3.6	-5.66	-1.29	-1.1	1.36	1.65	-0.58	0.13
90	-1.32	-3.67	-3.04	-2.24	-0.82	-3.28	-6.19	-7.42	-3.86	0.29	2.46	0	-0.51
105	-1.32	-4.1	-2.19	-1.72	-0.3	-3.89	-6.39	-10.85	-7.06	-0.54	2.78	0.26	-0.23
120	-0.74	-2.74	-1.22	-1.37	-0.21	-3.87	-4.48	-6.48	-5.73	-1.59	2.17	-0.21	-0.12
135	0.14	-1.68	-0.48	-0.48	-1.38	-3.37	-2.1	-1.5	-2.08	-1.78	0.78	-1.34	-0.45
150	0.35	-1.49	0.17	0.01	-2.34	-4.5	-1.8	0.63	-1.14	0.26	-0.24	-2.3	-0.66
165	-0.14	-1.37	0.01	0.65	-0.56	-5.51	-4.88	0.31	-2.82	1.04	0.41	-2.63	-0.29
180	-1.1	-1.9	-1.21	0.95	0.78	-3.34	-7	-5.56	-3.74	-2.36	0.02	-2.79	0.27
195	-2.02	-3.3	-2.92	-0.31	-0.65	-1.78	-1.37	-3.92	-8.37	-12.15	-3.74	-2.74	-0.36
210	-2.39	-3.95	-4.67	-3.64	-4.49	-3.12	-2.49	-2.26	-5.1	-4.04	-6.3	-2.98	-1.41
225	-2.79	-3.59	-5.41	-8.52	-5.87	-6.14	-9.92	-6.2	-2.75	-4.43	-1.99	-4.23	-1.38
240	-2.8	-3.28	-5.83	-6.47	-8.17	-5.48	-9.58	-11.13	-7.22	-4.5	0.04	-4.85	-1.07
255	-2.45	-2.79	-6.18	-5.83	-13.59	-6.61	-7.86	-10.24	-4.63	-2.7	0.39	-5.58	-0.67
270	-2.16	-2.05	-5.75	-6.76	-14.52	-7.6	-8.54	-4	-0.82	-1.89	0.51	-6.38	-0.46
285	-2.17	-2.07	-4.85	-5.59	-7.4	-8.09	-7.41	-2.32	0.49	-1.35	0.71	-7.15	-0.31
300	-2.55	-1.82	-2.58	-2.59	-4.68	-4.05	-4.34	-2.6	0.59	-0.94	1.22	-6.03	-0.01
315	-2.19	-1.18	-0.87	-1.49	-3.16	-0.83	-1.53	-2.52	0.28	-0.86	1.9	-4.55	0.02
330	-2.33	-1.03	0.18	-1.47	-1.43	-0.23	0.38	-2.78	0.19	-0.29	2.5	-3.58	-0.1
345	-2.66	-0.6	0.49	-1.71	0.01	-1.4	0.07	-1.85	0.8	0.15	2.21	-3.62	-0.73
360	-1.86	-0.49	0.34	-0.59	-1.22	-0.73	-1.31	-2.79	-0.13	0.74	-1.68	-3.42	-1.74

RP_2440.000_hor


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-10.99	-10.89	-10.33	-13.56	-10.94	-21.57	-10.78	-10.06	-10.04	-9.92	-13.64	-15.08	-12.31
15	-6.62	-6.88	-8.61	-11.39	-11.02	-18.3	-14.62	-9.8	-9.11	-13.17	-11.27	-16.67	-8.14
30	-3.57	-5.36	-8.03	-9.43	-17.2	-16.17	-15.26	-11.56	-9.72	-10.99	-8.84	-7.65	-3.92
45	-2.36	-4.86	-7	-9.41	-12.06	-13.79	-9.06	-9.56	-13.61	-7.56	-4.24	-3.48	-1.43
60	-1.88	-4.22	-5.07	-6.74	-6.75	-11.77	-10.06	-12.64	-8.77	-4.2	-0.29	-1.48	-0.35
75	-1.46	-3.73	-3.59	-3.8	-3.41	-8.41	-11.43	-17.22	-6.23	-1.06	1.59	-0.67	-0.5
90	-1.66	-4.2	-3.25	-2.91	-2.14	-7.16	-10.67	-12.26	-6.53	0.08	2.13	-0.93	-0.97
105	-2.7	-5.81	-3.32	-3.56	-2.44	-8.69	-12.83	-12.23	-8.35	-0.75	1.65	-2.07	-1.14
120	-4.2	-7.69	-3.97	-5.6	-4.41	-13.64	-16.13	-13.57	-14.02	-3.08	0.1	-4.14	-2.02
135	-6.36	-11.14	-5.92	-7	-9.57	-17.43	-13.96	-14.12	-14.09	-9.02	-3.21	-7.52	-3.82
150	-10.17	-19.52	-9.21	-8.51	-11.43	-12.17	-9.71	-12.97	-7.6	-20.12	-8.57	-14.51	-6.82
165	-15.82	-14.63	-11.12	-9.24	-9.27	-10.96	-10.09	-11.25	-7.16	-13.55	-11.97	-16.95	-10.38
180	-15.56	-9.46	-8.4	-6.73	-9.55	-11.08	-13.77	-12.29	-12.58	-16.59	-9.06	-10.7	-10.47
195	-11.32	-7.81	-5.66	-4.4	-7.78	-9.71	-10.95	-8.42	-15.01	-13.45	-9.2	-7.92	-7.96
210	-7.88	-6.96	-5.47	-4.99	-6.03	-7.75	-11.51	-10.02	-13.3	-7.88	-9.24	-6.97	-5.36
225	-5.39	-5.87	-7.85	-9.16	-6.21	-7.4	-17.22	-13.53	-8.45	-7.45	-4.94	-7.34	-3.14
240	-3.68	-4.57	-9.97	-15.24	-10.09	-9.52	-10.81	-16.23	-8.52	-5.83	-1.63	-7.71	-2
255	-2.64	-3.21	-7.99	-11.35	-17.36	-11.97	-8.98	-19.49	-12.12	-4.18	0.03	-7.49	-1.35
270	-2.45	-2.2	-6.06	-8.9	-21.71	-10.27	-9.21	-10.54	-12.47	-4.27	0.27	-6.87	-1.33
285	-3.15	-2.77	-6.09	-8.94	-20.44	-10.27	-8.42	-6.57	-8.93	-6.09	-0.37	-7.61	-2.38
300	-5.31	-4.2	-6.81	-9.86	-19.35	-9.41	-7.55	-5.4	-6.54	-9.23	-1.28	-7.48	-4.09
315	-7.15	-5.78	-7.79	-12.39	-19.96	-9.11	-6.69	-5.29	-6.09	-13.25	-3.31	-8	-6.61
330	-10.58	-10.47	-13.88	-17.17	-20.62	-9.59	-6.13	-7.66	-7.02	-15.15	-6.67	-8.45	-9.25
345	-17.38	-18.14	-19.73	-17.48	-17.95	-11.28	-6.3	-9.28	-8.29	-11.52	-14.78	-8.63	-12.73
360	-10.99	-10.89	-10.33	-13.56	-10.94	-21.57	-10.78	-10.06	-10.04	-9.92	-13.64	-15.08	-12.31

RP_2440.000_ver


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-2.43	-0.9	-0.04	-0.81	-1.71	-0.76	-1.83	-3.69	-0.59	0.35	-1.97	-3.72	-2.14
15	-2.53	-1.62	-1.06	-1.25	-2.95	-3.84	-2.07	-2.15	-0.87	-1.9	-3.44	-2.87	-1.77
30	-3.6	-3.15	-1.26	-3.21	-1.92	-5.99	-4.56	-2.82	0.46	-7.52	-0.45	-2.76	-2.25
45	-5.41	-5.28	-1.78	-5.41	-2.88	-2.08	-0.05	-3.82	-3.42	-1.45	-0.06	-4.51	-4.43
60	-9.31	-7.6	-4.04	-7.21	-6.01	-4.79	-2.11	0.45	-4.01	0.71	-4.22	-9.16	-6.02
75	-17.76	-11.36	-10.34	-12.02	-7.21	-5.35	-7	-1.4	-2.69	-2.34	-16.77	-17.63	-8.54
90	-12.6	-13.12	-16.32	-10.74	-6.63	-5.56	-8.1	-9.16	-7.24	-12.91	-8.89	-7.12	-10.53
105	-6.99	-8.98	-8.6	-6.34	-4.4	-5.64	-7.51	-16.49	-12.95	-13.87	-3.62	-3.56	-7.43
120	-3.34	-4.41	-4.5	-3.43	-2.29	-4.35	-4.79	-7.42	-6.42	-6.96	-2.03	-2.45	-4.61
135	-0.96	-2.2	-1.95	-1.57	-2.09	-3.54	-2.39	-1.74	-2.36	-2.68	-1.42	-2.54	-3.14
150	-0.06	-1.56	-0.37	-0.65	-2.92	-5.32	-2.57	0.44	-2.25	0.22	-0.93	-2.57	-1.87
165	-0.26	-1.58	-0.34	0.18	-1.19	-6.96	-6.43	-0.01	-4.81	0.89	0.15	-2.8	-0.73
180	-1.26	-2.74	-2.13	0.14	0.35	-4.14	-8.03	-6.6	-4.35	-2.52	-0.55	-3.56	-0.12
195	-2.57	-5.2	-6.23	-2.45	-1.59	-2.55	-1.88	-5.82	-9.44	-18.05	-5.19	-4.3	-1.19
210	-3.83	-6.95	-12.44	-9.36	-9.76	-4.96	-3.07	-3.06	-5.81	-6.36	-9.38	-5.19	-3.64
225	-6.26	-7.5	-9.08	-17.16	-17.11	-12.13	-10.82	-7.09	-4.11	-7.43	-5.07	-7.14	-6.17
240	-10.13	-9.19	-7.95	-7.09	-12.64	-7.65	-15.64	-12.74	-13.09	-10.3	-4.92	-8.01	-8.22
255	-16.09	-13.15	-10.86	-7.27	-15.96	-8.1	-14.28	-10.78	-5.48	-8.09	-10.57	-10.07	-9.04
270	-14.02	-16.99	-17.25	-10.85	-15.44	-10.97	-16.98	-5.08	-1.13	-5.64	-12.04	-16.06	-7.89
285	-9.11	-10.31	-10.89	-8.28	-7.62	-12.14	-14.24	-4.36	-0.04	-3.13	-5.86	-17.17	-4.53
300	-5.83	-5.56	-4.64	-3.49	-4.83	-5.54	-7.16	-5.83	-0.34	-1.64	-2.38	-11.5	-2.16
315	-3.87	-3.03	-1.86	-1.86	-3.25	-1.53	-3.11	-5.79	-0.86	-1.12	0.34	-7.16	-1.04
330	-3.03	-1.55	0	-1.59	-1.48	-0.77	-0.72	-4.49	-0.73	-0.43	1.94	-5.3	-0.67
345	-2.81	-0.67	0.45	-1.83	-0.06	-1.87	-1.07	-2.71	0.23	-0.16	2.12	-5.26	-1.01
360	-2.43	-0.9	-0.04	-0.81	-1.71	-0.76	-1.83	-3.69	-0.59	0.35	-1.97	-3.72	-2.14

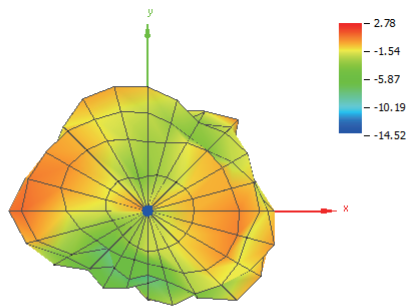


(2.44 GHz): Theta = 0, Phi = 0

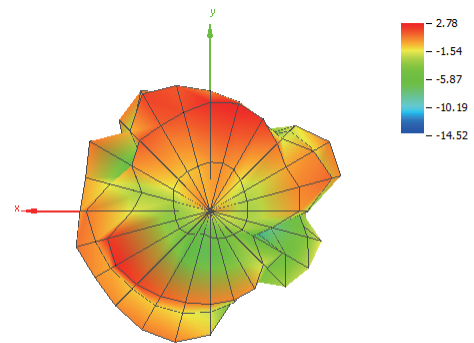


(2.44 GHz): Theta = 180, Phi = 0

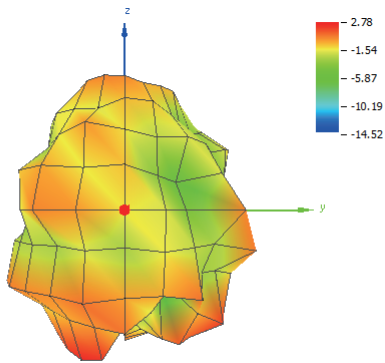


(2.44 GHz): Theta = 90, Phi = 0

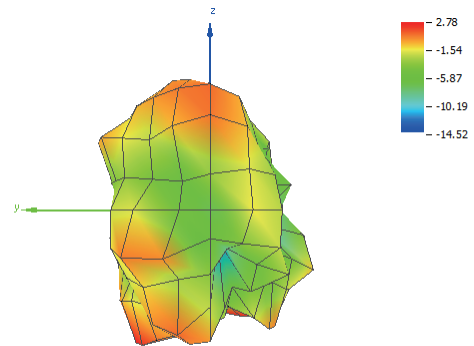

(2.44 GHz): Theta = 90, Phi = 180

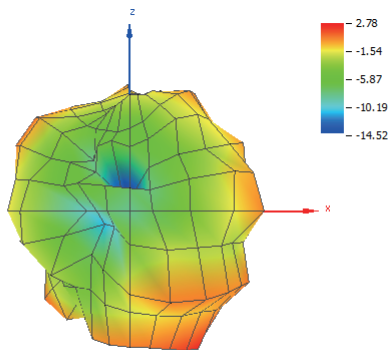

(2.44 GHz): Theta = 90, Phi = 270

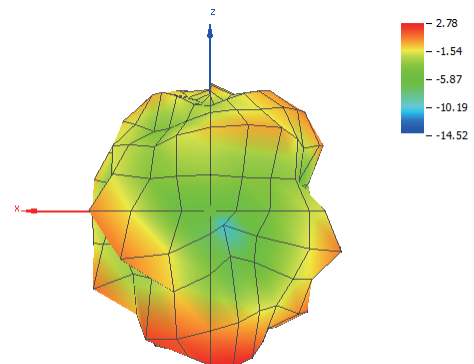

(2.44 GHz): Theta = 90, Phi = 90

2.3 2.48 GHz
OTA Evaluation Results (2.48 GHz)

Test Description	Test Result
Total Radiated Power	-1.46 dBm
Peak EIRP	3.14 dBm
Directivity	4.61 dBi
Efficiency	-1.46 dB
Efficiency	71.40 %
Peak Gain	3.14 dBi
NHPRP 45°	-3.25 dBm
NHPRP 45° / TRP	-1.79 dB
NHPRP 45° / TRP	66.24 %
NHPRP 30°	-4.94 dBm
NHPRP 30° / TRP	-3.48 dB
NHPRP 30° / TRP	44.88 %
NHPRP 22.5°	-6.14 dBm
NHPRP 22.5° / TRP	-4.68 dB
NHPRP 22.5° / TRP	34.06 %
UHRP	-4.17 dBm
UHRP / TRP	-2.71 dB
UHRP / TRP	53.56 %
LHRP	-4.79 dBm
LHRP / TRP	-3.33 dB
LHRP / TRP	46.44 %
PGRP (0-120°)	-2.75 dBm
PGRP / TRP	-1.29 dB
PGRP / TRP	74.30 %
Front/Back Ratio	3.40
PhiBW	80.0°
PhiBW Up	38.5°
PhiBW Down	41.4°
ThetaBW	90.4°
ThetaBW Up	60.4°
ThetaBW Down	30.0°
Boresight Phi	345°
Boresight Theta	30°
Maximum Power	3.14 dBm
Minimum Power	-13.65 dBm
Average Power	-1.21 dBm
Max/Min Ratio	16.79 dB
Max/Avg Ratio	4.35 dB
Min/Avg Ratio	-12.44 dB
Worst Single Value	-21.69 dBm
Worst Position	Azi = 345°; Elev = 60°; Pol = Horizontal
Best Single Value	3.12 dBm
Best Position	Azi = 345°; Elev = 30°; Pol = Vertical

RP_2480.000_tot


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	0.94	0.87	1.77	0.5	1.3	0.72	-2.49	-6.52	-2.66	0.16	-1.39	-2.06	-0.56
15	0.31	0.5	0.41	1.89	-0.44	0.93	0.3	-3.91	-2.35	0.43	-2.71	-1.17	-0.37
30	-0.53	-0.58	-0.06	2.31	1.06	-3.39	-1.6	0.83	1.16	-3.61	0.09	-1.18	-0.45
45	-1.44	-1.57	-0.58	-0.16	-0.75	-1.22	0.47	-0.3	-1.64	-0.6	1.07	-2.26	-0.19
60	-2.08	-2.57	-2.75	-2.29	-4.46	-2.92	-0.11	1.62	-4.16	2.12	0.1	-2.52	-0.65
75	-1.82	-3.5	-3.77	-3.1	-3.16	-3.64	-1.91	0.66	-0.85	1.33	0.19	-2.07	-1.64
90	-2.03	-4.06	-3.66	-3.38	-0.97	-1.43	-2.57	-2.63	-1.59	0.05	1.32	-1.19	-1.06
105	-2.02	-3.37	-3.12	-2.65	0.21	-1.12	-2.12	-3.92	-3.45	-0.89	1.94	-1.03	-0.66
120	-0.79	-3.06	-1.24	-0.66	0.24	-1.43	-0.57	-0.97	-3.03	-1.03	1.52	-1.41	-0.45
135	0.42	-2.6	0.01	0.27	-0.67	-1.76	0.41	0.98	-1.47	-0.66	0.2	-2.03	-0.08
150	0.65	-1.13	0.54	1.15	-1.68	-1.99	0.33	1.08	-2.22	0.29	-0.84	-2.83	0.76
165	0.02	-0.83	0.76	2.07	0.09	-1.9	-1.72	-1.66	-3.79	-0.16	-0.26	-3.29	1.27
180	-0.36	-1.55	0.09	2.56	1.65	-1	-2.73	-8.12	-4.47	-7.38	-0.47	-4.54	0.69
195	-0.44	-2.15	-1.84	1.86	0.56	0.44	0.49	-2.69	-10.46	-8.05	-4.02	-4.7	-0.23
210	-1.19	-2.57	-3.12	-1.34	-2.7	-0.39	-2.68	-4.85	-3.47	-2.95	-6.22	-4.88	-0.88
225	-1.65	-2.93	-3.19	-5.76	-5.85	-5.56	-10.96	-8.92	-3.32	-4.7	-1.65	-5.23	-1.31
240	-1.83	-3.03	-3.42	-4.74	-10.8	-4.79	-6.28	-13.26	-7.18	-4.19	-0.18	-6.04	-1.26
255	-1.84	-3.43	-3.77	-3.14	-13.65	-4.87	-9.47	-9.24	-3.99	-2.43	-0.53	-7.23	-1.37
270	-1.79	-3.44	-2.82	-3.68	-9.11	-8.95	-10.88	-5.89	-0.97	-2.11	-0.39	-7.28	-0.8
285	-1.15	-2.59	-1.54	-3.24	-5.42	-7.49	-6.36	-4.62	-0.11	-2.74	0.27	-6.41	-0.5
300	-0.43	-2.2	-0.18	-1.61	-3.97	-3.29	-3.96	-4.74	-0.25	-2.71	1.03	-5.68	-0.26
315	0.03	-0.97	1.2	0.08	-2.72	-0.73	-2.53	-4.95	-0.54	-2.54	1.49	-5.29	-0.4
330	0.93	0.34	2.66	1.4	-1.36	1.33	-0.25	-6.21	-1.65	-2.79	1.68	-4.74	-1.02
345	1.35	1.18	3.14	1.09	0.33	1.02	0.35	-6.65	-2.42	-2.86	1.31	-3.77	-1.13
360	0.94	0.87	1.77	0.5	1.3	0.72	-2.49	-6.52	-2.66	0.16	-1.39	-2.06	-0.56

RP_2480.000_hor


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	-10.89	-12.83	-10.51	-13.66	-9.52	-13.86	-10.31	-10.16	-12.09	-6.57	-12.85	-11.29	-17.12
15	-8.29	-8.35	-8.05	-11	-8.49	-14.74	-13.75	-7.35	-9.65	-7.11	-9.99	-19.9	-10.72
30	-6.26	-5.83	-6.11	-8.58	-13.28	-20.37	-15.62	-8.47	-6.45	-7.01	-9.9	-11.26	-5.78
45	-4.55	-4.28	-5.36	-8.28	-10.27	-12.66	-12.69	-9.59	-8.83	-6.36	-7.13	-6.29	-3.64
60	-2.88	-3.42	-4.73	-6.34	-7.22	-7.22	-9.69	-16.47	-8.34	-5.11	-2.62	-3.34	-2.7
75	-2	-3.69	-4.13	-4.39	-4.5	-5.67	-7.05	-15.62	-6.69	-2.61	-0.12	-2.21	-2.5
90	-2.47	-4.77	-3.99	-3.64	-2.09	-4.27	-8.43	-10.7	-7.15	-1.1	1.12	-2.16	-1.76
105	-3.73	-5.9	-4.93	-4.85	-2.15	-4.83	-10.33	-11.4	-8.13	-1.41	1.05	-2.91	-1.38
120	-4.23	-8.58	-6.22	-5.88	-4.84	-8.08	-13.09	-15.62	-13.62	-4.19	-0.93	-4.56	-2.06
135	-5.12	-13.96	-7.62	-7.34	-8.11	-18.45	-15.73	-16.49	-14.51	-10.31	-5.25	-7.24	-3.88
150	-8.44	-21.41	-10.59	-11.08	-10.55	-11.47	-12.78	-13.08	-8.6	-18.04	-12.29	-11.46	-7.06
165	-15.31	-12.71	-12.28	-9.63	-11.46	-8.76	-10.03	-8.87	-8.66	-14.21	-13.27	-14.62	-10.93
180	-19.91	-8.65	-6.87	-4.65	-10.54	-14.75	-14.09	-11.7	-13.08	-21.08	-10.1	-12.4	-15.77
195	-11.54	-7.27	-4.49	-2.67	-5.34	-7.68	-19.06	-11.96	-17.25	-12.61	-10.73	-9.61	-11.24
210	-6.82	-6.39	-4.62	-3.28	-3.8	-5.35	-11.17	-9.47	-11.55	-8.92	-11.1	-8.17	-6.33
225	-4.14	-5.41	-6.21	-6.53	-6.78	-6.26	-12.33	-11.64	-8.06	-7.87	-5.79	-7.72	-3.67
240	-2.66	-4.26	-6.39	-8.81	-16.08	-10.58	-16.05	-14.86	-10.88	-5.61	-2.29	-8.26	-1.97
255	-2.01	-3.88	-4.79	-5.79	-16.65	-17.76	-15.71	-20.65	-14.51	-4.56	-1.07	-9.17	-1.56
270	-2.03	-3.58	-3.24	-3.98	-11.99	-10.94	-14.78	-12.48	-12.7	-4.71	-0.94	-8.18	-1.2
285	-2.21	-3.25	-2.42	-4.12	-10.02	-8.83	-11.56	-7.19	-9.24	-5.74	-1.69	-7.02	-1.76
300	-3.16	-4.84	-3.71	-5.5	-11.34	-8.88	-9.6	-5.61	-6.65	-8.43	-2.7	-7.78	-3.25
315	-5.47	-6.76	-5.82	-8.94	-13.69	-10.26	-8.98	-6.13	-5.98	-11.79	-4.2	-8.32	-5.28
330	-9.09	-10.37	-9.47	-16.66	-18.1	-12.57	-7.56	-8.9	-7.71	-13.33	-7.34	-9.78	-9.26
345	-15.06	-16.35	-20.36	-20.65	-21.69	-12.06	-8.03	-12.82	-10.16	-10.77	-14.4	-9.29	-13.91
360	-10.89	-12.83	-10.51	-13.66	-9.52	-13.86	-10.31	-10.16	-12.09	-6.57	-12.85	-11.29	-17.12

RP_2480.000_ver


Azimuth (°)	0° (dB)	15° (dB)	30° (dB)	45° (dB)	60° (dB)	75° (dB)	90° (dB)	105° (dB)	120° (dB)	135° (dB)	150° (dB)	165° (dB)	180° (dB)
0	0.65	0.68	1.51	0.33	0.93	0.57	-3.28	-8.99	-3.19	-0.88	-1.72	-2.61	-0.65
15	-0.34	-0.11	-0.26	1.66	-1.18	0.81	0.13	-6.53	-3.25	-0.41	-3.61	-1.23	-0.79
30	-1.89	-2.12	-1.3	1.94	0.9	-3.48	-1.78	0.28	0.33	-6.26	-0.37	-1.63	-1.96
45	-4.34	-4.9	-2.34	-0.88	-1.26	-1.54	0.26	-0.84	-2.56	-1.94	0.36	-4.44	-2.8
60	-9.84	-10.08	-7.09	-4.46	-7.73	-4.94	-0.62	1.55	-6.26	1.21	-3.21	-10.14	-4.9
75	-15.69	-17.31	-14.83	-9	-8.93	-7.92	-3.49	0.56	-2.16	-0.92	-11.44	-17.05	-9.12
90	-12.21	-12.28	-14.93	-15.78	-7.41	-4.63	-3.87	-3.36	-3.01	-6.3	-12.26	-8.16	-9.36
105	-6.9	-6.91	-7.8	-6.65	-3.57	-3.53	-2.83	-4.77	-5.26	-10.34	-5.4	-5.57	-8.81
120	-3.41	-4.49	-2.9	-2.22	-1.37	-2.49	-0.82	-1.12	-3.43	-3.89	-2.13	-4.29	-5.53
135	-1	-2.93	-0.82	-0.56	-1.54	-1.85	0.31	0.9	-1.69	-1.15	-1.26	-3.58	-2.42
150	0.08	-1.17	0.19	0.88	-2.29	-2.51	0.12	0.91	-3.35	0.23	-1.16	-3.47	-0.02
165	-0.11	-1.12	0.54	1.76	-0.23	-2.9	-2.42	-2.58	-5.5	-0.34	-0.48	-3.63	1
180	-0.4	-2.49	-0.88	1.65	1.37	-1.18	-3.06	-10.64	-5.11	-7.57	-0.97	-5.32	0.59
195	-0.79	-3.74	-5.24	-0.02	-0.73	-0.29	0.44	-3.24	-11.49	-9.93	-5.07	-6.38	-0.59
210	-2.58	-4.9	-8.45	-5.76	-9.21	-2.07	-3.34	-6.69	-4.21	-4.22	-7.93	-7.63	-2.34
225	-5.25	-6.55	-6.2	-13.63	-13.01	-13.85	-16.62	-12.25	-5.1	-7.55	-3.76	-8.84	-5.08
240	-9.42	-9.11	-6.47	-6.9	-12.33	-6.12	-6.76	-18.36	-9.6	-9.75	-4.32	-10.02	-9.47
255	-16.02	-13.55	-10.57	-6.54	-16.67	-5.1	-10.65	-9.56	-4.39	-6.55	-9.86	-11.65	-15.01
270	-14.41	-18.41	-13.19	-15.41	-12.25	-13.31	-13.15	-6.96	-1.27	-5.56	-9.67	-14.57	-11.42
285	-7.78	-11.12	-8.91	-10.59	-7.27	-13.24	-7.92	-8.11	-0.67	-5.75	-4.14	-15.19	-6.48
300	-3.73	-5.62	-2.73	-3.9	-4.84	-4.7	-5.34	-12.18	-1.37	-4.06	-1.36	-9.84	-3.3
315	-1.41	-2.3	0.24	-0.5	-3.08	-1.24	-3.64	-11.18	-2.01	-3.09	0.12	-8.28	-2.1
330	0.47	-0.05	2.38	1.33	-1.45	1.15	-1.15	-9.57	-2.89	-3.19	1.1	-6.37	-1.72
345	1.25	1.1	3.12	1.06	0.3	0.8	-0.33	-7.85	-3.22	-3.62	1.2	-5.2	-1.36
360	0.65	0.68	1.51	0.33	0.93	0.57	-3.28	-8.99	-3.19	-0.88	-1.72	-2.61	-0.65

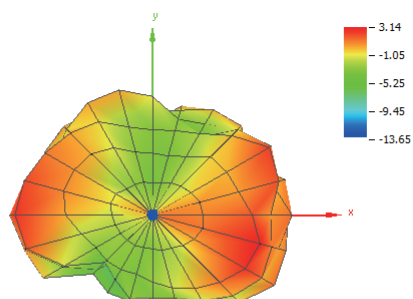


(2.48 GHz): Theta = 0, Phi = 0

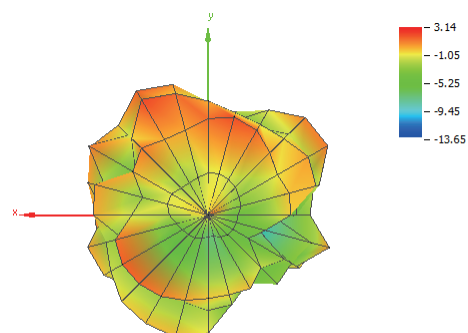


(2.48 GHz): Theta = 180, Phi = 0

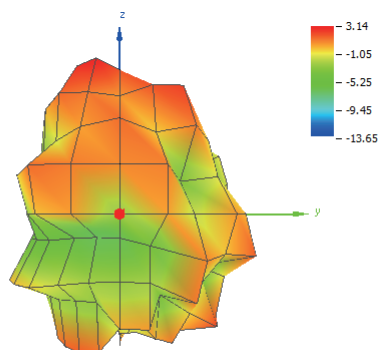


(2.48 GHz): Theta = 90, Phi = 0

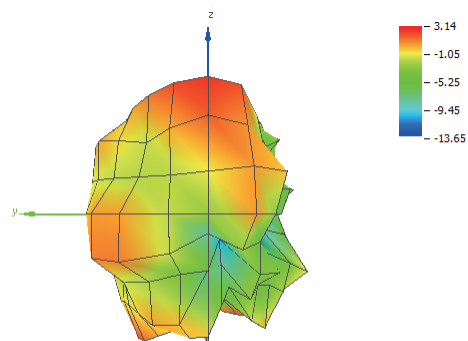

(2.48 GHz): Theta = 90, Phi = 180

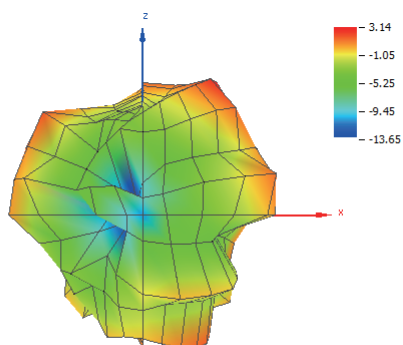

(2.48 GHz): Theta = 90, Phi = 270

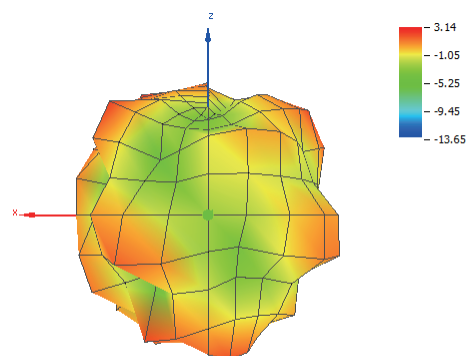

(2.48 GHz): Theta = 90, Phi = 90

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless