



# FCC TEST REPORT

**Test report  
On Behalf of  
Zhejiang Balma Lock Co., Ltd.  
For  
Rental houses (rooms) smart lock  
Model No.: G-001C, S-001C, C-001C**

**FCC ID: 2ASQW-G-001C**

**Prepared for : Zhejiang Balma Lock Co., Ltd.  
Pudong Industrial Area, Pujiang, Zhejiang, China**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China**

**Date of Test: Mar. 05, 2019 ~ Mar. 12, 2019  
Date of Report: Mar. 12, 2019  
Report Number: HK1903050465-2E**



## TEST RESULT CERTIFICATION

**Applicant's name** ..... Zhejiang Balma Lock Co., Ltd.

Address ..... Pudong Industrial Area, Pujiang, Zhejiang, China

**Manufacture's Name** ..... Zhejiang Balma Lock Co., Ltd.

Address ..... Pudong Industrial Area, Pujiang, Zhejiang, China

### Product description

Trade Mark: N/A

Product name ..... Rental houses (rooms) smart lock

Model and/or type reference : G-001C, S-001C, C-001C

**Standards** ..... FCC Rules and Regulations Part 15 Subpart C Section 15.225  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....

Date (s) of performance of tests ..... Mar. 05, 2019 ~ Mar. 12, 2019

Date of Issue ..... Mar. 12, 2019

Test Result ..... **Pass**

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)



## **TABLE OF CONTENTS**

<b>1. Test Result Summary .....</b>	<b>4</b>
1.1. TEST FACILITY .....	4
1.2. MEASUREMENT UNCERTAINTY .....	4
<b>2. EUT Description .....</b>	<b>5</b>
<b>3. Genera Information .....</b>	<b>6</b>
3.1. TEST ENVIRONMENT AND MODE.....	6
3.2. DESCRIPTION OF SUPPORT UNITS .....	6
<b>4. Test Results and Measurement Data .....</b>	<b>7</b>
4.1. ANTENNA REQUIREMENT .....	7
4.2. CONDUCTED EMISSION .....	8
4.3. RADIATED EMISSION MEASUREMENT.....	9
4.4. OCCUPIED BANDWIDTH.....	15
4.5. FREQUENCY STABILITY .....	17
<b>5. Photographs of Test Setup .....</b>	<b>19</b>
<b>6. PHOTOGRAPH OF TEST .....</b>	<b>20</b>



## 1. Test Result Summary

Requirement	CFR 47 Section	Result
Conduction Emission, 0.15MHz to 30MHz	§15.207	N/A
Radiation Emission	§15.225, §15.205, §15.209, §15.35	PASS
Occupied Bandwidth	§ 15.215	PASS
Antenna requirement	§ 15.203	PASS
Frequency stability	§ 15.225	PASS

**Note:**

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

### 1.1. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

### 1.2. MEASUREMENT UNCERTAINTY

#### Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



## 2. EUT Description

Equipment	Rental houses (rooms) smart lock
Model Name	G-001C
Serial No	S-001C, C-001C
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: G-001C.
Trade Mark	N/A
FCC ID	<b>2ASQW-G-001C</b>
Antenna Type	Internal Antenna
Antenna Gain	0 dBi
BT Operation frequency	13.56MHz
Modulation Type	ASK
Power Source	DC 4.5V
Power Rating	DC 4.5V



### 3. General Information

#### 3.1. Test Environment and Mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test Mode:</b>	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

<b>Per-test mode.</b>				
We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:				
Axis	X	Y	Z	
Field Strength(dBuV/m)	62.47	65.62	62.59	
<b>Final Test Mode:</b>				
According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup": Y axis (see the test setup photo)				

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

##### **Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4. Test Results and Measurement Data

### 4.1. Antenna Requirement
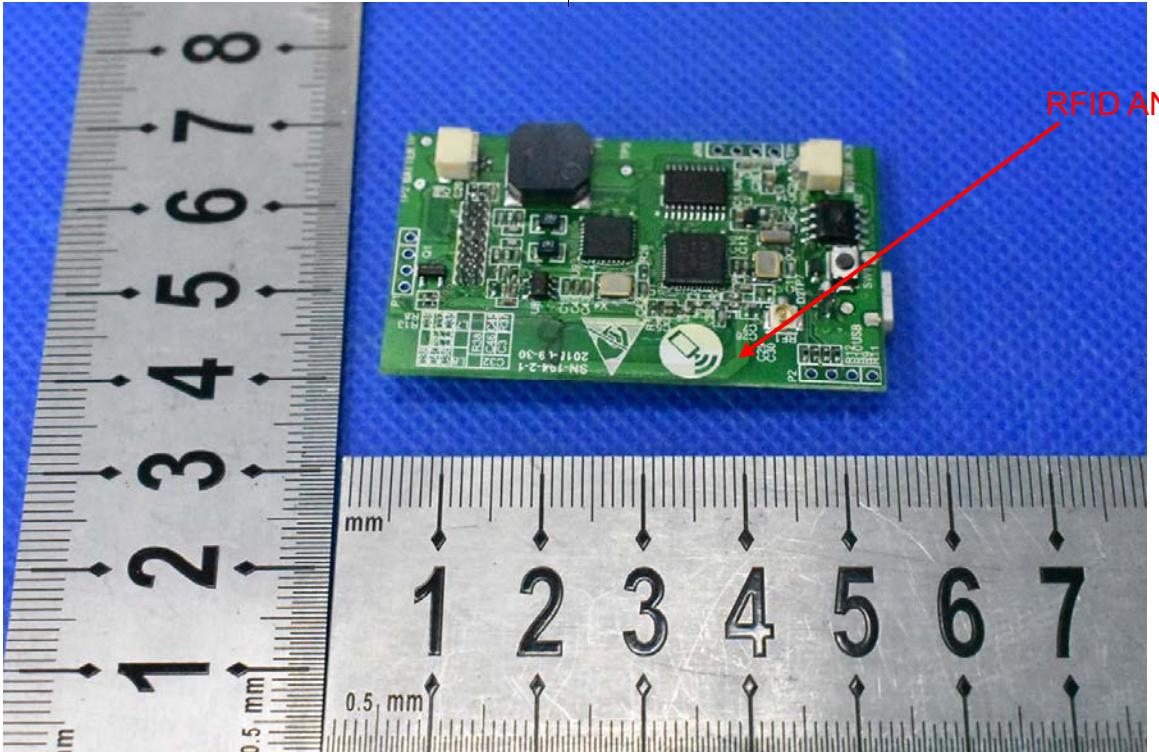
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>E.U.T Antenna:</b>	Internal Antenna
<p>The antenna is Internal Antenna which permanently attached, and the best case gain of the antenna is 0dBi.</p>	
	

## 4.2. Conducted Emission

### 4.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.4:2014														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p style="text-align: center;"><b>Reference Plane</b></p> <p><i>Remark:</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>														
<b>Test Mode:</b>	Transmitting Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	N/A; The EUT powered by battery, so this test item is not applicable														
<b>Test Result:</b>	N/A														



## 4.3. Radiated Emission Measurement

### 4.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.225(a) and 15.209				
<b>Test Method:</b>	ANSI C63.10:2013				
<b>Frequency Range:</b>	9 kHz to 5 GHz				
<b>Measurement Distance:</b>	3 m				
<b>Antenna Polarization:</b>	Horizontal & Vertical				
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
	<ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li></ol>				

<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p> <p>Ground Plane</p> <p>30MHz to 1GHz</p> <p>EUT</p> <p>Turn Table</p> <p>Antenna Tower</p> <p>Search Antenna</p> <p>RF Test Receiver</p> <p>Ground Plane</p> <p>Above 1GHz</p> <p>AE</p> <p>EUT</p> <p>(Turntable)</p> <p>Horn Antenna</p> <p>Antenna Tower</p> <p>Ground Reference Plane</p> <p>Test Receiver</p> <p>Pre -Amplifier</p> <p>Controller</p>
<b>Test Mode:</b>	Transmitting Mode
<b>Test results:</b>	PASS



#### 4.3.2. Limit

(a) The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

**Frequencies in restricted band are complied to limit on Paragraph 15.209**

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

#### 4.3.3. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHWARZ	ESVD	100008	Dec. 27, 2018
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	Dec. 27, 2018
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Dec. 27, 2018
Pre-amplifier	HP	8447D	2727A05017	Dec. 27, 2018
Loop antenna	ZHINAN	ZN30900A	12024	Dec. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Dec. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



#### 4.3.4. Test Data

##### Field Strength of Fundamental

Frequency (MHz)	Reading (dBuV/m)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar (H/V)	Detector
13.21	46.50	15.82	62.32	80.51	-18.19	H	QP
13.21	45.39	15.82	61.21	80.51	-19.30	V	QP
13.85	46.06	15.82	61.88	80.51	-18.63	H	QP
13.85	48.70	15.82	64.52	80.51	-15.99	V	QP
13.56	88.73	12.33	101.06	124	-22.94	H	Peak
13.56	84.01	12.33	96.34	124	-27.66	V	Peak
13.45	54.09	15.82	69.91	90.47	-20.56	H	QP
13.45	52.05	15.82	67.87	90.47	-22.60	V	QP
13.62	51.14	15.82	66.96	90.47	-23.51	H	QP
13.62	48.58	15.82	64.40	90.47	-26.07	V	QP

##### Harmonics and Spurious Emissions

##### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor


2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement




## About 30MHz-1GHz

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.  
The level of the peak emission are less than the average limit, so the average value is not reflected in the report.

### Horizontal

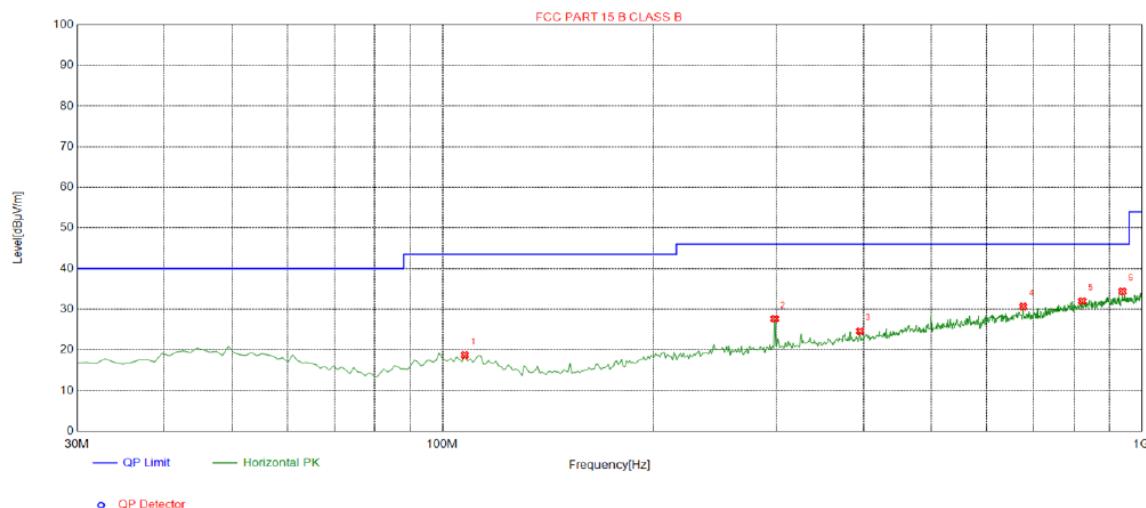

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	107.600	18.74	-15.42	43.50	24.76	100	293	Horizontal
2	298.690	27.65	-12.75	46.00	18.35	100	161	Horizontal
3	395.690	24.62	-10.51	46.00	21.38	100	350	Horizontal
4	676.990	30.67	-4.79	46.00	15.33	100	42	Horizontal
5	822.490	32.01	-2.64	46.00	13.99	100	231	Horizontal
6	938.890	34.39	-1.57	46.00	11.61	100	229	Horizontal

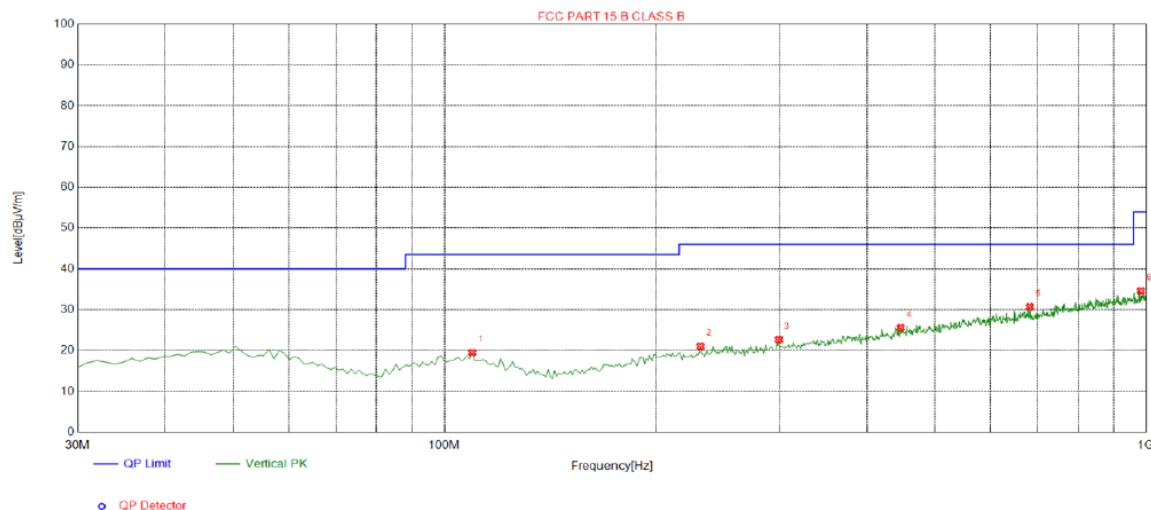*Vertical*

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	109.540	19.48	-15.43	43.50	24.02	100	10	Vertical
2	231.760	21.03	-14.24	46.00	24.97	100	10	Vertical
3	299.660	22.66	-12.74	46.00	23.34	100	220	Vertical
4	447.100	25.58	-9.11	46.00	20.42	100	155	Vertical
5	682.810	30.69	-4.98	46.00	15.31	100	90	Vertical
6	983.510	34.60	-1.16	54.00	19.40	100	307	Vertical



## 4.4. Occupied Bandwidth

### 4.4.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.215(c)
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	N/A
	<ol style="list-style-type: none"><li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; <math>RBW \geq 1\%</math> of the 20 dB bandwidth; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold.</li><li>4. Measure and record the results in the test report.</li></ol>
<b>Test setup:</b>	
<b>Test Mode:</b>	Transmitting Mode
<b>Test results:</b>	PASS

### 4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Dec. 27, 2018


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



#### 4.4.3. Test data

Test Channel (MHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
13.56	2.861	N/A	PASS

Test plots as follows:

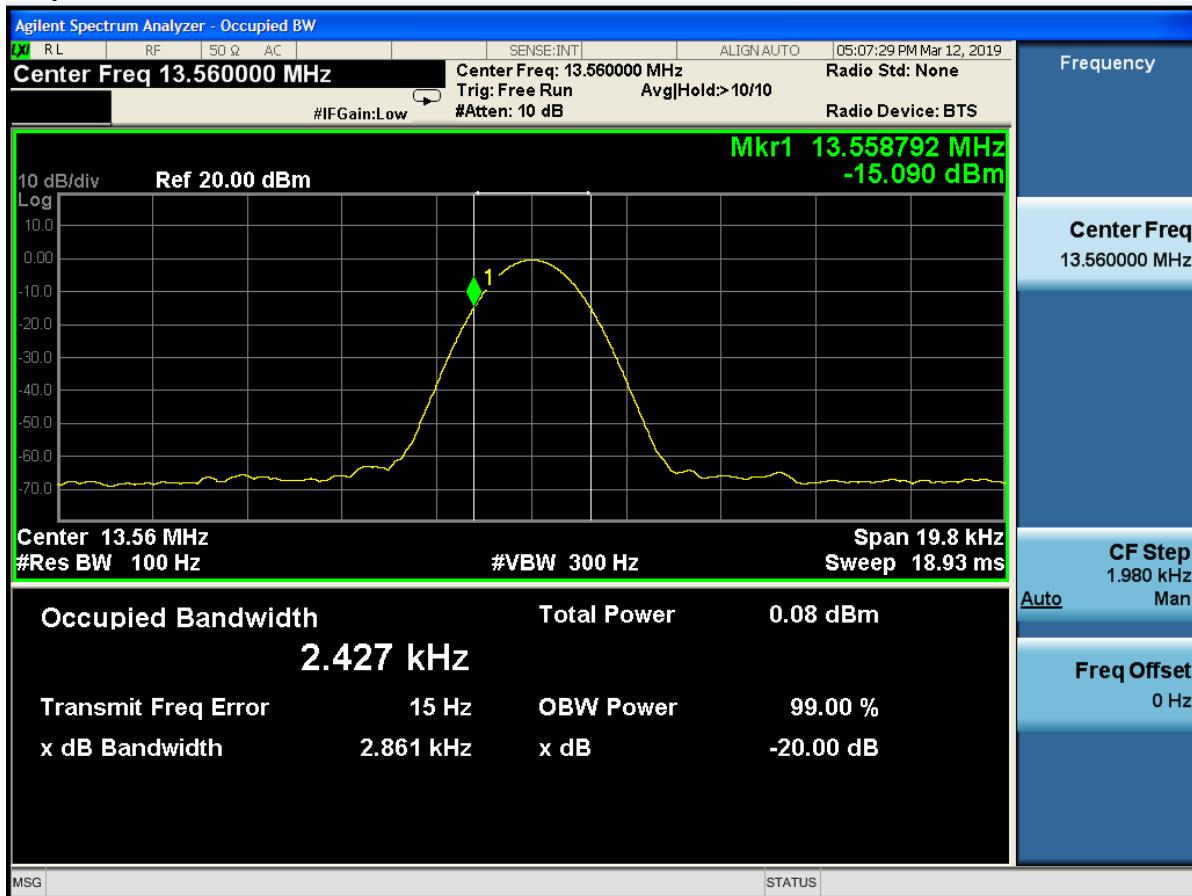



## 4.5. Frequency stability

#### 4.5.1. Test Specification




#### 4.5.2. Test Data

Voltage (Vdc)	Temperature (°C)	Frequency (MHz)	Deviation (%)	Limit (%)
4.5	0	13.560225	0.00166	+/-0.01%
4.5	10	13.560317	0.00234	
4.5	20	13.560193	0.00142	
4.5	30	13.560520	0.00383	
4.5	40	13.560231	0.00170	
4.5	45	13.560361	0.00266	
5.175	0	13.560214	0.00158	
5.175	10	13.560330	0.00243	
5.175	20	13.560247	0.00182	
5.175	30	13.560311	0.00229	
5.175	40	13.560173	0.00128	
5.175	45	13.560591	0.00436	
3.825	0	13.560233	0.00172	
3.825	10	13.560348	0.00257	
3.825	20	13.560226	0.00167	
3.825	30	13.560319	0.00235	
3.825	40	13.560214	0.00158	
3.825	45	13.560332	0.00245	

## 5. Photographs of Test Setup

Radiated Emission

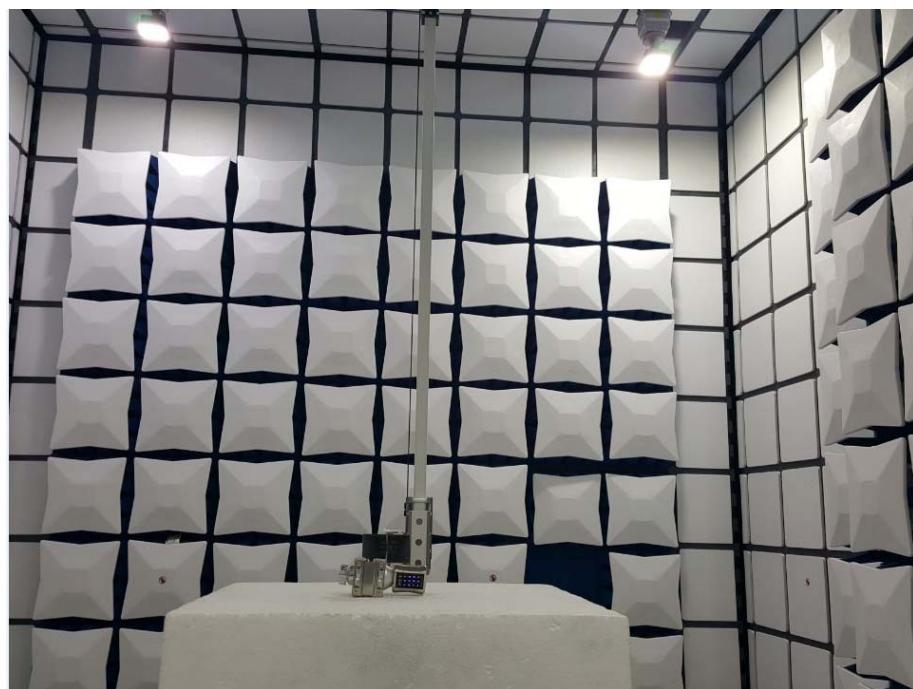



## 6. PHOTOGRAPH OF TEST

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----