

TEST REPORT

Report Number	181100106SEL-EMC1
Applicant Name/Address	KD Navien Co.,Ltd. 95, Suworam-gil, Seotan-myeon, Pyeongtaek-si, Gyeonggi-do
Test Sample Description	
- Product	Bed warmer
- Model and/or Brand name	EQM580-KSUS
- Variant model name.....	EQM580-QSUS, EQM580-SSUS
- Manufacturer Name / Address ..	KD Navien Co.,Ltd. 95, Suworam-gil, Seotan-myeon, Pyeongtaek-si, Gyeonggi-do
- Rating(s)	AC 120 V, 60 Hz
Receipt of sample(s)	13 Mar. 2019
Date of Test	10 Apr. 2019 ~ 11 Apr. 2019
Test Method(s)	FCC Part 15 Subpart B
Test Results & Uncertainty	See EMC Results Conclusion
Issue date	18 Apr. 2019

Note 1. The results shown in this test report refer only to the sample(s) tested.

Note 2: This report shall not be reproduced except in full, without the written approval of Intertek.

Note 3: This laboratory is not accredited for the test results marked as *.

Tested by;



Name: Andy Kim
EMC Engineer

Approved by;



Name: Rina Bae
EMC Technical Manager

Intertek ETL SEMKO Korea Ltd.

Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our standard Terms and Conditions which can be obtained at our website: <http://www.intertek.com/terms/>. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. This report is made solely on the basis of your instructions and / or information and materials supplied by you and provide no warranty on the tested sample(s) be truly representative of the sample source. The report is not intended to be a recommendation for any particular course of action, you are responsible for acting as you see fit on the basis of the report results. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. This report does not discharge or release you from your legal obligations and duties to any other person. You are the only one authorized to permit copying or distribution of this report (and then only in its entirety). Any such third parties to whom this report may be circulated rely on the content of the report solely at their own risk. This report shall not be reproduced, except in full.



SECTION 1 CONTENTS

SECTION 2 EMC Results Conclusion (with Justification).....	3
SECTION 3 Test environment and conditions	4
SECTION 4 EUT Information	5
SECTION 5 TEST CONFIGURATION, Operation mode and SET-UP	6
SECTION 6 EMISSION	7
SECTION 7 Appendix I	14
Photographs of Test Configurations	14
SECTION 8 Appendix II	17
Photographs of EUT.....	17



SECTION 2 EMC RESULTS CONCLUSION (WITH JUSTIFICATION)

We tested the Bed warmer, Model: EQM580-KSUS, to determine if it was in compliance with the relevant US standards as marked on the test report.

We found that the unit met the requirement of FCC Part 15 Subpart B standards when tested as received.

Test Items	Applied Standards	Results			
		Comply	Not Comply	N/A	See Note
Disturbance Voltage	FCC Part 15 Subpart B	☒	☐	☐	☒
Radiated disturbance (Below 1 GHz)	FCC Part 15 Subpart B	☒	☐	☐	☒
Radiated disturbance (Above 1 GHz)	FCC Part 15 Subpart B	☒	☐	☐	☒
Note 1) When determining the test conclusion, the Measurement Uncertainty of test has been considered.					

Measurement Uncertainty

Conducted Emission	150 kHz – 30 MHz	$U = 3.3$ [dB]
	(Confidence level approximately 95 %, $k = 2$)	
Radiated Emissions	9 kHz – 30 MHz	$U = 4.5$ [dB]
	30 MHz – 1 000 MHz	Horizontal: $U = 4.3$ [dB]
		Vertical: $U = 4.6$ [dB]
	1 GHz – 6 GHz	Horizontal: $U = 5.7$ [dB] Vertical: $U = 5.7$ [dB]
	6 GHz – 18 GHz	Horizontal: $U = 5.7$ [dB] Vertical: $U = 5.8$ [dB]
	(Confidence level approximately 95 %, $k = 2$)	



SECTION 3 TEST ENVIRONMENT AND CONDITIONS

Test Environment

Test Item	Test Site	Test date (MM-DD)	Temp (°C)	Humidity (% R.H.)	Pressure (kPa)
Disturbance Voltage	Shielded Room #2	04-11	20.7 ± 1.0	32.9 ± 0.2	
Radiated disturbance (Below 1 GHz)	10 m chamber	04-10	21.2 ± 1.0	25.1 ± 1.0	-
Radiated disturbance (Above 1 GHz)	10 m chamber	04-10	21.2 ± 1.0	25.1 ± 1.0	



SECTION 4 EUT INFORMATION

Equipment Under Test (EUT):	Bed warmer
Model:	EQM580-KSUS
Variant Model:	EQM580-QSUS, EQM580-SSUS
Serial No.:	-
Rated Voltage:	AC 120 V, 60 Hz
Maximum clock frequency:	2 462 MHz
Variant model information:	Mat Size Difference EQM580-KSUS : King size EQM580-QSUS : Queen size EQM580-SSUS : Single size



SECTION 5 TEST CONFIGURATION, OPERATION MODE AND SET-UP

Test Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Bed warmer Heating unit(Boiler) Remote Controller	EQM580-KSUS	-	KD Navien Co.,Ltd.	EUT

*Note: Heating unit(Boiler) and Remote Controller are included in Bed warmer, the EUT.


Used cable description

Start		End		cable Information		
Name	I/O Port	Name	I/O Port	Length (m)	Shield	With Ferrite
EUT (Heating unit(Boiler))	AC IN	AC Power Source	-	1.7	Unshielded	-
EUT (Remote Controller)	-	-	-	-	-	-

Test Operation Mode

- Maximum temperature operating mode: It was tested after setting the maximum temperature.

Test Setup

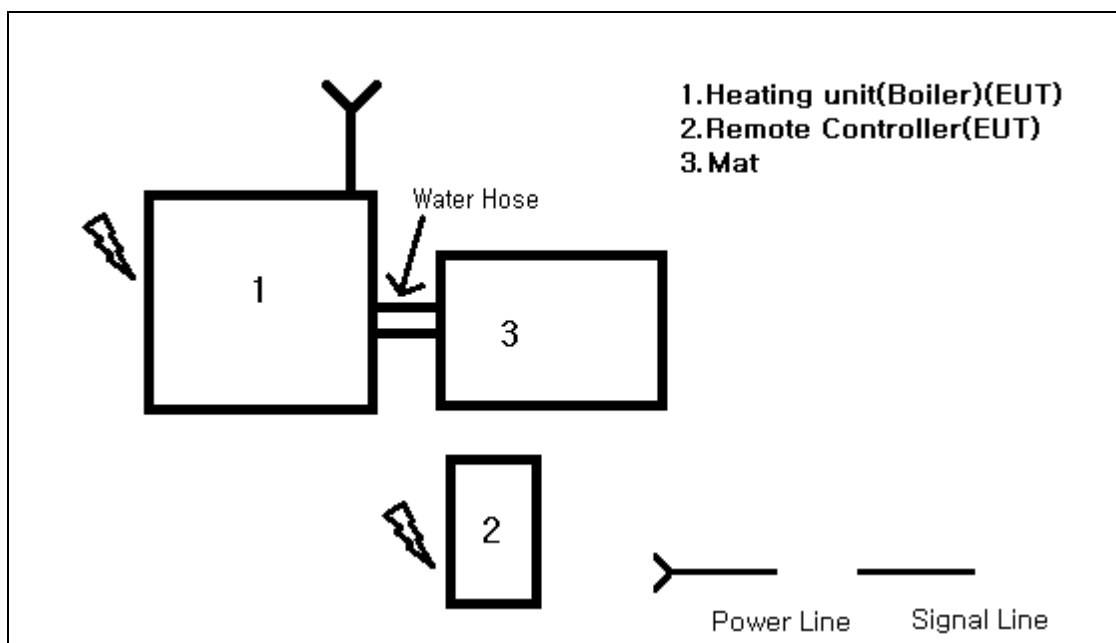



SECTION 6 EMISSION

Radiated disturbance test

Test Method and Summary

Test standard: FCC Part 15 Subpart B

Used Test Equipment

Control No.	Equipment	Manufacturer	Model No.	Serial No.	Next Cal.	Cal Int.
EMC002	EMI Test Receiver	R & S	ESU26	100590	2020.01.04	1Y
EMC001	EMI Test Receiver	R & S	ESU40	100478	2020.01.03	1Y
EMC025	Biconilog (Type7)	ETS-Lindgren	3142E	00203547	2021.02.25	2Y
EMC028	DRG Horn	ETS-Lindgren	3117	00201915	2021.01.29	2Y
EMC075	AMP	R & S	SCU-08	100737	2020.01.04	1Y
EMC077	AMP	R & S	SCU-18D	1952128	2019.06.26	1Y

Operating Environment

Test Voltage: AC 120 V, 60 Hz

Test Setup and Procedure

The EUT along with its peripherals were placed on a non-conducted table with a height of 0.8 m in height table above the reference ground plane.

Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 m to 4 m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For measurements above 1 GHz, place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal.

The final measurement antenna elevation shall be that which maximizes the emissions.

**Limits**

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

(1) Limit for Radiated Emission below 1 000 MHz

Frequency range (MHz)	Class A Equipment (10 m distance) Quasi-peak (dBμV/m)	Class B Equipment (3 m distance) Quasi-peak (dBμV/m)
30 to 88	39.0	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1) The lower limit shall apply at the transition frequency.

Note 2) Additional provisions may be required for cases where interference occurs.

Note 3) According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards (CISPR), Pub. 22 shown as below.

Note 4) Result (dBμV/m) = Reading (dBμV) + Corr. (Ant. Factor (dB/m) + Cable Loss (dB) – Amp. Gain (dB))

Result: QuasiPeak, Reading: Receiver reading value, Corr.: Correction Factor

Margin = Limit – Result

Frequency range (MHz)	Class A Equipment (10 m distance) Quasi-peak (dBμV/m)	Class B Equipment (10 m distance) Quasi-peak (dBμV/m)
30 to 230	40	30
230 to 1 000	47	37

(2) Limits for Radiated Emission above 1 000 MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dBμV/m)	Average (dBμV/m)	Peak (dBμV/m)	Average (dBμV/m)
1 to 40	80	60	74	54

Note 1) Result (dBμV/m) = Reading (dBμV) + Corr. (Ant. Factor (dB/m) + Cable Loss (dB) – Amp. Gain (dB))

Result: Final value, Reading: Receiver reading value, Corr.: Correction Factor

Margin = Limit – Result

Note 2) If measured at a distance other than 3 m, apply the following formula to compensate the measured value.


$E_m = E_{dm} + 20 \cdot \log(d/3)$ (d: Measured distance)

E_m : Result of measured distance correction, E_{dm} : Measured value



Test Data

[Below 1 GHz]

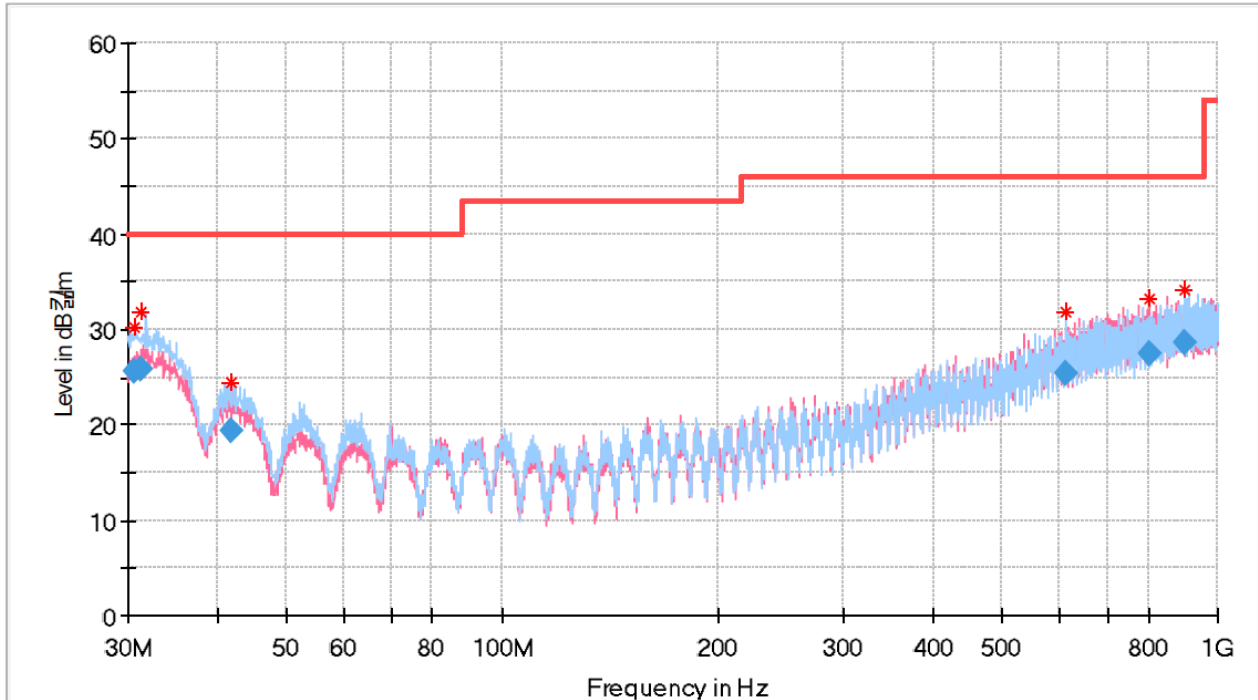


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.664723	25.67	40.00	14.33	396.0	H	54.0	-11.9
31.392500	25.90	40.00	14.10	250.0	H	239.0	-12.5
41.951563	19.36	40.00	20.64	377.0	H	325.0	-18.4
612.888188	25.36	46.00	20.64	147.0	H	289.0	-4.7
802.940875	27.38	46.00	18.62	377.0	V	182.0	-1.9
900.763188	28.64	46.00	17.36	430.0	H	0.0	-0.9



[Above 1 GHz]

Test Distance : 3.8 m

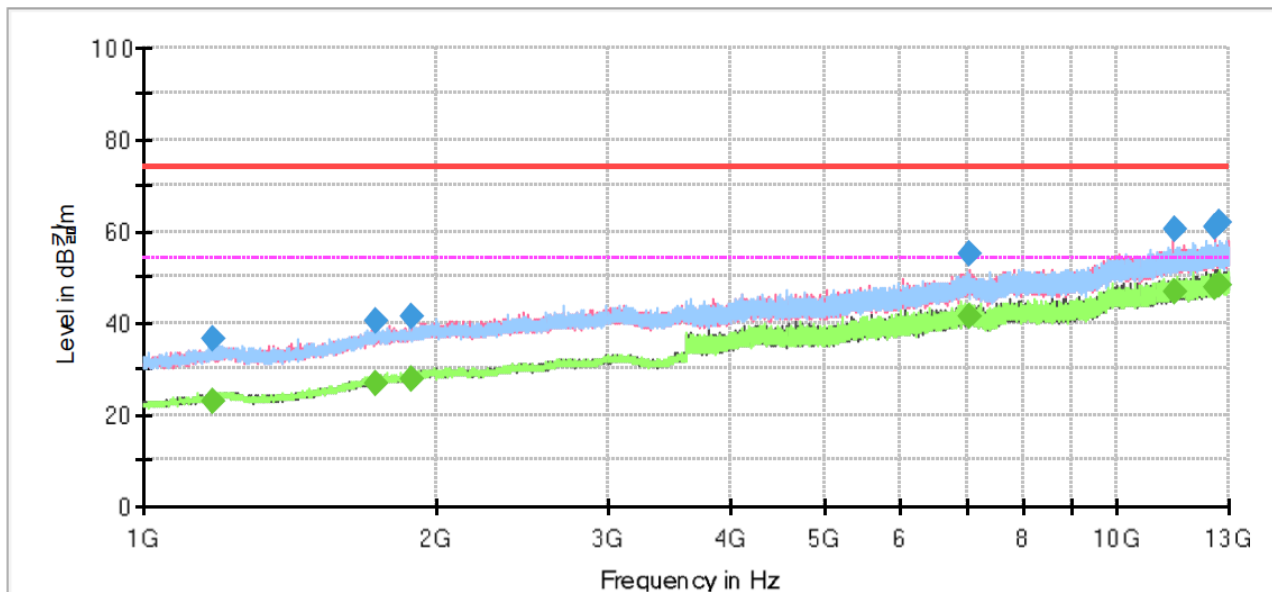

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1179.786000	38.52	---	74.00	35.48	102.0	H	0.0	-2.6
1179.786000	---	25.15	54.00	28.85	102.0	H	0.0	-2.6
1732.529000	42.71	---	74.00	31.29	101.0	V	6.0	1.5
1732.529000	---	29.05	54.00	24.95	101.0	V	6.0	1.5
1885.951667	43.63	---	74.00	30.37	101.0	V	0.0	2.9
1885.951667	---	29.93	54.00	24.07	101.0	V	0.0	2.9
7031.324000	57.30	---	74.00	16.70	101.0	V	6.0	14.7
7031.324000	---	43.67	54.00	10.33	101.0	V	6.0	14.7
11426.134667	62.54	---	74.00	11.46	101.0	V	153.0	20.0
11426.134667	---	48.84	54.00	5.16	101.0	V	153.0	20.0
12569.189667	63.16	---	74.00	10.84	101.0	V	151.0	21.0
12569.189667	---	49.89	54.00	4.11	101.0	V	151.0	21.0
12712.278000	63.87	---	74.00	10.13	101.0	H	6.0	21.2
12712.278000	---	50.29	54.00	3.71	101.0	H	6.0	21.2



Disturbance Voltage Test

Test Method and Summary

Test standard : FCC Part 15 Subpart B

Used Test Equipment


Control No.	Equipment	Manufacturer	Model No.	Serial No.	Next Cal.	Cal Int.
EMC004	EMI Test Receiver	R & S	ESR7	101560	2020.01.02	1Y
EMC007	Two-Line V-Network	R & S	ENV216	101982	2019.10.31	1Y

Operating Environment

Test Voltage: AC 120 V, 60 Hz

Test Setup and Procedure

Disturbance Voltage Test at Mains Terminal:

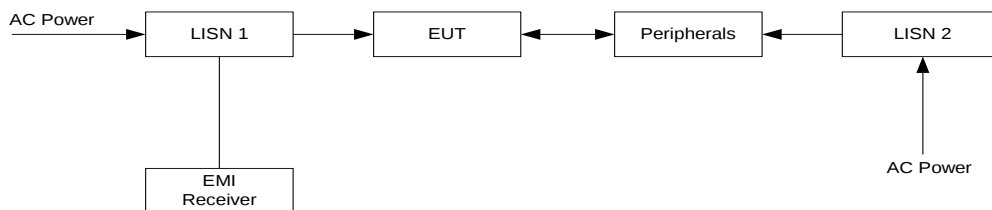

The EUT along with its peripherals were placed on a 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 m space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 characteristic coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

Limits

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1) The lower limit shall apply at the transition frequencies.

Note 2) The limit decreases linearly with the logarithm of the frequency in the range (0.15 ~ 0.5) MHz.

Note 3) Result (dBμV) = Reading (dBμV) + Corr. (Insertion Loss (dB) + Cable Loss (dB))


Result: QuasiPeak/CAverage, Reading: Receiver reading value, Corr.: Correction Factor

Margin = Limit – Result



Test Data

[Live]

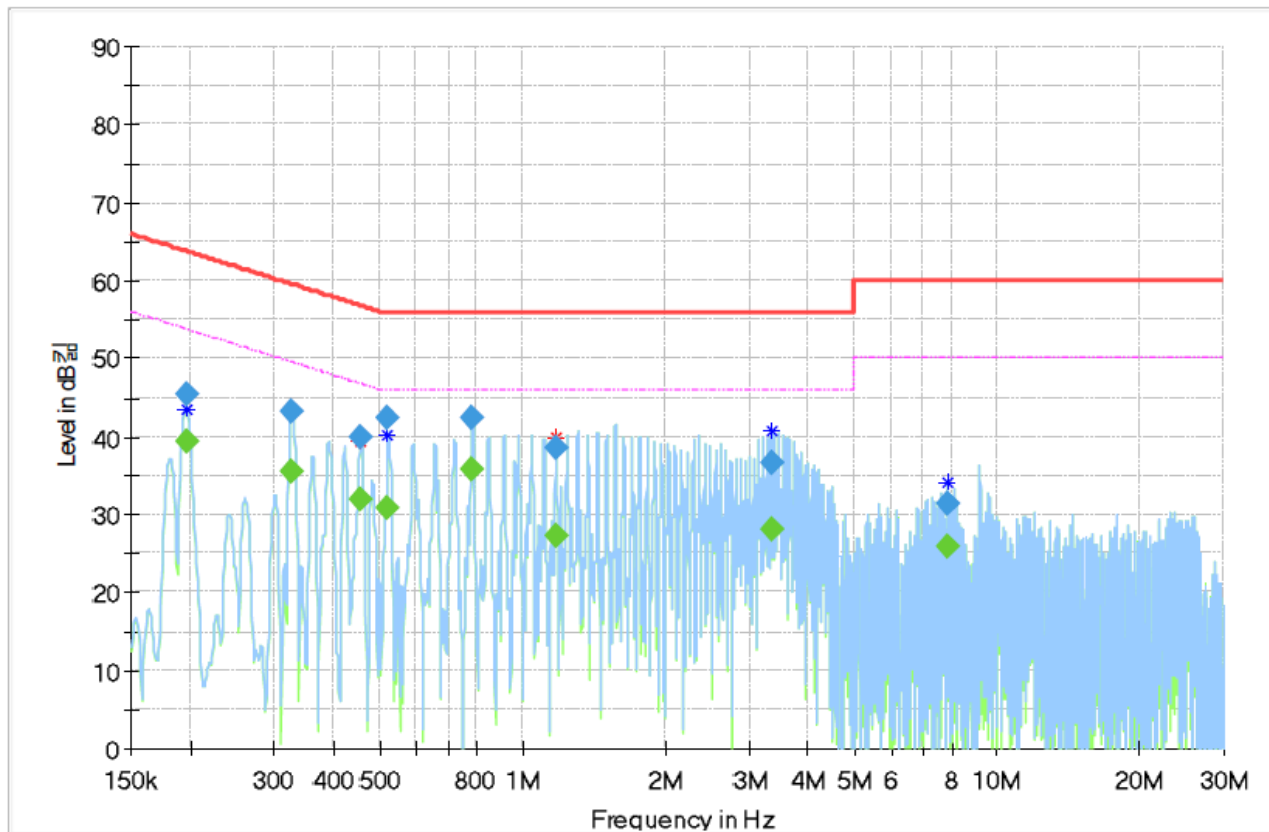


Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.195770	45.28	---	63.79	18.50	L1	ON	9.9
0.195770	---	39.40	53.79	14.39	L1	ON	9.9
0.327110	43.11	---	59.52	16.42	L1	ON	9.9
0.327110	---	35.48	49.52	14.04	L1	ON	9.9
0.457455	39.89	---	56.74	16.85	L1	ON	10.0
0.457455	---	31.92	46.74	14.82	L1	ON	10.0
0.521135	42.37	---	56.00	13.63	L1	ON	10.0
0.521135	---	30.71	46.00	15.29	L1	ON	10.0
0.784810	42.31	---	56.00	13.69	L1	ON	9.9
0.784810	---	35.91	46.00	10.09	L1	ON	9.9
1.174850	38.45	---	56.00	17.55	L1	ON	9.9
1.174850	---	27.14	46.00	18.86	L1	ON	9.9
3.339970	36.67	---	56.00	19.33	L1	ON	9.8
3.339970	---	28.06	46.00	17.94	L1	ON	9.8
7.903040	31.34	---	60.00	28.66	L1	ON	9.9
7.903040	---	25.96	50.00	24.04	L1	ON	9.9



[Neutral]

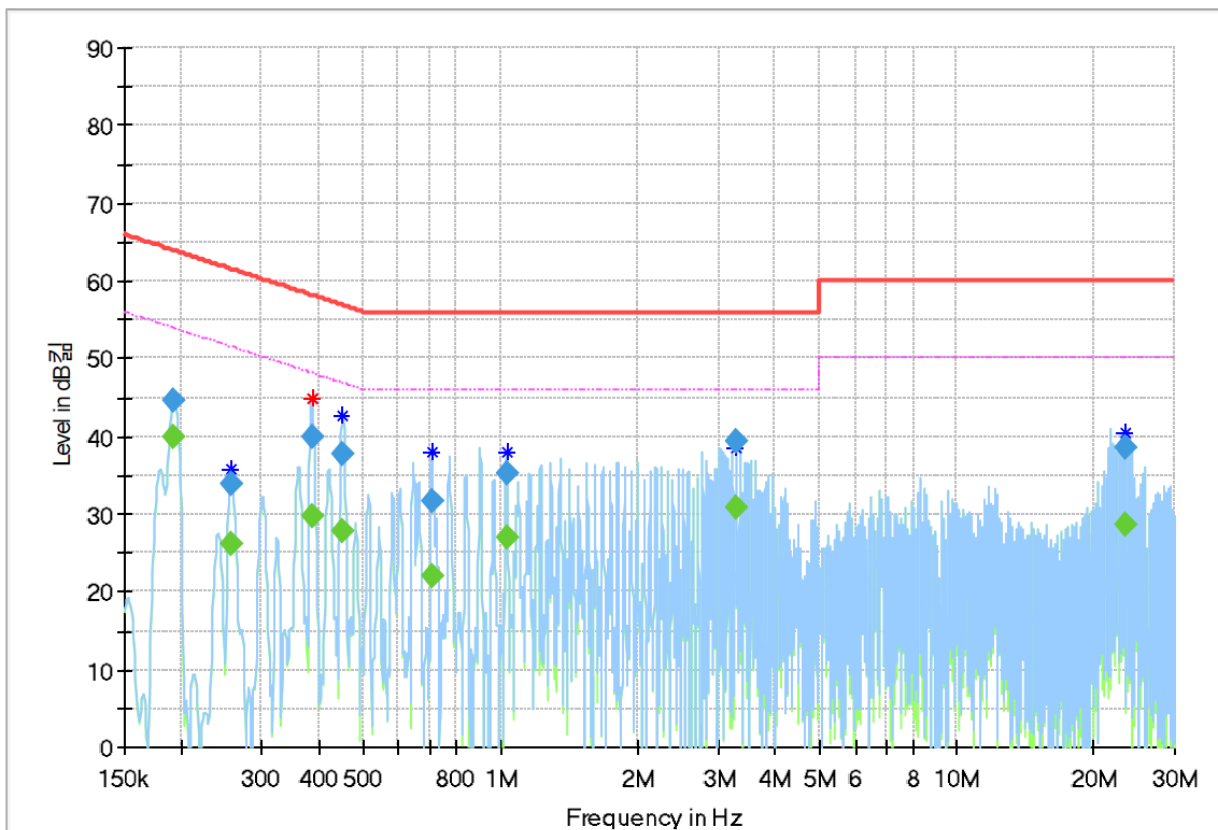

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.191790	44.60	---	63.96	19.36	N	ON	10.0
0.191790	---	39.95	53.96	14.01	N	ON	10.0
0.256465	33.84	---	61.55	27.70	N	ON	9.7
0.256465	---	26.07	51.55	25.48	N	ON	9.7
0.386810	40.03	---	58.13	18.10	N	ON	10.0
0.386810	---	29.62	48.13	18.51	N	ON	10.0
0.449495	37.77	---	56.88	19.12	N	ON	10.0
0.449495	---	27.90	46.88	18.98	N	ON	10.0
0.707200	31.77	---	56.00	24.23	N	ON	9.9
0.707200	---	22.09	46.00	23.91	N	ON	9.9
1.030575	35.16	---	56.00	20.84	N	ON	9.9
1.030575	---	26.97	46.00	19.03	N	ON	9.9
3.285245	39.31	---	56.00	16.69	N	ON	9.8
3.285245	---	30.78	46.00	15.22	N	ON	9.8
23.310615	38.61	---	60.00	21.39	N	ON	10.1
23.310615	---	28.69	50.00	21.31	N	ON	10.1




SECTION 7 APPENDIX I

Photographs of Test Configurations




Disturbance Voltage Test

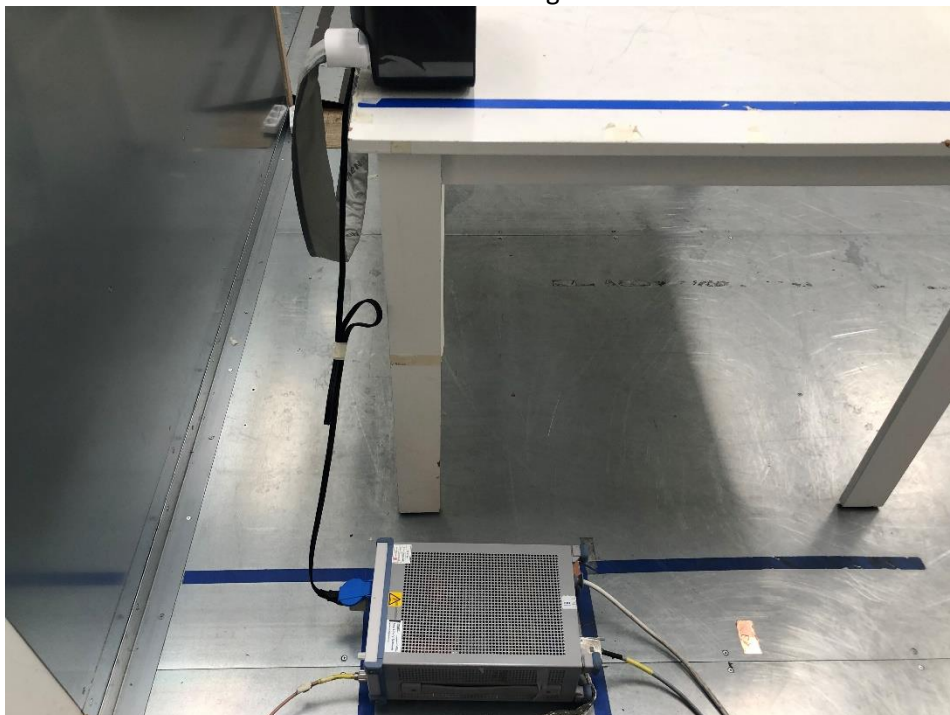


Disturbance Voltage Test




Radiated disturbance (Below 1 GHz)

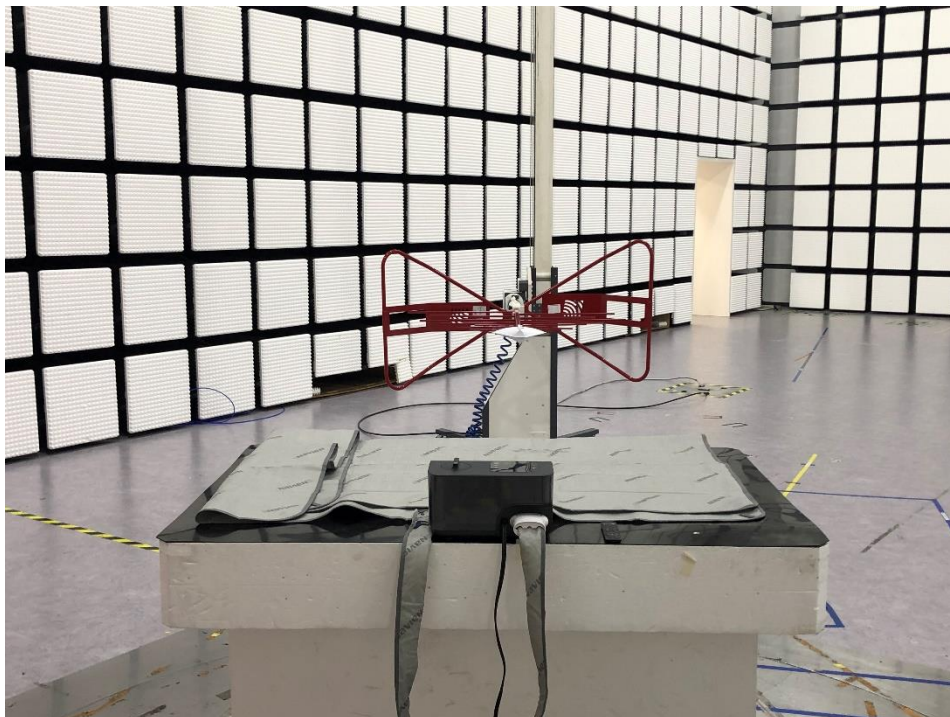

Radiated disturbance (Below 1 GHz)

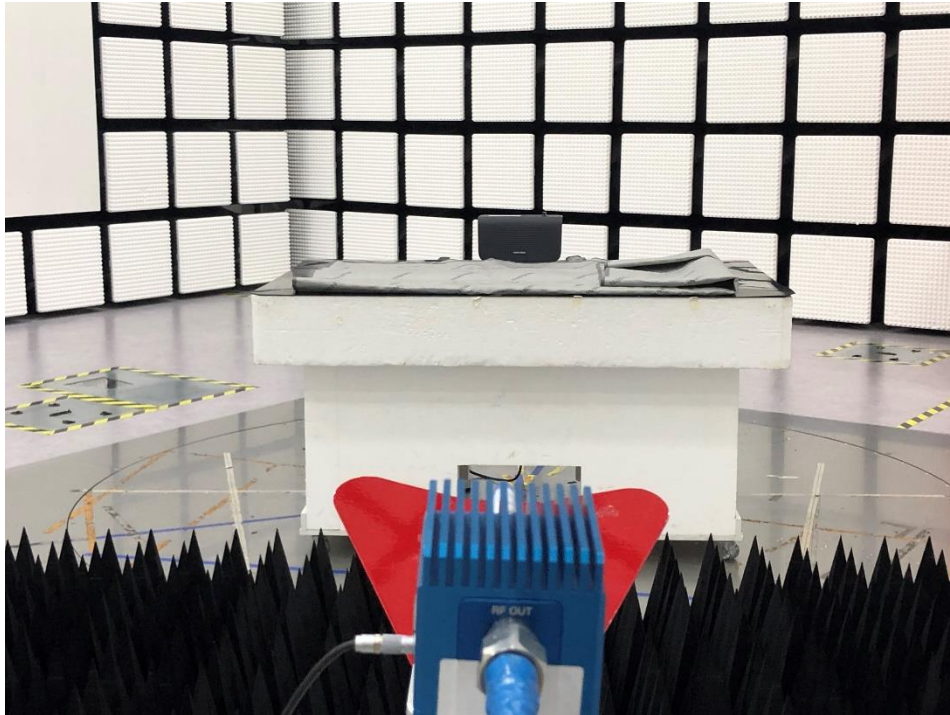

Radiated disturbance (Above 1 GHz)

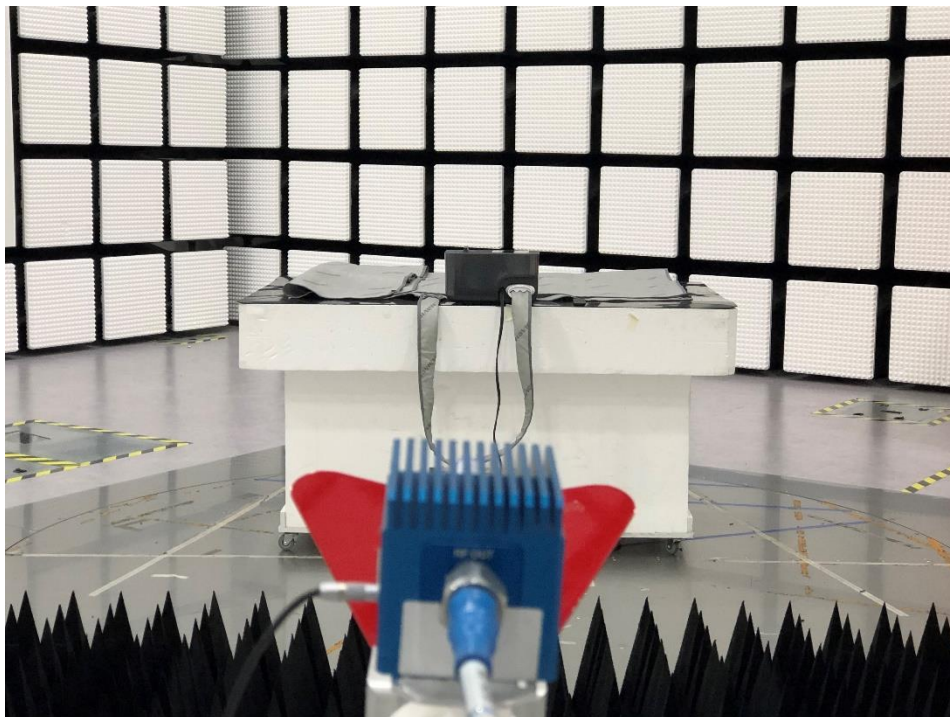


Radiated disturbance (Above 1 GHz)



SECTION 8 APPENDIX II

Photographs of EUT

[Heating unit(Boiler)]

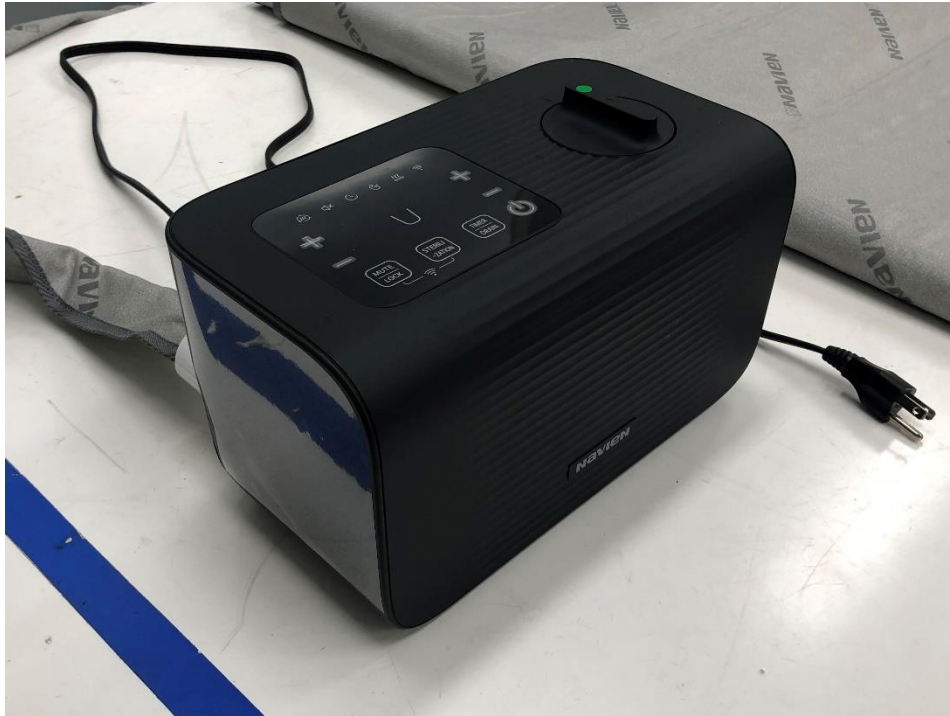

Front



Rear



[Remote Controller]



Front



Rear

- E N D -