

FCC Report (Bluetooth)

Product Name : SMART KEY BAND
Trade mark : N/A
Model No. : AMS-H300C, AMS-H400C, AMS-H200C
FCC ID : 2ASTE-AMS-H300C
Report Number : BLA-EMC-201903-A07-01
Date of sample receipt : March 4, 2019
Date of Test : March 4, 2019–March 14, 2019
Date of Issue : May 11, 2019
Test standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test result : PASS

Prepared for:

Suzhou GlowOne technology Co.,Ltd. / China
F-5, No. 32, Hong xi-Road, Suzhou, Jiangsu, China

Prepared by:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,
China
TEL: +86-755-28682673
FAX: +86-755-28682673

Compiled by: *John Wu*

Approved by: *Emen - li*

Review by: *Sweet. Wong*

Date: May 11, 2019



2 Version

Version No.	Date	Description
00	May 11, 2019	Original

BlueAsia

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED OUTPUT POWER	14
7.4 CHANNEL BANDWIDTH	16
7.5 POWER SPECTRAL DENSITY	18
7.6 BAND EDGES	20
7.6.1 Conducted Emission Method	20
7.6.2 Radiated Emission Method	21
7.7 SPURIOUS EMISSION	23
7.7.1 Conducted Emission Method	23
7.7.2 Radiated Emission Method	25
8 TEST SETUP PHOTO	33
9 EUT CONSTRUCTIONAL DETAILS	35

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	SMART KEY BAND
Model No.:	AMS-H300C, AMS-H400C, AMS-H200C
Test Model No.:	AMS-H300C
Serial No.:	N/A
Sample(s) Status	Engineer sample
Hardware:	V0.1
Software:	BAND2_RF(NO_ADV).hex
Operation Frequency:	2402MHz-2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Chip Antenna
Antenna Gain:	2.9dBi
Power Supply:	DC 3.7V
Remark:	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
...
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
SAMSUNG	Adapter	ETAOU80EB E	N/A
Lenovo	Notebook computer	E470C	PF-10FB5C

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **FCC — Designation No.: CN1252**

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

• **ISED — CAB identifier No.: CN0028**

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

5.5 Test Location

All tests were performed at:

All tests were performed at:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m SAC	SKET	9m*6 m*6m	966	06-10-2018	06-09-2023
2	Broadband Antenna	SCHWARZBECK	VULB9168	00836 P:00227	07-14-2018	07-13-2019
3	Horn Antenna	SCHWARZBECK	9120D	01892 P:00331	07-14-2018	07-13-2019
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Pre-amplifier	SKET	N/A	N/A	07-19-2018	07-18-2019
6	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2018	05-23-2019
7	EMI Test Receiver	Rohde & Schwarz	ESR7	101199	03-21-2019	03-20-2020
8	Controller	SKET	N/A	N/A	N/A	N/A
9	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2018	05-23-2019
10	Signal Generator	Agilent	E8257D	MY44320250	05-24-2018	05-23-2019

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMI Test Receiver	Rohde & Schwarz	ESPI3	101082	06-10-2018	06-09-2019
2	LISN	CHASE	MN2050D	1447	12-18-2018	12-17-2019
3	LISN	Rohde & Schwarz	ENV216	3560.6550.15	07-19-2018	07-18-2019
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2018	07-18-2019


RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Spectrum Analyzer	Agilent	N9030A	MY50510123	05-24-2018	05-23-2019
2	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2018	05-23-2019
3	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2018	05-23-2019
4	Signal Generator	Agilent	E8257D	MY44320250	05-24-2018	05-23-2019
5	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO27	05-24-2018	05-23-2019
6	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO28	05-24-2018	05-23-2019
7	DC Power Supply	LODESTAR	LP305DE	N/A	07-19-2018	07-18-2019
8	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2018	07-18-2019

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
<i>The antenna is Chip antenna, the best case gain of the antenna is 2.9dBi</i>	
	


7.2 Conducted Emissions

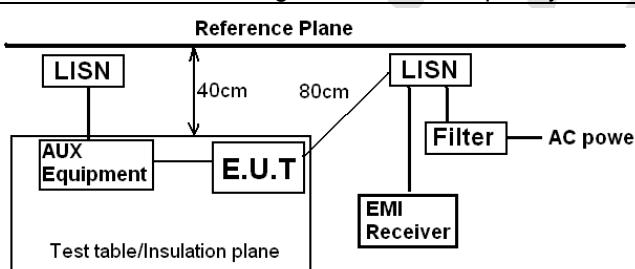Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<p>* Decreases with the logarithm of the frequency.</p>																
Test setup:	 <p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test results:	Pass																

Measurement data

Line:


EUT:	SMART KEY BAND	Probe:	L1
Model:	AMS-H300C	Power Source:	AC120V/60Hz
Mode:	BLE mode	Test by:	Joan
Temp./Hum.(%H):	26°C/60%RH		

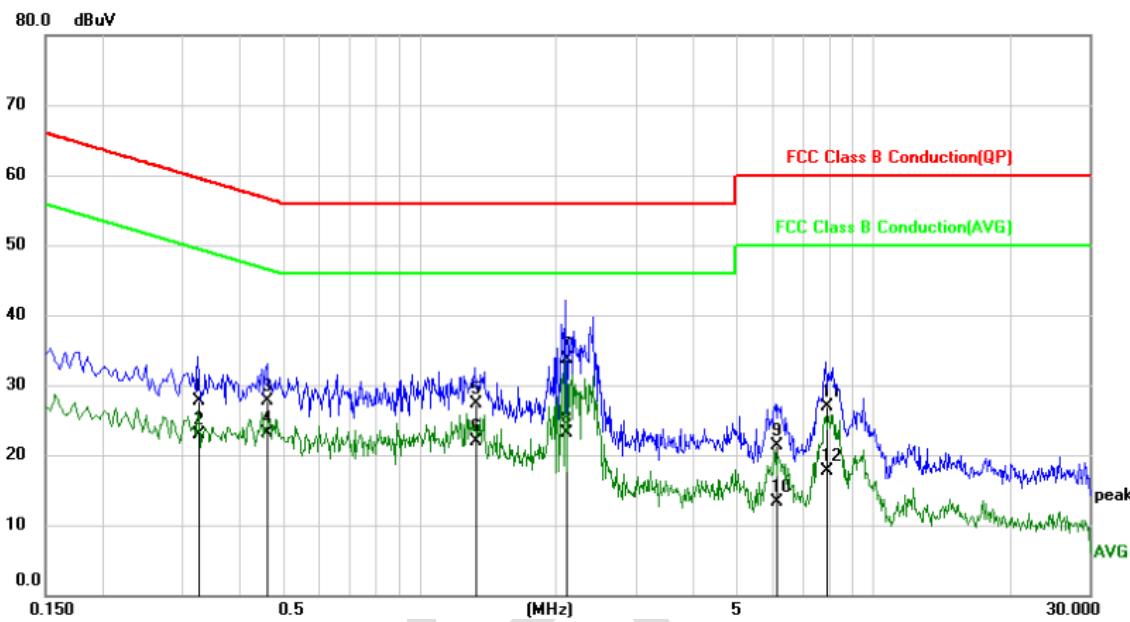

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over
			Level		ment		
		MHz	dBuV	dB	dBuV	dBuV	dB
1		0.3260	17.79	9.97	27.76	59.55	-31.79 QP
2		0.3260	12.95	9.97	22.92	49.55	-26.63 AVG
3		0.4620	17.72	10.04	27.76	56.66	-28.90 QP
4		0.4620	12.97	10.04	23.01	46.66	-23.65 AVG
5		1.3300	17.50	9.84	27.34	56.00	-28.66 QP
6		1.3300	12.12	9.84	21.96	46.00	-24.04 AVG
7 *		2.1060	23.94	9.82	33.76	56.00	-22.24 QP
8		2.1060	13.19	9.82	23.01	46.00	-22.99 AVG
9		6.1180	11.61	9.74	21.35	60.00	-38.65 QP
10		6.1180	3.54	9.74	13.28	50.00	-36.72 AVG
11		7.8780	17.13	9.76	26.89	60.00	-33.11 QP
12		7.8780	7.88	9.76	17.64	50.00	-32.36 AVG

Neutral:

EUT:	SMART KEY BAND	Probe:	N
Model:	AMS-H300C	Power Source:	AC120V/60Hz
Mode:	BLE mode	Test by:	Joan
Temp./Hum.(%H):	26°C/60%RH		

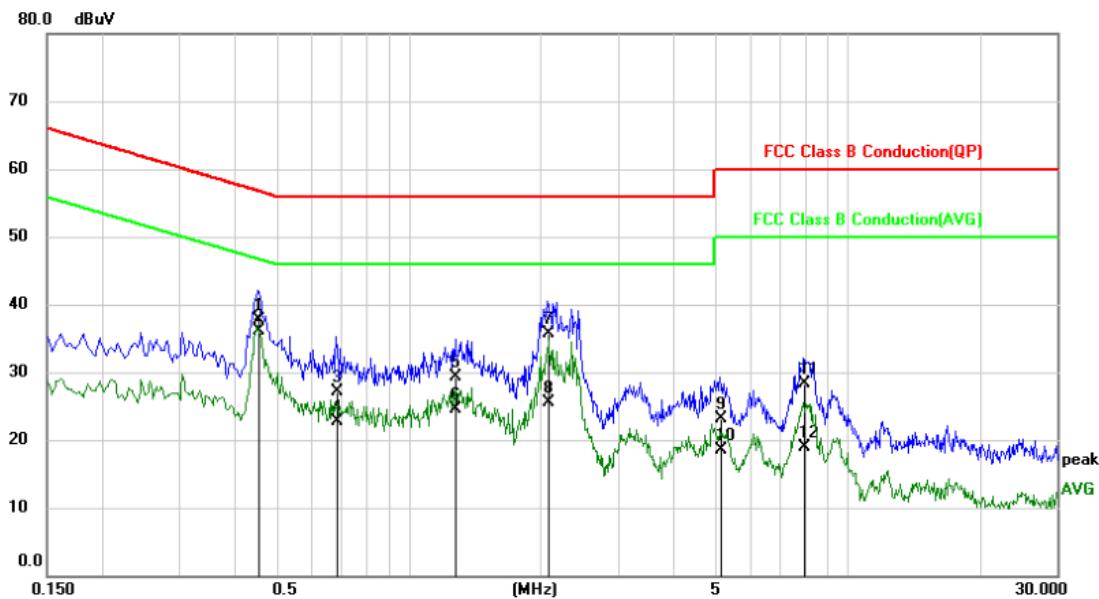


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV			
1		0.4540	27.62	10.18	37.80	56.80	-19.00	QP
2	*	0.4540	25.84	10.18	36.02	46.80	-10.78	AVG
3		0.6860	16.88	10.14	27.02	56.00	-28.98	QP
4		0.6860	12.55	10.14	22.69	46.00	-23.31	AVG
5		1.2780	19.35	10.00	29.35	56.00	-26.65	QP
6		1.2780	14.41	10.00	24.41	46.00	-21.59	AVG
7		2.0660	25.68	10.00	35.68	56.00	-20.32	QP
8		2.0660	15.47	10.00	25.47	46.00	-20.53	AVG
9		5.1380	13.17	9.94	23.11	60.00	-36.89	QP
10		5.1380	8.59	9.94	18.53	50.00	-31.47	AVG
11		7.9580	18.36	9.96	28.32	60.00	-31.68	QP
12		7.9580	8.93	9.96	18.89	50.00	-31.11	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. *Final Level = Receiver Read level + Correct factor*
4. *Correct factor = LISN Factor + Cable Loss*
5. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*


7.3 Conducted Output Power

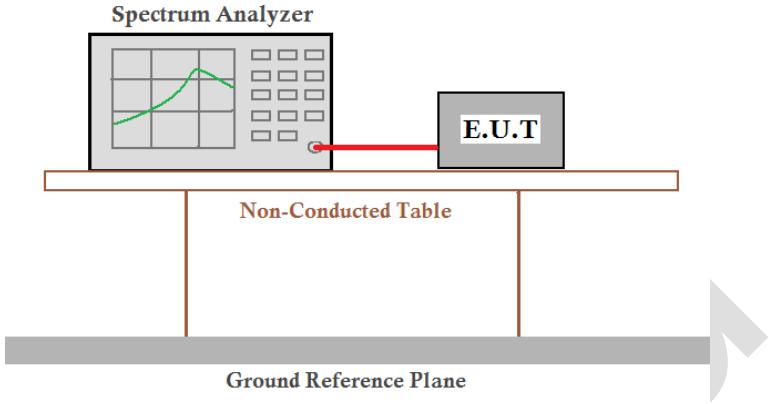Test Requirement:	FCC Part15 C Section 15.247 (b)(3)		
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05		
Limit:	30dBm		
Test setup:			
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement Data


Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-3.41	30.00	Pass
Middle	-4.15		
Highest	-4.80		

Test plot as follows:

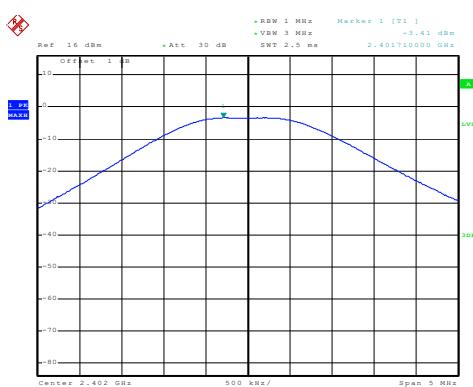


Date: 11.MAR.2019 14:07:19

Lowest channel

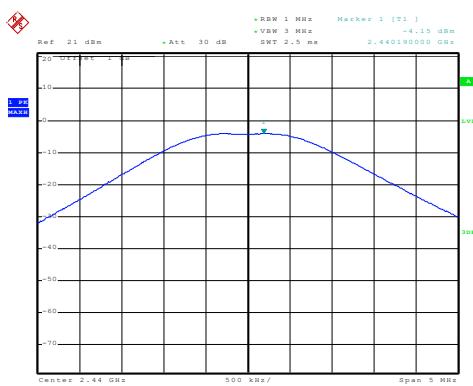

Date: 11.MAR.2019 14:03:59


Middle channel

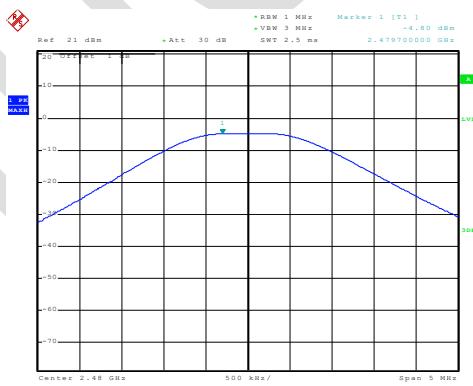

Date: 11.MAR.2019 14:04:11

Highest channel


7.4 Channel Bandwidth

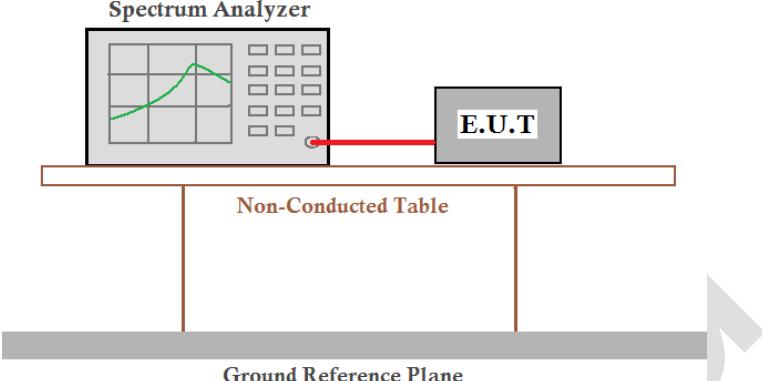Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	>500KHz
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.714	>500	Pass
Middle	0.738		
Highest	0.744		

Test plot as follows:

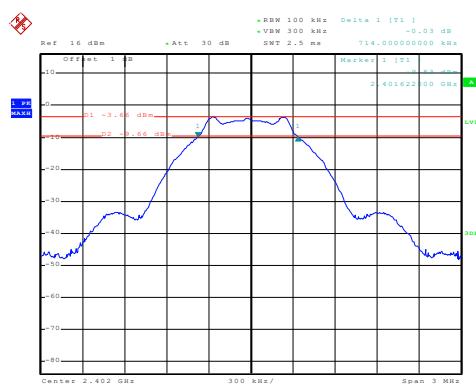


Date: 11.MAR.2019 14:08:56

Lowest channel

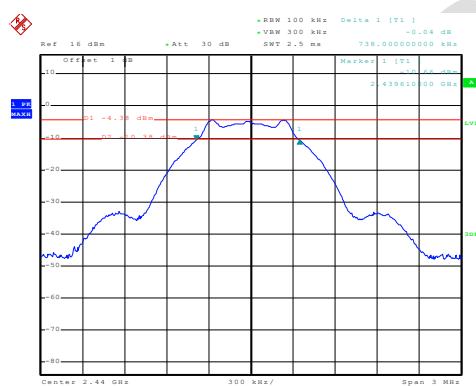

Date: 11.MAR.2019 14:10:50


Middle channel

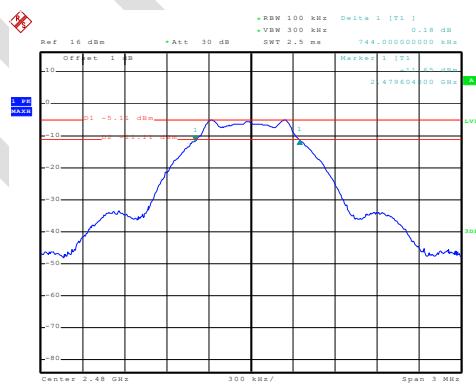

Date: 11 MAR 2019 14:06:02

Highest channel


7.5 Power Spectral Density

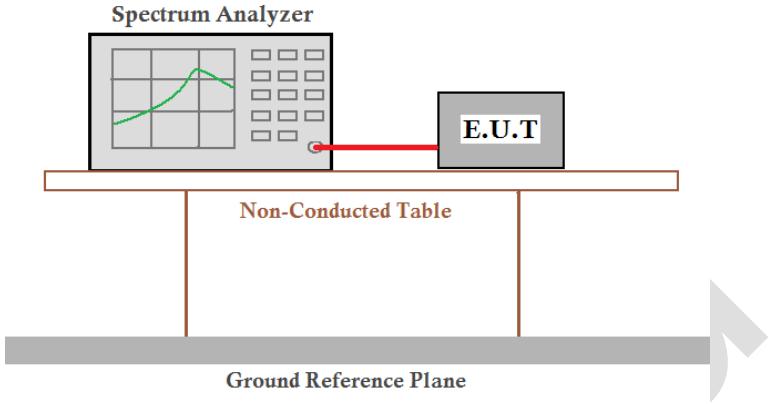Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test channel	Power Spectral Density (dBm/3KHz)	Limit(dBm/3kHz)	Result
Lowest	-15.37	8.00	Pass
Middle	-15.45		
Highest	-16.50		

Test plot as follows:

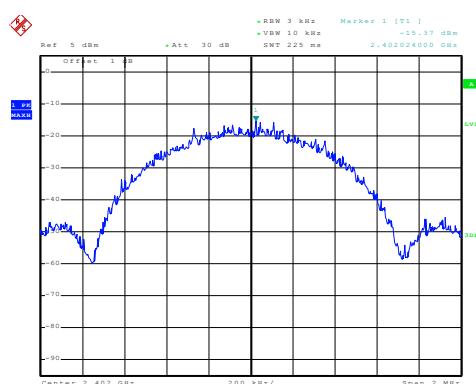


Date: 11.MAR.2019 14:12:54

Lowest channel

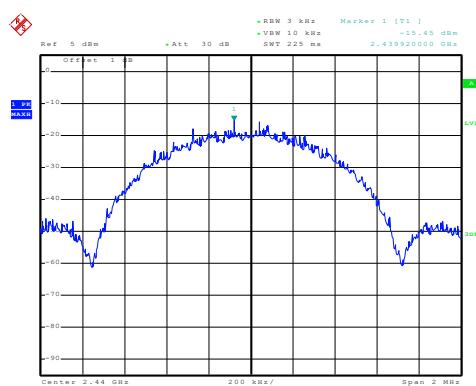

Date: 11.MAR.2019 14:13:48

Middle channel

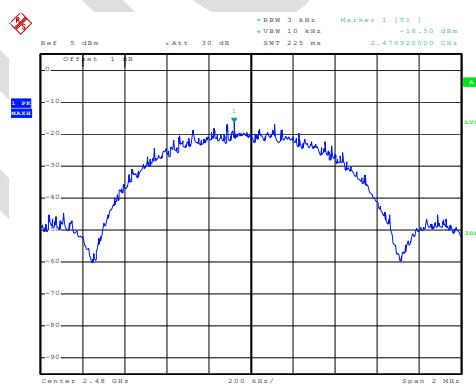

Date: 11.MAR.2019 14:14:22

Highest channel




蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01



Page 20 of 43

7.6 Band edges


7.6.1 Conducted Emission Method

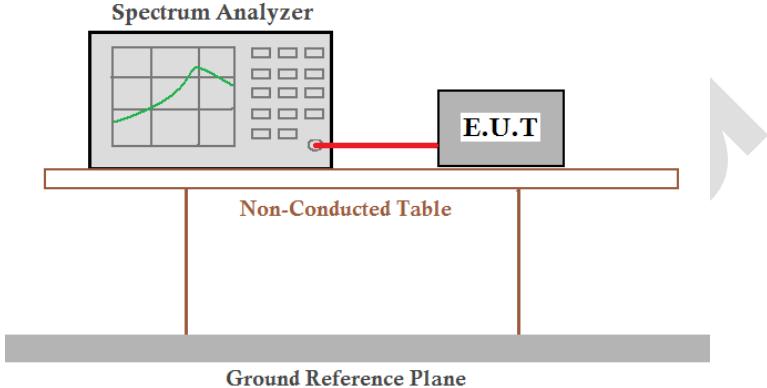Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

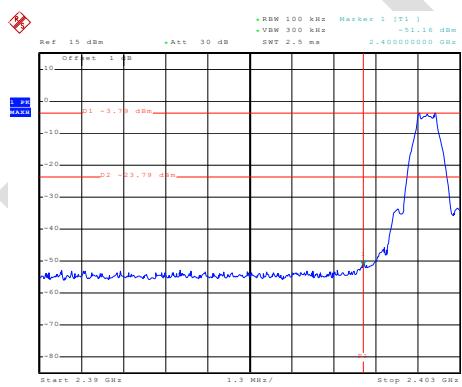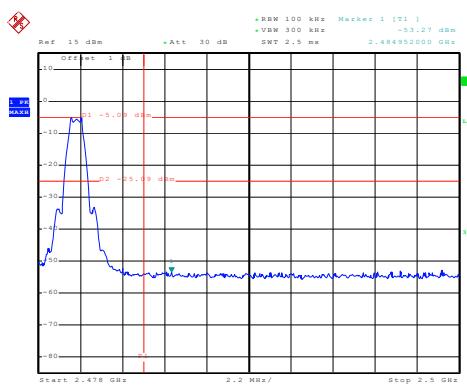Date: 11.MAR.2019 14:18:41
Lowest channelDate: 11.MAR.2019 14:17:10
Highest channel

7.6.2 Radiated Emission Method

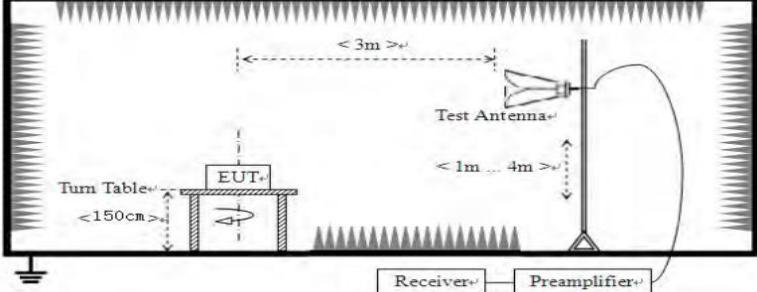Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2390MHz, 2483.5MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dB _V /m @3m)		Value					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.



蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 22 of 43

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	55.36	-14.56	40.80	74.00	-33.20	Horizontal
2390.00	54.59	-14.19	40.40	74.00	-33.60	Horizontal
2310.00	54.68	-14.85	39.83	74.00	-34.17	Vertical
2390.00	54.77	-14.52	40.25	74.00	-33.75	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	41.17	-14.56	26.61	54.00	-27.39	Horizontal
2390.00	41.50	-14.19	27.31	54.00	-26.69	Horizontal
2310.00	41.21	-14.85	26.36	54.00	-27.64	Vertical
2390.00	41.44	-14.52	26.92	54.00	-27.08	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	54.37	-13.66	40.71	74.00	-33.29	Horizontal
2500.00	54.33	-13.57	40.76	74.00	-33.24	Horizontal
2483.50	53.49	-14.05	39.44	74.00	-34.56	Vertical
2500.00	54.32	-13.97	40.35	74.00	-33.65	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.20	-13.66	27.63	54.00	-26.37	Horizontal
2500.00	40.67	-13.57	27.01	54.00	-26.99	Horizontal
2483.50	41.11	-14.05	27.06	54.00	-26.94	Vertical
2500.00	41.57	-13.97	27.60	54.00	-26.40	Vertical

Remark:

1. Final Level = Receiver Read level + Correct factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Correct factor = Antenna Factor + Cable Loss - Preamplifier Factor


7.7 Spurious Emission

7.7.1 Conducted Emission Method

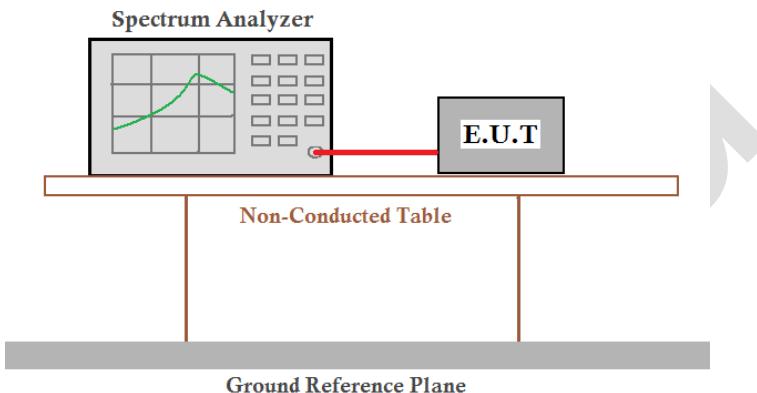Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

Lowest channel

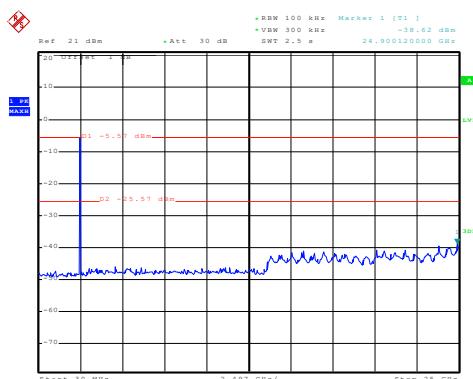


Date: 11.MAR.2019 14:25:09
30MHz~25GHz

Middle channel

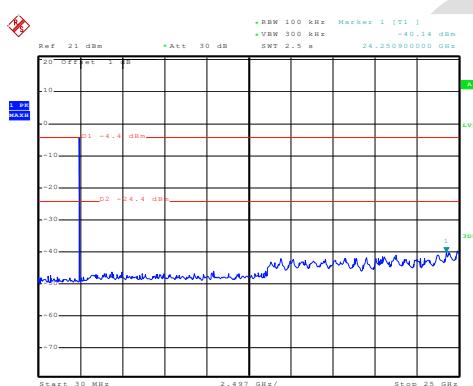

Date: 11.MAR.2019 14:22:09
30MHz~25GHz

Highest channel

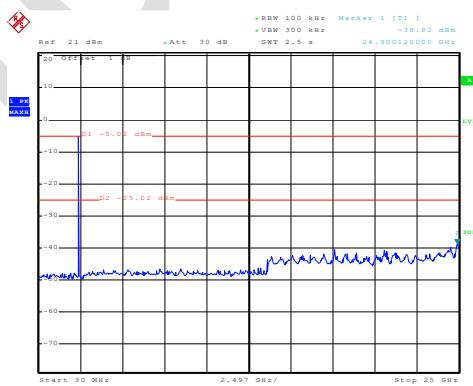

Date: 11.MAR.2019 14:20:36
30MHz~25GHz

7.7.2 Radiated Emission Method




Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	PK,AV,QP	200Hz	600Hz	PK,AV,QP
	150KHz-30MHz	PK,AV,QP	9KHz	30KHz	PK,AV,QP
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	PK,AV,QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				



蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 26 of 43

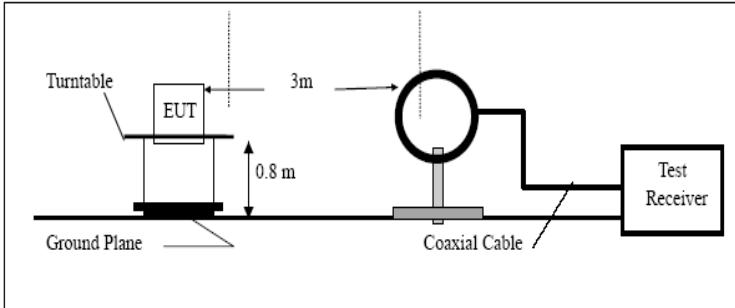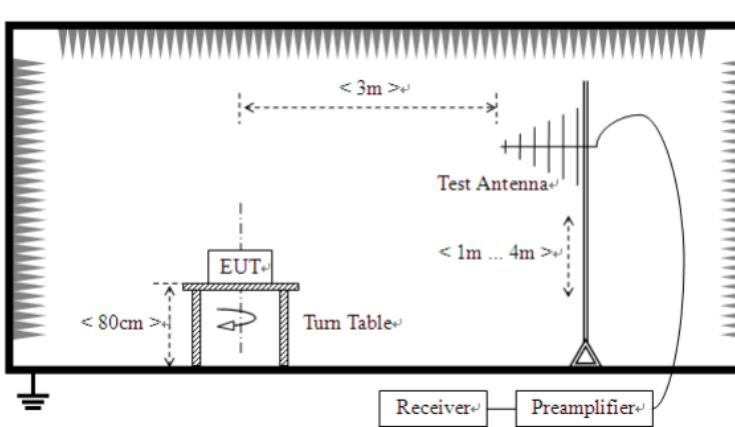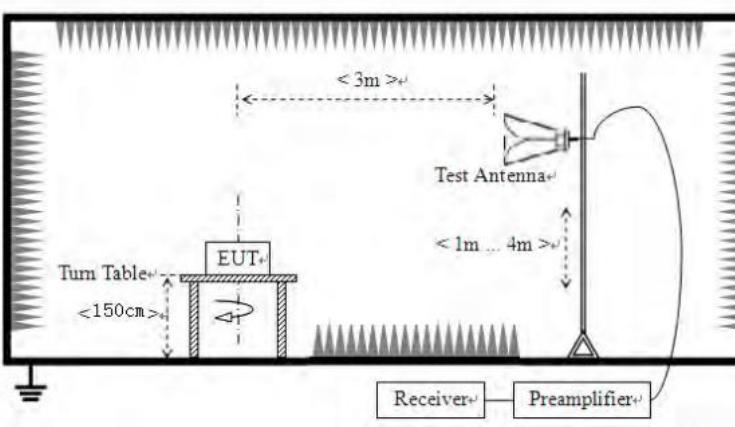Test setup:	<p>Below 30MHz</p>  <p>Below 1GHz</p>  <p>Above 1GHz</p> 
Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	<p>measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data


■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz

Horizontal:

EUT:	SMART KEY BAND	Polarziation:	Horizontal
Model:	AMS-H300C	Power Source:	AC120V/60Hz
Mode:	BLE mode	Test by:	Joan
Temp./Hum.(%H):	26°C/60%RH		

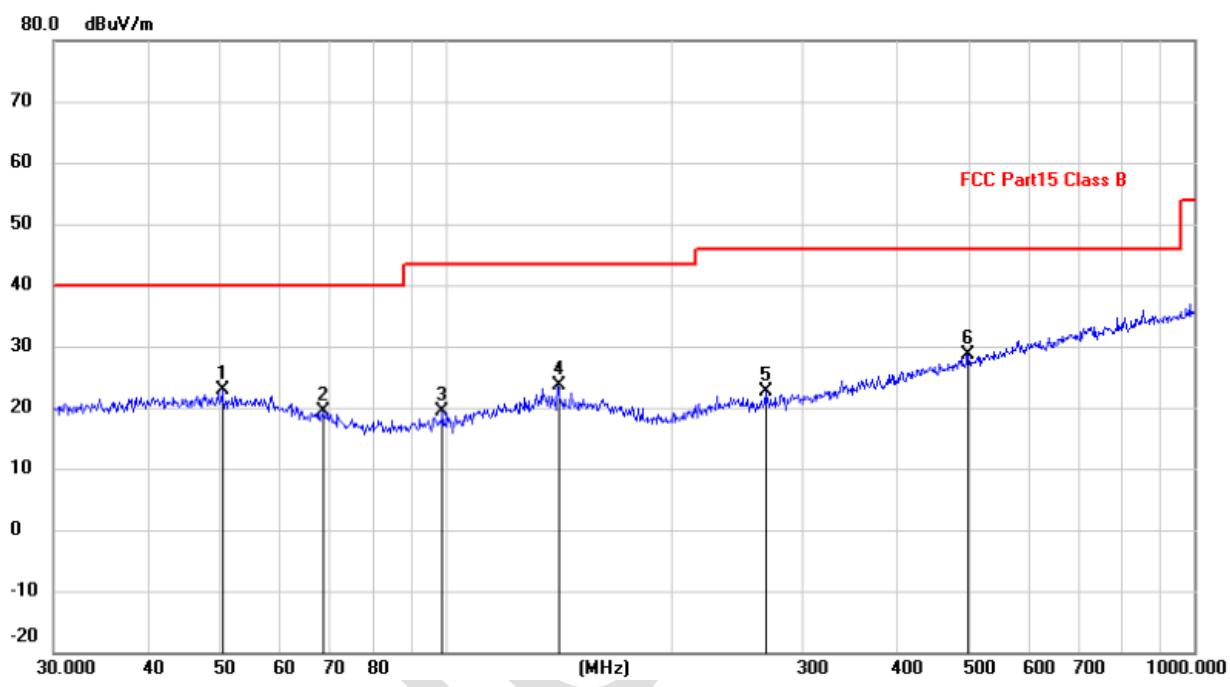

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over
			Level		ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	50.4089	8.89	13.93	22.82	40.00	-17.18 QP
2		68.8721	8.45	11.04	19.49	40.00	-20.51 QP
3		99.1797	9.14	10.24	19.38	43.50	-24.12 QP
4		141.3298	10.56	13.05	23.61	43.50	-19.89 QP
5		267.5455	9.75	12.79	22.54	46.00	-23.46 QP
6		497.6765	9.75	18.82	28.57	46.00	-17.43 QP




蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 29 of 43

Vertical:

EUT:	SMART KEY BAND	Polarization:	Vertical
Model:	AMS-H300C	Power Source:	AC120V/60Hz
Mode:	BLE mode	Test by:	Joan
Temp./Hum.(%H): 26°C/60%RH			

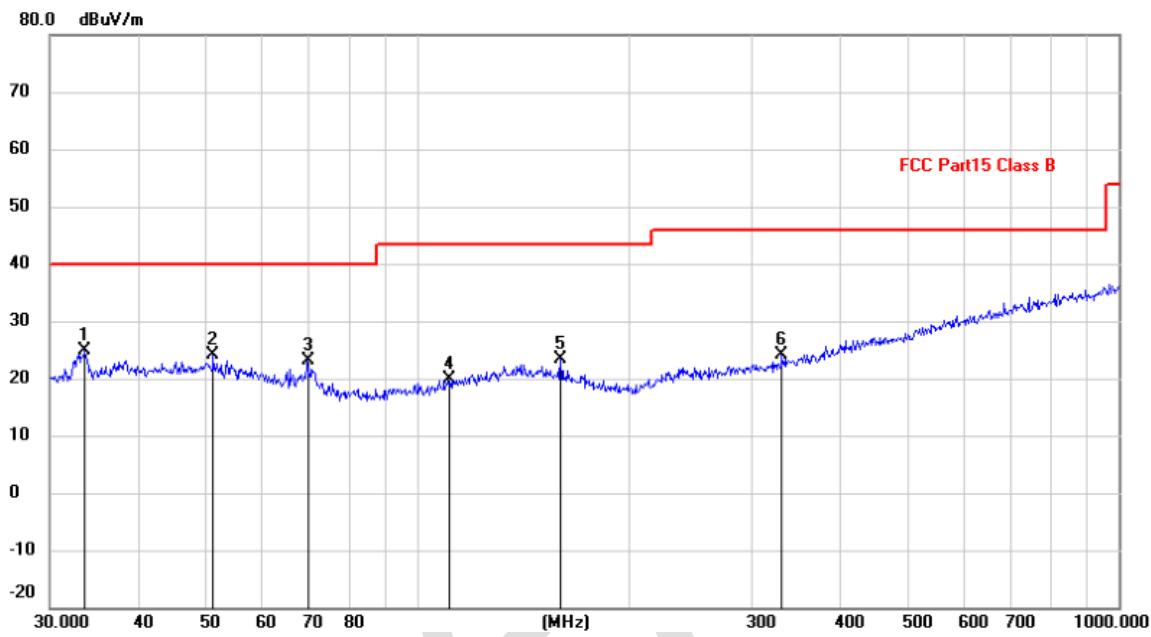

No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	33.6802	12.50	12.41	24.91	40.00	-15.09	QP
2		51.3005	10.38	13.84	24.22	40.00	-15.78	QP
3		69.8450	12.24	10.85	23.09	40.00	-16.91	QP
4		110.9571	8.40	11.44	19.84	43.50	-23.66	QP
5		160.3456	10.30	12.98	23.28	43.50	-20.22	QP
6		331.3546	9.65	14.40	24.05	46.00	-21.95	QP



蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 30 of 43

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	52.29	-7.43	44.86	74.00	-29.14	Vertical
7206.00	57.04	-2.42	54.62	74.00	-19.38	Vertical
9608.00	58.68	-2.38	56.30	74.00	-17.70	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	52.33	-7.43	44.90	74.00	-29.10	Horizontal
7206.00	56.78	-2.42	54.36	74.00	-19.64	Horizontal
9608.00	58.59	-2.38	56.21	74.00	-17.79	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	41.87	-7.43	34.44	54.00	-19.56	Vertical
7206.00	42.29	-2.42	39.87	54.00	-14.13	Vertical
9608.00	41.34	-2.38	38.96	54.00	-15.04	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	42.26	-7.43	34.83	54.00	-19.17	Horizontal
7206.00	43.47	-2.42	41.05	54.00	-12.95	Horizontal
9608.00	42.28	-2.38	39.90	54.00	-14.10	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Correct factor
2. **, means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	51.85	-7.49	44.36	74.00	-29.64	Vertical
7326.00	56.76	-2.40	54.36	74.00	-19.64	Vertical
9768.00	58.18	-2.38	55.80	74.00	-18.20	Vertical
12210.00	*			74.00		Vertical
14652.00	*			74.00		Vertical
4884.00	52.07	-7.49	44.58	74.00	-29.42	Horizontal
7326.00	56.34	-2.40	53.94	74.00	-20.06	Horizontal
9768.00	58.81	-2.38	56.43	74.00	-17.57	Horizontal
12210.00	*			74.00		Horizontal
14652.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	42.39	-7.49	34.90	54.00	-19.10	Vertical
7326.00	42.23	-2.40	39.83	54.00	-14.17	Vertical
9768.00	41.86	-2.38	39.48	54.00	-14.52	Vertical
12210.00	*			54.00		Vertical
14652.00	*			54.00		Vertical
4884.00	42.29	-7.49	34.80	54.00	-19.20	Horizontal
7326.00	41.37	-2.40	38.97	54.00	-15.03	Horizontal
9768.00	42.85	-2.38	40.47	54.00	-13.53	Horizontal
12210.00	*			54.00		Horizontal
14652.00	*			54.00		Horizontal

Remark:

1. Final Level =Receiver Read level +Correct factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
- 3 . Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

Test channel:	Highest					
---------------	---------	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	51.79	-7.47	44.32	74.00	-29.68	Vertical
7440.00	56.52	-2.45	54.07	74.00	-19.93	Vertical
9920.00	58.33	-2.37	55.96	74.00	-18.04	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	51.91	-7.47	44.44	74.00	-29.56	Horizontal
7440.00	57.48	-2.45	55.03	74.00	-18.97	Horizontal
9920.00	58.16	-2.37	55.79	74.00	-18.21	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	41.23	-7.47	33.76	54.00	-20.24	Vertical
7440.00	42.81	-2.45	40.36	54.00	-13.64	Vertical
9920.00	42.73	-2.37	40.36	54.00	-13.64	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	41.29	-7.47	33.82	54.00	-20.18	Horizontal
7440.00	42.30	-2.45	39.85	54.00	-14.15	Horizontal
9920.00	42.98	-2.37	40.61	54.00	-13.39	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Correct factor.
2. ** means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor.





蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 33 of 43

8 Test Setup Photo

Radiated Emission

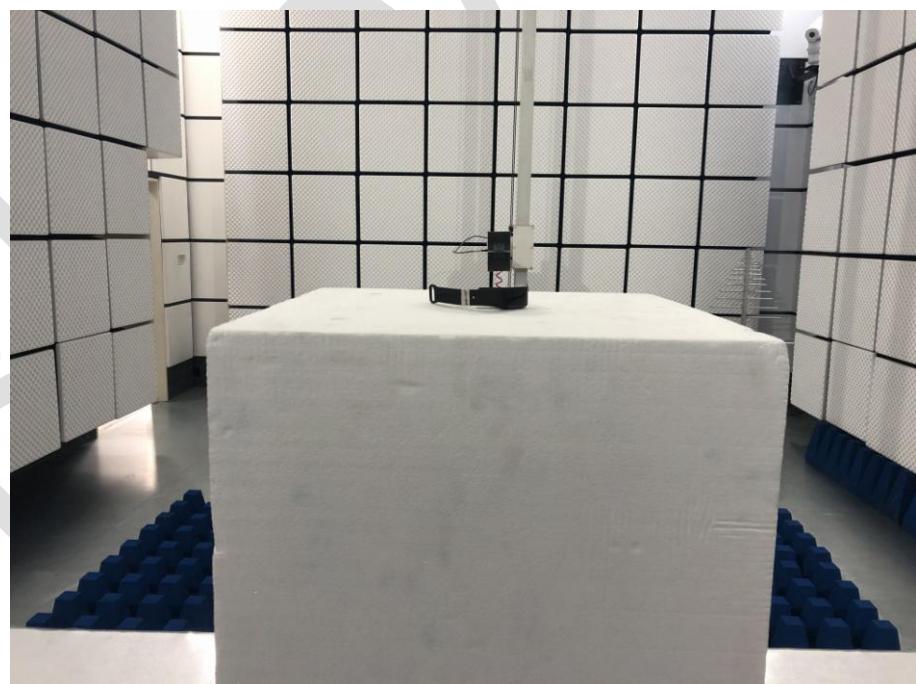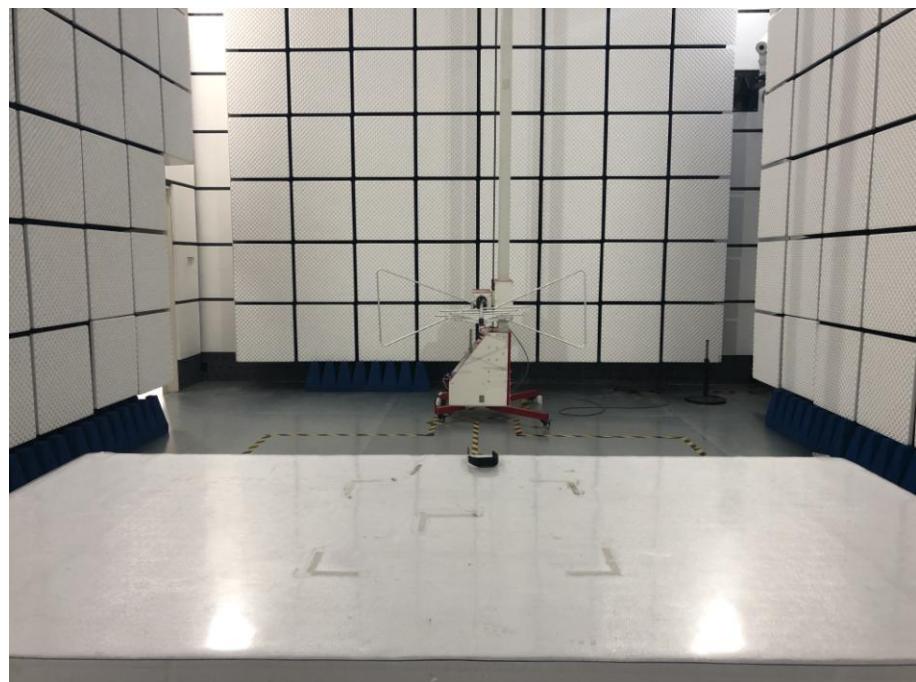

Conducted Emission






蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 35 of 43

9 EUT Constructional Details

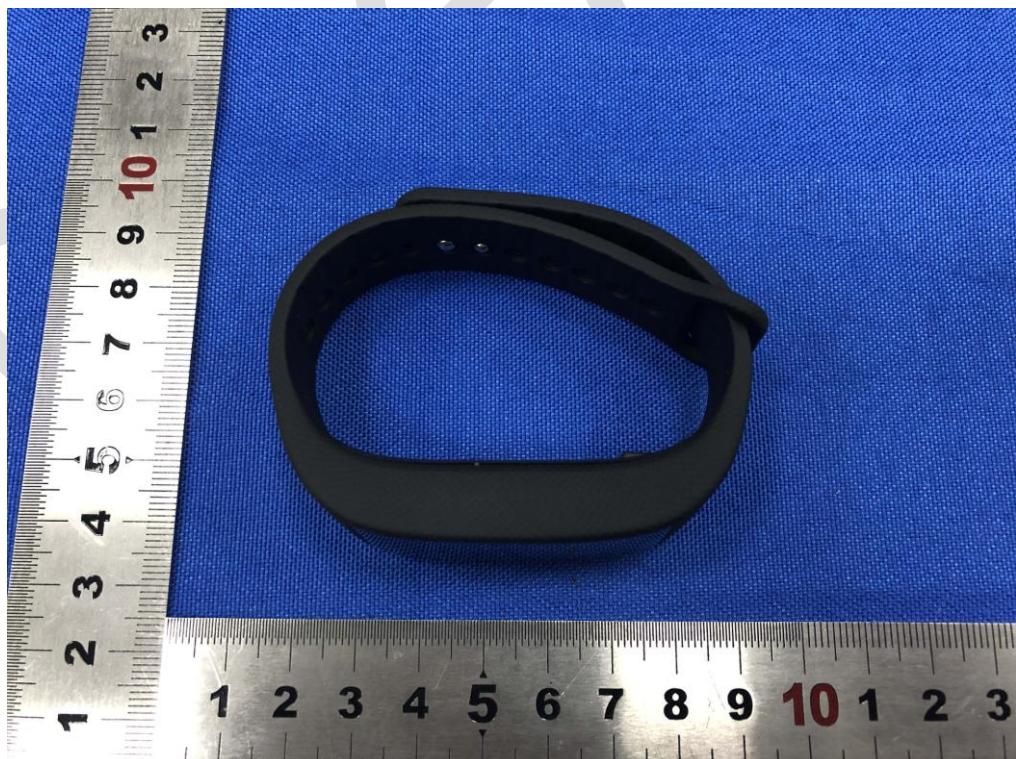



蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 36 of 43





蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 37 of 43





蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 38 of 43






蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 39 of 43


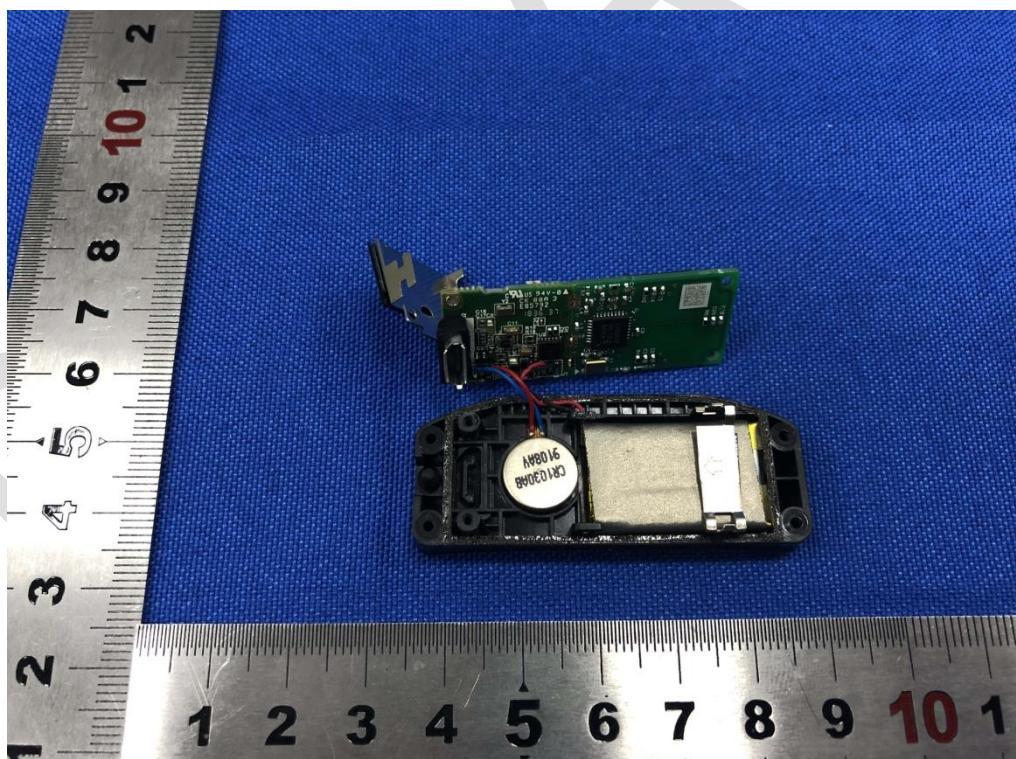




蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 40 of 43

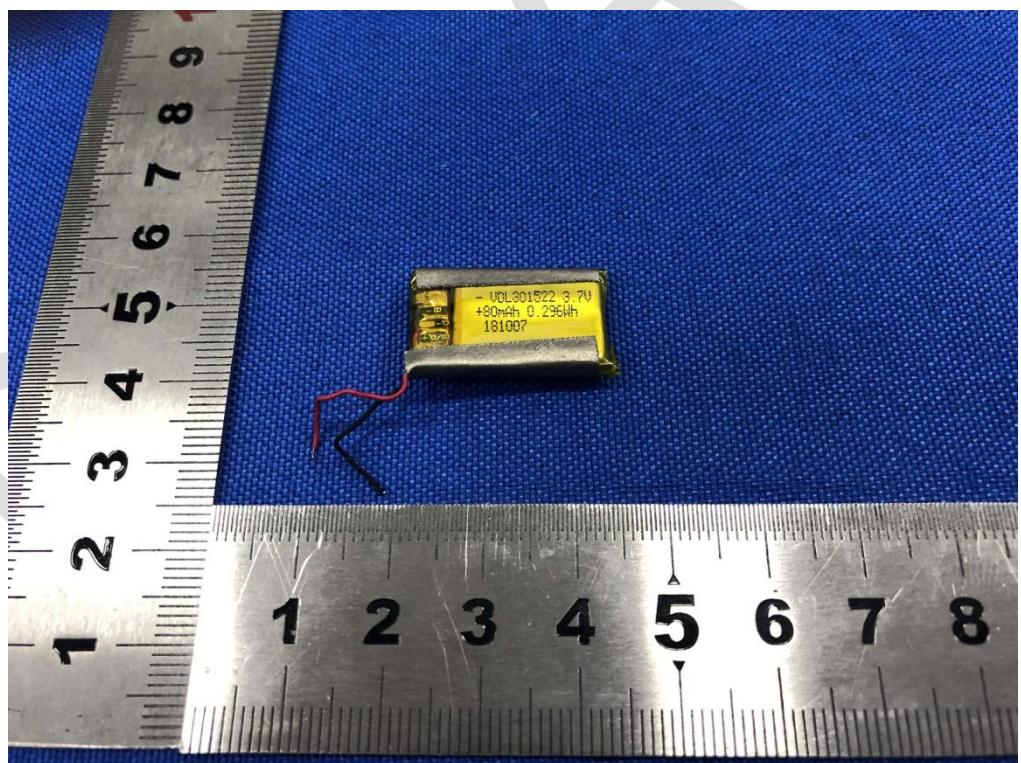
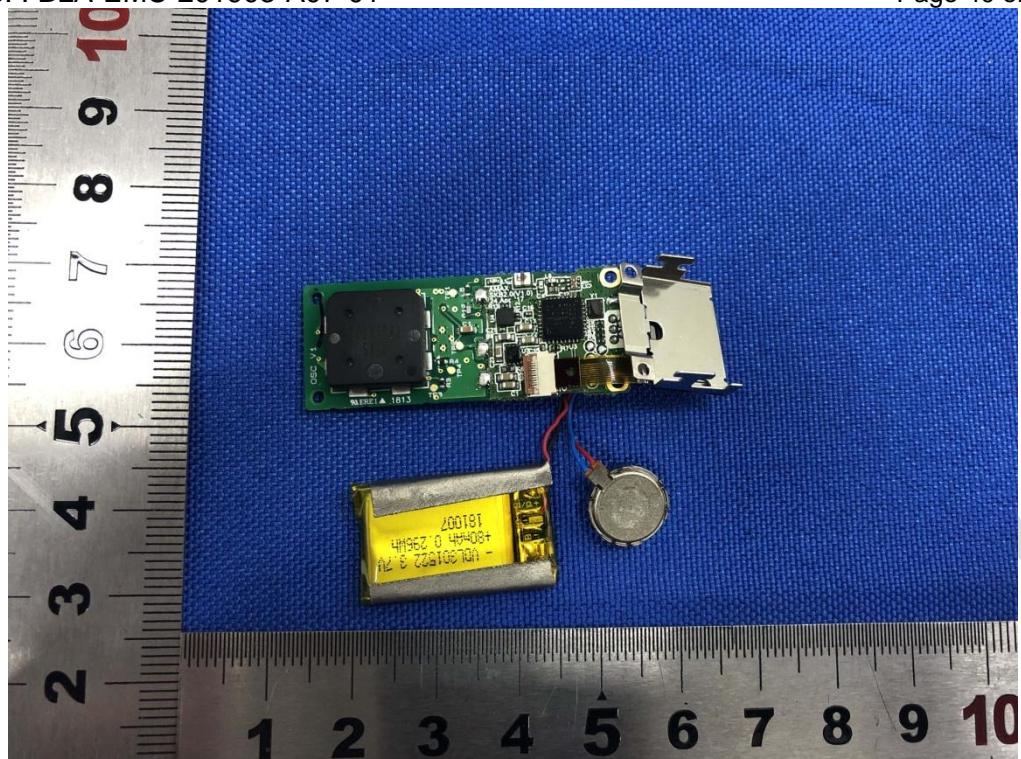




蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 41 of 43

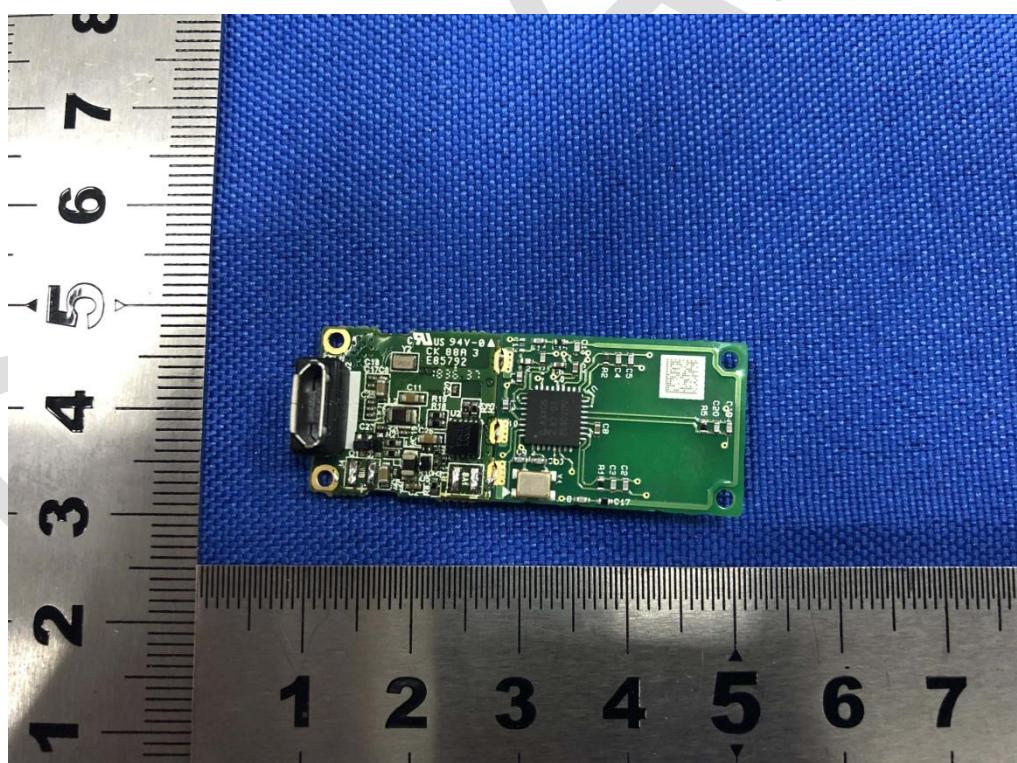
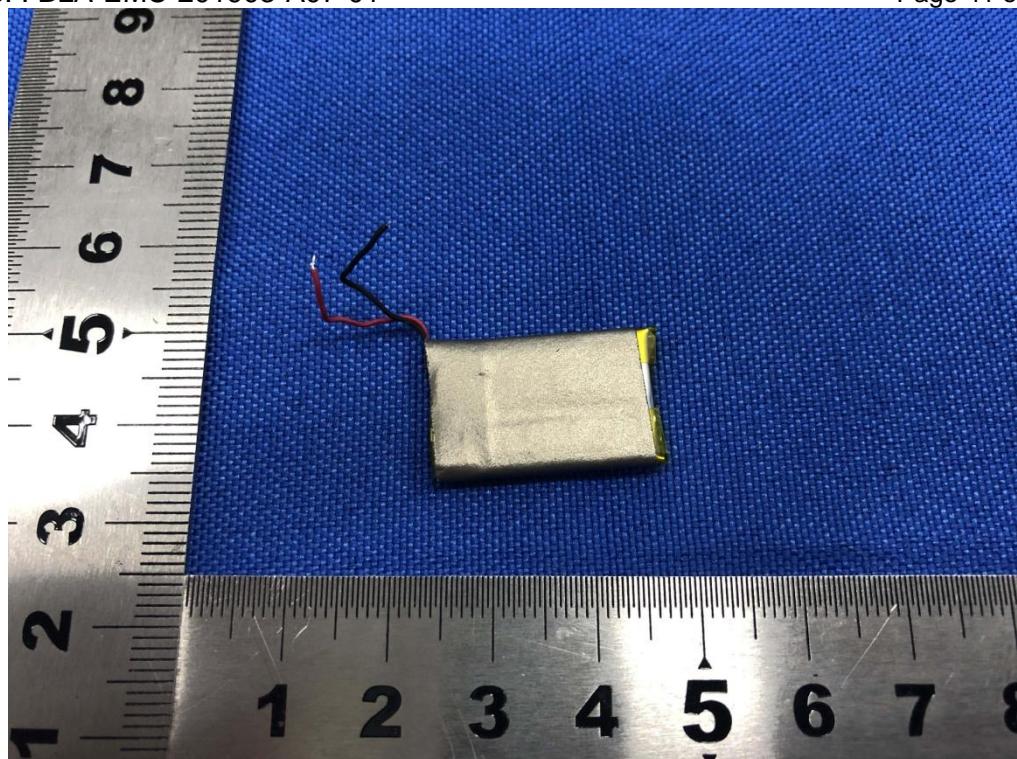




蓝亚 BLUE ASIA

Report No. : BLA-EMC-201903-A07-01

Page 42 of 43

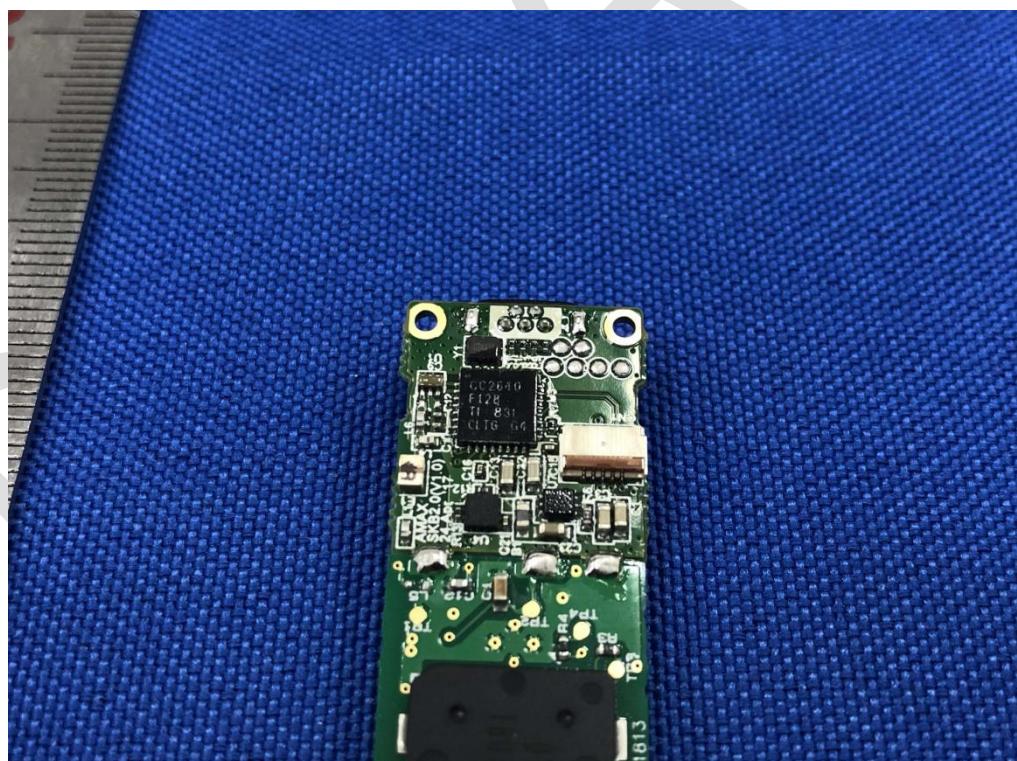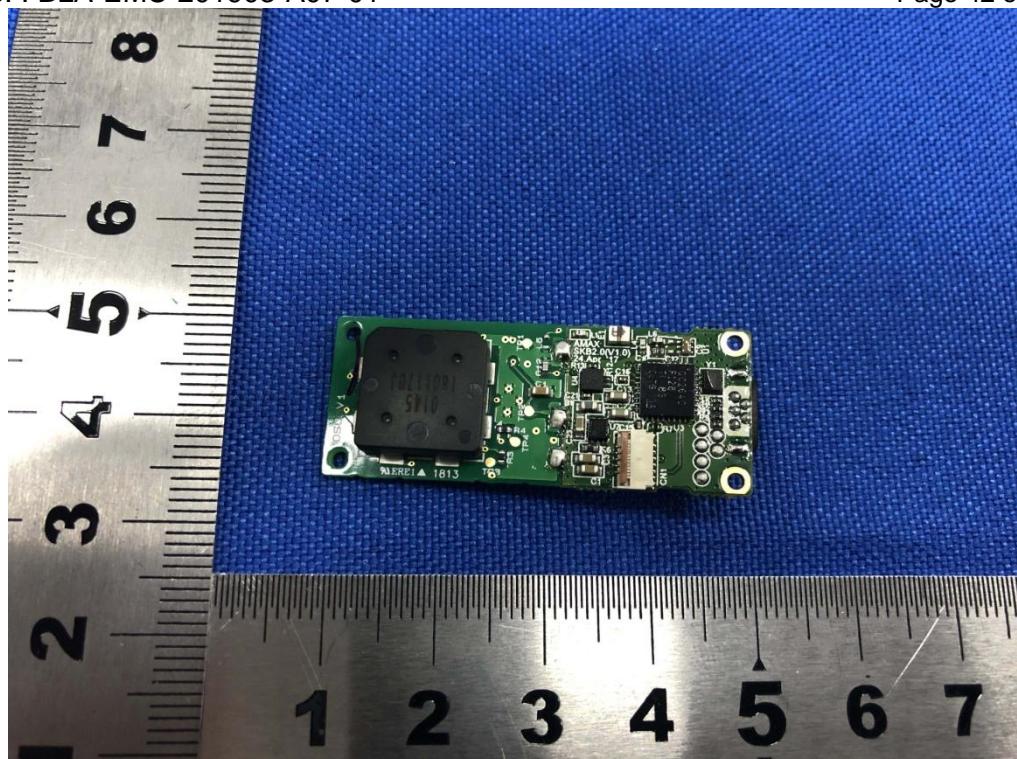

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia