



# FCC TEST REPORT

**Test report  
On Behalf of  
TransAct Technologies Inc  
For  
BOHA!™ tablet  
Model No.: 10 inch Tablet PC, BOHA!™ tablet**

**FCC ID: 2ASX3-BOHA**

**Prepared for :** TransAct Technologies Inc  
2319 Whitney Avenue, Suite 3B Hamden, CT 06518, USA

**Prepared By :** Shenzhen Tongzhou Testing Co.,Ltd  
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang  
Street, Longhua, Shenzhen, China

**Date of Test:** 2020/3/5 ~ 2020/3/25

**Date of Report:** 2020/3/26

**Report Number:** TZ191201191-E5

The test report apply only to the specific sample(s) tested under stated test conditions  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : **TransAct Technologies Inc**  
**Address** ..... : 2319 Whitney Avenue, Suite 3B Hamden, CT 06518, USA  
**Manufacture's Name** ..... : **ERHINO TECHNOLOGY LTD.**  
**Address** ..... : 2602A, Block A, World Trade Plaza, Fuhong Road, Futian Dist.,  
Shenzhen, Guangdong, China  
**Product description**  
**Trade Mark** ..... : BOHA!™  
**Product name** ..... : BOHA!™ tablet  
**Model and/or type reference** : 10 inch Tablet PC, BOHA!™ tablet  
**Standards** ..... : FCC Rules and Regulations Part 15 Subpart E Section 15.407  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : 2020/3/5 ~ 2020/3/25  
**Date of Issue** ..... : 2020/3/26  
**Test Result** ..... : **Pass**

Testing Engineer :

*Anna Hu*

(Anna Hu)

Technical Manager :

*Hugo Chen*

(Hugo Chen)

Authorized Signatory :

*Andy Zhang*

(Andy Zhang)



## Revision History

| Revision | Issue Date | Revisions     | Revised By |
|----------|------------|---------------|------------|
| 000      | 2020/3/26  | Initial Issue | Andy Zhang |
|          |            |               |            |
|          |            |               |            |



## TABLE OF CONTENTS

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                  | <b>5</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT) .....               | 5         |
| 1.2 EUT CONFIGURATION .....                          | 6         |
| 1.3. EXTERNAL I/O CABLE .....                        | 7         |
| 1.4. DESCRIPTION OF TEST FACILITY .....              | 7         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....  | 7         |
| 1.6. MEASUREMENT UNCERTAINTY .....                   | 8         |
| 1.7. DESCRIPTION OF TEST MODES .....                 | 8         |
| <b>2. TEST METHODOLOGY .....</b>                     | <b>9</b>  |
| 2.1. EUT CONFIGURATION.....                          | 9         |
| 2.2. EUT EXERCISE .....                              | 9         |
| 2.3. GENERAL TEST PROCEDURES .....                   | 9         |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>             | <b>10</b> |
| 3.1. JUSTIFICATION.....                              | 10        |
| 3.2. EUT EXERCISE SOFTWARE.....                      | 10        |
| 3.3. SPECIAL ACCESSORIES .....                       | 10        |
| 3.4. BLOCK DIAGRAM/SCHEMATICS.....                   | 10        |
| 3.5. EQUIPMENT MODIFICATIONS .....                   | 10        |
| 3.6. TEST SETUP .....                                | 10        |
| <b>4. SUMMARY OF TEST RESULTS.....</b>               | <b>11</b> |
| <b>5. TEST RESULT .....</b>                          | <b>12</b> |
| 5.1. ON TIME AND DUTY CYCLE .....                    | 12        |
| 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT..... | 14        |
| 5.3. POWER SPECTRAL DENSITY MEASUREMENT .....        | 16        |
| 5.4. 6dB EMISSION BANDWIDTH MEASUREMENT.....         | 20        |
| 5.5. RADIATED EMISSIONS MEASUREMENT .....            | 24        |
| 5.6. POWER LINE CONDUCTED EMISSIONS .....            | 36        |
| 5.7 UNDESIRABLE EMISSIONS MEASUREMENT .....          | 39        |
| <b>6. LIST OF MEASURING EQUIPMENTS .....</b>         | <b>45</b> |



## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                              |                                                                                                                                                                                                                                                                                                                                 |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT                          | : BOHA!™ tablet                                                                                                                                                                                                                                                                                                                 |
| Model Number                 | : 10 inch Tablet PC, BOHA!™ tablet                                                                                                                                                                                                                                                                                              |
| Model Declaration            | : All the same except for the model name                                                                                                                                                                                                                                                                                        |
| Test Model                   | : 10 inch Tablet PC                                                                                                                                                                                                                                                                                                             |
| Power Supply                 | : DC 3.8V by battery                                                                                                                                                                                                                                                                                                            |
| Hardware version             | : P23L_E221_V1.0                                                                                                                                                                                                                                                                                                                |
| Software version             | : 9.0                                                                                                                                                                                                                                                                                                                           |
| Sample ID                    | : TZ191201191-1#                                                                                                                                                                                                                                                                                                                |
| <b>Bluetooth</b>             |                                                                                                                                                                                                                                                                                                                                 |
| Bluetooth Version            | : V4.1+EDR                                                                                                                                                                                                                                                                                                                      |
| Channel Number               | : 79 Channels for Bluetooth BR/EDR(DSS)<br>: 40 Channels for BLE (DTS)                                                                                                                                                                                                                                                          |
| Modulation Technology        | : GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth BR/EDR (DSS)<br>: GFSK for BLE (DTS)                                                                                                                                                                                                                                               |
| Data Rates                   | : Bluetooth BR/EDR (DSS): 1/2/3Mbps<br>: BLE (DTS): 1Mbps                                                                                                                                                                                                                                                                       |
| Antenna Type And Gain        | Internal Antenna /1.4 dBi(Max.)                                                                                                                                                                                                                                                                                                 |
| <b>WiFi</b>                  |                                                                                                                                                                                                                                                                                                                                 |
| WLAN                         | : Supported IEEE 802.11a/b/g/n                                                                                                                                                                                                                                                                                                  |
| WLAN FCC Operation Frequency | : IEEE 802.11b:2412-2462MHz<br>: IEEE 802.11g:2412-2462MHz<br>: IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz / 5745-5825MHz<br>: IEEE 802.11n HT40:2422-2452MHz / 5190-5230MHz / 5755-5795MHz<br>: IEEE 802.11a: 5180-5240MHz / 5745-5825MHz                                                                                   |
| WLAN Channel Number          | : 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20)<br>: 7 Channels for 2422-2452MHz(IEEE 802.11n HT40)<br>: 4 Channels for 5180-5240MHz (IEEE 802.11a/n HT20)<br>: 2 Channels for 5190-5230MHz (IEEE 802.11n HT40)<br>: 5 Channels for 5745-5825MHz(IEEE 802.11a/n HT20)<br>: 2 Channels for 5755-5795MHz(IEEE 802.11n HT40) |
| WLAN Modulation Technology   | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>: IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>: IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)                                                                                                                                  |
| Antenna Type And Gain        | : Internal Antenna /1.4 dBi(Max.)                                                                                                                                                                                                                                                                                               |
| <b>GSM</b>                   |                                                                                                                                                                                                                                                                                                                                 |
| Support Bands                | : <input checked="" type="checkbox"/> GSM 850<br>: <input checked="" type="checkbox"/> PCS 1900<br>: <input checked="" type="checkbox"/> GSM 900<br>: <input checked="" type="checkbox"/> PCS 1800                                                                                                                              |
| GSM FCC Operation Frequency  | : GSM850(UL: 824 – 849 MHz/DL: 869 – 894 MHz)<br>: GSM1900(UL: 1850 –1910 MHz/DL: 1930 – 1990 MHz)                                                                                                                                                                                                                              |



Channel Separation : 0.2MHz  
Modulation Technology : GMSK,8PSK  
Antenna Type And Gain : Internal Antenna  
: GSM850: 0.8dBi  
: PCS1900: 1.3dBi

#### UTRA

Support Bands : ☒ WCDMA BAND II  
☒ WCDMA BAND V  
☒ WCDMA BAND I  
☒ WCDMA BAND VIII

UTRA FCC Operation Frequency : WCDMA BAND V (UL: 824 – 849 MHz/DL: 869 – 894 MHz)  
: WCDMA BAND II (UL: 1850 – 1910 MHz/DL: 1930 – 1990 MHz)

Channel Separation : 0.2MHz  
Modulation Technology : OFDM (16QAM, QPSK)  
Antenna Type And Gain : Internal Antenna  
: WCDMA BAND II: 1.1dBi  
: WCDMA BAND V: 1.2dBi

#### E-UTRA

Support Bands : ☒ FDD Band 2  
☒ FDD Band 4  
☒ FDD Band 12  
☒ FDD Band 17

E-UTRA FCC Operation Frequency : ☒ FDD Band 2 (UL: 1850 – 1910 MHz/DL: 1930 – 1990 MHz)  
: ☒ FDD Band 4 (UL: 1710 – 1755 MHz/DL: 2110 – 2155 MHz)  
: ☒ FDD Band 12 (UL: 699 – 716 MHz/DL: 729 – 746 MHz)  
: ☒ FDD Band 17 (UL: 704 – 716 MHz/DL: 734 – 746 MHz)

Channel Separation : 0.1 MHz  
Modulation Technology : OFDM (16QAM, QPSK)  
Antenna Type And Gain : Internal Antenna  
: FDD Band 2: 1.4dBi  
: FDD Band 4: 1.4dBi  
: FDD Band 12: 1.2dBi  
: FDD Band 17: 1.4dBi

*Note1: Antenna position refer to EUT Photos.*

## 1.2 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☒ supplied by the lab   ☐ supplied by the manufacturer

| Manufacturer | Description | Model           | Serial Number | Certificate |
|--------------|-------------|-----------------|---------------|-------------|
| GuaiKaiYuan  | Adapter     | GKYPG0200050US2 | N/A           | N/A         |



### 1.3. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| USB Port             | 1        | N/A   |
| Earphone Port        | 1        | N/A   |

### 1.4. Description of Test Facility

Designation Number: CN1275  
Test Firm Registration Number: 167722

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010

### 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the Shenzhen Tongzhou Testing Co.,Ltd’s quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



## 1.6. Measurement Uncertainty

| Test Item              |   | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty  | : | 9KHz~30MHz      | ±3.08dB     | (1)  |
|                        |   | 30MHz~1000MHz   | ±4.42dB     | (1)  |
|                        |   | 1GHz~40GHz      | ±4.06dB     | (1)  |
| Conduction Uncertainty | : | 150kHz~30MHz    | ±2.23dB     | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be IEEE 802.11n HT20 mode (High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11n HT20 mode (High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11a Mode : 6 Mbps, OFDM.  
IEEE 802.11n HT20 Mode: MCS0, OFDM.  
IEEE 802.11n HT40 Mode: MCS0, OFDM.

### Antenna & Bandwidth

| Antenna        | Single (Port.1)                     |                                     |                                     | Two (Port.1 + Port.2)    |                          |                          |
|----------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|
| Bandwidth Mode | 20MHz                               | 40MHz                               | 80MHz                               | 20MHz                    | 40MHz                    | 80MHz                    |
| IEEE 802.11a   | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| IEEE 802.11n   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| IEEE 802.11ac  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |





## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen Tongzhou Testing Co.,Ltd

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v02r01 and KDB 6622911 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 2.4. Test Sample

The application provides 1 sample to meet requirement;

| Sample ID      | Description                           |
|----------------|---------------------------------------|
| TZ191201191-1# | Engineer sample – continuous transmit |



### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software(MTK NON-SIGNAL) provided by application.

#### 3.3. Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/<br>unshielded | Notes |
|-----|-----------|--------------|-----------|------------|--------|-------------------------|-------|
| 1   | /         | /            | /         | /          | /      | /                       | /     |

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen Tongzhou Testing Co.,Ltd has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.



## 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart E |                                |           |
|-----------------------------------------|--------------------------------|-----------|
| FCC Rules                               | Description of Test            | Result    |
| §15.407(a)                              | Maximum Conducted Output Power | Compliant |
| §15.407(a)                              | Power Spectral Density         | Compliant |
| §15.407(e)                              | 6dB Bandwidth                  | Compliant |
| §15.407(b)                              | Radiated Emissions             | Compliant |
| §15.407(b)                              | Band edge Emissions            | Compliant |
| §15.407(g)                              | Frequency Stability            | Compliant |
| §15.207(a)                              | Line Conducted Emissions       | Compliant |
| §15.203                                 | Antenna Requirements           | Compliant |
| §2.1093                                 | RF Exposure                    | Compliant |

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

#### 5.1.3. Test Procedures

1. Set the Centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=10MHz, VBW=10MHz, Sweep time=100ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout



#### 5.1.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 5.1.6. Test result


| Mode              | On Time Points | Total Sweep points | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/B Minimum VBW (KHz) |
|-------------------|----------------|--------------------|----------------|-----------------------------------|-----------------------|
| IEEE 802.11a      | 8001           | 8001               | 100.0          | 0.00                              | 0.010                 |
| IEEE 802.11n HT20 | 8001           | 8001               | 100.0          | 0.00                              | 0.010                 |
| IEEE 802.11n HT40 | 8001           | 8001               | 100.0          | 0.00                              | 0.010                 |




### On Time and Duty Cycle

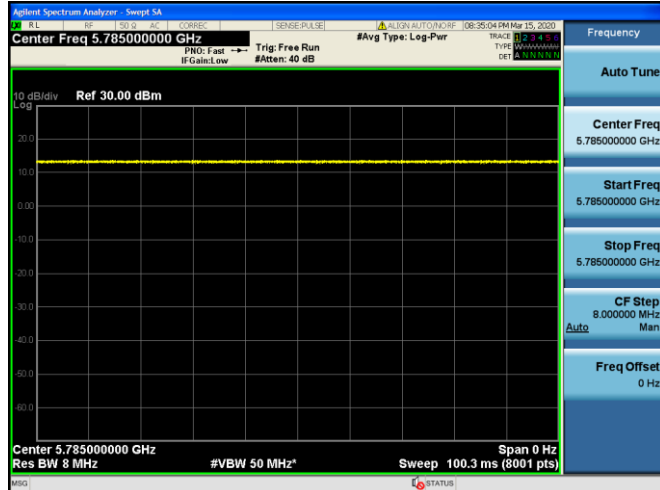

IEEE 802.11a

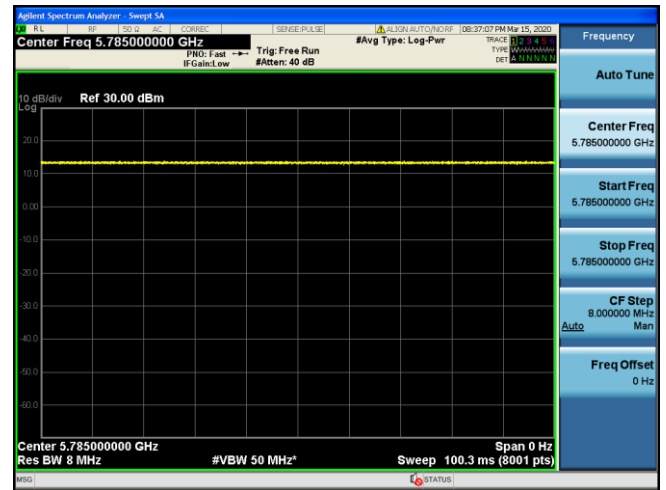

IEEE 802.11n HT20

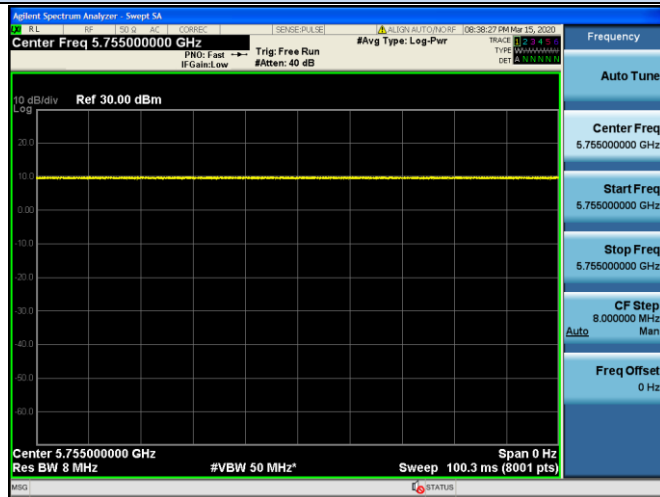

IEEE 802.11n HT40

Blank

## 5.2. Maximum Conducted Output Power Measurement

### 5.2.1. Standard Applicable

#### For 5725~5850MHz

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the power meter.


### 5.2.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

According to KDB 789033 D02 Section 3 (a) Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
  - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
  - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
  - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding  $10 \log (1/x)$  where  $x$  is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25%).

### 5.2.4. Test Setup Layout

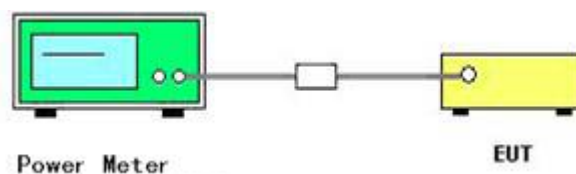



### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.2.6. Test Result of Maximum Conducted Output Power

|               |         |                |                |
|---------------|---------|----------------|----------------|
| Temperature   | 22.8℃   | Humidity       | 50%            |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n |

| Test Mode         | Channel | Frequency (MHz) | Measured Conducted Average Power (dBm) | Duty Cycle factor (dB) | Report Conducted Average Power (dBm) | Limits (dBm) | Verdict |
|-------------------|---------|-----------------|----------------------------------------|------------------------|--------------------------------------|--------------|---------|
| IEEE 802.11a      | 149     | 5745            | 17.014                                 | 0.00                   | 17.014                               | 30           | PASS    |
|                   | 157     | 5785            | 16.159                                 | 0.00                   | 16.159                               |              |         |
|                   | 165     | 5825            | 16.548                                 | 0.00                   | 16.548                               |              |         |
| IEEE 802.11n HT20 | 149     | 5745            | 16.125                                 | 0.00                   | 16.125                               | 30           | PASS    |
|                   | 157     | 5785            | 16.461                                 | 0.00                   | 16.461                               |              |         |
|                   | 165     | 5825            | 16.240                                 | 0.00                   | 16.240                               |              |         |
| IEEE 802.11n HT40 | 151     | 5755            | 16.582                                 | 0.00                   | 16.582                               | 30           | PASS    |
|                   | 159     | 5795            | 16.347                                 | 0.00                   | 16.347                               |              |         |

**Remark:**

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40
4. Report conducted average power = measured conducted average power + Duty Cycle factor;

## 5.3. Power Spectral Density Measurement

### 5.3.1. Standard Applicable

#### **For 5725~5850MHz**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 5.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

### 5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 1 MHz.
4. Set the VBW  $\geq 3 \times$  RBW
5. Span=Encompass the entire emissions bandwidth (EBW) of the signal
6. Detector = RMS.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log (500 \text{ kHz/RBW})$  to the measured result, whereas RBW ( $< 500 \text{ kHz}$ ) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
11. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log (1\text{MHz/RBW})$  to the measured result, whereas RBW ( $< 1 \text{ MHz}$ ) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
12. Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.



### 5.3.4. Test Setup Layout

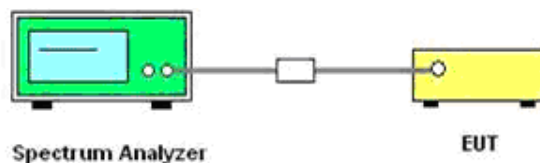

### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.3.6. Test Result of Power Spectral Density

|               |         |                |              |
|---------------|---------|----------------|--------------|
| Temperature   | 22.8°C  | Humidity       | 50%          |
| Test Engineer | Anna Hu | Configurations | 802.11a/n/ac |

| Test Mode         | Channel | Frequency (MHz) | Measured Conducted PSD (dBm/500KHz) | Duty Cycle factor (dB) | RBW factor (dB) | Report Max Conducted PSD (dBm/500KHz) | Limits (dBm/500KHz) | Verdict |
|-------------------|---------|-----------------|-------------------------------------|------------------------|-----------------|---------------------------------------|---------------------|---------|
| IEEE 802.11a      | 149     | 5745            | 10.929                              | 0.00                   | 0               | 10.929                                | 30                  | PASS    |
|                   | 157     | 5785            | 9.516                               | 0.00                   | 0               | 9.516                                 |                     |         |
|                   | 165     | 5825            | 10.706                              | 0.00                   | 0               | 10.706                                |                     |         |
| IEEE 802.11n HT20 | 149     | 5745            | 10.009                              | 0.00                   | 0               | 10.009                                | 30                  | PASS    |
|                   | 157     | 5785            | 10.101                              | 0.00                   | 0               | 10.101                                |                     |         |
|                   | 165     | 5825            | 9.925                               | 0.00                   | 0               | 9.925                                 |                     |         |
| IEEE 802.11n HT40 | 151     | 5755            | 6.421                               | 0.00                   | 0               | 6.421                                 | 30                  | PASS    |
|                   | 159     | 5795            | 6.406                               | 0.00                   | 0               | 6.406                                 |                     |         |


#### Remark:

1. Measured power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Directional Gain = 0.53 dBi < 6dBi; no need reduce power spectrum density limit;
5. Report conducted PSD = measured conducted PSD + Duty Cycle factor + RBW factor;
6. Please refer to following test plots;




## Power Spectral Density


## IEEE 802.11a

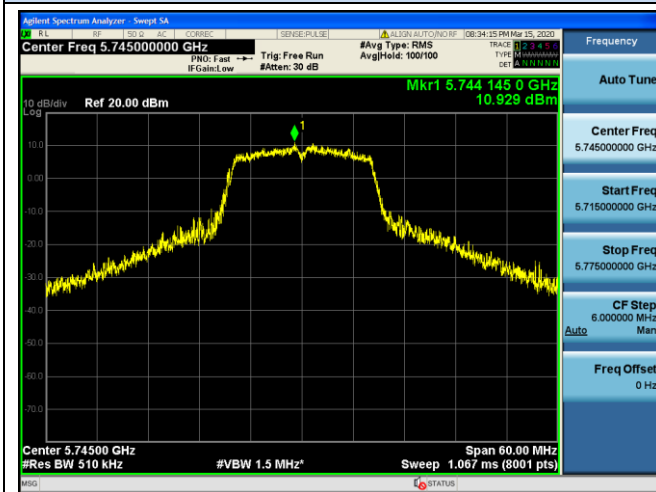


## IEEE 802.11n HT20

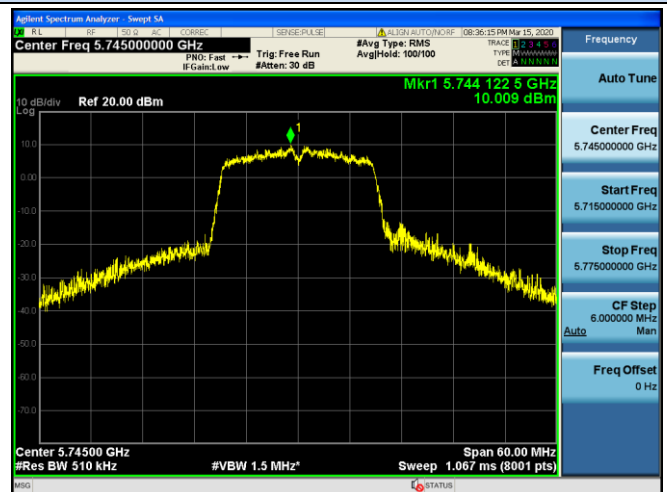


## Channel 149 / 5745 MHz

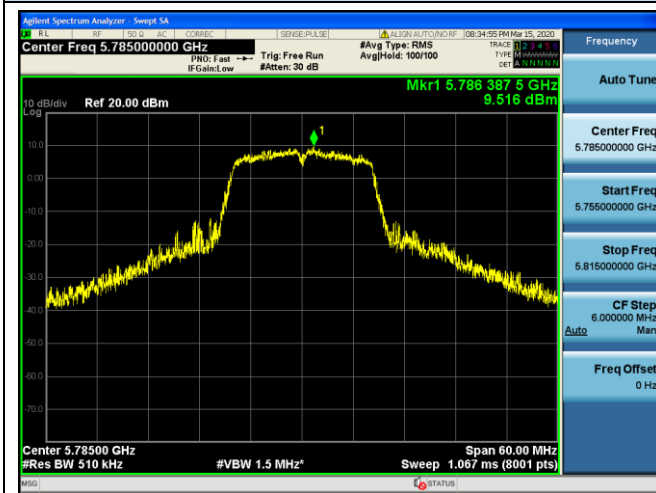


## Channel 149 / 5745 MHz

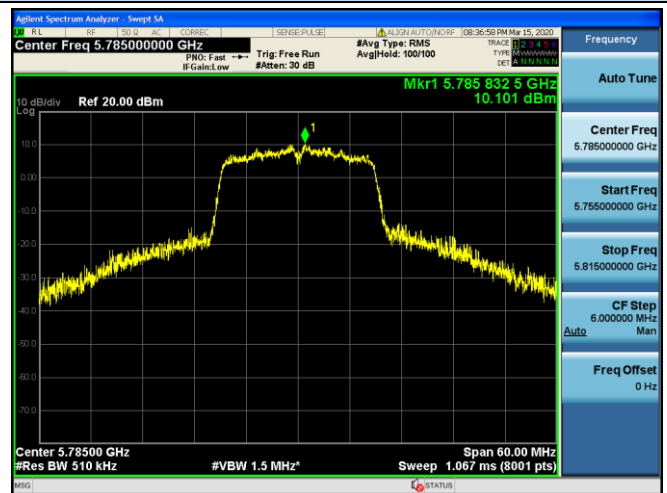

## Channel 157 / 5785 MHz

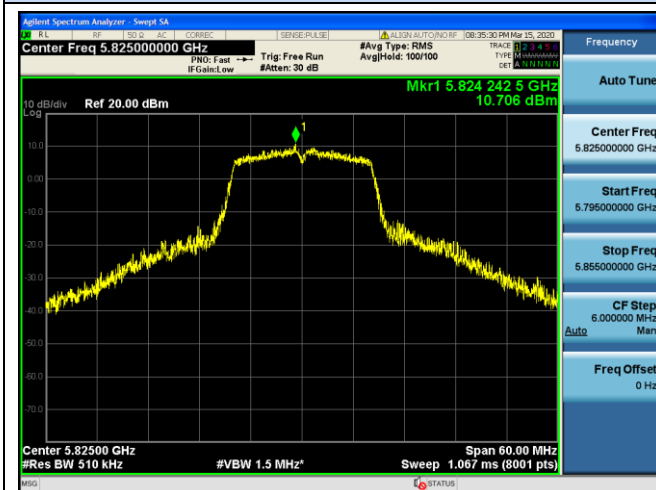

## Channel 157 / 5785 MHz

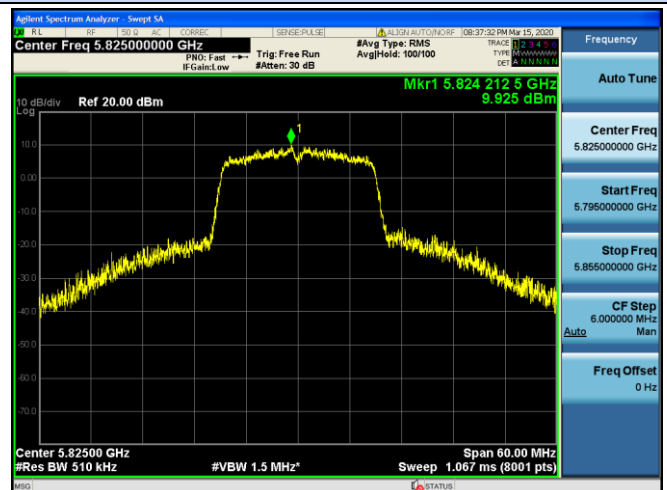


## Channel 165 / 5825 MHz


## Channel 165 / 5825 MHz



Power Spectral Density  
IEEE 802.11n HT40

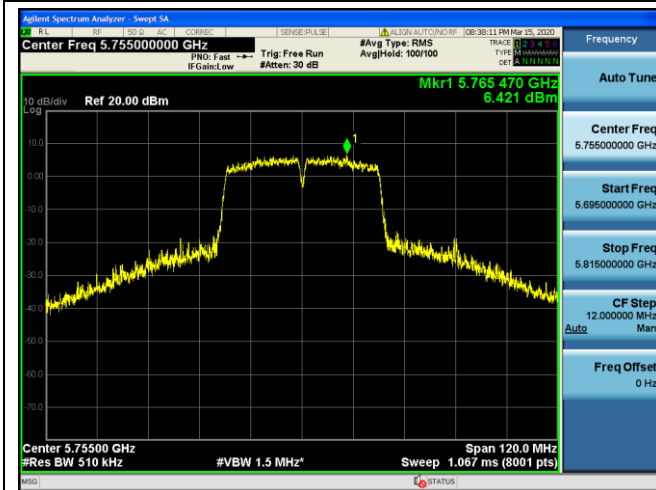

Channel 151 / 5755 MHz

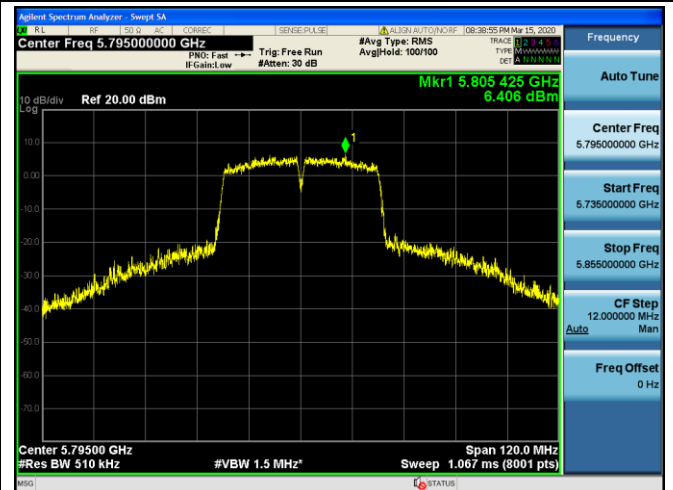

Channel 159 / 5795 MHz

## 5.4. 6dB Emission Bandwidth Measurement

### 5.4.1. Standard Applicable

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the Spectrum Analyzer.


| Spectrum Parameter | Setting          |
|--------------------|------------------|
| Attenuation        | Auto             |
| Span               | > 26dB Bandwidth |
| Detector           | Peak             |
| Trace              | Max Hold         |
| Sweep Time         | 100ms            |

5

### 5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Set the RBW = 100 KHz
3. Set the VBW > RBW
4. Measured the spectrum width with power higher than 6dB below carrier.

### 5.4.4. Test Setup Layout

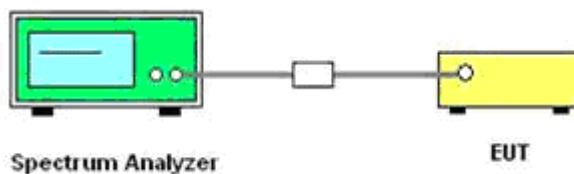

### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 5.4.6. Test Result of 6dB Occupied Bandwidth

|               |         |                |                |
|---------------|---------|----------------|----------------|
| Temperature   | 22.8°C  | Humidity       | 50%            |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n |

| Test Mode         | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limits (MHz) | Verdict |
|-------------------|---------|-----------------|---------------------|--------------|---------|
| IEEE 802.11a      | 149     | 5745            | 16.397              | ≥0.500       | PASS    |
|                   | 157     | 5785            | 16.388              |              |         |
|                   | 163     | 5825            | 16.383              |              |         |
| IEEE 802.11n HT20 | 149     | 5745            | 17.649              | ≥0.500       | PASS    |
|                   | 157     | 5785            | 17.649              |              |         |
|                   | 163     | 5825            | 17.649              |              |         |
| IEEE 802.11n HT40 | 151     | 5755            | 36.375              | ≥0.500       | PASS    |
|                   | 159     | 5795            | 36.359              |              |         |


*Remark:*

1. Measured 6dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40
4. Please refer to following test plots;




## 6dB Bandwidth


## IEEE 802.11a

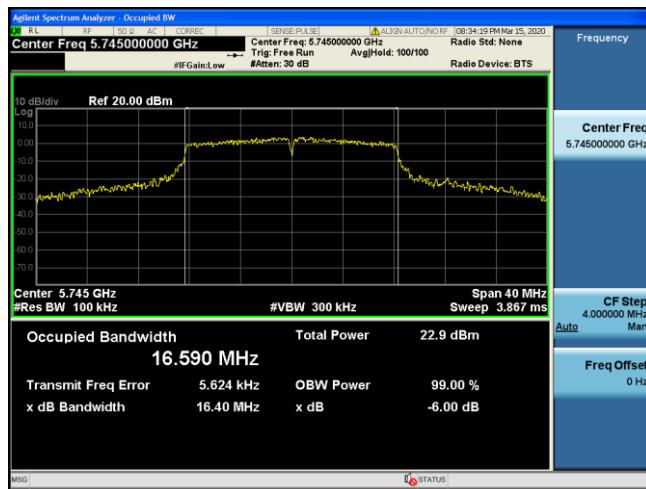


## IEEE 802.11n HT20

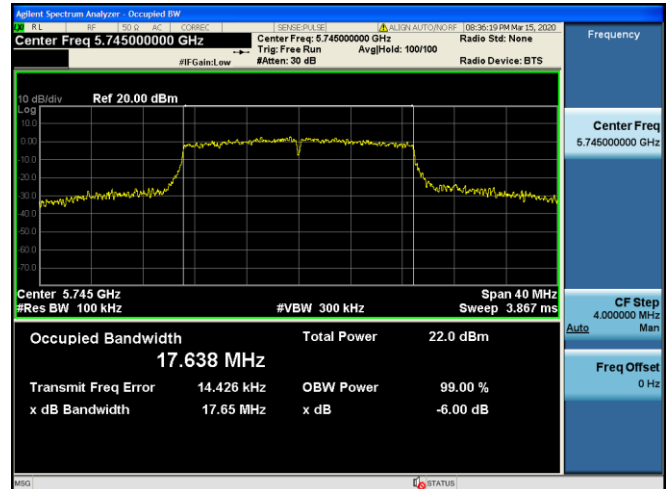


## Channel 149 / 5745 MHz

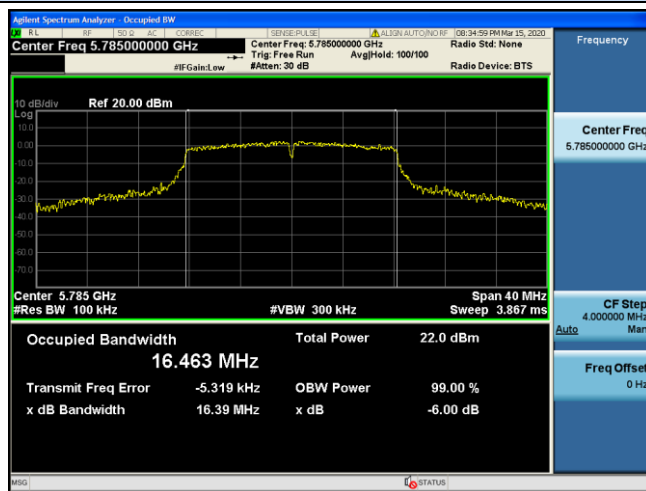


## Channel 149 / 5745 MHz

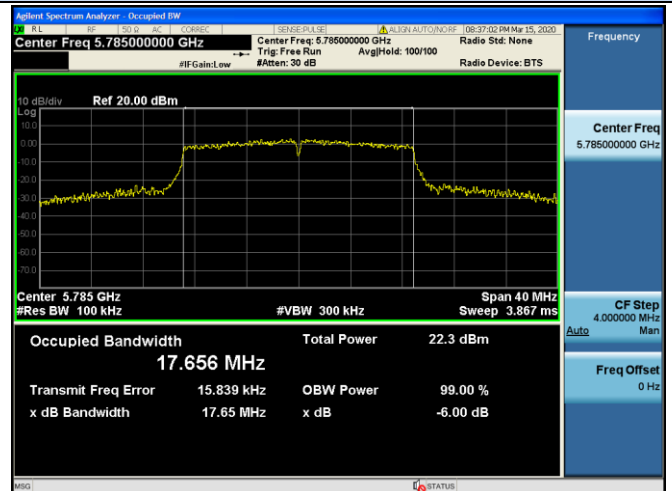

## Channel 157 / 5785 MHz

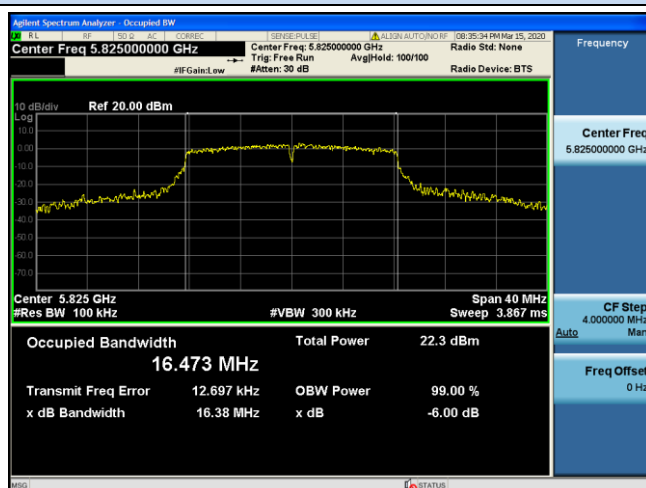

## Channel 157 / 5785 MHz

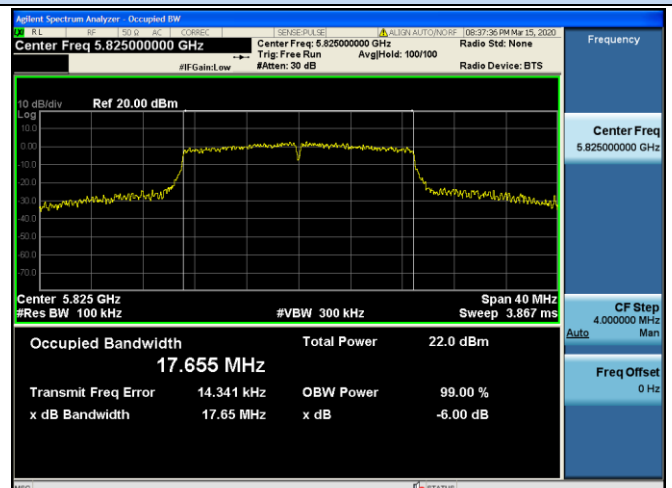

## Channel 165 / 5825 MHz




## Channel 165 / 5825 MHz





6dB Bandwidth  
IEEE 802.11n HT40

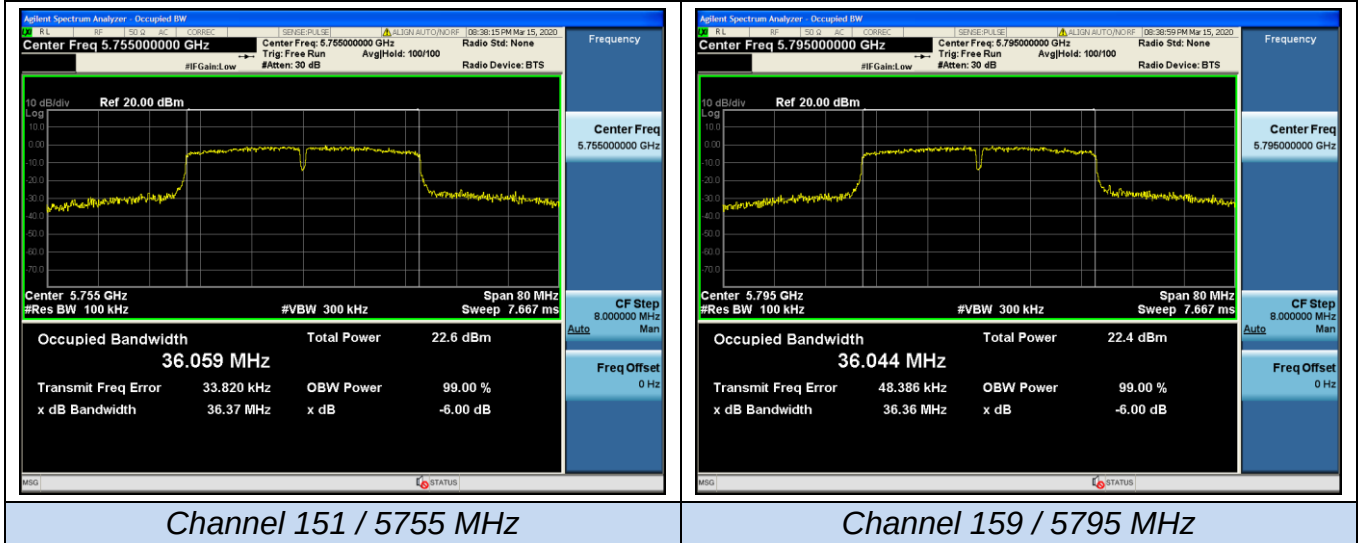



## 5.5. Radiated Emissions Measurement

### 5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (\2\)       |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz(68.2dBuV/m at 3m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz(105.2dBuV/m at 3m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6(110.8dBuV/m at 3m) dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz(122.2dBuV/m at 3m) at the band edge.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                           |
|-------------------------------------------|---------------------------------------------------|
| Attenuation                               | Auto                                              |
| Start Frequency                           | 1000 MHz                                          |
| Stop Frequency                            | 10 <sup>m</sup> carrier harmonic                  |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |





| Receiver Parameter     | Setting                                    |
|------------------------|--------------------------------------------|
| Attenuation            | Auto                                       |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG  |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP   |

### 5.5.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### **Premeasurement:**


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### **Final measurement:**


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.5.4. Test Setup Layout


For radiated emissions below 30MHz

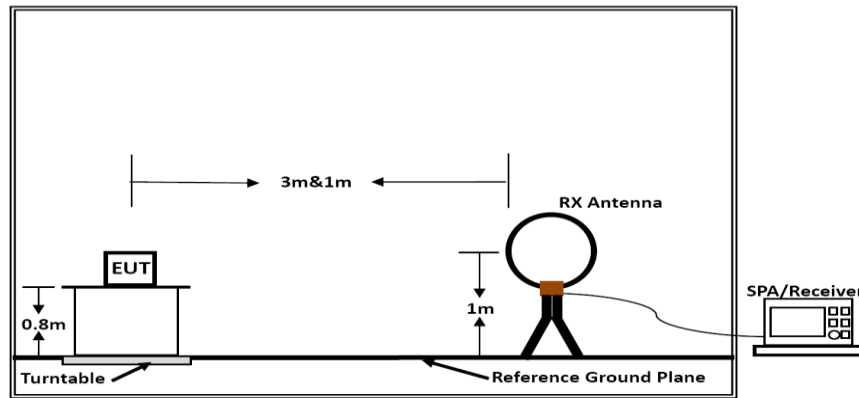

**Below 30MHz**

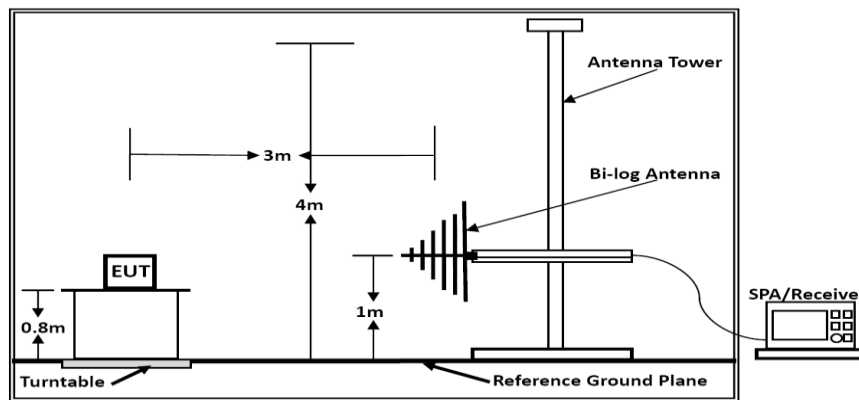

**Below 1GHz**

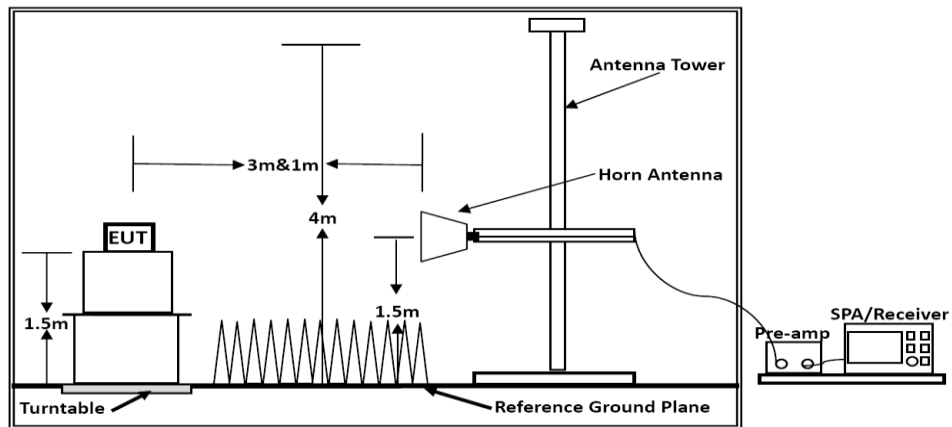

**Above 1GHz**

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



#### 5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

|               |         |                |                   |
|---------------|---------|----------------|-------------------|
| Temperature   | 24.5℃   | Humidity       | 56%               |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Over Limit<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 5.5.7. Results of Radiated Emissions (30MHz~1GHz)

|               |         |                |                       |
|---------------|---------|----------------|-----------------------|
| Temperature   | 24.5℃   | Humidity       | 56%                   |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a, 5745MHz |

*The Worst Test result for IEEE 802.11a, 5745MHz*



## Vertical

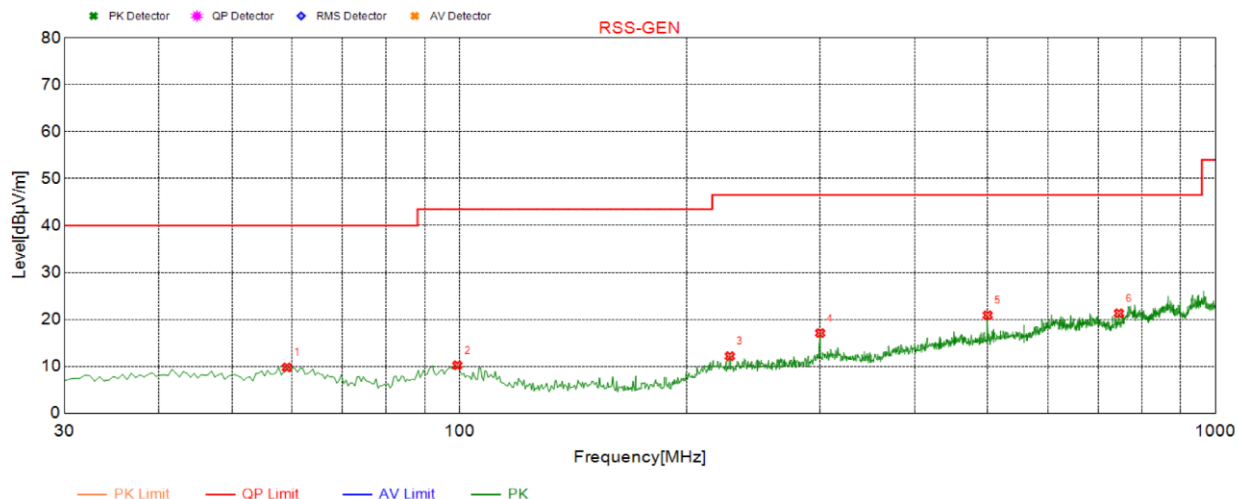

## Suspected List

| NO. | Freq.<br>[MHz] | Result<br>Level<br>[dBμV/m] | Factor<br>[dB/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle [°] | Polarity |
|-----|----------------|-----------------------------|------------------|-------------------|----------------|----------------|-----------|----------|
| 1   | 59.100         | 9.77                        | -15.51           | 40.00             | 30.23          | 100            | 338       | Vertical |
| 2   | 99.355         | 10.21                       | -16.09           | 43.50             | 33.29          | 100            | 212       | Vertical |
| 3   | 227.880        | 12.15                       | -14.57           | 46.50             | 34.35          | 100            | 170       | Vertical |
| 4   | 300.145        | 17.09                       | -12.81           | 46.50             | 29.41          | 200            | 280       | Vertical |
| 5   | 499.965        | 20.89                       | -8.06            | 46.50             | 25.61          | 100            | 150       | Vertical |
| 6   | 745.860        | 21.31                       | -3.68            | 46.50             | 25.19          | 100            | 240       | Vertical |

## Note:


Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBμV/m) = 20 log Emission level (μV/m).

Margin(dB)=Limit(dBμV/m) – Result Level(dBμV/m)



## Horizontal

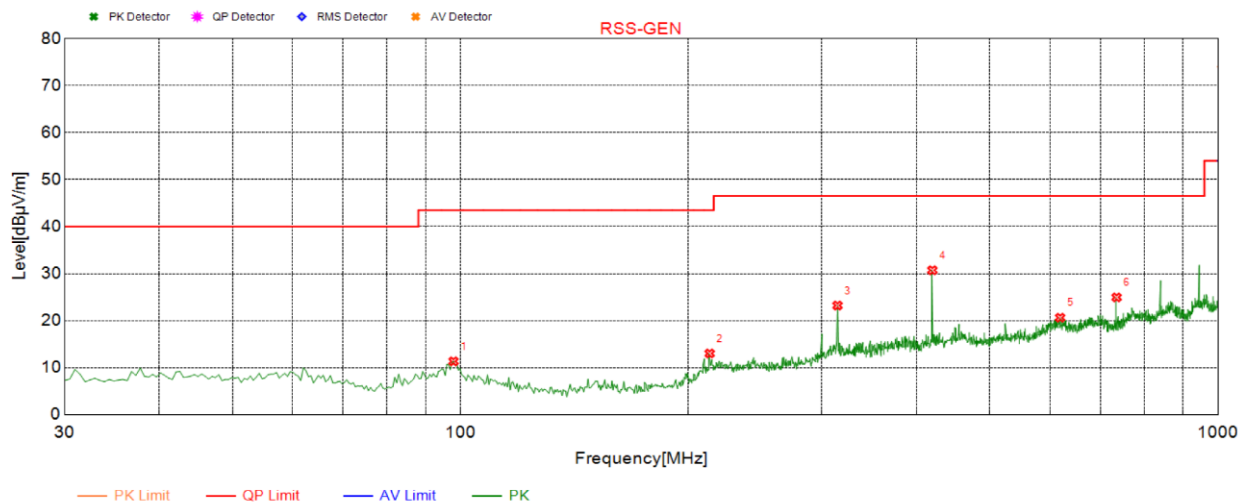

| Suspected List |             |                       |               |                |             |             |          |            |
|----------------|-------------|-----------------------|---------------|----------------|-------------|-------------|----------|------------|
| NO.            | Freq. [MHz] | Result Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle[°] | Polarity   |
| 1              | 97.900      | 11.32                 | -16.34        | 43.50          | 32.18       | 300         | 187      | Horizontal |
| 2              | 213.330     | 13                    | -15.02        | 43.50          | 30.50       | 300         | 232      | Horizontal |
| 3              | 314.695     | 23.2                  | -12.41        | 46.50          | 23.30       | 100         | 82       | Horizontal |
| 4              | 419.940     | 30.71                 | -9.64         | 46.50          | 15.79       | 100         | 85       | Horizontal |
| 5              | 619.275     | 20.62                 | -5.35         | 46.50          | 25.88       | 300         | 29       | Horizontal |
| 6              | 735.190     | 24.94                 | -3.84         | 46.50          | 21.56       | 100         | 46       | Horizontal |

### Note:

Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBμV/m) = 20 log Emission level (μV/m).

Margin(dB)=Limit(dBμV/m) – Result Level(dBμV/m)





## 5.5.8. Results for Radiated Emissions (Above 1GHz)

Remark: Measured all modes and recorded worst case;

*IEEE 802.11a**Channel 149 / 5745 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over<br>limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|---------------------|---------|------------|
| 17.235      | 52.90                 | 33.23               | 35.04             | 3.91          | 55.00                     | 68.20                   | -13.20              | Peak    | Horizontal |
| 17.235      | 42.31                 | 33.23               | 35.04             | 3.91          | 44.41                     | 54.00                   | -9.59               | Average | Horizontal |
| 17.235      | 51.31                 | 33.23               | 35.04             | 3.91          | 53.41                     | 68.20                   | -14.79              | Peak    | Vertical   |
| 17.235      | 44.15                 | 33.23               | 35.04             | 3.91          | 46.25                     | 54.00                   | -7.75               | Average | Vertical   |

*Channel 157 / 5785 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.355      | 53.27                 | 33.27               | 35.15             | 3.93          | 55.32                     | 68.20                   | -12.88           | Peak    | Horizontal |
| 17.355      | 42.01                 | 33.27               | 35.15             | 3.93          | 44.06                     | 54.00                   | -9.94            | Average | Horizontal |
| 17.355      | 52.38                 | 33.27               | 35.15             | 3.93          | 54.43                     | 68.20                   | -13.77           | Peak    | Vertical   |
| 17.355      | 41.57                 | 33.27               | 35.15             | 3.93          | 43.62                     | 54.00                   | -10.38           | Average | Vertical   |

*Channel 163 / 5825 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.475      | 53.07                 | 33.32               | 35.14             | 3.97          | 55.22                     | 68.20                   | -12.98           | Peak    | Horizontal |
| 17.475      | 41.21                 | 33.32               | 35.14             | 3.97          | 43.36                     | 54.00                   | -10.64           | Average | Horizontal |
| 17.475      | 54.01                 | 33.32               | 35.14             | 3.97          | 56.16                     | 68.20                   | -12.04           | Peak    | Vertical   |
| 17.475      | 42.35                 | 33.32               | 35.14             | 3.97          | 44.50                     | 54.00                   | -9.50            | Average | Vertical   |

*IEEE 802.11n-HT20**Channel 149 / 5745 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.235      | 51.15                 | 33.23               | 35.04             | 3.91          | 53.25                     | 68.20                   | -14.95           | Peak    | Horizontal |
| 17.235      | 40.11                 | 33.23               | 35.04             | 3.91          | 42.21                     | 54.00                   | -11.79           | Average | Horizontal |
| 17.235      | 51.93                 | 33.23               | 35.04             | 3.91          | 54.03                     | 68.20                   | -14.17           | Peak    | Vertical   |
| 17.235      | 40.11                 | 33.23               | 35.04             | 3.91          | 42.21                     | 54.00                   | -11.79           | Average | Vertical   |

*Channel 157 / 5785 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.355      | 55.96                 | 33.27               | 35.15             | 3.93          | 58.01                     | 68.20                   | -10.19           | Peak    | Horizontal |
| 17.355      | 44.32                 | 33.27               | 35.15             | 3.93          | 46.37                     | 54.00                   | -7.63            | Average | Horizontal |
| 17.355      | 53.12                 | 33.27               | 35.15             | 3.93          | 55.17                     | 68.20                   | -13.03           | Peak    | Vertical   |
| 17.355      | 41.72                 | 33.27               | 35.15             | 3.93          | 43.77                     | 54.00                   | -10.23           | Average | Vertical   |

*Channel 163 / 5825 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.475      | 53.42                 | 33.32               | 35.14             | 3.97          | 55.57                     | 68.20                   | -12.63           | Peak    | Horizontal |
| 17.475      | 42.60                 | 33.32               | 35.14             | 3.97          | 44.75                     | 54.00                   | -9.25            | Average | Horizontal |
| 17.475      | 51.23                 | 33.32               | 35.14             | 3.97          | 53.38                     | 68.20                   | -14.82           | Peak    | Vertical   |
| 17.475      | 39.98                 | 33.32               | 35.14             | 3.97          | 42.13                     | 54.00                   | -11.87           | Average | Vertical   |

*IEEE 802.11n HT40**Channel 151 / 5755 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.385      | 51.47                 | 33.27               | 35.15             | 3.93          | 53.52                     | 68.20                   | -14.68           | Peak    | Horizontal |
| 17.385      | 42.07                 | 33.27               | 35.15             | 3.93          | 44.12                     | 54.00                   | -9.88            | Average | Horizontal |
| 17.385      | 55.66                 | 33.27               | 35.15             | 3.93          | 57.71                     | 68.20                   | -10.49           | Peak    | Vertical   |
| 17.385      | 43.18                 | 33.27               | 35.15             | 3.93          | 45.23                     | 54.00                   | -8.77            | Average | Vertical   |

*Channel 159 / 5795 MHz*

| Freq<br>GHz | Read<br>Level<br>dBuV | Ant.<br>Fac<br>dB/m | Pre.<br>Fac<br>dB | Cab.Los<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV/m | Over limit<br>dB | Remark  | Pol/Phase  |
|-------------|-----------------------|---------------------|-------------------|---------------|---------------------------|-------------------------|------------------|---------|------------|
| 17.325      | 51.34                 | 33.27               | 35.15             | 3.93          | 53.39                     | 68.20                   | -14.81           | Peak    | Horizontal |
| 17.325      | 42.61                 | 33.27               | 35.15             | 3.93          | 44.66                     | 54.00                   | -9.34            | Average | Horizontal |
| 17.325      | 54.58                 | 33.27               | 35.15             | 3.93          | 56.63                     | 68.20                   | -11.57           | Peak    | Vertical   |
| 17.325      | 44.51                 | 33.27               | 35.15             | 3.93          | 46.56                     | 54.00                   | -7.44            | Average | Vertical   |

**Notes:**

1. Measuring frequencies from 9 KHz ~40 GHz, No emission found between lowest internal used/generated frequencies to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz ~40GHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40

## 5.6. Power line conducted emissions


### 5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |           |
|-----------------------|---------------------|-----------|
|                       | Quasi-peak          | Average   |
| 0.15 to 0.50          | 66 to 56*           | 56 to 46* |
| 0.50 to 5             | 56                  | 46        |
| 5 to 30               | 60                  | 50        |

\* Decreasing linearly with the logarithm of the frequency

### 5.6.2 Block Diagram of Test Setup

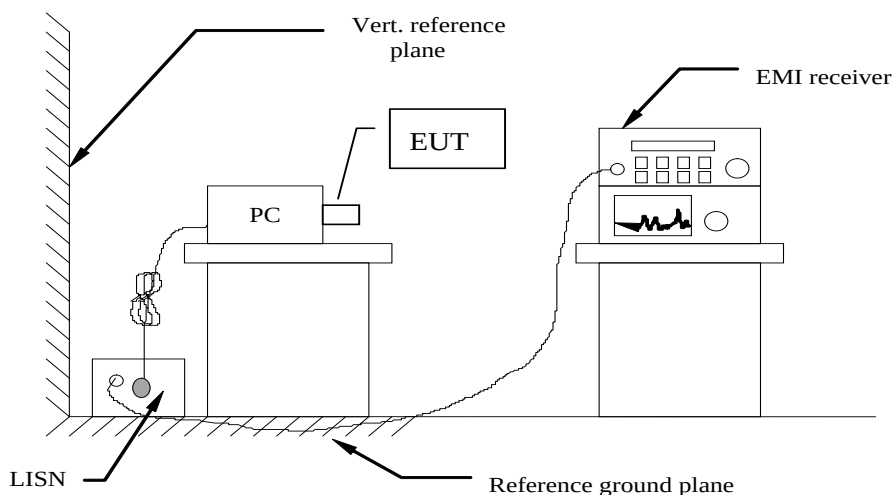

### 5.6.3 Test Results


PASS.

The test data please refer to following page.



The worst result for IEEE 802.11a, 5745MHz


Line

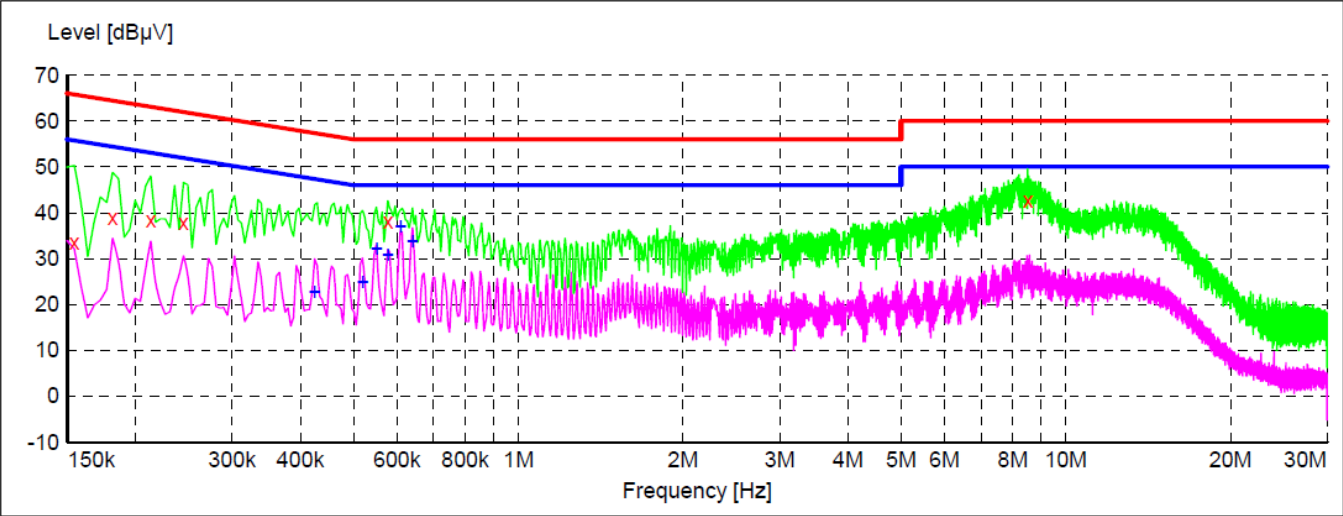

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154500         | 33.40         | 9.9          | 66            | 32.4         | QP       | L1   | GND |
| 0.181500         | 39.00         | 10.3         | 64            | 25.4         | QP       | L1   | GND |
| 0.213000         | 38.40         | 10.6         | 63            | 24.7         | QP       | L1   | GND |
| 0.244500         | 37.80         | 10.4         | 62            | 24.1         | QP       | L1   | GND |
| 0.577500         | 38.20         | 9.9          | 56            | 17.8         | QP       | L1   | GND |
| 8.520000         | 42.80         | 9.8          | 60            | 17.2         | QP       | L1   | GND |
| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
| 0.424500         | 22.80         | 10.0         | 47            | 24.6         | AV       | L1   | GND |
| 0.519000         | 24.90         | 9.9          | 46            | 21.1         | AV       | L1   | GND |
| 0.550500         | 32.10         | 9.9          | 46            | 13.9         | AV       | L1   | GND |
| 0.577500         | 30.70         | 9.9          | 46            | 15.3         | AV       | L1   | GND |
| 0.609000         | 37.10         | 9.9          | 46            | 8.9          | AV       | L1   | GND |
| 0.640500         | 33.70         | 9.9          | 46            | 12.3         | AV       | L1   | GND |



Neutral

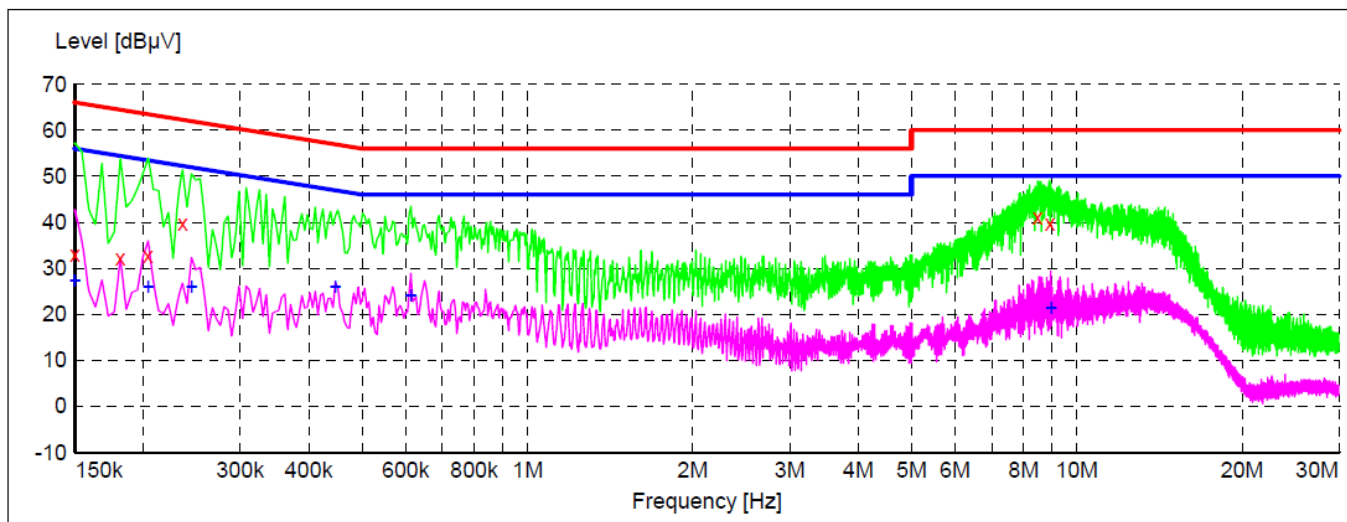

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.150000         | 33.00         | 9.8          | 66            | 33.0         | QP       | N    | GND |
| 0.181500         | 32.10         | 10.3         | 64            | 32.3         | QP       | N    | GND |
| 0.204000         | 32.70         | 10.6         | 63            | 30.7         | QP       | N    | GND |
| 0.235500         | 39.80         | 10.5         | 62            | 22.5         | QP       | N    | GND |
| 8.488500         | 41.20         | 9.8          | 60            | 18.8         | QP       | N    | GND |
| 8.929500         | 39.60         | 9.8          | 60            | 20.4         | QP       | N    | GND |
| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
| 0.150000         | 27.30         | 9.8          | 56            | 28.7         | AV       | N    | GND |
| 0.204000         | 25.90         | 10.6         | 53            | 27.5         | AV       | N    | GND |
| 0.244500         | 26.00         | 10.4         | 52            | 25.9         | AV       | N    | GND |
| 0.447000         | 26.00         | 10.0         | 47            | 20.9         | AV       | N    | GND |
| 0.613500         | 24.10         | 9.9          | 46            | 21.9         | AV       | N    | GND |
| 8.965500         | 21.40         | 9.8          | 50            | 28.6         | AV       | N    | GND |

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report


## 5.7 Undesirable Emissions Measurement

### 5.7.1 LIMIT

According to §15.407 (b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (e) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (f) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (g) The provisions of §15.205 apply to intentional radiators operating under this section.
- (h) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### 5.7.2 TEST CONFIGURATION

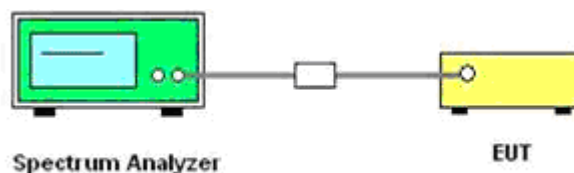

### 5.7.3 TEST PROCEDURE

1. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
2. Set the RBW = 1MHz.
3. Set the VBW  $\geq$  3MHz
4. Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
5. Manually set sweep time  $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$ .
6. Set detector = power averaging (rms).



7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.

#### 5. 7.4 Test Results

| <b>IEEE 802.11a</b> |                       |                    |                 |          |                  |               |         |
|---------------------|-----------------------|--------------------|-----------------|----------|------------------|---------------|---------|
| Frequency (MHz)     | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/1MHz) | Detector | Limit (dBm/1MHz) | Over limit dB | Verdict |
| 5650.00             | -47.15                | 2.00               | -45.15          | Peak     | -27.00           | -23.32        | PASS    |
| 5700.00             | -39.00                | 2.00               | -37.00          | Peak     | 10.00            | -55.68        | PASS    |
| 5720.00             | -26.79                | 2.00               | -24.79          | Peak     | 15.60            | -58.17        | PASS    |
| 5725.00             | -19.42                | 2.00               | -17.42          | Peak     | 27.00            | -57.76        | PASS    |
| 5850.00             | -28.74                | 2.00               | -26.74          | Peak     | 27.00            | -71.65        | PASS    |
| 5855.00             | -31.92                | 2.00               | -29.92          | Peak     | 15.60            | -61.02        | PASS    |
| 5875.00             | -43.41                | 2.00               | -41.41          | Peak     | 10.00            | -55.06        | PASS    |
| 5925.00             | -46.10                | 2.00               | -44.10          | Peak     | -27.00           | -20.79        | PASS    |

| <b>IEEE 802.11n HT20</b> |                       |                    |                 |          |                  |               |         |
|--------------------------|-----------------------|--------------------|-----------------|----------|------------------|---------------|---------|
| Frequency (MHz)          | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/1MHz) | Detector | Limit (dBm/1MHz) | Over limit dB | Verdict |
| 5650.00                  | -47.58                | 2.00               | -45.58          | Peak     | -27.00           | -22.27        | PASS    |
| 5700.00                  | -41.67                | 2.00               | -39.67          | Peak     | 10.00            | -55.06        | PASS    |
| 5720.00                  | -29.46                | 2.00               | -27.46          | Peak     | 15.60            | -56.71        | PASS    |
| 5725.00                  | -22.27                | 2.00               | -20.27          | Peak     | 27.00            | -61.38        | PASS    |
| 5850.00                  | -27.14                | 2.00               | -25.14          | Peak     | 27.00            | -67.43        | PASS    |
| 5855.00                  | -28.94                | 2.00               | -26.94          | Peak     | 15.60            | -60.44        | PASS    |
| 5875.00                  | -42.18                | 2.00               | -40.18          | Peak     | 10.00            | -53.82        | PASS    |
| 5925.00                  | -45.60                | 2.00               | -43.60          | Peak     | -27.00           | -20.95        | PASS    |

| <b>IEEE 802.11n HT40</b> |                       |                    |                 |          |                  |               |         |
|--------------------------|-----------------------|--------------------|-----------------|----------|------------------|---------------|---------|
| Frequency (MHz)          | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/1MHz) | Detector | Limit (dBm/1MHz) | Over limit dB | Verdict |
| 5650.00                  | -46.84                | 2.00               | -44.84          | Peak     | -27.00           | -22.65        | PASS    |
| 5700.00                  | -32.88                | 2.00               | -30.88          | Peak     | 10.00            | -51.47        | PASS    |
| 5720.00                  | -24.42                | 2.00               | -22.42          | Peak     | 15.60            | -38.86        | PASS    |
| 5725.00                  | -21.82                | 2.00               | -19.82          | Peak     | 27.00            | -57.58        | PASS    |
| 5850.00                  | -29.17                | 2.00               | -27.17          | Peak     | 27.00            | -65.99        | PASS    |
| 5855.00                  | -33.20                | 2.00               | -31.20          | Peak     | 15.60            | -59.08        | PASS    |
| 5875.00                  | -40.88                | 2.00               | -38.88          | Peak     | 10.00            | -56.50        | PASS    |
| 5925.00                  | -46.62                | 2.00               | -44.62          | Peak     | -27.00           | -20.64        | PASS    |

**Remark:**


1. Measured unwanted emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40
4. E.I.R.P = Conducted power + Directional Gain
5. Please refer to following test plots;






## Unwanted emission


## IEEE 802.11a

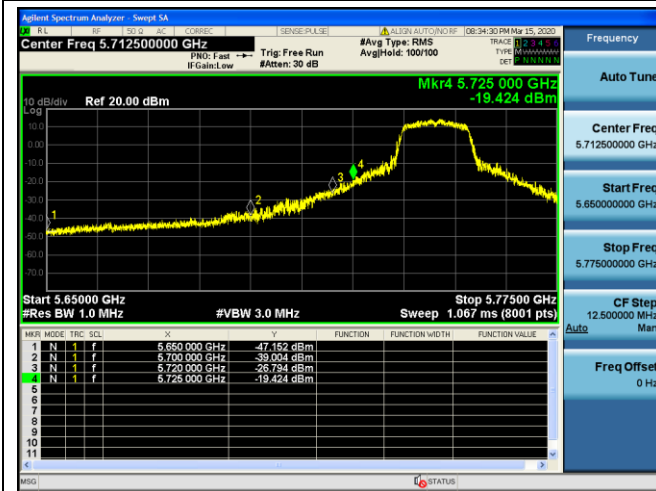


## IEEE 802.11n HT20

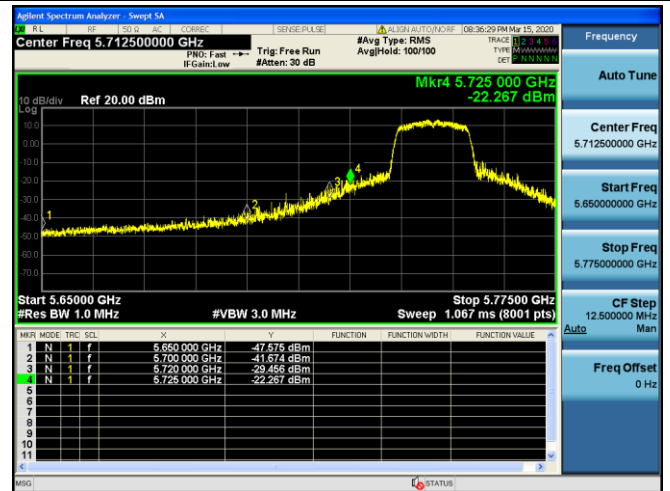


## Channel 149 / 5745 MHz – Peak

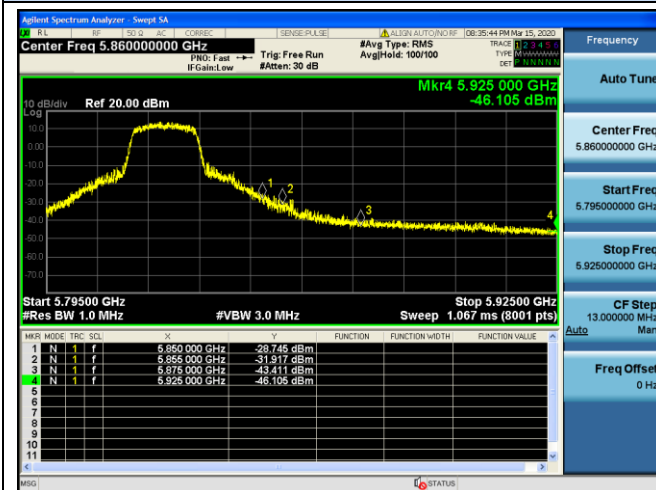


## Channel 149 / 5745 MHz – Peak

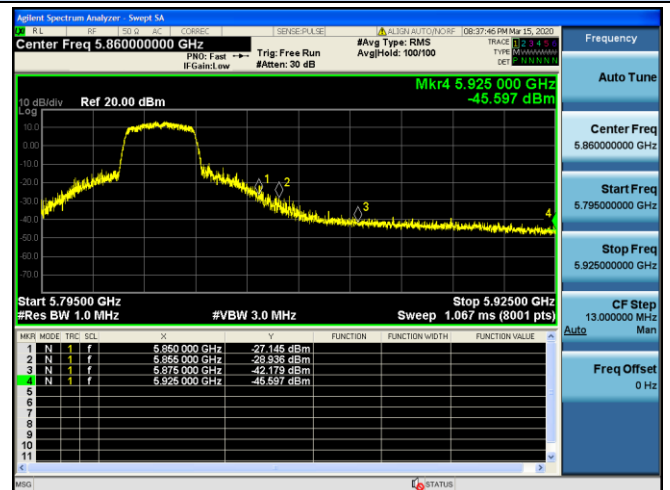

## Channel 165 / 5825 MHz – Peak

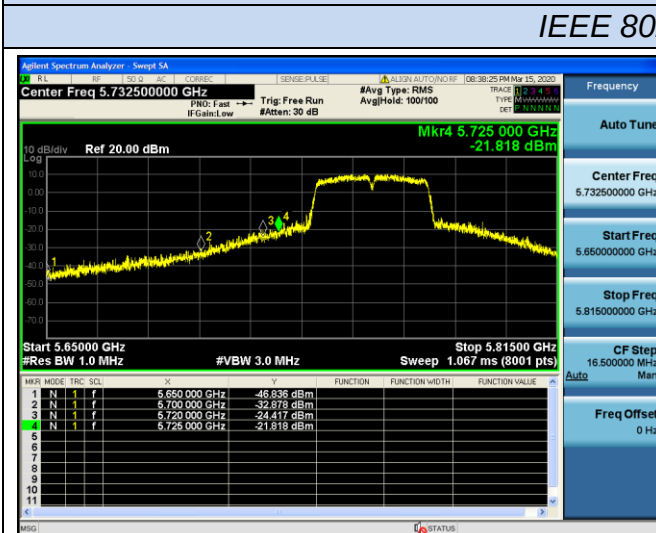

## Channel 165 / 5825 MHz – Peak

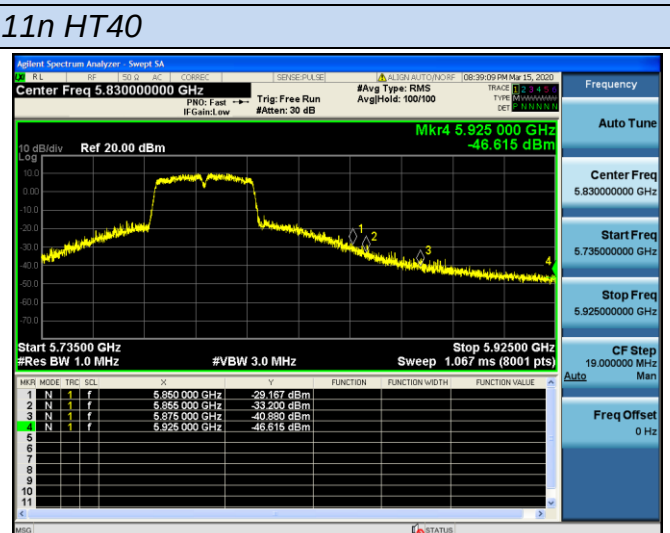

## Channel 151 / 5755 MHz – Peak

## Channel 159 / 5795 MHz – Peak



## 5.8. Antenna Requirements

### 5.8.1. Standard Applicable

#### **For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 5.8.2. Antenna Connector Construction

The directional gains of antenna used for transmitting refer to section 1.1 of this report , and the antenna is an internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

### 5.8.3. Results: Compliance.

## 5.9. Frequency Stability


### 5.9.1 Standard Applicable

According to FCC §15.407(g) “Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user manual.”

According to FCC §2.1055(a) “The frequency stability shall be measured with variation of ambient temperature as follows:”

- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (2) From  $-20^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radio beacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.
- (3) From  $0^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

### 5.9.2 Test Configuration

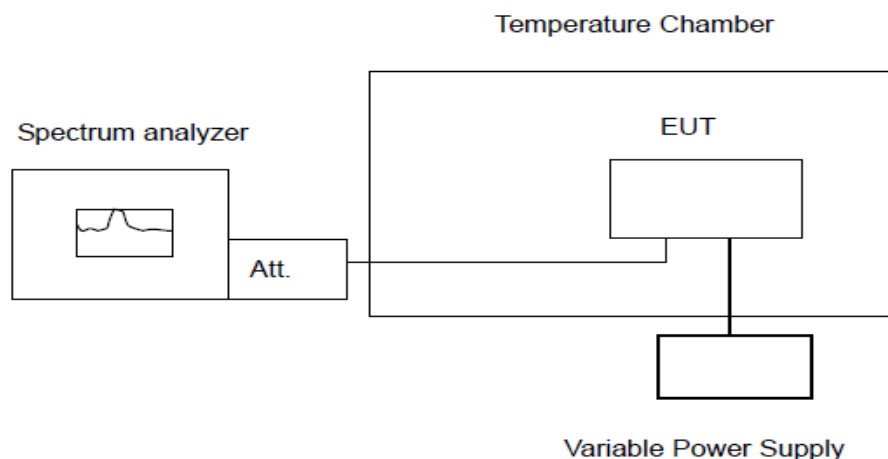

### 5.9.3 Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 degree operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30 degree. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 degree increased per stage until the highest temperature of +50 degree reached.

### 5.9.4 Test Results

PASS

Remark:

1. Measured all conditions and recorded worst case.



## IEEE 802.11a Mode / 5745 – 5825 MHz / 5745 MHz

| Enviroment Temperature (Degree) | Voltage (VAC) | Measured Frequency (MHz) | Limit Range (MHz) | Test Results |
|---------------------------------|---------------|--------------------------|-------------------|--------------|
| 20                              | 3.7           | 5745.073176              | 5725 – 5850       | PASS         |
| 20                              | 3.5           | 5745.059267              | 5725 – 5850       | PASS         |
| 50                              | 3.7           | 5745.098305              | 5725 – 5850       | PASS         |
| 40                              | 3.7           | 5745.065999              | 5725 – 5850       | PASS         |
| 30                              | 3.7           | 5745.029871              | 5725 – 5850       | PASS         |
| 20                              | 3.7           | 5745.023346              | 5725 – 5850       | PASS         |
| 10                              | 3.7           | 5744.912677              | 5725 – 5850       | PASS         |
| 0                               | 3.7           | 5744.904981              | 5725 – 5850       | PASS         |
| -10                             | 3.7           | 5744.926189              | 5725 – 5850       | PASS         |
| -20                             | 3.7           | 5744.991995              | 5725 – 5850       | PASS         |
| -30                             | 3.7           | 5744.935466              | 5725 – 5850       | PASS         |

## IEEE 802.11a Mode / 5745 – 5825 MHz / 5825 MHz

| Enviroment Temperature (Degree) | Voltage (VAC) | Measured Frequency (MHz) | Limit Range (MHz) | Test Results |
|---------------------------------|---------------|--------------------------|-------------------|--------------|
| 20                              | 3.7           | 5824.925354              | 5725 – 5850       | PASS         |
| 20                              | 3.5           | 5825.033789              | 5725 – 5850       | PASS         |
| 50                              | 3.7           | 5825.058780              | 5725 – 5850       | PASS         |
| 40                              | 3.7           | 5825.067987              | 5725 – 5850       | PASS         |
| 30                              | 3.7           | 5824.910798              | 5725 – 5850       | PASS         |
| 20                              | 3.7           | 5825.005335              | 5725 – 5850       | PASS         |
| 10                              | 3.7           | 5825.041224              | 5725 – 5850       | PASS         |
| 0                               | 3.7           | 5824.927752              | 5725 – 5850       | PASS         |
| -10                             | 3.7           | 5824.909116              | 5725 – 5850       | PASS         |
| -20                             | 3.7           | 5824.973685              | 5725 – 5850       | PASS         |
| -30                             | 3.7           | 5825.005122              | 5725 – 5850       | PASS         |



## 6. LIST OF MEASURING EQUIPMENTS

| Item | Test Equipment       | Manufacturer    | Model No.     | Serial No.   | Calibration Date | Calibration Due Date |
|------|----------------------|-----------------|---------------|--------------|------------------|----------------------|
| 1    | MXA Signal Analyzer  | Keysight        | N9020A        | MY52091623   | 2020/1/2         | 2021/1/1             |
| 2    | Power Sensor         | Agilent         | U2021XA       | MY5365004    | 2020/1/2         | 2021/1/1             |
| 3    | Power Meter          | Agilent         | U2531A        | TW53323507   | 2020/1/2         | 2021/1/1             |
| 4    | Wideband Antenna     | schwarzbeck     | VULB 9163     | 958          | 2019/11/16       | 2022/11/15           |
| 5    | Horn Antenna         | schwarzbeck     | 9120D-1141    | 1574         | 2019/11/16       | 2022/11/15           |
| 6    | EMI Test Receiver    | R&S             | ESCI          | 100849/003   | 2020/1/2         | 2021/1/1             |
| 7    | Controller           | MF              | MF7802        | N/A          | N/A              | N/A                  |
| 8    | Amplifier            | schwarzbeck     | BBV 9743      | 209          | 2020/1/2         | 2021/1/1             |
| 9    | Amplifier            | Tonscend        | TSAMP-0518 SE | --           | 2020/1/2         | 2021/1/1             |
| 10   | RF Cable(below 1GHz) | HUBER+SUHNER    | RG214         | N/A          | 2020/1/2         | 2021/1/1             |
| 11   | RF Cable(above 1GHz) | HUBER+SUHNER    | RG214         | N/A          | 2020/1/2         | 2021/1/1             |
| 12   | Artificial Mains     | ROHDE & SCHWARZ | ENV 216       | 101333-IP    | 2020/1/2         | 2021/1/1             |
| 12   | EMI Test Software    | ROHDE & SCHWARZ | ESK1          | V1.71        | N/A              | N/A                  |
| 14   | RE test software     | Tonscend        | JS32-RE       | V2.0.2.0     | N/A              | N/A                  |
| 15   | Test Software        | Tonscend        | JS1120-3      | V2.5.77.0418 | N/A              | N/A                  |
| 16   | Horn Antenna         | A-INFO          | LB-180400-K F | J211020657   | 2019/11/16       | 2022/11/15           |
| 17   | Amplifier            | SKET            | LNPA_1840-50  | SK2018101801 | 2019/10/22       | 2020/10/21           |

-----THE END OF REPORT-----