

TEST REPORT

Reference No...... : WTS19S03012952-5W V1
FCC ID : 2ASX3-Z33
Applicant..... : Transact Technologies, Inc.
Address..... : 2319 Whitney Avenue, Suite 3B, Hamden CT., 06518, USA
Manufacturer : SHENZHEN ZHOUJI HOMTOM TECHNOLOGY CO.LTD
Address..... : Room 201, Deweisen Building, Junction of Gaoxin South 7th road and keyuan South road, nanshan District, Shenzhen, Guangdong, China
Product..... : Smartphone
Model(s) : Z33
Brand Name..... : BOHAIHANDHELD
Standards..... : FCC CFR47 Part 22 Subpart H: 2018
FCC CFR47 Part 27: 2018
Date of Receipt sample : 2019-03-11
Date of Test : 2019-03-12 to 2019-04-07
Date of Issue..... : 2019-05-14
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:




Shuo Zhong

Shuo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.

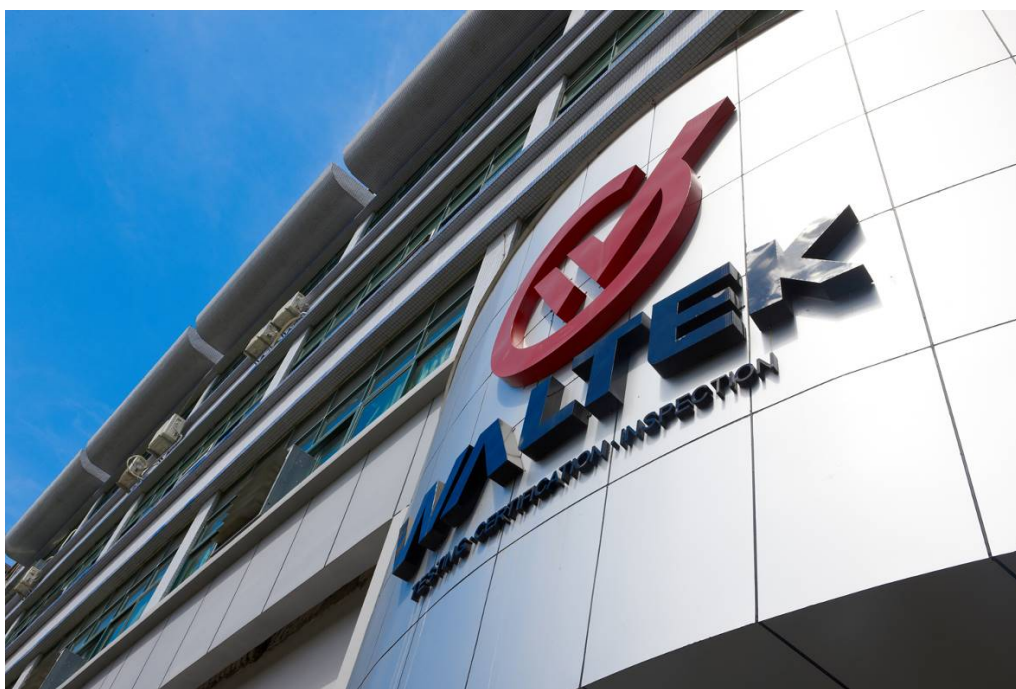

Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.	7
5.2 DETAILS OF E.U.T.	8
5.3 TEST MODE	9
6 TEST SUMMARY	10
7 EQUIPMENT USED DURING TEST	11
7.1 EQUIPMENTS LIST	11
7.2 MEASUREMENT UNCERTAINTY	12
7.3 TEST EQUIPMENT CALIBRATION	12
8 RF OUTPUT POWER	13
8.1 EUT OPERATION.....	13
8.2 TEST PROCEDURE	13
8.3 TEST RESULT	14
9 PEAK-TO-AVERAGE RATIO.....	32
9.1 EUT OPERATION.....	32
9.2 TEST PROCEDURE	32
9.3 TEST RESULT	32
10 BANDWIDTH.....	33
10.1 EUT OPERATION.....	33
10.2 TEST PROCEDURE.....	33
10.3 TEST RESULT	34
11 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	49
11.1 EUT OPERATION.....	49
11.2 TEST PROCEDURE.....	49
11.3 TEST RESULT	49
12 SPURIOUS RADIATED EMISSIONS.....	50
12.1 EUT OPERATION.....	50
12.2 TEST SETUP	50
12.3 SPECTRUM ANALYZER SETUP	51
12.4 TEST PROCEDURE.....	52
12.5 SUMMARY OF TEST RESULTS	53
13 BAND EDGE MEASUREMENT	56
13.1 EUT OPERATION.....	56
13.2 TEST PROCEDURE.....	56
13.3 TEST RESULT	57
14 FREQUENCY STABILITY.....	58
14.1 EUT OPERATION.....	58
14.2 TEST PROCEDURE.....	58
14.3 TEST RESULT	59

15 RF EXPOSURE..... 71

16 PHOTOGRAPHS OF TEST SETUP AND EUT..... 72

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S03012 952-5W	2019-03-11	2019-03-12 to 2019-04-07	2019-04-08	original	-	Replaced
WTS19S03012 952-5W V1	2019-03-11	2019-03-12 to 2019-04-07	2019-05-14	Version 1	Updated	Valid

5 General Information

5.1 General Description of E.U.T.

Product:	Smartphone
Model(s):	Z33
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	N/A
LTE Band(s):	FDD Band 5/7/41
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.1 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	GF36-MAINPCB-V2.0.0
Software Version:	GF36_Z33_V1.0.9_20181123
Highest frequency (Exclude Radio):	1.28GHz
Storage Location:	Internal Storage
Note:	This EUT has two SIM card slots, and use same one RF module. We found that RF parameters are the same, when we insert the card 1 and card 2. So we usually performed the test under main card slot 1.

5.2 Details of E.U.T.

Operation Frequency:	LTE Band 5: 824~849MHz LTE Band 7: 2500~2570MHz LTE Band 41: 2496~2690MHz
Max. RF output power:	LTE Band 5: 22.96dBm LTE Band 7: 22.81dBm LTE Band 41: 22.82dBm
Type of Modulation:	LTE: QPSK, 16QAM
Antenna installation:	LTE: internal permanent antenna
Antenna Gain:	LTE Band 5: -0.8dBi LTE Band 7: -1.2dBi LTE Band 41 -1.2dBi
Ratings:	Battery DC 3.8V, 4600mAh DC 5V, 2.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.6A)
Adapter:	Manufacturer: Huizhou Guoao Tong Technology Co.,Ltd. Model No.: GA-0502000
Type of Emission:	LTE Band 5 1.4MHz: 1M10G7D(QPSK), 1M10W7D(16QAM) LTE Band 5 3MHz: 2M69G7D(QPSK), 2M68W7D(16QAM) LTE Band 5 5MHz: 4M54G7D(QPSK), 4M55W7D(16QAM) LTE Band 5 10 MHz: 8M96G7D(QPSK), 8M96W7D(16QAM) LTE Band 7 5MHz: 4M53G7D(QPSK), 4M54W7D(16QAM) LTE Band 7 10 MHz: 8M97G7D(QPSK), 8M96W7D(16QAM) LTE Band 7 15MHz: 13M6G7D(QPSK), 13M5W7D(16QAM) LTE Band 7 20MHz: 17M9G7D(QPSK), 18M0W7D(16QAM) LTE Band 41 5MHz: 4M51G7D(QPSK), 4M52W7D(16QAM) LTE Band 41 10 MHz: 8M96G7D(QPSK), 8M95W7D(16QAM) LTE Band 41 15 MHz: 13M5G7D(QPSK), 13M6W7D(16QAM) LTE Band 41 20 MHz: 17M9G7D(QPSK), 18M0W7D(16QAM)

5.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Support Band	Test Mode BW(MHz)	Channel Frequency	Channel Number
LTE Band 5	1.4	824.7 MHz	20407
		836.5 MHz	20525
		848.3 MHz	20643
	3	825.5 MHz	20415
		836.5 MHz	20525
		847.5 MHz	20635
	5	826.5 MHz	20425
		836.5 MHz	20525
		846.5 MHz	20625
	10	829.0 MHz	20450
		836.5 MHz	20525
		844.0 MHz	20600
LTE Band 7	5	2502.5 MHz	20775
		2535.0 MHz	21100
		2567.5 MHz	21425
	10	2505.0 MHz	20800
		2535.0 MHz	21100
		2565.0 MHz	21400
	15	2507.5 MHz	20825
		2535.0 MHz	21100
		2562.5 MHz	21375
	20	2510.0 MHz	20850
		2535.0 MHz	21100
		2560.0 MHz	21350
LTE Band 41	5	2498.5 MHz	39675
		2593.0 MHz	40620
		2687.5MHz	41565
	10	2501.0 MHz	39700
		2593.0 MHz	40620
		2685.0 MHz	41540
	15	2503.5 MHz	39725
		2593.0 MHz	40620
		2682.5 MHz	41515
	20	2687.5 MHz	39750
		2593.0 MHz	40620
		2680.0 MHz	41490
Remark: All mode(s) were tested and the worst data was recorded.			

6 Test Summary

Test Items	Test Requirement	Result
RF Output Power	2.1046 22.913 (a) 27.50(h.2) 27.50(d.4)	PASS
Peak-to-Average Ratio	27.50(d)	PASS
Bandwidth	2.1049 22.905 22.917 27.53(a)	PASS
Spurious Emissions at Antenna Terminal	2.1051 22.917 (a) 27.53(h) 27.53(m)(4)	PASS
Field Strength of Spurious Radiation	2.1053 22.917 (a) 27.53(h) 27.53(m)(4)	PASS
Out of band emission	22.917 (a) 27.53(h) 27.53(m)(4)	PASS
Frequency Stability	2.1055 22.355 27.5(h) 27.54	PASS
Maximum Permissible Exposure (SAR)	1.1307 2.1093	PASS

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-12	2019-09-11
2.	LISN	R&S	ENV216	101215	2018-09-12	2019-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-12	2019-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-12	2019-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-12	2019-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2018-09-12	2019-09-11
4.	Cable	LARGE	RF300	-	2018-09-12	2019-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018-04-29	2019-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-09	2019-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-04-09	2019-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-12	2019-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-04-09	2019-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-04-13	2019-04-12
9	Signal Generator	R&S	SMR20	100046	2018-09-12	2019-09-11
10	Smart Antenna	SCHWARZBECK	HA08	-	2018-04-09	2019-04-08

3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-09	2019-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-04-13	2019-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-12	2019-09-11
2.	Spectrum Analyzer	Agilent	N9020A	MY49100060	2018-09-12	2019-09-11
3.	Universal Radio Communication Tester	R&S	CMW 500	127818	2018-04-13	2019-04-12
4	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-12	2019-09-11

7.2 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

7.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 RF OUTPUT POWER

Test Requirement:	FCC Part 2.1046, 22.913 (a), 27.50(h.2); 27.50(d.4)
Test Method:	ANSI C63.26:2015 ANSI/TIA-603-E:2016
Test Mode:	TX transmitting

8.1 EUT Operation


Operating Environment :

Temperature:	22.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

8.2 Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

1. The setup of EUT is according with per TIA/EIA Standard 603D:2010.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

8.3 Test Result

Conducted Power

LTE Band 5:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	20407	824.7	QPSK	1	0	22.38	22.0±1	/
				1	2	22.51	22.0±1	/
				1	5	22.34	22.0±1	/
				3	0	22.31	22.0±1	/
				3	1	22.37	22.0±1	/
				3	2	22.3	22.0±1	/
			16QAM	6	0	21.53	21.0±1	1.0
				1	0	21.32	21.0±1	1.0
				1	2	21.45	21.0±1	1.0
				1	5	21.36	21.0±1	1.0
				3	0	21.32	21.0±1	1.0
				3	1	21.33	21.0±1	1.0
	20525	836.5	QPSK	3	2	21.3	21.0±1	1.0
				6	0	20.48	21.0±1	1.0
				1	0	22.32	22.0±1	/
				1	2	22.47	22.0±1	/
				1	5	22.32	22.0±1	/
				3	0	22.31	22.0±1	/
			16QAM	3	1	22.35	22.0±1	/
				3	2	22.29	22.0±1	/
				6	0	21.5	21.0±1	1.0
				1	0	21.6	21.0±1	1.0
				1	2	21.7	21.0±1	1.0
				1	5	21.58	21.0±1	1.0
	20634	848.3	QPSK	3	0	21.47	21.0±1	1.0
				3	1	21.5	21.0±1	1.0
				3	2	21.46	21.0±1	1.0
				6	0	20.26	21.0±1	1.0
			16QAM	1	0	22.37	22.0±1	/
				1	2	22.53	22.0±1	/
				1	5	22.4	22.0±1	/
				3	0	22.25	22.0±1	/
				3	1	22.28	22.0±1	/
				3	2	22.24	22.0±1	/
				6	0	21.49	21.0±1	1.0
			16QAM	1	0	21.14	21.0±1	1.0
				1	2	21.26	21.0±1	1.0
				1	5	21.15	21.0±1	1.0
				3	0	21.3	21.0±1	1.0
				3	1	21.36	21.0±1	1.0
				3	2	21.33	21.0±1	1.0
				6	0	20.44	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	20415	825.5	QPSK	1	0	22.49	22.0±1	/
				1	8	22.42	22.0±1	/
				1	14	22.4	22.0±1	/
				6	0	21.51	21.0±1	1.0
				6	4	21.54	21.0±1	1.0
				6	9	21.48	21.0±1	1.0
				15	0	21.41	21.0±1	1.0
			16QAM	1	0	21.25	21.0±1	1.0
				1	8	21.24	21.0±1	1.0
				1	14	21.22	21.0±1	1.0
				8	0	20.49	21.0±1	1.0
				8	4	20.53	21.0±1	1.0
				8	9	20.47	21.0±1	1.0
				15	0	20.36	21.0±1	1.0
	20525	836.5	QPSK	1	0	22.4	22.0±1	/
				1	8	22.38	22.0±1	/
				1	14	22.39	22.0±1	/
				6	0	21.44	21.0±1	1.0
				6	4	21.51	21.0±1	1.0
				6	9	21.4	21.0±1	1.0
				15	0	21.41	21.0±1	1.0
			16QAM	1	0	21.66	21.0±1	1.0
				1	8	21.65	21.0±1	1.0
				1	14	21.65	21.0±1	1.0
				6	0	20.41	21.0±1	1.0
				6	4	20.43	21.0±1	1.0
				6	9	20.4	21.0±1	1.0
				15	0	20.33	21.0±1	1.0
	20635	847.5	QPSK	1	0	22.49	22.0±1	/
				1	8	22.44	22.0±1	/
				1	14	22.47	22.0±1	/
				6	0	21.45	21.0±1	1.0
				6	4	21.51	21.0±1	1.0
				6	9	21.43	21.0±1	1.0
				15	0	21.36	21.0±1	1.0
			16QAM	1	0	21.19	21.0±1	1.0
				1	8	21.15	21.0±1	1.0
				1	14	21.2	21.0±1	1.0
				8	0	20.3	21.0±1	1.0
				8	4	20.38	21.0±1	1.0
				8	9	20.31	21.0±1	1.0
				15	0	20.19	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20425	826.5	QPSK	1	0	22.34	22.0±1	/
				1	49	22.39	22.0±1	/
				1	99	22.29	22.0±1	/
				12	0	21.38	21.0±1	1.0
				12	24	21.43	21.0±1	1.0
				12	49	21.39	21.0±1	1.0
				25	0	21.4	21.0±1	1.0
			16QAM	1	0	21.42	21.0±1	1.0
				1	49	21.51	21.0±1	1.0
				1	99	21.43	21.0±1	1.0
				12	0	20.39	21.0±1	1.0
				12	24	20.45	21.0±1	1.0
				12	49	20.39	21.0±1	1.0
				25	0	20.35	21.0±1	1.0
	20525	836.5	QPSK	1	0	22.35	22.0±1	/
				1	49	22.4	22.0±1	/
				1	99	22.31	22.0±1	/
				12	0	21.36	21.0±1	1.0
				12	24	21.41	21.0±1	1.0
				12	49	21.35	21.0±1	1.0
				25	0	21.37	21.0±1	1.0
			16QAM	1	0	21.78	21.0±1	1.0
				1	49	21.81	21.0±1	1.0
				1	99	21.69	21.0±1	1.0
				12	0	20.46	21.0±1	1.0
				12	24	20.48	21.0±1	1.0
				12	49	20.39	21.0±1	1.0
				25	0	20.38	21.0±1	1.0
	20625	846.5	QPSK	1	0	22.27	22.0±1	/
				1	49	22.42	22.0±1	/
				1	99	22.29	22.0±1	/
				12	0	21.35	21.0±1	1.0
				12	24	21.37	21.0±1	1.0
				12	49	21.3	21.0±1	1.0
				25	0	21.27	21.0±1	1.0
			16QAM	1	0	21.22	21.0±1	1.0
				1	49	21.32	21.0±1	1.0
				1	99	21.28	21.0±1	1.0
				12	0	20.29	21.0±1	1.0
				12	24	20.29	21.0±1	1.0
				12	49	20.26	21.0±1	1.0
				25	0	20.17	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20450	829	QPSK	1	0	22.5	22.0±1	/
				1	49	22.61	22.0±1	/
				1	99	22.41	22.0±1	/
				25	0	21.46	21.0±1	1.0
				25	24	21.47	21.0±1	1.0
				25	49	21.46	21.0±1	1.0
				50	0	21.47	21.0±1	1.0
			16QAM	1	0	21.25	21.0±1	1.0
				1	49	21.47	21.0±1	1.0
				1	99	21.3	21.0±1	1.0
				25	0	20.41	21.0±1	1.0
				25	24	20.43	21.0±1	1.0
				25	49	20.44	21.0±1	1.0
				50	0	20.4	21.0±1	1.0
	20525	836.5	QPSK	1	0	22.89	22.0±1	/
				1	49	22.96	22.0±1	/
				1	99	22.43	22.0±1	/
				25	0	21.81	21.0±1	1.0
				25	24	21.96	21.0±1	1.0
				25	49	21.41	21.0±1	1.0
				50	0	21.41	21.0±1	1.0
			16QAM	1	0	21.73	21.0±1	1.0
				1	49	21.83	21.0±1	1.0
				1	99	21.57	21.0±1	1.0
				25	0	20.47	21.0±1	1.0
				25	24	20.43	21.0±1	1.0
				25	49	20.35	21.0±1	1.0
				50	0	20.38	21.0±1	1.0
	20600	844	QPSK	1	0	22.4	22.0±1	/
				1	49	22.61	22.0±1	/
				1	99	22.5	22.0±1	/
				25	0	21.41	21.0±1	1.0
				25	24	21.4	21.0±1	1.0
				25	49	21.35	21.0±1	1.0
				50	0	21.32	21.0±1	1.0
			16QAM	1	0	21.19	21.0±1	1.0
				1	49	21.34	21.0±1	1.0
				1	99	21.23	21.0±1	1.0
				25	0	20.37	21.0±1	1.0
				25	24	20.35	21.0±1	1.0
				25	49	20.33	21.0±1	1.0
				50	0	20.27	21.0±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	22.13	22.0±1	/
				1	49	22.32	22.0±1	/
				1	99	22.19	22.0±1	/
				12	0	21.26	21.0±1	1.0
				12	24	21.37	21.0±1	1.0
				12	49	21.34	21.0±1	1.0
				25	0	21.32	21.0±1	1.0
			16QAM	1	0	21.25	21.0±1	1.0
				1	49	21.39	21.0±1	1.0
				1	99	21.25	21.0±1	1.0
				12	0	20.3	21.0±1	1.0
				12	24	20.37	21.0±1	1.0
				12	49	20.38	21.0±1	1.0
				25	0	20.24	21.0±1	1.0
	21100	2535	QPSK	1	0	22.15	22.0±1	/
				1	49	22.32	22.0±1	/
				1	99	22.17	22.0±1	/
				12	0	21.28	21.0±1	1.0
				12	24	21.37	21.0±1	1.0
				12	49	21.31	21.0±1	1.0
				25	0	21.32	21.0±1	1.0
			16QAM	1	0	21.33	21.0±1	1.0
				1	49	21.44	21.0±1	1.0
				1	99	21.32	21.0±1	1.0
				12	0	20.34	21.0±1	1.0
				12	24	20.41	21.0±1	1.0
				12	49	20.35	21.0±1	1.0
				25	0	20.3	21.0±1	1.0
	21425	2567.5	QPSK	1	0	22.12	22.0±1	/
				1	49	22.28	22.0±1	/
				1	99	22.07	22.0±1	/
				12	0	21.27	21.0±1	1.0
				12	24	21.28	21.0±1	1.0
				12	49	21.15	21.0±1	1.0
				25	0	21.18	21.0±1	1.0
			16QAM	1	0	21.51	21.0±1	1.0
				1	49	21.62	21.0±1	1.0
				1	99	21.45	21.0±1	1.0
				12	0	20.3	21.0±1	1.0
				12	24	20.3	21.0±1	1.0
				12	49	20.21	21.0±1	1.0
				25	0	20.22	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	21.79	22.0±1	/
				1	49	21.96	22.0±1	/
				1	99	22.39	22.0±1	/
				25	0	21.36	21.0±1	1.0
				25	24	21.43	21.0±1	1.0
				25	49	21.47	21.0±1	1.0
				50	0	21.43	21.0±1	1.0
			16QAM	1	0	21.17	21.0±1	1.0
				1	49	21.37	21.0±1	1.0
				1	99	21.2	21.0±1	1.0
				25	0	20.35	21.0±1	1.0
				25	24	20.44	21.0±1	1.0
				25	49	20.45	21.0±1	1.0
				50	0	20.39	21.0±1	1.0
	21100	2535	QPSK	1	0	22.3	22.0±1	/
				1	49	22.34	22.0±1	/
				1	99	22.25	22.0±1	/
				25	0	21.38	21.0±1	1.0
				25	24	21.39	21.0±1	1.0
				25	49	21.37	21.0±1	1.0
				50	0	21.36	21.0±1	1.0
			16QAM	1	0	21.62	21.0±1	1.0
				1	49	21.73	21.0±1	1.0
				1	99	21.61	21.0±1	1.0
				25	0	20.35	21.0±1	1.0
				25	24	20.4	21.0±1	1.0
				25	49	20.37	21.0±1	1.0
				50	0	20.35	21.0±1	1.0
	21400	2565	QPSK	1	0	22.33	22.0±1	/
				1	49	22.49	22.0±1	/
				1	99	22.04	22.0±1	/
				25	0	21.29	21.0±1	1.0
				25	24	21.27	21.0±1	1.0
				25	49	21.22	21.0±1	1.0
				50	0	21.22	21.0±1	1.0
			16QAM	1	0	21.14	21.0±1	1.0
				1	49	21.24	21.0±1	1.0
				1	99	21.07	21.0±1	1.0
				25	0	20.32	21.0±1	1.0
				25	24	20.3	21.0±1	1.0
				25	49	20.26	21.0±1	1.0
				50	0	20.22	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	21.68	22.0±1	/
				1	49	21.97	22.0±1	/
				1	99	22.32	22.0±1	/
				36	0	21.51	21.0±1	1.0
				36	24	21.56	21.0±1	1.0
				36	49	21.59	21.0±1	1.0
				75	0	21.61	21.0±1	1.0
			16QAM	1	0	21.17	21.0±1	1.0
				1	49	21.25	21.0±1	1.0
				1	99	21.16	21.0±1	1.0
				36	0	20.44	21.0±1	1.0
				36	24	20.48	21.0±1	1.0
				36	49	20.52	21.0±1	1.0
				75	0	20.49	21.0±1	1.0
	21100	2535	QPSK	1	0	22.25	22.0±1	/
				1	49	22.22	22.0±1	/
				1	99	22.22	22.0±1	/
				36	0	21.55	21.0±1	1.0
				36	24	21.52	21.0±1	1.0
				36	49	21.54	21.0±1	1.0
				75	0	21.53	21.0±1	1.0
			16QAM	1	0	21.55	21.0±1	1.0
				1	49	21.66	21.0±1	1.0
				1	99	21.54	21.0±1	1.0
				36	0	20.48	21.0±1	1.0
				36	24	20.49	21.0±1	1.0
				36	49	20.47	21.0±1	1.0
				75	0	20.47	21.0±1	1.0
	21375	2562.5	QPSK	1	0	22.25	22.0±1	/
				1	49	22.38	22.0±1	/
				1	99	22.07	22.0±1	/
				36	0	21.5	21.0±1	1.0
				36	24	21.48	21.0±1	1.0
				36	49	21.42	21.0±1	1.0
				75	0	21.48	21.0±1	1.0
			16QAM	1	0	21.38	21.0±1	1.0
				1	49	21.46	21.0±1	1.0
				1	99	21.25	21.0±1	1.0
				36	0	20.36	21.0±1	1.0
				36	24	20.36	21.0±1	1.0
				36	49	20.29	21.0±1	1.0
				75	0	20.32	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	21.38	22.0±1	/
				1	49	22.08	22.0±1	/
				1	99	22.27	22.0±1	/
				50	0	21.37	21.0±1	1.0
				50	24	21.49	21.0±1	1.0
				50	49	21.49	21.0±1	1.0
				100	0	21.45	21.0±1	1.0
			16QAM	1	0	21.58	21.0±1	1.0
				1	49	21.97	21.0±1	1.0
				1	99	21.7	21.0±1	1.0
				50	0	20.35	21.0±1	1.0
				50	24	20.47	21.0±1	1.0
				50	49	20.45	21.0±1	1.0
				100	0	20.42	21.0±1	1.0
	21100	2535	QPSK	1	0	22.72	22.0±1	/
				1	49	22.81	22.0±1	/
				1	99	22.56	22.0±1	/
				50	0	21.39	21.0±1	1.0
				50	24	21.93	21.0±1	1.0
				50	49	21.41	21.0±1	1.0
				100	0	21.36	21.0±1	1.0
			16QAM	1	0	21.43	21.0±1	1.0
				1	49	21.84	21.0±1	1.0
				1	99	21.43	21.0±1	1.0
				50	0	20.38	21.0±1	1.0
				50	24	20.43	21.0±1	1.0
				50	49	20.35	21.0±1	1.0
				100	0	20.34	21.0±1	1.0
	21350	2560	QPSK	1	0	21.91	22.0±1	/
				1	49	22.45	22.0±1	/
				1	99	21.82	22.0±1	/
				50	0	21.31	21.0±1	1.0
				50	24	21.37	21.0±1	1.0
				50	49	21.2	21.0±1	1.0
				100	0	21.27	21.0±1	1.0
			16QAM	1	0	21.33	21.0±1	1.0
				1	49	21.69	21.0±1	1.0
				1	99	21.21	21.0±1	1.0
				50	0	20.23	21.0±1	1.0
				50	24	20.3	21.0±1	1.0
				50	49	20.13	21.0±1	1.0
				100	0	20.2	21.0±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40265	2557.5	QPSK	1	0	22.64	22.0±1	/
				1	12	22.76	22.0±1	/
				1	24	22.62	22.0±1	/
				12	0	21.77	21.0±1	1.0
				12	6	21.78	21.0±1	1.0
				12	11	21.77	21.0±1	1.0
				25	0	21.78	21.0±1	1.0
			16QAM	1	0	21.98	21.0±1	1.0
				1	12	21.98	21.0±1	1.0
				1	24	21.69	21.0±1	1.0
				12	0	20.49	21.0±1	1.0
				12	6	20.44	21.0±1	1.0
				12	11	20.35	21.0±1	1.0
				25	0	20.25	21.0±1	1.0
	40740	2605.0	QPSK	1	0	22.05	22.0±1	/
				1	12	22.19	22.0±1	/
				1	24	22.07	22.0±1	/
				12	0	21.09	21.0±1	1.0
				12	6	21.15	21.0±1	1.0
				12	11	21.1	21.0±1	1.0
				25	0	21.12	21.0±1	1.0
			16QAM	1	0	21.2	21.0±1	1.0
				1	12	21.35	21.0±1	1.0
				1	24	21.21	21.0±1	1.0
				12	0	20.12	21.0±1	1.0
				12	6	20.19	21.0±1	1.0
				12	11	20.17	21.0±1	1.0
				25	0	20.08	21.0±1	1.0
	41215	2652.5	QPSK	1	0	21.98	22.0±1	/
				1	12	22.13	22.0±1	/
				1	24	21.98	22.0±1	/
				12	0	20.97	21.0±1	1.0
				12	6	21.12	21.0±1	1.0
				12	11	20.99	21.0±1	1.0
			16QAM	25	0	20.99	21.0±1	1.0
				1	0	21.09	21.0±1	1.0
				1	12	21.24	21.0±1	1.0
				1	24	21.11	21.0±1	1.0
				12	0	20.04	21.0±1	1.0
				12	6	20.03	21.0±1	1.0
				12	11	20	21.0±1	1.0
				25	0	20	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40290	2560.0	QPSK	1	0	22.32	22.0±1	/
				1	24	22.56	22.0±1	/
				1	49	22.26	22.0±1	/
				25	0	21.29	21.0±1	1.0
				25	12	21.31	21.0±1	1.0
				25	24	21.41	21.0±1	1.0
				50	0	21.36	21.0±1	1.0
			16QAM	1	0	21.49	21.0±1	1.0
				1	24	21.77	21.0±1	1.0
				1	49	21.42	21.0±1	1.0
				25	0	20.27	21.0±1	1.0
				25	12	20.33	21.0±1	1.0
				25	24	20.38	21.0±1	1.0
				50	0	20.35	21.0±1	1.0
	40740	2605.0	QPSK	1	0	22.22	22.0±1	/
				1	24	22.49	22.0±1	/
				1	49	22.19	22.0±1	/
				25	0	21.22	21.0±1	1.0
				25	12	21.2	21.0±1	1.0
				25	24	21.26	21.0±1	1.0
				50	0	21.25	21.0±1	1.0
			16QAM	1	0	21.52	21.0±1	1.0
				1	24	21.78	21.0±1	1.0
				1	49	21.5	21.0±1	1.0
				25	0	20.14	21.0±1	1.0
				25	12	20.2	21.0±1	1.0
				25	24	20.22	21.0±1	1.0
				50	0	20.2	21.0±1	1.0
	41190	2650.0	QPSK	1	0	22.07	22.0±1	/
				1	24	22.4	22.0±1	/
				1	49	22.11	22.0±1	/
				25	0	21.08	21.0±1	1.0
				25	12	21.08	21.0±1	1.0
				25	24	21.11	21.0±1	1.0
				50	0	21.1	21.0±1	1.0
			16QAM	1	0	21.25	21.0±1	1.0
				1	24	21.55	21.0±1	1.0
				1	49	21.31	21.0±1	1.0
				25	0	20.07	21.0±1	1.0
				25	12	20.06	21.0±1	1.0
				25	24	20.08	21.0±1	1.0
				50	0	20.08	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40315	2562.5	QPSK	1	0	22.28	22.0±1	/
				1	37	22.31	22.0±1	/
				1	74	22.13	22.0±1	/
				36	0	21.31	21.0±1	1.0
				36	16	21.37	21.0±1	1.0
				36	35	21.35	21.0±1	1.0
				75	0	21.39	21.0±1	1.0
			16QAM	1	0	21.46	21.0±1	1.0
				1	37	21.46	21.0±1	1.0
				1	74	21.29	21.0±1	1.0
				36	0	20.28	21.0±1	1.0
				36	16	20.3	21.0±1	1.0
				36	35	20.32	21.0±1	1.0
				75	0	20.32	21.0±1	1.0
	40740	2605.0	QPSK	1	0	22.12	22.0±1	/
				1	37	22.23	22.0±1	/
				1	74	22.17	22.0±1	/
				36	0	21.2	21.0±1	1.0
				36	16	21.24	21.0±1	1.0
				36	35	21.29	21.0±1	1.0
				75	0	21.37	21.0±1	1.0
			16QAM	1	0	21.44	21.0±1	1.0
				1	37	21.57	21.0±1	1.0
				1	74	21.47	21.0±1	1.0
				36	0	20.17	21.0±1	1.0
				36	16	20.17	21.0±1	1.0
				36	35	20.26	21.0±1	1.0
				75	0	20.24	21.0±1	1.0
	41165	2647.5	QPSK	1	0	22.04	22.0±1	/
				1	37	22.17	22.0±1	/
				1	74	22.1	22.0±1	/
				36	0	21.18	21.0±1	1.0
				36	16	21.17	21.0±1	1.0
				36	35	21.22	21.0±1	1.0
				75	0	21.22	21.0±1	1.0
			16QAM	1	0	21.13	21.0±1	1.0
				1	37	21.27	21.0±1	1.0
				1	74	21.16	21.0±1	1.0
				36	0	20.12	21.0±1	1.0
				36	16	20.11	21.0±1	1.0
				36	35	20.15	21.0±1	1.0
				75	0	20.13	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40340	2565.0	QPSK	1	0	22.14	22.0±1	/
				1	49	22.53	22.0±1	/
				1	99	21.98	22.0±1	/
				50	0	21.22	21.0±1	1.0
				50	24	21.3	21.0±1	1.0
				50	49	21.27	21.0±1	1.0
				100	0	21.23	21.0±1	1.0
			16QAM	1	0	21.34	21.0±1	1.0
				1	49	21.72	21.0±1	1.0
				1	99	21.16	21.0±1	1.0
				50	0	20.14	21.0±1	1.0
				50	24	20.22	21.0±1	1.0
				50	49	20.21	21.0±1	1.0
				100	0	20.21	21.0±1	1.0
	40740	2605.0	QPSK	1	0	22.54	22.0±1	/
				1	49	22.82	22.0±1	/
				1	99	22.56	22.0±1	/
				50	0	21.18	21.0±1	1.0
				50	24	21.98	21.0±1	1.0
				50	49	21.29	21.0±1	1.0
				100	0	21.25	21.0±1	1.0
			16QAM	1	0	21.06	21.0±1	1.0
				1	49	21.56	21.0±1	1.0
				1	99	21.12	21.0±1	1.0
				50	0	20.17	21.0±1	1.0
				50	24	20.24	21.0±1	1.0
				50	49	20.26	21.0±1	1.0
				100	0	20.22	21.0±1	1.0
	41140	2645.0	QPSK	1	0	21.87	22.0±1	/
				1	49	22.35	22.0±1	/
				1	99	21.98	22.0±1	/
				50	0	21.08	21.0±1	1.0
				50	24	21.05	21.0±1	1.0
				50	49	21.05	21.0±1	1.0
				100	0	21.06	21.0±1	1.0
			16QAM	1	0	21.07	21.0±1	1.0
				1	49	21.55	21.0±1	1.0
				1	99	21.19	21.0±1	1.0
				50	0	20.09	21.0±1	1.0
				50	24	20.05	21.0±1	1.0
				50	49	20.05	21.0±1	1.0
				100	0	20.03	21.0±1	1.0

ERP and EIRP**LTE Band 5**

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 22H	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
LTE Band 5 Channel 20407 – 1.4MHz – QPSK										
824.70	79.85	97	1.0	H	12.74	0.30	9.40	21.84	38.45	-16.61
824.70	79.96	282	2.3	V	12.43	0.30	9.40	21.53	38.45	-16.92
LTE Band 5 Channel 20525 – 1.4MHz – QPSK										
836.50	79.87	163	2.4	H	12.76	0.30	9.40	21.86	38.45	-16.59
836.50	80.10	292	1.8	V	12.57	0.30	9.40	21.67	38.45	-16.78
LTE Band 5 Channel 20643 – 1.4MHz – QPSK										
848.30	79.89	300	2.2	H	12.78	0.30	9.40	21.88	38.45	-16.57
848.30	80.12	303	1.6	V	12.59	0.30	9.40	21.69	38.45	-16.76
LTE Band 5 Channel 20407 – 1.4MHz – 16QAM										
824.70	79.91	358	1.6	H	12.80	0.30	9.40	21.90	38.45	-16.55
824.70	80.15	202	1.7	V	12.62	0.30	9.40	21.72	38.45	-16.73
LTE Band 5 Channel 20525 – 1.4MHz – 16QAM										
836.50	79.95	215	1.0	H	12.84	0.30	9.40	21.94	38.45	-16.51
836.50	80.19	14	2.5	V	12.66	0.30	9.40	21.76	38.45	-16.69
LTE Band 5 Channel 20643 – 1.4MHz – 16QAM										
848.30	79.98	115	2.4	H	12.87	0.30	9.40	21.97	38.45	-16.48
848.30	80.24	285	1.6	V	12.71	0.30	9.40	21.81	38.45	-16.64
LTE Band 5 Channel 20415 – 3MHz – QPSK										
825.50	79.85	219	2.3	H	12.74	0.30	9.40	21.84	38.45	-16.61
825.50	80.35	343	1.4	V	12.82	0.30	9.40	21.92	38.45	-16.53
LTE Band 5 Channel 20525 – 3MHz – QPSK										
836.50	79.82	31	2.4	H	12.71	0.30	9.40	21.81	38.45	-16.64
836.50	80.39	71	2.3	V	12.86	0.30	9.40	21.96	38.45	-16.49
LTE Band 5 Channel 20635 – 3MHz – QPSK										
847.50	79.90	311	2.4	H	12.79	0.30	9.40	21.89	38.45	-16.56
847.50	80.42	75	2.3	V	12.89	0.30	9.40	21.99	38.45	-16.46
LTE Band 5 Channel 20415 – 3MHz – 16QAM										
825.50	79.96	87	1.5	H	12.85	0.30	9.40	21.95	38.45	-16.50
825.50	80.46	259	1.8	V	12.93	0.30	9.40	22.03	38.45	-16.42
LTE Band 5 Channel 20525 – 3MHz – 16QAM										
836.50	79.97	101	1.6	H	12.86	0.30	9.40	21.96	38.45	-16.49
836.50	80.51	210	2.1	V	12.98	0.30	9.40	22.08	38.45	-16.37
LTE Band 5 Channel 20635 – 3MHz – 16QAM										
847.50	79.98	135	1.3	H	12.87	0.30	9.40	21.97	38.45	-16.48
847.50	80.52	208	1.2	V	12.99	0.30	9.40	22.09	38.45	-16.36
LTE Band 5 Channel 20425 – 5MHz – QPSK										
826.50	79.93	348	1.2	H	12.82	0.30	9.40	21.92	38.45	-16.53
826.50	80.47	288	1.1	V	12.94	0.30	9.40	22.04	38.45	-16.41
LTE Band 5 Channel 20525 – 5MHz – QPSK										
836.50	79.94	352	2.1	H	12.83	0.30	9.40	21.93	38.45	-16.52

836.50	80.41	357	2.2	V	12.88	0.30	9.40	21.98	38.45	-16.47
LTE Band 5 Channel 20625 – 5MHz – QPSK										
846.50	79.90	274	2.3	H	12.79	0.30	9.40	21.89	38.45	-16.56
846.50	80.39	39	2.1	V	12.86	0.30	9.40	21.96	38.45	-16.49
LTE Band 5 Channel 20425 – 5MHz – 16QAM										
826.50	79.91	95	1.7	H	12.80	0.30	9.40	21.90	38.45	-16.55
826.50	80.35	166	1.5	V	12.82	0.30	9.40	21.92	38.45	-16.53
LTE Band 5 Channel 20525 – 5MHz – 16QAM										
836.50	79.94	94	1.4	H	12.83	0.30	9.40	21.93	38.45	-16.52
836.50	80.36	71	1.2	V	12.83	0.30	9.40	21.93	38.45	-16.52
LTE Band 5 Channel 20625 – 5MHz – 16QAM										
846.50	79.95	9	1.3	H	12.84	0.30	9.40	21.94	38.45	-16.51
846.50	80.38	4	1.6	V	12.85	0.30	9.40	21.95	38.45	-16.50
LTE Band 5 Channel 20450 – 10MHz – QPSK										
829.00	80.25	324	2.0	H	13.14	0.30	9.40	22.24	38.45	-16.21
829.00	80.58	346	1.7	V	13.05	0.30	9.40	22.15	38.45	-16.30
LTE Band 5 Channel 20525 – 10MHz – QPSK										
836.50	80.23	76	2.3	H	13.12	0.30	9.40	22.22	38.45	-16.23
836.50	80.56	102	1.1	V	13.03	0.30	9.40	22.13	38.45	-16.32
LTE Band 5 Channel 20600 – 10MHz – QPSK										
844.00	80.29	59	2.2	H	13.18	0.30	9.40	22.28	38.45	-16.17
844.00	80.59	198	1.7	V	13.06	0.30	9.40	22.16	38.45	-16.29
LTE Band 5 Channel 20450 – 10MHz – 16QAM										
829.00	80.28	70	2.5	H	13.17	0.30	9.40	22.27	38.45	-16.18
829.00	80.60	42	1.7	V	13.07	0.30	9.40	22.17	38.45	-16.28
LTE Band 5 Channel 20525 – 10MHz – 16QAM										
836.50	80.24	1	2.1	H	13.13	0.30	9.40	22.23	38.45	-16.22
836.50	80.67	189	1.4	V	13.14	0.30	9.40	22.24	38.45	-16.21
LTE Band 5 Channel 20600 – 10MHz – 16QAM										
844.00	80.21	55	1.9	H	13.10	0.30	9.40	22.20	38.45	-16.25
844.00	80.68	100	2.1	V	13.15	0.30	9.40	22.25	38.45	-16.20

LTE Band 7

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 27	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
LTE Band 7 Channel 20775 – 5MHz – QPSK										
2502.50	84.56	66	1.2	H	10.56	0.43	10.60	20.73	33	-12.27
2502.50	80.54	340	1.3	V	10.26	0.43	10.60	20.43	33	-12.57
LTE Band 7 Channel 21100 – 5MHz – QPSK										
2535.00	84.57	199	1.6	H	10.57	0.43	10.60	20.74	33	-12.26
2535.00	80.59	169	1.7	V	10.31	0.43	10.60	20.48	33	-12.52
LTE Band 7 Channel 21425 – 5MHz – QPSK										
2567.50	84.59	220	1.8	H	10.48	0.43	10.60	20.65	33	-12.35
2567.50	80.57	57	2.5	V	10.38	0.43	10.60	20.55	33	-12.45
LTE Band 7 Channel 20775 – 5MHz – 16QAM										
2502.50	84.57	349	1.3	H	10.57	0.43	10.60	20.74	33	-12.26
2502.50	80.63	173	2.2	V	10.35	0.43	10.60	20.52	33	-12.48
LTE Band 7 Channel 21100 – 5MHz – 16QAM										
2535.00	84.59	20	2.4	H	10.59	0.43	10.60	20.76	33	-12.24
2535.00	80.62	125	2.0	V	10.34	0.43	10.60	20.51	33	-12.49
LTE Band 7 Channel 21425 – 5MHz – 16QAM										
2567.50	84.63	8	1.2	H	10.52	0.43	10.60	20.69	33	-12.31
2567.50	80.68	273	1.2	V	10.49	0.43	10.60	20.66	33	-12.34
LTE Band 7 Channel 20800 – 10MHz – QPSK										
2505.00	84.72	343	1.6	H	10.72	0.43	10.60	20.89	33	-12.11
2505.00	80.82	269	1.2	V	10.54	0.43	10.60	20.71	33	-12.29
LTE Band 7 Channel 21100 – 10MHz – QPSK										
2535.00	84.81	78	1.1	H	10.81	0.43	10.60	20.98	33	-12.02
2535.00	80.89	260	1.8	V	10.61	0.43	10.60	20.78	33	-12.22
LTE Band 7 Channel 21400 – 10MHz – QPSK										
2565.00	84.83	156	1.5	H	10.72	0.43	10.60	20.89	33	-12.11
2565.00	80.91	350	2.0	V	10.72	0.43	10.60	20.89	33	-12.11
LTE Band 7 Channel 20800 – 10MHz – 16QAM										
2505.00	84.85	290	2.2	H	10.85	0.43	10.60	21.02	33	-11.98
2505.00	80.96	303	1.9	V	10.68	0.43	10.60	20.85	33	-12.15
LTE Band 7 Channel 21100 – 10MHz – 16QAM										
2535.00	84.87	234	2.3	H	10.87	0.43	10.60	21.04	33	-11.96
2535.00	80.98	346	1.1	V	10.70	0.43	10.60	20.87	33	-12.13
LTE Band 7 Channel 21400 – 10MHz – 16QAM										
2565.00	84.88	360	2.2	H	10.77	0.43	10.60	20.94	33	-12.06
2565.00	81.02	55	1.6	V	10.83	0.43	10.60	21.00	33	-12.00
LTE Band 7 Channel 20825 – 15MHz – QPSK										
2507.50	84.92	340	2.1	H	10.92	0.43	10.60	21.09	33	-11.91
2507.50	81.05	288	2.4	V	10.77	0.43	10.60	20.94	33	-12.06
LTE Band 7 Channel 21100 – 15MHz – QPSK										
2535.00	84.96	200	1.6	H	10.96	0.43	10.60	21.13	33	-11.87

2535.00	81.07	330	1.7	V	10.79	0.43	10.60	20.96	33	-12.04
LTE Band 7 Channel 21375 – 15MHz – QPSK										
2562.50	84.99	347	1.5	H	10.88	0.43	10.60	21.05	33	-11.95
2562.50	81.24	263	1.6	V	11.05	0.43	10.60	21.22	33	-11.78
LTE Band 7 Channel 20825 – 15MHz – 16QAM										
2507.50	85.03	177	1.7	H	11.03	0.43	10.60	21.20	33	-11.80
2507.50	81.29	53	1.6	V	11.01	0.43	10.60	21.18	33	-11.82
LTE Band 7 Channel 21100 – 15MHz – 16QAM										
2535.00	85.09	156	1.4	H	11.09	0.43	10.60	21.26	33	-11.74
2535.00	81.30	178	1.3	V	11.02	0.43	10.60	21.19	33	-11.81
LTE Band 7 Channel 21375 – 15MHz – 16QAM										
2562.50	85.15	233	2.0	H	11.04	0.43	10.60	21.21	33	-11.79
2562.50	81.34	76	2.2	V	11.15	0.43	10.60	21.32	33	-11.68
LTE Band 7 Channel 20850 – 20MHz – QPSK										
2510.00	85.19	50	1.2	H	11.19	0.43	10.60	21.36	33	-11.64
2510.00	81.36	337	1.2	V	11.08	0.43	10.60	21.25	33	-11.75
LTE Band 7 Channel 21100 – 20MHz – QPSK										
2535.00	85.20	186	1.5	H	11.20	0.43	10.60	21.37	33	-11.63
2535.00	81.39	205	2.5	V	11.11	0.43	10.60	21.28	33	-11.72
LTE Band 7 Channel 21350 – 20MHz – QPSK										
2560.00	85.36	336	1.4	H	11.25	0.43	10.60	21.42	33	-11.58
2560.00	81.41	110	2.4	V	11.22	0.43	10.60	21.39	33	-11.61
LTE Band 7 Channel 20850 – 20MHz – 16QAM										
2510.00	85.48	82	2.3	H	11.48	0.43	10.60	21.65	33	-11.35
2510.00	81.58	220	1.6	V	11.30	0.43	10.60	21.47	33	-11.53
LTE Band 7 Channel 21100 – 20MHz – 16QAM										
2535.00	85.52	327	2.0	H	11.52	0.43	10.60	21.69	33	-11.31
2535.00	81.67	353	1.6	V	11.39	0.43	10.60	21.56	33	-11.44
LTE Band 7 Channel 21350 – 20MHz – 16QAM										
2560.00	85.58	193	1.1	H	11.47	0.43	10.60	21.64	33	-11.36
2560.00	81.71	66	1.6	V	11.52	0.43	10.60	21.69	33	-11.31

LTE Band 41

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 27	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
LTE Band 41 Channel 39675 – 5MHz – QPSK										
2498.50	85.02	137	1.2	H	11.02	0.43	10.60	21.19	33	-11.81
2498.50	86.25	354	1.0	V	10.97	0.43	10.60	21.14	33	-11.86
LTE Band 41 Channel 40620 – 5MHz – QPSK										
2593.00	85.06	5	1.8	H	11.06	0.43	10.60	21.23	33	-11.77
2593.00	86.24	38	1.3	V	10.96	0.43	10.60	21.13	33	-11.87
LTE Band 41 Channel 41565 – 5MHz – QPSK										
2687.50	85.04	268	2.2	H	10.93	0.43	10.60	21.10	33	-11.90
2687.50	86.23	138	1.6	V	11.04	0.43	10.60	21.21	33	-11.79
LTE Band 41 Channel 39675 – 5MHz – 16QAM										
2498.50	85.05	341	1.9	H	11.05	0.43	10.60	21.22	33	-11.78
2498.50	86.29	99	2.0	V	11.01	0.43	10.60	21.18	33	-11.82
LTE Band 41 Channel 40620 – 5MHz – 16QA										
2593.00	85.07	19	1.1	H	11.07	0.43	10.60	21.24	33	-11.76
2593.00	86.28	217	2.3	V	11.00	0.43	10.60	21.17	33	-11.83
LTE Band 41 Channel 41565 – 5MHz – 16QAM										
2687.50	85.09	225	2.5	H	10.98	0.43	10.60	21.15	33	-11.85
2687.50	86.22	9	1.5	V	11.03	0.43	10.60	21.20	33	-11.80
LTE Band 41 Channel 39700 – 10MHz – QPSK										
2501.00	85.03	342	1.9	H	11.03	0.43	10.60	21.20	33	-11.80
2501.00	86.28	354	1.7	V	11.00	0.43	10.60	21.17	33	-11.83
LTE Band 41 Channel 40620 – 10MHz – QPSK										
2593.00	85.04	177	2.0	H	11.04	0.43	10.60	21.21	33	-11.79
2593.00	86.21	170	2.0	V	10.93	0.43	10.60	21.10	33	-11.90
LTE Band 41 Channel 41540 – 10MHz – QPSK										
2685.00	85.03	242	1.2	H	10.92	0.43	10.60	21.09	33	-11.91
2685.00	86.27	131	1.6	V	11.08	0.43	10.60	21.25	33	-11.75
LTE Band 41 Channel 39700 – 10MHz – 16QAM										
2501.00	85.08	162	1.6	H	11.08	0.43	10.60	21.25	33	-11.75
2501.00	86.29	1	2.1	V	11.01	0.43	10.60	21.18	33	-11.82
LTE Band 41 Channel 40620 – 10MHz – 16QAM										
2593.00	85.06	261	2.2	H	11.06	0.43	10.60	21.23	33	-11.77
2593.00	86.31	287	1.2	V	11.03	0.43	10.60	21.20	33	-11.80
LTE Band 41 Channel 41540 – 10MHz – 16QAM										
2685.00	85.09	43	1.7	H	10.98	0.43	10.60	21.15	33	-11.85
2685.00	86.32	92	2.2	V	11.13	0.43	10.60	21.30	33	-11.70
LTE Band 41 Channel 39725 – 15MHz – QPSK										
2503.50	85.10	78	1.7	H	11.10	0.43	10.60	21.27	33	-11.73
2503.50	86.34	216	2.2	V	11.06	0.43	10.60	21.23	33	-11.77
LTE Band 41 Channel 40620 – 15MHz – QPSK										
2593.00	85.19	260	1.6	H	11.19	0.43	10.60	21.36	33	-11.64

2593.00	86.41	110	1.8	V	11.13	0.43	10.60	21.30	33	-11.70
LTE Band 41 Channel 41515 – 15MHz – QPSK										
2682.50	85.21	349	2.3	H	11.10	0.43	10.60	21.27	33	-11.73
2682.50	86.38	53	1.8	V	11.19	0.43	10.60	21.36	33	-11.64
LTE Band 41 Channel 39725 – 15MHz – 16QAM										
2503.50	85.28	20	2.4	H	11.28	0.43	10.60	21.45	33	-11.55
2503.50	86.36	125	2.4	V	11.08	0.43	10.60	21.25	33	-11.75
LTE Band 41 Channel 40620 – 15MHz – 16QAM										
2593.00	85.39	47	1.3	H	11.39	0.43	10.60	21.56	33	-11.44
2593.00	86.39	318	2.2	V	11.11	0.43	10.60	21.28	33	-11.72
LTE Band 41 Channel 41515 – 15MHz – 16QAM										
2682.50	85.33	103	1.3	H	11.22	0.43	10.60	21.39	33	-11.61
2682.50	86.35	303	1.5	V	11.16	0.43	10.60	21.33	33	-11.67
LTE Band 41 Channel 39750 – 20MHz – QPSK										
2506.00	85.41	23	1.3	H	11.41	0.43	10.60	21.58	33	-11.42
2506.00	86.51	160	1.9	V	11.23	0.43	10.60	21.40	33	-11.60
LTE Band 41 Channel 40620 – 20MHz – QPSK										
2593.00	85.47	211	1.9	H	11.47	0.43	10.60	21.64	33	-11.36
2593.00	86.61	171	1.8	V	11.33	0.43	10.60	21.50	33	-11.50
LTE Band 41 Channel 41490 – 20MHz – QPSK										
2680.00	85.51	342	1.3	H	11.40	0.43	10.60	21.57	33	-11.43
2680.00	86.63	229	1.3	V	11.44	0.43	10.60	21.61	33	-11.39
LTE Band 41 Channel 39750 – 20MHz – 16QAM										
2506.00	85.58	187	2.4	H	11.58	0.43	10.60	21.75	33	-11.25
2506.00	86.69	56	2.4	V	11.41	0.43	10.60	21.58	33	-11.42
LTE Band 41 Channel 40620 – 20MHz – 16QAM										
2593.00	85.56	124	1.1	H	11.56	0.43	10.60	21.73	33	-11.27
2593.00	86.71	57	1.4	V	11.43	0.43	10.60	21.60	33	-11.40
LTE Band 41 Channel 41490 – 20MHz – 16QAM										
2680.00	85.57	150	1.0	H	11.46	0.43	10.60	21.63	33	-11.37
2680.00	86.80	164	2.3	V	11.61	0.43	10.60	21.78	33	-11.22

9 Peak-to-Average Ratio

Test Requirement:	27.50(d)
Test Method:	N/A
Test Mode:	TX transmitting


9.1 EUT Operation

Operating Environment :

Temperature:	22.5 °C
Humidity:	52.3% RH
Atmospheric Pressure:	101.2kPa

9.2 Test Procedure

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

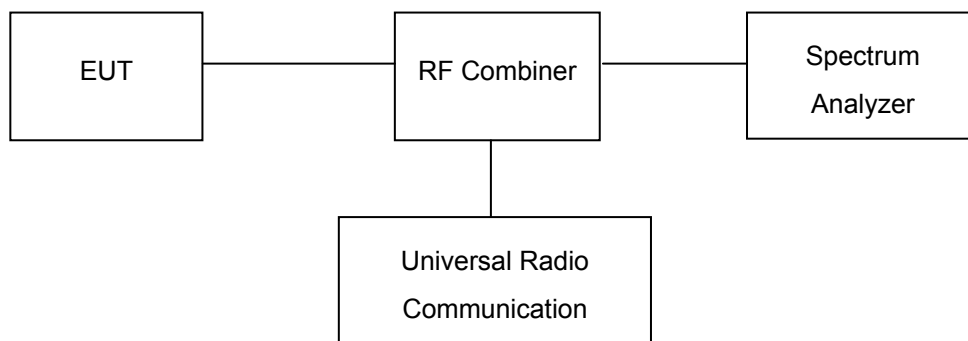

9.3 Test Result

PASS

LTE Band

Please refer to the Annex B. LTE Peak to Average Ratio for LTE Band 5/7/41.

10 BANDWIDTH

Test Requirement:	FCC Part 2.1049, 22.917, 22.905, 27.53(a)
Test Method:	ANSI C63.26:2015 ANSI/TIA-603-E:2016
Test Mode:	TX transmitting

10.1 EUT Operation


Operating Environment :

Temperature:	22.5 °C
Humidity:	52.3% RH
Atmospheric Pressure:	101.2kPa

10.2 Test Procedure

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set in the range of 1 to 5 % of the anticipated OBW and the 26 dB & 99%bandwidth was recorded.

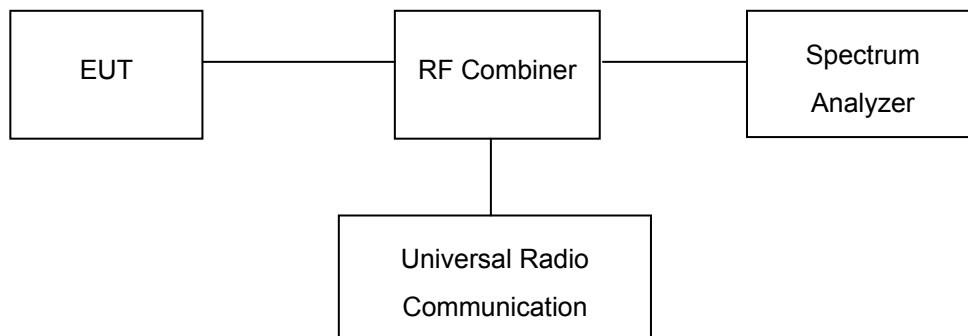

10.3 Test Result

LTE Band 5 (Part 22H):

BW(MHz)	Channel	Frequency (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1.4	20407	824.7	QPSK	1.1	1.33
			16QAM	1.1	1.3
1.4	20525	836.5	QPSK	1.1	1.32
			16QAM	1.09	1.28
1.4	20643	848.3	QPSK	1.1	1.33
			16QAM	1.1	1.33
3	20415	825.5	QPSK	2.68	2.85
			16QAM	2.68	2.87
3	20525	836.5	QPSK	2.68	2.86
			16QAM	2.68	2.85
3	20635	847.5	QPSK	2.69	2.99
			16QAM	2.68	2.87
5	20425	826.5	QPSK	4.54	4.99
			16QAM	4.52	4.99
5	20525	836.5	QPSK	4.52	4.97
			16QAM	4.53	4.99
5	20625	846.5	QPSK	4.53	4.99
			16QAM	4.55	4.99
10	20450	829.0	QPSK	8.96	9.99
			16QAM	8.96	9.69
10	20525	836.5	QPSK	8.95	9.85
			16QAM	8.96	9.88
10	20600	844.0	QPSK	8.96	9.99
			16QAM	8.96	9.99

LTE Band 7 (Part 27):


BW(MHz)	Channel	Frequency (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
5	20775	2502.5	QPSK	4.53	4.99
			16QAM	4.53	4.99
5	21100	2535	QPSK	4.52	4.99
			16QAM	4.53	4.99
5	21425	2567.5	QPSK	4.52	4.99
			16QAM	4.54	4.99
10	20850	2510	QPSK	8.97	9.94
			16QAM	8.96	9.82
10	21100	2535	QPSK	8.95	9.78
			16QAM	8.96	9.82
10	21400	2565	QPSK	8.95	9.86
			16QAM	8.96	9.91
15	20800	2505	QPSK	13.55	14.99
			16QAM	13.52	14.99
15	21100	2535	QPSK	13.47	14.99
			16QAM	13.51	14.99
15	21375	2562.5	QPSK	13.5	14.99
			16QAM	13.53	14.99
20	20825	2507.5	QPSK	17.93	19.54
			16QAM	17.99	19.64
20	21100	2535	QPSK	17.92	19.55
			16QAM	17.95	19.99
20	21350	2560	QPSK	17.96	19.64
			16QAM	17.94	19.73


LTE Band 41 (Part 27)

BW(MHz)	Channel	Frequency (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
5	40265	2557.5	QPSK	4.5	4.99
			16QAM	4.51	4.99
5	40740	2605.0	QPSK	4.51	4.99
			16QAM	4.52	4.99
5	41215	2652.5	QPSK	4.51	4.99
			16QAM	4.51	4.99
10	40290	2560.0	QPSK	8.96	9.85
			16QAM	8.93	9.54
10	40740	2605.0	QPSK	8.96	9.99
			16QAM	8.94	9.72
10	41190	2650.0	QPSK	8.94	9.72
			16QAM	8.95	9.78
15	40315	2562.5	QPSK	13.48	15
			16QAM	13.48	14.93
15	40740	2605.0	QPSK	13.47	14.99
			16QAM	13.55	14.99
15	41165	2647.5	QPSK	13.51	14.99
			16QAM	13.54	14.99
20	40340	2565.0	QPSK	17.94	19.35
			16QAM	17.92	19.73
20	40740	2605.0	QPSK	17.92	19.52
			16QAM	17.96	19.55
20	41140	2645.0	QPSK	17.91	19.71
			16QAM	17.91	19.65


Test Plots

LTE Band 5 (Part 22H)

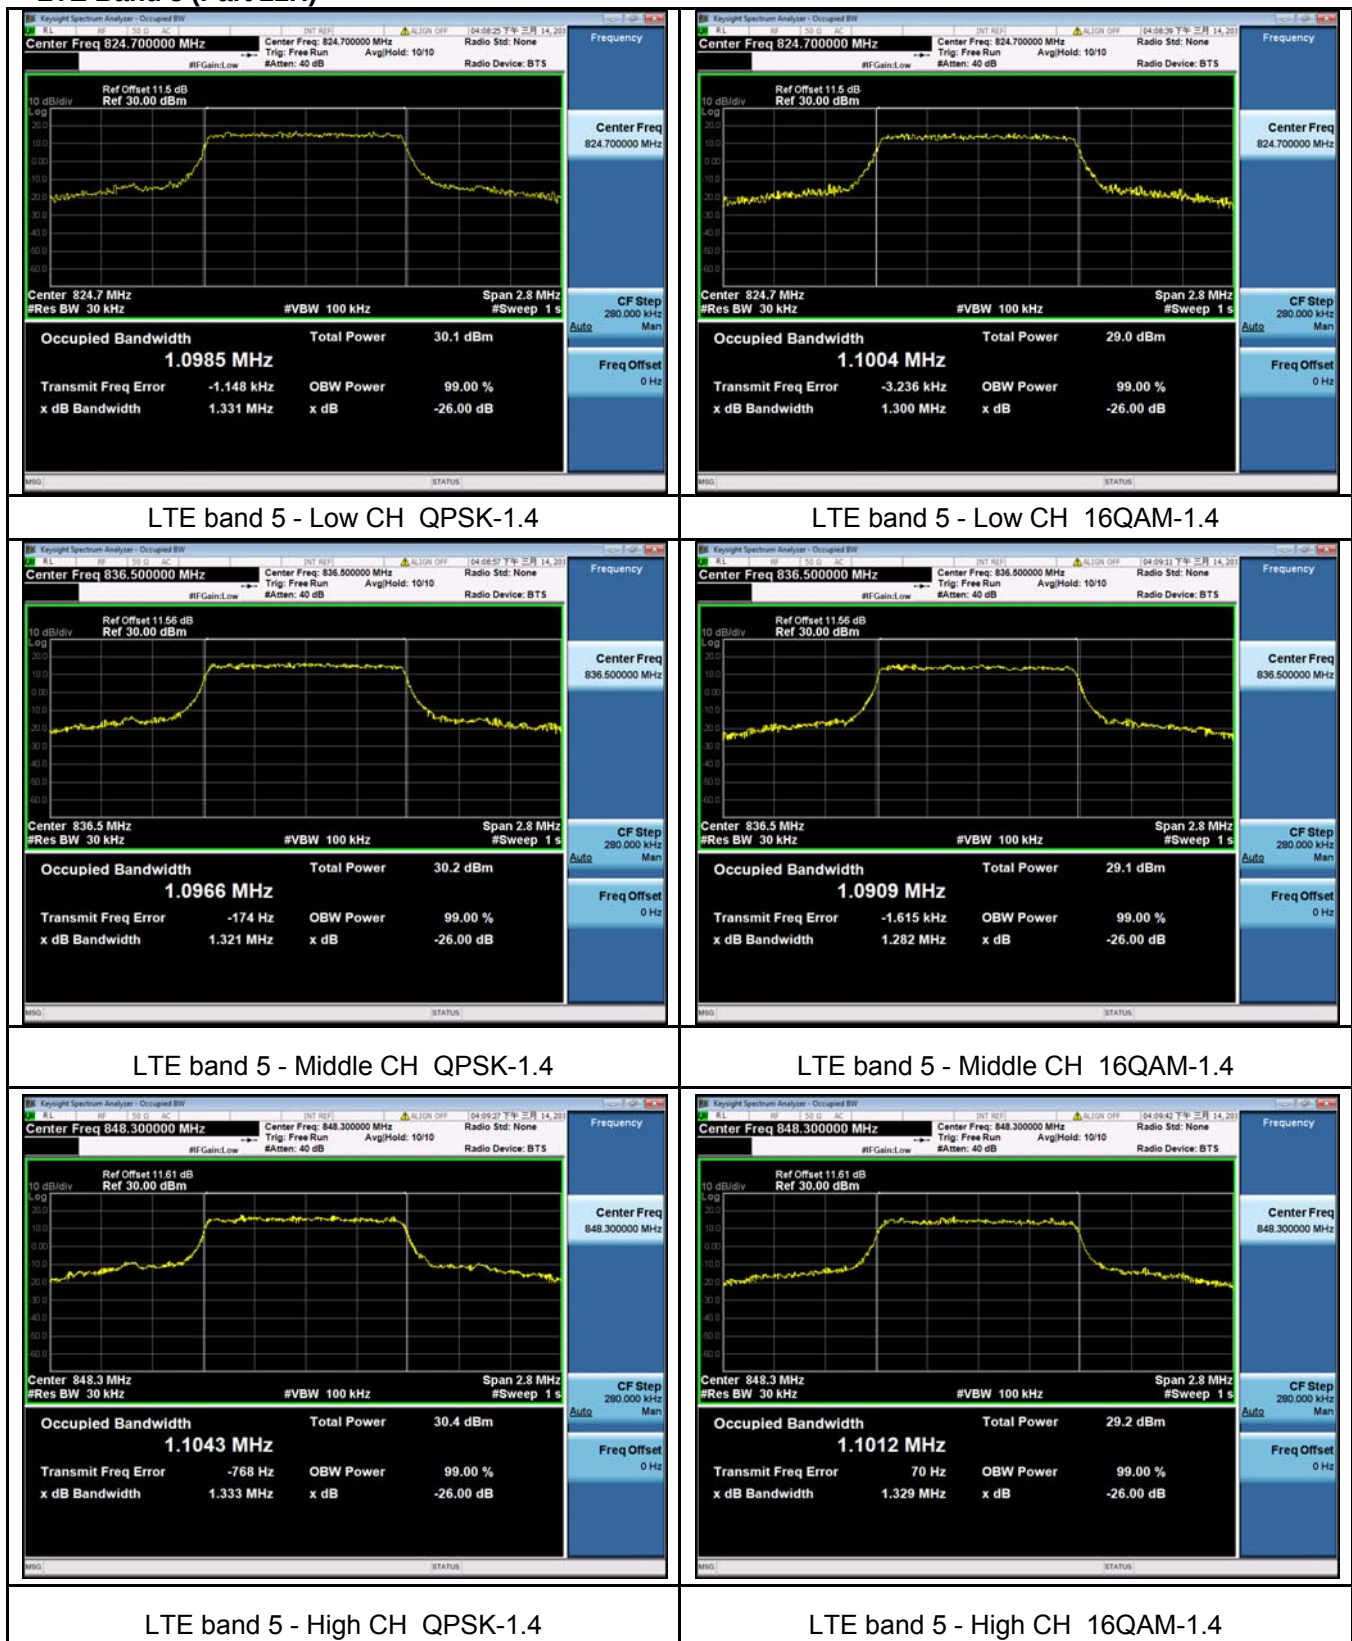

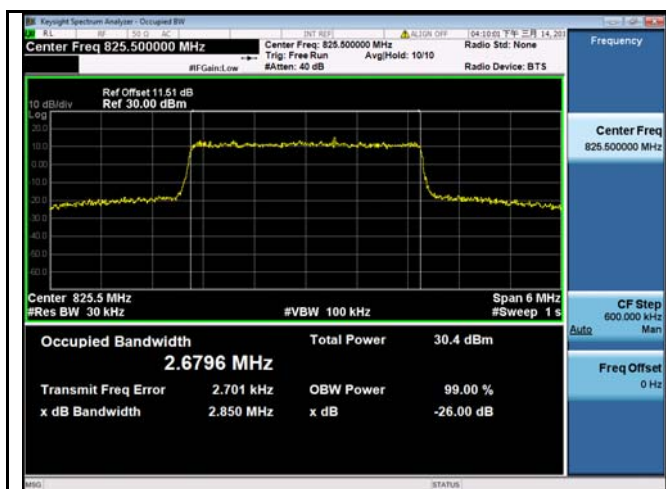


LTE band 5 - Low CH QPSK-3

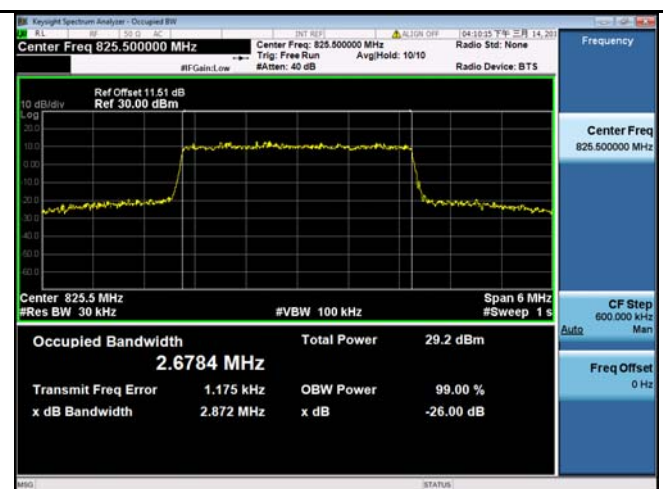


LTE band 5 - Low CH 16QAM-3




LTE band 5 - Middle CH QPSK-3

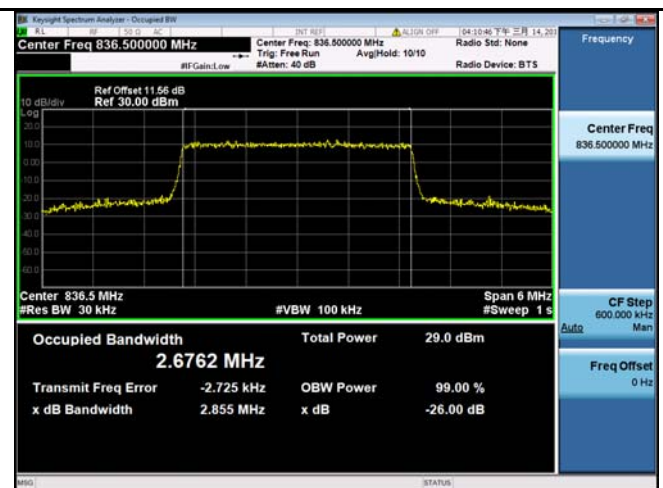

LTE band 5 - Middle CH 16QAM-3

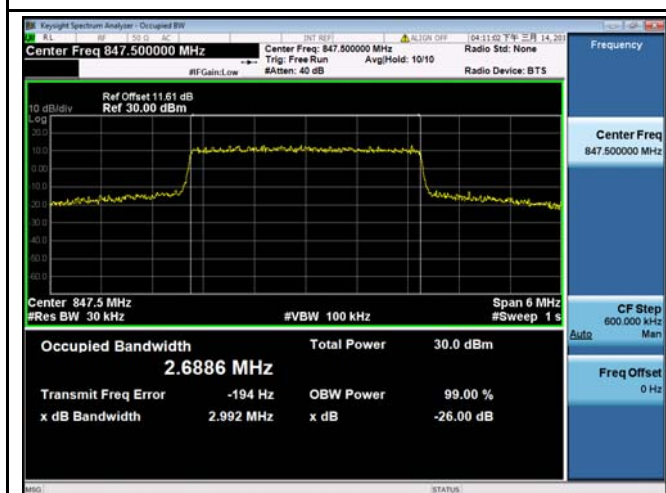


LTE band 5 - High CH QPSK-3

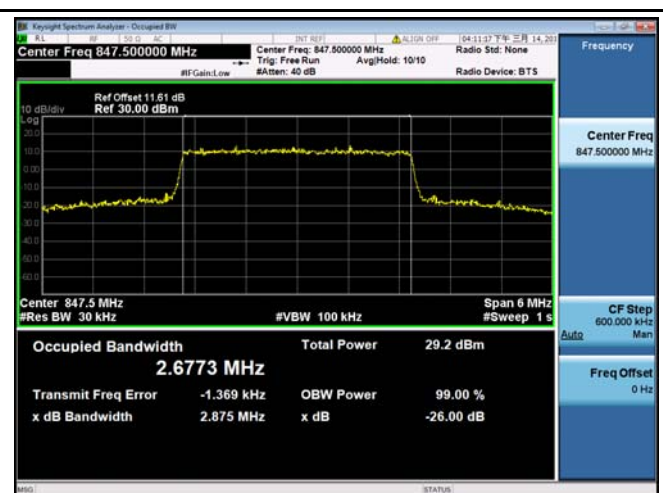

LTE band 5 - High CH 16QAM-3




LTE band 5 - Low CH QPSK-5

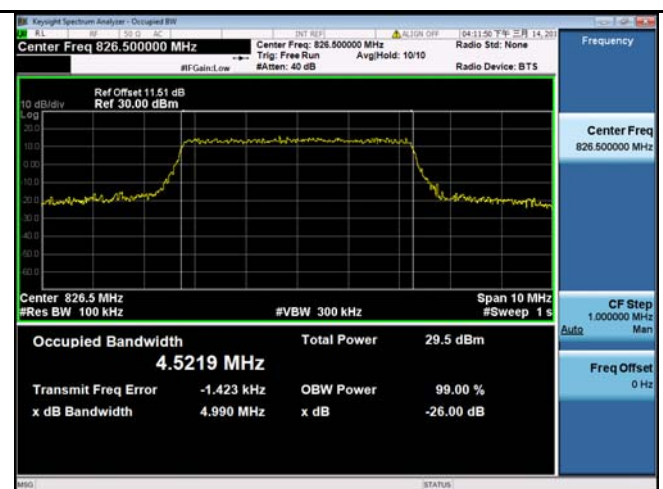

LTE band 5 - Low CH 16QAM-5




LTE band 5 - Middle CH QPSK-5

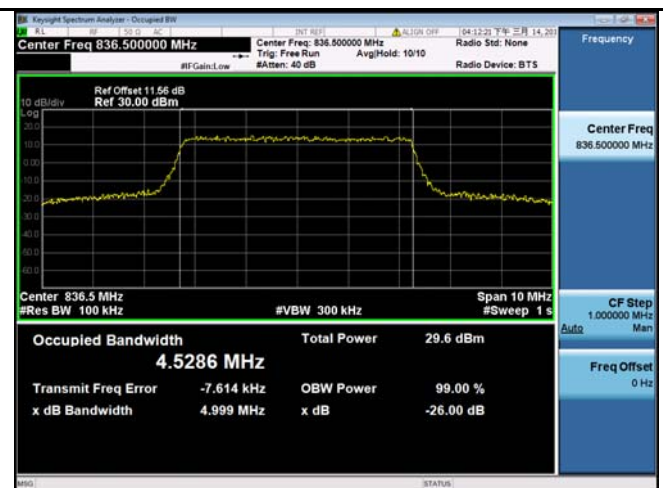

LTE band 5 - Middle CH 16QAM-5




LTE band 5 - High CH QPSK-5

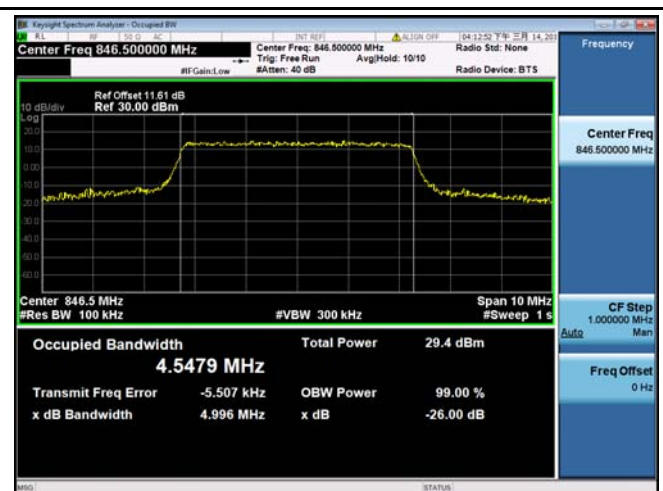


LTE band 5 - High CH 16QAM-5




LTE band 5 - Low CH QPSK-10

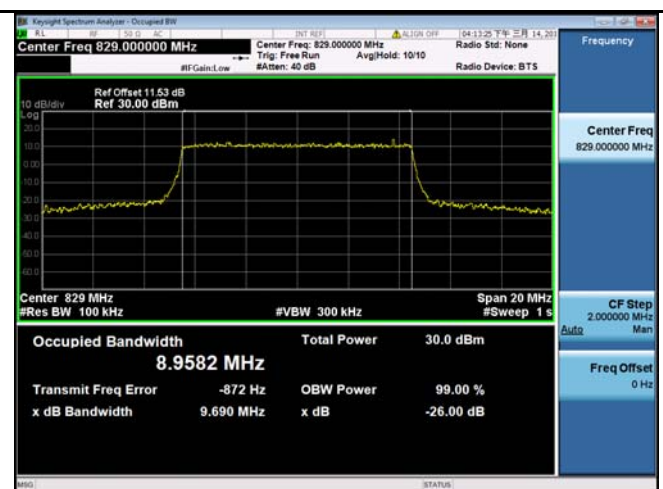

LTE band 5 - Low CH 16QAM-10

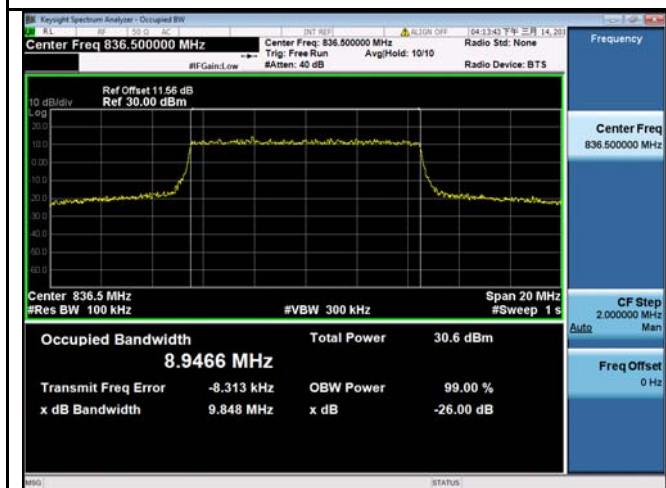


LTE band 5 - Middle CH QPSK-10

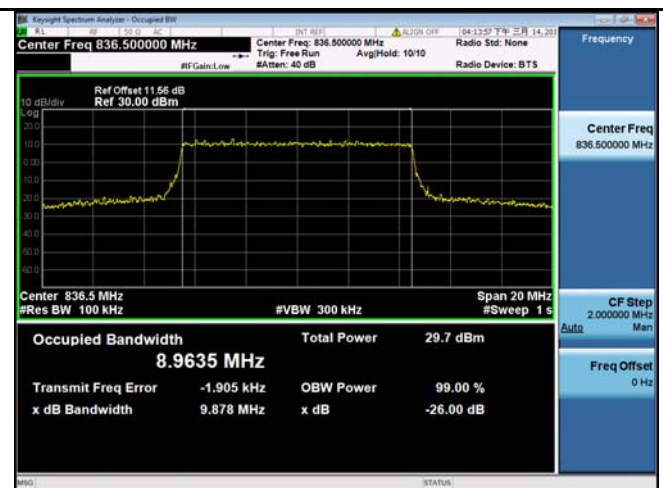

LTE band 5 - Middle CH 16QAM-10




LTE band 5 - High CH QPSK-10

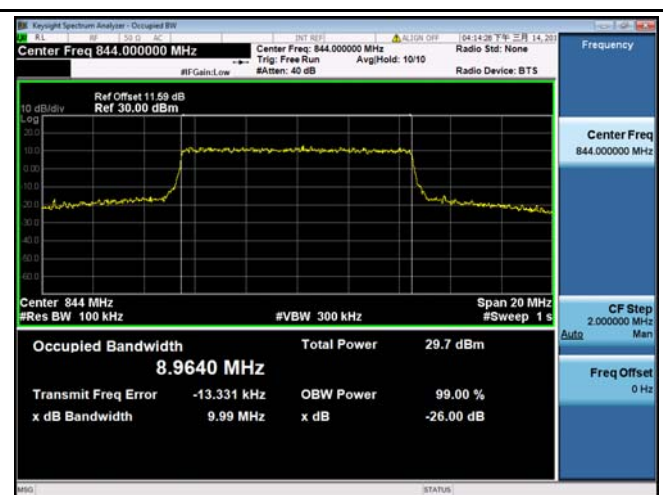


LTE band 5 - High CH 16QAM-10


LTE Band 7 (Part 27)

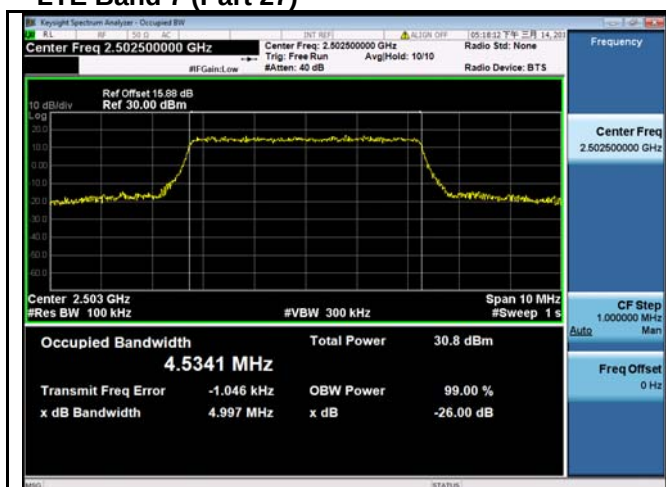


LTE band 7 - Low CH QPSK-5

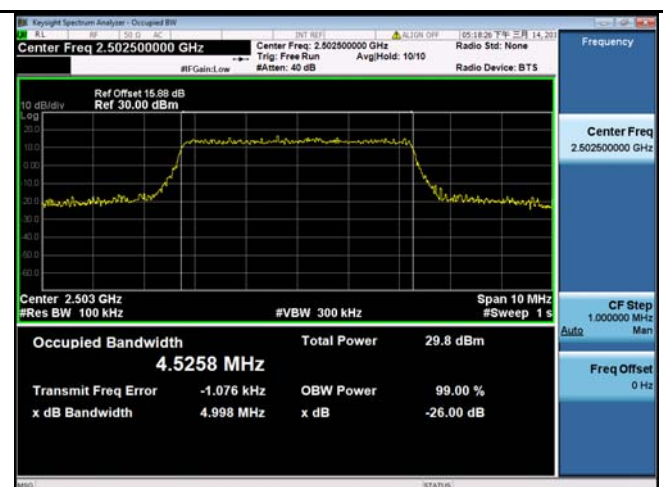


LTE band 7 - Low CH 16QAM-5

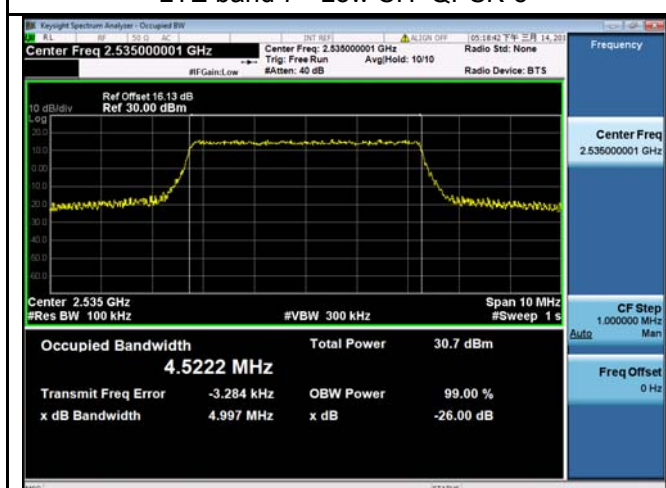


LTE band 7 - Middle CH QPSK-5

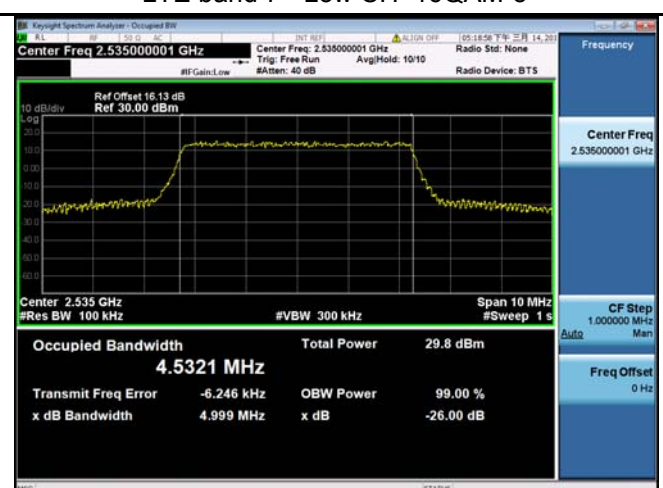


LTE band 7 - Middle CH 16QAM-5

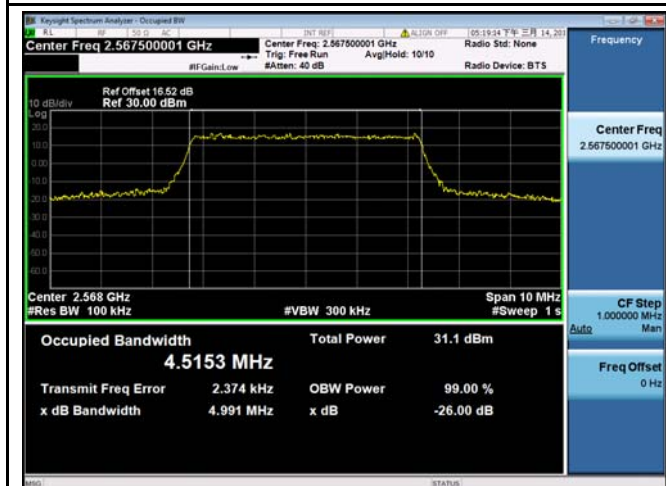


LTE band 7 - High CH QPSK-5

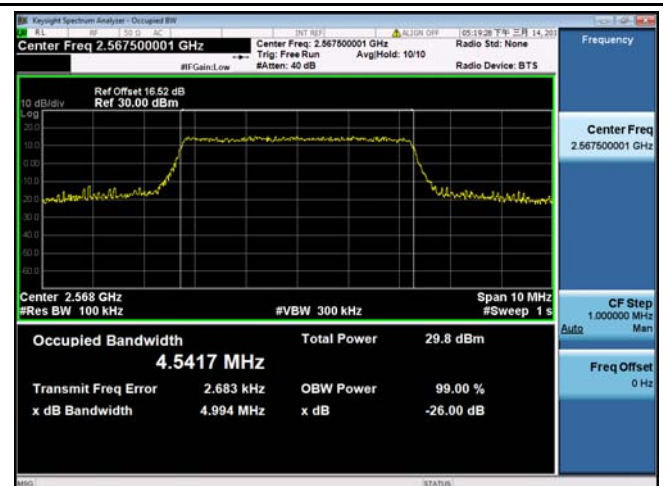


LTE band 7 - High CH 16QAM-5

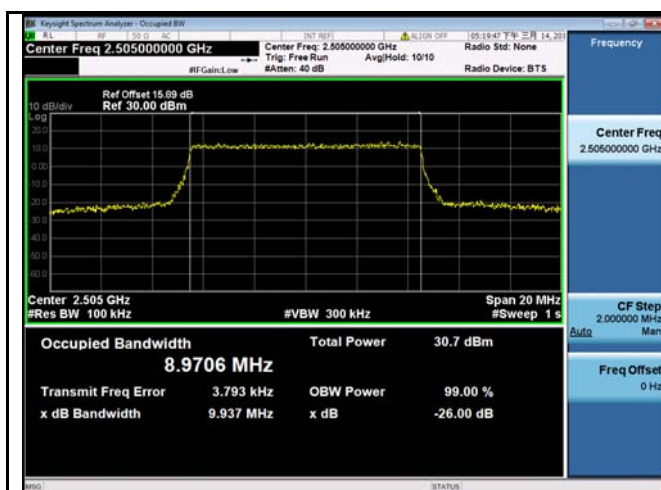


LTE band 7 - Low CH QPSK-10

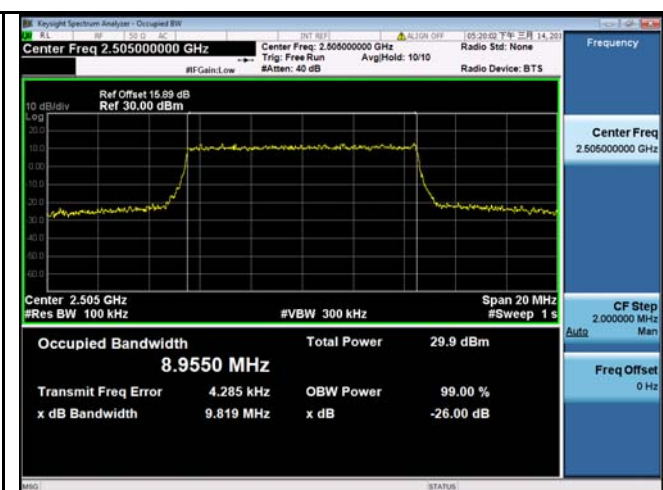


LTE band 7 - Low CH 16QAM-10

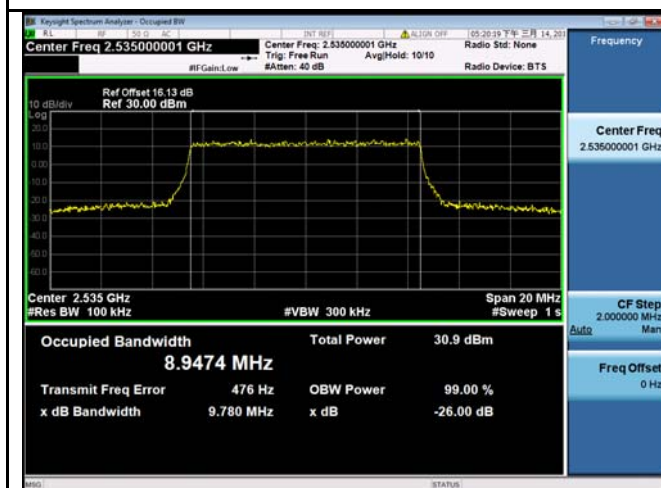


LTE band 7 - Middle CH QPSK-10

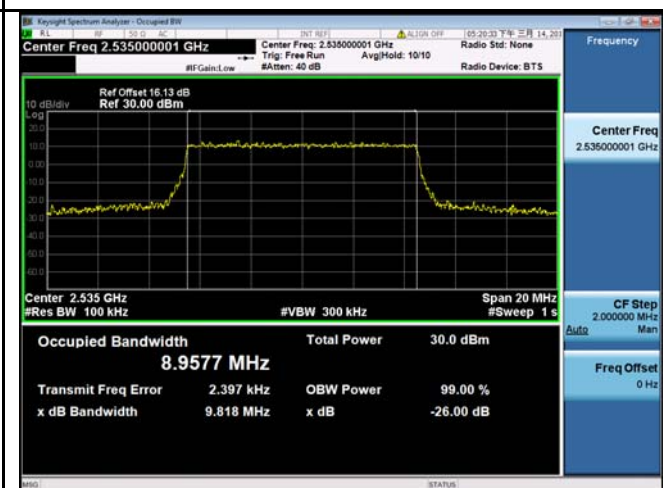

LTE band 7 - Middle CH 16QAM-10

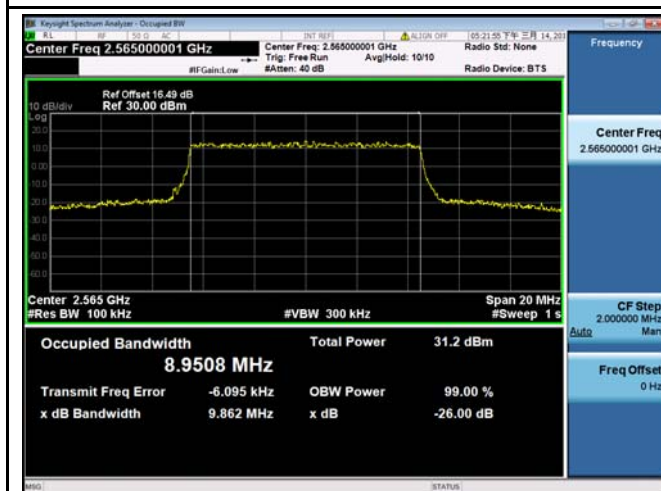


LTE band 7 - High CH QPSK-10

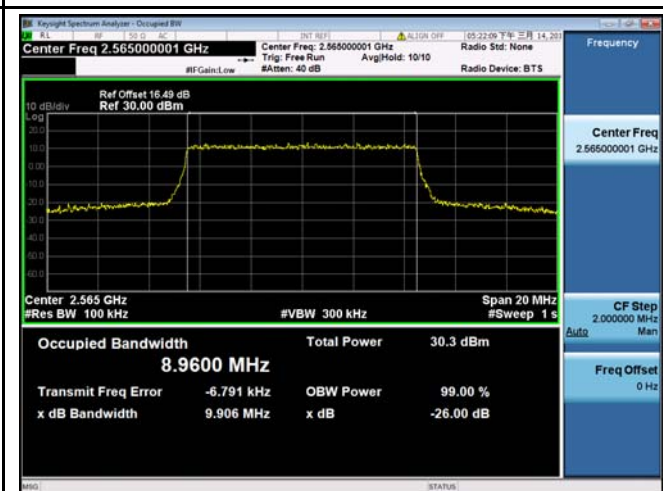


LTE band 7 - High CH 16QAM-10




LTE band 7 - Low CH QPSK-15

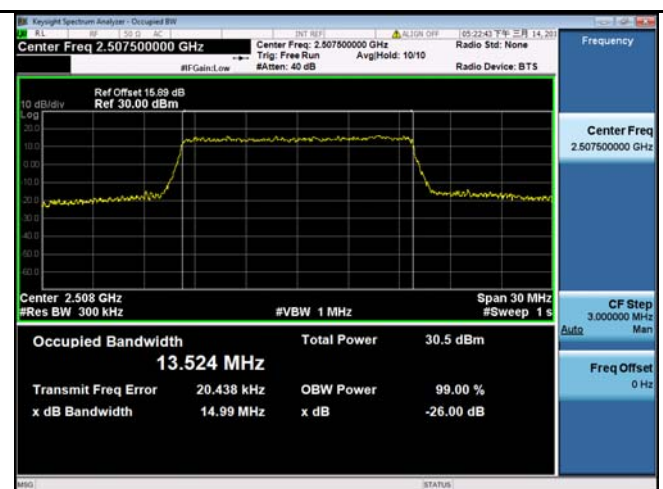

LTE band 7 - Low CH 16QAM-15

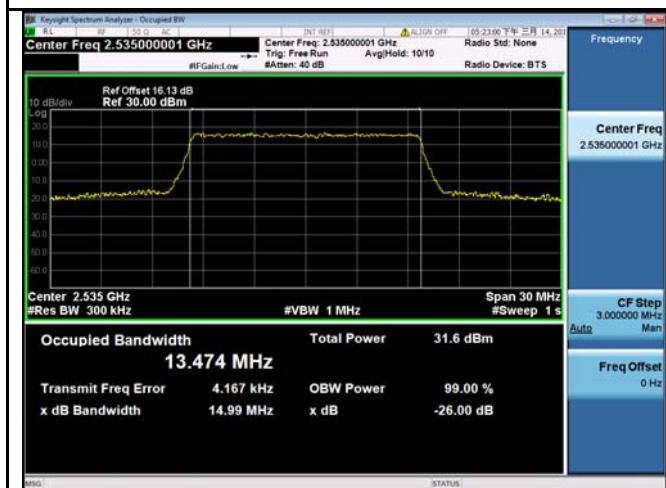


LTE band 7 - Middle CH QPSK-15

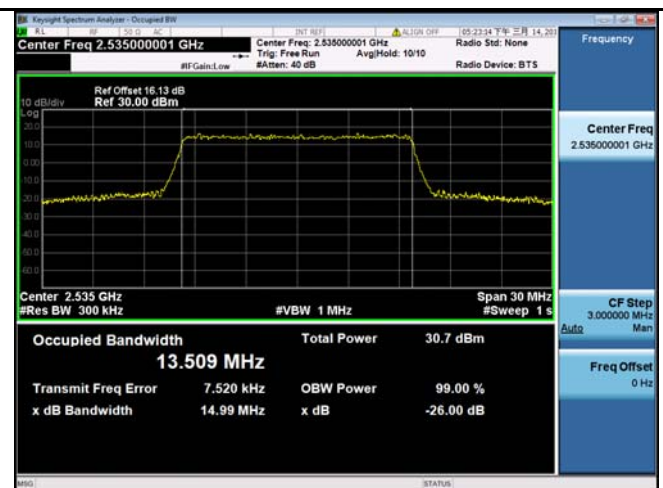


LTE band 7 - Middle CH 16QAM-15




LTE band 7 - High CH QPSK-15

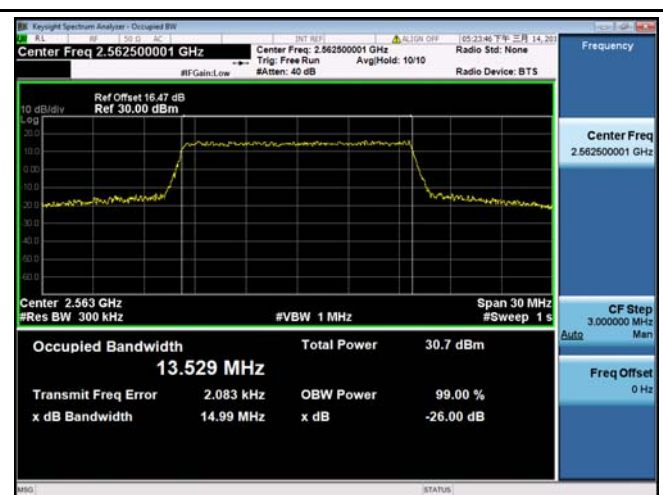


LTE band 7 - High CH 16QAM-15

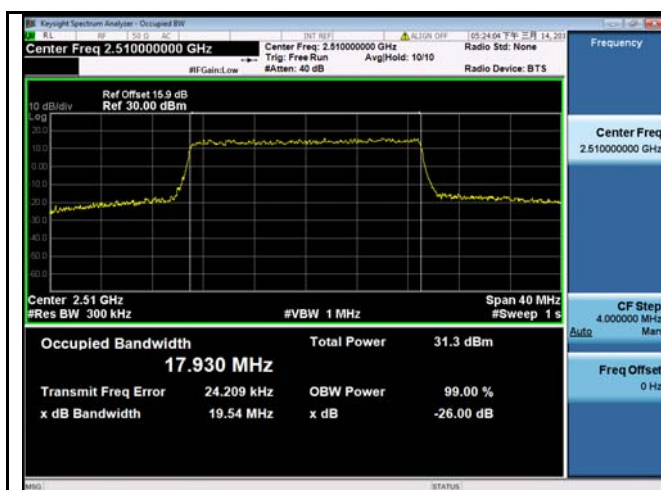


LTE band 7 - Low CH QPSK-20

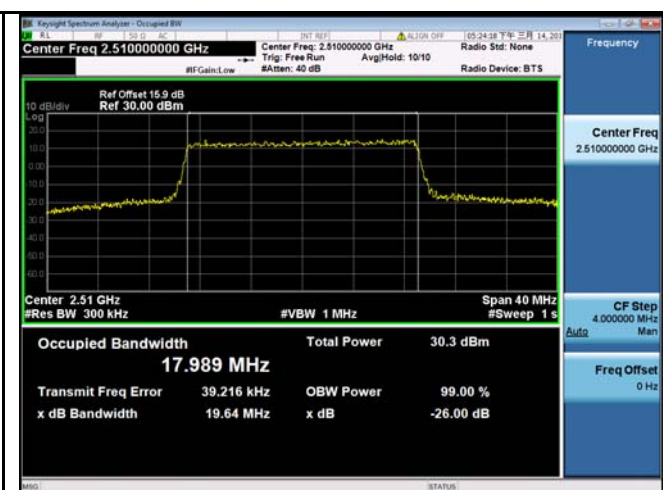


LTE band 7 - Low CH 16QAM-20

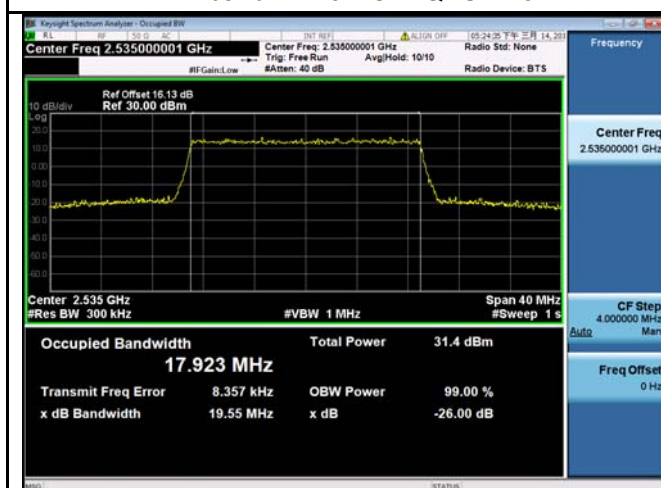


LTE band 7 - Middle CH QPSK-20

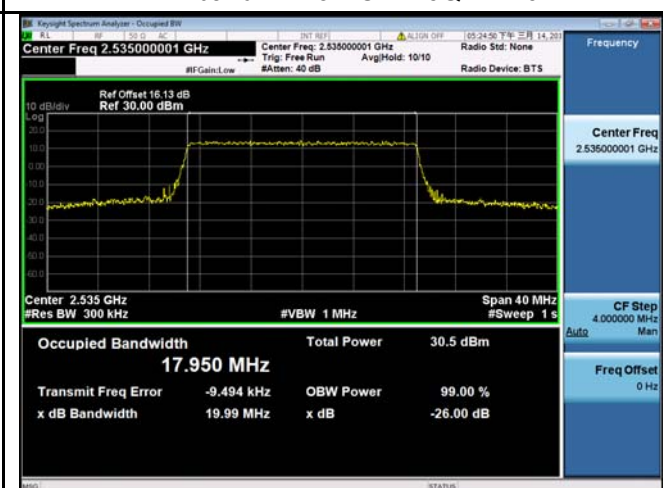

LTE band 7 - Middle CH 16QAM-20

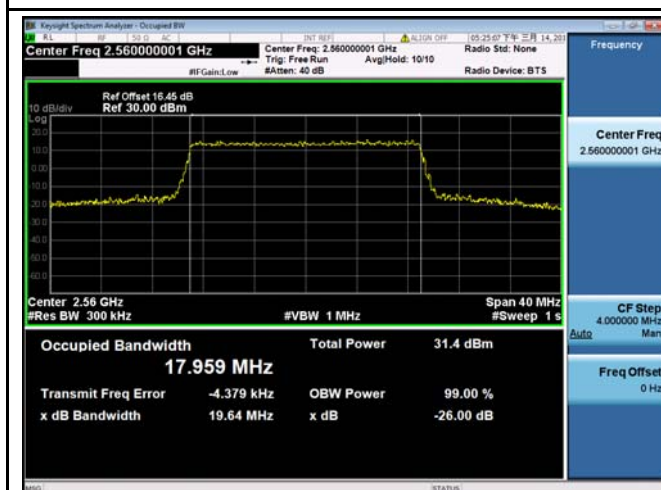


LTE band 7 - High CH QPSK-20

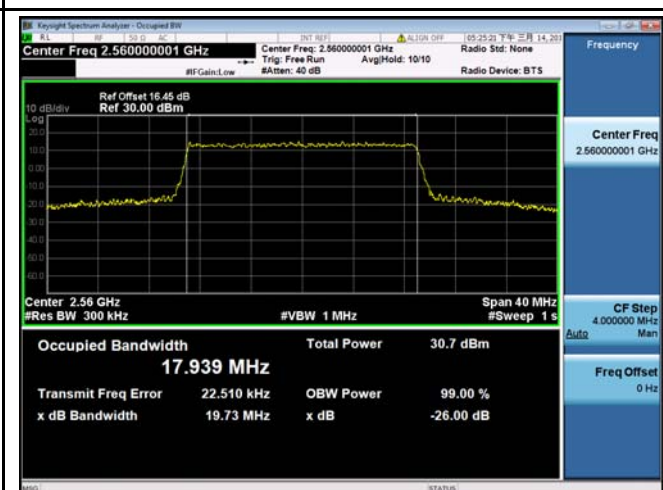


LTE band 7 - High CH 16QAM-20


LTE Band 41(Part 27)

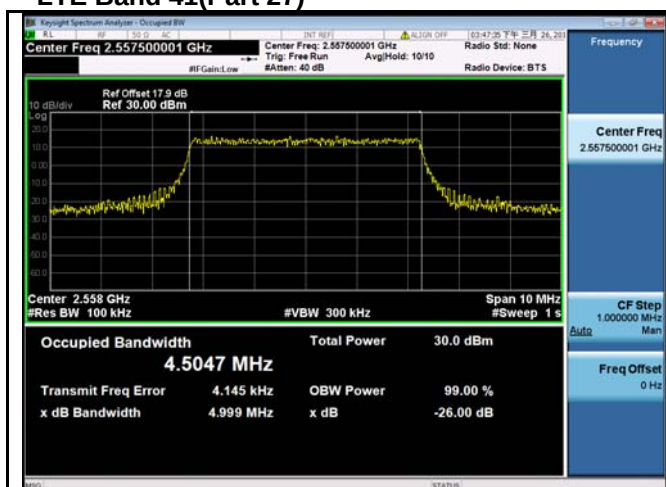


LTE band 41 - Low CH QPSK-5

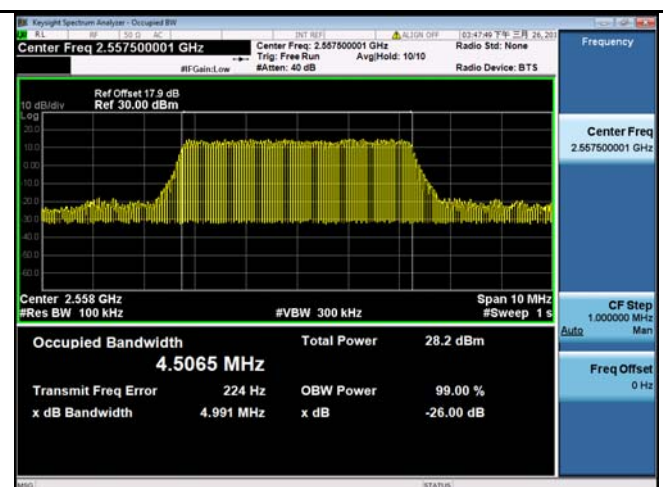

LTE band 41 - Low CH 16QAM-5

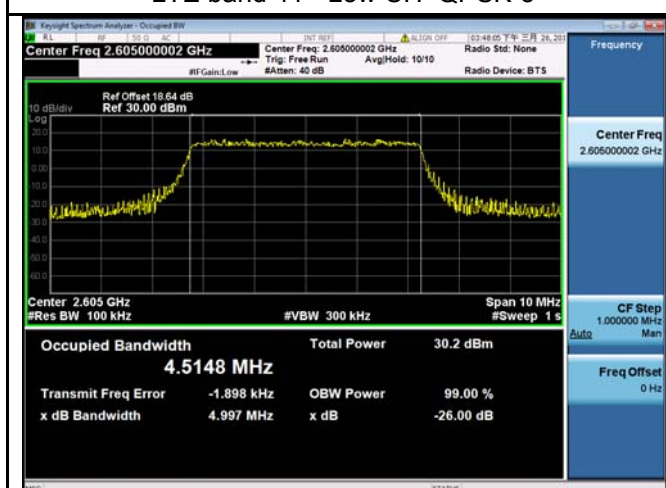


LTE band 41 - Middle CH QPSK-5

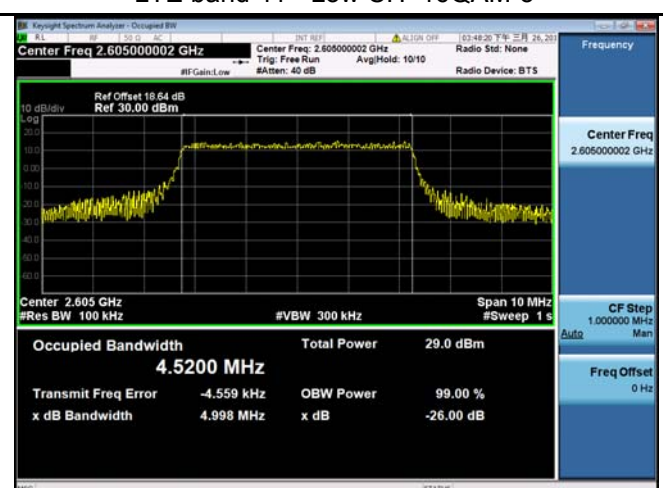


LTE band 41 - Middle CH 16QAM-5



LTE band 41 - High CH QPSK-5

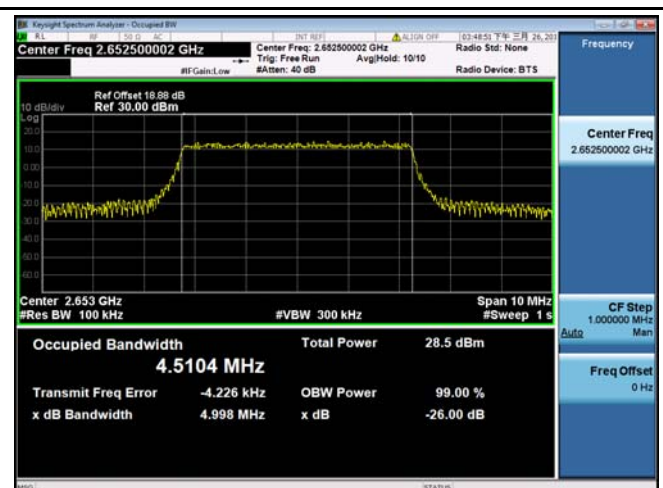


LTE band 41 - High CH 16QAM-5

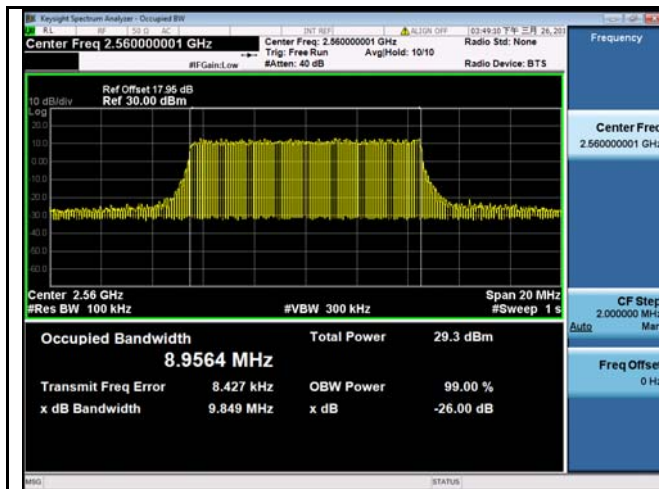


LTE band 41 - Low CH QPSK-10




LTE band 41 - Low CH 16QAM-10

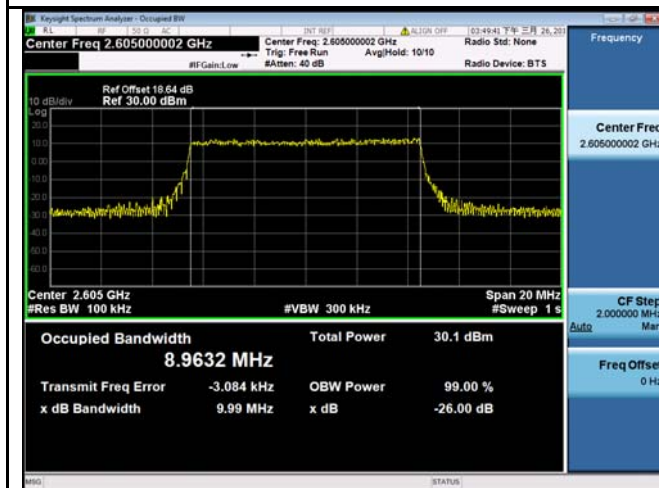


LTE band 41 - Middle CH QPSK-10

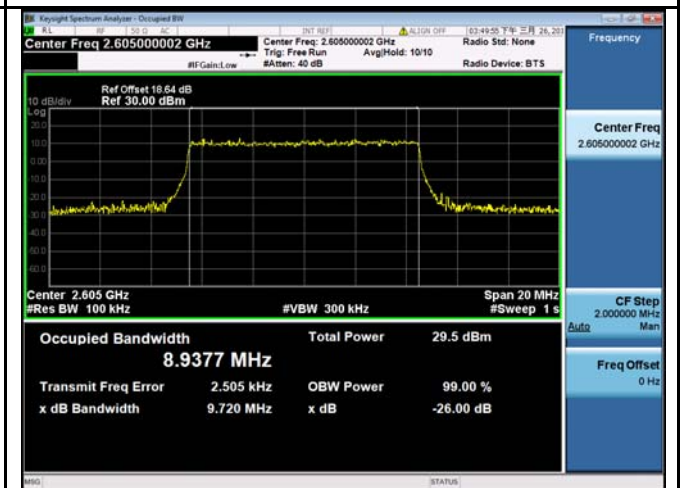


LTE band 41 - Middle CH 16QAM-10

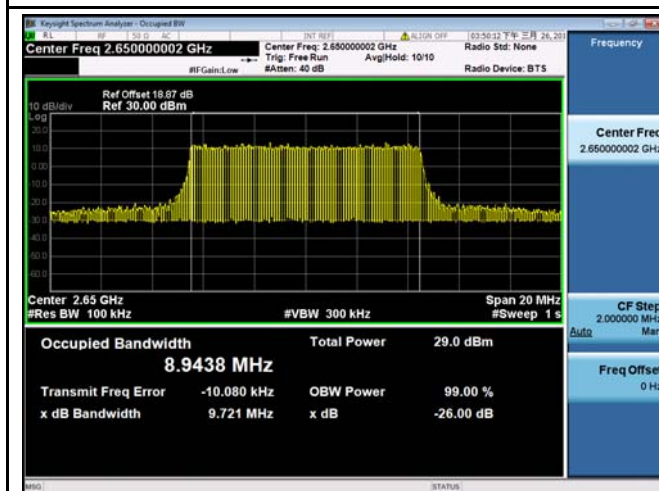


LTE band 41 - High CH QPSK-10

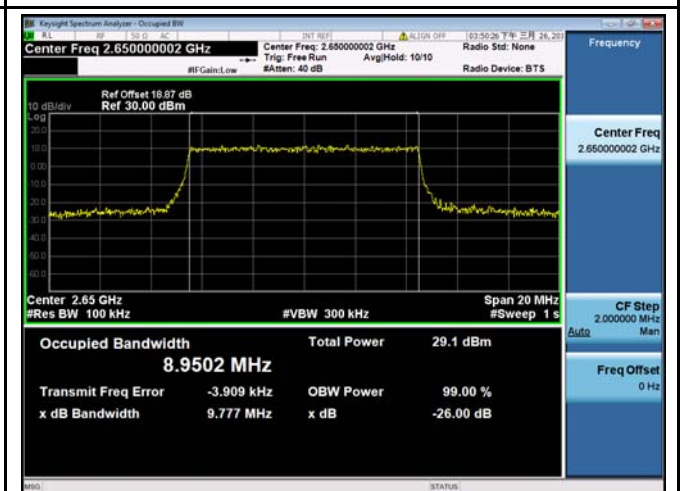


LTE band 41 - High CH 16QAM-10

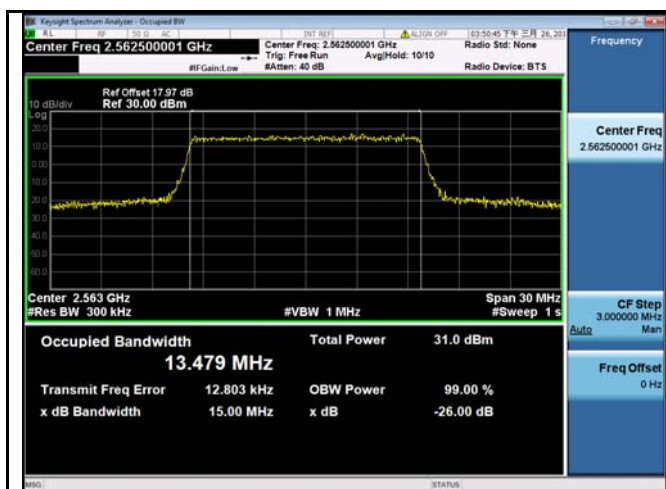


LTE band 41 - Low CH QPSK-15

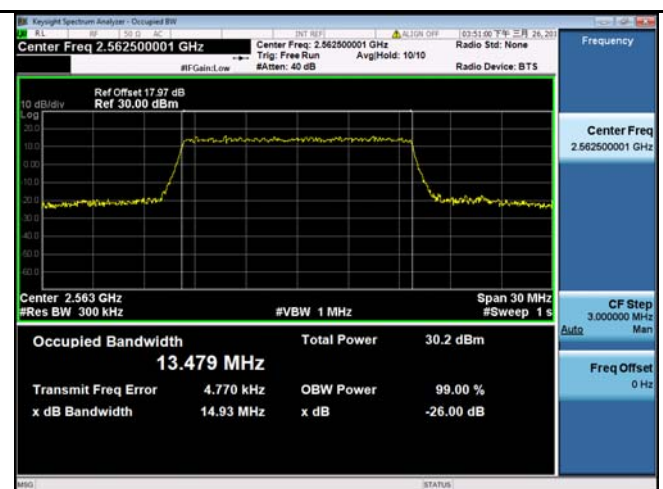


LTE band 41 - Low CH 16QAM-15

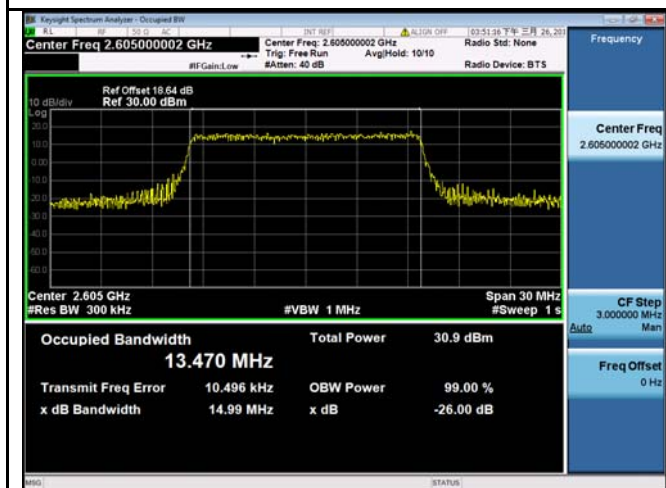


LTE band 41 - Middle CH QPSK-15

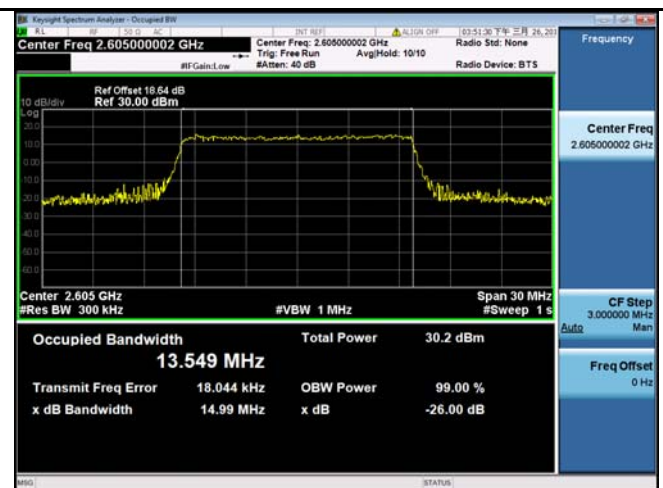


LTE band 41 - Middle CH 16QAM-15

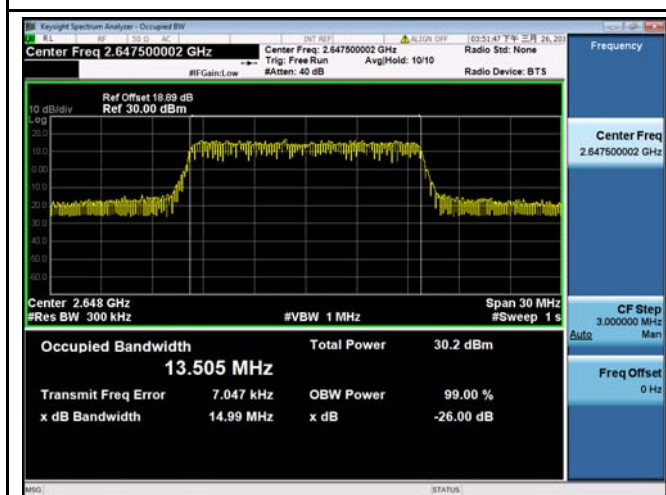


LTE band 41 - High CH QPSK-15

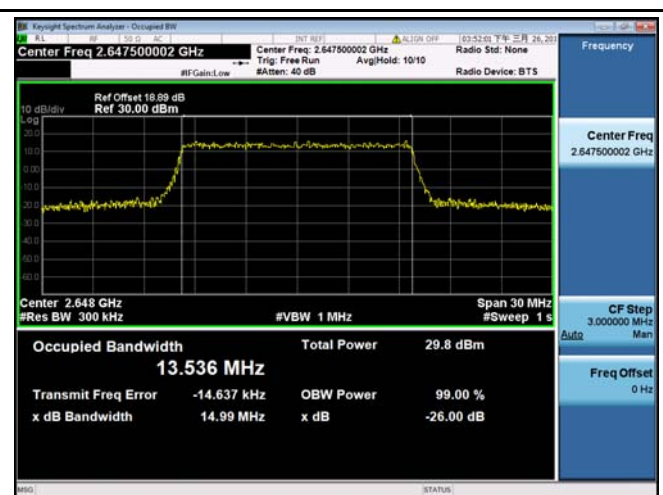


LTE band 41 - High CH 16QAM-15

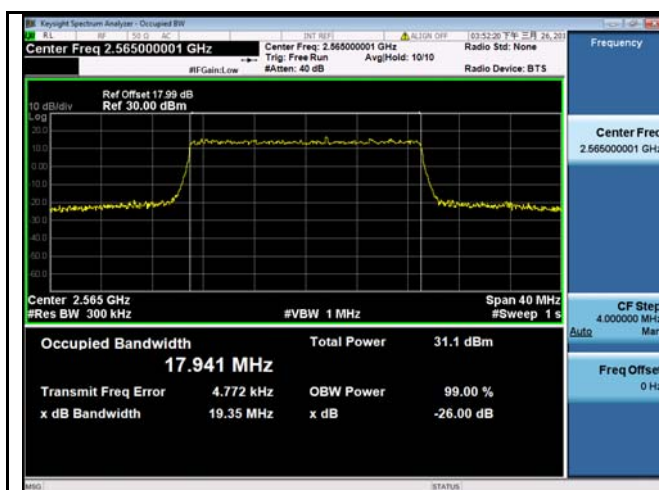


LTE band 41 - Low CH QPSK-20

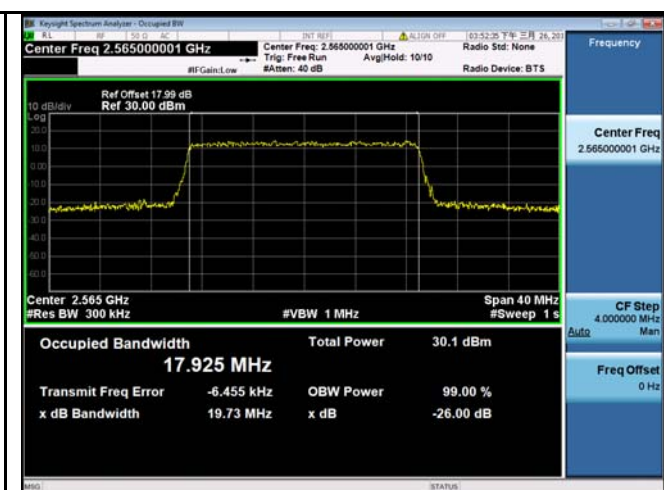


LTE band 41 - Low CH 16QAM-20

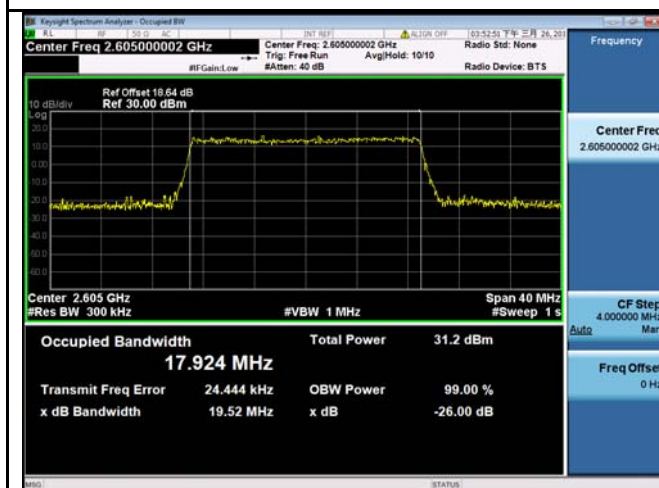


LTE band 41 - Middle CH QPSK-20

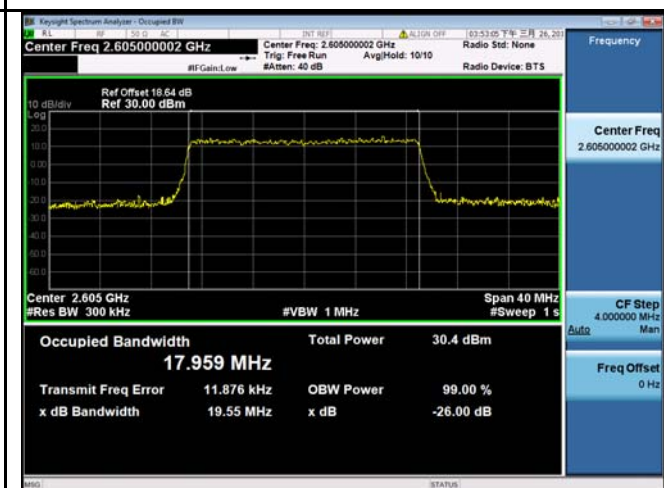

LTE band 41 - Middle CH 16QAM-20

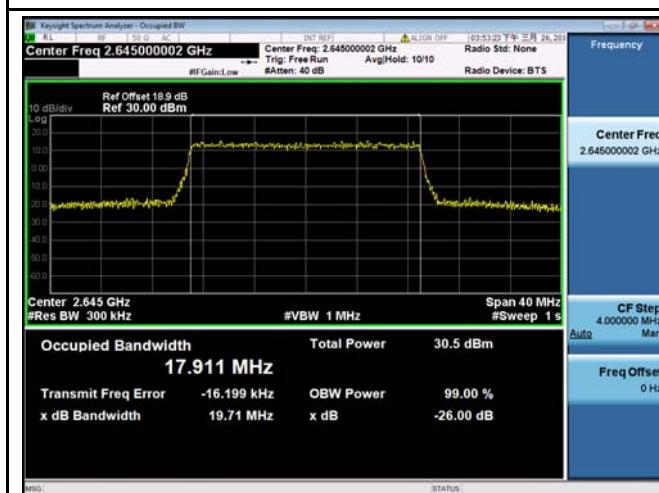

LTE band 41 - High CH QPSK-20

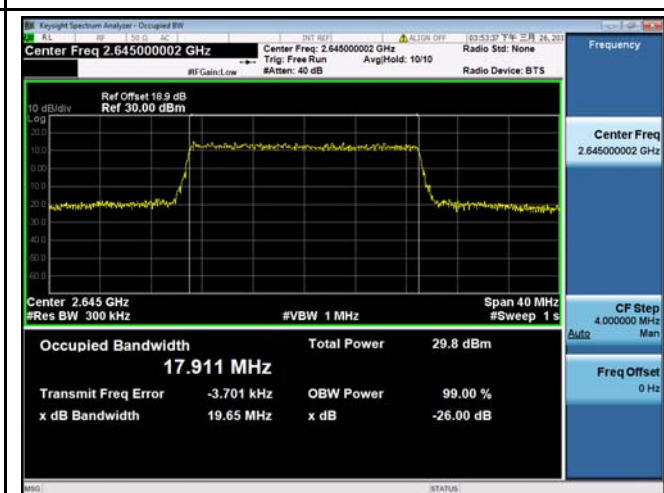

LTE band 41 - High CH 16QAM-20

11 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement:	FCC Part 2.1051, 22.917(a), 27.53(h), 27.53(m)(4)
Test Method:	ANSI C63.26:2015 ANSI/TIA-603-E:2016
Test Mode:	TX transmitting


11.1 EUT Operation

Operating Environment :

Temperature:	23.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.3kPa

11.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

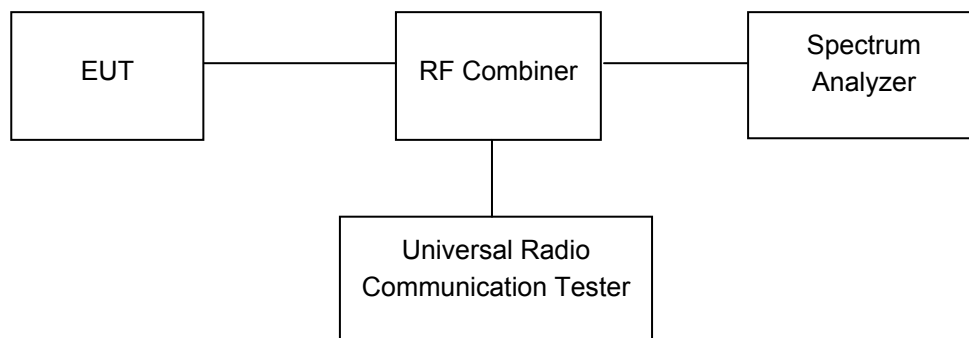

11.3 Test Result

PASS

LTE Band

Please refer to the Annex C. LTE Transmitter Spurious Emissions for LTE Band 5/7/41.

12 SPURIOUS RADIATED EMISSIONS

Test Requirement:	FCC Part 2.1053, 22.917, 27.53(h), 27.53(m)(4)
Test Method:	ANSI C63.26:2015 ANSI/TIA-603-E:2016
Test Mode:	TX transmitting


12.1 EUT Operation

Operating Environment :


Temperature:	23.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

12.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The test setup for emission measurement from 30 MHz to 1 GHz.

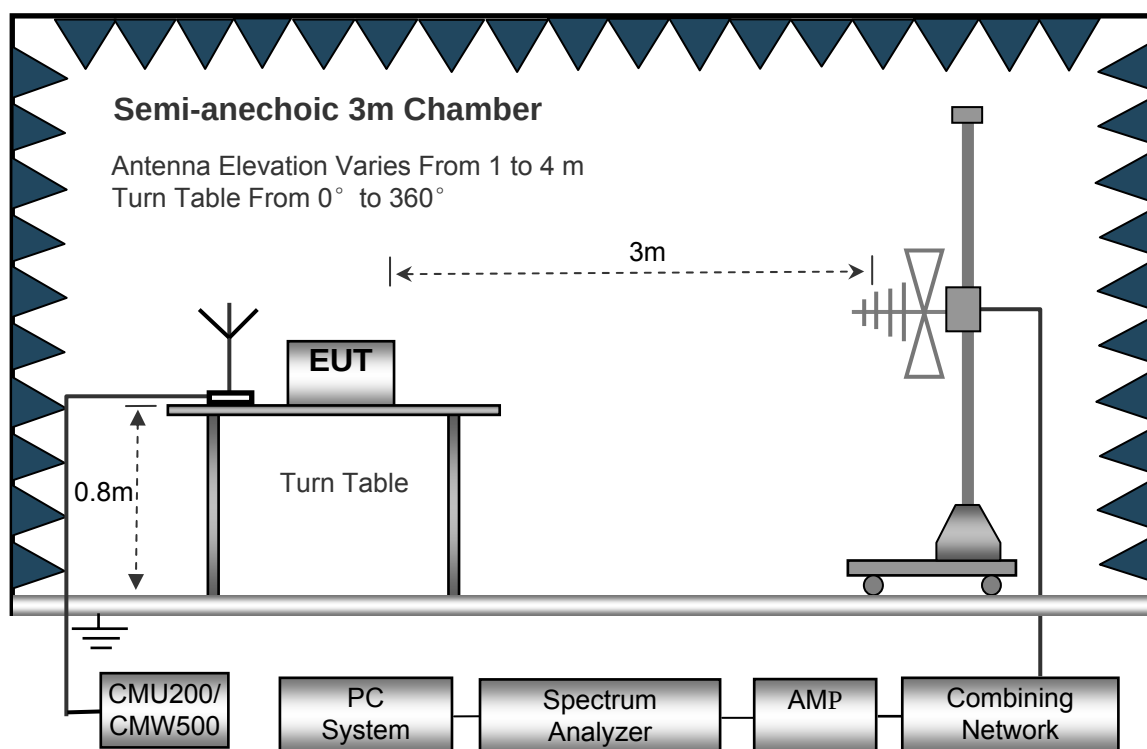

The test setup for emission measurement above 1 GHz.

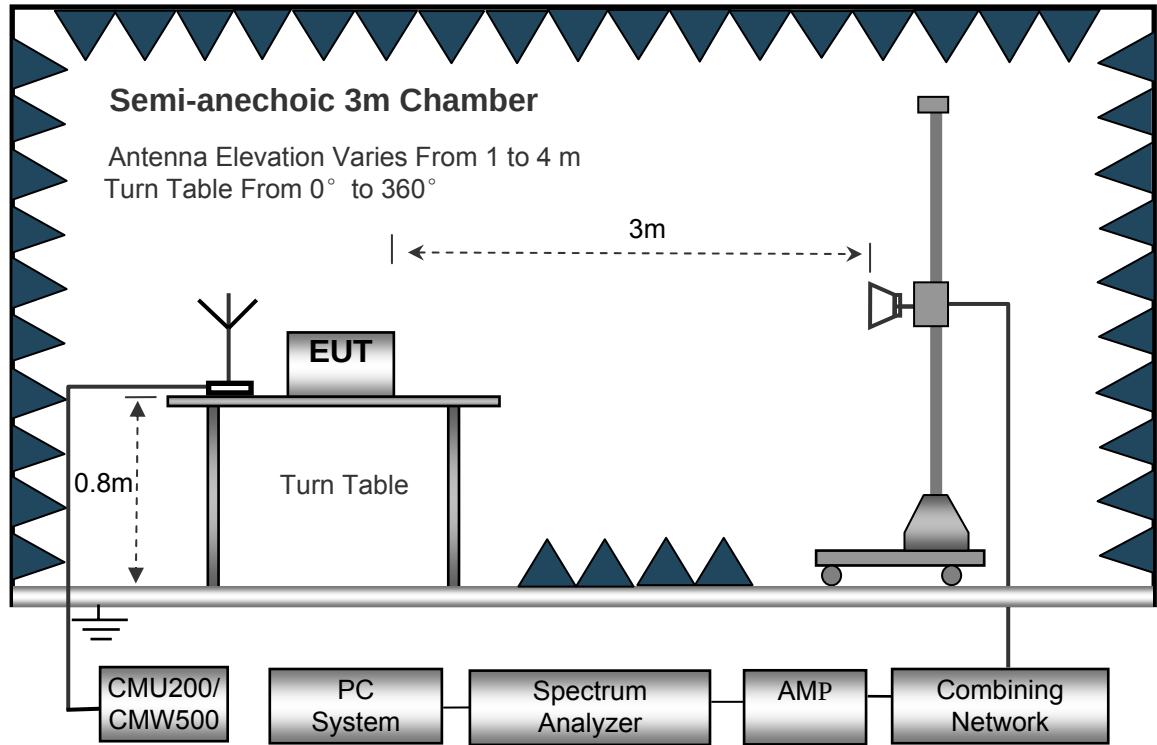

12.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

12.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from 30MHz up to the tenth harmonic of the highest fundamental frequency.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.
7. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level
Spurious attenuation limit in dB = $43 + 10 \lg (\text{power out in Watts})$
8. Repeat above procedures until the measurements for all frequencies are completed.

12.5 Summary of Test Results

Remark: Test performed from 30MHz to 10th harmonics with low/middle/high channels, only the worst data were recorded.

LTE Band 5

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
LTE BAND 5 Channel 20407										
223.12	39.90	59	1.2	H	-70.61	0.15	0.00	-70.76	-13.00	-57.76
223.12	30.94	90	2.1	V	-76.65	0.15	0.00	-76.80	-13.00	-63.80
1649.40	65.95	341	1.4	H	-47.10	2.34	12.40	-37.04	-13.00	-24.04
1649.40	59.98	50	1.5	V	-51.17	2.34	12.40	-41.11	-13.00	-28.11
2474.10	53.58	60	1.3	H	-55.83	2.79	12.70	-45.92	-13.00	-32.92
2474.10	44.73	176	1.7	V	-64.04	2.79	12.70	-54.13	-13.00	-41.13
LTE BAND 5 Channel 20525										
223.12	40.02	286	2.1	H	-70.49	0.15	0.00	-70.64	-13.00	-57.64
223.12	31.35	57	1.6	V	-76.24	0.15	0.00	-76.39	-13.00	-63.39
1673.00	59.16	237	1.7	H	-53.89	2.37	12.50	-43.76	-13.00	-30.76
1673.00	52.93	159	1.1	V	-58.22	2.37	12.50	-48.09	-13.00	-35.09
2509.50	46.59	326	1.1	H	-62.82	2.79	12.70	-52.91	-13.00	-39.91
2509.50	37.24	256	1.2	V	-71.53	2.79	12.70	-61.62	-13.00	-48.62
LTE BAND 5 Channel 20643										
223.12	39.61	266	1.2	H	-70.90	0.15	0.00	-71.05	-13.00	-58.05
223.12	30.43	152	1.9	V	-77.16	0.15	0.00	-77.31	-13.00	-64.31
1696.60	52.28	309	1.4	H	-60.36	2.37	12.50	-50.23	-13.00	-37.23
1696.60	45.73	309	1.7	V	-65.00	2.37	12.50	-54.87	-13.00	-41.87
2544.90	40.08	312	1.8	H	-69.50	2.81	12.80	-59.51	-13.00	-46.51
2544.90	31.04	232	1.9	V	-77.76	2.81	12.80	-67.77	-13.00	-54.77

LTE Band 7

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
LTE BAND 7 Channel 20775										
223.12	39.74	202	1.6	H	-70.77	0.15	0.00	-70.92	-25.00	-45.92
223.12	32.06	63	1.7	V	-75.53	0.15	0.00	-75.68	-25.00	-50.68
5005.00	65.95	72	2.2	H	-43.29	2.79	12.70	-33.38	-25.00	-8.38
5005.00	59.98	147	1.4	V	-48.79	2.79	12.70	-38.88	-25.00	-13.88
7507.50	53.58	206	1.0	H	-52.96	3.12	11.50	-44.58	-25.00	-19.58
7507.50	44.73	240	1.9	V	-60.70	3.12	11.50	-52.32	-25.00	-27.32
LTE BAND 7 Channel 21100										
223.12	39.71	239	1.8	H	-70.80	0.15	0.00	-70.95	-25.00	-45.95
223.12	31.36	317	1.1	V	-76.23	0.15	0.00	-76.38	-25.00	-51.38
5070.00	58.11	160	2.0	H	-51.13	2.37	12.50	-41.00	-25.00	-16.00
5070.00	53.79	229	2.0	V	-54.98	2.37	12.50	-44.85	-25.00	-19.85
7605.00	47.08	48	1.7	H	-59.46	3.12	11.50	-51.08	-25.00	-26.08
7605.00	37.64	193	1.6	V	-67.79	3.12	11.50	-59.41	-25.00	-34.41
LTE BAND 7 Channel 21425										
223.12	39.78	134	1.6	H	-70.73	0.15	0.00	-70.88	-25.00	-45.88
223.12	31.86	303	1.5	V	-75.73	0.15	0.00	-75.88	-25.00	-50.88
5135.00	50.78	25	2.0	H	-58.63	2.37	12.50	-48.50	-25.00	-23.50
5135.00	46.59	153	1.8	V	-62.18	2.37	12.50	-52.05	-25.00	-27.05
7702.50	39.61	205	1.2	H	-65.62	3.12	11.50	-57.24	-25.00	-32.24
7702.50	30.94	36	2.0	V	-73.95	3.12	11.50	-65.57	-25.00	-40.57

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
LTE BAND 41 Channel 39675										
223.12	40.18	182	1.3	H	-70.33	0.15	0.00	-70.48	-13.00	-57.48
223.12	31.14	296	1.5	V	-76.45	0.15	0.00	-76.60	-13.00	-63.60
5010.00	65.95	259	1.2	H	-43.29	2.79	12.70	-33.38	-13.00	-20.38
5010.00	59.98	286	1.1	V	-48.79	2.79	12.70	-38.88	-13.00	-25.88
7515.00	53.58	54	1.8	H	-52.96	3.12	11.50	-44.58	-13.00	-31.58
7515.00	44.73	331	1.7	V	-60.70	3.12	11.50	-52.32	-13.00	-39.32
LTE BAND 41 Channel 40620										
223.12	40.81	267	1.8	H	-69.70	0.15	0.00	-69.85	-13.00	-56.85
223.12	30.71	117	1.3	V	-76.88	0.15	0.00	-77.03	-13.00	-64.03
5070.00	59.84	37	1.7	H	-49.40	2.37	12.50	-39.27	-13.00	-26.27
5070.00	52.91	118	1.8	V	-55.86	2.37	12.50	-45.73	-13.00	-32.73
7605.00	46.79	33	1.9	H	-59.75	3.12	11.50	-51.37	-13.00	-38.37
7605.00	37.94	138	1.5	V	-67.49	3.12	11.50	-59.11	-13.00	-46.11
LTE BAND 41 Channel 41565										
223.12	39.96	205	2.2	H	-70.55	0.15	0.00	-70.70	-13.00	-57.70
223.12	30.90	66	2.0	V	-76.69	0.15	0.00	-76.84	-13.00	-63.84
5135.00	53.48	76	2.0	H	-55.93	2.37	12.50	-45.80	-13.00	-32.80
5135.00	45.16	59	2.0	V	-63.61	2.37	12.50	-53.48	-13.00	-40.48
7702.50	39.85	123	1.3	H	-65.38	3.12	11.50	-57.00	-13.00	-44.00
7702.50	31.49	350	2.0	V	-73.40	3.12	11.50	-65.02	-13.00	-52.02

Note: 1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Absolute Level - Limit

13 Band Edge Measurement

Test Requirement:	FCC Part 2.1051, 22.917(a), 27.53(h), 27.53(m)(4)
Test Method:	ANSI C63.26:2015 ANSI/TIA-603-E:2016
Test Mode:	TX transmitting

13.1 EUT Operation

Operating Environment :

Temperature:	23.5 °C
Humidity:	52.3 % RH
Atmospheric Pressure:	101.3kPa

13.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.


According to FCC Part 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the TX transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC Part 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the TX transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC Part 27.53(h), Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to FCC Part 27.53(m)(4), For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

The center of the spectrum analyzer was set to block edge frequency
Waltek Services (Shenzhen) Co.,Ltd.
<http://www.waltek.com.cn>

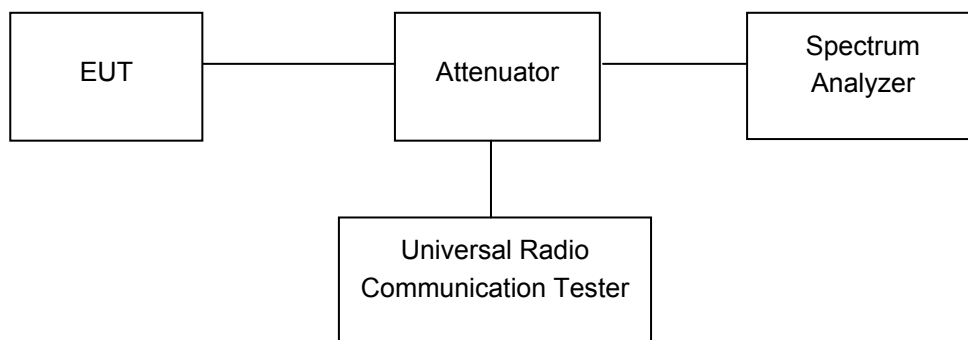

13.3 Test Result

PASS

LTE Band

Please refer to the Annex E. LTE Band Edge for LTE Band 5/7/41.

14 FREQUENCY STABILITY

Test Requirement:	FCC Part 2.1055, 22.355, 24.235, 27.5(h),27.54; 90.691
Test Method:	ANSI C63.26:2015 ANSI/TIA-603-E:2016
Test Mode:	TX transmitting

14.1 EUT Operation

Operating Environment :


Temperature:	22.9 °C
Humidity:	52.0 % RH
Atmospheric Pressure:	101.3kPa

14.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

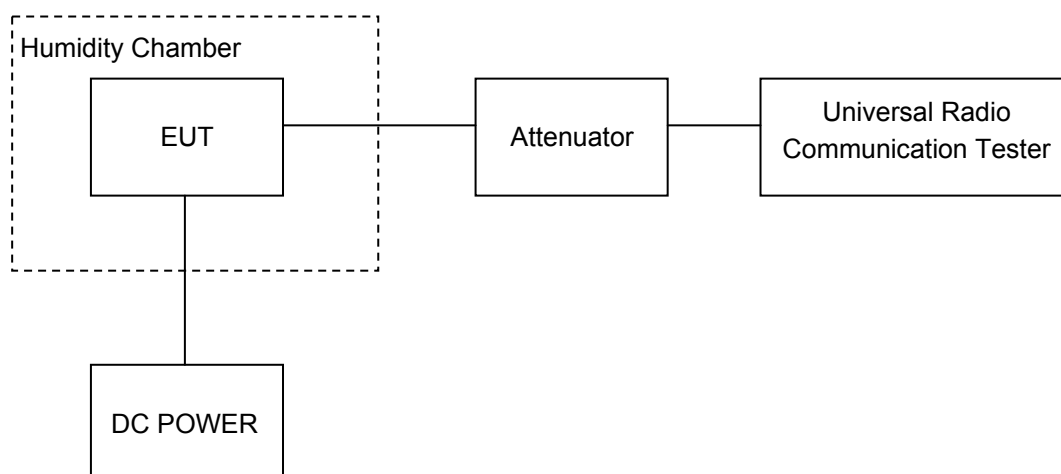

14.3 Test Result

LTE Band 5

Test Frequency:836.5MHz QPSK 1.4MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	1	0.0012	2.5
40		2	0.0024	2.5
30		9	0.0108	2.5
20		9	0.0108	2.5
10		12	0.0143	2.5
0		15	0.0179	2.5
-10		2	0.0024	2.5
-20		8	0.0096	2.5
-30		5	0.0060	2.5
20	3.3	12	0.0143	2.5
20	4.2	3	0.0036	2.5

Test Frequency:836.5MHz 16QAM 1.4MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	1	0.0012	2.5
40		0	0.0000	2.5
30		5	0.0060	2.5
20		2	0.0024	2.5
10		-6	-0.0072	2.5
0		-1	-0.0012	2.5
-10		4	0.0048	2.5
-20		11	0.0132	2.5
-30		-3	-0.0036	2.5
20	3.3	0	0.0000	2.5
20	4.2	10	0.0120	2.5

LTE Band 5

Test Frequency:836.5MHz QPSK 3MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-2	-0.0024	2.5
40		8	0.0096	2.5
30		14	0.0167	2.5
20		6	0.0072	2.5
10		6	0.0072	2.5
0		-1	-0.0012	2.5
-10		1	0.0012	2.5
-20		15	0.0179	2.5
-30		12	0.0143	2.5
20	3.3	14	0.0167	2.5
20	4.2	9	0.0108	2.5

Test Frequency:836.5MHz 16QAM 3MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		9	0.0108	2.5
30		0	0.0000	2.5
20		1	0.0012	2.5
10		7	0.0084	2.5
0		-6	-0.0072	2.5
-10		-5	-0.0060	2.5
-20		1	0.0012	2.5
-30		2	0.0024	2.5
20	3.3	6	0.0072	2.5
20	4.2	-8	-0.0096	2.5

LTE Band 5

Test Frequency:836.5MHz QPSK 5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	13	0.0155	2.5
40		-1	-0.0012	2.5
30		6	0.0072	2.5
20		5	0.0060	2.5
10		2	0.0024	2.5
0		12	0.0143	2.5
-10		8	0.0096	2.5
-20		3	0.0036	2.5
-30		7	0.0084	2.5
20	3.3	3	0.0036	2.5
20	4.2	6	0.0072	2.5

Test Frequency:836.5MHz 16QAM 5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-2	-0.0024	2.5
40		11	0.0132	2.5
30		1	0.0012	2.5
20		6	0.0072	2.5
10		11	0.0132	2.5
0		2	0.0024	2.5
-10		0	0.0000	2.5
-20		-3	-0.0036	2.5
-30		1	0.0012	2.5
20	3.3	13	0.0155	2.5
20	4.2	3	0.0036	2.5

LTE Band 5

Test Frequency:836.5MHz QPSK 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	6	0.0072	2.5
40		-6	-0.0072	2.5
30		-2	-0.0024	2.5
20		-1	-0.0012	2.5
10		-6	-0.0072	2.5
0		-6	-0.0072	2.5
-10		3	0.0036	2.5
-20		7	0.0084	2.5
-30		-3	-0.0036	2.5
20	3.3	-2	-0.0024	2.5
20	4.2	-5	-0.0060	2.5

Test Frequency:836.5MHz 16QAM 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		-3	-0.0036	2.5
30		-3	-0.0036	2.5
20		-3	-0.0036	2.5
10		5	0.0060	2.5
0		-2	-0.0024	2.5
-10		-10	-0.0120	2.5
-20		-2	-0.0024	2.5
-30		-9	-0.0108	2.5
20	3.3	-9	-0.0108	2.5
20	4.2	-8	-0.0096	2.5

LTE Band 7

Test Frequency:2535MHz QPSK 5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	7	0.0028	2.5
40		5	0.0020	2.5
30		5	0.0020	2.5
20		3	0.0012	2.5
10		7	0.0028	2.5
0		-4	-0.0016	2.5
-10		7	0.0028	2.5
-20		5	0.0020	2.5
-30		2	0.0008	2.5
20	3.3	-2	-0.0008	2.5
20	4.2	11	0.0043	2.5

Test Frequency:2535MHz 16QAM 5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-3	-0.0012	2.5
40		11	0.0043	2.5
30		4	0.0016	2.5
20		4	0.0016	2.5
10		2	0.0008	2.5
0		13	0.0051	2.5
-10		0	0.0000	2.5
-20		-1	-0.0004	2.5
-30		8	0.0032	2.5
20	3.3	8	0.0032	2.5
20	4.2	6	0.0024	2.5

LTE Band 7

Test Frequency:2535MHz QPSK 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	(Hz)	(ppm)	(ppm)
40		-1	-0.0004	2.5
30		4	0.0016	2.5
20		11	0.0043	2.5
10		3	0.0012	2.5
0		9	0.0036	2.5
-10		-3	-0.0012	2.5
-20		11	0.0043	2.5
-30		-1	-0.0004	2.5
20	3.3	10	0.0039	2.5
20	4.2	-1	-0.0004	2.5

Test Frequency:2535MHz 16QAM 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		9	0.0036	2.5
30		-2	-0.0008	2.5
20		5	0.0020	2.5
10		5	0.0020	2.5
0		7	0.0028	2.5
-10		6	0.0024	2.5
-20		10	0.0039	2.5
-30		14	0.0055	2.5
20	3.3	0	0.0000	2.5
20	4.2	6	0.0024	2.5

LTE Band 7

Test Frequency:2535MHz QPSK 15MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	10	0.0039	2.5
40		7	0.0028	2.5
30		3	0.0012	2.5
20		6	0.0024	2.5
10		5	0.0020	2.5
0		6	0.0024	2.5
-10		-1	-0.0004	2.5
-20		2	0.0008	2.5
-30		4	0.0016	2.5
20	3.3	3	0.0012	2.5
20	4.2	6	0.0024	2.5

Test Frequency:2535MHz 16QAM 15MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		9	0.0036	2.5
30		10	0.0039	2.5
20		6	0.0024	2.5
10		6	0.0024	2.5
0		6	0.0024	2.5
-10		13	0.0051	2.5
-20		11	0.0043	2.5
-30		13	0.0051	2.5
20	3.3	7	0.0028	2.5
20	4.2	8	0.0032	2.5

LTE Band 7

Test Frequency:2535MHz QPSK 20MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	2	0.0008	2.5
40		15	0.0059	2.5
30		8	0.0032	2.5
20		10	0.0039	2.5
10		10	0.0039	2.5
0		10	0.0039	2.5
-10		10	0.0039	2.5
-20		3	0.0012	2.5
-30		4	0.0016	2.5
20	3.3	16	0.0063	2.5
20	4.2	6	0.0024	2.5

Test Frequency:2535MHz 16QAM 20MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-6	-0.0024	2.5
40		2	0.0008	2.5
30		-9	-0.0036	2.5
20		-2	-0.0008	2.5
10		5	0.0020	2.5
0		2	0.0008	2.5
-10		4	0.0016	2.5
-20		4	0.0016	2.5
-30		4	0.0016	2.5
20	3.3	0	0.0000	2.5
20	4.2	0	0.0000	2.5

LTE Band 41

Test Frequency:2593MHz QPSK 5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-8	-0.0096	2.5
40		3	0.0036	2.5
30		4	0.0048	2.5
20		-2	-0.0024	2.5
10		-2	-0.0024	2.5
0		-11	-0.0132	2.5
-10		-8	-0.0096	2.5
-20		-10	-0.0120	2.5
-30		-11	-0.0132	2.5
20	3.3	-5	-0.0060	2.5
20	4.2	1	0.0012	2.5

Test Frequency:2593MHz 16QAM 5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-4	-0.0048	2.5
40		-6	-0.0072	2.5
30		-9	-0.0108	2.5
20		-1	-0.0012	2.5
10		-3	-0.0036	2.5
0		-8	-0.0096	2.5
-10		2	0.0024	2.5
-20		-1	-0.0012	2.5
-30		4	0.0048	2.5
20	3.3	6	0.0072	2.5
20	4.2	-3	-0.0036	2.5

LTE Band 41

Test Frequency:2593MHz QPSK 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	4	0.0048	2.5
40		6	0.0072	2.5
30		5	0.0060	2.5
20		6	0.0072	2.5
10		8	0.0096	2.5
0		1	0.0012	2.5
-10		11	0.0132	2.5
-20		0	0.0000	2.5
-30		13	0.0155	2.5
20	3.3	-3	-0.0036	2.5
20	4.2	-2	-0.0024	2.5

Test Frequency:2593MHz 16QAM 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	4	0.0016	2.5
40		0	0.0000	2.5
30		-5	-0.0020	2.5
20		3	0.0012	2.5
10		11	0.0043	2.5
0		-5	-0.0020	2.5
-10		4	0.0016	2.5
-20		-4	-0.0016	2.5
-30		11	0.0043	2.5
20	3.3	-5	-0.0020	2.5
20	4.2	9	0.0036	2.5

LTE Band 41

Test Frequency:2593MHz QPSK 15MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	4	0.0016	2.5
40		4	0.0016	2.5
30		0	0.0000	2.5
20		3	0.0012	2.5
10		4	0.0016	2.5
0		6	0.0024	2.5
-10		7	0.0028	2.5
-20		1	0.0004	2.5
-30		6	0.0024	2.5
20	3.3	-5	-0.0020	2.5
20	4.2	9	0.0036	2.5

Test Frequency:2593MHz 16QAM 15MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	3	0.0012	2.5
40		8	0.0032	2.5
30		5	0.0020	2.5
20		6	0.0024	2.5
10		-1	-0.0004	2.5
0		13	0.0051	2.5
-10		6	0.0024	2.5
-20		-1	-0.0004	2.5
-30		12	0.0047	2.5
20	3.3	5	0.0020	2.5
20	4.2	14	0.0055	2.5

LTE Band 41

Test Frequency:2593MHz QPSK 20MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	10	0.0039	2.5
40		-6	-0.0024	2.5
30		11	0.0043	2.5
20		3	0.0012	2.5
10		6	0.0024	2.5
0		-2	-0.0008	2.5
-10		12	0.0047	2.5
-20		9	0.0036	2.5
-30		4	0.0016	2.5
20	3.3	-5	-0.0020	2.5
20	4.2	10	0.0039	2.5

Test Frequency:2593MHz 16QAM 20MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	10	0.0120	2.5
40		5	0.0060	2.5
30		-2	-0.0024	2.5
20		3	0.0036	2.5
10		11	0.0132	2.5
0		0	0.0000	2.5
-10		-5	-0.0060	2.5
-20		11	0.0132	2.5
-30		1	0.0012	2.5
20	3.3	2	0.0024	2.5
20	4.2	11	0.0132	2.5

15 RF Exposure

Remark: refer to SAR test report: WTS19S03012952-1W V1.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS19S03012952W_Photo.

===== End of Report =====