

TEST REPORT

Applicant Name: Shenzhen Xin Yuan Electronic Technology Co., Ltd.
Address: Room 801-803, Yousuowei Building, No.2000, JiaXian Road,
Bantian Street, Longgang District, Shenzhen, Guangdong,
China
Report Number: 2401A43615E-RF-00B
FCC ID: 2ASYE-T-ECHO-LITE

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: T-Echo Lite Core
Model No.: T-Echo Lite Core
Multiple Model(s) No.: N/A
Trade Mark: LILYGO
Date Received: 2025-01-03
Issue Date: 2025-07-24

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko Wu

Ekko Wu
RF Engineer

Approved By:

Michelle Zeng

Michelle Zeng
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
FACTOR & OVER LIMIT CALCULATION.....	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	20
FACTOR & OVER LIMIT/MARGIN CALCULATION	20
TEST DATA	21
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	38

FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
C63.10 §11.6- DUTY CYCLE.....	43
TEST PROCEDURE	43
TEST DATA	43
EUT PHOTOGRAPHS.....	45
TEST SETUP PHOTOGRAPHS	46

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401A43615E-RF-00B	Original Report	2025-07-24

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	T-Echo Lite Core
Tested Model	T-Echo Lite Core
Multiple Model(s)	N/A
Frequency Range	915 MHz
Maximum Conducted Peak Output Power	6.90 dBm
Modulation Technique	GFSK
Antenna Specification [#]	2.0 dBi for Antenna 1 -3.71dBi for Antenna 2 (provided by the applicant)
Voltage Range	DC 3.3V
Sample serial number	2WU1-2 for Conducted and Radiated Emissions Test 2WU1-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The EUT is equipped with 2 antennas, antenna 1 with the maximum gain was selected for full testing and antenna 2 performed the radiation emission test	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in typical mode.

Channel	Freq. (MHz)
1	915

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“EspRFTTestTool_v3.6_manual.exe” exercise software was used and the power level is Default#. The software and power level was provided by the manufacturer.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Huajin	Adapter	HJ-0503000-US	Unknown
OUPU	Receptacle	Receptacle	6971041358020
Xin Yuan	Testing Board	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Detachable USB cable	0.5	Adapter	Testing Board
Unshielded Un-detachable AC cable	1.0	Receptacle	LISN/AC Mains

Block Diagram of Test Setup


For Conducted Emissions:

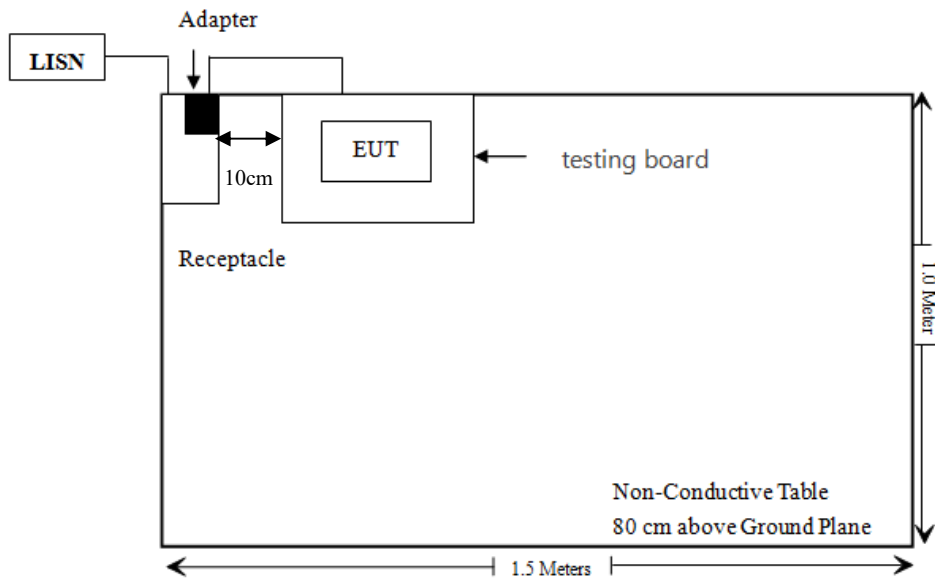

For Radiated Emissions below 1GHz:

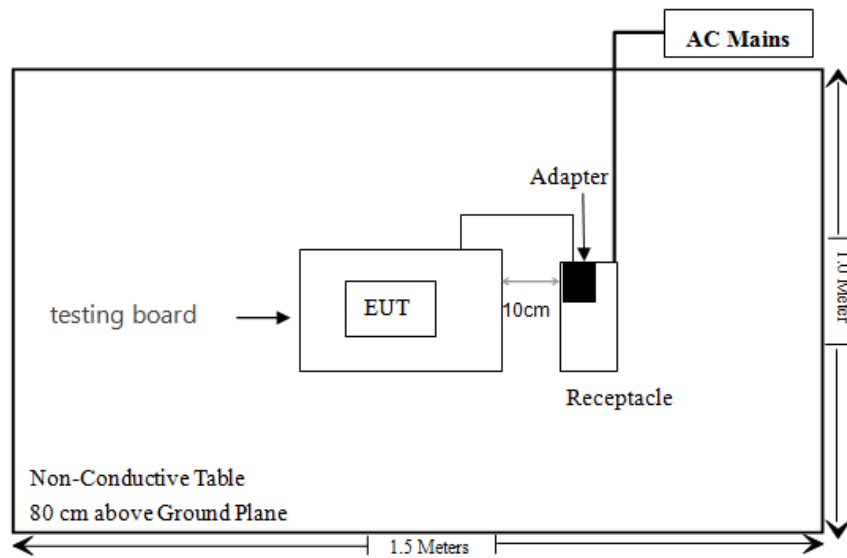

For Radiated Emissions above 1GHz:

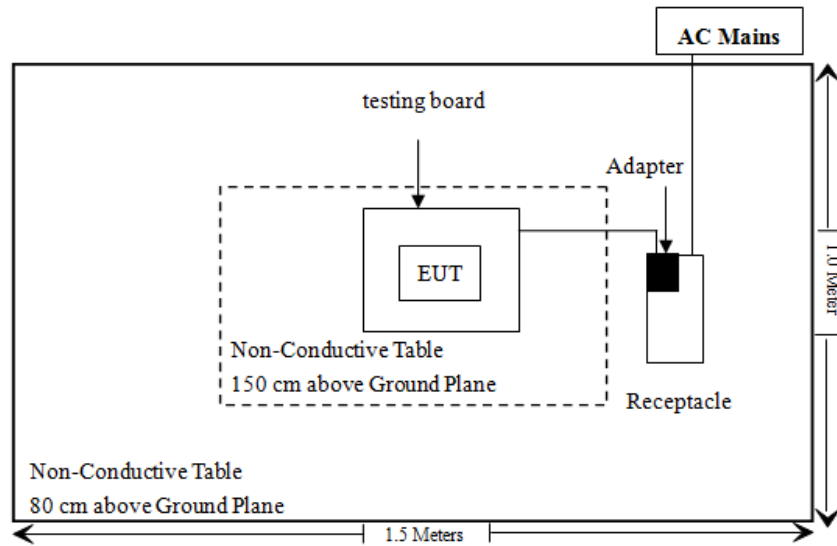

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC § 15.247 (i), §1.1307 (b) (3) & §2.1091	Maximum Permissible Exposure(MPE)	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
FCC §15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant
/	Duty Cycle	/

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sonoma	Pre-amplifier	310 N	186238	2025/04/29	2026/04/28
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/03/26	2026/03/25
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2024/09/20	2025/09/19
Rohde & Schwarz	Spectrum Analyze	FSU26	200982	2024/09/20	2025/09/19
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26
Unknown	10dB Attenuator	Unknown	F-03-EM190	2025/06/26	2026/06/25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance V01

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
BLE	2402-2480	5.5	3.67	1.52	7.02	0.005	0.2	0.768
Lora	915	7.50	2.0	-0.15	7.35	0.0054	0.2	0.468

Note: The tune up conducted power[#] and antenna gain[#] were declared by the applicant.

The BLE and Lora can't transmit at the same time

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has dipole antenna which was integrated on the main PCB use the UFL connector and no consideration of replacement and a FPC antenna, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type		Antenna Gain [#] (dBi)	Impedance (Ω)	Frequency Range (GHz)
Antenna 1	Dipole	2.0	50	2.4~2.5
Antenna 2	FPC	-3.71	50	2.4~2.5


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

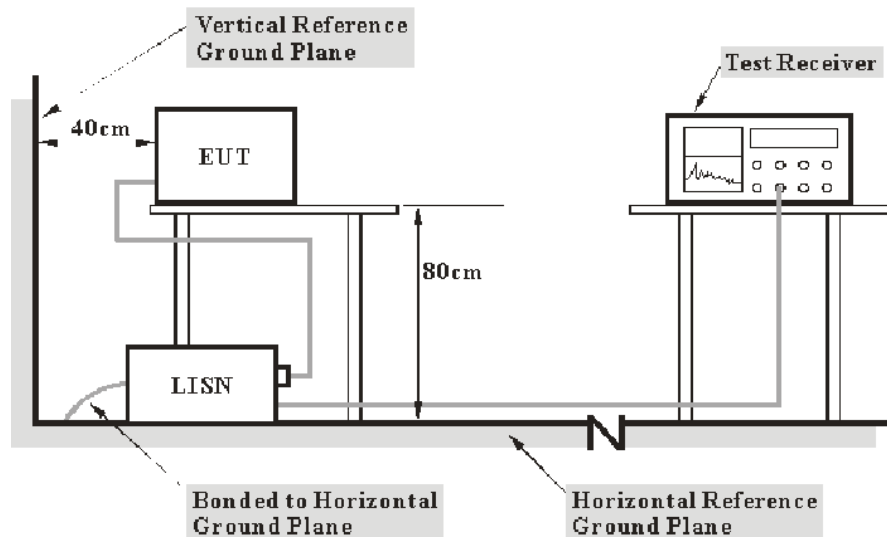

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data


Environmental Conditions

Temperature:	26.9 °C
Relative Humidity:	71 %
ATM Pressure:	100.6 kPa

The testing was performed by Macy Shi on 2025-05-15.

EUT operation mode: Transmitting

AC 120V/60 Hz, Line

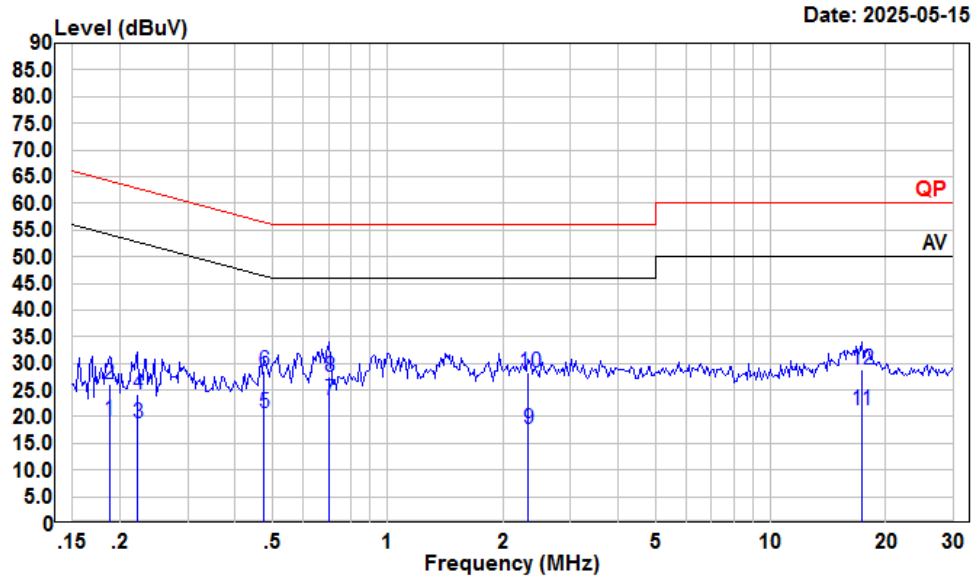

Condition: Line


Project : 2401A43615E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.187	-1.49	19.23	10.63	10.09	54.15	-34.92	Average
2	0.187	5.30	26.02	10.63	10.09	64.15	-38.13	QP
3	0.222	-2.13	18.64	10.68	10.09	52.74	-34.10	Average
4	0.222	3.42	24.19	10.68	10.09	62.74	-38.55	QP
5	0.476	0.16	20.80	10.51	10.13	46.41	-25.61	Average
6	0.476	8.05	28.69	10.51	10.13	56.41	-27.72	QP
7	0.705	1.96	23.00	10.89	10.15	46.00	-23.00	Average
8	0.705	6.53	27.57	10.89	10.15	56.00	-28.43	QP
9	2.334	-3.55	17.69	11.06	10.18	46.00	-28.31	Average
10	2.334	6.96	28.20	11.06	10.18	56.00	-27.80	QP
11	17.291	0.33	21.18	10.65	10.20	50.00	-28.82	Average
12	17.291	7.98	28.83	10.65	10.20	60.00	-31.17	QP

AC 120V/60 Hz, Neutral

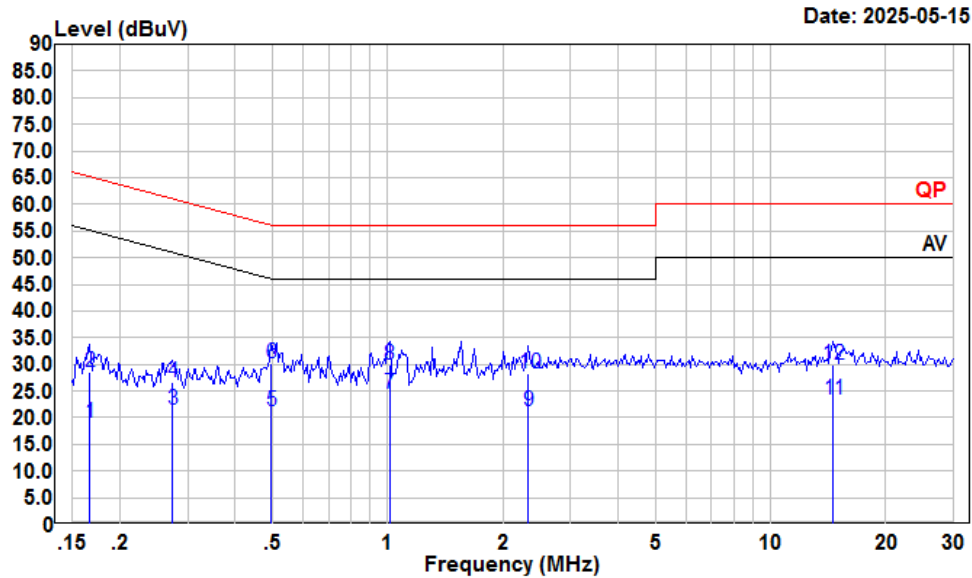

Condition: Neutral

Project : 2401A43615E-RF



tester : Macy.shi Note:Transmitting


Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.167	-1.64	19.01	10.55	10.10	55.12	-36.11	Average
2	0.167	7.89	28.54	10.55	10.10	65.12	-36.58	QP
3	0.274	0.76	21.55	10.70	10.09	50.98	-29.43	Average
4	0.274	5.80	26.59	10.70	10.09	60.98	-34.39	QP
5	0.497	0.63	21.27	10.50	10.14	46.05	-24.78	Average
6	0.497	9.60	30.24	10.50	10.14	56.05	-25.81	QP
7	1.010	3.50	24.41	10.80	10.11	46.00	-21.59	Average
8	1.010	8.93	29.84	10.80	10.11	56.00	-26.16	QP
9	2.334	0.37	21.32	10.77	10.18	46.00	-24.68	Average
10	2.334	7.35	28.30	10.77	10.18	56.00	-27.70	QP
11	14.594	2.83	23.36	10.31	10.22	50.00	-26.64	Average
12	14.594	9.47	30.00	10.31	10.22	60.00	-30.00	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

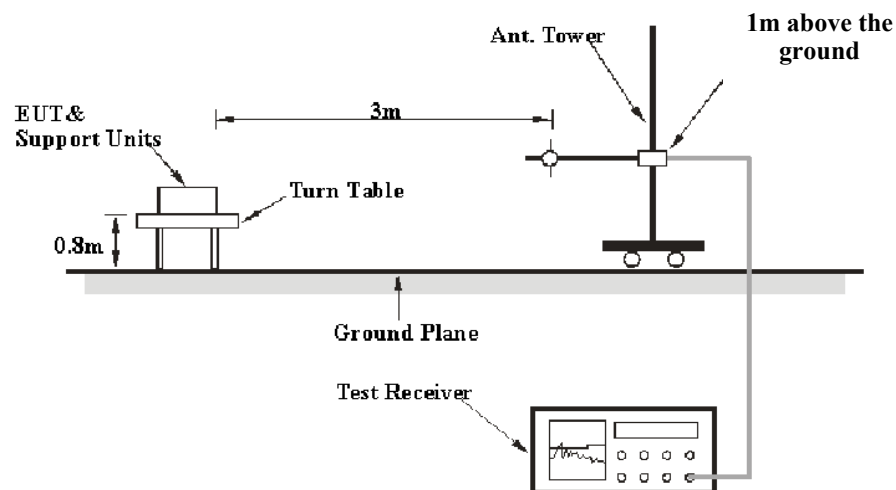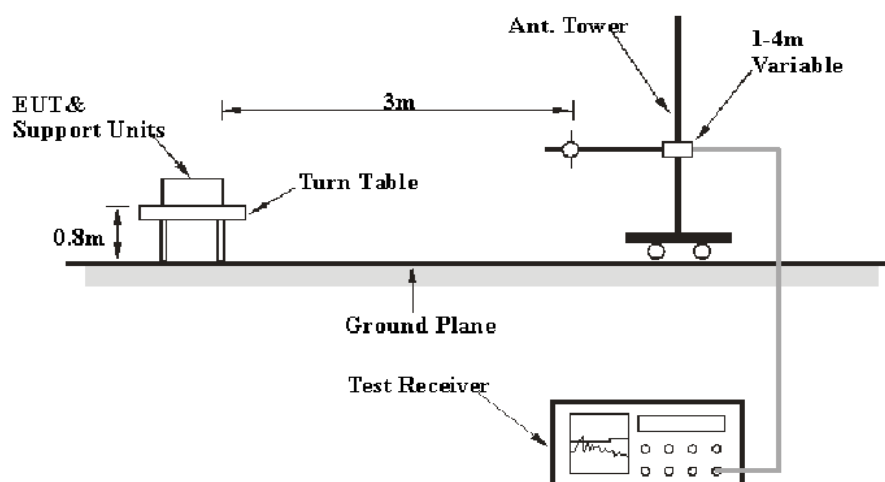EUT Setup**9 kHz-30MHz:****30MHz-1GHz:**

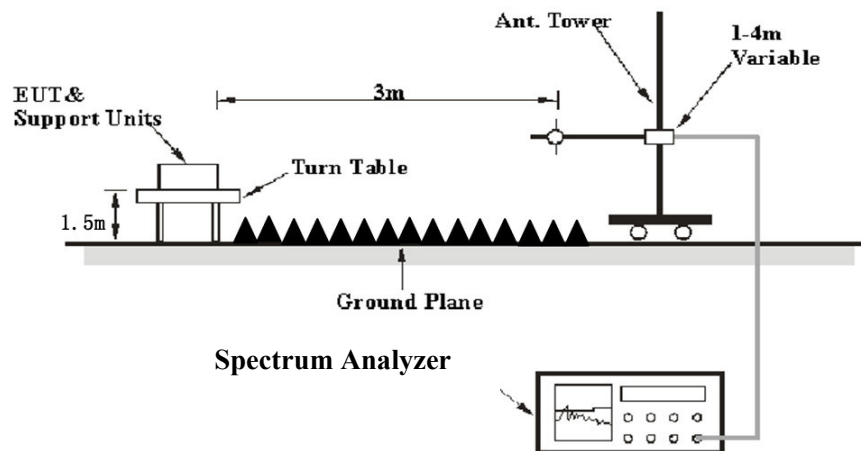Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	PK
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	PK

Above 1 GHz:**Pre-scan**

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	PK
AV	>98%	1MHz	1 kHz	PK
	<98%	1MHz	≥1/Ton	PK

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	PK
AV	>98%	1MHz	10 Hz	PK
	<98%	1MHz	≥1/Ton	PK

Note: Ton is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data**Environmental Conditions**

Temperature:	19.4~25.5°C
Relative Humidity:	47~65 %
ATM Pressure:	100.1~101.1 kPa


The testing was performed by Anson Su from 2025-05-08 to 2025-06-07 for below 1GHz and Visen Wu from 2025-05-08 to 2025-06-04 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.


Antenna 1**9 kHz-30MHz:**

Parallel (worst case)

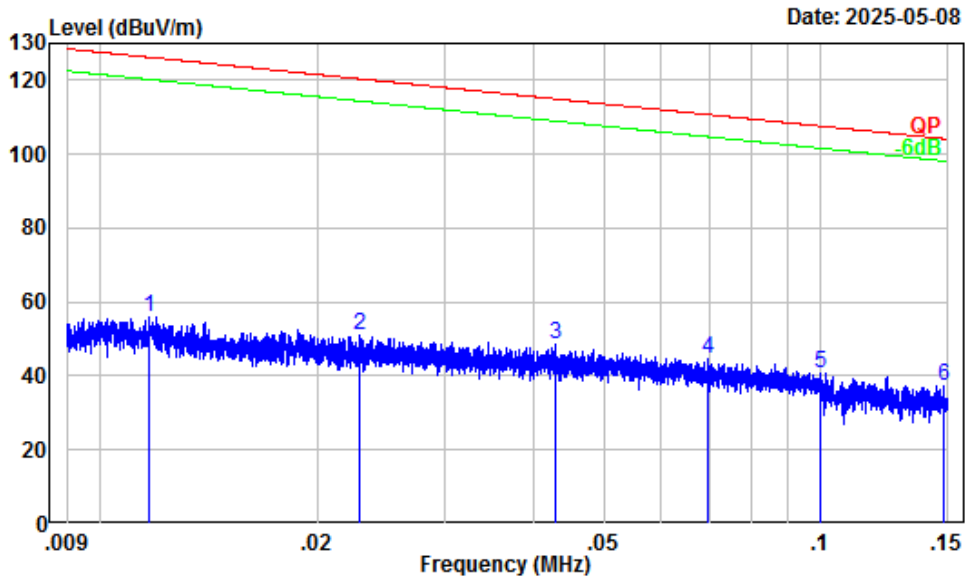

Site : Chamber A
Condition : 3m
Project Number : 2401A43615E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	0.012	31.97	24.16	56.13	126.23	-70.10	Peak
2	0.023	29.85	21.07	50.92	120.41	-69.49	Peak
3	0.043	27.16	21.57	48.73	114.98	-66.25	Peak
4	0.070	24.44	19.96	44.40	110.75	-66.35	Peak
5	0.100	22.01	18.79	40.80	107.61	-66.81	Peak
6	0.148	19.18	18.29	37.47	104.21	-66.74	Peak

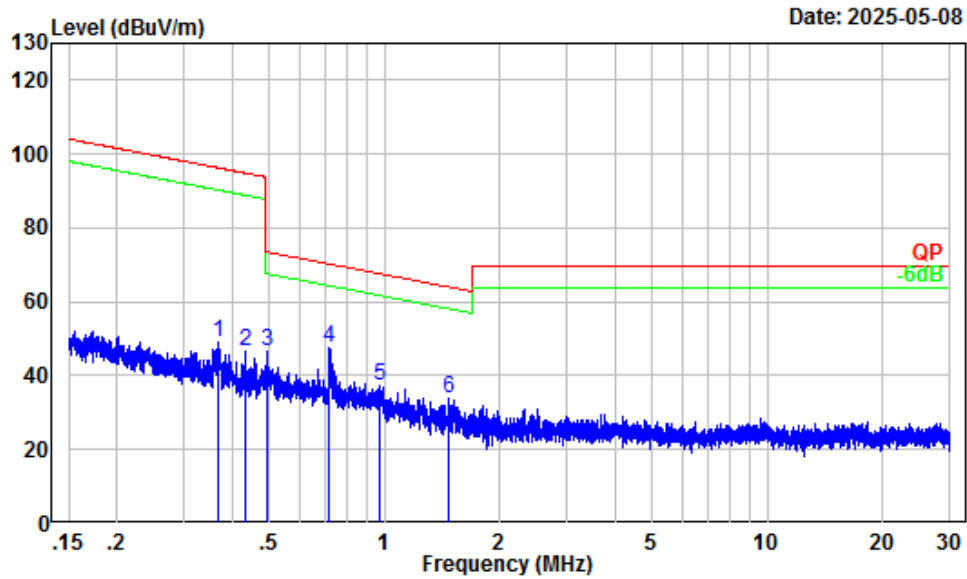


Site : Chamber A
 Condition : 3m
 Project Number : 2401A43615E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 10/30kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.369	8.89	40.36	49.25	96.27	-47.02	Peak
2	0.434	7.66	39.03	46.69	94.86	-48.17	Peak
3	0.495	6.49	39.97	46.46	73.70	-27.24	Peak
4	0.719	3.70	43.74	47.44	70.40	-22.96	Peak
5	0.968	1.44	35.71	37.15	67.76	-30.61	Peak
6	1.478	-0.14	34.17	34.03	64.01	-29.98	Peak

30 MHz~1 GHz:


Horizontal

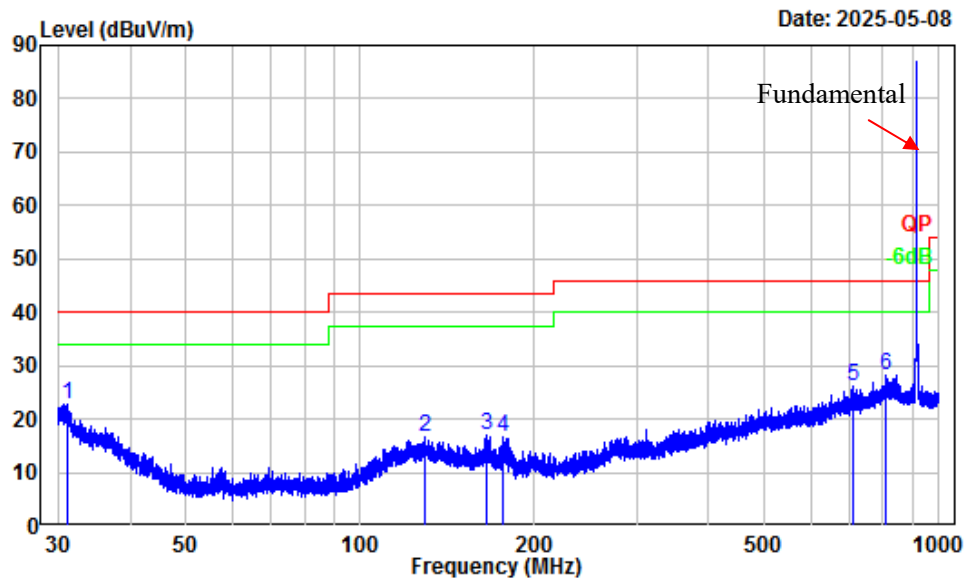

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401A43615E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.18	-6.58	29.26	22.68	40.00	-17.32	Peak
2	129.64	-11.21	27.91	16.70	43.50	-26.80	Peak
3	165.12	-12.91	29.93	17.02	43.50	-26.48	Peak
4	175.81	-13.45	30.03	16.58	43.50	-26.92	Peak
5	708.56	-3.41	29.60	26.19	46.00	-19.81	Peak
6	812.04	-2.04	30.12	28.08	46.00	-17.92	Peak

Vertical

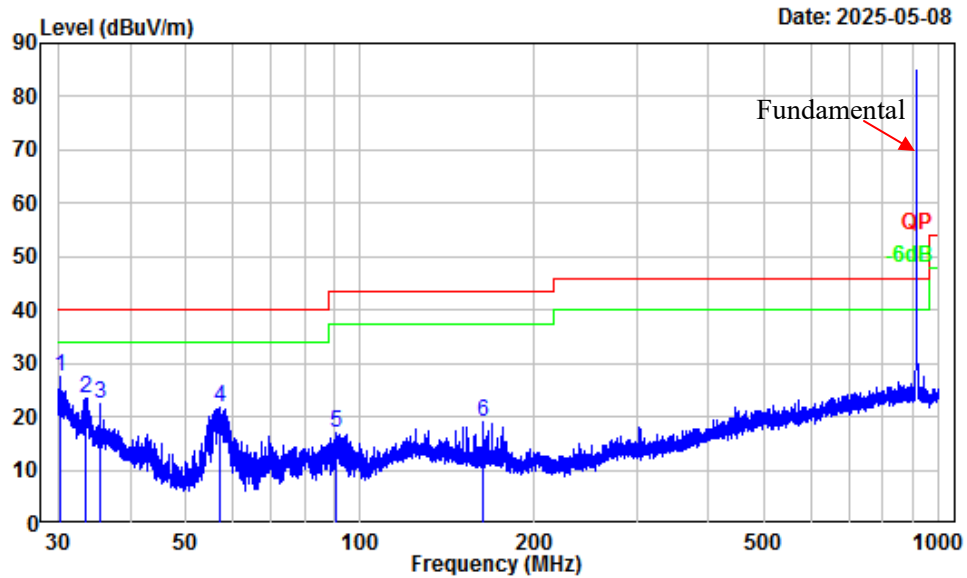


Site : Chamber A
 Condition : 3m Vertical
 Project Number : 2401A43615E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.36	-6.14	33.58	27.44	40.00	-12.56	Peak
2	33.40	-7.86	31.39	23.53	40.00	-16.47	Peak
3	35.59	-9.24	31.81	22.57	40.00	-17.43	Peak
4	57.19	-18.30	39.90	21.60	40.00	-18.40	Peak
5	91.01	-17.96	35.07	17.11	43.50	-26.39	Peak
6	162.75	-12.79	31.72	18.93	43.50	-24.57	Peak


Antenna 2**9 kHz-30MHz:**

Parallel (worst case)

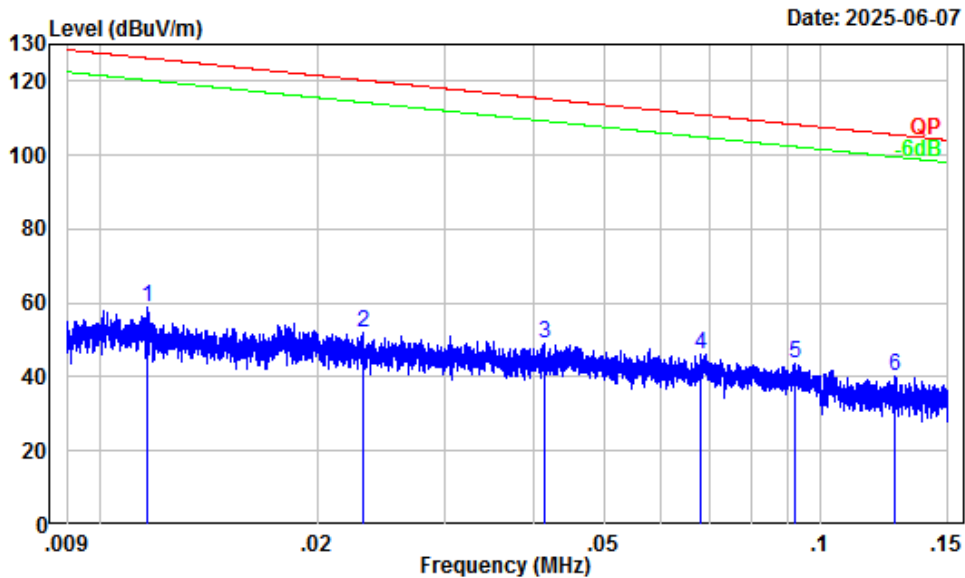

Site : Chamber A
Condition : 3m
Project Number : 2401A43615E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.99	27.00	58.99	126.31	-67.32	Peak
2	0.023	29.80	22.37	52.17	120.32	-68.15	Peak
3	0.041	27.31	21.68	48.99	115.28	-66.29	Peak
4	0.068	24.58	21.56	46.14	110.93	-64.79	Peak
5	0.092	22.56	21.01	43.57	108.32	-64.75	Peak
6	0.127	20.43	19.68	40.11	105.55	-65.44	Peak

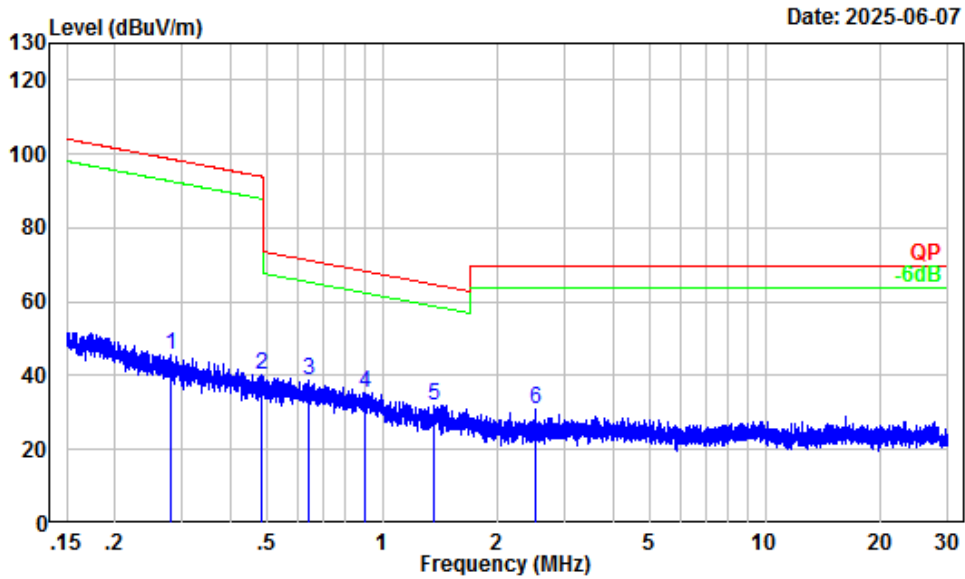


Site : Chamber A
 Condition : 3m
 Project Number : 2401A43615E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 10/30kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.281	11.34	34.48	45.82	98.64	-52.82	Peak
2	0.485	6.69	33.76	40.45	93.89	-53.44	Peak
3	0.642	4.65	34.08	38.73	71.40	-32.67	Peak
4	0.898	1.97	33.47	35.44	68.43	-32.99	Peak
5	1.360	0.19	31.79	31.98	64.74	-32.76	Peak
6	2.507	-1.88	32.65	30.77	69.54	-38.77	Peak

30 MHz~1 GHz:


Horizontal

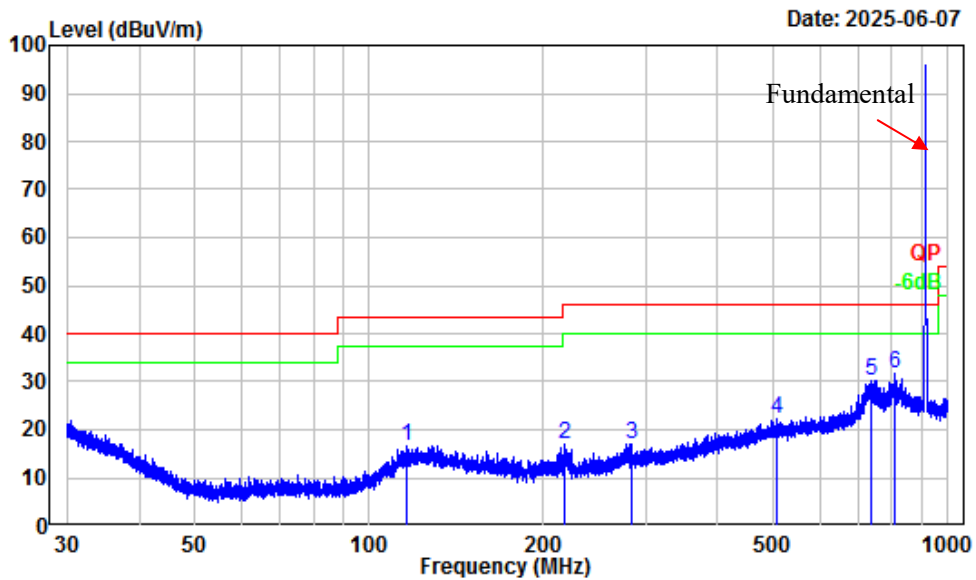

Site : Chamber A
 Condition : 3m Horizontal
 Project Number : 2401A43615E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	115.93	-12.02	28.66	16.64	43.50	-26.86	Peak
2	216.88	-14.20	31.22	17.02	46.00	-28.98	Peak
3	283.48	-11.23	28.29	17.06	46.00	-28.94	Peak
4	506.26	-5.76	27.89	22.13	46.00	-23.87	Peak
5	738.04	-3.03	33.13	30.10	46.00	-15.90	Peak
6	811.69	-2.04	33.56	31.52	46.00	-14.48	Peak

Vertical

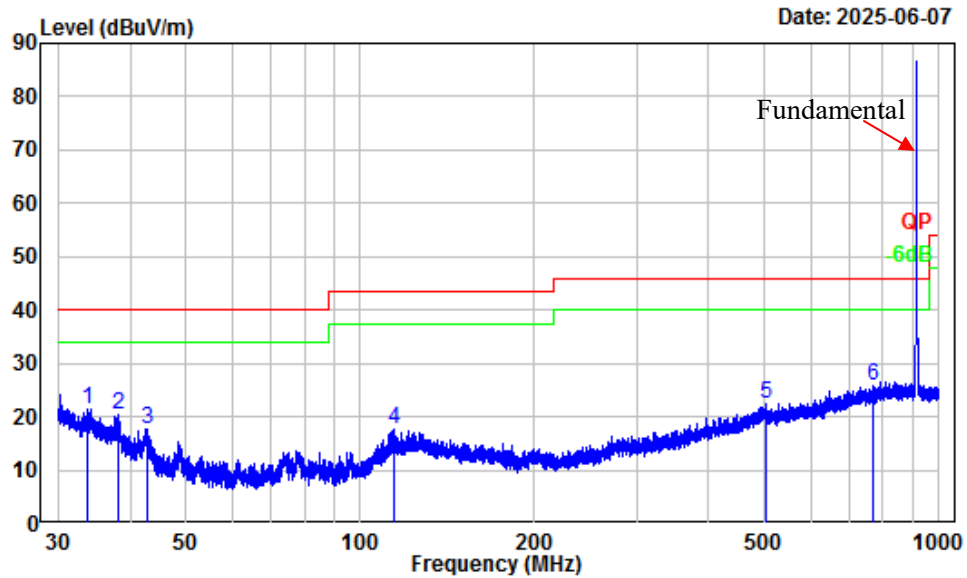

Site : Chamber A
Condition : 3m Vertical
Project Number : 2401A43615E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.68	-8.06	29.55	21.49	40.00	-18.51	Peak
2	38.03	-11.00	31.24	20.24	40.00	-19.76	Peak
3	42.73	-14.39	32.13	17.74	40.00	-22.26	Peak
4	114.67	-12.19	29.95	17.76	43.50	-25.74	Peak
5	502.28	-5.76	28.25	22.49	46.00	-23.51	Peak
6	768.41	-2.57	28.40	25.83	46.00	-20.17	Peak

Above 1 GHz:

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Absolute Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
915MHz							
Antenna 1							
2745.00	55.96	PK	H	-10.64	45.32	74	-28.68
2745.00	54.70	PK	V	-10.64	44.06	74	-29.94
3660.00	54.28	PK	H	-9.72	44.56	74	-29.44
3660.00	54.80	PK	V	-9.72	45.08	74	-28.92
4575.00	51.71	PK	H	-8.18	43.53	74	-30.47
4575.00	51.48	PK	V	-8.18	43.30	74	-30.70
Antenna 2							
2745.00	55.81	PK	H	-10.64	45.17	74	-28.83
2745.00	54.62	PK	V	-10.64	43.98	74	-30.02
3660.00	54.43	PK	H	-9.72	44.71	74	-29.29
3660.00	54.91	PK	V	-9.72	45.19	74	-28.81
4575.00	51.60	PK	H	-8.18	43.42	74	-30.58
4575.00	51.28	PK	V	-8.18	43.10	74	-30.90

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude/Level = Corrected Factor + Reading


Margin = Corrected Amplitude/Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

The peak value is less than the limit of average, so just peak value was recorded


Listed with harmonic margin test plot:


Antenna 1

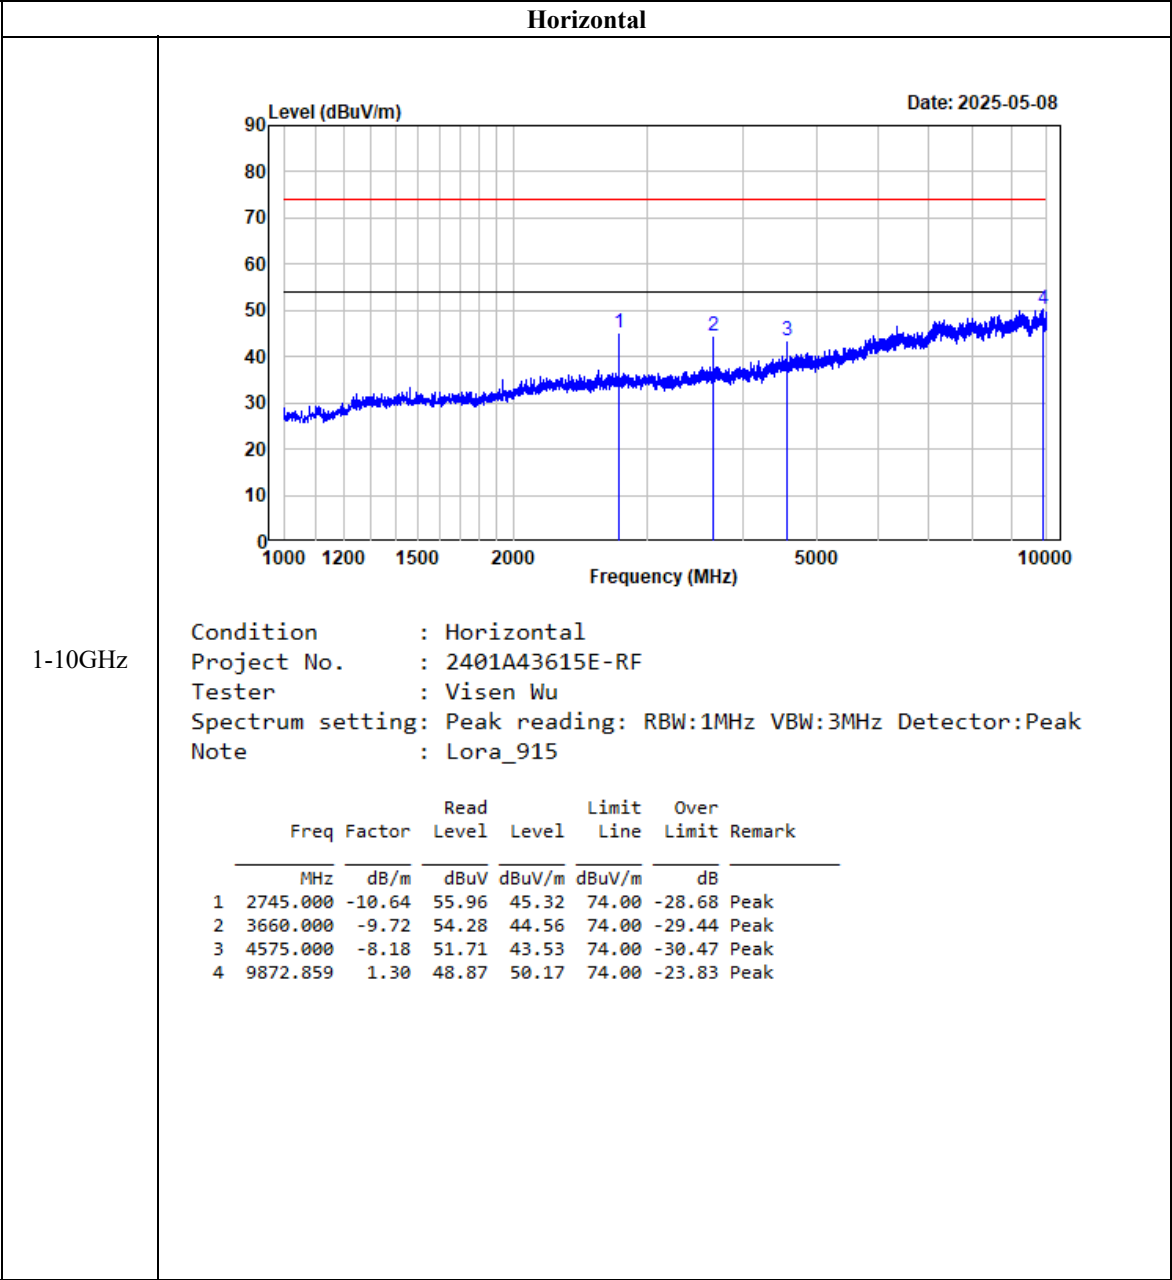

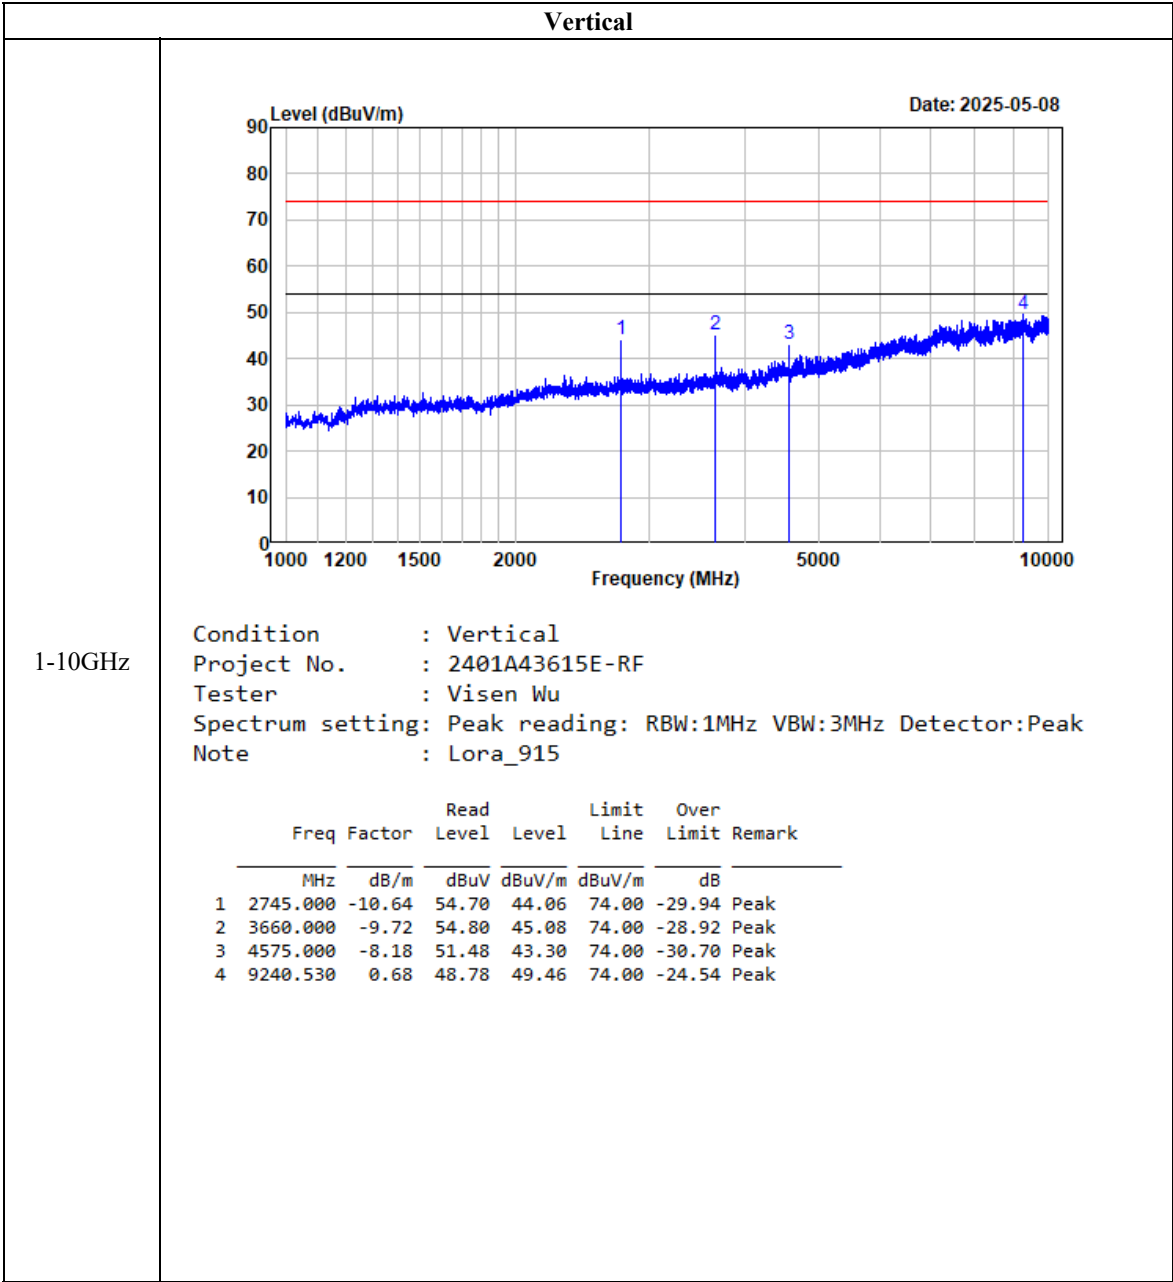

Antenna 2

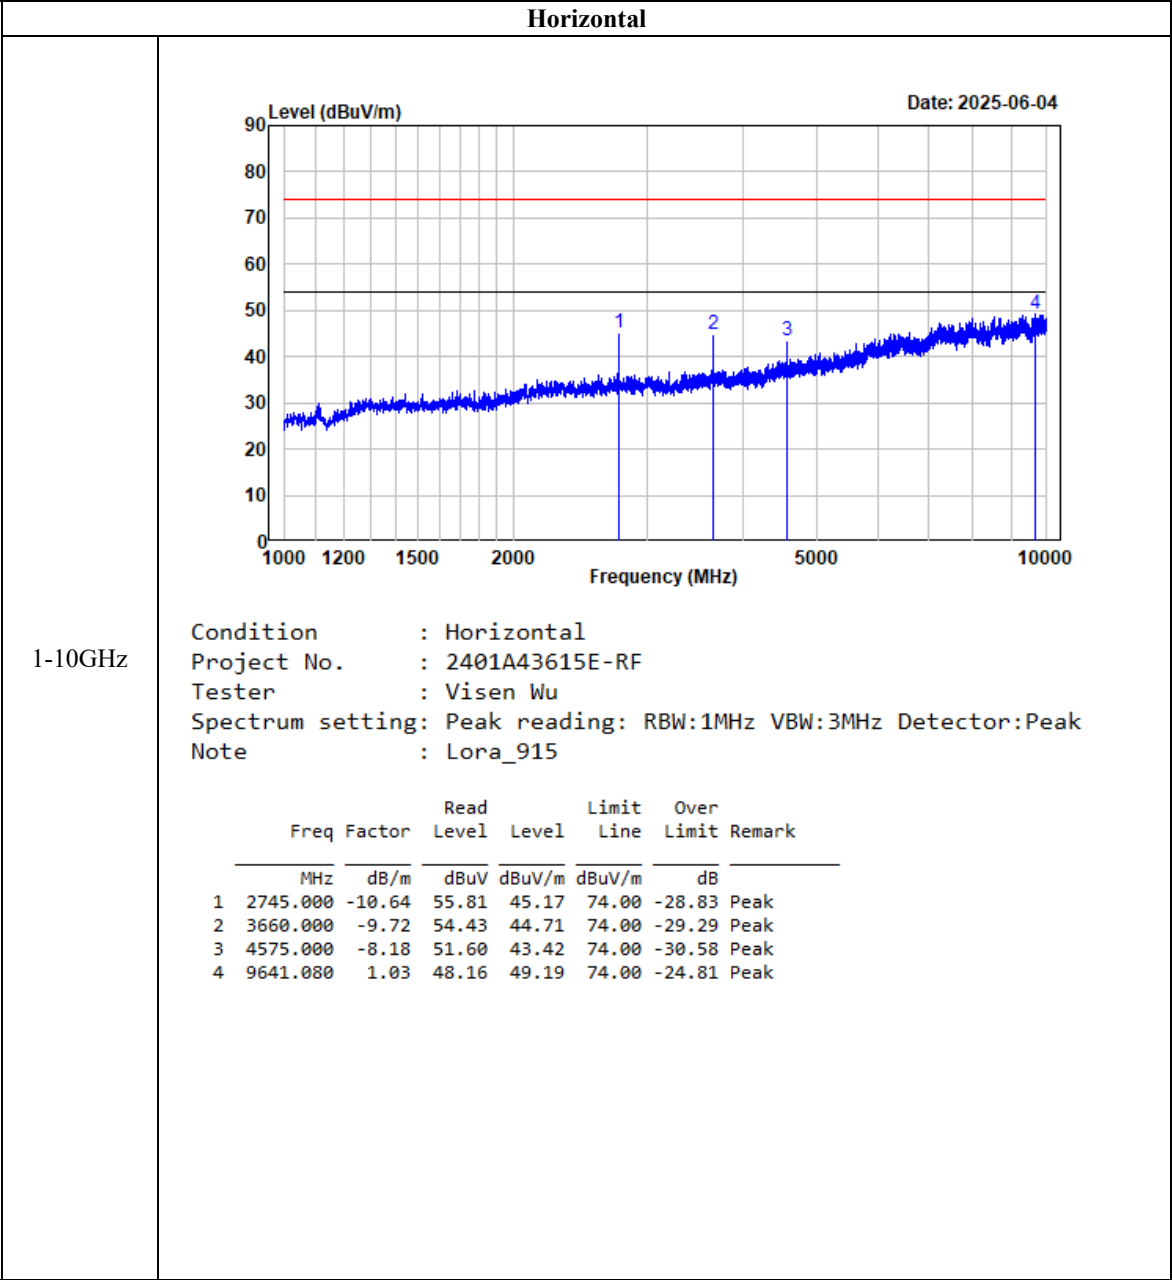

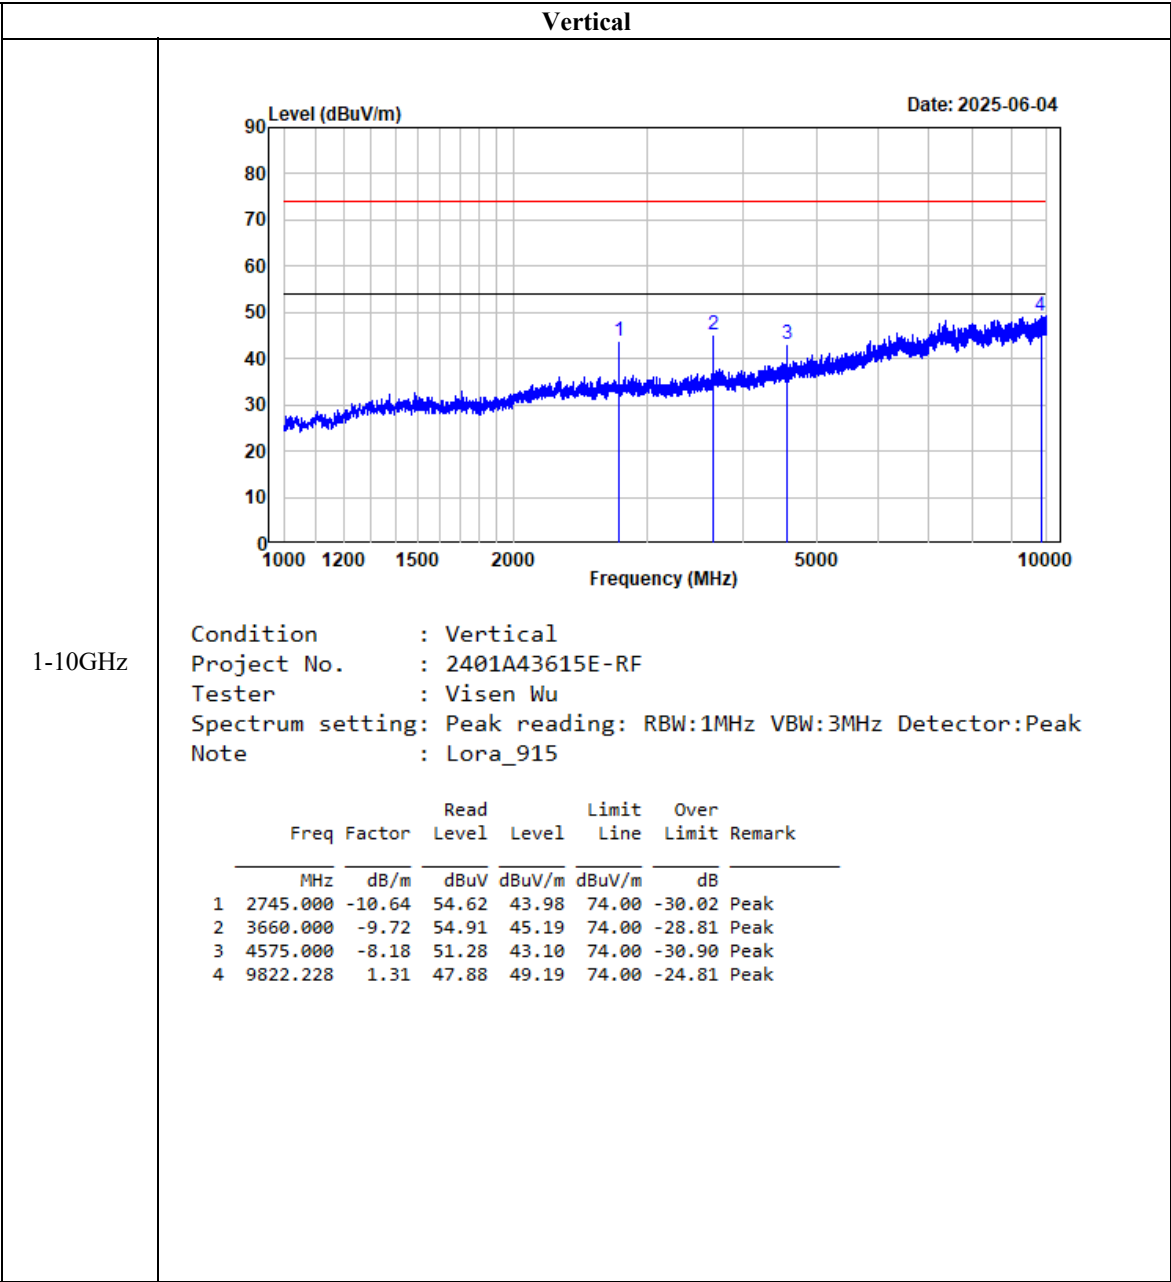

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions


Temperature:	26.1 °C
Relative Humidity:	52 %
ATM Pressure:	100.1 kPa

The testing was performed by Rainbow Zhu on 2025-05-09.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
915	0.654	≥ 0.5

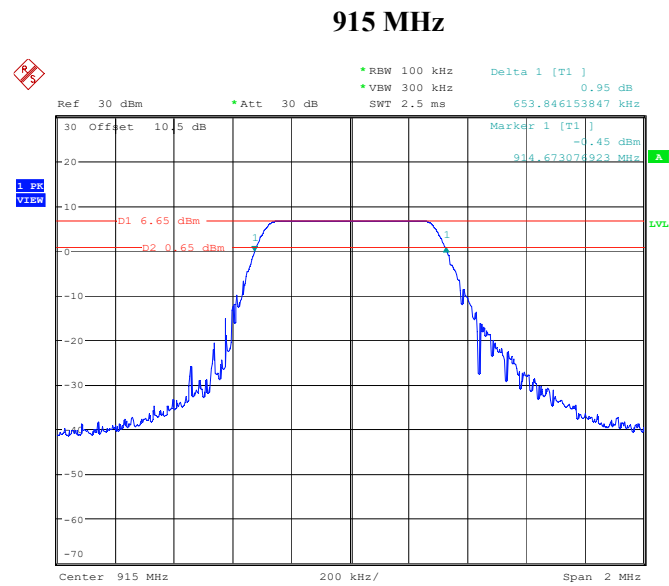

ProjectNo.:2401A43615E-RF Tester:Rainbow Zhu
Date: 9.MAY.2025 10:24:00

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
 3. Add a correction factor to the display.
 4. Set the RBW $\geq$ DTS bandwidth.
 5. Set the VBW $\geq [3 \times \text{RBW}]$.
 6. Set span $\geq [3 \times \text{RBW}]$.
 7. Sweep time = auto couple.
 8. Detector = peak.
 9. Trace mode = max hold.
 10. Allow the trace to stabilize.
- Use peak marker function to determine the peak amplitude level.



Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	52 %
ATM Pressure:	100.1 kPa


The testing was performed by Rainbow Zhu on 2025-05-09.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)
915	6.9	≤30

915 MHz

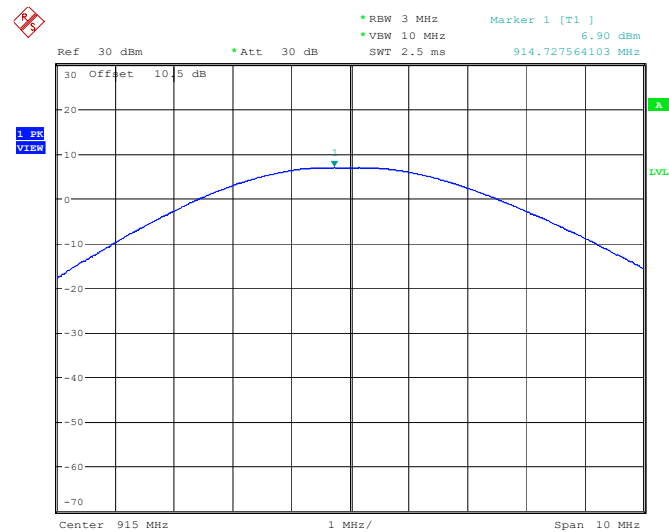

ProjectNo.:2401A43615E-RF Tester:Rainbow Zhu
Date: 9.MAY.2025 10:18:31

FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.

Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11. Report the three highest emissions relative to the limit.



Test Data

Environmental Conditions


Temperature:	26.7 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Rainbow Zhu on 2025-05-26.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

Band edge, Left side

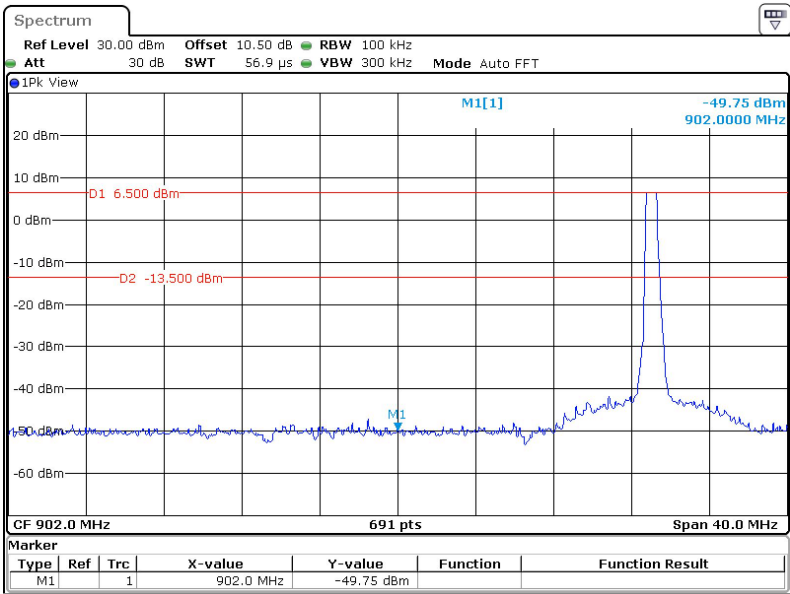

ProjectNo.:2401A43615E-RF Tester:Rainbow Zhu
Date: 26.MAY.2025 10:22:14

Band edge, Right side

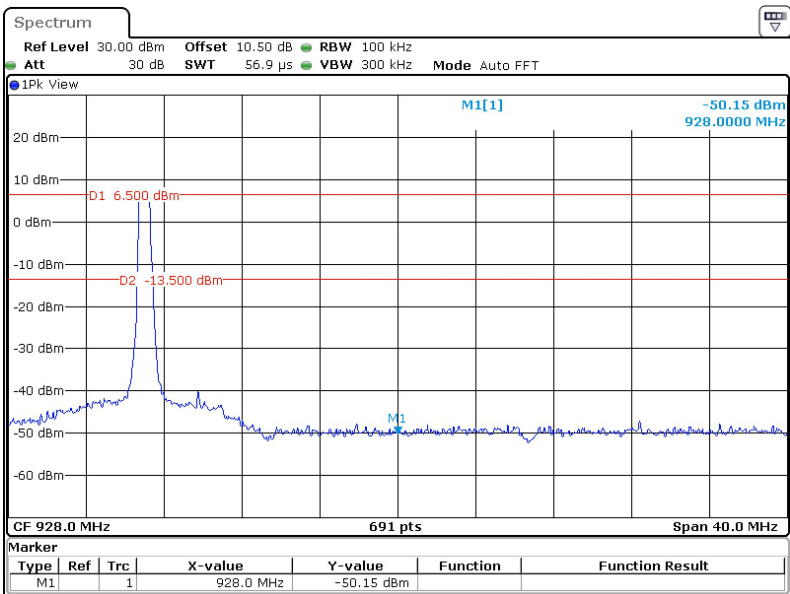

ProjectNo.:2401A43615E-RF Tester:Rainbow Zhu
Date: 26.MAY.2025 10:24:47

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.5

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set analyzer center frequency to DTS channel center frequency
3. Set the span to 1.5 times the DTS bandwidth.
4. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	52 %
ATM Pressure:	100.1 kPa


The testing was performed by Rainbow Zhu on 2025-05-09.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
915	2.99	≤8.00

915 MHz

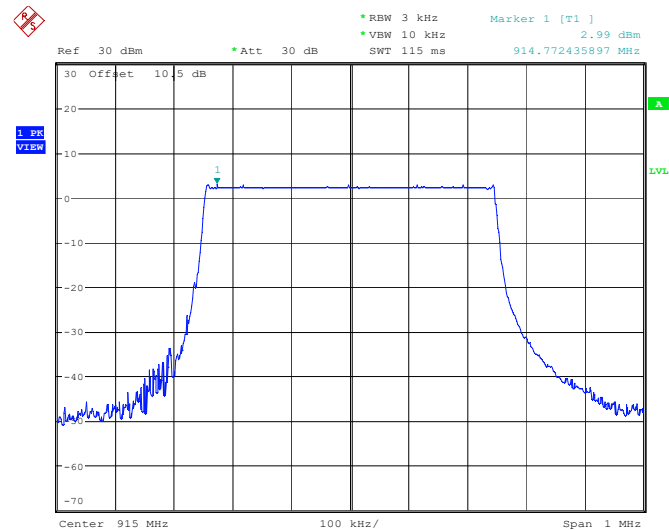

ProjectNo.:2401A43615E-RF Tester:Rainbow Zhu
Date: 9.MAY.2025 10:20:49


C63.10 §11.6- DUTY CYCLE

Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.
- 3) Set VBW $\geq$ RBW. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu\text{s}$.)



Test Data

Environmental Conditions


Temperature:	26.1 °C
Relative Humidity:	52 %
ATM Pressure:	100.1 kPa

The testing was performed by Cheeb Huang on 2025-07-23.

EUT operation mode: Transmitting

Test Result: Compliant.

Test Frequency (MHz)	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)	1/T _{on} (Hz)	VBW Setting (Hz)
915	100	100	100.00	/	0.01

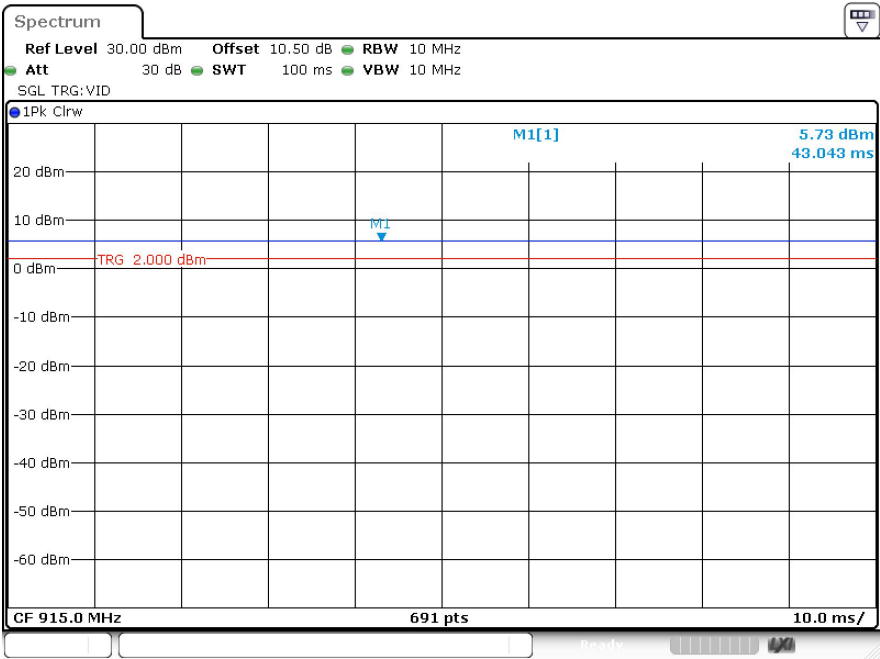

ProjectNo.:2401A43615E-RF Tester:Cheeb Huang
Date: 23.JUL.2025 20:36:10

EUT PHOTOGRAPHS

Please refer to the attachment 2401A43615E-RF External photo and 2401A43615E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401A43615E-RF-00B Test Setup photo.

******* END OF REPORT *******