


Antenna specification

Quick Reference Date


Antenna Introduction	Bluetooth antenna is directly mounted on the PCB board
Frequenc Range	2402 ~ 2480MHz
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)
Peak EIRP(dBm)	0
Directivity (dBi)	1.68 (all direction antenna)
Efficiency (dB)	1.0%
Gain (dBi)	1.68 (Avg Gain XY-plane)
Maximum Power (dBm)	0 (XY-plane)
Minimum Power (dBm)	0(XY-plane)
Avg. Power (dBm)	0(XY-plane)
Input Impedence(ohm)	50
Polarization Type	V ertical & Horizontal
V . S .W . R	< 6

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

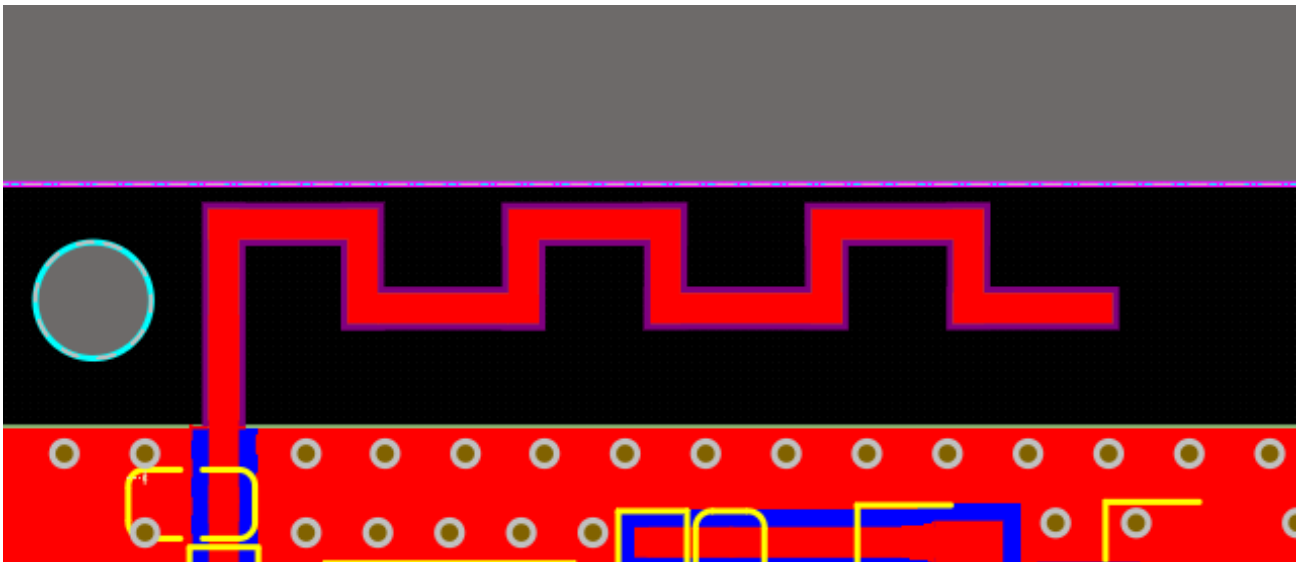

单位: MM

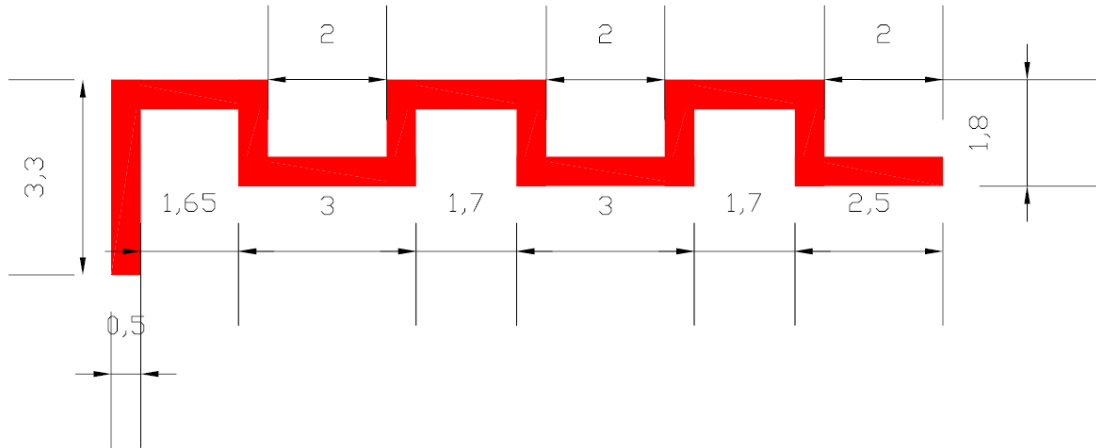


Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	1.0

Return Loss

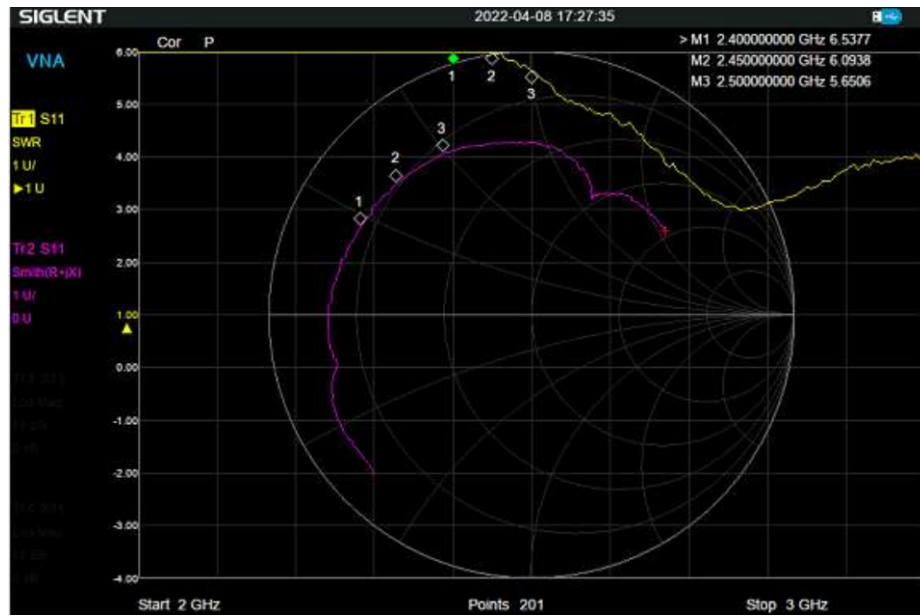


3D radiation pattern diagram

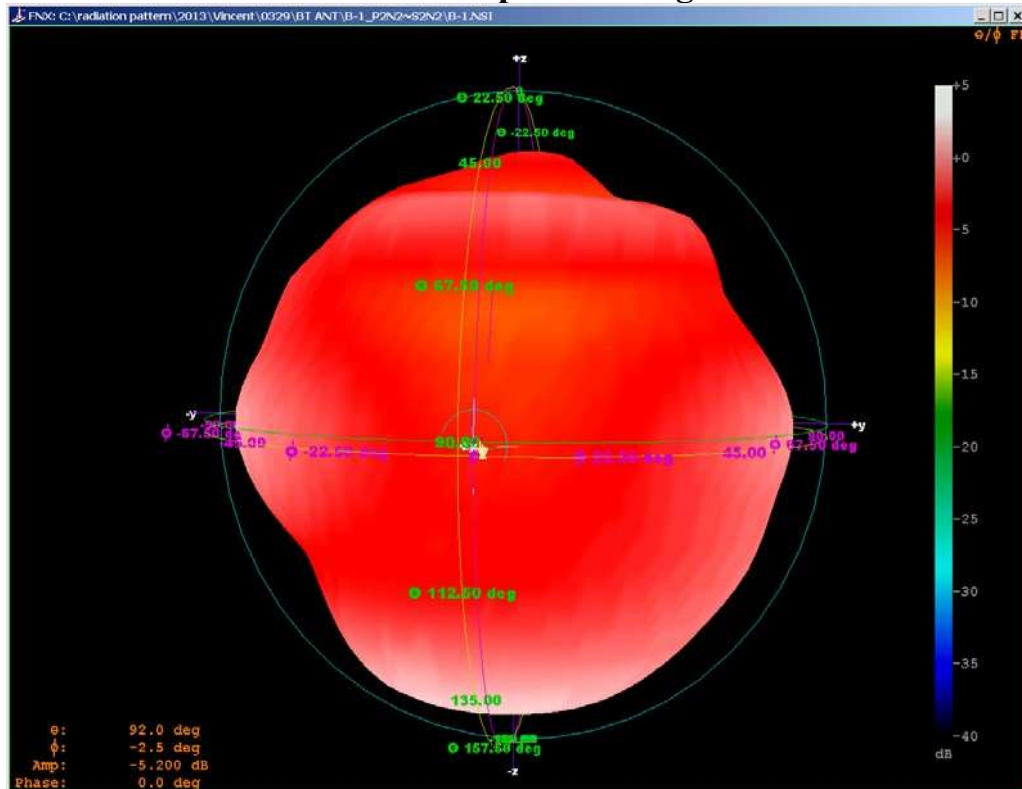


XY-plane

Far-field Power Distribution(H+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dB; Plot AvgGain(H+V)= -0.48dB @2.44000 GHz

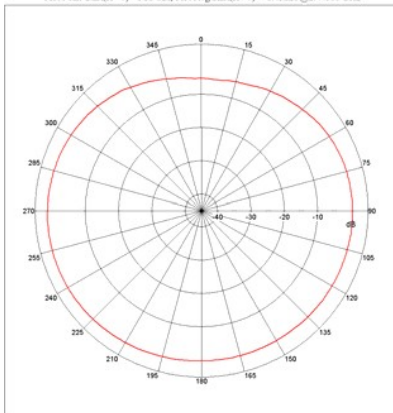

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.68 dB; Plot AvgGain(H+V)= -3.83dB @2.44000 GHz

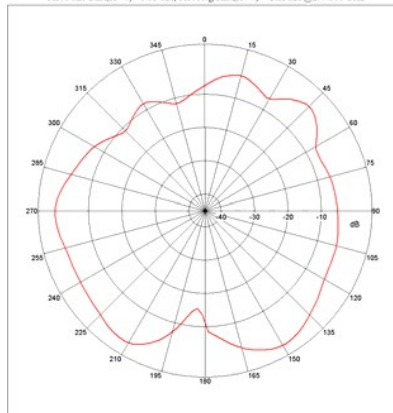

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dB; Plot AvgGain(H+V)= -2.99dB @2.44000 GHz

