

EMC TEST REPORT – 401759-1TRFEMC

Applicant:

Swift Labs Inc.

Product:

Landscape IQ

Model:

Landscape IQ

Specifications:

- ◆ FCC 47 CFR Part 15, Subpart B – Verification
- ◆ ICES-003 Issue 6 January 2016

Date of issue: June 25, 2020

Alvin Liu, EMC/RF Specialist

Tested by

Fahar Abdul Sukkoor, EMC/RF Specialist

Reviewed by



Signature



Signature

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada.
The tests included in this report are within the scope of this accreditation

Lab locations

Company name	Nemko Canada Inc.			
Facilities	Ottawa site: 303 River Road Ottawa, Ontario Canada K1V 1H2	Montréal site: 292 Labrosse Avenue Pointe-Claire, Québec Canada H9R 5L8	Cambridge site: 1-130 Saltsman Drive Cambridge, Ontario Canada N3E 0B2	Almonte site: 1500 Peter Robinson Road West Carleton, Ontario Canada K0A 1L0
	Tel: +1 613 737 9680 Fax: +1 613 737 9691	Tel: +1 514 694 2684 Fax: +1 514 694 3528	Tel: +1 519 650 4811	Tel: +1 613 256-9117 Fax: +1 613 256-8848
Test site registration	Organization	Recognition numbers and location		
	FCC/ISED	FCC: CA2040; IC: 2040A-4 (Ottawa/Almonte); FCC: CA2041; IC: 2040G-5 (Montreal); CA0101 (Cambridge)		
Website	www.nemko.com			

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Test specifications	4
1.2 Exclusions	4
1.3 Statement of compliance	4
1.4 Test report revision history	4
Section 2 Engineering considerations	5
2.1 Modifications incorporated in the EUT for compliance	5
2.2 Technical judgment	5
2.3 Deviations from laboratory tests procedures	5
Section 3 Test conditions	6
3.1 Atmospheric conditions	6
3.2 Power supply range	6
Section 4 Measurement uncertainty	7
4.1 Uncertainty of measurement	7
Section 5 Information provided by the applicant	8
5.1 Disclaimer	8
5.2 Applicant and Manufacturer	8
5.3 EUT information	8
5.4 EUT setup details	9
Section 6 Summary of test results	10
6.1 Testing location	10
6.2 Testing period	10
6.3 Sample information	10
6.4 Test results	10
Section 7 Terms and definitions	11
7.1 Product classifications and definitions	11
7.2 General definitions	12
Section 8 Testing data	13
8.1 Radiated emissions	13

Section 1 Report summary

1.1 Test specifications

FCC 47 CFR Part 15, Subpart B – Verification	Title 47: Telecommunication; Part 15—Radio Frequency Devices
ICES-003 Issue 6 January 2016	Information Technology Equipment (ITE) – Limits and methods of measurement

1.2 Exclusions

None

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Unless noted in section 1.2, all testing was performed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.4 Test report revision history

Table 1.4-1: Test report revision history

Revision #	Date of issue	Details of changes made to test report
TRF	June 25, 2020	Original report issued

Section 2 Engineering considerations

2.1 Modifications incorporated in the EUT for compliance

There were no modifications performed to the EUT during this assessment.

2.2 Technical judgment

None

2.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 3 Test conditions

3.1 Atmospheric conditions

Temperature	15 °C – 35 °C
Relative humidity	30 % – 60 %
Air pressure	86 kPa (860 mbar) – 106 kPa (1060 mbar)

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

3.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 4 Measurement uncertainty

4.1 Uncertainty of measurement

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4-2 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modelling – Measurement instrumentation uncertainty. The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of K=2 with 95% certainty.

Table 4.1-1: Measurement uncertainty calculations

Measurement		U_{cispr} dB	U_{lab} dB			
			Ottawa	Montreal	Cambridge	Almonte
Conducted disturbance at AC mains and other port power using a V-AMN	(9 kHz to 150 kHz) (150 kHz to 30 MHz)	3.8 3.4	2.9 2.3	2.8 2.2	2.8 2.2	N/A N/A
Radiated disturbance (electric field strength at an OATS or in a SAC)	(30 MHz to 1 GHz)	6.3	5.7	5.5	5.5	5.5
Radiated disturbance (electric field strength in a FAR)	(1 GHz to 6 GHz)	5.2	4.8	5.1	4.8	N/A
Radiated disturbance (electric field strength in a FAR)	(6 GHz to 18 GHz)	5.5	5.1	5.0	4.7	N/A

Notes:

Compliance assessment:

If U_{lab} is less than or equal to U_{cispr} then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit

If U_{lab} is greater than U_{cispr} then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit

Section 5 Information provided by the applicant

5.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

5.2 Applicant and Manufacturer

Applicant name	Swift Labs Inc.
Applicant address	137 Glasgow Street, Suite 490, Kitchener, Ontario, Canada N2G 4X8
Manufacturer name	SmartWave Technologies Inc.
Manufacturer address	1 Marmac Drive, Toronto, ON, M9W 1E7, Canada

5.3 EUT information

Product	Landscape IQ
Model	Landscape IQ
Serial number	None
Power requirements	2 x 3 V _{DC} CR2450 Lithium cell
Description/theory of operation	The unit is powered on continuously and run production firmware.
Operational frequencies	38.4 MHz
Software details	V1.18

5.4 EUT setup details

Methods used to exercise the EUT and all relevant ports:

- The unit is settled in a plastic housing.
- The unit is powered on continuously and run production firmware.

Configuration details:

- The EUT setup in a configuration that was expected to produce the highest amplitude emissions relative to the limit and that satisfy normal operation/installation practice by the end user.
- The type and construction of cables used in the measurement set-up were consistent with normal or typical use. Cables with mitigation features (for example, screening, tighter/more twists per length, ferrite beads) have been noted below:
 - None
- The EUT was setup in a manner that was consistent with its typical arrangement and use. The measurement arrangement of the EUT, local AE and associated cabling was representative of normal practice. Any deviations from typical arrangements have been noted below:
 - None

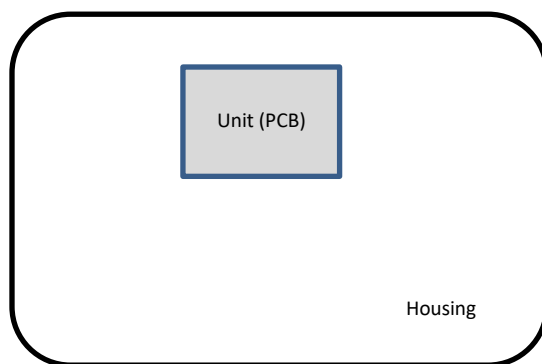


Figure 5.4-1: block diagram

Section 6 Summary of test results

6.1 Testing location

Test location (s) Cambridge

6.2 Testing period

Test start date June 24, 2020 Test end date June 24, 2020

6.3 Sample information

Receipt date June 23, 2020 Nemko sample ID number 1

6.4 Test results

Table 6.4-1: Result summary for emissions

Standard	Clause	Test description	Verdict
FCC 47 CFR Part 15, Subpart B	§15.107	Conducted emissions limits (AC mains) ¹	Not applicable ²
FCC 47 CFR Part 15, Subpart B	§15.109	Radiated emissions limits ¹	Pass
ICES-003 Issue 6	6.1	AC Power Line Conducted Emissions Limits ¹	Not applicable ²
ICES-003 Issue 6	6.2	Radiated Emissions Limits ¹	Pass

Notes: ¹ Product classification B
² The EUT is Battery powered

Section 7 Terms and definitions

7.1 Product classifications and definitions

7.1.1 Title 47: Telecommunication – Part 15-Radio Frequency devices, Subpart A – General – Equipment classification

Class A digital device	A digital device that is marketed for use in a commercial, industrial or business environment, exclusive of a device which is marketed for use by the general public or is intended to be used in the home.
Class B digital device	A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public. Note: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.

7.1.2 ICES-003 – Equipment classification

Class B ITE	limits of radio noise for ITE for residential operation
Class A ITE	limits of radio noise for ITE for non-residential operation
Conditions	Only ITE intended strictly for non-residential use in commercial, industrial or business environments, and whose design or other characteristics strongly preclude the possibility of its use in a residential environment, shall be permitted to comply with the less stringent Class A limits. All ITE that cannot meet the conditions for Class A operation shall comply with the Class B limits. The ITE shall comply with both the power line – conducted and the radiated emissions limits within the same Class, with no intermixing.

7.2 General definitions

7.2.1 Title 47: Telecommunication – Part 15-Radio Frequency devices, Subpart A – General – Digital device definitions

Digital device (Previously defined as a computing device)

An unintentional radiator (device or system) that generates and uses timing signals or pulses at a rate in excess of 9,000 pulses (cycles) per second and uses digital techniques; inclusive of telephone equipment that uses digital techniques or any device or system that generates and uses radio frequency energy for the purpose of performing data processing functions, such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval, or transfer. A radio frequency device that is specifically subject to an emanation requirement in any other FCC Rule part or an intentional radiator subject to subpart C of this part that contains a digital device is not subject to the standards for digital devices, provided the digital device is used only to enable operation of the radio frequency device and the digital device does not control additional functions or capabilities.

Note: Computer terminals and peripherals that are intended to be connected to a computer are digital devices.

7.2.2 ICES-003 – Definitions

Information technology equipment (ITE)

Information Technology Equipment (ITE) is defined as devices or systems that use digital techniques for purposes such as data processing and computation. ITE is any unintentional radiator (device or system) that generates and/or uses timing signals or pulses having a rate of at least 9 kHz and employs digital techniques for purposes such as computation, display, data processing and storage, and control.

Section 8 Testing data

8.1 Radiated emissions

8.1.1 References and limits

- FCC 47 CFR Part 15, Subpart B: Clause §15.109 (Test method ANSI C63.4:2014)
- ICES-003: Section 6.2

Table 8.1-1: Requirements as per for radiated emissions for Class B

Facility	Frequency range [MHz]	Distance [m]	Measurement	limits
			Detector type/ bandwidth	[dBμV/m]
OATS/SAC	30–88	3	Quasi Peak/120 kHz	40.0
	88–216			43.5
	216–960			46.0
	960–1000			54.0
FSOATS	>1000	3	Linear average/1 MHz	54.0
			Peak/1 MHz	74.0

- Notes:
- OATS – Open Area Test Site, SAC – Semi Anechoic Chamber, FSOATS – Free Space Open Area Test Site
 - Where there is a step in the relevant limit, the lower value was applied at the transition frequency.

8.1.2 Test summary

Verdict	Pass		
Tested by	Alvin Liu	Test date	June 24, 2020

8.1.3 Notes

- The spectral plots within this section are a summation of vertical and horizontal scans. The spectral plots within this section have been corrected with all applicable transducer factors.
- Where tabular data has not been provided, no emissions were observed within 10 dB of the specified limit when measured with the appropriate detector. Additionally; where less than 6 measurements per detector has been provided, fewer than 6 emissions were observed within 10 dB of the specified limit when measured with the appropriate detector.
- The spectrum was scanned to 1 GHz according to the EUT highest digital operating frequency.

Table 8.1-2: Maximum frequency test range based on highest digital operating frequency

Highest internal frequency [F _x]	Highest measured frequency
F _x ≤ 108 MHz	1 GHz
108 MHz < F _x ≤ 500 MHz	2 GHz
500 MHz < F _x ≤ 1 GHz	5 GHz
F _x > 1 GHz	5 × F _x up to a maximum of 40 GHz

- Notes:
- Highest internal frequency [F_x] – highest fundamental frequency generated or used within the EUT or highest frequency at which it operates. This includes frequencies which are solely used within an integrated circuit.
- For FM and TV broadcast receivers F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

8.1.4 Setup details

Port under test	Enclosure Port
EUT power input during test	3 V _{DC} (via two CR2450 Lithium cells)
EUT setup configuration	Table top
Test facility	Semi anechoic chamber
Measuring distance	3 m
Antenna height variation	1–4 m
Turn table position	0–360°
Measurement details	A preview measurement was generated with receiver in continuous scan or sweep mode while the EUT was rotated and antenna adjusted to maximize radiated emission. Emissions detected within 10 dB or above the limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver/spectrum analyzer settings.

Resolution bandwidth	Measurements below 1 GHz: 120 kHz
Video bandwidth	Measurements below 1 GHz: 300 kHz
Detector mode	Measurements below 1 GHz: Peak (Preview), Quasi-peak (Final)
Trace mode	Max Hold
Measurement time	100 ms

Table 8.1-3: Radiated emissions equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Receiver/spectrum analyzer	Rohde & Schwarz	ESR26	FA002969	1 year	December 4, 2020
3 m EMI test chamber	TDK	SAC-3	FA003012	1 year	October 10, 2020
Flush mount turntable	SUNAR	FM2022	FA003006	—	NCR
Controller	SUNAR	SC110V	FA002976	—	NCR
Antenna mast	SUNAR	TLT2	FA003007	—	NCR
Bilog antenna (30–2000 MHz)	SUNAR	JB1	FA003010	1 year	September 17, 2020
50 Ω coax cable	Huber + Suhner	None	FA003044	1 year	October 7, 2020
50 Ω coax cable	Huber + Suhner	None	FA003047	1 year	September 30, 2020

Notes: NCR - no calibration required

Table 8.1-4: Radiated emissions test software details

Manufacturer of Software	Details
Rohde & Schwarz	EMC32, Software for EMC Measurements, Version 10.60.00

8.1.5 Test data

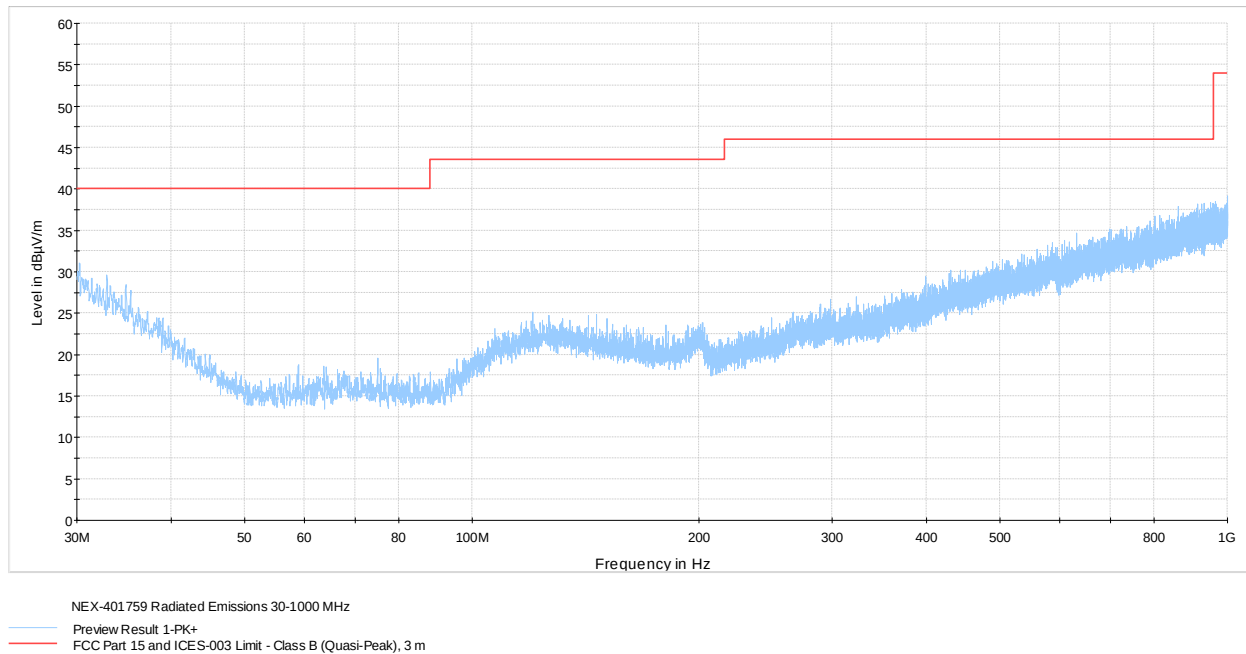


Figure 8.1-1: Radiated emissions spectral plot (30 to 1000 MHz)

8.1.6 Setup photos



Figure 8.1-2: Radiated emissions setup photo – below 1 GHz



Figure 8.1-3: Radiated emissions setup photo – below 1 GHz

End of the test report