



FCC RADIO TEST REPORT

FCC ID : 2ASZK-2887
Equipment : Smart Plug
Model Name : C2YY37
Applicant : Chemistry Universe FX LLC
303 Wyman Street, Suite 300
Waltham, Massachusetts 02451-1208
United States Of America
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 10, 2020 and testing was started from Dec. 10, 2020 and completed on Dec. 26, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 List of Measuring Equipment	35
5 Uncertainty of Evaluation.....	37
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(2)	6dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.247(b)(3)	Output Power	Pass
3.3	15.247(e)	Power Spectral Density	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass
3.6	15.207	AC Conducted Emission	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Plug
Model Name	C2YY37
FCC ID	2ASZK-2887
EUT supports Radios application	WLAN 11b/g/n HT20 Bluetooth-LE

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	6.60 dBm (0.0046 W) for 1Mbps
99% Occupied Bandwidth	1.013MHz for 1Mbps
Antenna Type / Gain	PCB Antenna type with gain 0 dBi
Type of Modulation	Bluetooth LE : GFSK

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY, CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Light Bulb (0%)

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

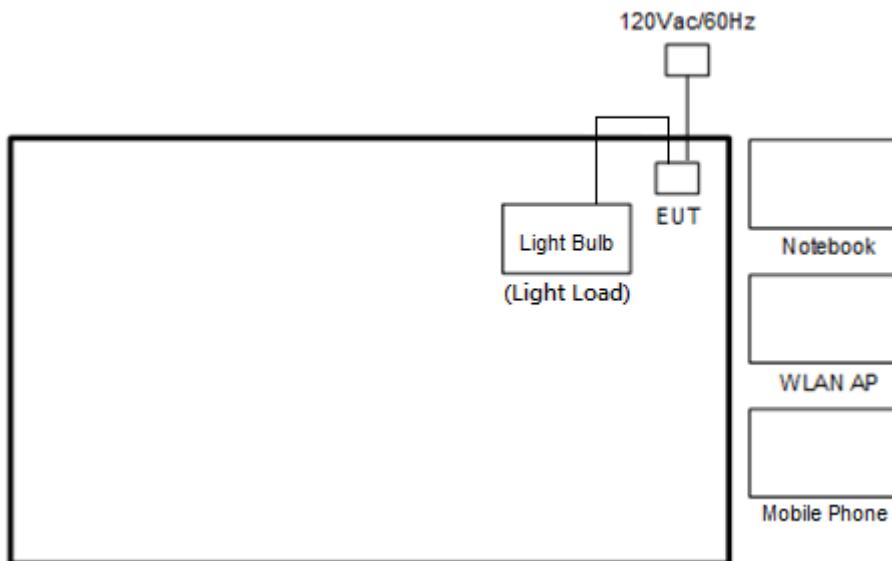

<Bluetooth - LE Tx Mode>

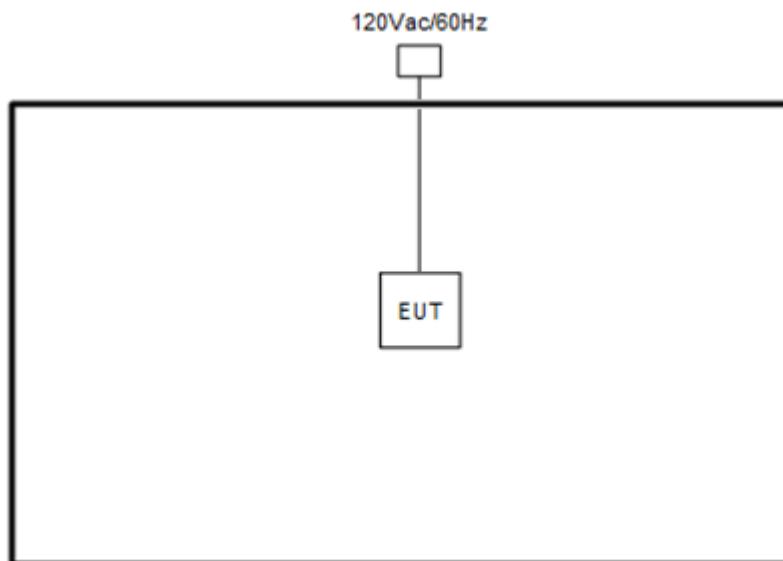



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
2.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Light Bulb	Integrated industry	200W light bulb	N/A	N/A	N/A
4.	Light Load	N/A	N/A	N/A	N/A	N/A
5.	Mobile Phone	SAMSUNG	SM-A730F/DS	A3LSMA730F	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “WCN_Combo_tool Version W1636” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
6. Measure and record the results in the test report.


3.1.4 Test Setup

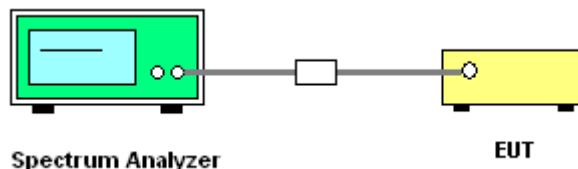

3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

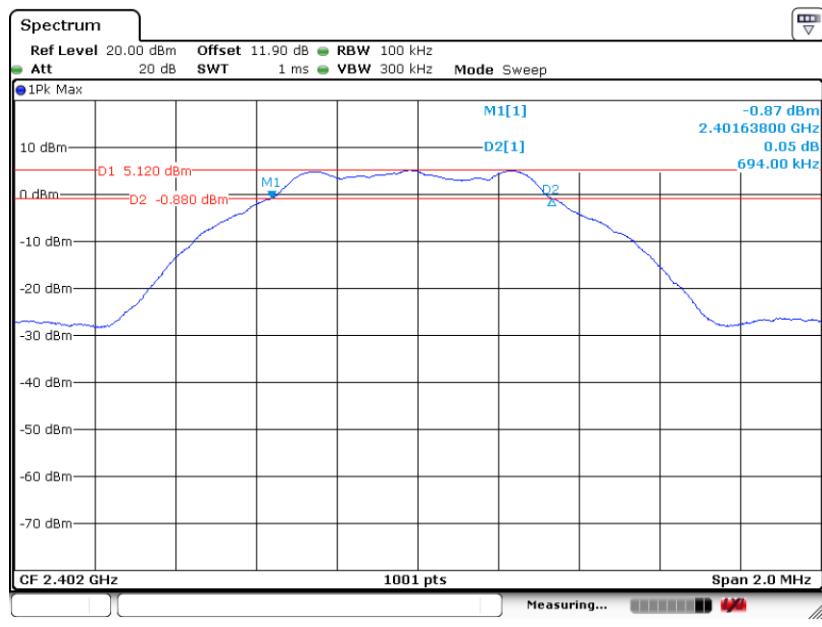




6 dB Bandwidth Plot on Channel 19

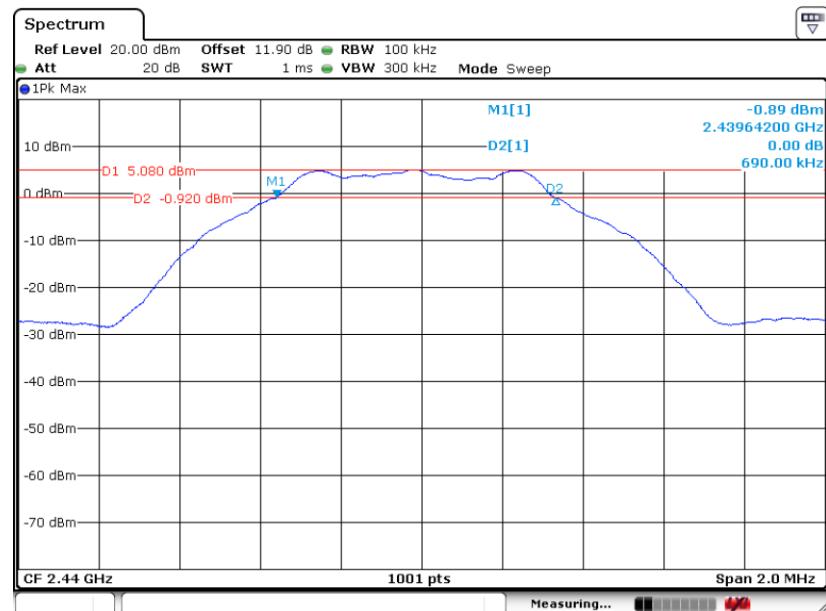

Date: 24.DEC.2020 09:38:33

6 dB Bandwidth Plot on Channel 39

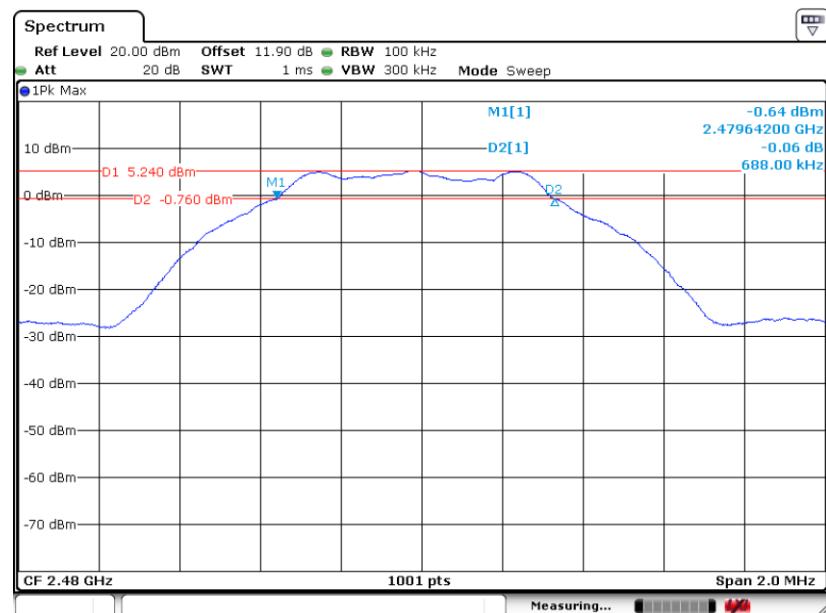


Date: 24.DEC.2020 09:47:17

3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

99% Bandwidth Plot on Channel 00

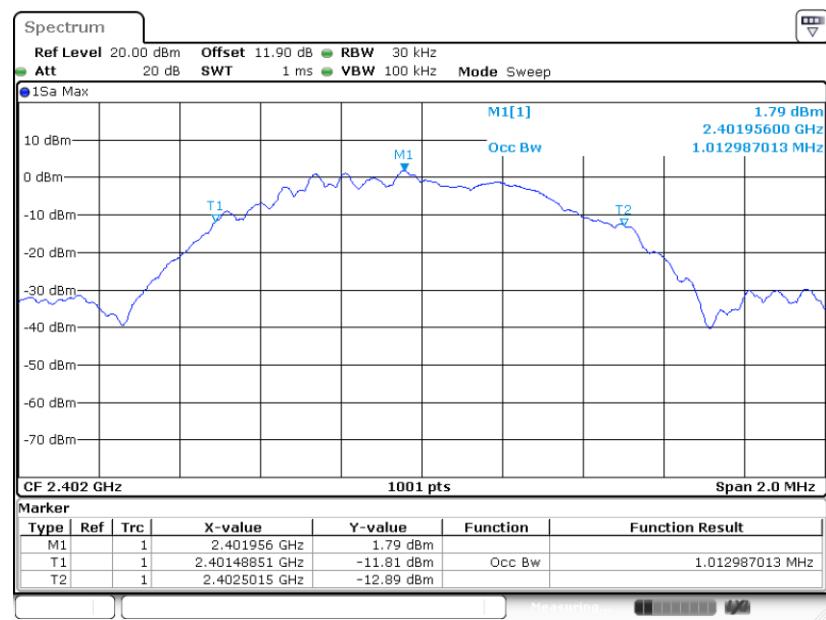




99% Occupied Bandwidth Plot on Channel 19

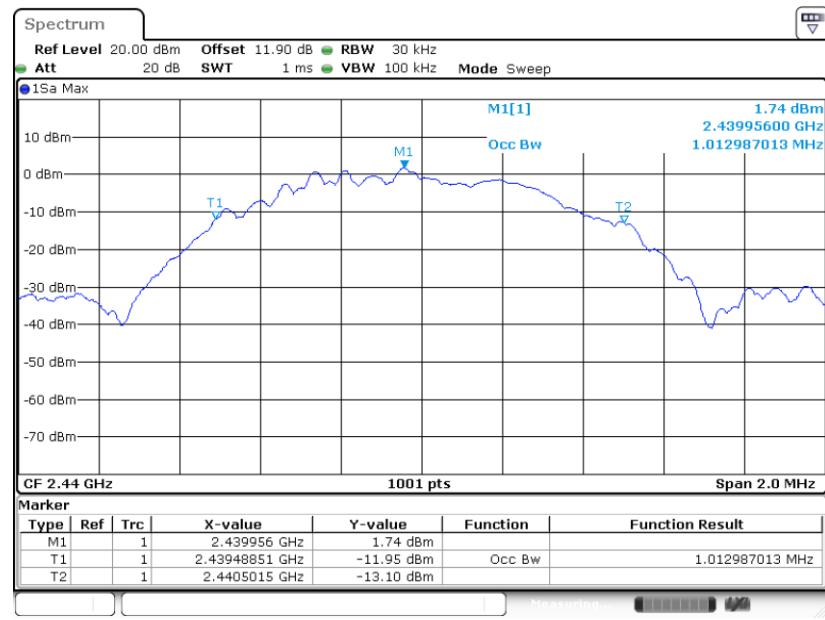

99% Occupied Bandwidth Plot on Channel 39

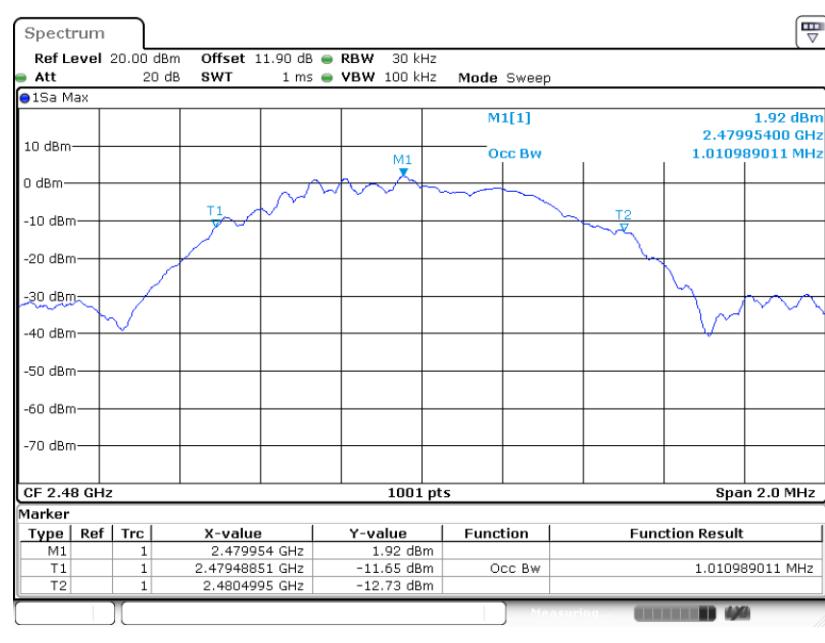

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

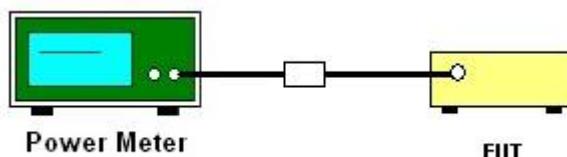

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

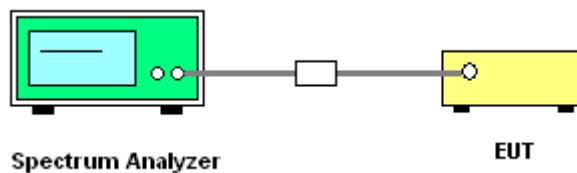


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

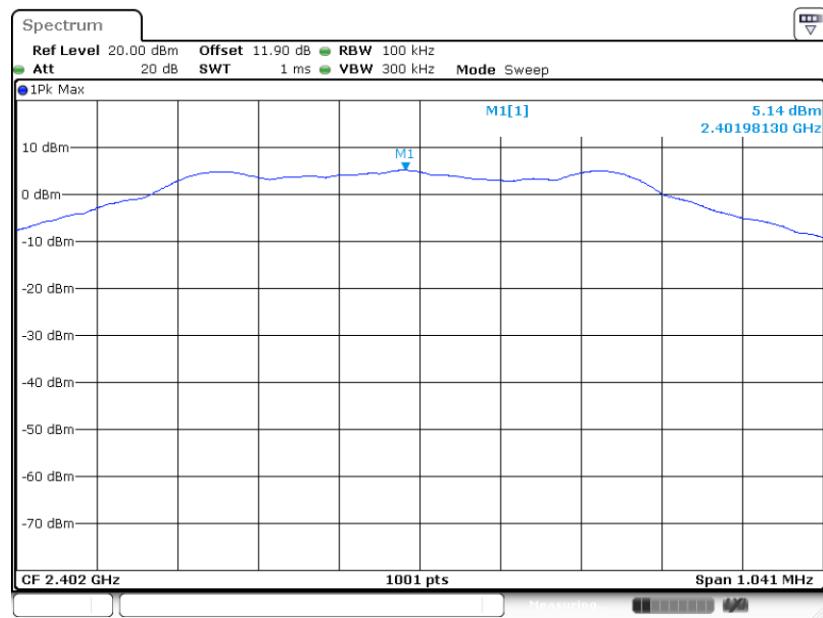

Date: 24.DEC.2020 09:31:15


PSD 100kHz Plot on Channel 19

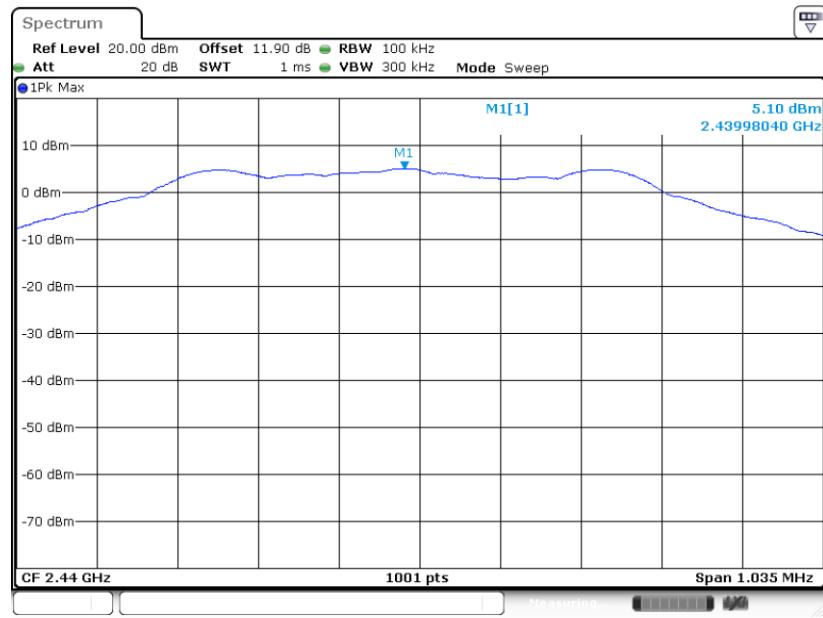

Date: 24.DEC.2020 09:39:31



PSD 100kHz Plot on Channel 39

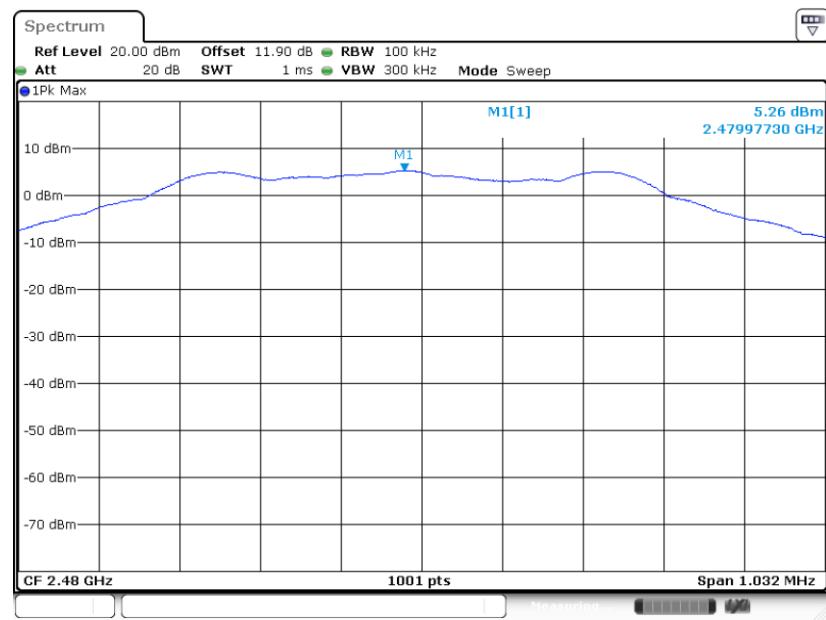


Date: 24.DEC.2020 09:49:23




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

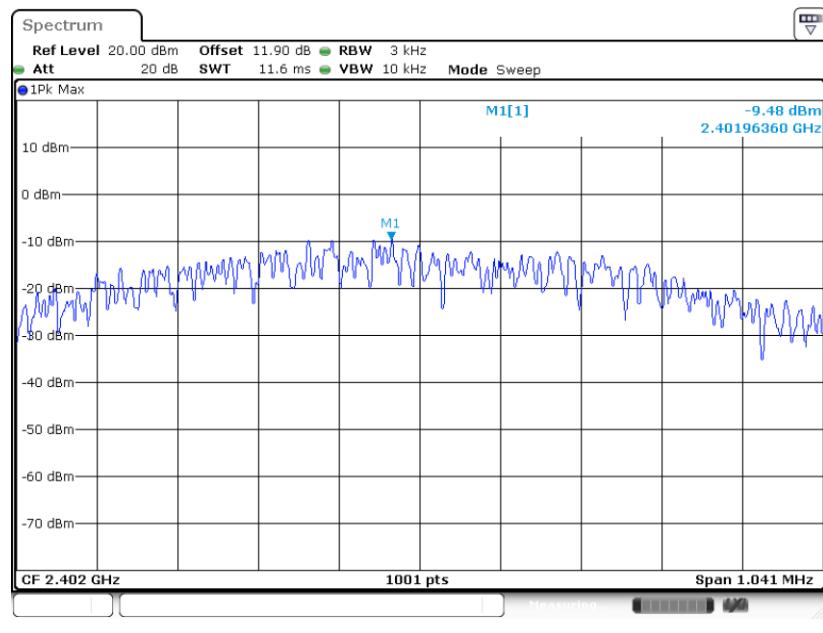


PSD 3kHz Plot on Channel 19

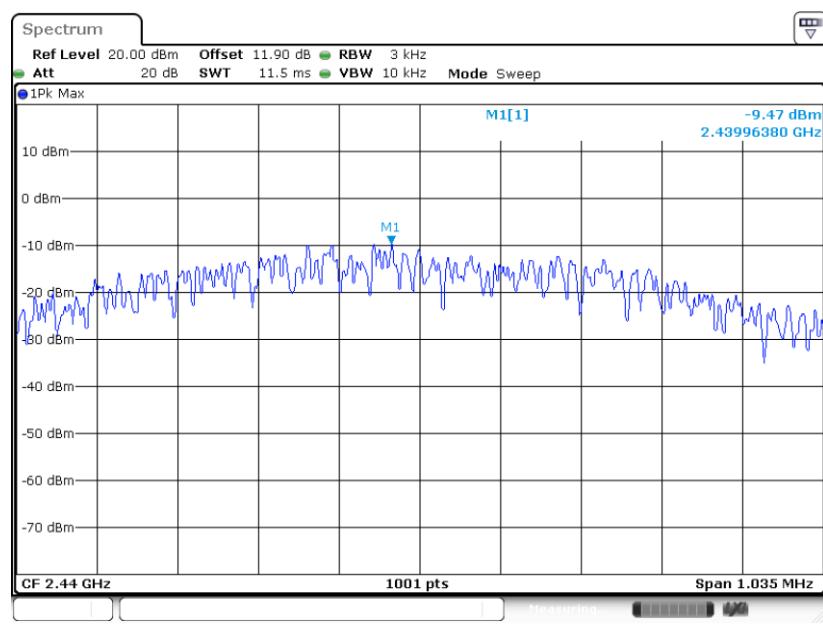



PSD 3kHz Plot on Channel 39

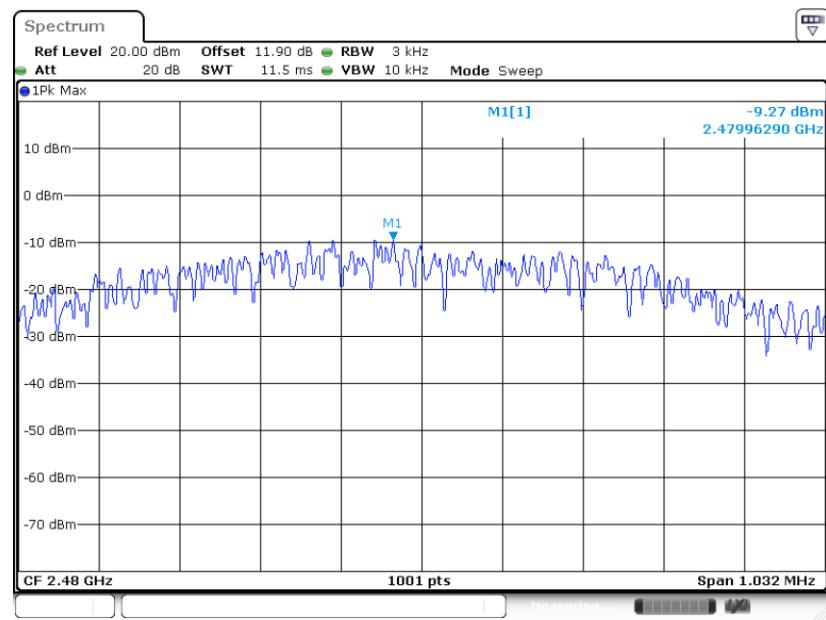

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure


1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

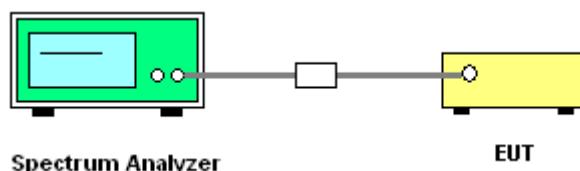


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

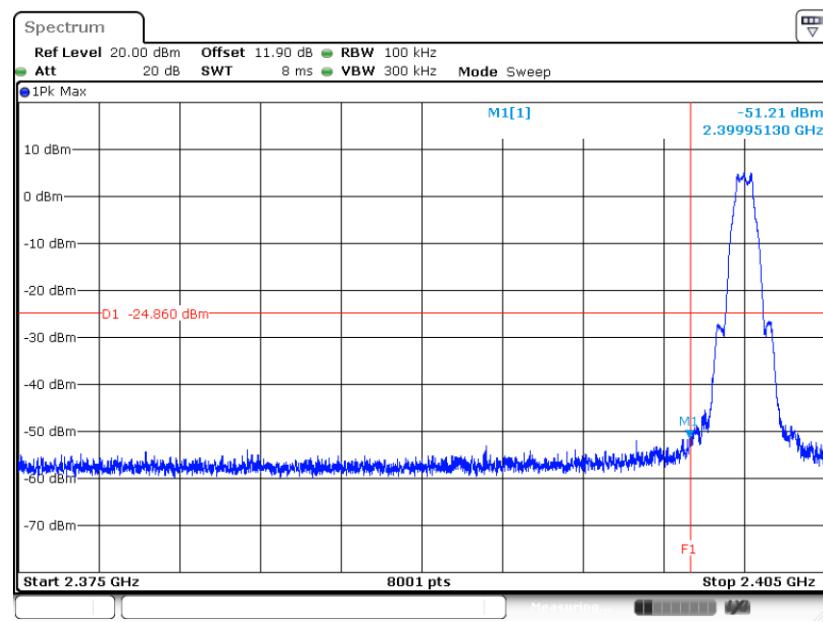


High Band Edge Plot on Channel 39

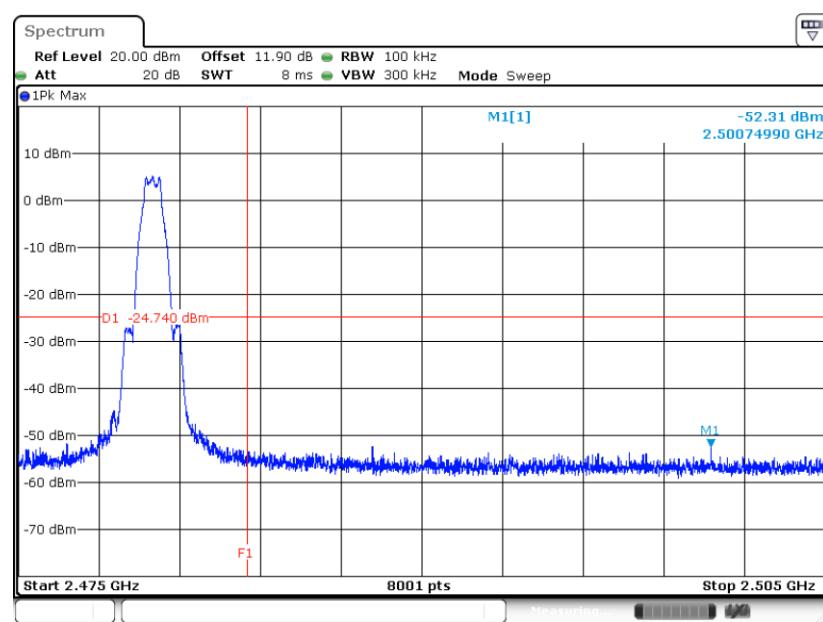

3.4.6 Test Result of Conducted Spurious Emission Plots


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

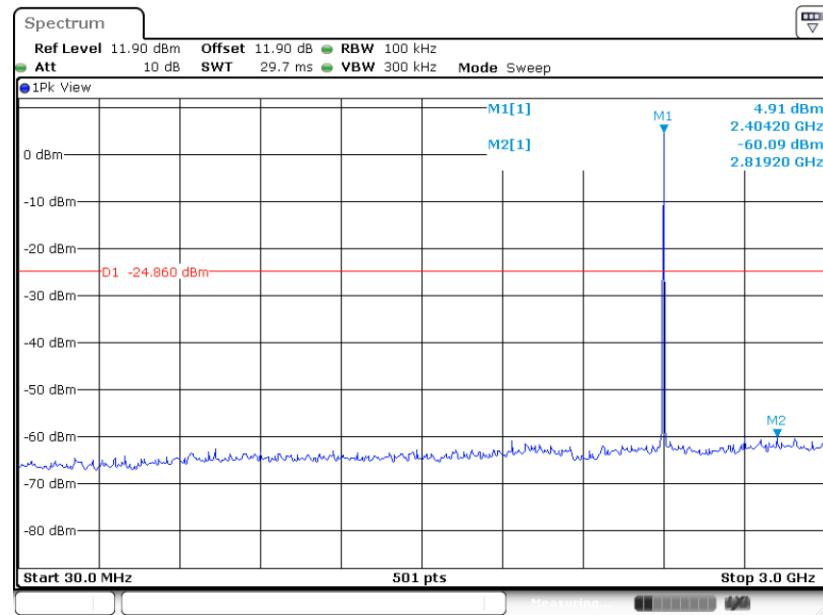

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

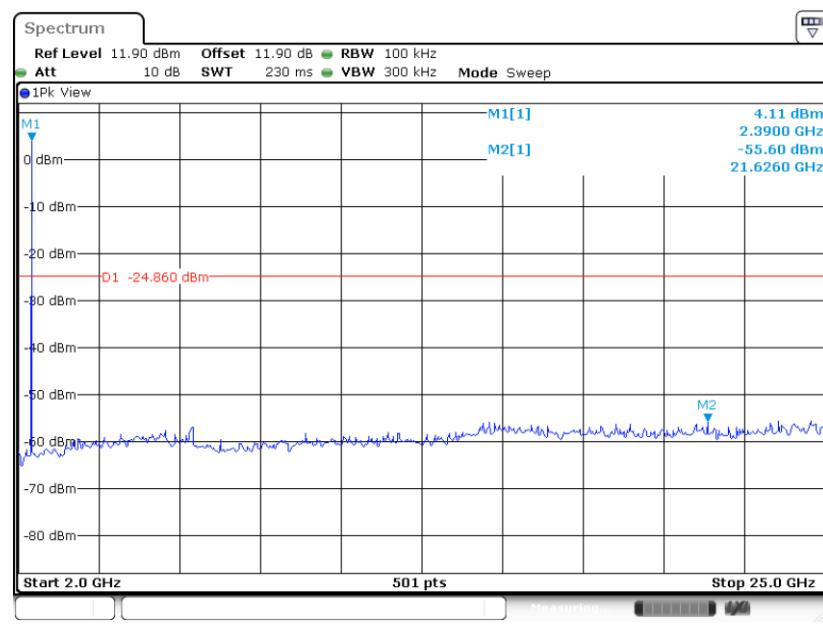




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

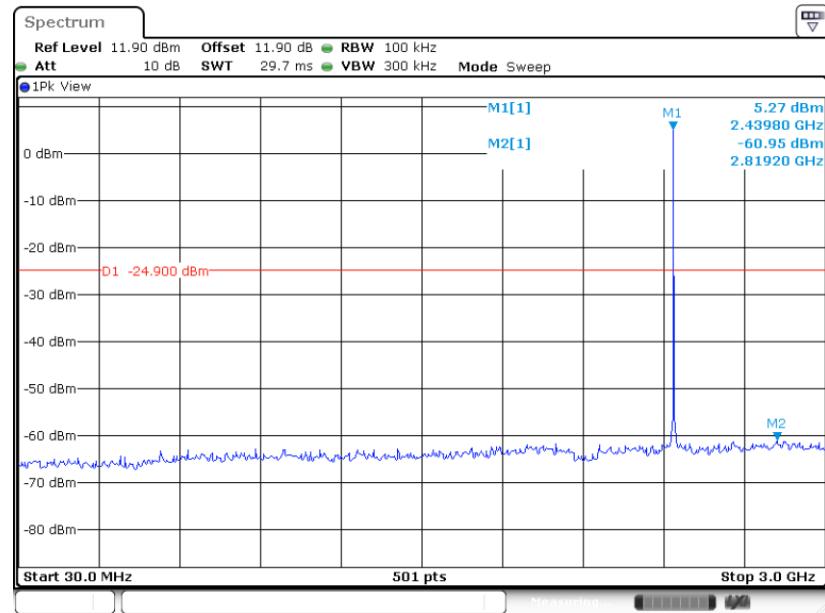

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 19

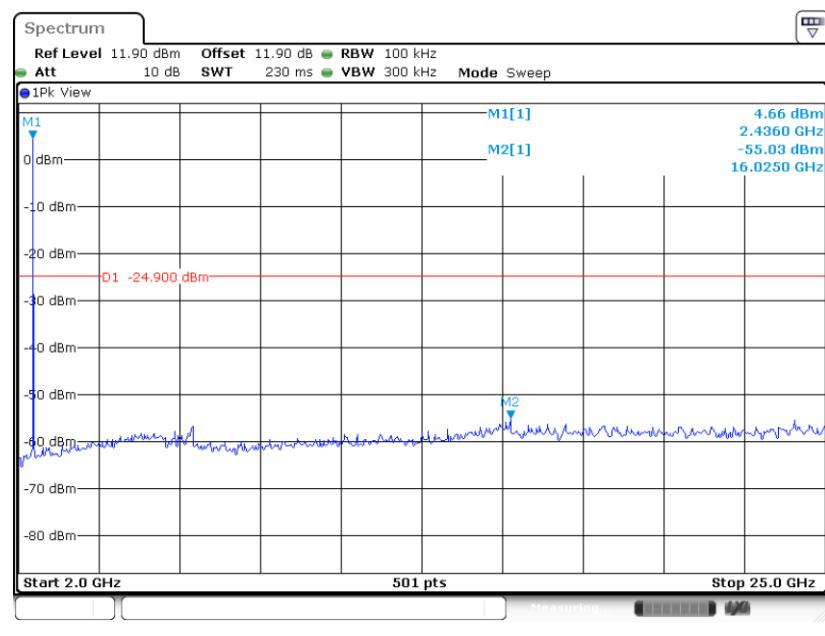




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

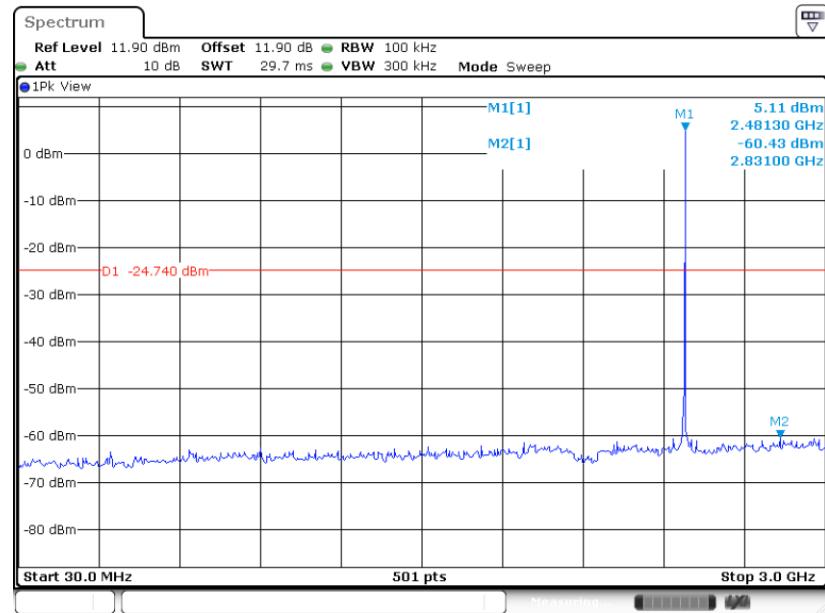

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

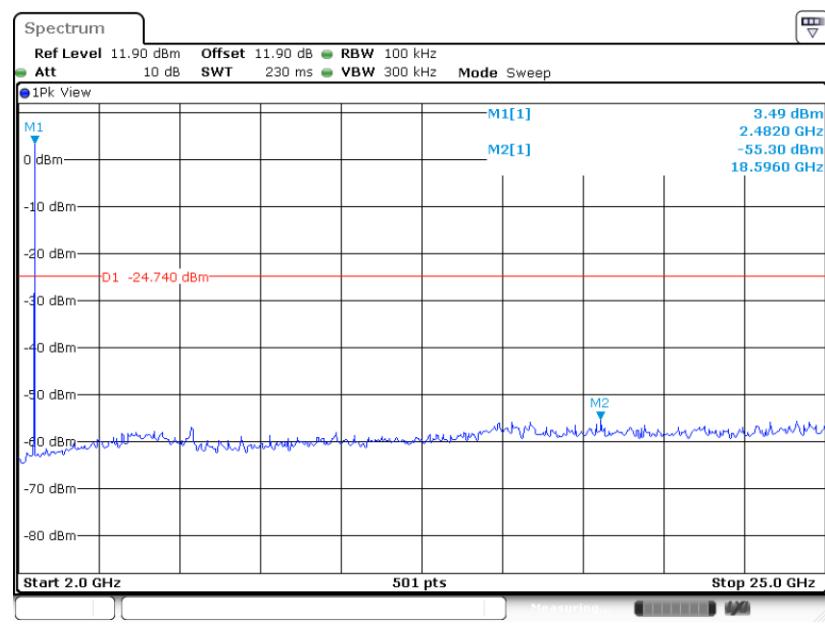



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.



3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

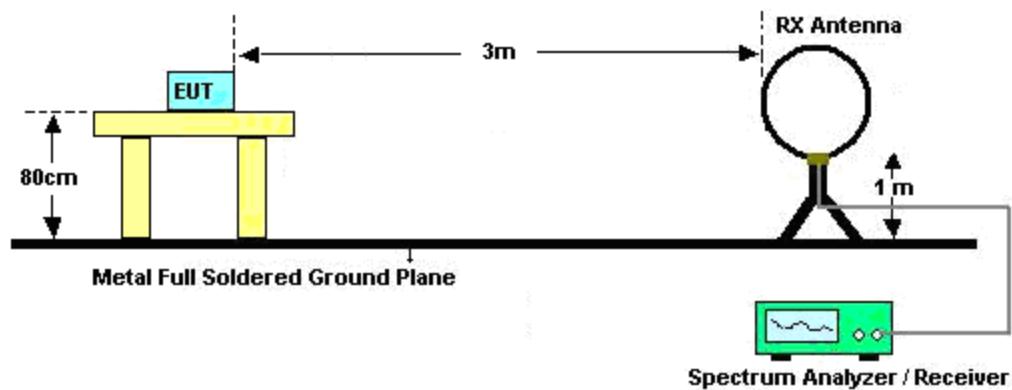


For radiated test from 30MHz to 1GHz

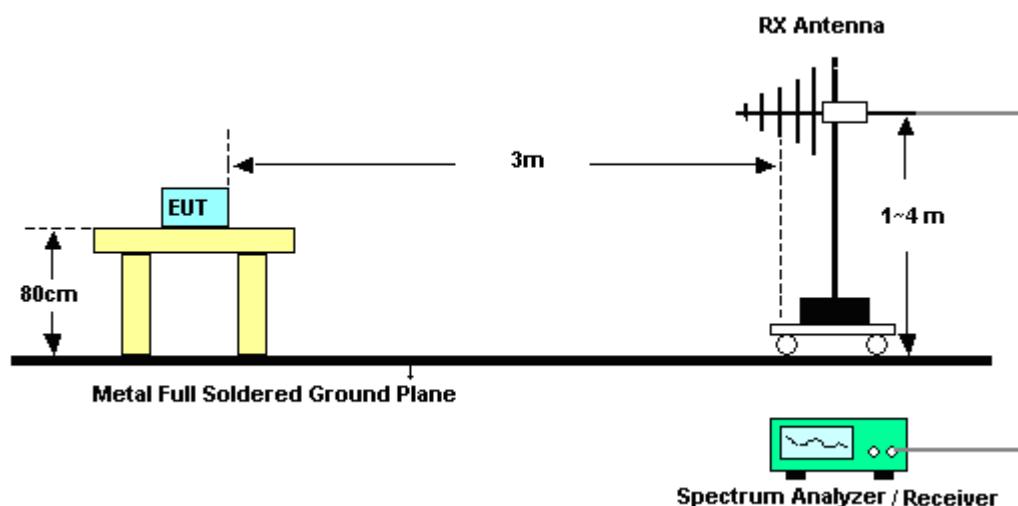

For radiated test from 1GHz to 18GHz

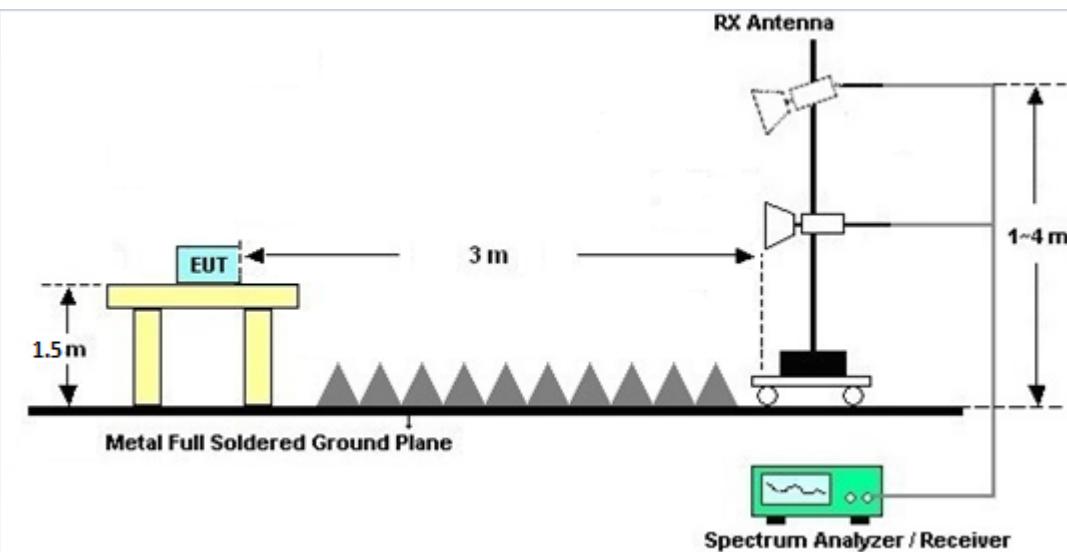

For radiated test above 18GHz

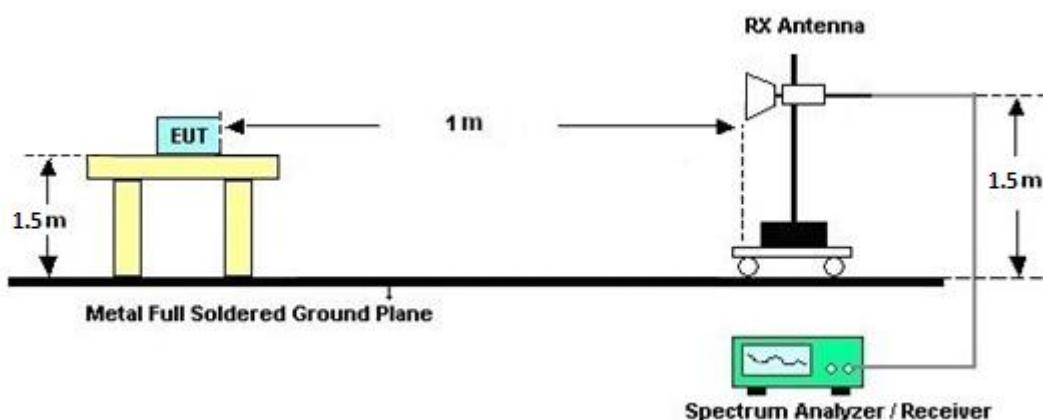



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

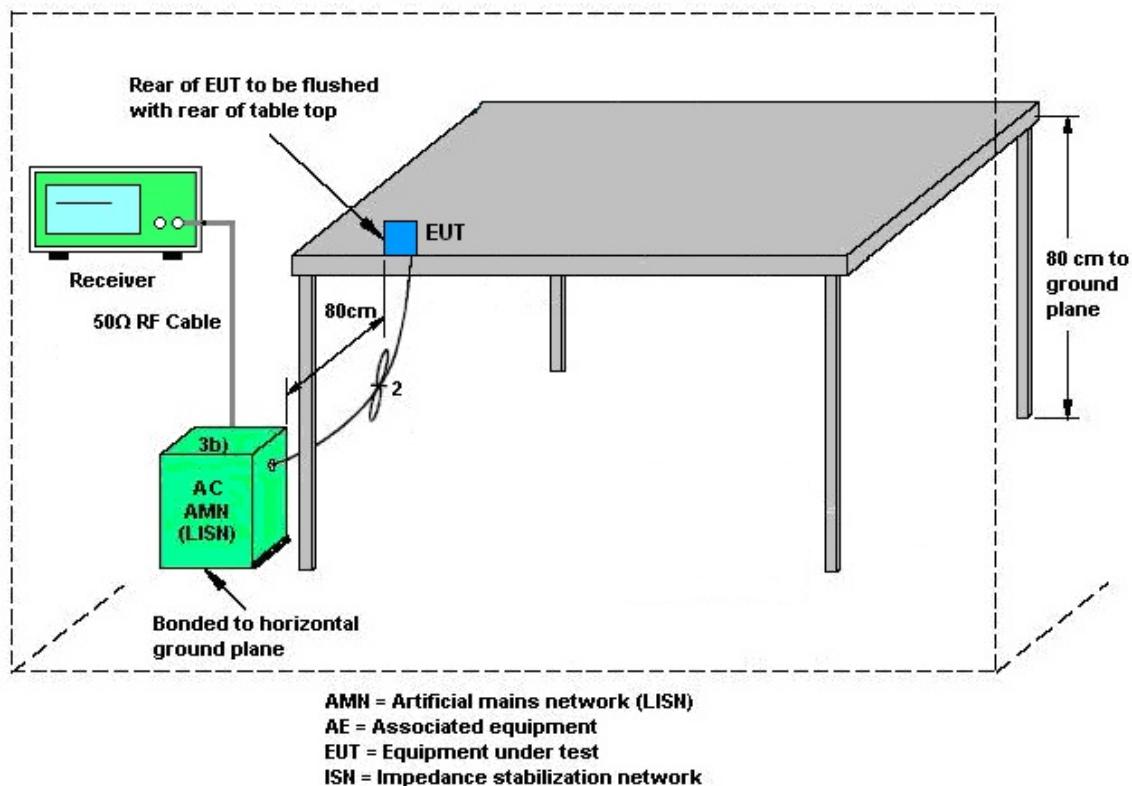

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 29, 2020	Dec. 19, 2020~ Dec. 26, 2020	Apr. 28, 2021	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Dec. 19, 2020~ Dec. 26, 2020	Nov. 30, 2021	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz~18GHz	Apr. 23, 2020	Dec. 19, 2020~ Dec. 26, 2020	Apr. 22, 2021	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 19, 2020	Dec. 19, 2020~ Dec. 26, 2020	May 18, 2021	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A0236 2	1GHz~26.5GHz	Oct. 31, 2020	Dec. 19, 2020~ Dec. 26, 2020	Oct. 30, 2021	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY5235027 6	3Hz~44GHz	Jun. 09, 2020	Dec. 19, 2020~ Dec. 26, 2020	Jun. 08, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,8 01606/2	18GHz~40GHz	Feb. 25, 2020	Dec. 19, 2020~ Dec. 26, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9kHz~30MHz	Feb. 25, 2020	Dec. 19, 2020~ Dec. 26, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 25, 2020	Dec. 19, 2020~ Dec. 26, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 25, 2020	Dec. 19, 2020~ Dec. 26, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF7802083 68	Control Ant Mast	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB24 95	N/A	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MX E)	MY5329004 5	20MHz~8.4GHz	Jan. 18, 2020	Dec. 19, 2020~ Dec. 26, 2020	Jan. 17, 2021	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Dec. 19, 2020~ Dec. 26, 2020	Jul. 13, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170 251	BBHA9170 251	18GHz~40GHz	Dec. 02, 2020	Dec. 19, 2020~ Dec. 26, 2020	Dec. 01, 2021	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	N/A	Dec. 19, 2020~ Dec. 26, 2020	N/A	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Dec. 15, 2020~Dec. 24, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO11	10MHz~6GHz	Dec. 30, 2019	Dec. 15, 2020~Dec. 24, 2020	Dec. 29, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Dec. 15, 2020~Dec. 24, 2020	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Dec. 15, 2020~Dec. 24, 2020	Mar. 16, 2021	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 10, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Dec. 10, 2020	Sep. 10, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Dec. 10, 2020	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Dec. 10, 2020	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 10, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Dec. 10, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Dec. 10, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	4.7
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kathy Chen				Temperature:	21.3~23.4		°C
Test Date:	2020/12/15~2020/12/24				Relative Humidity:	54.6~57.3		%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.013	0.694	0.50	Pass
BLE	1Mbps	1	19	2440	1.013	0.690	0.50	Pass
BLE	1Mbps	1	39	2480	1.011	0.688	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.50	30.00	0.00	6.50	36.00	Pass
BLE	1Mbps	1	19	2440	6.40	30.00	0.00	6.40	36.00	Pass
BLE	1Mbps	1	39	2480	6.60	30.00	0.00	6.60	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.14	-9.48	0.00	8.00	Pass
BLE	1Mbps	1	19	2440	5.10	-9.47	0.00	8.00	Pass
BLE	1Mbps	1	39	2480	5.26	-9.27	0.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	24~26°C
		Relative Humidity :	42~50%

EUT Information

Report NO : 000710-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

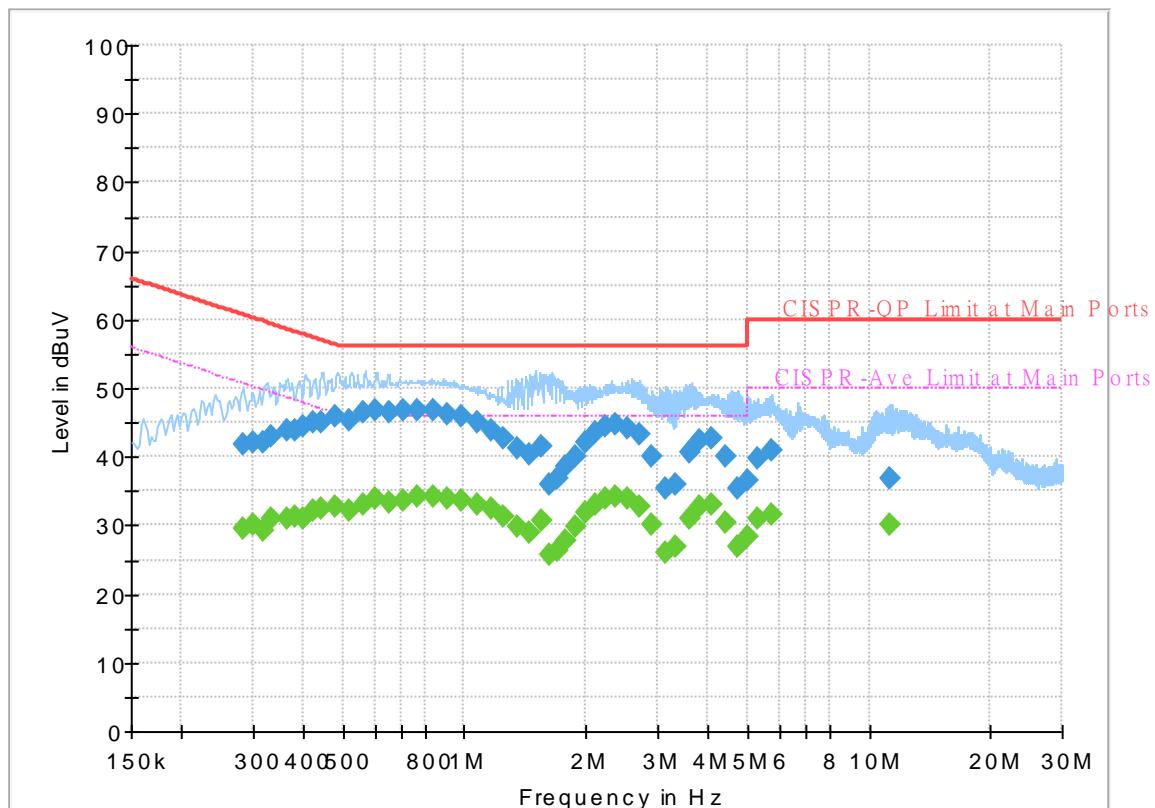

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.282750	---	29.40	50.74	21.34	L1	OFF	19.5
0.282750	41.68	---	60.74	19.06	L1	OFF	19.5
0.300120	---	30.09	50.24	20.15	L1	OFF	19.5
0.300120	42.24	---	60.24	18.00	L1	OFF	19.5
0.318300	---	29.21	49.75	20.54	L1	OFF	19.5
0.318300	42.17	---	59.75	17.58	L1	OFF	19.5
0.332250	---	30.92	49.40	18.48	L1	OFF	19.5
0.332250	42.87	---	59.40	16.53	L1	OFF	19.5
0.366000	---	31.11	48.59	17.48	L1	OFF	19.5
0.366000	43.77	---	58.59	14.82	L1	OFF	19.5
0.384000	---	31.32	48.19	16.87	L1	OFF	19.5
0.384000	43.90	---	58.19	14.29	L1	OFF	19.5
0.397500	---	30.90	47.91	17.01	L1	OFF	19.5
0.397500	44.34	---	57.91	13.57	L1	OFF	19.5
0.422250	---	32.30	47.40	15.10	L1	OFF	19.5
0.422250	45.14	---	57.40	12.26	L1	OFF	19.5
0.444570	---	32.33	46.98	14.65	L1	OFF	19.5
0.444570	45.06	---	56.98	11.92	L1	OFF	19.5
0.479490	---	32.83	46.35	13.52	L1	OFF	19.5
0.479490	45.85	---	56.35	10.50	L1	OFF	19.5
0.519000	---	32.25	46.00	13.75	L1	OFF	19.5


0.519000	45.46	---	56.00	10.54	L1	OFF	19.5
0.564180	---	33.18	46.00	12.82	L1	OFF	19.6
0.564180	46.39	---	56.00	9.61	L1	OFF	19.6
0.602250	---	33.86	46.00	12.14	L1	OFF	19.6
0.602250	46.76	---	56.00	9.24	L1	OFF	19.6
0.652830	---	33.47	46.00	12.53	L1	OFF	19.6
0.652830	46.46	---	56.00	9.54	L1	OFF	19.6
0.708540	---	33.72	46.00	12.28	L1	OFF	19.6
0.708540	46.65	---	56.00	9.35	L1	OFF	19.6
0.768750	---	34.12	46.00	11.88	L1	OFF	19.6
0.768750	46.80	---	56.00	9.20	L1	OFF	19.6
0.838500	---	34.12	46.00	11.88	L1	OFF	19.6
0.838500	46.66	---	56.00	9.34	L1	OFF	19.6
0.912750	---	33.84	46.00	12.16	L1	OFF	19.6
0.912750	46.27	---	56.00	9.73	L1	OFF	19.6
0.980250	---	33.74	46.00	12.26	L1	OFF	19.6
0.980250	45.92	---	56.00	10.08	L1	OFF	19.6
1.077000	---	33.17	46.00	12.83	L1	OFF	19.6
1.077000	44.98	---	56.00	11.02	L1	OFF	19.6
1.172040	---	32.33	46.00	13.67	L1	OFF	19.6
1.172040	43.78	---	56.00	12.22	L1	OFF	19.6
1.243500	---	31.15	46.00	14.85	L1	OFF	19.6
1.243500	42.55	---	56.00	13.45	L1	OFF	19.6
1.348980	---	29.77	46.00	16.23	L1	OFF	19.6
1.348980	41.26	---	56.00	14.74	L1	OFF	19.6
1.448700	---	28.90	46.00	17.10	L1	OFF	19.6
1.448700	40.32	---	56.00	15.68	L1	OFF	19.6
1.544730	---	30.84	46.00	15.16	L1	OFF	19.6
1.544730	41.62	---	56.00	14.38	L1	OFF	19.6
1.620420	---	25.82	46.00	20.18	L1	OFF	19.6
1.620420	35.94	---	56.00	20.06	L1	OFF	19.6
1.703220	---	26.22	46.00	19.78	L1	OFF	19.7
1.703220	36.78	---	56.00	19.22	L1	OFF	19.7
1.781430	---	27.88	46.00	18.12	L1	OFF	19.7
1.781430	38.55	---	56.00	17.45	L1	OFF	19.7
1.880250	---	29.96	46.00	16.04	L1	OFF	19.7
1.880250	40.05	---	56.00	15.95	L1	OFF	19.7
1.996440	---	31.99	46.00	14.01	L1	OFF	19.7
1.996440	42.23	---	56.00	13.77	L1	OFF	19.7
2.114250	---	33.01	46.00	12.99	L1	OFF	19.7
2.114250	43.63	---	56.00	12.37	L1	OFF	19.7
2.225040	---	33.78	46.00	12.22	L1	OFF	19.7
2.225040	44.42	---	56.00	11.58	L1	OFF	19.7
2.361750	---	34.18	46.00	11.82	L1	OFF	19.7
2.361750	44.76	---	56.00	11.24	L1	OFF	19.7
2.532750	---	33.81	46.00	12.19	L1	OFF	19.7
2.532750	44.20	---	56.00	11.80	L1	OFF	19.7
2.701860	---	32.77	46.00	13.23	L1	OFF	19.7
2.701860	43.14	---	56.00	12.86	L1	OFF	19.7
2.912910	---	30.09	46.00	15.91	L1	OFF	19.7
2.912910	39.95	---	56.00	16.05	L1	OFF	19.7
3.153390	---	25.95	46.00	20.05	L1	OFF	19.7
3.153390	35.39	---	56.00	20.61	L1	OFF	19.7
3.338790	---	27.00	46.00	19.00	L1	OFF	19.7
3.338790	36.07	---	56.00	19.93	L1	OFF	19.7
3.587010	---	31.05	46.00	14.95	L1	OFF	19.7
3.587010	40.67	---	56.00	15.33	L1	OFF	19.7
3.822270	---	32.71	46.00	13.29	L1	OFF	19.7
3.822270	42.50	---	56.00	13.50	L1	OFF	19.7
4.103970	---	32.95	46.00	13.05	L1	OFF	19.7
4.103970	42.67	---	56.00	13.33	L1	OFF	19.7
4.427250	---	30.51	46.00	15.49	L1	OFF	19.7
4.427250	40.05	---	56.00	15.95	L1	OFF	19.7
4.713720	---	26.94	46.00	19.06	L1	OFF	19.8
4.713720	35.31	---	56.00	20.69	L1	OFF	19.8
5.025750	---	28.33	50.00	21.67	L1	OFF	19.8
5.025750	36.61	---	60.00	23.39	L1	OFF	19.8
5.286390	---	30.90	50.00	19.10	L1	OFF	19.8
5.286390	39.82	---	60.00	20.18	L1	OFF	19.8
5.716500	---	31.61	50.00	18.39	L1	OFF	19.8
5.716500	40.83	---	60.00	19.17	L1	OFF	19.8

11.320080	---	30.22	50.00	19.78	L1	OFF	20.1
11.320080	36.75	---	60.00	23.25	L1	OFF	20.1

EUT Information

Report NO : 000710-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

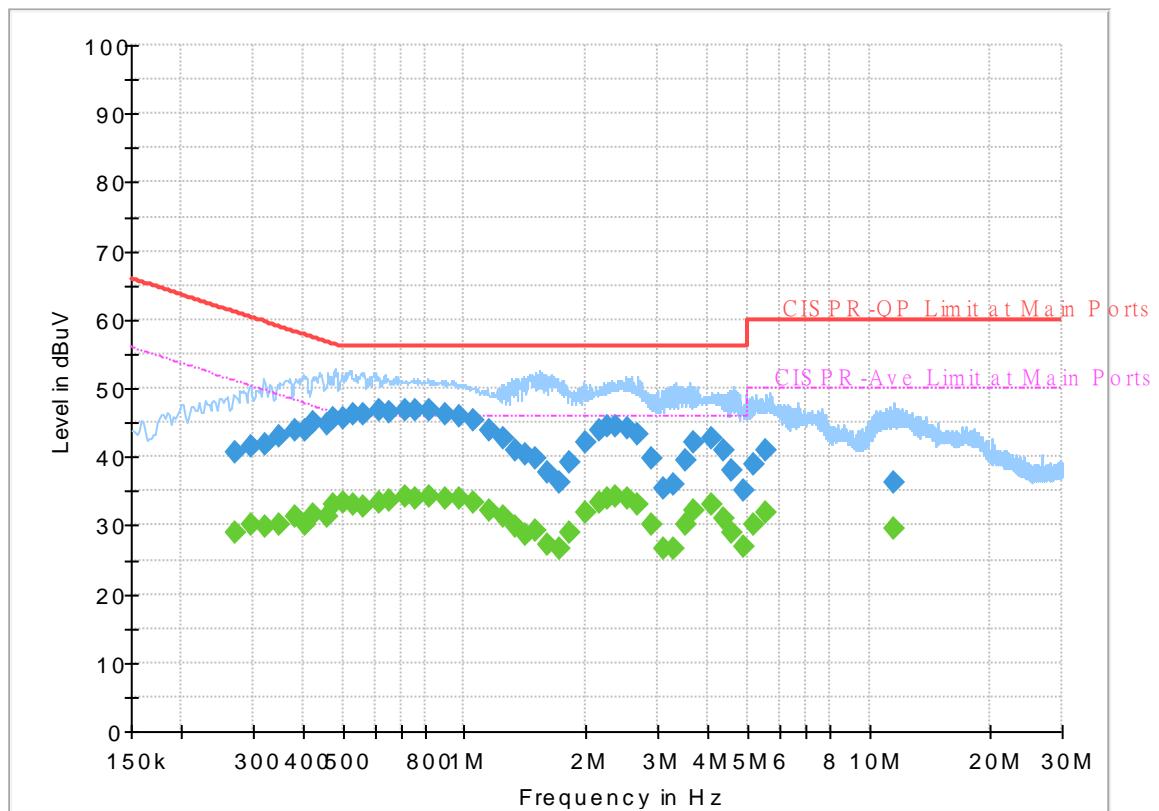

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.271050	---	29.06	51.09	22.03	N	OFF	19.6
0.271050	40.63	---	61.09	20.46	N	OFF	19.6
0.296250	---	30.00	50.35	20.35	N	OFF	19.6
0.296250	41.61	---	60.35	18.74	N	OFF	19.6
0.323250	---	29.74	49.62	19.88	N	OFF	19.6
0.323250	41.82	---	59.62	17.80	N	OFF	19.6
0.350250	---	29.98	48.96	18.98	N	OFF	19.6
0.350250	42.87	---	58.96	16.09	N	OFF	19.6
0.383460	---	31.28	48.20	16.92	N	OFF	19.6
0.383460	43.73	---	58.20	14.47	N	OFF	19.6
0.402090	---	30.23	47.81	17.58	N	OFF	19.6
0.402090	43.98	---	57.81	13.83	N	OFF	19.6
0.424500	---	31.53	47.36	15.83	N	OFF	19.6
0.424500	44.97	---	57.36	12.39	N	OFF	19.6
0.456000	---	31.39	46.77	15.38	N	OFF	19.6
0.456000	44.84	---	56.77	11.93	N	OFF	19.6
0.474000	---	32.94	46.44	13.50	N	OFF	19.6
0.474000	45.73	---	56.44	10.71	N	OFF	19.6
0.501000	---	33.29	46.00	12.71	N	OFF	19.6
0.501000	45.67	---	56.00	10.33	N	OFF	19.6
0.532500	---	33.08	46.00	12.92	N	OFF	19.6

0.532500	46.14	---	56.00	9.86	N	OFF	19.6
0.559500	---	32.87	46.00	13.13	N	OFF	19.6
0.559500	46.12	---	56.00	9.88	N	OFF	19.6
0.615750	---	33.26	46.00	12.74	N	OFF	19.6
0.615750	46.68	---	56.00	9.32	N	OFF	19.6
0.653100	---	33.75	46.00	12.25	N	OFF	19.6
0.653100	46.50	---	56.00	9.50	N	OFF	19.6
0.712500	---	34.08	46.00	11.92	N	OFF	19.6
0.712500	46.79	---	56.00	9.21	N	OFF	19.6
0.752370	---	33.89	46.00	12.11	N	OFF	19.6
0.752370	46.65	---	56.00	9.35	N	OFF	19.6
0.817530	---	34.32	46.00	11.68	N	OFF	19.6
0.817530	46.89	---	56.00	9.11	N	OFF	19.6
0.892410	---	33.95	46.00	12.05	N	OFF	19.6
0.892410	46.23	---	56.00	9.77	N	OFF	19.6
0.971250	---	33.90	46.00	12.10	N	OFF	19.6
0.971250	46.01	---	56.00	9.99	N	OFF	19.6
1.058370	---	33.25	46.00	12.75	N	OFF	19.6
1.058370	45.21	---	56.00	10.79	N	OFF	19.6
1.159440	---	32.29	46.00	13.71	N	OFF	19.6
1.159440	43.84	---	56.00	12.16	N	OFF	19.6
1.248000	---	31.16	46.00	14.84	N	OFF	19.6
1.248000	42.59	---	56.00	13.41	N	OFF	19.6
1.338450	---	29.84	46.00	16.16	N	OFF	19.6
1.338450	41.04	---	56.00	14.96	N	OFF	19.6
1.412250	---	28.71	46.00	17.29	N	OFF	19.6
1.412250	40.35	---	56.00	15.65	N	OFF	19.6
1.495500	---	29.29	46.00	16.71	N	OFF	19.7
1.495500	39.89	---	56.00	16.11	N	OFF	19.7
1.601250	---	27.09	46.00	18.91	N	OFF	19.7
1.601250	37.76	---	56.00	18.24	N	OFF	19.7
1.716360	---	26.47	46.00	19.53	N	OFF	19.7
1.716360	36.13	---	56.00	19.87	N	OFF	19.7
1.827960	---	28.96	46.00	17.04	N	OFF	19.7
1.827960	39.17	---	56.00	16.83	N	OFF	19.7
1.997250	---	31.97	46.00	14.03	N	OFF	19.7
1.997250	42.11	---	56.00	13.89	N	OFF	19.7
2.150250	---	33.31	46.00	12.69	N	OFF	19.7
2.150250	43.86	---	56.00	12.14	N	OFF	19.7
2.267250	---	34.02	46.00	11.98	N	OFF	19.7
2.267250	44.51	---	56.00	11.49	N	OFF	19.7
2.375250	---	34.08	46.00	11.92	N	OFF	19.7
2.375250	44.58	---	56.00	11.42	N	OFF	19.7
2.532390	---	33.89	46.00	12.11	N	OFF	19.7
2.532390	44.22	---	56.00	11.78	N	OFF	19.7
2.665500	---	33.06	46.00	12.94	N	OFF	19.7
2.665500	43.18	---	56.00	12.82	N	OFF	19.7
2.911920	---	30.02	46.00	15.98	N	OFF	19.7
2.911920	39.91	---	56.00	16.09	N	OFF	19.7
3.106500	---	26.61	46.00	19.39	N	OFF	19.7
3.106500	35.50	---	56.00	20.50	N	OFF	19.7
3.293250	---	26.48	46.00	19.52	N	OFF	19.7
3.293250	35.97	---	56.00	20.03	N	OFF	19.7
3.520500	---	30.03	46.00	15.97	N	OFF	19.7
3.520500	39.47	---	56.00	16.53	N	OFF	19.7
3.700500	---	32.17	46.00	13.83	N	OFF	19.7
3.700500	42.00	---	56.00	14.00	N	OFF	19.7
4.069500	---	33.00	46.00	13.00	N	OFF	19.7
4.069500	42.65	---	56.00	13.35	N	OFF	19.7
4.366500	---	31.13	46.00	14.87	N	OFF	19.8
4.366500	40.84	---	56.00	15.16	N	OFF	19.8
4.555500	---	28.93	46.00	17.07	N	OFF	19.8
4.555500	38.06	---	56.00	17.94	N	OFF	19.8
4.884000	---	26.86	46.00	19.14	N	OFF	19.8
4.884000	34.98	---	56.00	21.02	N	OFF	19.8
5.180640	---	30.01	50.00	19.99	N	OFF	19.8
5.180640	38.84	---	60.00	21.16	N	OFF	19.8
5.563500	---	31.90	50.00	18.10	N	OFF	19.8
5.563500	41.01	---	60.00	18.99	N	OFF	19.8
11.521860	---	29.52	50.00	20.48	N	OFF	20.1
11.521860	36.33	---	60.00	23.67	N	OFF	20.1



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu and James Chiu	Temperature :	23~25°C
		Relative Humidity :	51~58%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2387.91	53.01	-20.99	74	38.51	31.9	18.01	35.41	319	340	P	H
		2374.89	43.55	-10.45	54	29.11	31.87	17.98	35.41	319	340	A	H
	*	2402	96.75	-	-	82.24	31.9	18.03	35.42	319	340	P	H
	*	2402	96.27	-	-	81.76	31.9	18.03	35.42	319	340	A	H
		2376.15	52.6	-21.4	74	38.15	31.87	17.99	35.41	197	88	P	V
		2356.935	43.73	-10.27	54	29.36	31.83	17.94	35.4	197	88	A	V
	*	2402	95.38	-	-	80.87	31.9	18.03	35.42	197	88	P	V
	*	2402	94.73	-	-	80.22	31.9	18.03	35.42	197	88	A	V
BLE CH 19 2440MHz		2364.74	52.37	-21.63	74	37.99	31.83	17.96	35.41	395	340	P	H
		2373.98	43.65	-10.35	54	29.22	31.87	17.97	35.41	395	340	A	H
	*	2440	97.12	-	-	82.28	32.2	18.07	35.43	395	340	P	H
	*	2440	96.53	-	-	81.69	32.2	18.07	35.43	395	340	A	H
		2495.31	52.82	-21.18	74	37.55	32.6	18.13	35.46	395	340	P	H
		2483.83	44.51	-9.49	54	29.38	32.47	18.11	35.45	395	340	A	H
		2357.74	52	-22	74	37.62	31.83	17.95	35.4	195	86	P	V
		2351.16	43.75	-10.25	54	29.42	31.8	17.93	35.4	195	86	A	V
	*	2440	95.69	-	-	80.85	32.2	18.07	35.43	195	86	P	V
	*	2440	95.07	-	-	80.23	32.2	18.07	35.43	195	86	A	V
		2493.91	53.43	-20.57	74	38.16	32.6	18.13	35.46	195	86	P	V
		2496.08	44.38	-9.62	54	29.11	32.6	18.13	35.46	195	86	A	V



BLE CH 39 2480MHz	*	2480	97.69	-	-	82.55	32.47	18.12	35.45	336	332	P	H
	*	2480	97.18	-	-	82.04	32.47	18.12	35.45	336	332	A	H
		2496.52	54.35	-19.65	74	39.08	32.6	18.13	35.46	336	332	P	H
		2484.04	45.39	-8.61	54	30.26	32.47	18.11	35.45	336	332	A	H
	*	2480	96.84	-	-	81.7	32.47	18.12	35.45	100	244	P	V
	*	2480	96.12	-	-	80.98	32.47	18.12	35.45	100	244	A	V
		2488.12	53.98	-20.02	74	38.71	32.6	18.12	35.45	100	244	P	V
		2498.16	45.32	-8.68	54	30.05	32.6	18.13	35.46	100	244	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	38.91	-35.09	74	52.03	34	11.82	58.94	100	0	P	H
		4804	39.65	-34.35	74	52.77	34	11.82	58.94	100	0	P	V
BLE CH 19 2440MHz		4880	39.05	-34.95	74	51.68	34.1	12.02	58.75	100	0	P	H
		7320	40.31	-33.69	74	47.71	35.6	14.48	57.48	100	0	P	H
		4880	39.12	-34.88	74	51.75	34.1	12.02	58.75	100	0	P	V
		7320	40.39	-33.61	74	47.79	35.6	14.48	57.48	100	0	P	V
BLE CH 39 2480MHz		4960	39.63	-34.37	74	51.74	34.2	12.24	58.55	100	0	P	H
		7440	40.5	-33.5	74	47.87	35.6	14.62	57.59	100	0	P	H
		4960	39.24	-34.76	74	51.35	34.2	12.24	58.55	100	0	P	V
		7440	39.91	-34.09	74	47.28	35.6	14.62	57.59	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		21619	35.57	-38.43	74	46.08	38.34	5.85	54.7	150	0	P	H
		21668	35.39	-38.61	74	45.81	38.42	5.86	54.7	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		30.27	27.31	-12.69	40	32.03	24.32	0.97	30.01	-	-	P	H	
		46.74	27.2	-12.8	40	39.99	15.96	1.24	29.99	-	-	P	H	
		136.92	29.86	-13.64	43.5	40.25	17.47	2.1	29.96	-	-	P	H	
		735.4	29.9	-16.1	46	27.27	27.4	4.82	29.59	-	-	P	H	
		859.3	32.48	-13.52	46	27.51	28.89	5.26	29.18	-	-	P	H	
		958	33.6	-12.4	46	26.16	30.44	5.65	28.65	100	0	P	H	
		30.27	33.9	-6.1	40	38.62	24.32	0.97	30.01	100	0	P	V	
		47.01	31.27	-8.73	40	44.38	15.63	1.25	29.99	-	-	P	V	
		134.49	25.7	-17.8	43.5	36.03	17.55	2.08	29.96	-	-	P	V	
		769.7	30.58	-15.42	46	27.35	27.79	4.96	29.52	-	-	P	V	
		857.2	31.33	-14.67	46	26.41	28.87	5.24	29.19	-	-	P	V	
		951.7	34.11	-11.89	46	26.86	30.31	5.63	28.69	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
			Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dB μ V/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB μ V) – 35.86 (dB)

= 55.45 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 55.45(dB μ V/m) – 74(dB μ V/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB μ V) – 35.86 (dB)

= 43.54 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 43.54(dB μ V/m) – 54(dB μ V/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu and James Chiu	Temperature :	23~25°C
		Relative Humidity :	51~58%


Note symbol


-L	Low channel location
-R	High channel location




2.4GHz 2400~2483.5MHz



BLE (Band Edge @ 3m)

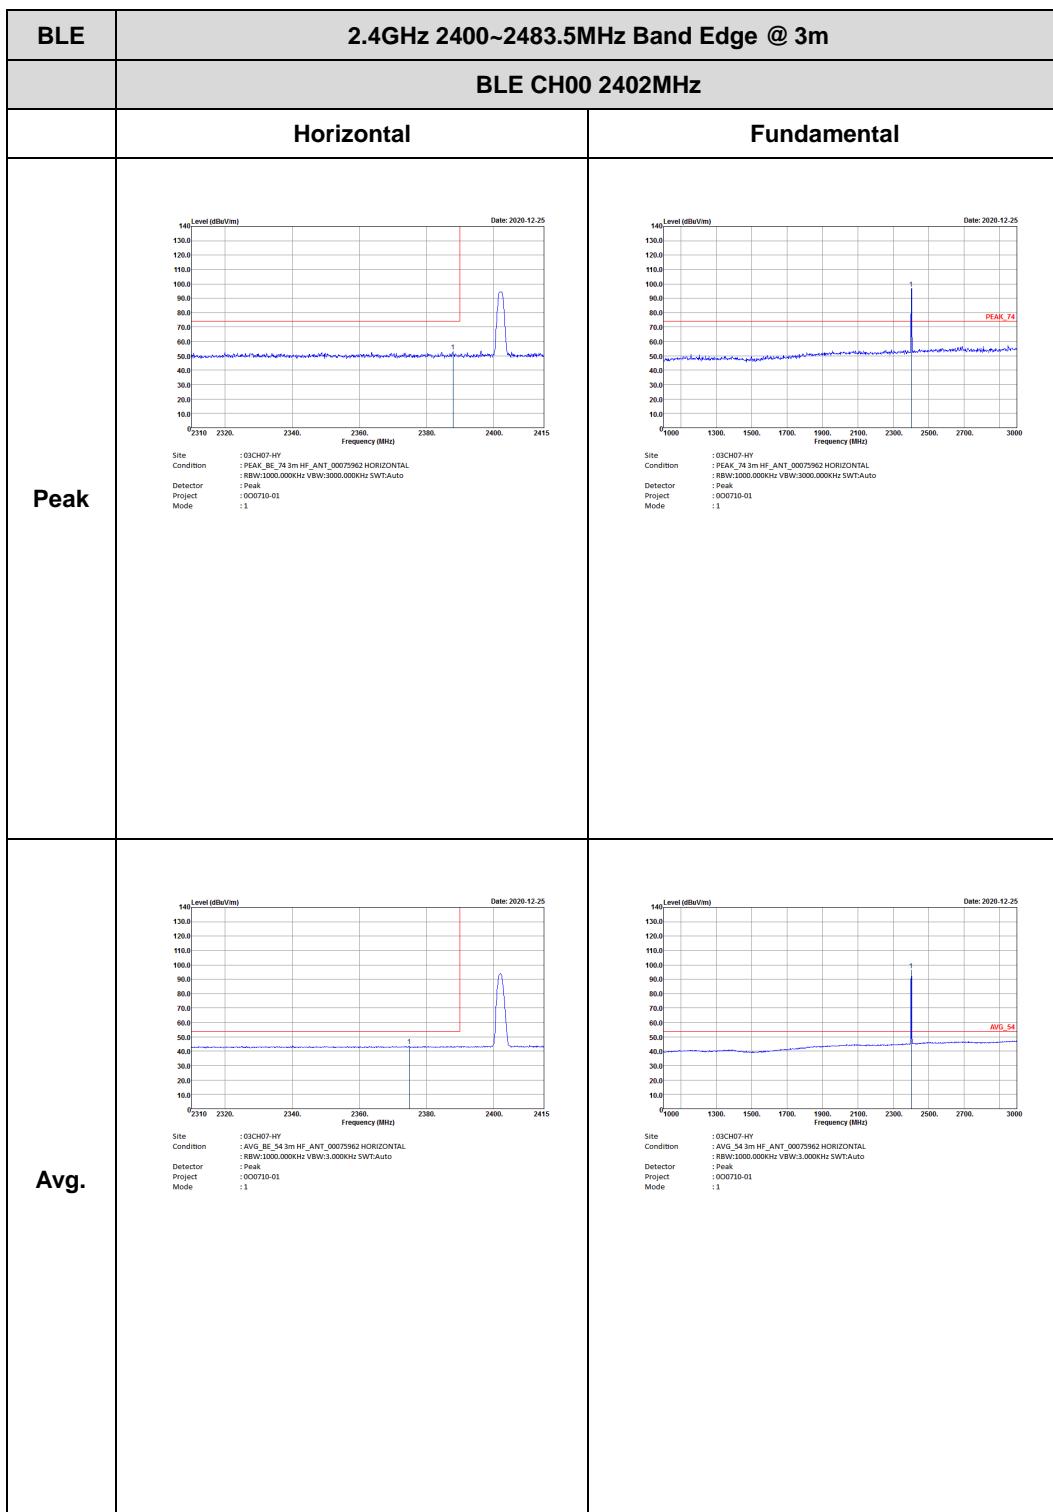


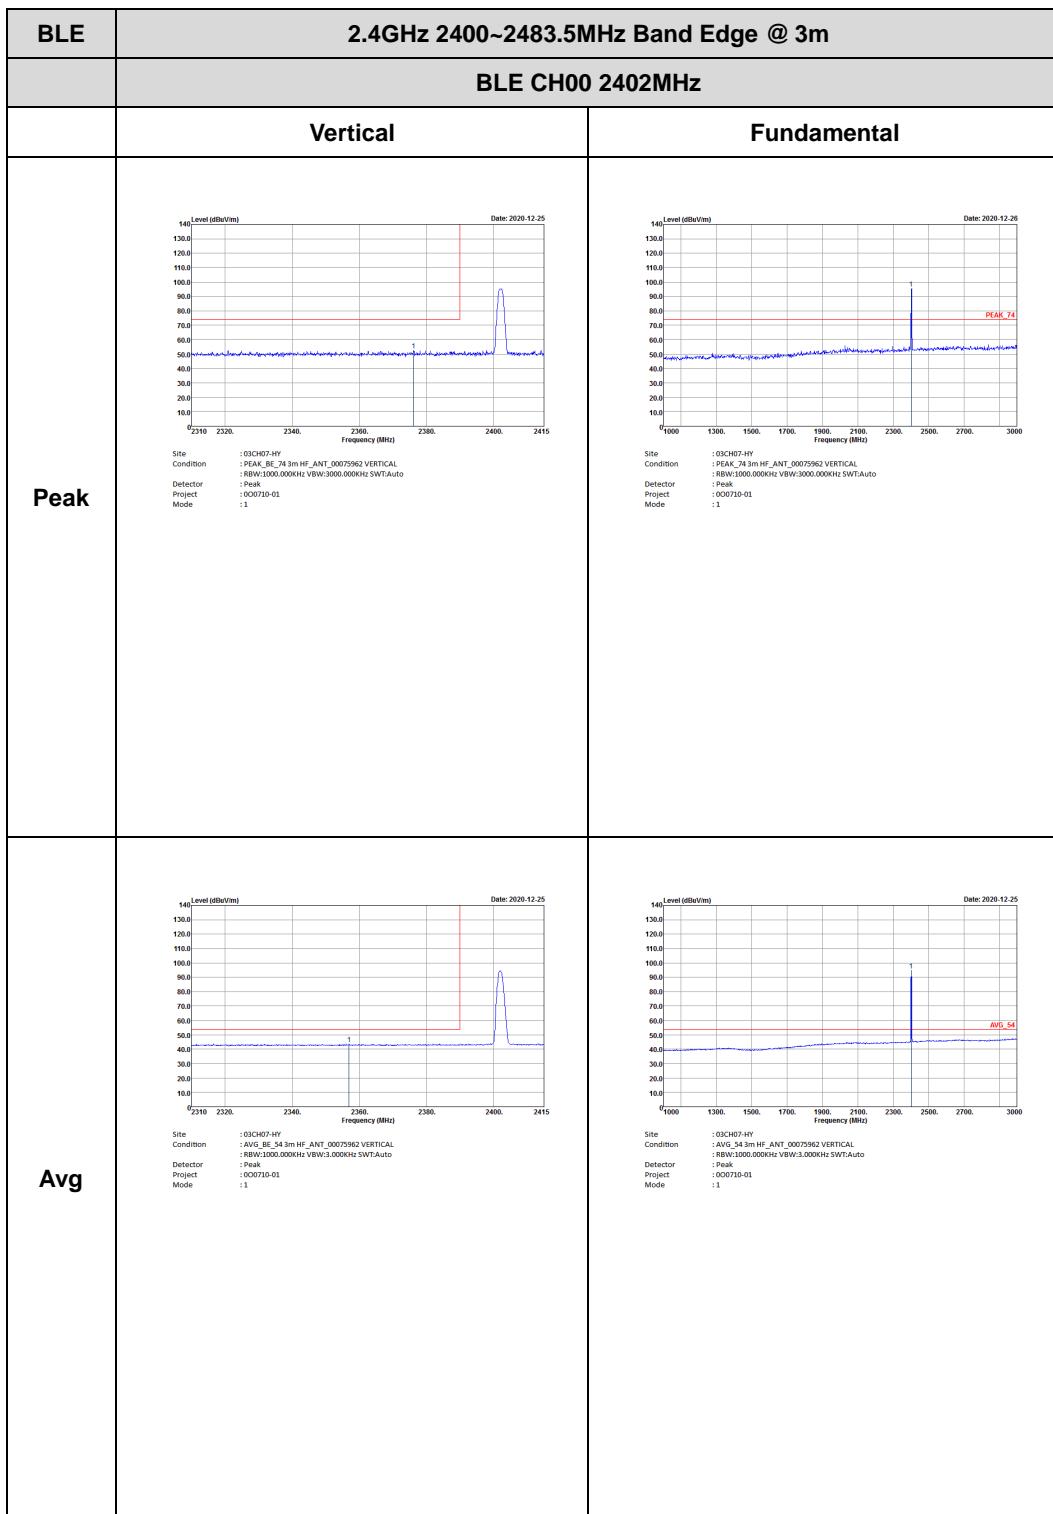


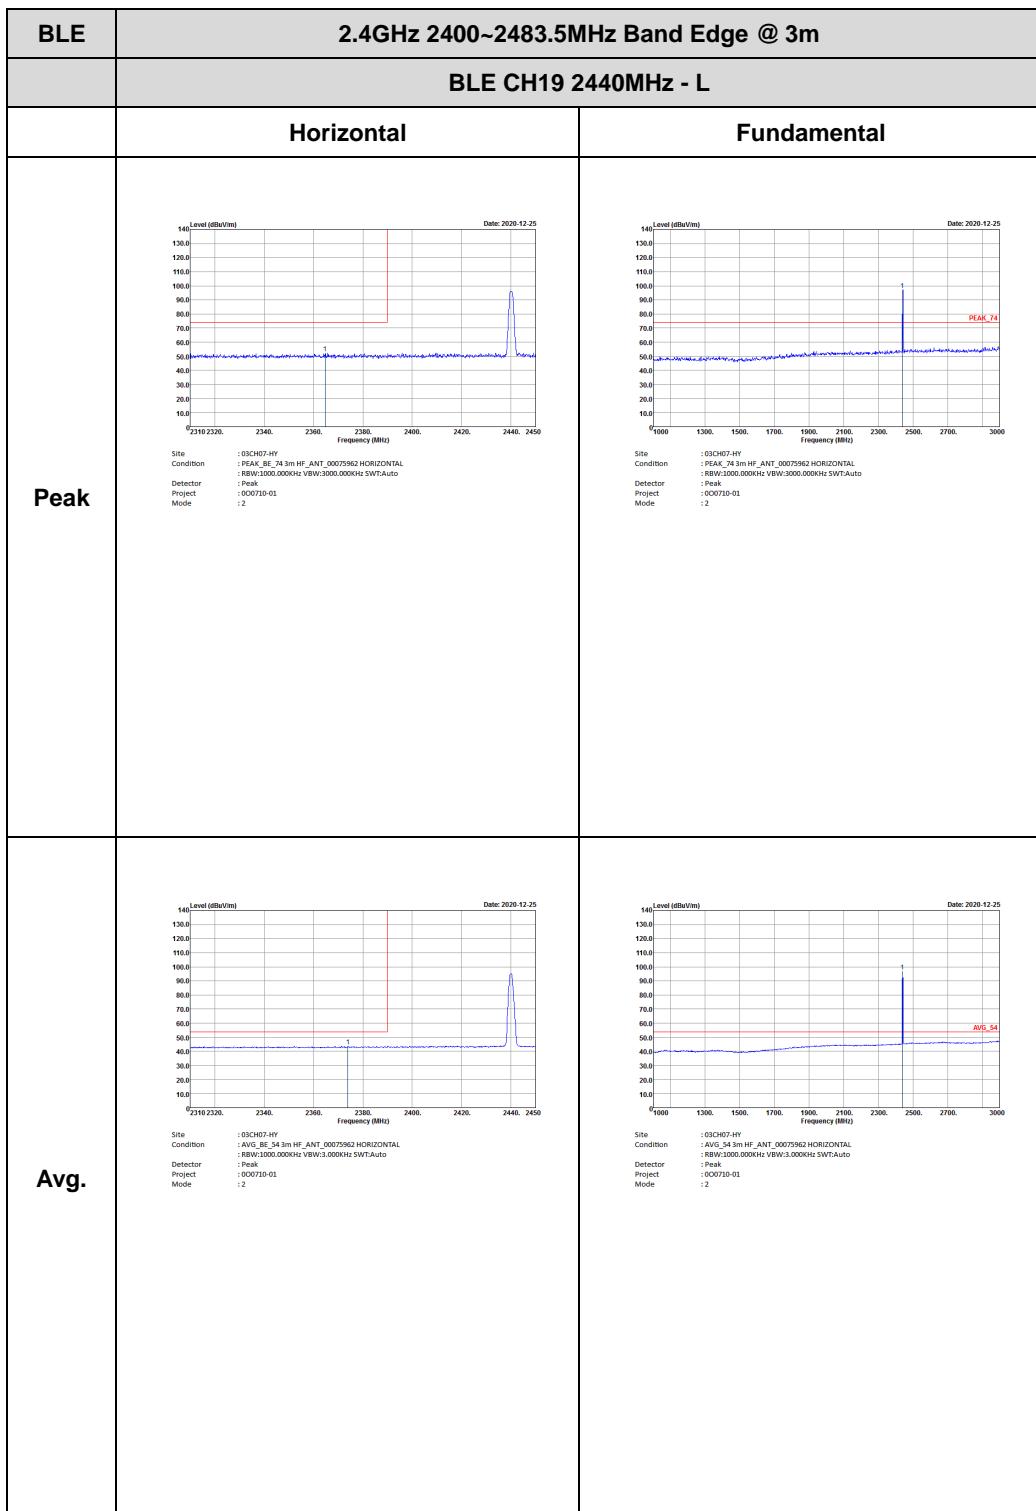


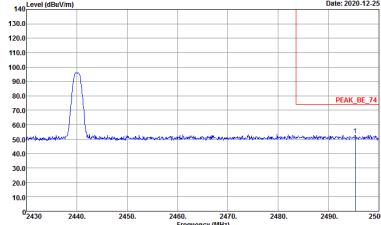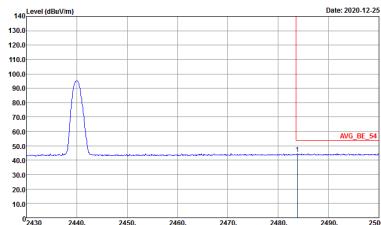



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 000710-01 Mode : 2</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54_3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 000710-01 Mode : 2</p>	Left blank

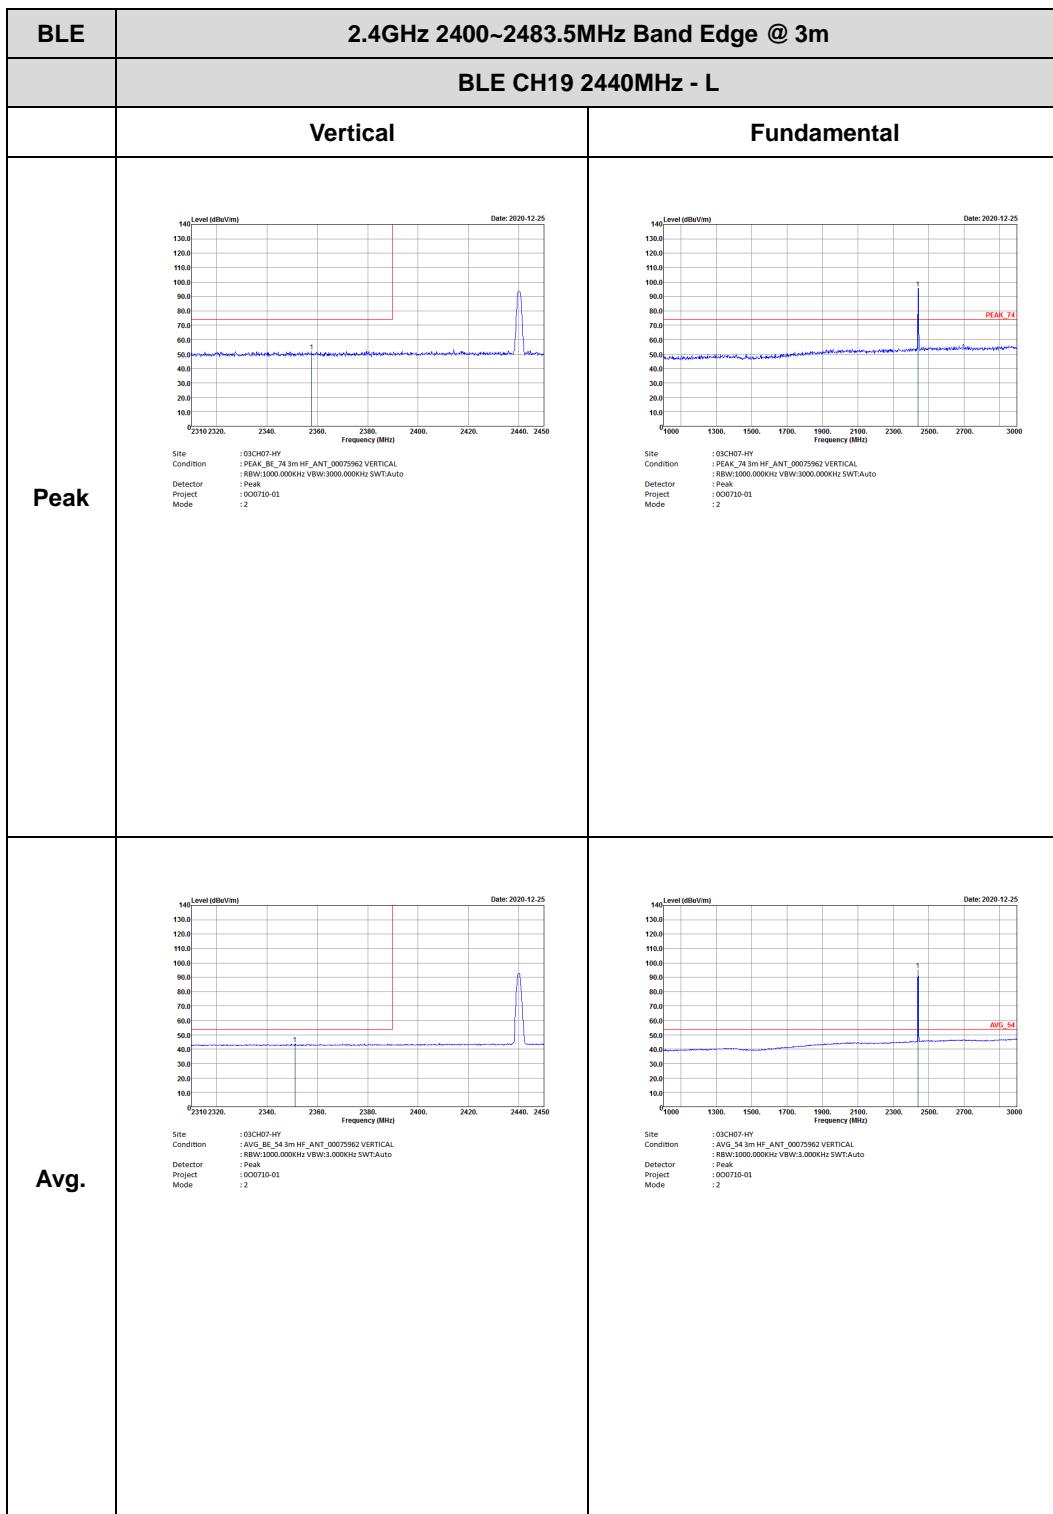

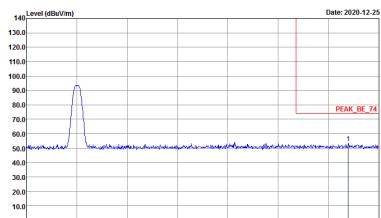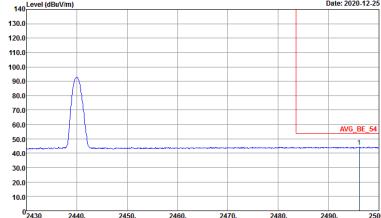

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m)</p> <p>Date: 2020-12-25</p> <p>140.0 130.0 120.0 110.0 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20.0 10.0 0.0</p> <p>2430 2440. 2450. 2460. 2470. 2480. 2490. 2500</p> <p>Frequency (MHz)</p> <p>Site: 03CH07-HY Condition: PEAK_BE_3m HF_ANT_0007592 VERTICAL Detector: R8W1000.000kHz VBW:3000.000kHz SWT:Auto Project: 000710-01 Mode: 2</p>	Left blank
Avg.	 <p>Level (dBuV/m)</p> <p>Date: 2020-12-25</p> <p>140.0 130.0 120.0 110.0 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20.0 10.0 0.0</p> <p>2430 2440. 2450. 2460. 2470. 2480. 2490. 2500</p> <p>Frequency (MHz)</p> <p>Site: 03CH07-HY Condition: AVG_BE_54m HF_ANT_0007592 VERTICAL Detector: R8W1000.000kHz VBW:3.000kHz SWT:Auto Project: 000710-01 Mode: 2</p>	Left blank

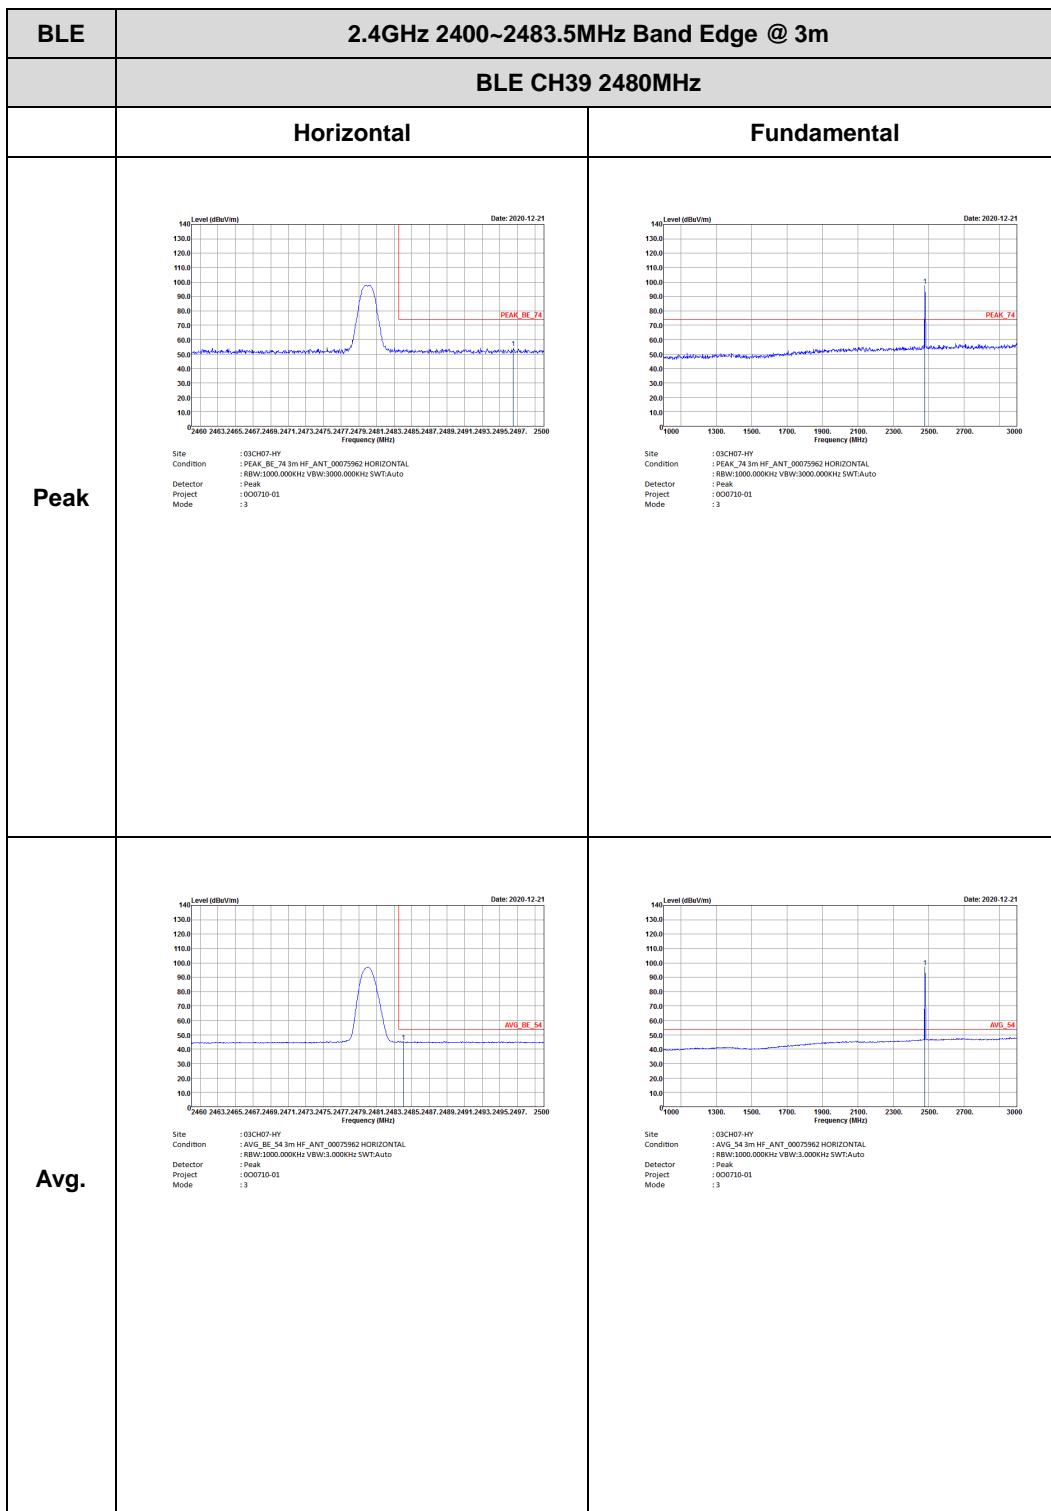


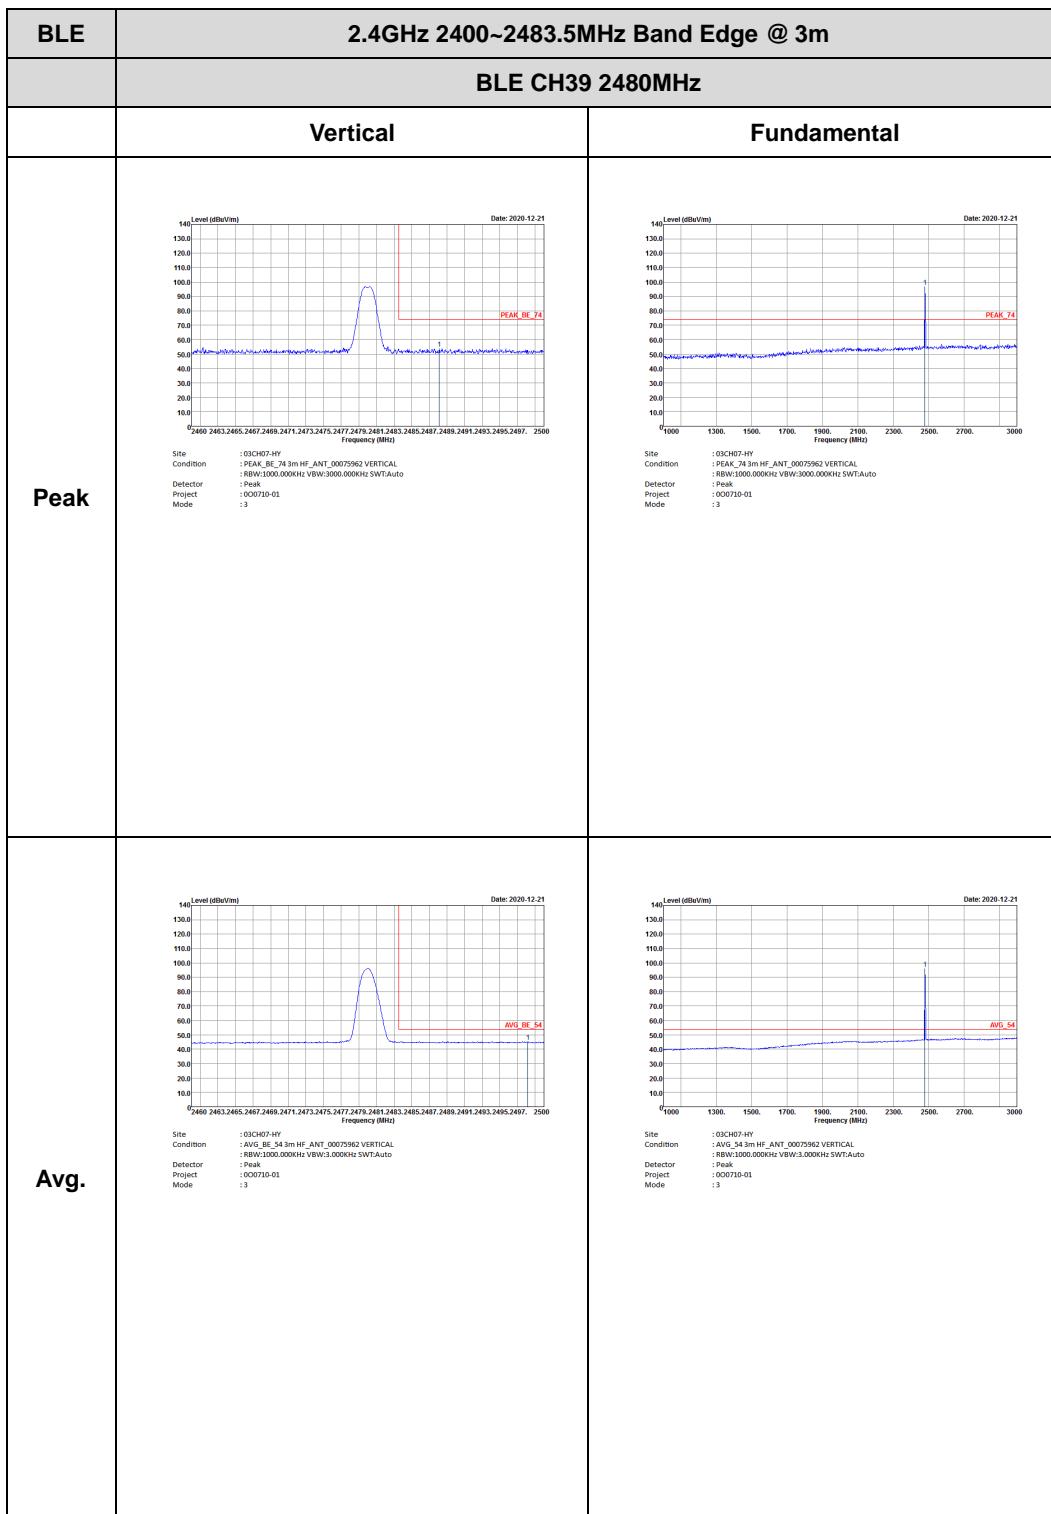





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

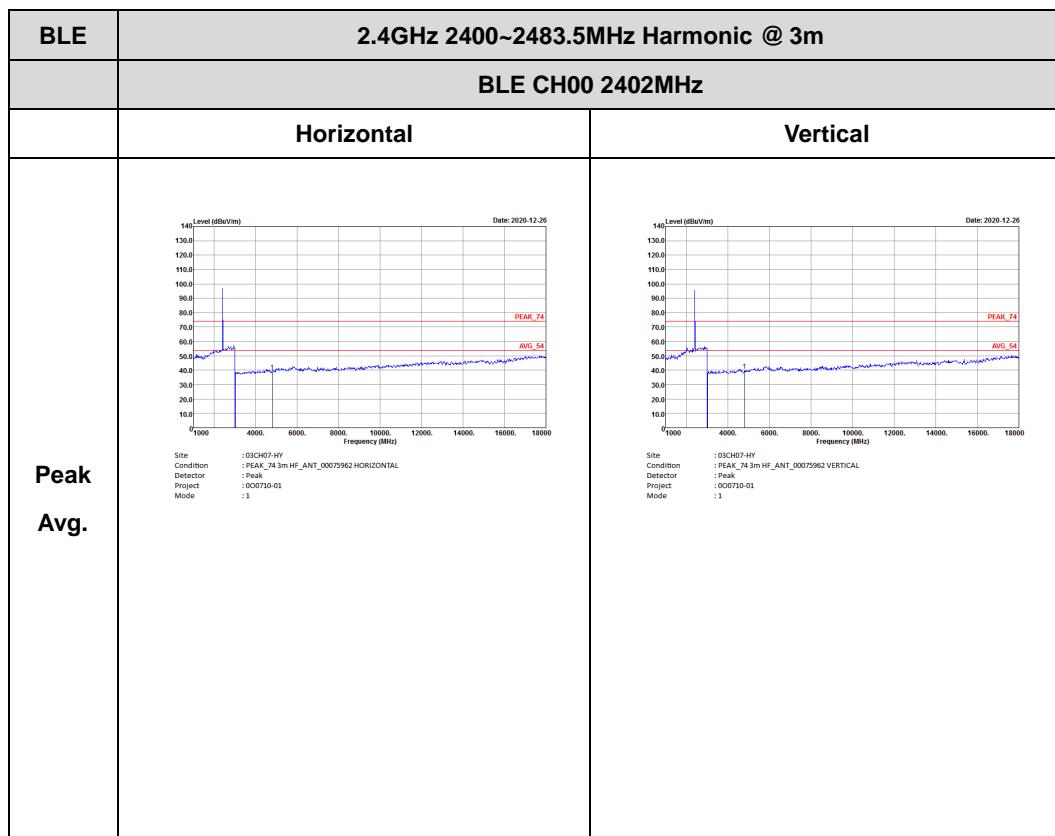

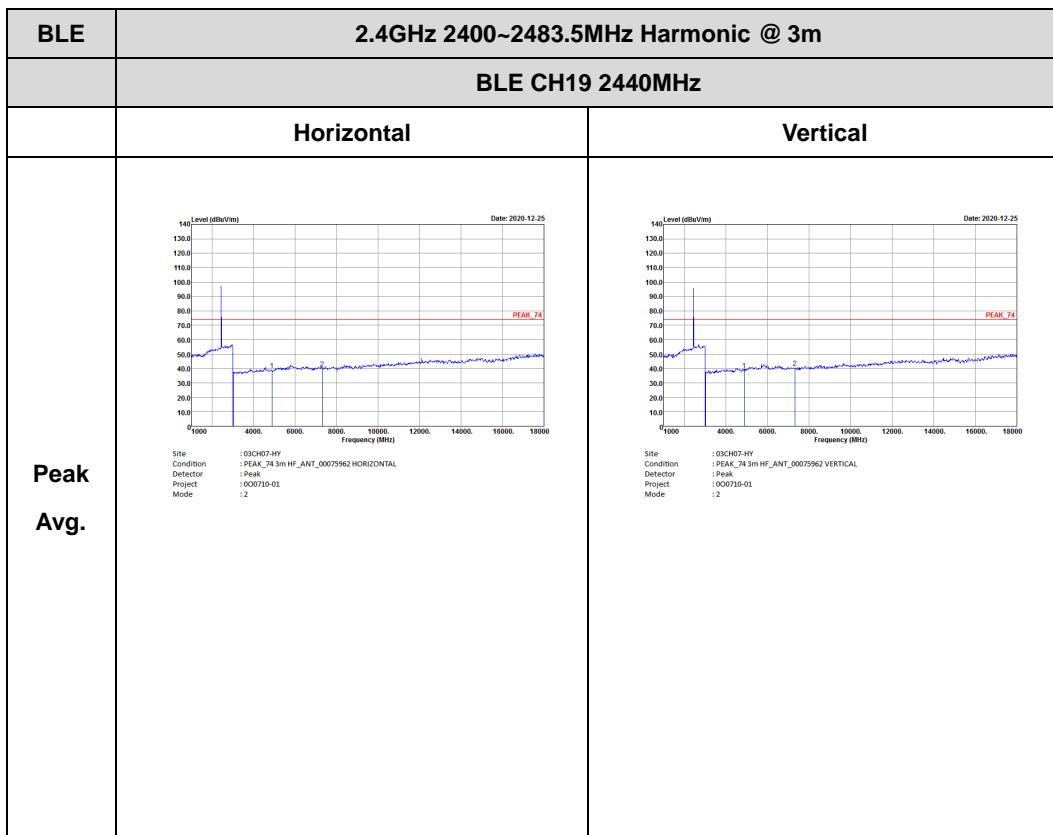


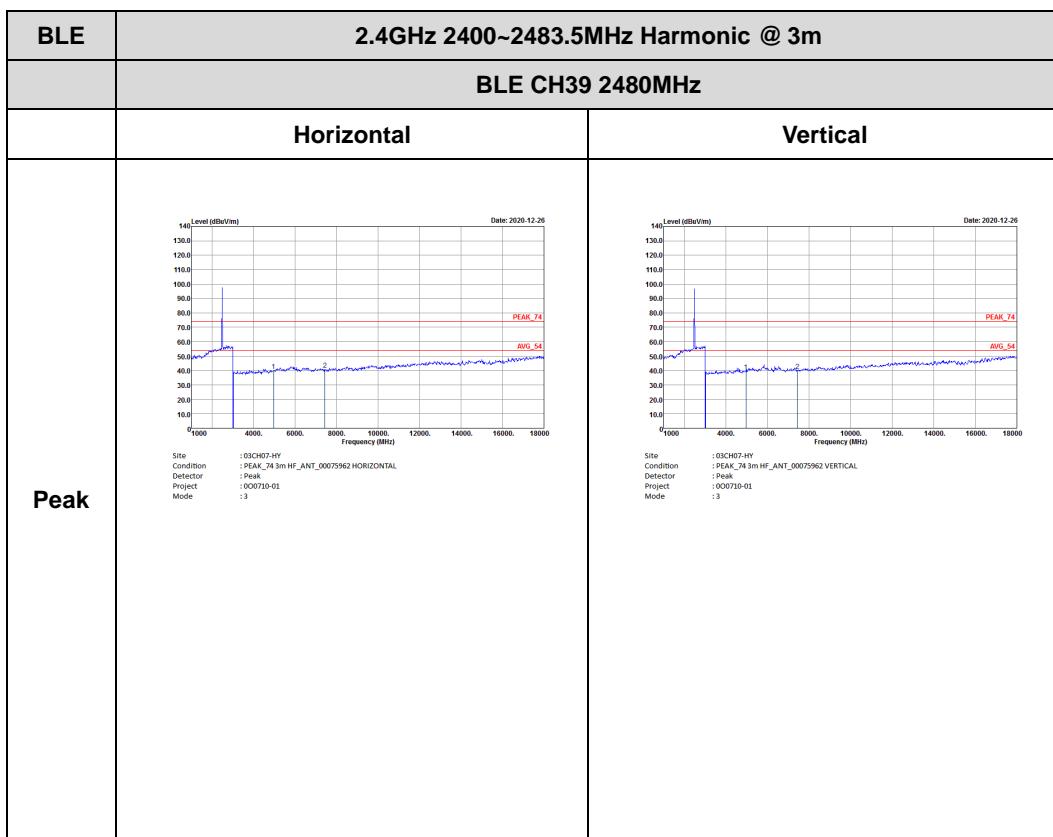



Emission above 18GHz


2.4GHz BLE (SHF)

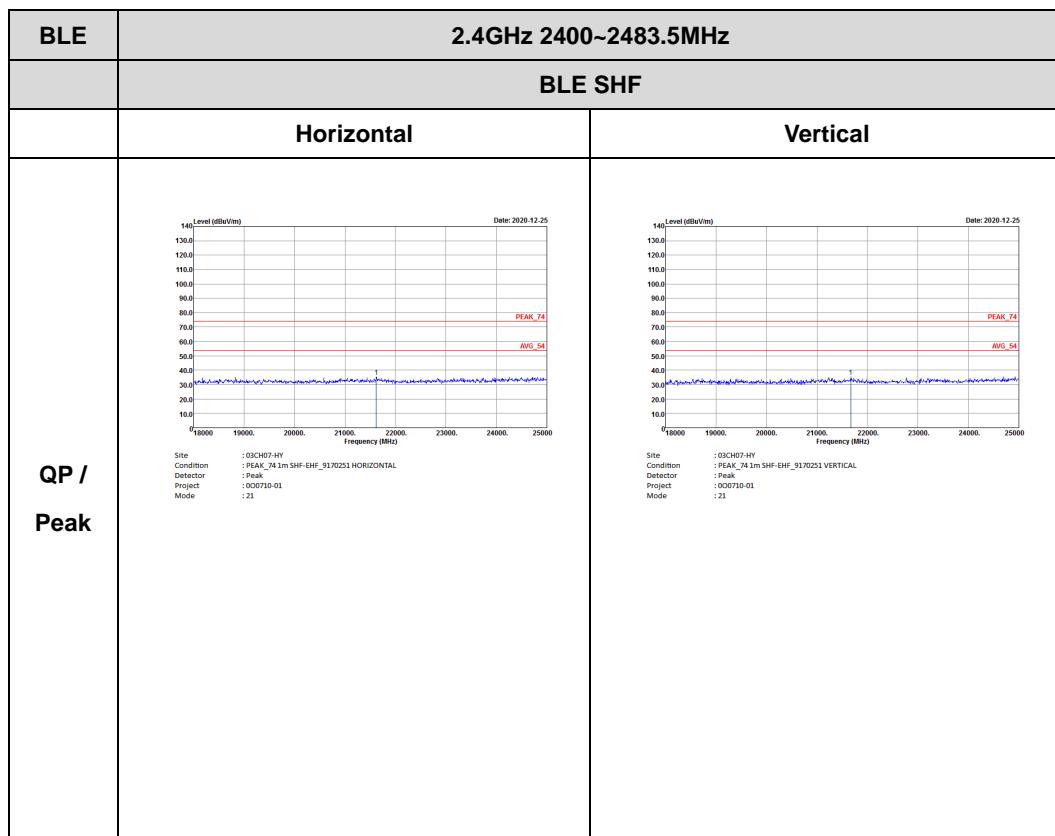



Emission below 1GHz


2.4GHz BLE (LF)

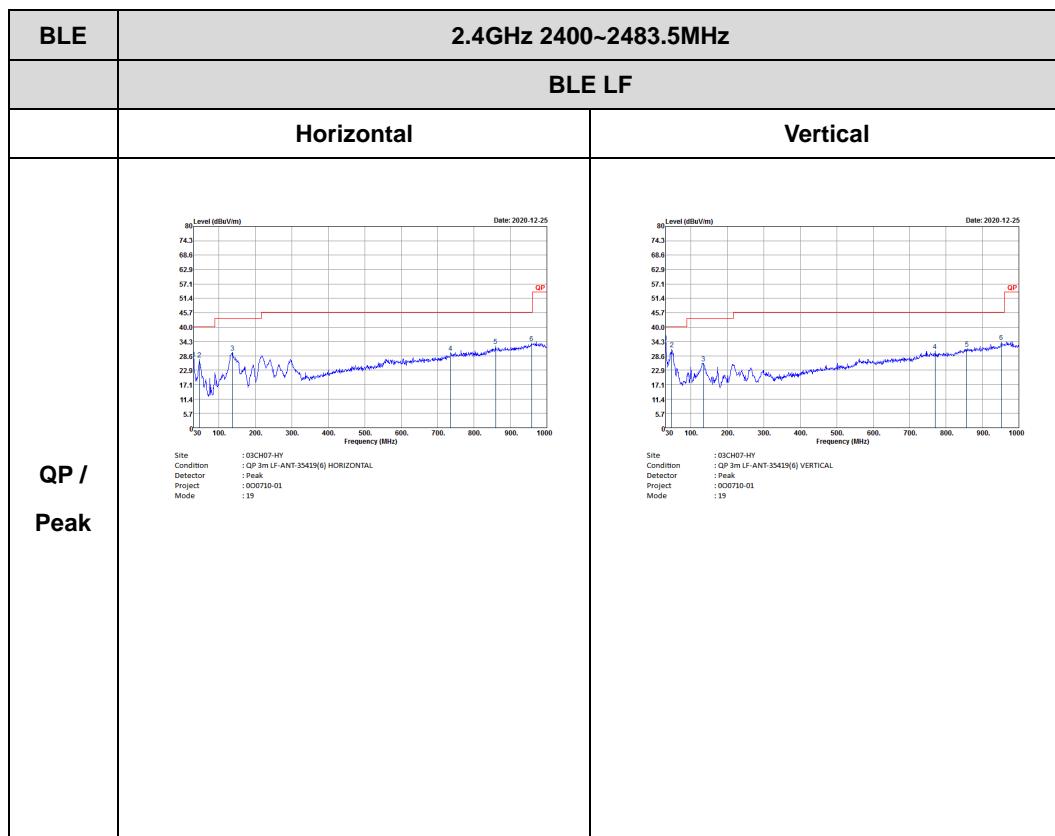



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth -LE	60.8	380	2.63	3kHz	2.16

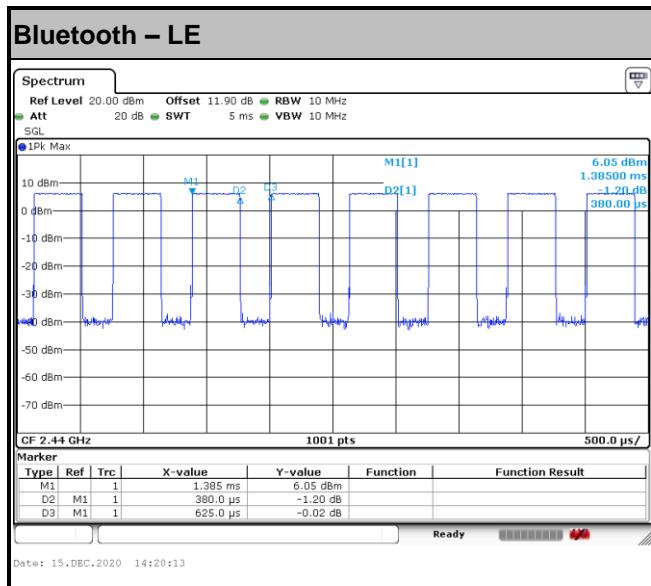

—————THE END—————