

FCC EMC Test Report

Applicant: Dynamox SA

Address of Applicant: Rodovia Jose Carlos Daux, n 600, KM 01, Modulo 05 Parque Tec. Alfa

Equipment Under Test (EUT)

Product Name: DynaGateway

Model No.: DynaGateway EWI

FCC ID: 2AT3M-DYNAEWI

Applicable Standards: FCC CFR Title 47 Part 15B

Date of Sample Receipt: 31 Dec., 2021

Date of Test: 04 Jan., to 20 May, 2022

Date of report Issued: 27 Jun., 2022

Test Result: PASS

Tested by:*Mike.Ou***Test Engineer****Date:***27 Jun., 2022***Reviewed by:***Wenwen Zhang***Project Engineer****Date:***27 Jun., 2022***Approved by:***Mike.Ou***Manager****Date:***27 Jun., 2022*

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	23 May, 2022	Original
01	27 Jun., 2022	Update FCC ID.

3 Contents

	Page
1 Cover Page	1
2 Version	2
3 Contents.....	3
4 General Information.....	4
4.1 Client Information	4
4.2 General Description of E.U.T.	4
4.3 Test Mode	4
4.4 Description of Support Units	5
4.5 Description of Cable Used.....	5
4.6 Measurement Uncertainty	5
4.7 Additions to, Deviations, or Exclusions from the Method	5
4.8 Laboratory Facility	5
4.9 Laboratory Location.....	5
4.10 Test Instruments List.....	6
5 Measurement Setup and Procedure	8
5.1 Test Setup	8
5.2 Test Procedure	10
6 Test Results.....	11
6.1 Summary	11
6.2 Conducted Emission	12
6.3 Radiated Emission	14

4 General Information

4.1 Client Information

Applicant:	Dynamox SA
Address:	Rodovia Jose Carlos Daux, n 600, KM 01, Modulo 05 Parque Tec. Alfa
Manufacturer/ Factory:	Dynamox SA
Address:	Rodovia José Carlos Daux, nº 600, Km 01 - Módulo 05, Parque Tecnológico Alfa - CEP 88030-909, Florianópolis, SC Brazil

4.2 General Description of E.U.T.

Product Name:	DynaGateway
Model No.:	DynaGateway EWl
Power Supply:	DC 12-24V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

4.3 Test Mode

Operating Mode	Detail Description
Working mode	Keep the EUT in normal working mode
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC
YingQin Electronic	Adapter	YQ-1202500Z	N/A	DoC

4.5 Description of Cable Used

Cable Type	Description	Length	From	To
N/A				

4.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (30MHz ~ 1GHz) (10m SAC)	±4.32 dB

Note: All the measurement uncertainty value were shown with a coverage $k=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

4.7 Additions to, Deviations, or Exclusions from the Method

No

4.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

4.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.10 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	01-19-2021	01-18-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	06-20-2021	06-19-2022
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	06-18-2021	06-17-2022
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXG001-7	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXG001-3	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYT3M-1G-BB-5M	WXG001-6	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		


Radiated Emission(10m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
10m SAC	ETS	RFSD-100-F/A	WXJ090	04-28-2021	04-27-2024
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-1	04-02-2021	04-01-2022
				03-30-2022	03-29-2023
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-2	04-02-2021	04-01-2022
				03-30-2022	03-29-2023
EMI Test Receiver	R&S	ESR 3	WXJ090-3	04-08-2021	04-07-2022
				03-30-2022	03-29-2023
EMI Test Receiver	R&S	ESR 3	WXJ090-4	04-08-2021	04-07-2022
				03-30-2022	03-29-2023
Low Pre-amplifier	Bost	LNA 0920N	WXG002-3	04-06-2021	04-05-2022
				03-30-2022	03-29-2023
Low Pre-amplifier	Bost	LNA 0920N	WXG002-4	04-06-2021	04-05-2022
				03-30-2022	03-29-2023
Cable	Bost	JYT10M-1G-NN-10M	XG002-7	04-02-2021	04-01-2022
				03-30-2022	03-29-2023
Cable	Bost	JYT10M-1G-NN-10M	XG002-8	04-02-2021	04-01-2022
				03-30-2022	03-29-2023
Test Software	R&S	EMC32	Version: 10.50.40		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	10-21-2021	10-20-2022
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	03-18-2021	03-17-2022
				02-17-2022	02-16-2023
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	06-18-2021	06-17-2022
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

5 Measurement Setup and Procedure

5.1 Test Setup


1) Conducted emission measurement:

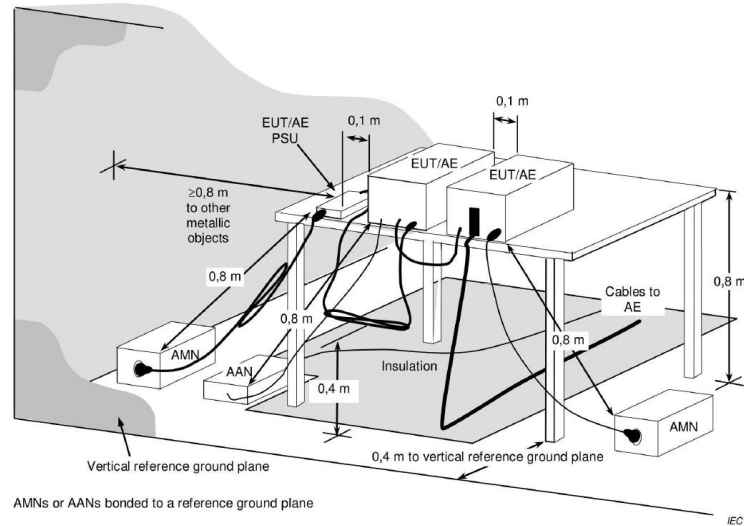


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:

Below 1GHz (10m SAC)

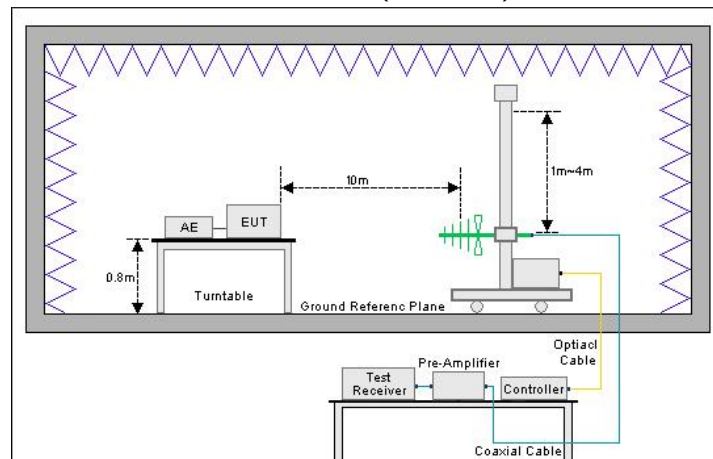

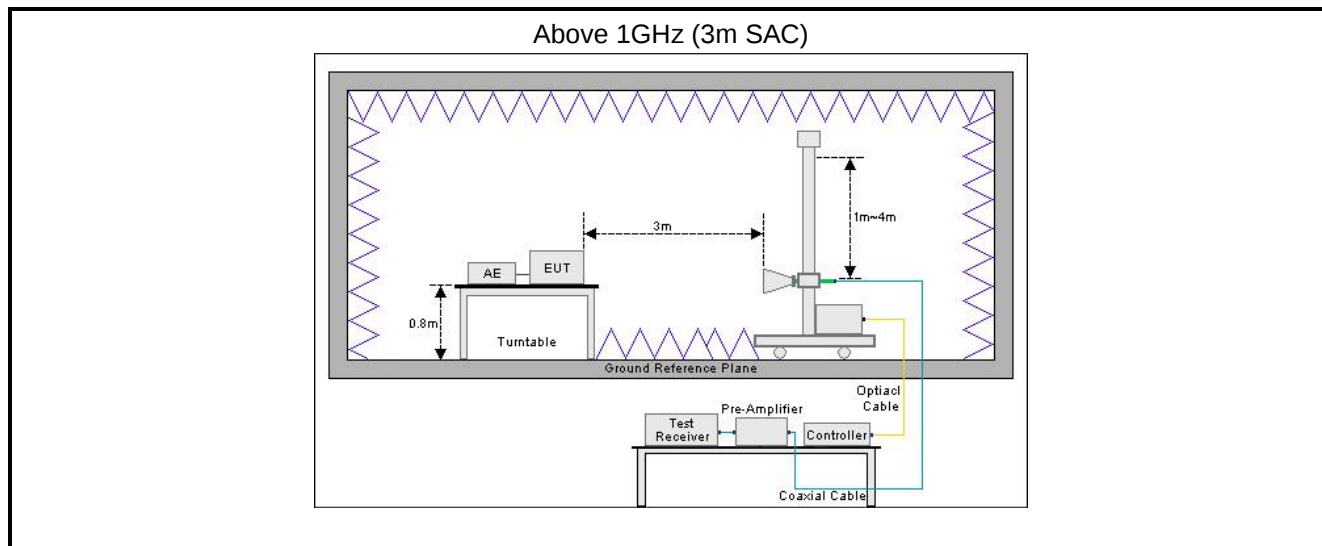

5.2 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 10 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

6 Test Results

6.1 Summary

6.1.1 Clause and data summary


Test items	Standard clause	Test data	Result
Conducted Emission	Part 15.107	See Section 6.2	Pass
Radiated Emission	Part 15.109	See Section 6.3	Pass
Remark: 1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
Test Method:		ANSI C63.4:2014	

6.1.2 Test Limit

Test items	Limit																																																					
Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Class A Limit (dBμV)</th><th colspan="2">Class B Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>79</td><td>66</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>73</td><td>60</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>73</td><td>60</td><td>60</td><td>50</td></tr><tr><td colspan="5">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.</td></tr><tr><td colspan="5">Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Class A Limit (dBμV)		Class B Limit (dBμV)		Quasi-Peak	Average	Quasi-Peak	Average	0.15 – 0.5	79	66	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	73	60	56	46	5 – 30	73	60	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.					Note 2: The more stringent limit applies at transition frequencies.																							
	Frequency (MHz)		Class A Limit (dBμV)		Class B Limit (dBμV)																																																	
		Quasi-Peak	Average	Quasi-Peak	Average																																																	
	0.15 – 0.5	79	66	66 to 56 Note 1	56 to 46 Note 1																																																	
	0.5 – 5	73	60	56	46																																																	
	5 – 30	73	60	60	50																																																	
	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.																																																					
Note 2: The more stringent limit applies at transition frequencies.																																																						
Radiated Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Class A Limit (dBμV/m)</th><th colspan="2">Class B Limit (dBμV/m)</th></tr><tr><th>Quasi-Peak @ 3m</th><th>Quasi-Peak @ 10m</th><th>Quasi-Peak @ 3m</th><th>Quasi-Peak @ 10m</th></tr><tr><td>30 – 88</td><td>49.0</td><td>39.0</td><td>40.0</td><td>30.0</td></tr><tr><td>88 – 216</td><td>53.5</td><td>43.5</td><td>43.5</td><td>33.5</td></tr><tr><td>216 – 960</td><td>56.0</td><td>46.0</td><td>46.0</td><td>36.0</td></tr><tr><td>960 – 1000</td><td>60.0</td><td>50.0</td><td>54.0</td><td>44.0</td></tr><tr><td colspan="5">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Class A Limit (dBμV/m) @ 3m</th><th colspan="2">Class B Limit (dBμV/m) @ 3m</th></tr><tr><th>Average</th><th>Peake</th><th>Average</th><th>Peake</th></tr><tr><td>Above 1 GHz</td><td>60.0</td><td>80.0</td><td>54.0</td><td>74.0</td></tr><tr><td colspan="5">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Class A Limit (dBμV/m)		Class B Limit (dBμV/m)		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m	30 – 88	49.0	39.0	40.0	30.0	88 – 216	53.5	43.5	43.5	33.5	216 – 960	56.0	46.0	46.0	36.0	960 – 1000	60.0	50.0	54.0	44.0	Note: The more stringent limit applies at transition frequencies.					Frequency	Class A Limit (dBμV/m) @ 3m		Class B Limit (dBμV/m) @ 3m		Average	Peake	Average	Peake	Above 1 GHz	60.0	80.0	54.0	74.0	Note: The measurement bandwidth shall be 1 MHz or greater.				
	Frequency (MHz)		Class A Limit (dBμV/m)		Class B Limit (dBμV/m)																																																	
		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m																																																	
	30 – 88	49.0	39.0	40.0	30.0																																																	
	88 – 216	53.5	43.5	43.5	33.5																																																	
	216 – 960	56.0	46.0	46.0	36.0																																																	
	960 – 1000	60.0	50.0	54.0	44.0																																																	
	Note: The more stringent limit applies at transition frequencies.																																																					
	Frequency	Class A Limit (dBμV/m) @ 3m		Class B Limit (dBμV/m) @ 3m																																																		
		Average	Peake	Average	Peake																																																	
Above 1 GHz	60.0	80.0	54.0	74.0																																																		
Note: The measurement bandwidth shall be 1 MHz or greater.																																																						

6.2 Conducted Emission

Product name:	DynaGateway	Product model:	DynaGateway EW1
Test by:	Mike	Test mode:	Working mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

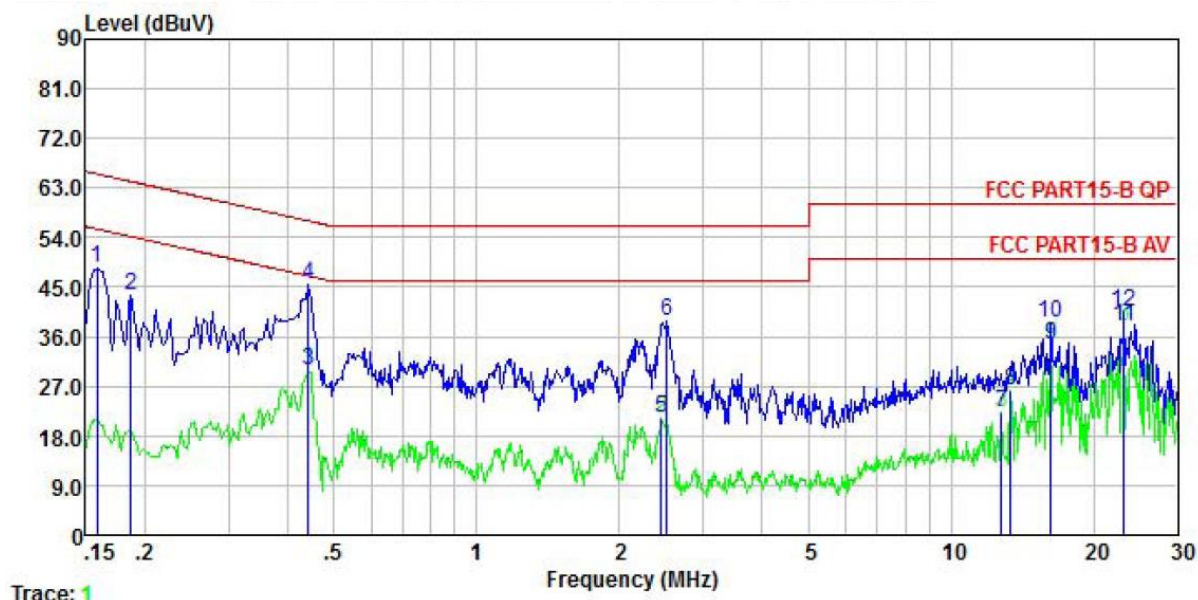


	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.158	48.38	0.04	0.01	48.43	65.56	-17.13	QP
2	0.186	43.58	0.04	0.02	43.64	64.20	-20.56	QP
3	0.442	29.75	0.04	0.03	29.82	47.02	-17.20	Average
4	0.442	45.32	0.04	0.03	45.39	57.02	-11.63	QP
5	2.448	20.99	0.08	0.14	21.21	46.00	-24.79	Average
6	2.513	38.57	0.08	0.13	38.78	56.00	-17.22	QP
7	12.784	22.03	0.25	0.11	22.39	50.00	-27.61	Average
8	13.337	25.76	0.25	0.11	26.12	50.00	-23.88	Average
9	16.226	34.23	0.28	0.16	34.67	50.00	-15.33	Average
10	16.226	38.06	0.28	0.16	38.50	60.00	-21.50	QP
11	23.140	37.38	0.35	0.17	37.90	50.00	-12.10	Average
12	23.140	40.04	0.35	0.17	40.56	60.00	-19.44	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	DynaGateway	Product model:	DynaGateway EW1
Test by:	Mike	Test mode:	Working mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

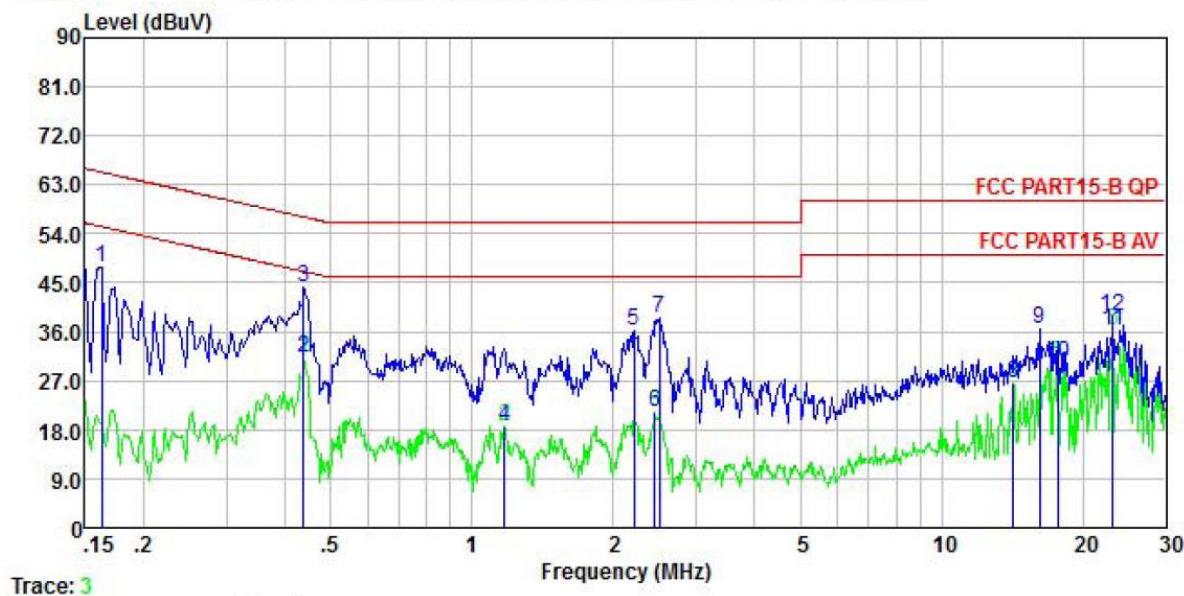

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	47.73	0.05	0.01	47.79	65.34	-17.55	QP
2	0.437	30.98	0.04	0.03	31.05	47.11	-16.06	Average
3	0.437	44.10	0.04	0.03	44.17	57.11	-12.94	QP
4	1.172	18.52	0.05	0.09	18.66	46.00	-27.34	Average
5	2.213	35.83	0.07	0.17	36.07	56.00	-19.93	QP
6	2.448	21.15	0.07	0.14	21.36	46.00	-24.64	Average
7	2.500	38.23	0.07	0.13	38.43	56.00	-17.57	QP
8	14.213	26.25	0.24	0.12	26.61	50.00	-23.39	Average
9	16.140	36.16	0.26	0.16	36.58	60.00	-23.42	QP
10	17.661	29.75	0.28	0.15	30.18	50.00	-19.82	Average
11	23.140	35.61	0.34	0.17	36.12	50.00	-13.88	Average
12	23.140	38.40	0.34	0.17	38.91	60.00	-21.09	QP

Remark:


1. Level = Read level + LISN Factor + Cable Loss.

6.3 Radiated Emission

Below 1GHz:

Product Name:	DynaGateway	Product Model:	DynaGateway EWI
Test By:	Mike	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical & Horizontal
Test Voltage:	AC 120V/60Hz		

Full Spectrum

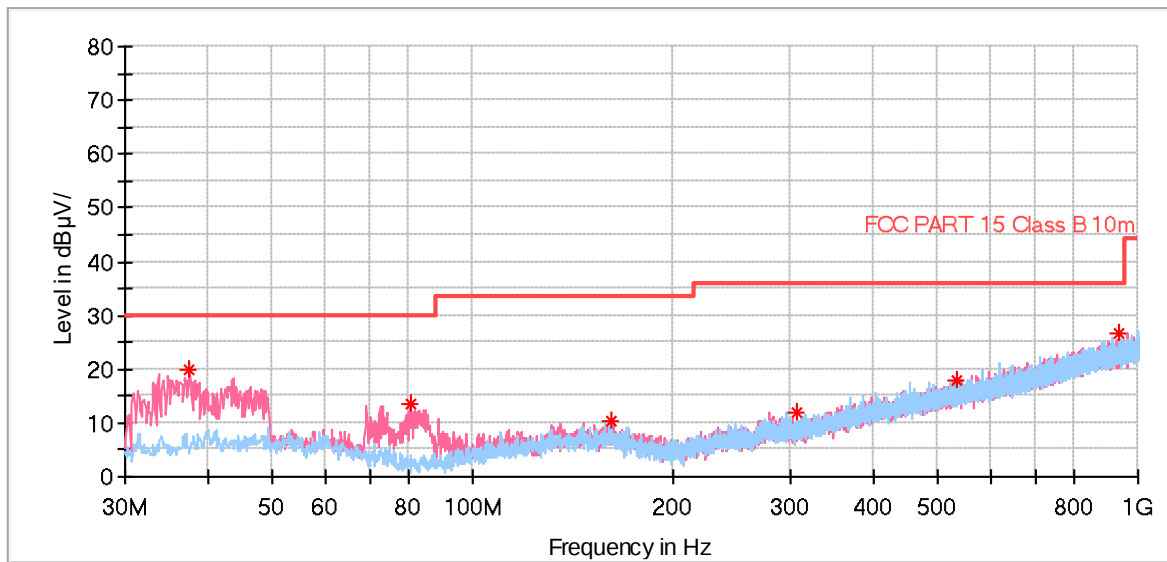


Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
161.823000	10.17	33.50	23.33	100.0	H	3.0	-15.5
306.256000	12.11	36.00	23.89	100.0	H	105.0	-14.4
938.114000	26.54	36.00	9.46	100.0	H	260.0	-0.2
37.469000	19.79	30.00	10.21	100.0	V	61.0	-16.1
531.975000	18.02	36.00	17.98	100.0	V	130.0	-8.1
80.440000	13.61	30.00	16.39	100.0	V	281.0	-20.1

Remark:

1. Level = Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	DynaGateway	Product Model:	DynaGateway EWI
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

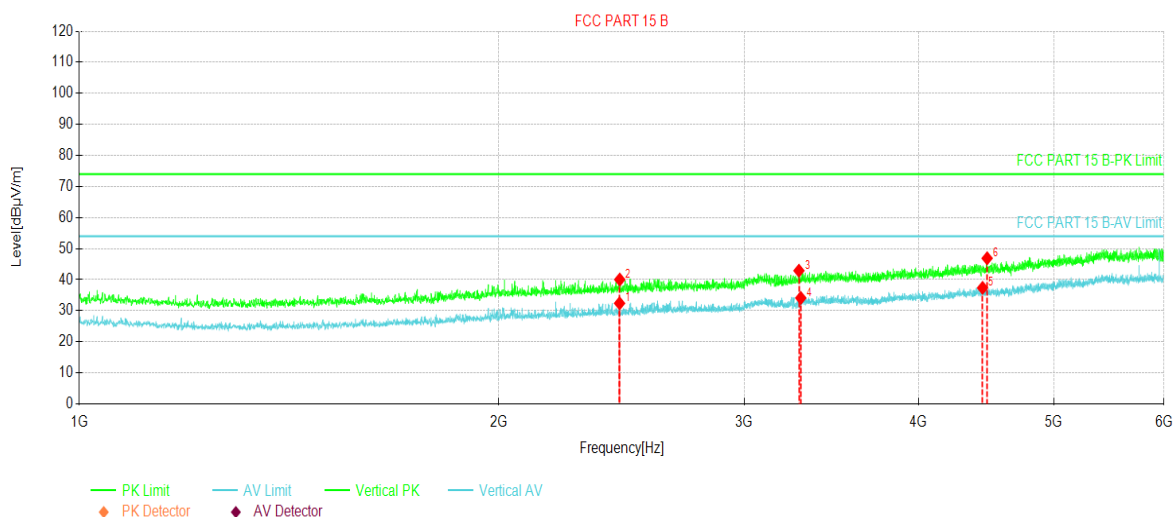


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2441.25	51.11	32.39	-18.72	54.00	21.61	AV	Vertical
2	2441.87	58.75	40.04	-18.71	74.00	33.96	PK	Vertical
3	3283.12	58.55	42.90	-15.65	74.00	31.10	PK	Vertical
4	3293.12	49.72	34.11	-15.61	54.00	19.89	AV	Vertical
5	4446.25	48.37	37.36	-11.01	54.00	16.64	AV	Vertical
6	4480.00	57.76	46.88	-10.88	74.00	27.12	PK	Vertical

Remark:

1. Level = Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	DynaGateway	Product Model:	DynaGateway EWI
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

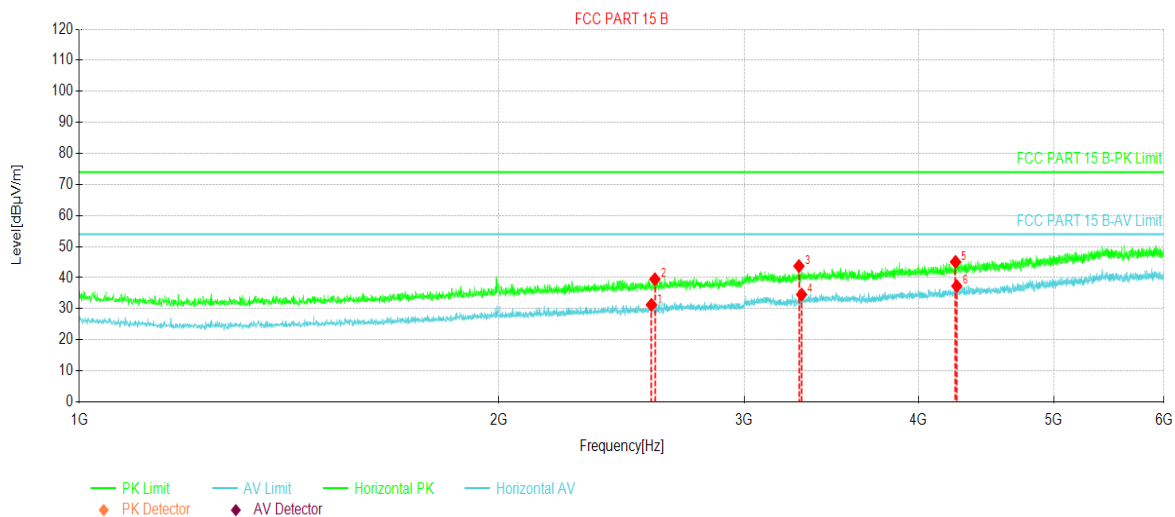

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2573.12	49.47	31.26	-18.21	54.00	22.74	AV	Horizontal
2	2588.12	57.63	39.50	-18.13	74.00	34.50	PK	Horizontal
3	3283.12	59.38	43.73	-15.65	74.00	30.27	PK	Horizontal
4	3297.50	50.16	34.56	-15.60	54.00	19.44	AV	Horizontal
5	4251.87	56.84	45.07	-11.77	74.00	28.93	PK	Horizontal
6	4261.25	49.02	37.28	-11.74	54.00	16.72	AV	Horizontal

Remark:

1. Level = Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----