

FCC Measurement/Technical Report on In Cable Control and Protection Device Model IC-CPD

FCC ID: 2AT4E-ICCPDG2HIGH
IC: 25285-ICCPDG2HIGH

Test Report Reference: MDE_BEBRO_1501_FCCc_rev01

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/

Managing Directors:

Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:

Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary / Signatures	5
2	Revision History	8
3	Administrative Data	9
3.1	Testing Laboratory	9
3.2	Project Data	9
3.3	Applicant Data	9
3.4	Manufacturer Data	9
4	Test object Data	10
4.1	General EUT Description	10
4.2	EUT Main components	12
4.3	Ancillary Equipment	13
4.4	Auxiliary Equipment	13
4.5	EUT Setups	13
4.6	Operating Modes	14
4.7	Product labelling	16
5	Test Results	17
5.1	AC Conducted Emissions	17
5.2	26 dB Bandwidth	20
5.3	99 % Bandwidth	22
5.4	Maximum Conducted Output Power	24
5.5	Peak Power Spectral Density	28
5.6	Undesirable Emissions; General Field Strength Limits	31
5.7	Band Edge	42
6	Test Equipment	45
7	Antenna Factors, Cable Loss and Sample Calculations	49
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	49
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	50
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	51
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	52
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	53
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	54
8	Setup Drawings	55
9	Measurement Uncertainties	56
10	Photo Report	56

Applied Standards and Test Summary

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-17 Edition) and 15 (10-1-17 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

Note:

The tests were selected and performed with reference to the FCC Public Notice “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures New Rules v02r01, 2017-12-14”.

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”) is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment from FCC and IC

UNII equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1 (99%) RSS-247 Issue 2: 6.2.4.1 (6 dB)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	§ 15.407 (b) § 15.209 (a)	RSS-Gen Issue 5: 6.13/8.9/8.10; RSS-247 Issue 2: 3.3/6.2 6.2.1.2, 6.2.2.2, 6.2.3.2, 6.2.4.2
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 5: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-247 Issue 2: 6.2.2.1, 6.2.3.1, 6.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5: 8.3
Receiver spurious emissions	—	-

1.3 MEASUREMENT SUMMARY / SIGNATURES

47 CFR CHAPTER I FCC PART 15 FCC §15.207 Subpart E §15.407

AC Conducted Emissions

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	Date	FCC	IC
Operating mode worst case	S01_AG02	2019-03-26	Passed	Passed

47 CFR CHAPTER I FCC PART 15 FCC §15.31, §15.403 (i) Subpart E §15.407

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Subband				
WLAN a, high, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN a, low, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN a, mid, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN ac 20 MHz, high, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN ac 20 MHz, low, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN ac 20 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN ac 40 MHz, high, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN ac 40 MHz, low, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN ac 80 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN n 20 MHz, high, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN n 20 MHz, low, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN n 20 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN n 40 MHz, high, U-NII-1	S01_AE01	2018-09-21	Performed	N/A
WLAN n 40 MHz, low, U-NII-1	S01_AE01	2018-09-21	Performed	N/A

47 CFR CHAPTER I FCC PART 15 FCC §15.31, IC RSS 247 Ch. 6.2.x Subpart E §15.407

99 % Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Subband				
WLAN a, high, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN a, low, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN a, mid, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN ac 20 MHz, high, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN ac 20 MHz, low, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN ac 20 MHz, mid, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN ac 40 MHz, high, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN ac 40 MHz, low, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN ac 80 MHz, mid, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN n 20 MHz, high, U-NII-1	S01_AE01	2018-09-25	N/A	Performed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.31, IC RSS 247 Ch. 6.2.x

99 % Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN n 20 MHz, low, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN n 20 MHz, mid, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN n 40 MHz, high, U-NII-1	S01_AE01	2018-09-25	N/A	Performed
WLAN n 40 MHz, low, U-NII-1	S01_AE01	2018-09-25	N/A	Performed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN a, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN a, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN a, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 20 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 20 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.31, §15.407 (a) (1), (5)

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN a, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN a, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN a, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 20 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.31, §15.407 (a) (1), (5)

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN n 20 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_AE01	2018-09-21	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AE01	2018-09-21	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.407 (b), (1), (2), (3), (4); FCC
§15.205, §15.209, §15.407 (b) (5), (6)

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode Radio Technology, Operating Frequency, Measurement range, Subband	Setup	Date	FCC	IC
WLAN a, high, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-11-02	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-1	S01_AG02	2019-03-25	Passed	Passed
WLAN a, high, 26GHz - 40GHz, U-NII-1	S01_AA01	2018-11-12	Passed	Passed
WLAN a, high, 30MHz - 1GHz, U-NII-1	S01_AA01	2018-10-25	Passed	Passed
WLAN a, high, 30MHz - 1GHz, U-NII-1	S01_AG02	2019-03-22	Passed	Passed
WLAN a, high, 9kHz - 30MHz, U-NII-1	S01_AA01	2018-10-24	Passed	Passed
WLAN a, high, 9kHz - 30MHz, U-NII-1	S01_AG02	2019-03-22	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-10-29	Passed	Passed
WLAN a, low, 26GHz - 40GHz, U-NII-1	S01_AA01	2018-11-12	Passed	Passed
WLAN a, low, 30MHz - 1GHz, U-NII-1	S01_AA01	2018-10-25	Passed	Passed
WLAN a, low, 9kHz - 30MHz, U-NII-1	S01_AA01	2018-10-24	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-10-25	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-1	S01_AA01	2018-10-25	Passed	Passed
WLAN ac 40 MHz, high, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-11-10	Passed	Passed
WLAN ac 40 MHz, low, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-11-10	Passed	Passed
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-11-05	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-11-02	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-1	S01_AA01	2018-11-05	Passed	Passed
WLAN n 40 MHz, high, 30MHz - 1GHz, U-NII-1	S01_AA01	2018-10-25	Passed	Passed
WLAN n 40 MHz, high, 9kHz - 30MHz, U-NII-1	S01_AB01	2018-10-25	Passed	Passed
WLAN n 40 MHz, low, 30MHz - 1GHz, U-NII-1	S01_AA01	2018-10-25	Passed	Passed
WLAN n 40 MHz, low, 9kHz - 30MHz, U-NII-1	S01_AB01	2018-10-25	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.407 (b), (1), (2), (3), (4)

Band Edge

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Subband				
WLAN a, low, U-NII-1	S01_AA01	2018-10-29	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AA01	2018-11-02	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AA01	2018-11-10	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1	S01_AA01	2018-11-13	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AA01	2018-11-02	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AA01	2018-11-10	Passed	Passed

COMMENT:

The tests were repeated for the worst-case test "Undesirable Emissions" with new Sample with newer Hardware/Software.



(responsible for accreditation scope)
 Marco Kullik



(responsible for testing and report)
 Wolfgang Richter



7 layers GmbH, Borsigstr. 11
 40880 Ratingen, Germany
 Phone +49 (0)2102 749 0

2 REVISION HISTORY

Report version control			
Version	Release date	Change Description	Version validity
initial	2019-04-01	--	invalid
rev01	2019-07-26	Frontpage: FCC ID and IC changed by applicant, detailed date of testing added in summary table	valid

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier: DE0007; ISED#: 3699A

Responsible for accreditation scope: Marco Kullik

Report Template Version: 2019-02-12

3.2 PROJECT DATA

Responsible for testing and report: Wolfgang Richter
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2019-07-26
Testing Period: 2018-09-21 to 2019-03-26

3.3 APPLICANT DATA

Company Name: eSystems MTG GmbH
Address: Bahnhofstraße 100
73240 Wendlingen
Germany
Contact Person: Frank Beger

3.4 MANUFACTURER DATA

Company Name: eSystems MTG GmbH
Address: Bahnhofstraße 100
73240 Wendlingen
Germany
Contact Person: Frank Beger

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Declared EUT data by the supplier	
Kind of Device product description	In Cable Control and Protection Device IEEE Std. 802.11™ a/b/g/n/ac WLAN/WIFI Device supporting 2.4 GHz band (Channel 1 to 11) and 5 GHz Sub band 1 (5150 – 5250 MHz) All variants of the EUT uses the identical (HW/SW) Wi-Fi-/WLAN-Module.
Product name	In Cable Control and Protection Device
Type	Model IC-CPD
Power Supply Type	AC mains
Nominal Voltage / Frequency	90 V - 240 V / 50 Hz, 60 Hz
Test Voltage / Frequency	tested with 120 V / 60 Hz
Highest internal frequency	5.3 GHz
Ports	Port Infrastructure, port Car
Special software used for testing	Original SW used
Antenna type / Gain	integral antenna / 5.1 dBi in 5 GHz Sub band 1 (5150 – 5250 MHz)
Nominal Bandwidth	WLAN a: 20 MHz WLAN n: 20 MHz, 40 MHz WLAN ac: 20 MHz, 40 MHz, 80 MHz
Operating Modes	WLAN a: IEEE 802.11a, power setting 14 dBm, WLAN n: IEEE 802.11n, power setting 13 dBm, WLAN ac: IEEE 802.11ac, power setting 12 dBm
Test Modulation Pattern	WLAN a: 6 Mbit/s (OFDM, BPSK) WLAN n: MCS0 (SISO), WLAN ac: MCS0 (SISO)
Duty Cycle (linear)	WLAN a: ~ 1.0 WLAN n: ~ 1.0 WLAN ac: ~ 1.0

Kind of Device product description	In Cable Control and Protection Device IEEE Std. 802.11™ a/b/g/n/ac WLAN/WIFI Device supporting 2.4 GHz band (Channel 1 to 11) and 5 GHz Sub band 1 (5150 – 5250 MHz) Additional EUT data declared by manufacturer: OEM's trade names: Porsche Mobile Charger Connect Audi Charging System Connect Bentley Home Charging Unit Model: IC-CPD Variants: Porsche: 9Y0.971.675.BE = (7,2 kW) 9Y0.971.675.BG = (11 kW) 9Y0.971.675.BJ = (22 kW) 9Y0.971.675.BL = (9,6 kW) for UL-Region 9Y0.971.675.BM = (9,6 kW) for Japan Audi: 8V4.971.675.BE = (7,2 kW) 8V4.971.675.BG = (11 kW) 8V4.971.675.BJ = (22 kW) 8V4.971.675.BL = (9,6 kW) for UL-Region Bentley: 36A.971.675.F = (7,2 kW) 36A.971.675.G = (9,6 kW) for UL-Region 36A.971.675.J = (9,6 kW) for Japan All variants of the EUT uses the identical (HW/SW) Wi-Fi-/WLAN-Module.
---------------------------------------	--

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT A	DE1321000aa01	Sample with integral antenna
Sample Parameter	Value	
Serial No.	0000680	
HW Version	09	
SW Version	SW_C: 2350, SW_P: 1830	
Comment	Radiated sample	
Variant	9Y0.971.675.BJ	

Sample Name	Sample Code	Description
EUT B	DE1321000ab01	Sample with integral antenna
Sample Parameter	Value	
Serial No.	0000679	
HW Version	09	
SW Version	SW_C: 2350, SW_P: 1830	
Comment	Radiated sample	
Variant	9Y0.971.675.BJ	

Sample Name	Sample Code	Description
EUT E	DE1321000ae01	Sample with temporary SMA antenna connector
Sample Parameter	Value	
Serial No.	0000673	
HW Version	09	
SW Version	SW_C: 2350, SW_P: 1830	
Comment	Conducted sample	
Variant	9Y0.971.675.BJ	

Sample Name	Sample Code	Description
EUT G	DE1321000ag02	Sample with integral antenna
Sample Parameter	Value	
Serial No.	0002136	
HW Version	13	
SW Version	SW_C: 2901, SW_P: 1900	
Comment	Radiated Sample with newer HW/SW	
Variant	9Y0.971.675.BL	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless, Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless, Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S / N)	Description
ANC1	HARTING, 7PP.971.678.BH, -, -, -	Cable at Port Infrastructure
ANC2	HARTING, 7PP.971.676.BL, -, -, -	Cable at Port Car

4.5 EUT SETUPS

This chapter describes the combination of EUTs, and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AB01	EUT B, ANC1, ANC2,	Set-up used for radiated tests
S01_AA01	EUT A, ANC1, ANC2,	Set-up used for radiated tests
S01_AE01	EUT E, ANC1, ANC2,	Set-up used for conducted tests
S01_AG02	EUT G, ANC1, ANC2,	Set-up used for radiated tests

4.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

4.6.1 TEST CHANNELS

U-NII-Sub-band 1 5150 - 5250 MHz			Nom. BW
low	mid	high	20 MHz
36	44	48	Ch.-No.
5180	5220	5240	MHz
low	mid	high	40 MHz
38	-	46	Ch.-No.
5190	-	5230	MHz
low	mid	high	80 MHz
42	-		Ch.-No.
5210	-		MHz

4.6.2 USED SETTINGS

IEEE 802.11 Mode	IEEE 802.11 channel	Centre frequency MHz	Position in Band (low/mid/high)	Input parameter (Channel) at EUT (Blue if different to IEEE 802.11)	Band	Band to be set at EUT	Bandwidth MHz	Data rate to be set at EUT	Power level to be set at EUT
	36	5180	low	36	5 GHz U-NII-1	5g	20	6 Mbps	14
a	44	5220	mid	44	5 GHz U-NII-1	5g	20	6 Mbps	14
	48	5240	high	48	5 GHz U-NII-1	5g	20	6 Mbps	14
	36	5180	low	36	5 GHz U-NII-1	5g	20	MCS0	13
n	44	5220	mid	44	5 GHz U-NII-1	5g	20	MCS0	13
	48	5240	high	48	5 GHz U-NII-1	5g	20	MCS0	13
	36	5180	low	36	5 GHz U-NII-1	5g	20	MCS0	12
ac	44	5220	mid	44	5 GHz U-NII-1	5g	20	MCS0	12
	48	5240	high	48	5 GHz U-NII-1	5g	20	MCS0	12
	38	5190	low	36 or 40 (not 38!)	5 GHz U-NII-1	5g	40	MCS0	13
n	N/A		mid (N/A)						
	46	5230	high	44 or 48 (not 46!)	5 GHz U-NII-1	5g	40	MCS0	13
	38	5190	low	36 or 40 (not 38!)	5 GHz U-NII-1	5g	40	MCS0	12
ac	N/A		mid (N/A)						
	46	5230	high	44 or 48 (not 46!)	5 GHz U-NII-1	5g	40	MCS0	12
	N/A		low (N/A)						
ac	42	5210	mid	36 or 40 or 44 or 48 (not 42!)	5 GHz U-NII-1	5g	80	MCS0	12
	N/A		high (N/A)						

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 AC CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency (MHz)	QP Limits (dBμV)	AV Limits (dBμV)
0.15 – 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.1.3 TEST PROTOCOL

Temperature: 24 °C
Air Pressure: 1017 hPa
Humidity: 32 %


Power line	PE	Frequency [MHz]	Measured value QP [dBμV]	Measured value AV [dBμV]	Limit [dBμV]	Margin [dB]
please see table below diagram	-	-	-	-	-	-

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, “WORST CASE”)

Operating mode = worst case,
(S01_AG02)

Test Description:	Conducted Emissions
Test Standard:	FCC §15.207, ANSI C63.10
EUT / Setup Code:	DE1321000ag02
Operating Conditions:	120 V, 60 Hz, WLAN 5 GHz, TX CH 48, a-Mode, 6 Mbps, 14 dBm
Comment:	no car connected
Legend:	Trace: blue = PK, green = CISPR AV; Star: red or blue = critical frequency; Rhombus: blue = final QP, green = final CISPR AV
Tested Port / used LISN:	AC mains => ESH3-Z5
Termination of other ports:	N/A

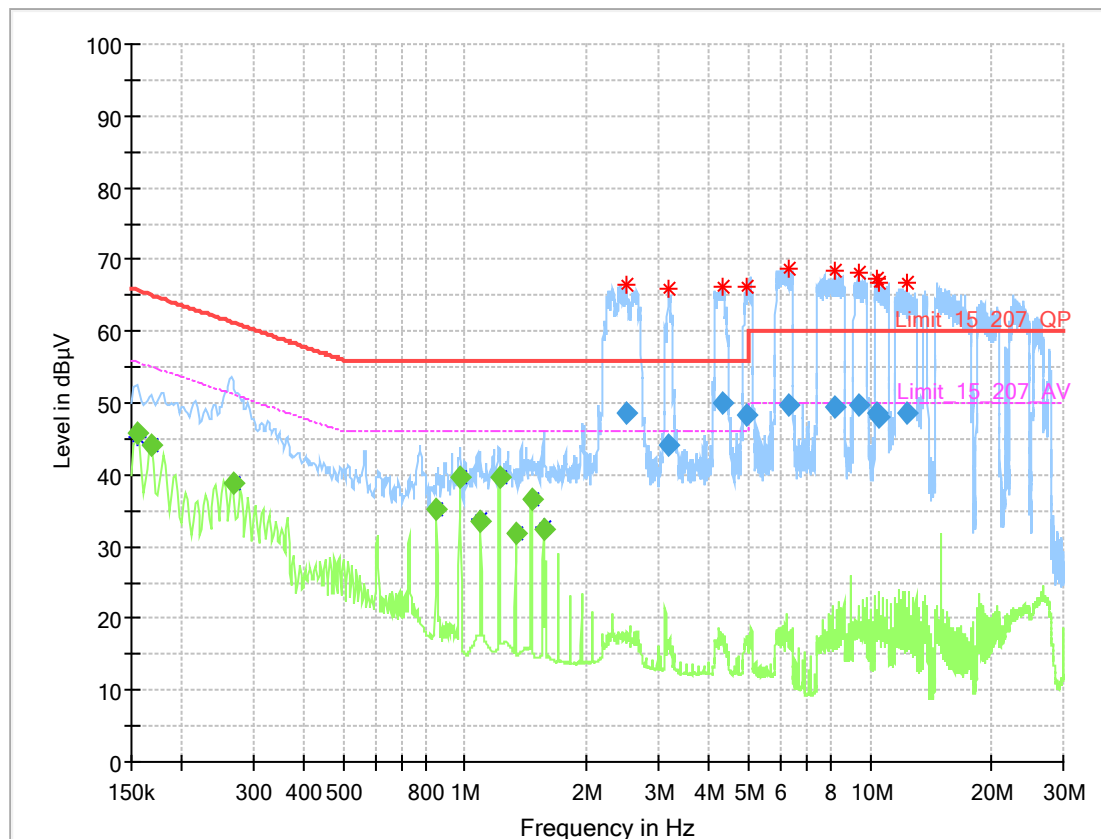

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.154500	---	45.81	55.75	9.94	1000.0	9.000	N	FLO	10.1
0.168000	---	44.24	55.06	10.81	1000.0	9.000	N	FLO	10.1
0.267000	---	38.80	51.21	12.42	1000.0	9.000	N	FLO	10.1
0.849750	---	35.21	46.00	10.79	1000.0	9.000	N	GND	10.1
0.971250	---	39.70	46.00	6.30	1000.0	9.000	N	GND	10.1
1.092750	---	33.57	46.00	12.43	1000.0	9.000	N	GND	10.2
1.214250	---	39.72	46.00	6.28	1000.0	9.000	N	GND	10.2
1.335750	---	31.97	46.00	14.03	1000.0	9.000	N	GND	10.2
1.457250	---	36.51	46.00	9.49	1000.0	9.000	N	GND	10.2
1.563000	---	32.52	46.00	13.48	1000.0	9.000	L1	GND	10.2
2.490000	48.69	---	56.00	7.31	1000.0	9.000	L1	FLO	10.3
3.185250	44.18	---	56.00	11.82	1000.0	9.000	L1	FLO	10.3
4.341750	50.12	---	56.00	5.88	1000.0	9.000	L1	FLO	10.4
4.980750	48.30	---	56.00	7.70	1000.0	9.000	N	FLO	10.4
6.292500	49.82	---	60.00	10.18	1000.0	9.000	L1	FLO	10.5
8.229750	49.44	---	60.00	10.56	1000.0	9.000	N	FLO	10.6
9.384000	49.79	---	60.00	10.21	1000.0	9.000	N	GND	10.6
10.340250	48.56	---	60.00	11.44	1000.0	9.000	N	GND	10.6
10.556250	48.07	---	60.00	11.93	1000.0	9.000	N	FLO	10.6
12.311250	48.55	---	60.00	11.45	1000.0	9.000	N	FLO	10.8

5.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

5.2 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**
The test was performed according to:
ANSI C63.10

5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
- Video Bandwidth (VBW): $> 3 \times \text{RBW}$
- Span: 40 / 80 / 160 MHz (for 20 / 40 / 80 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 200
- Sweeptime: Auto FFT
- Detector: Max Peak

5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII sub-bands 1, 2A and 2C. The test was performed to determine the limits for the “Maximum Conducted Output Power” test case. Therefore, no result was applied.

5.2.3 TEST PROTOCOL


Ambient temperature: 24 °C
Air Pressure: 1010 hPa
Humidity: 40 %

Radio Technology	Operating Frequency	Sub-band	26 dB Bandwidth [MHz]
WLAN a	low	U-NII-1	22.0
WLAN a	mid	U-NII-1	22.0
WLAN a	high	U-NII-1	22.2
WLAN n 20 MHz	low	U-NII-1	22.4
WLAN n 20 MHz	mid	U-NII-1	22.2
WLAN n 20 MHz	high	U-NII-1	22.4
WLAN n 40 MHz	low	U-NII-1	40.7
WLAN n 40 MHz	high	U-NII-1	40.7
WLAN ac 20 MHz	low	U-NII-1	22.2
WLAN ac 20 MHz	mid	U-NII-1	22.2
WLAN ac 20 MHz	high	U-NII-1	22.2
WLAN ac 40 MHz	low	U-NII-1	40.8
WLAN ac 40 MHz	high	U-NII-1	40.8
WLAN ac 80 MHz	mid	U-NII-1	84.0

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Sub-band = U-NII-1
(S01_AE01)

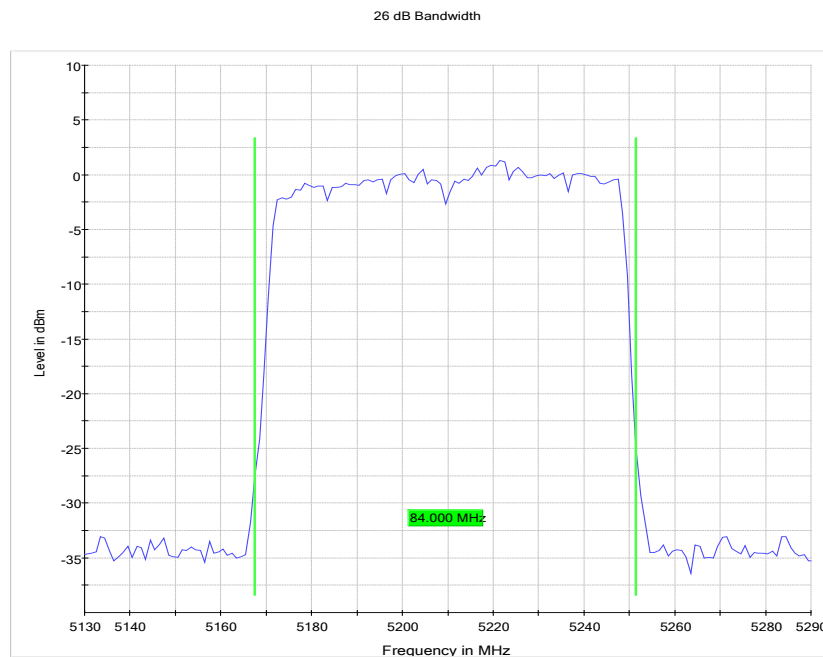

Setting	Instrument Value	Target Value
Start Frequency	5.13000 GHz	5.13000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	~ 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
Sweeptime	22.754 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	46 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.30 dB

5.2.5 TEST EQUIPMENT USED

- R&S TS8997

5.3 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): approx. ≥ 1 % of the span, but not below
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 40 / 80 / 160 MHz (for 20 / 40 / 80 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweeptime: 20 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

5.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit.

5.3.3 TEST PROTOCOL


Ambient temperature: 24 °C
Air Pressure: 1010 hPa
Humidity: 40 %

Radio Technology	Operating Frequency	Sub-band	99 % Bandwidth [MHz]
WLAN a	low	U-NII-1	17.9
WLAN a	mid	U-NII-1	17.9
WLAN a	high	U-NII-1	17.9
WLAN n 20 MHz	low	U-NII-1	17.8
WLAN n 20 MHz	mid	U-NII-1	18.8
WLAN n 20 MHz	high	U-NII-1	18.8
WLAN n 40 MHz	low	U-NII-1	36.7
WLAN n 40 MHz	high	U-NII-1	36.8
WLAN ac 20 MHz	low	U-NII-1	18.8
WLAN ac 20 MHz	mid	U-NII-1	18.7
WLAN ac 20 MHz	high	U-NII-1	18.8
WLAN ac 40 MHz	low	U-NII-1	36.9
WLAN ac 40 MHz	high	U-NII-1	36.8
WLAN ac 80 MHz	mid	U-NII-1	76.6

Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Sub-band = U-NII-1
(S01_AE01)

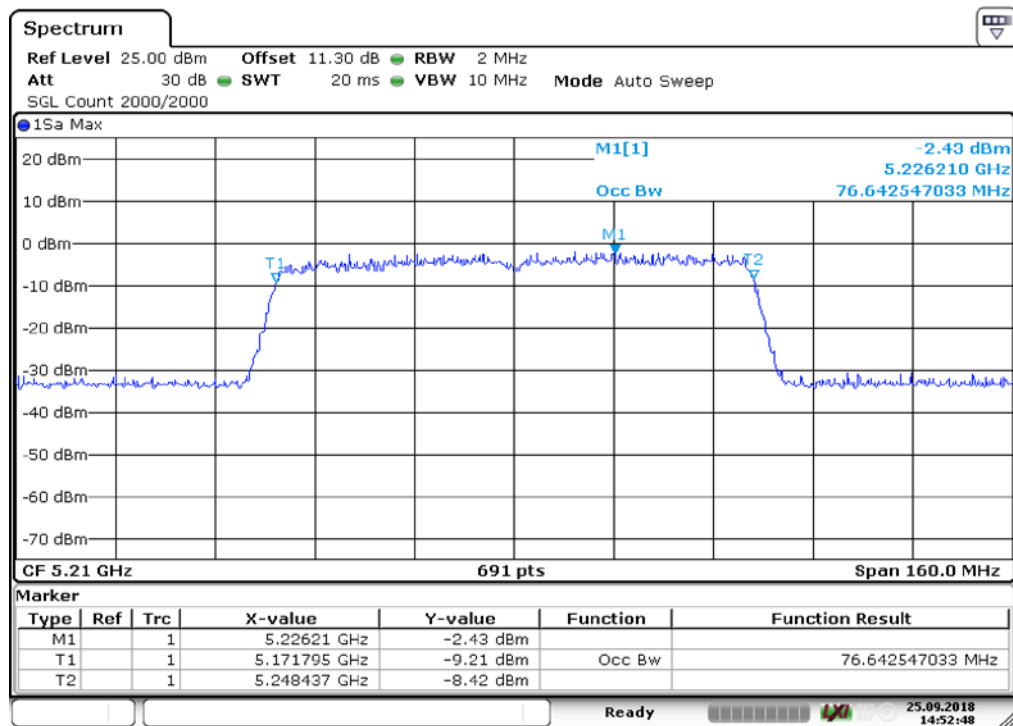

Date: 25.SEP.2018 14:52:48

5.3.5 TEST EQUIPMENT USED

- R&S TS8997

5.4 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The EUT was connected to the wideband gated RMS power meter via a short coax cable with a known loss.

Note:

Method **PM-G** (Measurement using a gated RF average power meter) used according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02".

5.4.2 TEST REQUIREMENTS / LIMITS

A) FCC

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or $4 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$ whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or $11 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$ whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or $17 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$ whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or $10 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or $17 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or $23 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

5.4.3 TEST PROTOCOL

Ambient temperature: 24 °C
 Air Pressure: 1010 hPa
 Humidity: 40 %
 WLAN a-Mode; 20 MHz; 6 Mbps

U-NII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	36	5180	12.1	17.2	30.0	17.9	N/A		22.5	5.3	1)
	44	5220	11.9	17.0	30.0	18.1	N/A		22.5	5.5	1)
	48	5240	12.1	17.2	30.0	17.9	N/A		22.5	5.3	1)

WLAN n-Mode; 20 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	36	5180	10.9	16.0	30.0	19.1	N/A		22.5	6.5	1)
	44	5220	10.8	15.9	30.0	19.2	N/A		22.7	6.8	1)
	48	5240	11.0	16.1	30.0	19.0	N/A		22.7	6.6	1)

WLAN n-Mode; 40 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	38	5190	10.0	15.1	30.0	20.0	N/A		23.0	7.9	1)
	46	5230	10.2	15.3	30.0	19.8	N/A		23.0	7.7	1)

WLAN ac-Mode; 20 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	36	5180	10.1	15.2	30.0	19.9	N/A		22.7	7.5	1)
	44	5220	9.9	15.0	30.0	20.1	N/A		22.7	7.7	1)
	48	5240	10.0	15.1	30.0	20.0	N/A		22.7	7.6	1)

WLAN ac-Mode; 40 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	38	5190	10.1	15.2	30.0	19.9	N/A		23.0	7.8	1)
	46	5230	10.1	15.2	30.0	19.9	N/A		23.0	7.8	1)

WLAN ac-Mode; 80 MHz; MCS0; SISO


U-NII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	42	5210	9.6	14.7	30.0	20.4	N/A		23.0	8.3	1)

Remark:

1) = no additional limit applies related to the elevation.
 Please see next sub-clause for the measurement plot.

5.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN a, Operating Frequency = low, Sub-band = U-NII-1
(S01_AE01)

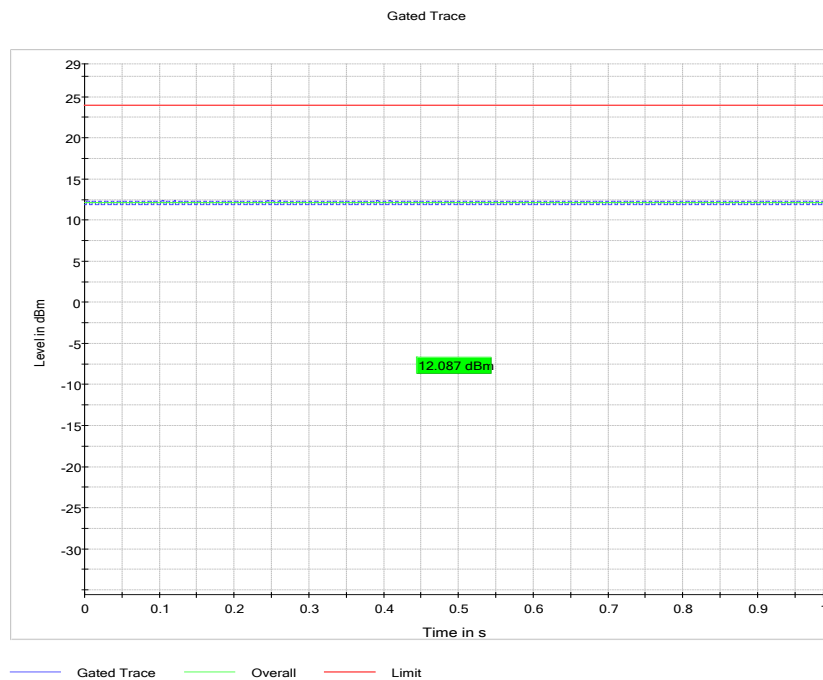

5.4.5 TEST EQUIPMENT USED

- R&S TS8997

5.5 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweep time: 2 s
- Detector: RMS

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1 Alternative**.

5.5.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz. This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:

Limit: 30 dBm/500 kHz.

5.5.3 TEST PROTOCOL

Ambient temperature: 24 °C
Air Pressure: 1010 hPa
Humidity: 40 %
WLAN a-Mode; 20 MHz; 6 Mbps

U-NII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm / MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPD
1	36	5180	0.4	17.0	16.6	10.0	4.5	5.5
	44	5220	0.0	17.0	17.0	10.0	4.9	5.1
	48	5240	0.2	17.0	16.8	10.0	4.7	5.3

WLAN n-Mode; 20 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm / MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPD
1	36	5180	-1.0	17.0	18.0	10.0	5.9	4.1
	44	5220	-1.3	17.0	18.3	10.0	6.2	3.8
	48	5240	-1.2	17.0	18.2	10.0	6.1	3.9

WLAN n-Mode; 40 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm / MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPD
1	38	5190	-4.7	17.0	21.7	10.0	9.6	0.4
	46	5230	-4.9	17.0	21.9	10.0	9.8	0.2

WLAN ac-Mode; 20 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm / MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPD
1	36	5180	-1.8	17.0	18.8	10.0	6.7	3.3
	44	5220	-2.3	17.0	19.3	10.0	7.2	2.8
	48	5240	-2.2	17.0	19.2	10.0	7.1	2.9

WLAN ac-Mode; 40 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm / MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPD
1	38	5190	-4.7	17.0	21.7	10.0	9.6	0.4
	46	5230	-4.9	17.0	21.9	10.0	9.8	0.2


WLAN ac-Mode; 80 MHz; MCS0; SISO

U-NII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm / MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPD
1	42	5210	-8.3	17.0	25.3	10.0	13.2	-3.2

Remark: Please see next sub-clause for the measurement plot.

5.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN a, Operating Frequency = low, Sub-band = U-NII-1 (S01_AE01)

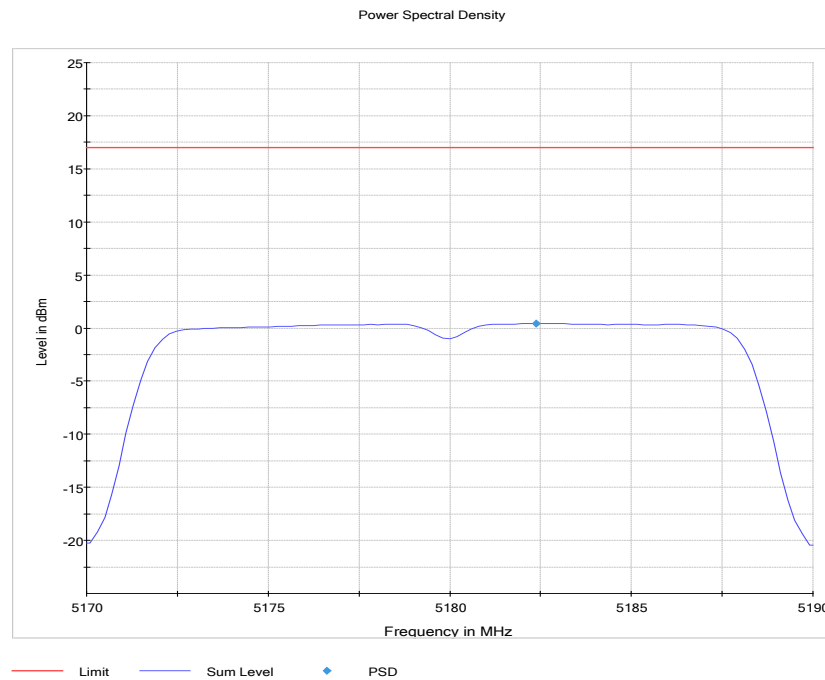

Setting	Instrument Value	Target Value
Start Frequency	5.17000 GHz	5.17000 GHz
Stop Frequency	5.19000 GHz	5.19000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	101	~ 40
SweepTime	2.020 s	2.020 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 15	max. 15
Stable	3 / 3	3
Max Stable Difference	0.03 dB	0.30 dB

5.5.5 TEST EQUIPMENT USED

- R&S TS8997

5.6 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.6.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: –180° to 90°
- Turntable step size: 90°

- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^\circ$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^\circ$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90° .

The turn table step size (azimuth angle) for the preliminary measurement is 45° .

Above 26 GHz the measurement distance is reduced to 1 m.

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna in step 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

5.6.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: –17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (2), Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2 (2), Emissions outside the band 5250-5350 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3 (2), Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4 (2), Emissions outside the band 5725-5825 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5715–5835 MHz and additionally

Limit: –17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5825–5835 MHz.

C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8) @ 300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0) @ 30m
1.705 – 30	30@30m	3	29.5 @30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a “Restricted Band” according FCC §§15.205 and 15.209 *)

UE – “Undesirable Emission Limit” according FCC §15.407

BE-RB – Band Edge Limit basing on “Restricted Band Limits”

BE-UE – Band Edge Limit basing on “Undesirable Emission Limit”

*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

5.6.3 TEST PROTOCOL

Ambient temperature: 22-26°C
 Air Pressure: 1010-1019 hPa
 Humidity: 30-38 %
 WLAN a-Mode; 20 MHz; 6 Mbps
 Applied duty cycle correction (AV): 0.1 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
36	5180	180.4	41.7	QP	120	43.5	1.8	UE
48	5240	-	-	-	-	-	> 6	-
44	5220	180.4	41.7	QP	120	43.5	1.9	UE
48	5240	180.4	42.3	QP	120	43.5	1.2	UE

WLAN n-Mode; 20 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.1 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
36	5180	-	-	-	-	-	> 6	-
44	5220	-	-	-	-	-	> 6	-
48	5240	-	-	-	-	-	> 6	-

WLAN n-Mode; 40 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.2 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
38	5190	180.4	41.8	QP	100	43.5	1.7	RB
46	5230	180.4	40.9	QP	100	43.5	2.6	RB


WLAN ac-Mode; 40 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.2 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
38	5190	-	-	-	-	-	> 6	-
46	5230	-	-	-	-	-	> 6	-


Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 9kHz - 30MHz, Sub-band = U-NII-1
(S01_AA01)

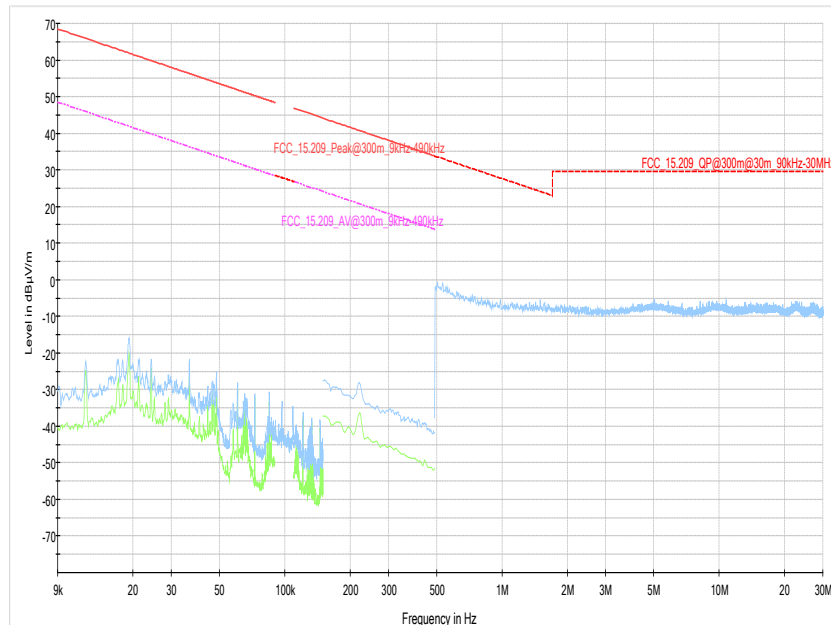


Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 9kHz - 30MHz, Sub-band = U-NII-1
(S01_AG02)

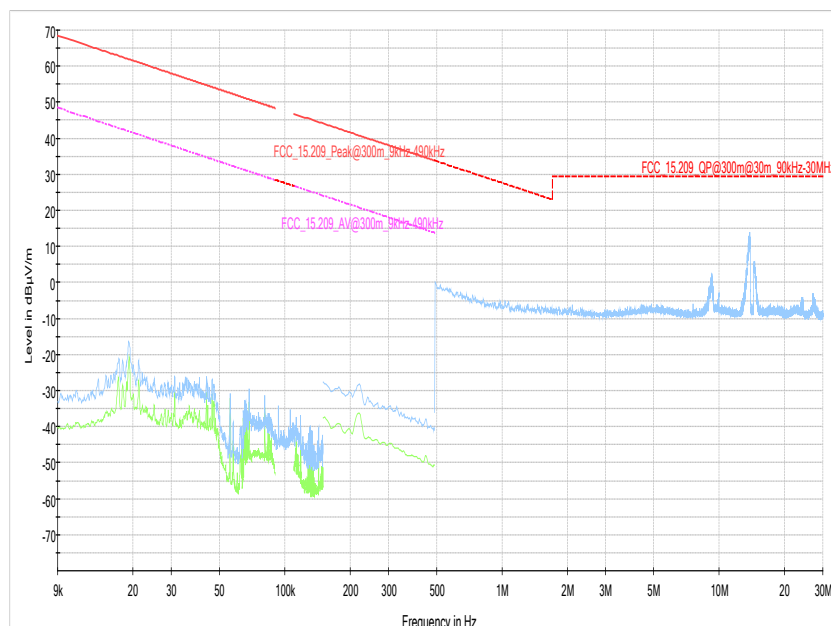

Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 30MHz - 1GHz, Sub-band = U-NII-1
(S01_AA01)

Test Description: Radiated Emissions, Test Site: Semi Anechoic Chamber @ 3 m
Test Standard: FCC §15.209, ANSI C63.10
EUT / Setup Code: DE1321000aa01
Operating Conditions: 120 V, 60 Hz, WLAN 5 GHz, Ch. 48, 6 Mbps, 14 dBm
Comment: -
Legend: Trace: blue = PK, green = QP, Star: red or blue = critical frequency;
Rhombus: blue = final QP

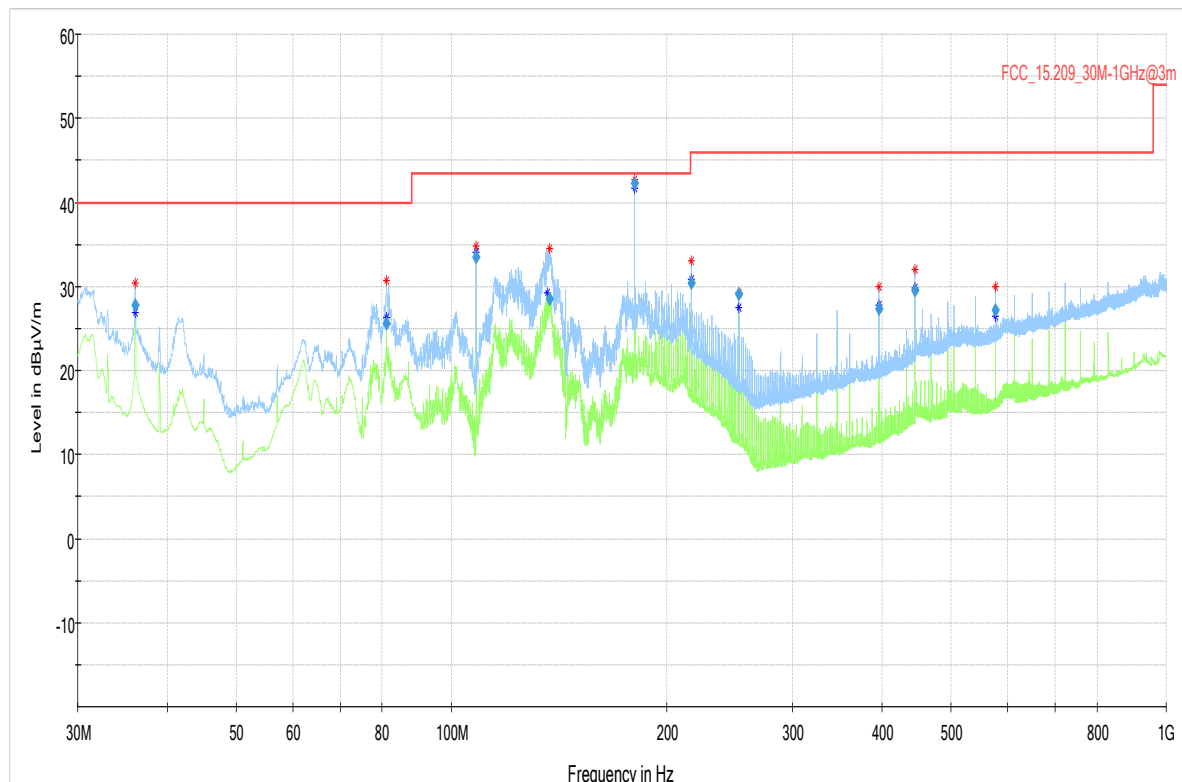


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
36.090000	27.84	40.00	12.16	1000.0	120.000	103.0	V	-133.0	15.9	
81.120000	25.59	40.00	14.41	1000.0	120.000	100.0	V	-6.0	10.2	
108.270000	33.45	43.50	10.05	1000.0	120.000	115.0	V	-5.0	11.1	
137.280000	28.55	43.50	14.95	1000.0	120.000	106.0	V	90.0	10.1	
180.420000	42.29	43.50	1.21	1000.0	120.000	104.0	V	-177.0	10.1	
216.510000	30.39	46.00	15.61	1000.0	120.000	105.0	V	-3.0	10.1	
252.600000	29.05	46.00	16.95	1000.0	120.000	100.0	V	14.0	11.5	
396.000000	27.32	46.00	18.68	1000.0	120.000	106.0	H	4.0	16.0	
445.500000	29.53	46.00	16.47	1000.0	120.000	102.0	H	-166.0	17.2	
577.380000	27.13	46.00	18.87	1000.0	120.000	116.0	V	-171.0	19.8	

Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 30MHz - 1GHz, Sub-band = U-NII-1
(S01_AG02)

Test Description: Radiated Emissions, Test Site: Semi Anechoic Chamber @ 3 m
Test Standard: FCC §15.209, ANSI C63.10
EUT / Setup Code: DE1321000ag02
Operating Conditions: 120 V, 60 Hz, WLAN 5 GHz, Ch. 48, 6 Mbps, 14 dBm
Comment: -
Legend: Trace: blue = PK, green = QP, Star: red or blue = critical frequency;
Rhombus: blue = final QP

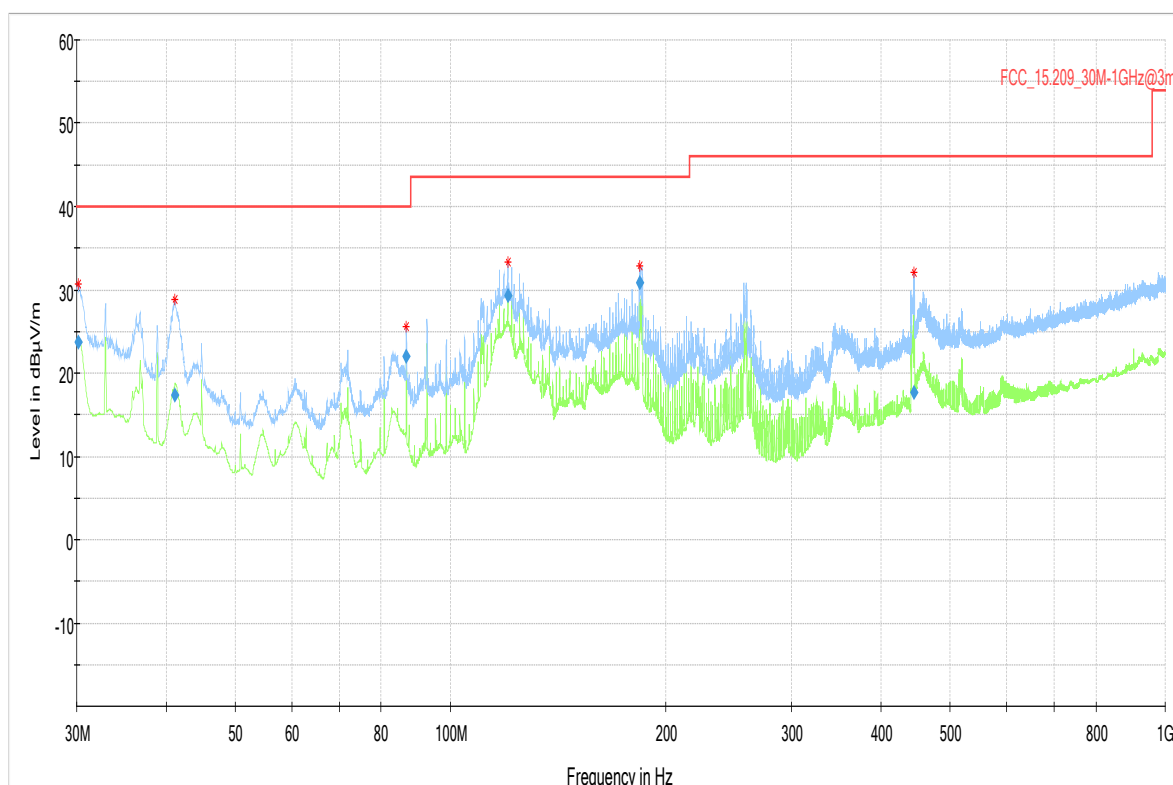


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.120000	23.66	40.00	16.34	1000.0	120.000	108.0	V	52.0	19.2	
41.190000	17.35	40.00	22.65	1000.0	120.000	116.0	V	-23.0	13.0	
86.760000	21.94	40.00	18.06	1000.0	120.000	103.0	V	-84.0	10.4	
120.300000	29.33	43.50	14.17	1000.0	120.000	104.0	V	-176.0	11.5	
183.840000	30.81	43.50	12.69	1000.0	120.000	102.0	V	0.0	9.5	
445.380000	17.72	46.00	28.28	1000.0	120.000	115.0	V	38.0	17.2	

Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 1GHz - 26GHz, Sub-band = U-NII-1
(S01_AA01)

Test Description:	Radiated Emissions, Test Site: Fully Anechoic Chamber @ 3 m
Test Standard	FCC §15.209, ANSI C63.10
EUT / Setup Code:	DE1321000aa01
Operating Conditions:	120 V, 60 Hz, WLAN 5 GHz, Ch. 48, 6 Mbps, 14 dBm
Comment:	-
Legend:	Trace: blue = PK, green = CISPR AV; Star: red or blue = critical frequency; Rhombus: blue = final Peak, green = final CISPR AV

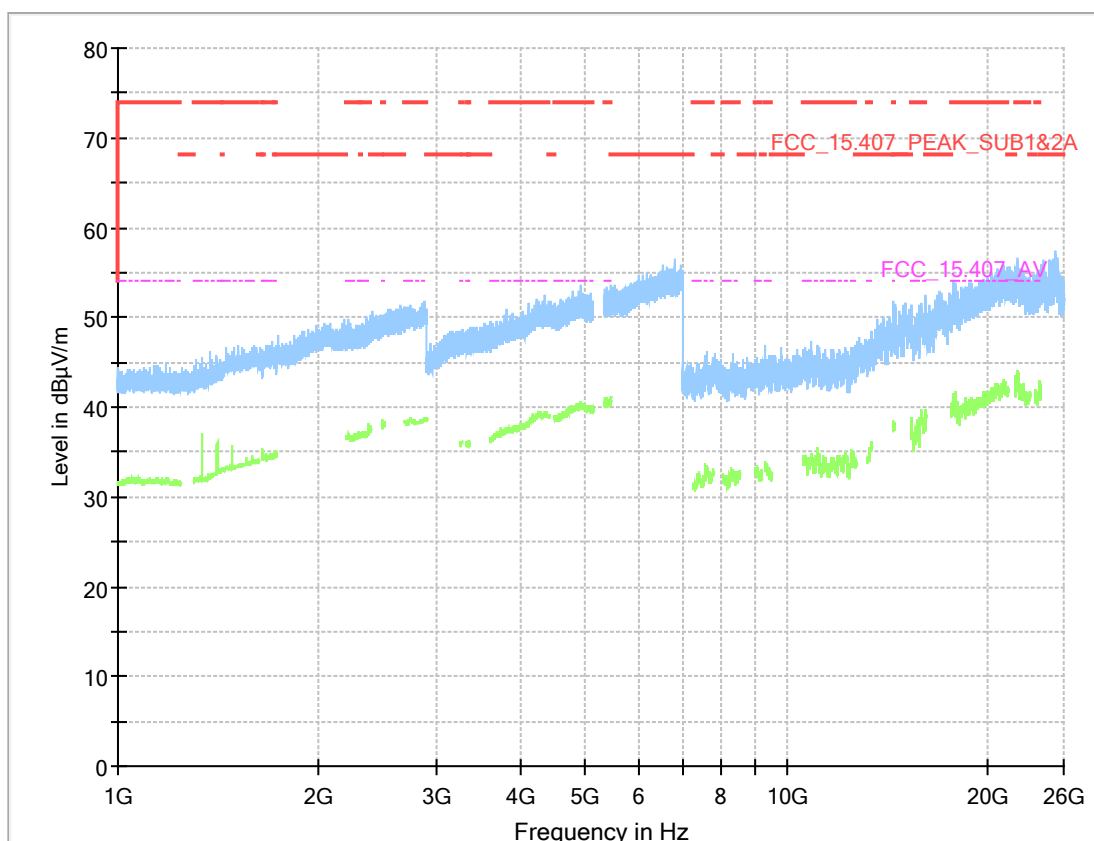


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
---	---	---	---	---	---	---	---	---	---	---

Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 1GHz - 26GHz, Sub-band = U-NII-1
(S01_AG02)


Test Description:	Radiated Emissions, Test Site: Fully Anechoic Chamber @ 3 m
Test Standard	FCC §15.209, ANSI C63.10
EUT / Setup Code:	DE1321000ag02
Operating Conditions:	120 V, 60 Hz, WLAN 5 GHz, Ch. 48, 6 Mbps, 14 dBm
Comment:	
Legend:	Trace: blue = PK, green = CISPR AV; Star: red or blue = critical frequency; Rhombus: blue = final Peak, green = final CISPR AV

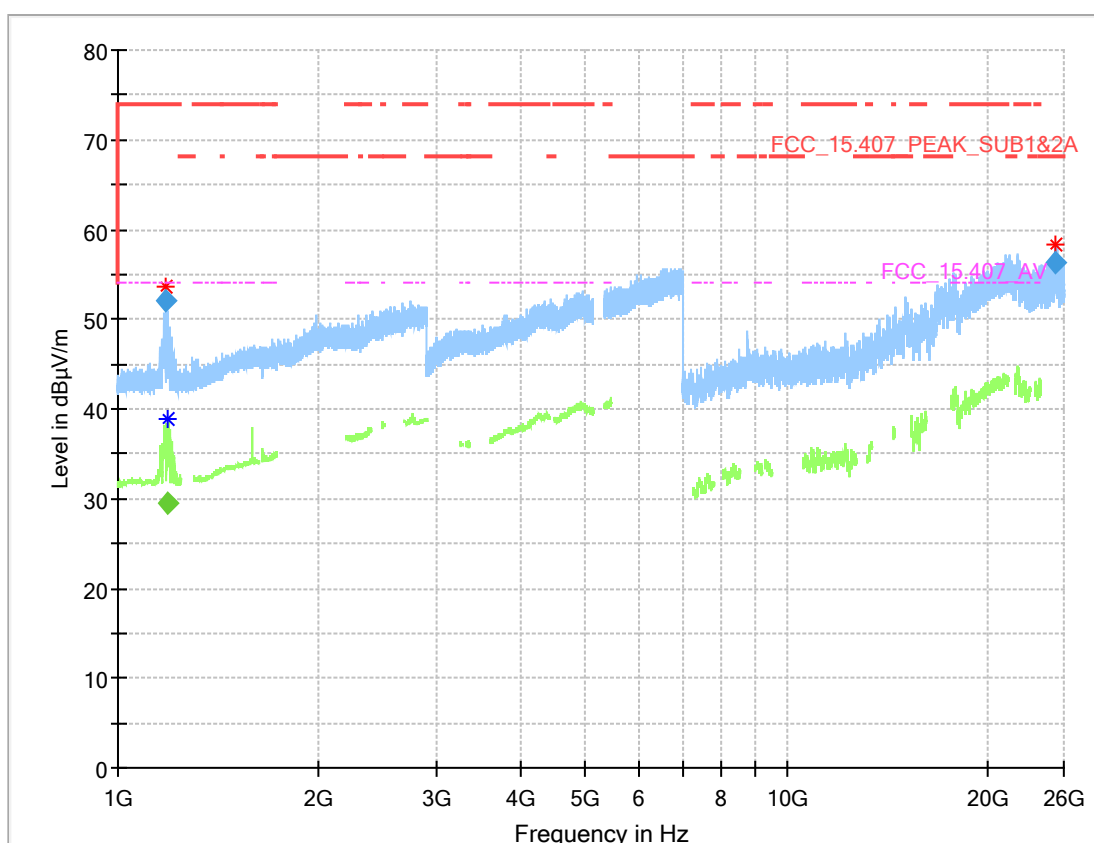

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Cor. (dB)
1181.320	52.0	---	74.00	21.96	1000.0	1000.000	150.0	V	140.0	15.0	-2.3
1185.520	---	29.6	54.00	24.41	1000.0	1000.000	150.0	V	132.0	-5.0	-2.3
25360.500	56.3	---	68.20	11.87	1000.0	1000.000	150.0	H	-34.0	15.0	22.6

Radio Technology = WLAN a, Operating Frequency = high,
Measurement range = 26GHz - 40GHz, Sub-band = U-NII-1
(S01_AA01)

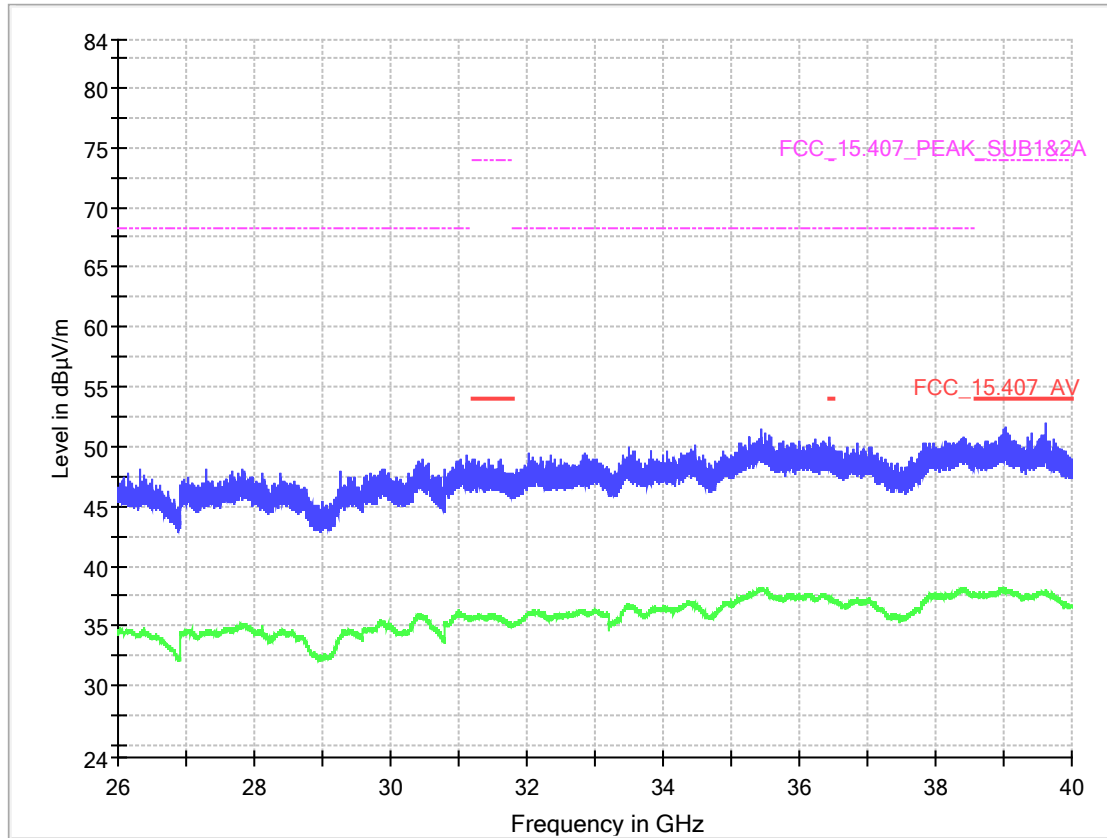

5.6.5 TEST EQUIPMENT USED

- Radiated Emissions

5.7 BAND EDGE

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.7.1 TEST DESCRIPTION

Please see test description for the test case “Spurious Radiated Emissions”

5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

5.7.3 TEST PROTOCOL

Ambient temperature: 22 - 24 °C
 Air Pressure: 1008 - 1017 hPa
 Humidity: 33 - 40 %
 WLAN a-Mode; 20 MHz; 6 Mbps
 Applied duty cycle correction (AV): 0.1 dB

U-NII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC / IC?
1	36	5180	5150.0	58.1	PEAK	1000	74.0	15.9	BE-RB	FCC&IC
	36	5180	5150.0	45.1	AV	1000	54.0	8.9	BE-RB	FCC&IC

WLAN n-Mode; 20 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.1 dB

U-NII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC / IC?
1	36	5180	5150.0	57.6	PEAK	1000	74.0	16.4	BE-RB	FCC&IC
	36	5180	5150.0	44.3	AV	1000	54.0	9.7	BE-RB	FCC&IC

WLAN n-Mode; 40 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.2 dB

U-NII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC / IC?
1	38	5190	5150.0	63.2	PEAK	1000	74.0	10.8	BE-RB	FCC&IC
	38	5190	5150.0	48.0	AV	1000	54.0	6.0	BE-RB	FCC&IC

WLAN ac-Mode; 20 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.1 dB

U-NII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC / IC?
1	36	5180	5150.0	56.0	PEAK	1000	74.0	18.0	BE-RB	FCC&IC
	36	5180	5150.0	43.6	AV	1000	54.0	10.4	BE-RB	FCC&IC

WLAN ac-Mode; 40 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0.2 dB

U-NII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC / IC?
1	38	5190	5150.0	61.6	PEAK	1000	74.0	12.4	BE-RB	FCC&IC
	38	5190	5150.0	46.9	AV	1000	54.0	7.1	BE-RB	FCC&IC


WLAN ac-Mode; 80 MHz; MCS0; SISO
Applied duty cycle correction (AV): 0.2 dB

U-NII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC / IC?
1	42	5210	5150.0	57.3	PEAK	1000	74.0	16.7	BE-RB	FCC&IC
	42	5210	5150.0	44.7	AV	1000	54.0	9.3	BE-RB	FCC&IC

Remark: Please see next sub-clause for the measurement plot.

5.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n, BW = 40 MHz; MCS0; SISO
Operating Frequency = high, Sub-band = U-NII-1
(S01_AG02)

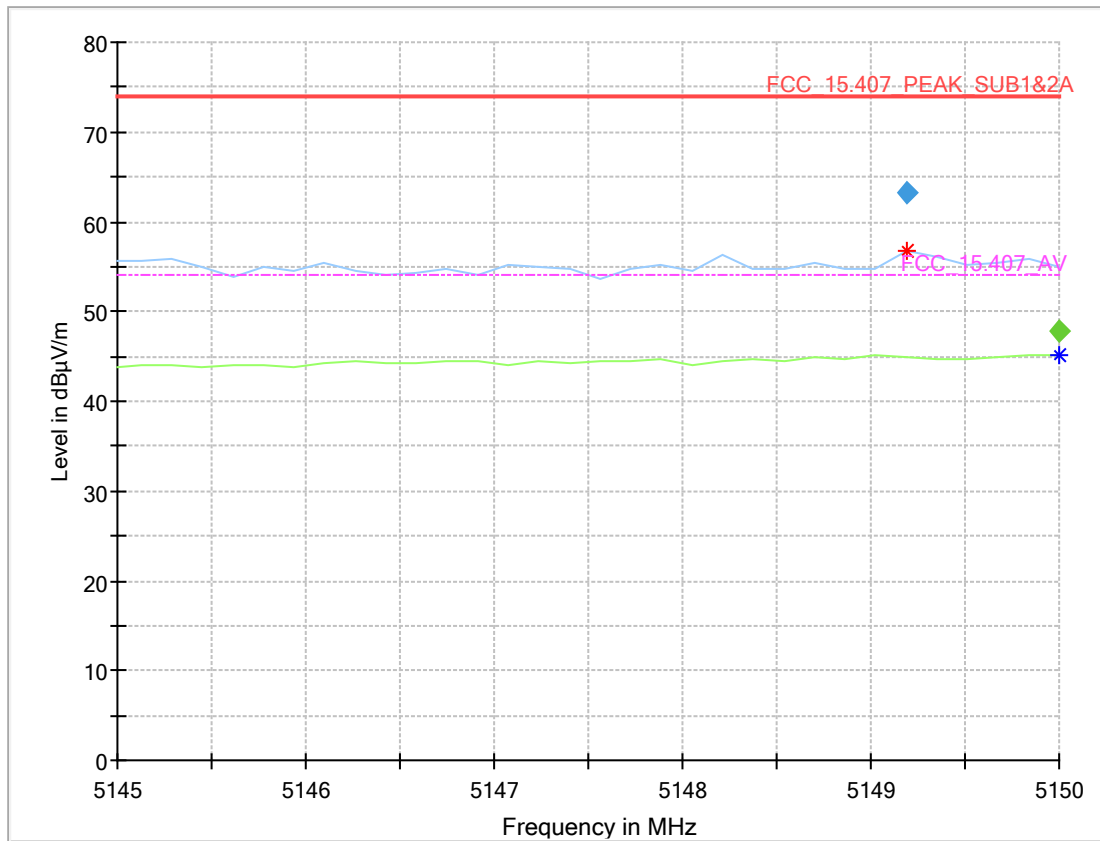

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
5149.188	63.2	---	74.00	10.80	1000.0	1000.000	150.0	H	134.0	88.0	11.9
5150.000	---	47.8	54.00	6.17	1000.0	1000.000	150.0	H	132.0	78.0	11.9

5.7.5 TEST EQUIPMENT USED

- Radiated Emissions

6 TEST EQUIPMENT

- 1 Conducted Emissions FCC
Conducted Emissions power line for FCC standards

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
1.2	ESW44	EMI Test Receiver	Rohde & Schwarz GmbH & Co. KG	101603	2018-05	2019-05
1.3	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
1.4	ESH3-Z5	Two-Line V-Network	Rohde & Schwarz	828304/029	2017-05	2019-05
1.5	EP 1200/B, NA/B1	Amplifier with integrated variable Oscillator	Spitzenberger & Spieß	B6278		
1.6	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
1.7	Shielded Room 02	Shielded Room for conducted testing, 12qm	Frankonia	-		
1.8	ESH3-Z5	Two-Line V-Network	Rohde & Schwarz	829996/002	2017-05	2019-05
1.9	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2017-01 2019-01	2019-01 2020-01
1.10	Opus10 THI (8152.00)	ThermoHygro Datalogger 02 (Environ)	Lufft Mess- und Regeltechnik GmbH	7489	2017-04	2019-04

- 2 R&S TS8997
EN300328/301893 Test Lab

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
2.2	MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2018-07	2019-07
2.3	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
2.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2018-04	2020-04
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
2.6	VHF-3100+	High Pass Filter		-		
2.7	VT 4002	Temperature Chamber	Vötsch	58566002150010	2018-04	2020-04
2.8	A8455-4	4 Way Power Divider (SMA)		-		

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.9	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufft Mess- und Regeltechnik GmbH	7482	2017-03	2019-03
2.10	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2016-10	2019-10
2.11	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz	101158	2018-05	2021-05

3 Radiated Emissions

Lab to perform radiated emission tests

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	NRV-Z1	Sensor Head A	Rohde & Schwarz GmbH & Co. KG	827753/005	2018-07	2019-07
3.2	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2016-10 2018-10	2018-10 2020-10
3.3	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
3.4	ESW44	EMI Test Receiver	Rohde & Schwarz GmbH & Co. KG	101603	2018-05	2019-05
3.5	Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	Frankonia	none	2018-06	2020-06
3.6	FS-Z60	Harmonic Mixer 40 - 60 GHz	Rohde & Schwarz Messgerätebau GmbH	100178	2016-12	2019-12
3.7	FS-Z220	Harmonic Mixer 140 - 220 GHz	Rohde & Schwarz Messgerätebau GmbH	101005	2017-03	2020-03
3.8	SGH-05	Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz)	RPG-Radiometer Physics GmbH	075		
3.9	HL 562	Ultralog new biconicals	Rohde & Schwarz	830547/003	2018-07	2021-07
3.10	5HC2700/12750-1.5-KK	High Pass Filter	Trilithic	9942012		
3.11	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
3.12	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2018-06	2020-06
3.13	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
3.14	NRVD	Power Meter	Rohde & Schwarz GmbH & Co. KG	828110/016	2018-07	2019-07
3.15	HF 906	Double-ridged horn	Rohde & Schwarz	357357/002	2015-09 2018-09	2018-09 2021-09
3.16	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.17	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2019-02	2021-02
3.18	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
3.19	SGH-19	Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)	RPG-Radiometer Physics GmbH	093		
3.20	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
3.21	4HC1600/12750-1.5-KK	High Pass Filter	Trilithic	9942011		
3.22	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
3.23	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
3.24	TT 1.5 WI	Turn Table	Maturo GmbH	-		
3.25	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz	100609	2016-04	2019-04
3.26	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03
3.27	FS-Z325	Harmonic Mixer 220 - 325 GHz	Rohde & Schwarz Messgerätebau GmbH	101006	2017-03	2020-03
3.28	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
3.29	SGH-08	Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)	RPG-Radiometer Physics GmbH	064		
3.30	SGH-12	Standard Gain / Pyramidal HornAntenna (60 - 90 GHz)	RPG-Radiometer Physics GmbH	326		
3.31	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008		
3.32	FS-Z140	Harmonic Mixer 90 -140 GHz	Rohde & Schwarz Messgerätebau GmbH	101007	2017-02	2020-02
3.33	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
3.34	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2017-03	2019-03
3.35	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2017-01 2019-01	2019-01 2020-01
3.36	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
3.37	AS 620 P	Antenna mast	HD GmbH	620/37		
3.38	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709		

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.39	SGH-03	Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz)	RPG-Radiometer Physics GmbH	060		
3.40	FS-Z90	Harmonic Mixer 60 - 90 GHz	Rohde & Schwarz Messgerätebau GmbH	101686	2017-03	2020-03
3.41	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01
3.42	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
3.43	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
3.44	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/11920513		
3.45	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2018-07	2021-07

The calibration interval is the time interval between “Last Calibration” and “Calibration Due”

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB attenuator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF	Corr.	cable loss 1	cable loss 2	cable loss 3	cable loss 4	distance	d _{Limit}	d _{used}
MHz	dB (1/m)	dB	(inside chamber)	(outside chamber)	(switch unit)	(to receiver)	corr. (-40 dB/decade)	(meas. distance (limit))	(meas. distance (used))
			dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{Limit} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance limit)	d_{used} (meas. distance used)
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{Limit} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 $Corr.$ = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
distance correction = $-20 * \text{LOG} (d_{Limit} / d_{used})$
Linear interpolation will be used for frequencies in between the values in the table.
Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency	AF EMCO 3160-10	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d _{Limit} (meas. distance (limit))	d _{used} (meas. distance (used))
GHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 SETUP DRAWINGS

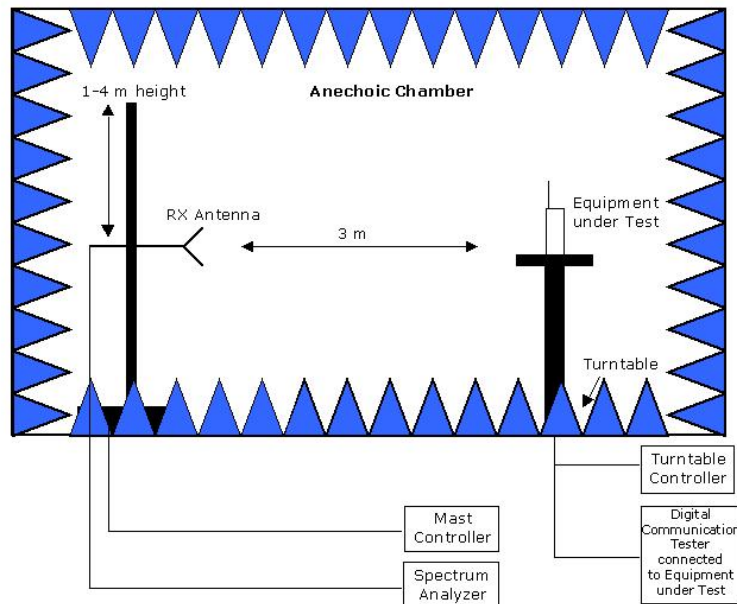

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

9 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

10 PHOTO REPORT

Please see separate photo report.