


STUNT DRIFT VEHICLE


Instruction Manual

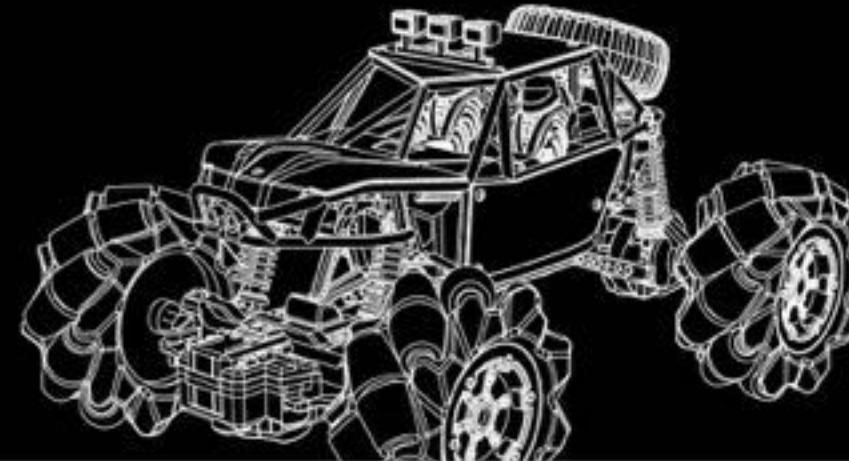

ITEM NO: II24II/II24I2

Batteries and Charging

Battery installation for transmitter

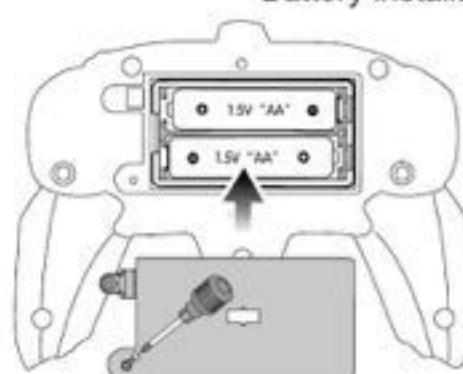


1. Loosen the screw in the battery compartment door with a Phillips screwdriver.
2. Install 2 x 1.5 V "AA" batteries with correct polarity (+/-) as shown inside the battery compartment.
3. Replace the battery door and tighten the screw.

Battery Safety Information

1. Battery requirement: vehicle requires 1 x 3.7V 500mAh rechargeable battery pack; transmitter requires 2 x 1.5 V "AA" non-rechargeable batteries.
2. Install and remove battery properly.
3. DO NOT recharge non-rechargeable batteries.
4. DO NOT mix old and new batteries or different types of batteries.
5. Use only batteries of the same or equivalent type as recommended.
6. Insert batteries with correct polarity.
7. Always remove exhausted batteries from the toy.
8. Rechargeable batteries are only to be charged under adult supervision.
9. Remove rechargeable batteries from the toy before charging.
10. DO NOT short-circuit the supply terminals.


Battery installation for vehicle

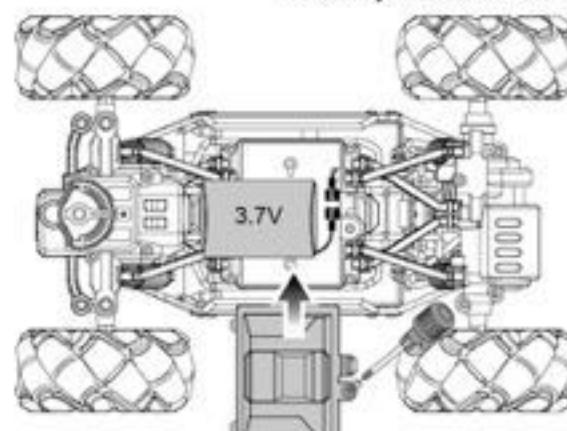

Note:
Only use chargers specifically designed to charge the included vehicle battery.


1. Loosen the screw and remove the battery door. Remove the exhausted battery pack and install a fully charged one, making sure the battery connected with correct polarity (+/-). Replace the battery door and tighten the screw.
2. Insert the battery pack into the USB charger, then plug the charger into a USB port.

How to play

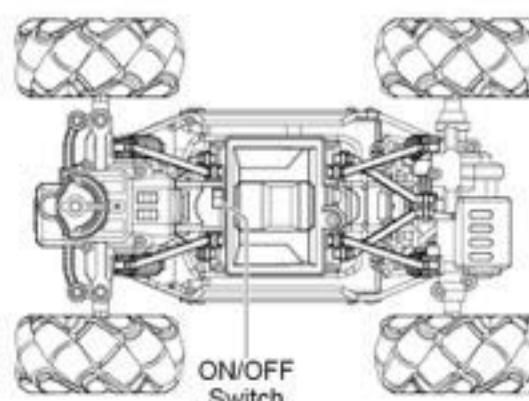


Power ON: Turn on the vehicle and then the transmitter. The light on transmitter will turn off to indicate the transmitter and the vehicle is linked.
Remote control distance: more than 20 meters.
Operating time: approx. 20-30 minutes with fully charged battery.


Note:
Always switch vehicle OFF and remove the battery when not in use to avoid reducing the life of the battery.

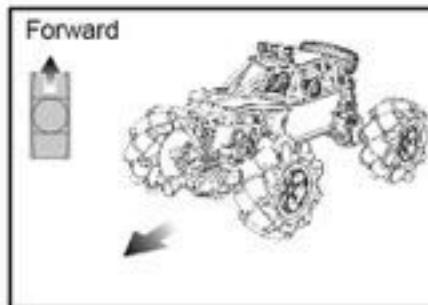


1. Forward
Push the left stick up to run forward. Push and hold the left stick up will make the vehicle keep driving forward.

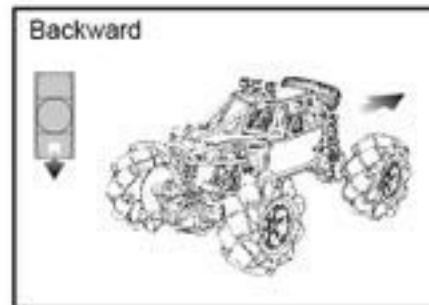


2. Backward
Push the left stick down to run backward. Push and hold the left stick down will make the vehicle keep driving backward.

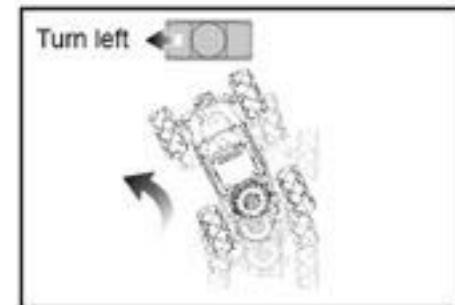


3. Turn left
Push the right stick to the left to turn left. Push and hold the right stick to the left will make the vehicle keep turning left.

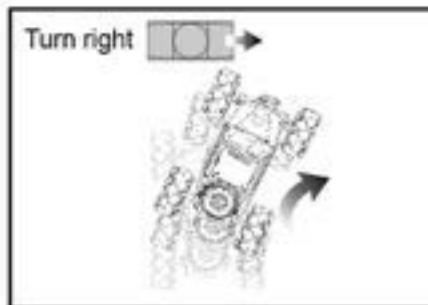


4. Turn right
Push the right stick to the right to turn right. Push and hold the right stick to the right will make the vehicle keep turning right.

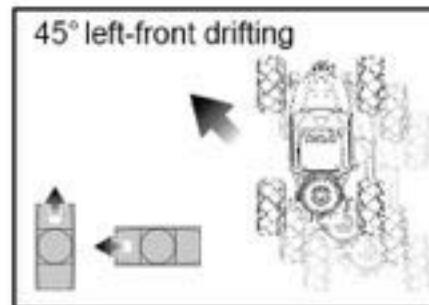


5. 45° left-front drifting
To make the vehicle drift to the left-front at an angle of 45 degrees, simultaneously push the left stick up and move the right stick to the left. Push and hold the left stick up and hold the right stick to the left, the vehicle will keep drifting to the left-front at an angle of 45 degrees.

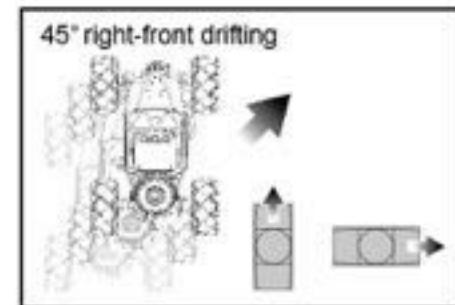


6. 45° right-front drifting
To make the vehicle drift to the right-front at an angle of 45 degrees, simultaneously push the left stick up and move the right stick to the right. Push and hold the left stick up and hold the right stick to the right, the vehicle will keep drifting to the right-front at an angle of 45 degrees.

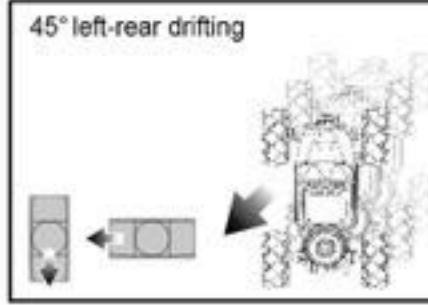


7. 45° left-rear drifting
To make the vehicle drift to the left-rear at an angle of 45 degrees, simultaneously push the left stick down and move the right stick to the left. Push and hold the left stick down and hold the right stick to the left, the vehicle will keep drifting to the left-rear at an angle of 45 degrees.

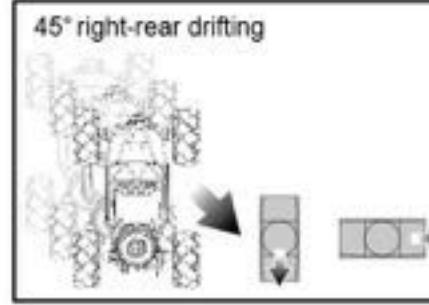

8. 45° right-rear drifting
To make the vehicle drift to the right-rear at an angle of 45 degrees, simultaneously push the left stick down and move the right stick to the right. Push and hold the left stick down and hold the right stick to the right, the vehicle will keep drifting to the right-rear at an angle of 45 degrees.

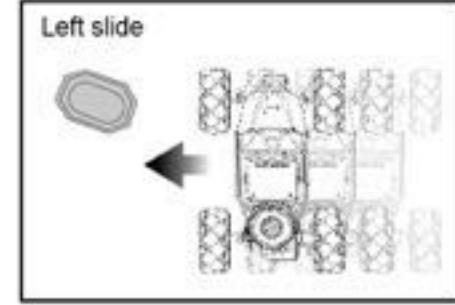

9. Left slide
Press the Left Function Button to make the vehicle slide to the left. Press and hold this button will make the vehicle keep sliding to the left.

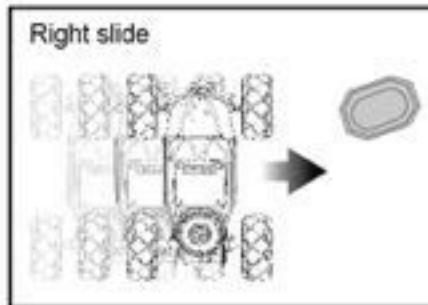

10. Right slide
Press the Right Function Button to make the vehicle slide to the right. Press and hold this button will make the vehicle keep sliding to the right.

Trouble Shooting Guide

PROBLEM	CAUSE	SOLUTION
Transmitter does not work	1. Batteries are installed incorrectly.	1. Check that the batteries are installed with correct polarity (+/-) as shown inside the battery compartment.
	2. The battery is low.	2. Replace new batteries.
	3. Vehicle is out of range of transmitter.	3. Ensure the distance of remote control within 30 meters, point transmitter at the vehicle.
	4. Fail to link transmitter with vehicle.	4. Remove and reinstall the batteries to the transmitter. Re-set the vehicle OFF to ON. Move the sticks on the transmitter to re-link transmitter and vehicle.
Vehicle does not work properly	1. Power switch is OFF.	1. Make sure the switch is in "ON" position.
	2. Fail to connect the battery pack to the vehicle with correct polarity.	2. Check that the battery pack is connected to the vehicle with correct polarity.
	3. The battery is low.	3. Recharge the rechargeable battery pack, or replace with a fully charged one.
	4. Voices and lights of the vehicle become faint.	4. Recharge the rechargeable battery pack, or replace with a fully charged one.
	5. Fail to link transmitter with vehicle.	5. Remove and re-install the batteries to the transmitter. Re-set the vehicle OFF to ON. Move the sticks on the transmitter to re-link transmitter and vehicle.



CHOKING HAZARD – Small Parts. Not for children under 3 years. Children should be supervised during play. Please keep this instruction manual for future reference, as it contains important information.

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.