

FCC TEST REPORT

FCC ID:2AT4N-H10

Report Number..... : ZKT-220214L0605E-1

Date of Test..... Feb. 12, 2022 to Feb. 17, 2022

Date of issue : Feb. 17, 2022

Total number of pages 62

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Hoozo Electronics co., Ltd

Address : Block B, Hengmingzhu Industrial Park; Qianjin Road, Xixiang, Bao'an District, Shenzhen City, China

Manufacturer's name : Shenzhen Hoozo Electronics co., Ltd

Address : Block B, Hengmingzhu Industrial Park; Qianjin Road, Xixiang, Bao'an District, Shenzhen City, China

Test specification:Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0**Test Report Form(s) Originator** : ZKT Testing**Master TRF** : Dated: 2022-02-17

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Tablet pcTrademark : FLYING TECH HOOZO WINSING LECTRUS IBBWB Vicbing TPZ
Tabtrust Justethan Wecool CNMF NINTAUS Lebang, XNN EEW
HHC AAUB

Model/Type reference : HZ0010(Series model reference page 9)

Ratings..... : AC100-240V,50/60Hz

Testing procedure and testing location:


Testing Laboratory: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature): Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature): Lake Xie



Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	12
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits.....	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD.....	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS.....	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD.....	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS.....	19
4.2.6 TEST RESULTS	20
5.RADIATED BAND EMISSIONMEASUREMENT	31
5.1 TEST REQUIREMENT:	31
5.2 TEST PROCEDURE.....	31
5.3 DEVIATION FROM TEST STANDARD	31
5.4 TEST SETUP.....	32
5.5 EUT OPERATING CONDITIONS	32
5.6 TEST RESULT	33
6.POWER SPECTRAL DENSITY TEST	35
6.1 APPLIED PROCEDURES / LIMIT	35
6.2 TEST PROCEDURE.....	35
6.3 DEVIATION FROM STANDARD	35
6.4 TEST SETUP.....	35
6.5 EUT OPERATION CONDITIONS	35

6.6 TEST RESULT	36
7. CHANNEL BANDWIDTH	44
7.1 APPLIED PROCEDURES / LIMIT	44
7.2 TEST PROCEDURE	44
7.3 DEVIATION FROM STANDARD	44
7.4 TEST SETUP	44
7.5 EUT OPERATION CONDITIONS	44
7.6 TEST RESULT	45
8. PEAK OUTPUT POWER TEST	48
8.1 APPLIED PROCEDURES/LIMIT	48
8.2 TEST PROCEDURE	48
8.3 DEVIATION FROM STANDARD	48
8.4 TEST SETUP	48
8.5 EUT OPERATION CONDITIONS	48
8.6 TEST RESULT	49
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	52
9.1 APPLICABLE STANDARD	52
9.2 TEST PROCEDURE	52
9.3 DEVIATION FROM STANDARD	52
9.4 TEST SETUP	52
9.5 EUT OPERATION CONDITIONS	52
9.6 TEST RESULTS	52
10. ANTENNA REQUIREMENT	61
11. TEST SETUP PHOTO	62
12. EUT CONSTRUCTIONAL DETAILS	62

1. VERSION

Report No.	Version	Description	Approved
ZKT-220214L0605E-1	Rev.01	Initial issue of report	Feb. 17, 2022

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Spurious Emission (Conducted) / Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Tablet pc
Model No.:	HZ0010,HZ0010F,HZ0010FA,HZ0010S,HZ0010SA,HZ0010GA,HZ0010G,HZ0010K,HZ0010KC,HZ0010KA,HZ0010EA,HZ0010E,HZ0010M,HZ0010MA,HZ0010MB,HZ0010H,HZ0010W,HZ0010HA,HZ0010WB,HZ0010L,HZ0010LA,HZ0010D,HZ0010DA,HZ0010DB,HZ0010DC,MZ10863,HZ0010JA,HZ0010J,HZ0010T,HZ0010P,HZ0010PB,HZ0010PA,HZ0010RB,HZ0010RA,HZ0010R,HZ0010Q,HZ0010QD,HZ0010QA,HZ0010QE,HZ0010U,HZ0010V,,F10A-1,F10H,F10B,F10B-1,F10S,F10C,F10K,F10L,F10D,F10F,F10A,F10J,F10M,F10E,F10G,F10V,F10W,F10P,F10P-1,F10Z,F10T,F10TB,F10R,F10I,F10Y,LECT-TAB1011F,LECT-TAB1011P,WSTB10X,WSTB10J,WM1001A,WM1001AA,WM1001AAG,WM1001AAGM,V10P,V10A,TP-10A,JE101,B10-A,B10-AA,TT100AB,TT100AB1,LECT-TAB1011G,LECT-TAB1011Q,WSTS10Y,WSTS10E,JE102,B10-B,B10-BB,WM1001D,WM1001DG,WM1001C,V10D,V10C,TP-10C,TT100AS,TT100AS-A,LECT-TAB1011H,LECT-TAB1011O,WSTB10A,WSTB10A-01,WSTB10G,WSTS10P,WSTB10AA,JE103,B10-C,B10-CA,WM1001P,WM1001PGM,WM1001J,WM1001JG,WM1001JD,V10H,V10HA,TP-10H,,TT100CB,LECT-TAB1011M,LECT-TAB1011N,WSTS10Z,WSTS10Z-01,WSTS10H,WSTS10Q,WSTS10ZA,JE104,B10-D,B10-DA,B10-Q,WM1001Q,WM1001QG,WM1001QD,V10M,V10MA,E10E,TP-10M,,TT100CS,WM1001E,WM1001EGM,WM1001EN,WSTB10D,WSTB10B,,LECT-TAB1011WB,JE105,B10-E,B10-Ea,V1001W,V10K,TP-10K,,TT100BH,WSTS10C,LECT-TAB1011WS,JE106,B10-F,B10-Fa,WM1001EY,V1001S,TP-10S,TT100BY,WSTB10F,LECT-TAB1011C,TT100ZBC,JE107,B10-J,WM1001-B,V10J,V10JJ,TP-10J,,TT100DB,LECT-K106,JE108,B10-H,WM1001K,TT1008B,,TT10083-B,WM1001Z,LECT-10A,T10G,F10V,B10-K,JE10D,F10W,TT100HB,A10E,C10F,,H10F,E10F,B10-P,B10-P1,B10-P1-GM,LECT-TAB1011R,TT100KB,TP-10T,TP-10B,WSTB10M,WSTB10T,JE109,JE109-1,LB-T01A1,LB-T01E1,LB-T01A,LB-T01A1-1,C10DA,C10D,N10D,E10DA,H10D,H10DB,A10D,A10D-gm,WM1001R,JE10C,WSTB10N,WSTB10NY,B10-X,B10-X1,B10-M,,LECT-TAB1011U,TP-10E,C10CA,C10C,N10A,N10A-2,E10A,H10A,A10A,A10A-gm,WM1001U,WM1001UG,LB-T01A2,TT100NB,B10-H,WSTB10K,F10T,TT100LB,LECT-TAB1011X,TP-10D,WSTB10K,JE10A,

	C10B, LB-T01B, LB-T01B1, N10B, E10B, E10B-new, H10BD, H10BA, A10B, A10B-gm, WM1001T, WM1001TG, TT100LBA, B10-VK, B10-VK-GM, WSTS10L, F10TB, JE10B, LECT-TAB1011Y, TP-10F, C10E, N10C, E10C, E10C-new, H10CA, A10C, A10C-gm, WM1001S, WM1001SG, TT100LB1, LB-T01B2, LECT-TAB1011Z, JE10R, F10R, B10R, B10R-GM, TT100RB, A10R, A10R-gm, WSTB10U, TP-10G, C10G, WM1001V, N10E, H10G, E10G, LB-T01D, F10I, JE10Z, B10I, B10I-GM3, TT100IB, WSTB10R, LB-T01D, A10G, C10H, WM1001W, TP-10L, H10H, E10H, N10F
Model Different.:	Only for different model name.
Serial No.:	N/A
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(CP8010)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPCB Antenna
Antenna gain:	1.0dBi
Power supply:	AC 110-240V 50/60Hz
SWITCHING POWER ADAPTER:	Model: K-T100502000U Input: 100-240V~ 50-60Hz 0.35A Max Output: 5V---2000mA
Battery:	DC3.7V 6000mAh

Page 16 of 17

Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps


Test Software	Realtek Test Tool
Power level setup	<8dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Tablet pc	FLYING TECH HOOZO WINSING LECTRUS IBBWB Victbing TPZ Tabtrust Justethan Wecool CNMF NINTAUS Lebang,XNN EEW HHC AAUB	CP801	N/A	EUT
E-2	Adapter	N/A	K-T100502000U		

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.2M	DC Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 22, 2021	Sep. 21, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

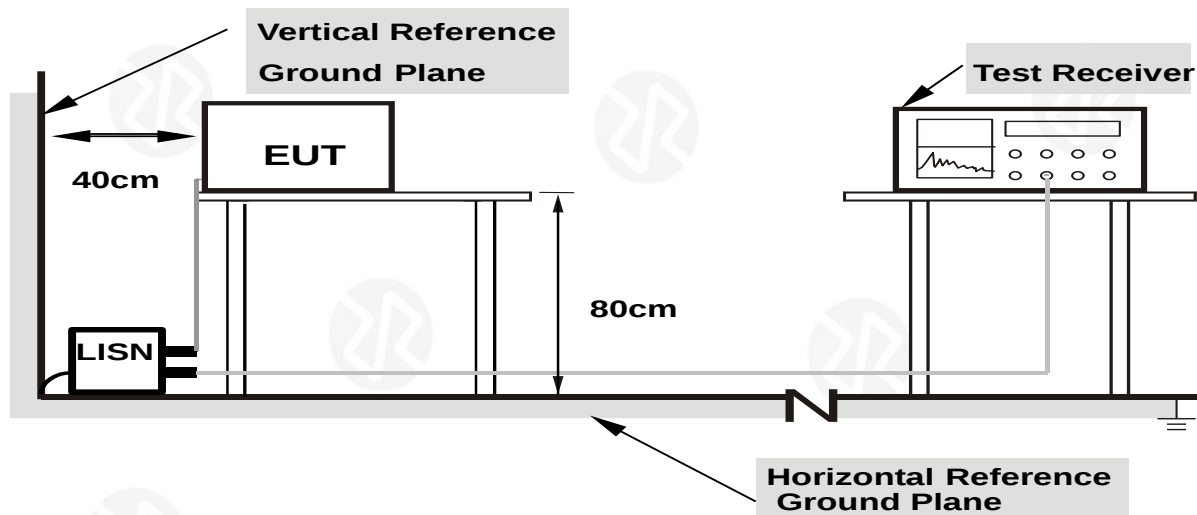

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

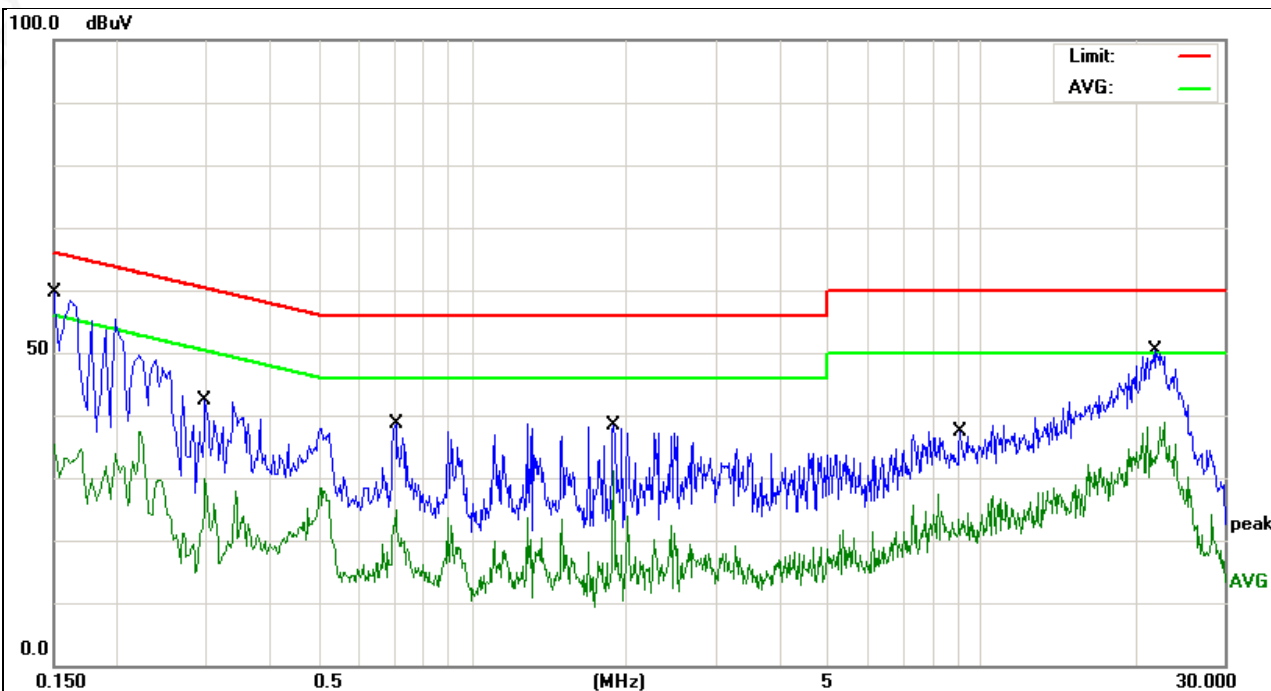


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1 *	0.1499	47.77	11.94	59.71	66.00	-6.29	QP	
2	0.1499	23.44	11.94	35.38	56.00	-20.62	AVG	
3	0.2980	32.02	10.23	42.25	60.30	-18.05	QP	
4	0.2980	19.64	10.23	29.87	50.30	-20.43	AVG	
5	0.7060	28.70	9.94	38.64	56.00	-17.36	QP	
6	0.7060	14.89	9.94	24.83	46.00	-21.17	AVG	
7	1.8900	28.33	9.96	38.29	56.00	-17.71	QP	
8	1.8900	21.11	9.96	31.07	46.00	-14.93	AVG	
9	9.0579	27.19	10.14	37.33	60.00	-22.67	QP	
10	9.0579	13.23	10.14	23.37	50.00	-26.63	AVG	
11	21.9780	48.60	1.89	50.49	60.00	-9.51	QP	
12	21.9780	31.95	1.89	33.84	50.00	-16.16	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

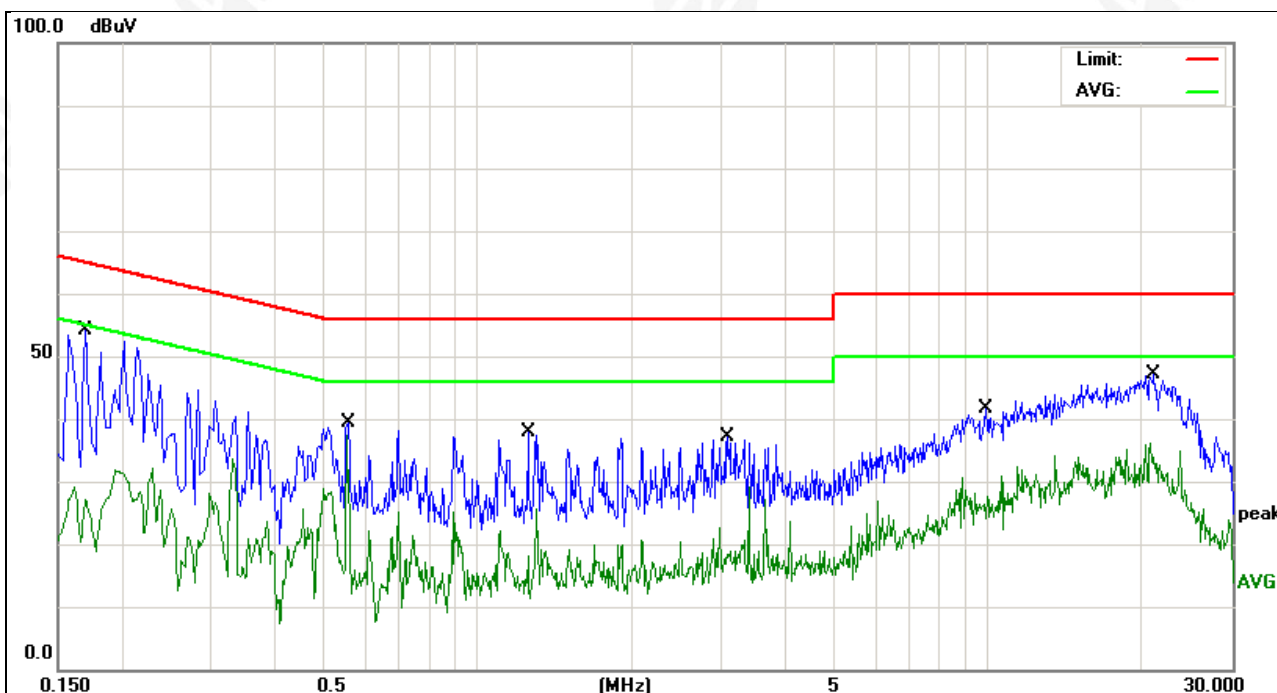

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1700	42.46	11.55	54.01	64.96	-10.95	QP	
2	0.1700	14.54	11.55	26.09	54.96	-28.87	AVG	
3	0.5580	29.35	9.97	39.32	56.00	-16.68	QP	
4 *	0.5580	27.35	9.97	37.32	46.00	-8.68	AVG	
5	1.2500	28.07	9.91	37.98	56.00	-18.02	QP	
6	1.2500	8.25	9.91	18.16	46.00	-27.84	AVG	
7	3.0820	27.22	9.98	37.20	56.00	-18.80	QP	
8	3.0820	8.35	9.98	18.33	46.00	-27.67	AVG	
9	9.8659	31.53	10.17	41.70	60.00	-18.30	QP	
10	9.9659	17.51	10.17	27.68	50.00	-22.32	AVG	
11	21.0500	45.29	1.79	47.08	60.00	-12.92	QP	
12	21.0500	32.05	1.79	33.84	50.00	-16.16	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

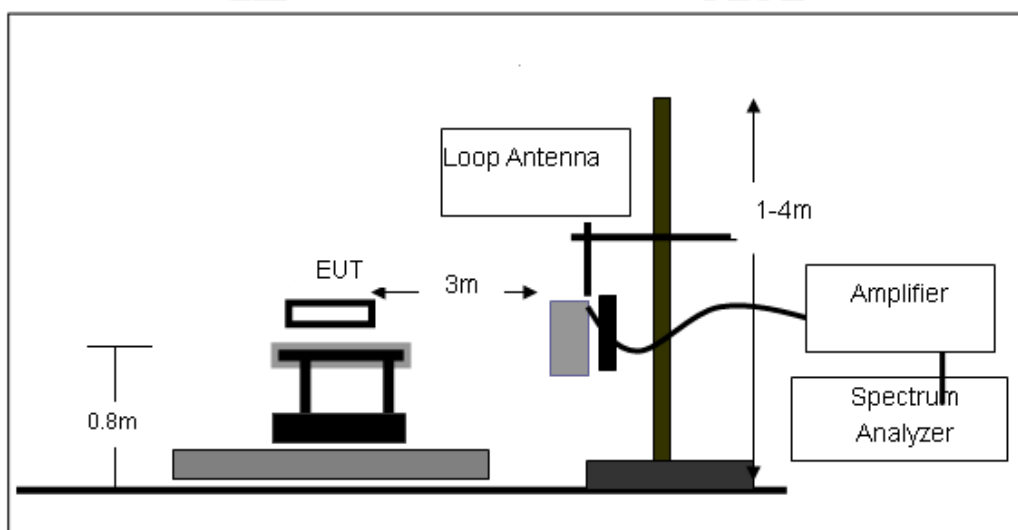

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

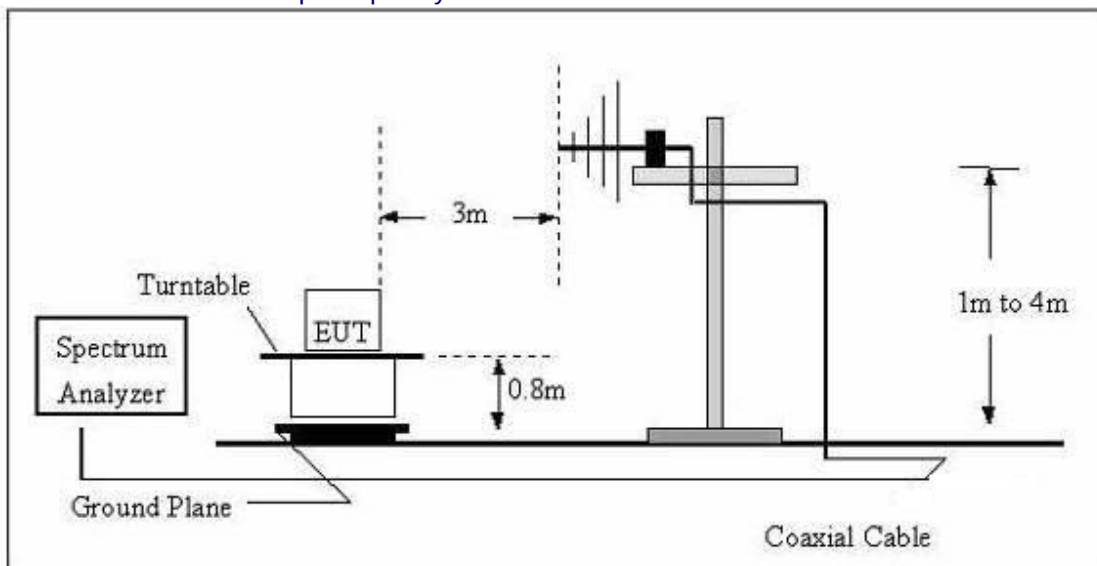

(C) Radiated Emission Test-Up Frequency Above 1GHz

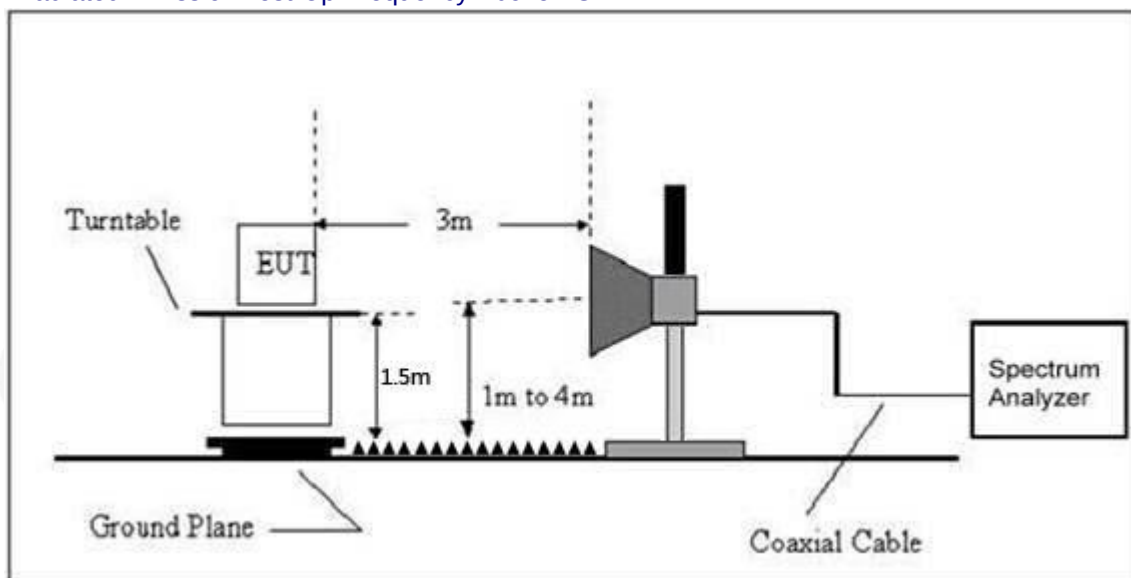

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

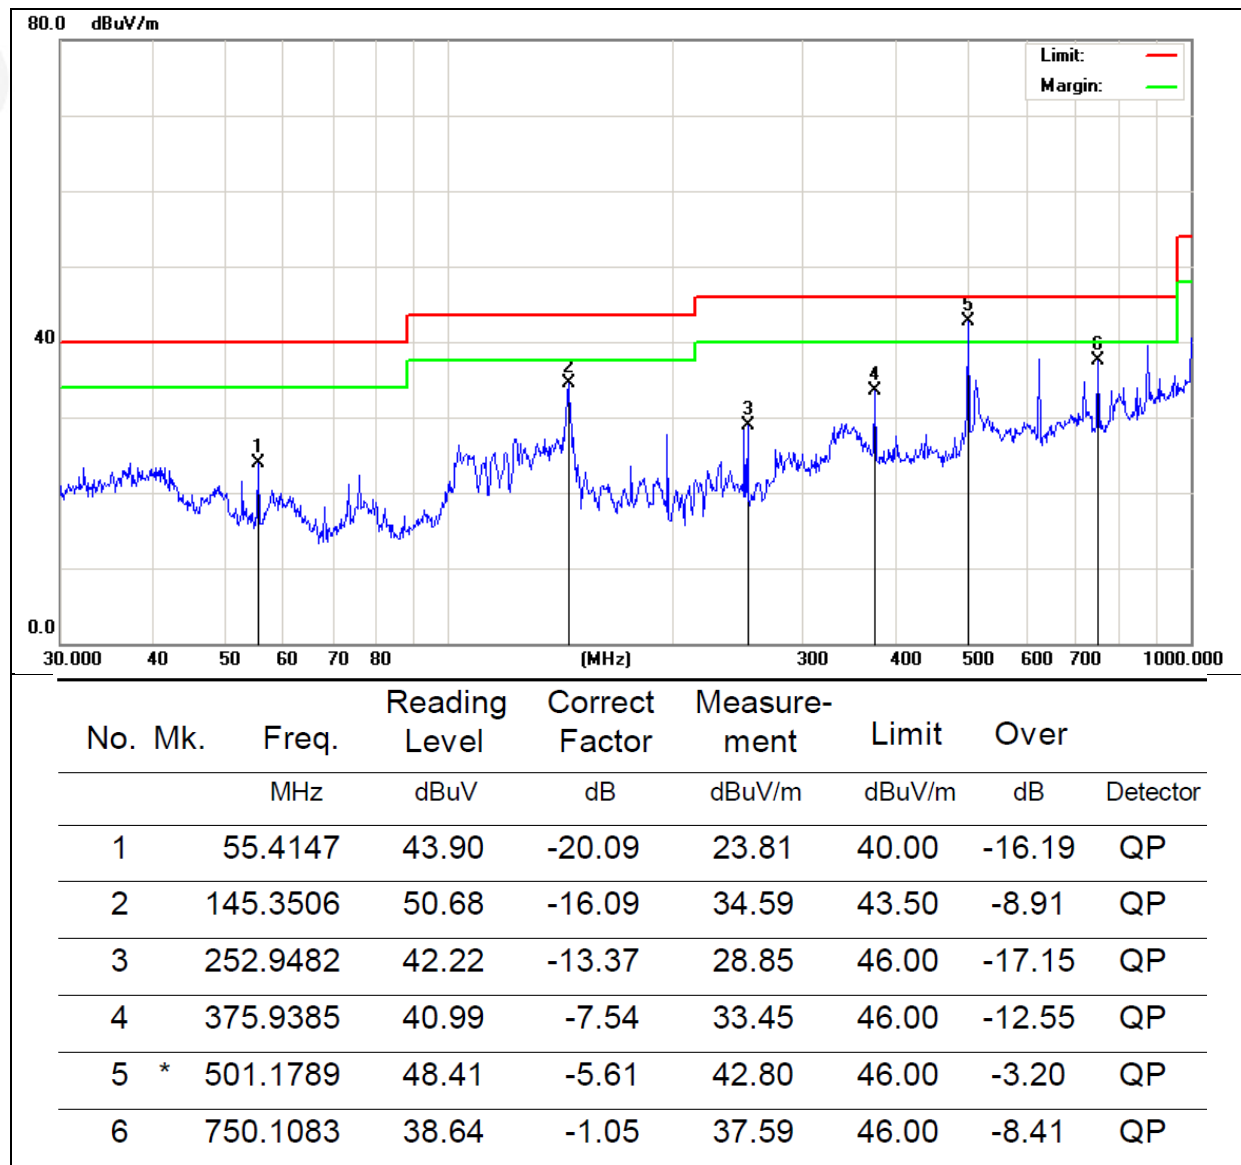

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

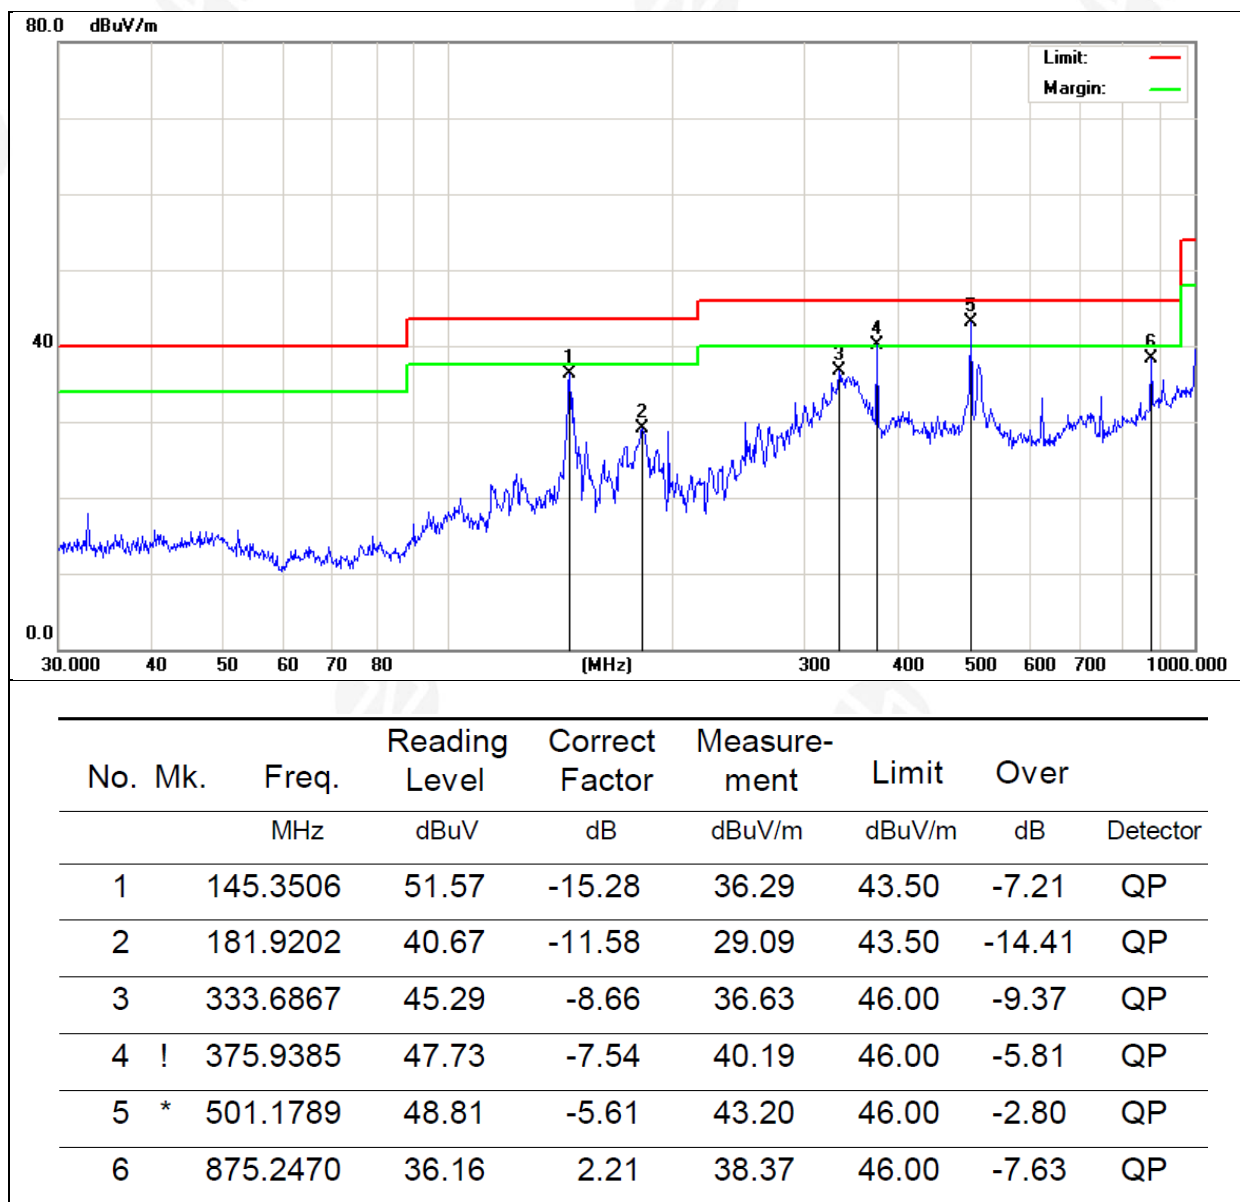

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b mode

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.20	30.55	5.77	31.12	57.54	74.00	-16.46	PK
V	4824.00	31.06	30.55	5.77	31.12	37.40	54.00	-16.60	AV
V	7236.00	49.29	30.33	6.32	36.00	61.28	74.00	-12.72	PK
V	7236.00	31.77	30.33	6.32	36.00	43.76	54.00	-10.24	AV
V	9648.00	49.79	30.85	7.45	37.14	63.53	74.00	-10.47	PK
V	9648.00	31.67	30.85	7.45	37.14	45.41	54.00	-8.59	AV
V	12060.00	44.89	31.02	8.99	39.10	61.96	74.00	-12.04	PK
V	12060.00	27.67	31.02	8.99	39.10	44.74	54.00	-9.26	AV
H	4824.00	51.54	30.55	5.77	31.12	57.88	74.00	-16.12	PK
H	4824.00	31.39	30.55	5.77	31.12	37.73	54.00	-16.27	AV
H	7236.00	50.18	30.33	6.32	36.00	62.17	74.00	-11.83	PK
H	7236.00	31.44	30.33	6.32	36.00	43.43	54.00	-10.57	AV
H	9648.00	50.18	30.85	7.45	37.14	63.92	74.00	-10.08	PK
H	9648.00	31.44	30.85	7.45	37.14	45.18	54.00	-8.82	AV
H	12060.00	45.18	31.02	8.99	39.10	62.25	74.00	-11.75	PK
H	12060.00	26.44	31.02	8.99	39.10	43.51	54.00	-10.49	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	49.18	30.55	5.77	31.45	55.85	74.00	-18.15	PK
V	4874.00	30.07	30.55	5.77	31.45	36.74	54.00	-17.26	AV
V	7311.00	47.71	30.33	6.32	36.10	59.80	74.00	-14.20	PK
V	7311.00	29.75	30.33	6.32	36.10	41.84	54.00	-12.16	AV
V	9748.00	47.78	30.85	7.45	36.50	60.88	74.00	-13.12	PK
V	9748.00	29.75	30.85	7.45	36.50	42.85	54.00	-11.15	AV
V	12185.00	42.68	31.02	8.99	39.11	59.76	74.00	-14.24	PK
V	12185.00	23.32	31.02	8.99	39.11	40.40	54.00	-13.60	AV
H	4874.00	50.54	30.55	5.77	31.45	57.21	74.00	-16.79	PK
H	4874.00	30.10	30.55	5.77	31.45	36.77	54.00	-17.23	AV
H	7311.00	51.25	30.33	6.32	36.10	63.34	74.00	-10.66	PK
H	7311.00	29.88	30.33	6.32	36.10	41.97	54.00	-12.03	AV
H	9748.00	51.25	30.85	7.45	36.50	64.35	74.00	-9.65	PK
H	9748.00	29.88	30.85	7.45	36.50	42.98	54.00	-11.02	AV
H	12185.00	44.73	31.02	8.99	39.11	61.81	74.00	-12.19	PK
H	12185.00	23.88	31.02	8.99	39.11	40.96	54.00	-13.04	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	51.82	30.55	5.77	31.79	58.83	74.00	-15.17	PK
V	4924.00	33.36	30.55	5.77	31.79	40.37	54.00	-13.63	AV
V	7386.00	54.33	30.33	6.32	36.21	66.53	74.00	-7.47	PK
V	7386.00	33.68	30.33	6.32	36.21	45.88	54.00	-8.12	AV
V	9848.00	54.33	30.85	7.45	36.50	67.43	74.00	-6.57	PK
V	9848.00	34.17	30.85	7.45	36.50	47.27	54.00	-6.73	AV
V	12310.00	46.33	31.02	8.99	39.15	63.45	74.00	-10.55	PK
V	12310.00	28.57	31.02	8.99	39.15	45.69	54.00	-8.31	AV
H	4924.00	51.88	30.55	5.77	31.79	58.89	74.00	-15.11	PK
H	4924.00	33.52	30.55	5.77	31.79	40.53	54.00	-13.47	AV
H	7386.00	53.50	30.33	6.32	36.21	65.70	74.00	-8.30	PK
H	7386.00	33.84	30.33	6.32	36.21	46.04	54.00	-7.96	AV
H	9848.00	54.10	30.85	7.45	36.50	67.20	74.00	-6.80	PK
H	9848.00	33.54	30.85	7.45	36.50	46.64	54.00	-7.36	AV
H	12310.00	48.00	31.02	8.99	39.15	65.12	74.00	-8.88	PK
H	12310.00	26.93	31.02	8.99	39.15	44.05	54.00	-9.95	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	50.86	30.55	5.77	31.12	57.20	74.00	-16.80	PK
V	4824.00	30.62	30.55	5.77	31.12	36.96	54.00	-17.04	AV
V	7236.00	48.65	30.33	6.32	36.00	60.64	74.00	-13.36	PK
V	7236.00	31.57	30.33	6.32	36.00	43.56	54.00	-10.44	AV
V	9648.00	48.65	30.85	7.45	37.14	62.39	74.00	-11.61	PK
V	9648.00	31.13	30.85	7.45	37.14	44.87	54.00	-9.13	AV
V	12060.00	45.75	31.02	8.99	39.10	62.82	74.00	-11.18	PK
V	12060.00	27.03	31.02	8.99	39.10	44.10	54.00	-9.90	AV
H	4824.00	51.20	30.55	5.77	31.12	57.54	74.00	-16.46	PK
H	4824.00	31.05	30.55	5.77	31.12	37.39	54.00	-16.61	AV
H	7236.00	49.95	30.33	6.32	36.00	61.94	74.00	-12.06	PK
H	7236.00	31.26	30.33	6.32	36.00	43.25	54.00	-10.75	AV
H	9648.00	49.97	30.85	7.45	37.14	63.71	74.00	-10.29	PK
H	9648.00	31.28	30.85	7.45	37.14	45.02	54.00	-8.98	AV
H	12060.00	45.00	31.02	8.99	39.10	62.07	74.00	-11.93	PK
H	12060.00	24.29	31.02	8.99	39.10	41.36	54.00	-12.64	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	49.12	30.55	5.77	31.45	55.79	74.00	-18.21	PK
V	4874.00	29.97	30.55	5.77	31.45	36.64	54.00	-17.36	AV
V	7311.00	47.72	30.33	6.32	36.10	59.81	74.00	-14.19	PK
V	7311.00	29.83	30.33	6.32	36.10	41.92	54.00	-12.08	AV
V	9748.00	47.80	30.85	7.45	36.50	60.90	74.00	-13.10	PK
V	9748.00	29.06	30.85	7.45	36.50	42.16	54.00	-11.84	AV
V	12185.00	44.83	31.02	8.99	39.11	61.91	74.00	-12.09	PK
V	12185.00	23.17	31.02	8.99	39.11	40.25	54.00	-13.75	AV
H	4874.00	50.39	30.55	5.77	31.45	57.06	74.00	-16.94	PK
H	4874.00	30.34	30.55	5.77	31.45	37.01	54.00	-16.99	AV
H	7311.00	51.09	30.33	6.32	36.10	63.18	74.00	-10.82	PK
H	7311.00	29.91	30.33	6.32	36.10	42.00	54.00	-12.00	AV
H	9748.00	51.29	30.85	7.45	36.50	64.39	74.00	-9.61	PK
H	9748.00	29.72	30.85	7.45	36.50	42.82	54.00	-11.18	AV
H	12185.00	45.54	31.02	8.99	39.11	62.62	74.00	-11.38	PK
H	12185.00	24.85	31.02	8.99	39.11	41.93	54.00	-12.07	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	48.82	30.55	5.77	31.79	55.83	74.00	-18.17	PK
V	4924.00	30.32	30.55	5.77	31.79	37.33	54.00	-16.67	AV
V	7386.00	51.16	30.33	6.32	36.21	63.36	74.00	-10.64	PK
V	7386.00	30.66	30.33	6.32	36.21	42.86	54.00	-11.14	AV
V	9848.00	51.16	30.85	7.45	36.50	64.26	74.00	-9.74	PK
V	9848.00	31.10	30.85	7.45	36.50	44.20	54.00	-9.80	AV
V	12310.00	44.26	31.02	8.99	39.15	61.38	74.00	-12.62	PK
V	12310.00	26.30	31.02	8.99	39.15	43.42	54.00	-10.58	AV
H	4924.00	48.84	30.55	5.77	31.79	55.85	74.00	-18.15	PK
H	4924.00	30.51	30.55	5.77	31.79	37.52	54.00	-16.48	AV
H	7386.00	50.33	30.33	6.32	36.21	62.53	74.00	-11.47	PK
H	7386.00	30.83	30.33	6.32	36.21	43.03	54.00	-10.97	AV
H	9848.00	51.03	30.85	7.45	36.50	64.13	74.00	-9.87	PK
H	9848.00	30.87	30.85	7.45	36.50	43.97	54.00	-10.03	AV
H	12310.00	44.93	31.02	8.99	39.15	62.05	74.00	-11.95	PK
H	12310.00	23.87	31.02	8.99	39.15	40.99	54.00	-13.01	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	51.50	30.55	5.77	31.12	57.84	74.00	-16.16	PK
V	4824.00	31.30	30.55	5.77	31.12	37.64	54.00	-16.36	AV
V	7236.00	48.39	30.33	6.32	36.00	60.38	74.00	-13.62	PK
V	7236.00	32.30	30.33	6.32	36.00	44.29	54.00	-9.71	AV
V	9648.00	49.59	30.85	7.45	37.14	63.33	74.00	-10.67	PK
V	9648.00	31.67	30.85	7.45	37.14	45.41	54.00	-8.59	AV
V	12060.00	45.39	31.02	8.99	39.10	62.46	74.00	-11.54	PK
V	12060.00	26.74	31.02	8.99	39.10	43.81	54.00	-10.19	AV
H	4824.00	51.64	30.55	5.77	31.12	57.98	74.00	-16.02	PK
H	4824.00	31.49	30.55	5.77	31.12	37.83	54.00	-16.17	AV
H	7236.00	50.59	30.33	6.32	36.00	62.58	74.00	-11.42	PK
H	7236.00	31.80	30.33	6.32	36.00	43.79	54.00	-10.21	AV
H	9648.00	50.51	30.85	7.45	37.14	64.25	74.00	-9.75	PK
H	9648.00	31.72	30.85	7.45	37.14	45.46	54.00	-8.54	AV
H	12060.00	44.64	31.02	8.99	39.10	61.71	74.00	-12.29	PK
H	12060.00	25.83	31.02	8.99	39.10	42.90	54.00	-11.10	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	49.83	30.55	5.77	31.45	56.50	74.00	-17.50	PK
V	4874.00	30.72	30.55	5.77	31.45	37.39	54.00	-16.61	AV
V	7311.00	47.69	30.33	6.32	36.10	59.78	74.00	-14.22	PK
V	7311.00	30.55	30.33	6.32	36.10	42.64	54.00	-11.36	AV
V	9748.00	48.74	30.85	7.45	36.50	61.84	74.00	-12.16	PK
V	9748.00	30.72	30.85	7.45	36.50	43.82	54.00	-10.18	AV
V	12185.00	45.64	31.02	8.99	39.11	62.72	74.00	-11.28	PK
V	12185.00	24.65	31.02	8.99	39.11	41.73	54.00	-12.27	AV
H	4874.00	51.12	30.55	5.77	31.45	57.79	74.00	-16.21	PK
H	4874.00	30.85	30.55	5.77	31.45	37.52	54.00	-16.48	AV
H	7311.00	51.85	30.33	6.32	36.10	63.94	74.00	-10.06	PK
H	7311.00	30.63	30.33	6.32	36.10	42.72	54.00	-11.28	AV
H	9748.00	52.00	30.85	7.45	36.50	65.10	74.00	-8.90	PK
H	9748.00	30.63	30.85	7.45	36.50	43.73	54.00	-10.27	AV
H	12185.00	44.63	31.02	8.99	39.11	61.71	74.00	-12.29	PK
H	12185.00	25.71	31.02	8.99	39.11	42.79	54.00	-11.21	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	51.63	30.55	5.77	31.79	58.64	74.00	-15.36	PK
V	4924.00	32.83	30.55	5.77	31.79	39.84	54.00	-14.16	AV
V	7386.00	53.87	30.33	6.32	36.21	66.07	74.00	-7.93	PK
V	7386.00	33.55	30.33	6.32	36.21	45.75	54.00	-8.25	AV
V	9848.00	53.97	30.85	7.45	36.50	67.07	74.00	-6.93	PK
V	9848.00	33.97	30.85	7.45	36.50	47.07	54.00	-6.93	AV
V	12310.00	46.87	31.02	8.99	39.15	63.99	74.00	-10.01	PK
V	12310.00	26.11	31.02	8.99	39.15	43.23	54.00	-10.77	AV
H	4924.00	51.65	30.55	5.77	31.79	58.66	74.00	-15.34	PK
H	4924.00	33.32	30.55	5.77	31.79	40.33	54.00	-13.67	AV
H	7386.00	53.14	30.33	6.32	36.21	65.34	74.00	-8.66	PK
H	7386.00	33.78	30.33	6.32	36.21	45.98	54.00	-8.02	AV
H	9848.00	53.84	30.85	7.45	36.50	66.94	74.00	-7.06	PK
H	9848.00	33.77	30.85	7.45	36.50	46.87	54.00	-7.13	AV
H	12310.00	47.74	31.02	8.99	39.15	64.86	74.00	-9.14	PK
H	12310.00	26.68	31.02	8.99	39.15	43.80	54.00	-10.20	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844.00	50.70	30.55	5.77	31.14	57.06	74.00	-16.94	PK
V	4844.00	31.89	30.55	5.77	31.14	38.25	54.00	-15.75	AV
V	7266.00	52.94	30.33	6.32	36.09	65.02	74.00	-8.98	PK
V	7266.00	32.75	30.33	6.32	36.09	44.83	54.00	-9.17	AV
V	9688.00	53.02	30.85	7.45	37.16	66.78	74.00	-7.22	PK
V	9688.00	33.00	30.85	7.45	37.16	46.76	54.00	-7.24	AV
V	12110.00	45.57	31.02	8.99	39.15	62.69	74.00	-11.31	PK
V	12110.00	26.26	31.02	8.99	39.15	43.38	54.00	-10.62	AV
H	4844.00	50.95	30.55	5.77	31.14	57.31	74.00	-16.69	PK
H	4844.00	32.42	30.55	5.77	31.14	38.78	54.00	-15.22	AV
H	7266.00	52.22	30.33	6.32	36.09	64.30	74.00	-9.70	PK
H	7266.00	32.90	30.33	6.32	36.09	44.98	54.00	-9.02	AV
H	9688.00	52.89	30.85	7.45	37.16	66.65	74.00	-7.35	PK
H	9688.00	32.47	30.85	7.45	37.16	46.23	54.00	-7.77	AV
H	12110.00	44.94	31.02	8.99	39.15	62.06	74.00	-11.94	PK
H	12110.00	25.78	31.02	8.99	39.15	42.90	54.00	-11.10	AV

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	50.33	30.55	5.77	31.45	57.00	74.00	-17.00	PK
V	4874.00	31.53	30.55	5.77	31.45	38.20	54.00	-15.80	AV
V	7311.00	52.57	30.33	6.32	36.10	64.66	74.00	-9.34	PK
V	7311.00	32.25	30.33	6.32	36.10	44.34	54.00	-9.66	AV
V	9748.00	52.67	30.85	7.45	36.50	65.77	74.00	-8.23	PK
V	9748.00	32.67	30.85	7.45	36.50	45.77	54.00	-8.23	AV
V	12185.00	45.57	31.02	8.99	39.11	62.65	74.00	-11.35	PK
V	12185.00	25.81	31.02	8.99	39.11	42.89	54.00	-11.11	AV
H	4874.00	50.35	30.55	5.77	31.45	57.02	74.00	-16.98	PK
H	4874.00	32.02	30.55	5.77	31.45	38.69	54.00	-15.31	AV
H	7311.00	51.84	30.33	6.32	36.10	63.93	74.00	-10.07	PK
H	7311.00	32.48	30.33	6.32	36.10	44.57	54.00	-9.43	AV
H	9748.00	52.54	30.85	7.45	36.50	65.64	74.00	-8.36	PK
H	9748.00	32.47	30.85	7.45	36.50	45.57	54.00	-8.43	AV
H	12185.00	47.44	31.02	8.99	39.11	64.52	74.00	-9.48	PK
H	12185.00	26.38	31.02	8.99	39.11	43.46	54.00	-10.54	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amp lifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2452MHz									
V	4904.00	49.90	30.55	5.77	31.69	56.81	74.00	-17.19	PK
V	4904.00	30.84	30.55	5.77	31.69	37.75	54.00	-16.25	AV
V	7356.00	51.53	30.33	6.32	36.15	63.67	74.00	-10.33	PK
V	7356.00	31.47	30.33	6.32	36.15	43.61	54.00	-10.39	AV
V	9808.00	52.23	30.85	7.45	37.32	66.15	74.00	-7.85	PK
V	9808.00	31.89	30.85	7.45	37.32	45.81	54.00	-8.19	AV
V	12260.00	45.74	31.02	8.99	39.13	62.84	74.00	-11.16	PK
V	12260.00	24.82	31.02	8.99	39.13	41.92	54.00	-12.08	AV
H	4904.00	49.58	30.55	5.77	31.69	56.49	74.00	-17.51	PK
H	4904.00	31.98	30.55	5.77	31.69	38.89	54.00	-15.11	AV
H	7356.00	51.16	30.33	6.32	36.15	63.30	74.00	-10.70	PK
H	7356.00	32.24	30.33	6.32	36.15	44.38	54.00	-9.62	AV
H	9808.00	51.79	30.85	7.45	37.32	65.71	74.00	-8.29	PK
H	9808.00	31.63	30.85	7.45	37.32	45.55	54.00	-8.45	AV
H	12260.00	44.78	31.02	8.99	39.13	61.88	74.00	-12.12	PK
H	12260.00	26.64	31.02	8.99	39.13	43.74	54.00	-10.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

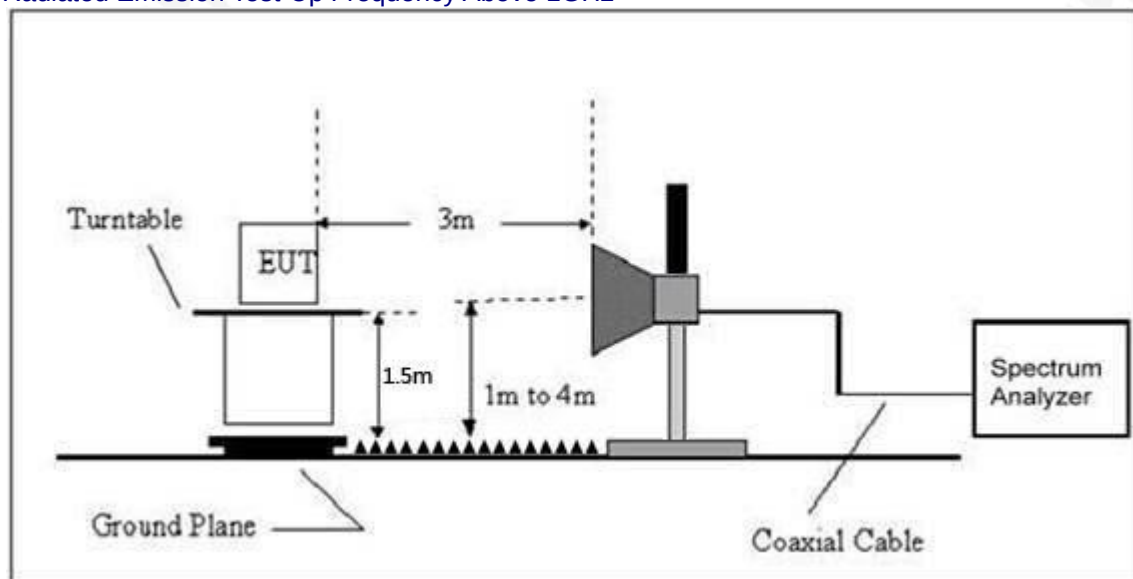

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	60.53	30.22	4.85	27.59	62.75	74.00	PK	PASS
	H	2390.00	41.31	30.22	4.85	27.59	43.53	54.00	AV	PASS
	H	2400.00	62.26	30.22	4.85	27.58	64.47	74.00	PK	PASS
	H	2400.00	40.97	30.22	4.85	27.58	43.18	54.00	AV	PASS
	V	2390.00	60.35	30.22	4.85	27.59	62.57	74.00	PK	PASS
	V	2390.00	42.22	30.22	4.85	27.59	44.44	54.00	AV	PASS
	V	2400.00	62.11	30.22	4.85	27.58	64.32	74.00	PK	PASS
	V	2400.00	41.04	30.22	4.85	27.58	43.25	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	59.29	30.22	4.85	27.40	61.32	74.00	PK	PASS
	H	2485.50	40.33	30.22	4.85	27.40	42.36	54.00	AV	PASS
	H	2483.50	60.80	30.22	4.85	27.40	62.83	74.00	PK	PASS
	H	2485.50	40.91	30.22	4.85	27.40	42.94	54.00	AV	PASS
	V	2483.50	60.10	30.22	4.85	27.40	62.13	74.00	PK	PASS
	V	2485.50	41.72	30.22	4.85	27.40	43.75	54.00	AV	PASS
	V	2483.50	60.49	30.22	4.85	27.40	62.52	74.00	PK	PASS
	V	2485.50	41.18	30.22	4.85	27.40	43.21	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	58.53	30.22	4.85	27.59	60.75	74.00	PK	PASS
	H	2390.00	40.76	30.22	4.85	27.59	42.98	54.00	AV	PASS
	H	2400.00	60.56	30.22	4.85	27.58	62.77	74.00	PK	PASS
	H	2400.00	40.66	30.22	4.85	27.58	42.87	54.00	AV	PASS
	V	2390.00	58.78	30.22	4.85	27.59	61.00	74.00	PK	PASS
	V	2390.00	40.56	30.22	4.85	27.59	42.78	54.00	AV	PASS
	V	2400.00	57.52	30.22	4.85	27.58	59.73	74.00	PK	PASS
	V	2400.00	40.34	30.22	4.85	27.58	42.55	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	59.46	30.22	4.85	27.40	61.49	74.00	PK	PASS
	H	2485.50	41.19	30.22	4.85	27.40	43.22	54.00	AV	PASS
	H	2483.50	61.29	30.22	4.85	27.40	63.32	74.00	PK	PASS
	H	2485.50	41.39	30.22	4.85	27.40	43.42	54.00	AV	PASS
	V	2483.50	59.36	30.22	4.85	27.40	61.39	74.00	PK	PASS
	V	2485.50	41.29	30.22	4.85	27.40	43.32	54.00	AV	PASS
	V	2483.50	61.34	30.22	4.85	27.40	63.37	74.00	PK	PASS
	V	2485.50	41.46	30.22	4.85	27.40	43.49	54.00	AV	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	58.92	30.22	4.85	27.59	61.14	74.00	PK	PASS
	H	2390.00	40.78	30.22	4.85	27.59	43.00	54.00	AV	PASS
	H	2400.00	61.32	30.22	4.85	27.58	63.53	74.00	PK	PASS
	H	2400.00	40.73	30.22	4.85	27.58	42.94	54.00	AV	PASS
	V	2390.00	58.79	30.22	4.85	27.59	61.01	74.00	PK	PASS
	V	2390.00	40.74	30.22	4.85	27.59	42.96	54.00	AV	PASS
	V	2400.00	61.16	30.22	4.85	27.58	63.37	74.00	PK	PASS
	V	2400.00	48.92	30.22	4.85	27.58	51.13	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.67	30.22	4.85	27.40	60.70	74.00	PK	PASS
	H	2485.50	40.60	30.22	4.85	27.40	42.63	54.00	AV	PASS
	H	2483.50	60.41	30.22	4.85	27.40	62.44	74.00	PK	PASS
	H	2485.50	40.48	30.22	4.85	27.40	42.51	54.00	AV	PASS
	V	2483.50	58.70	30.22	4.85	27.40	60.73	74.00	PK	PASS
	V	2485.50	40.45	30.22	4.85	27.40	42.48	54.00	AV	PASS
	V	2483.50	60.93	30.22	4.85	27.40	62.96	74.00	PK	PASS

802.11n40	V	2485.50	40.28	30.22	4.85	27.40	42.31	54.00	AV	PASS
	LowChannel 2422MHz									
	H	2390.00	58.59	30.22	4.85	27.59	60.81	74.00	PK	PASS
	H	2390.00	40.47	30.22	4.85	27.59	42.69	54.00	AV	PASS
	H	2400.00	60.79	30.22	4.85	27.58	63.00	74.00	PK	PASS
	H	2400.00	40.43	30.22	4.85	27.58	42.64	54.00	AV	PASS
	V	2390.00	58.40	30.22	4.85	27.59	60.62	74.00	PK	PASS
	V	2390.00	40.49	30.22	4.85	27.59	42.71	54.00	AV	PASS
	V	2400.00	60.55	30.22	4.85	27.58	62.76	74.00	PK	PASS
	V	2400.00	40.41	30.22	4.85	27.58	42.62	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	58.73	30.22	4.85	27.40	60.76	74.00	PK	PASS
	H	2485.50	40.66	30.22	4.85	27.40	42.69	54.00	AV	PASS
	H	2483.50	60.23	30.22	4.85	27.40	62.26	74.00	PK	PASS
	H	2485.50	40.54	30.22	4.85	27.40	42.57	54.00	AV	PASS
	V	2483.50	58.66	30.22	4.85	27.40	60.69	74.00	PK	PASS
	V	2485.50	40.44	30.22	4.85	27.40	42.47	54.00	AV	PASS
	V	2483.50	61.01	30.22	4.85	27.40	63.04	74.00	PK	PASS
	V	2485.50	48.07	30.22	4.85	27.40	50.10	74.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP




6.5 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-11.52	8	PASS
2437 MHz	-11.28	8	PASS
2462 MHz	-11.76	8	PASS


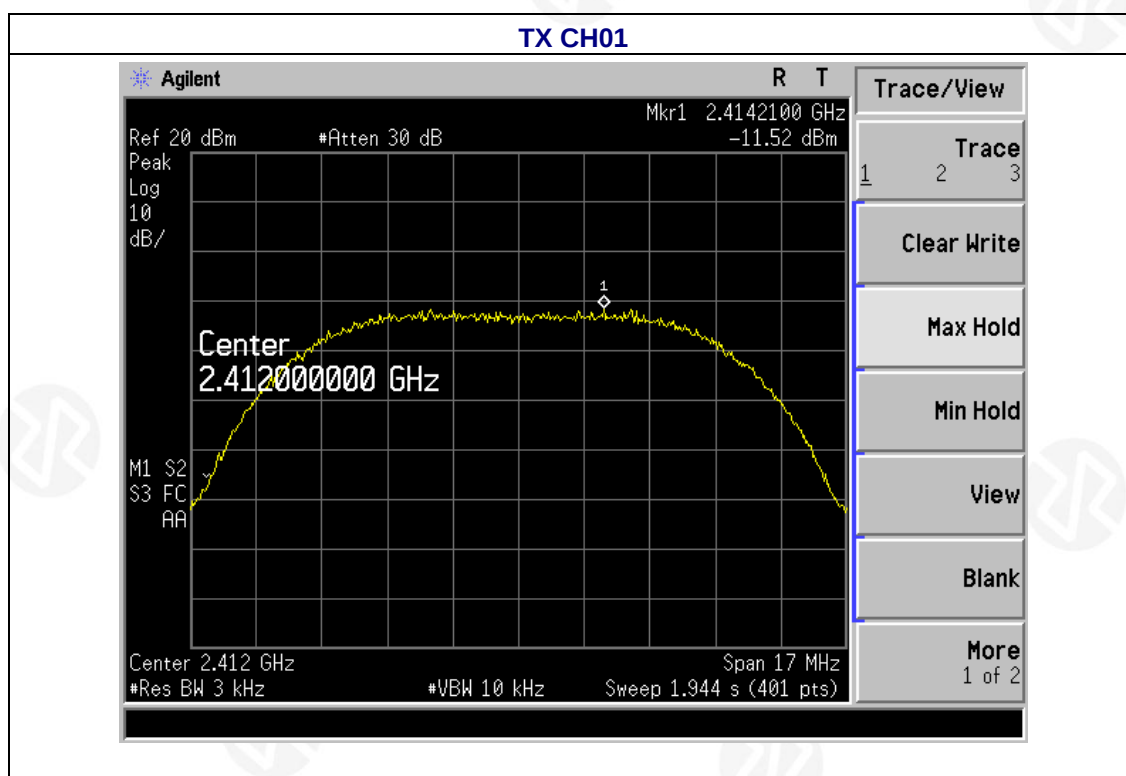


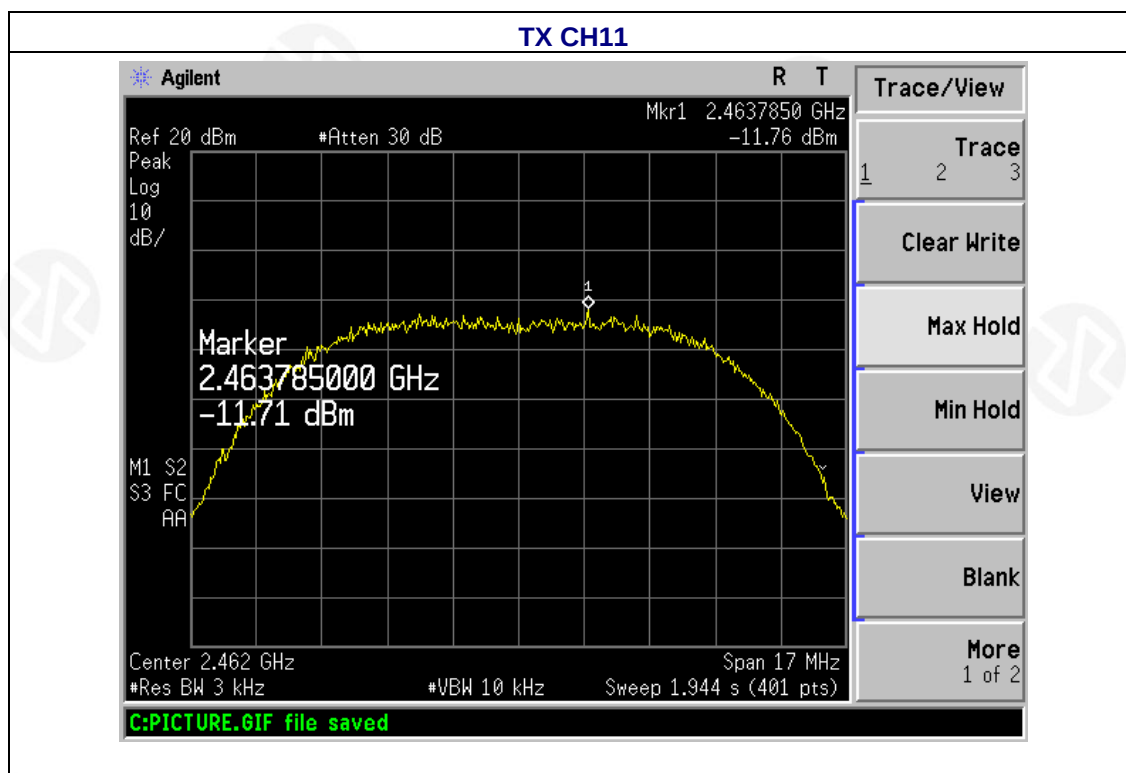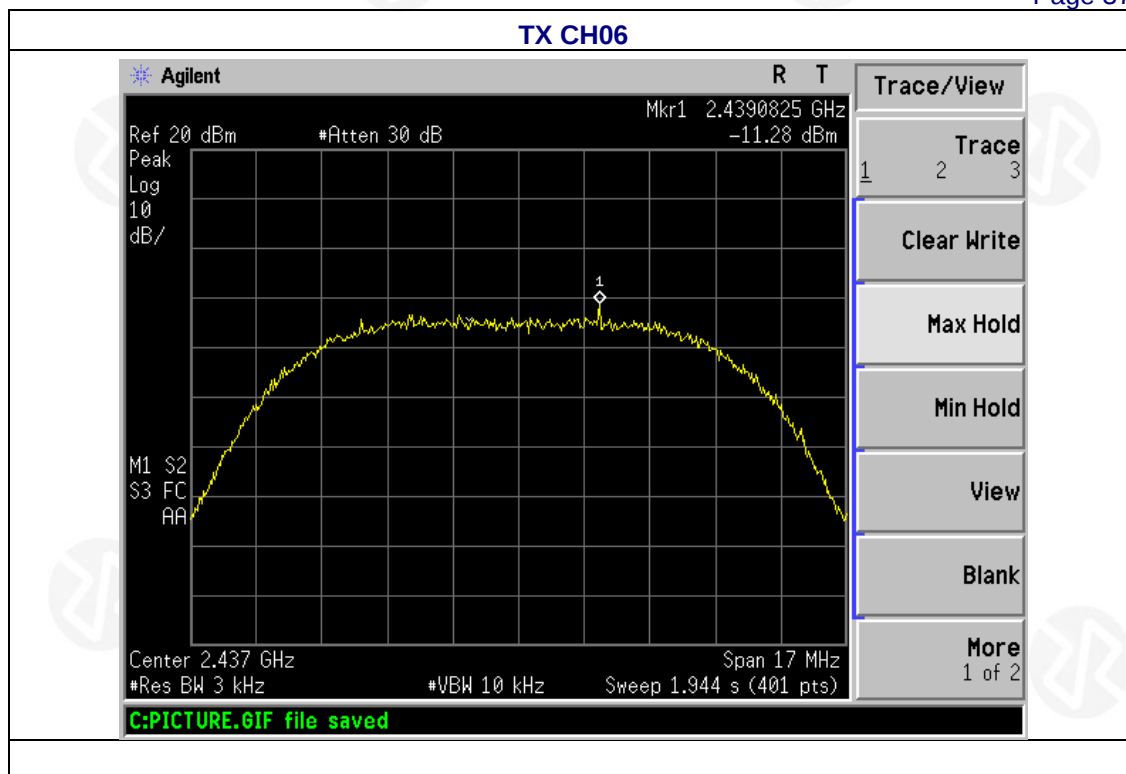

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-15.72	8	PASS
2437 MHz	-15.73	8	PASS
2462 MHz	-14.51	8	PASS


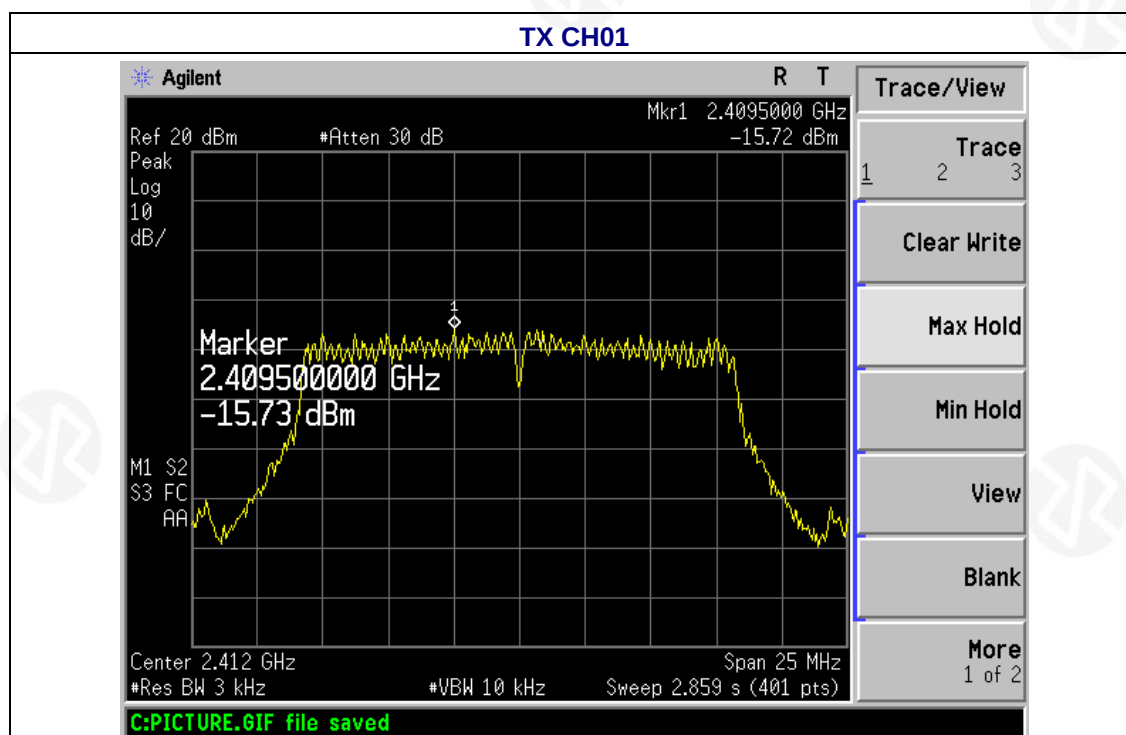


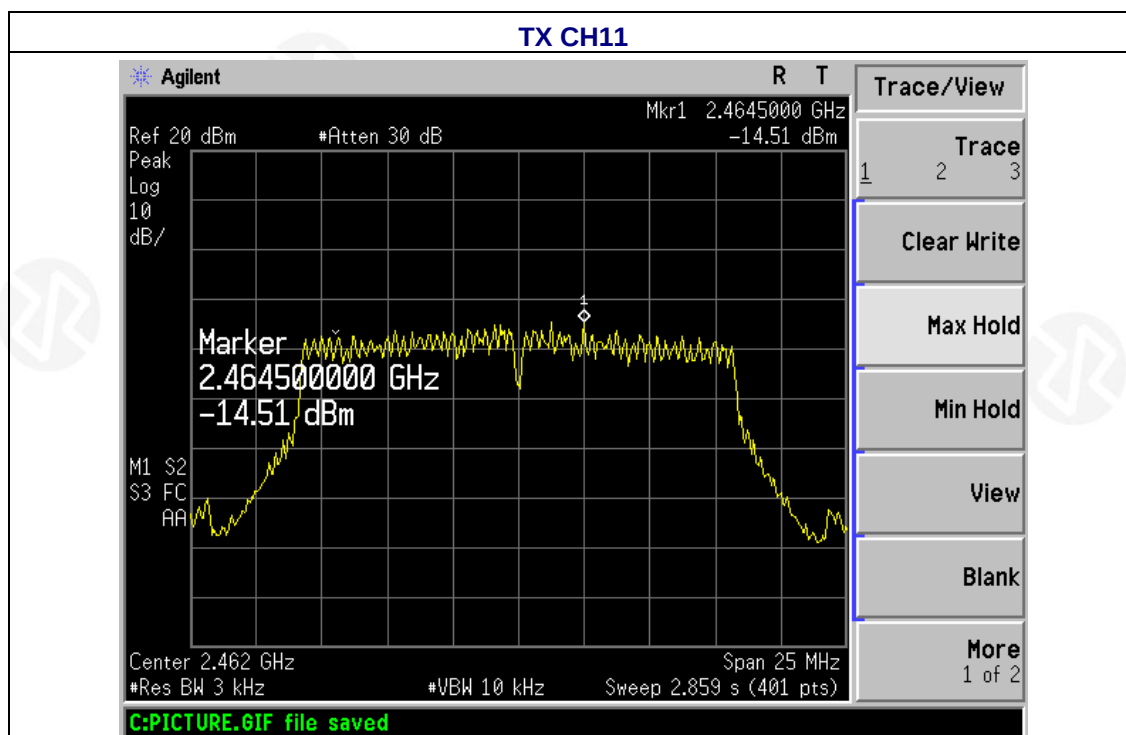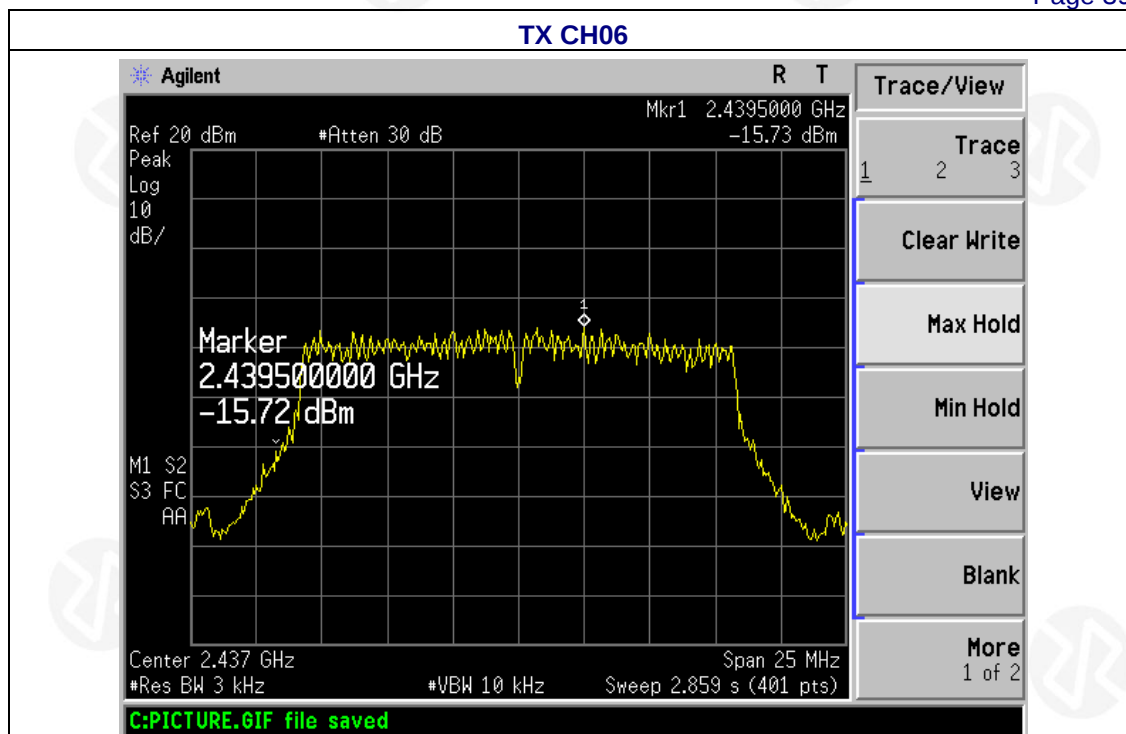

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(20M)		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-13.4	8	PASS
2437 MHz	-14.93	8	PASS
2462 MHz	-15.02	8	PASS


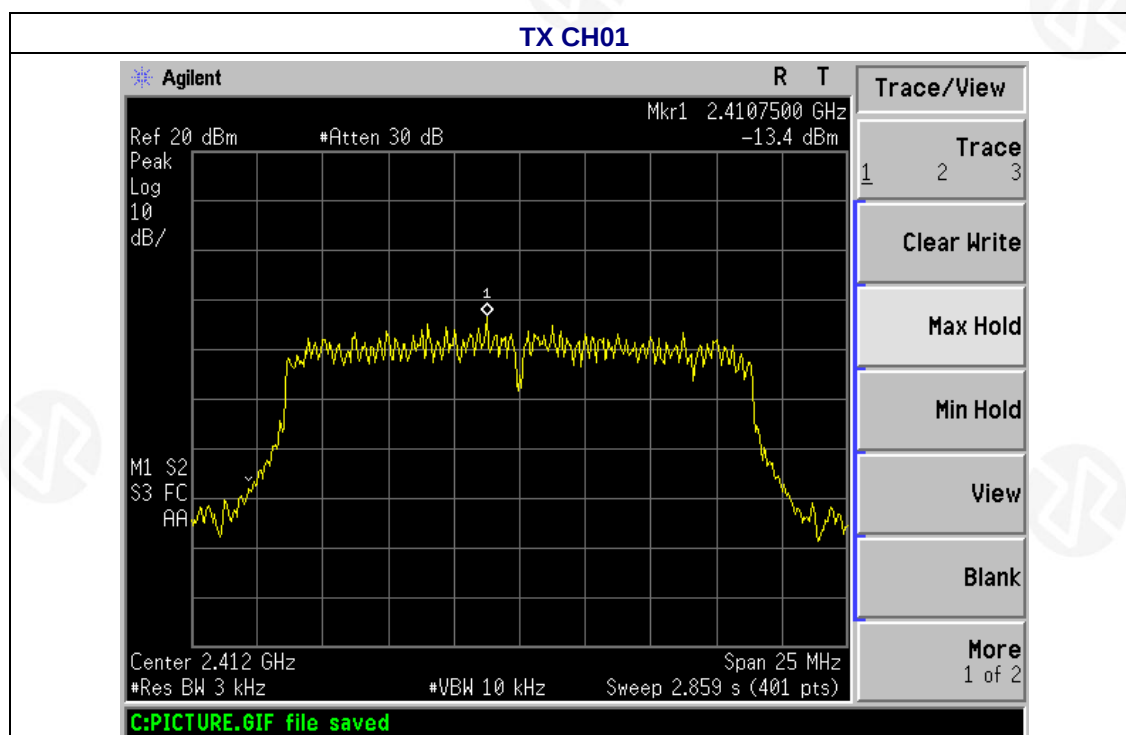


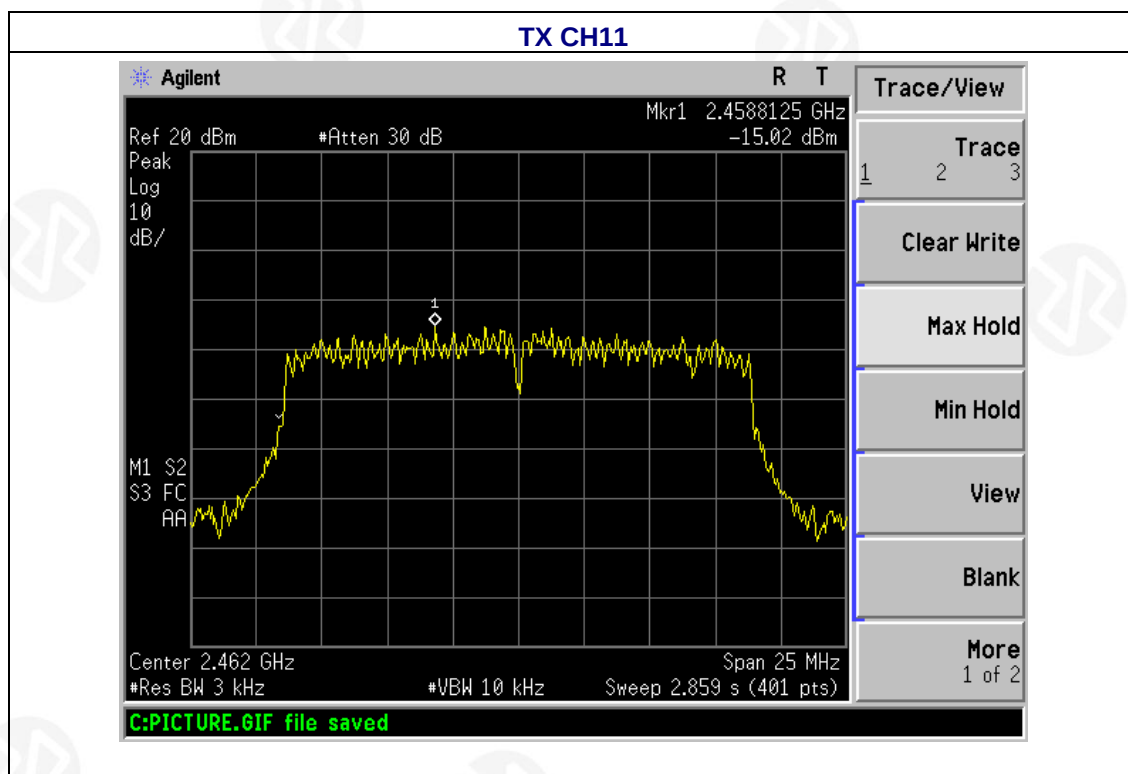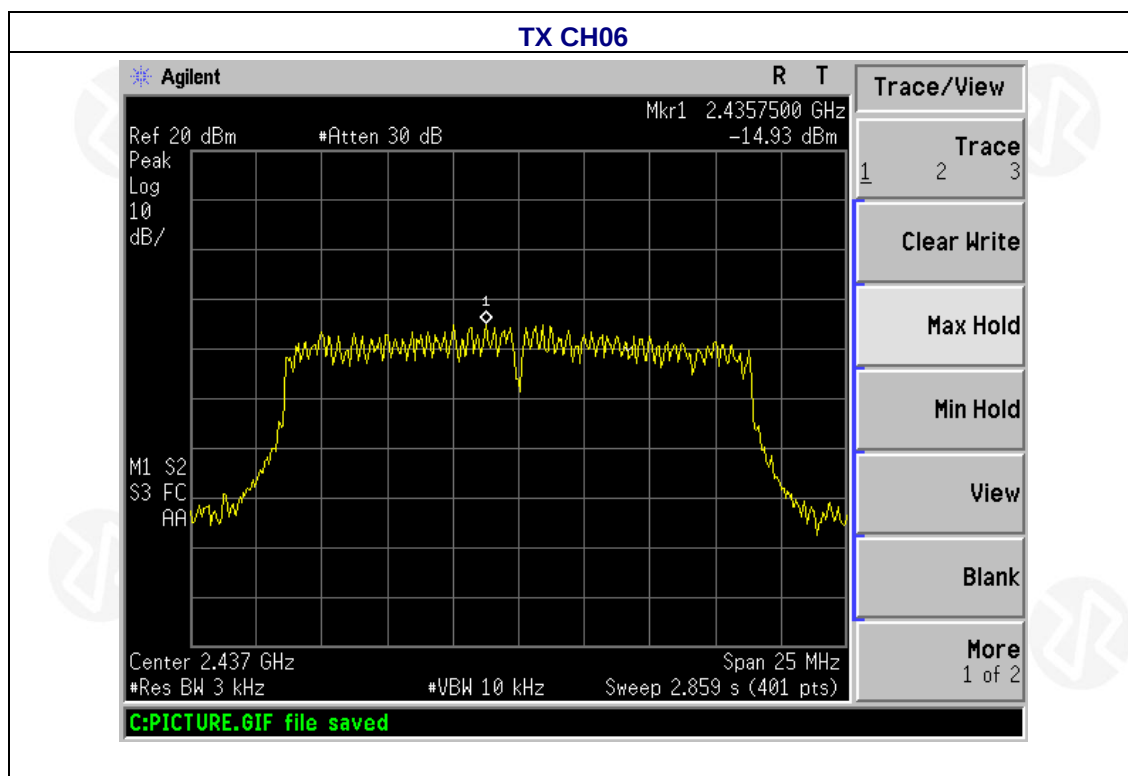

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-26.98	8	PASS
2437 MHz	-28.03	8	PASS
2452 MHz	-29.12	8	PASS

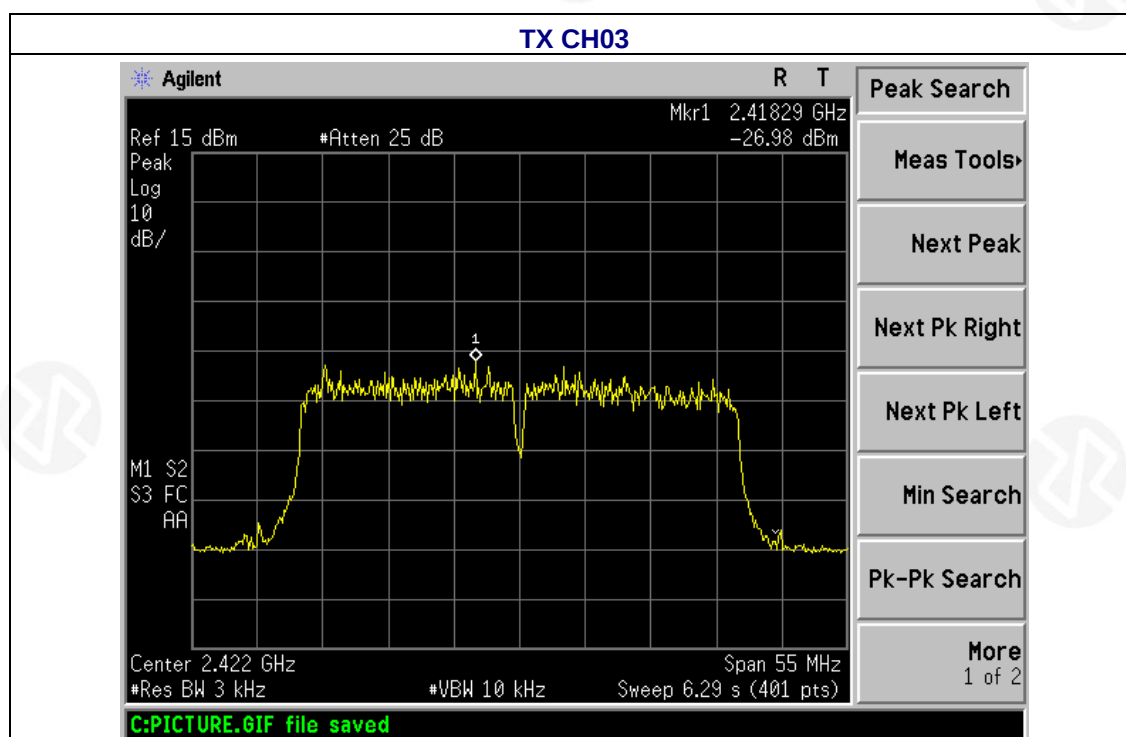

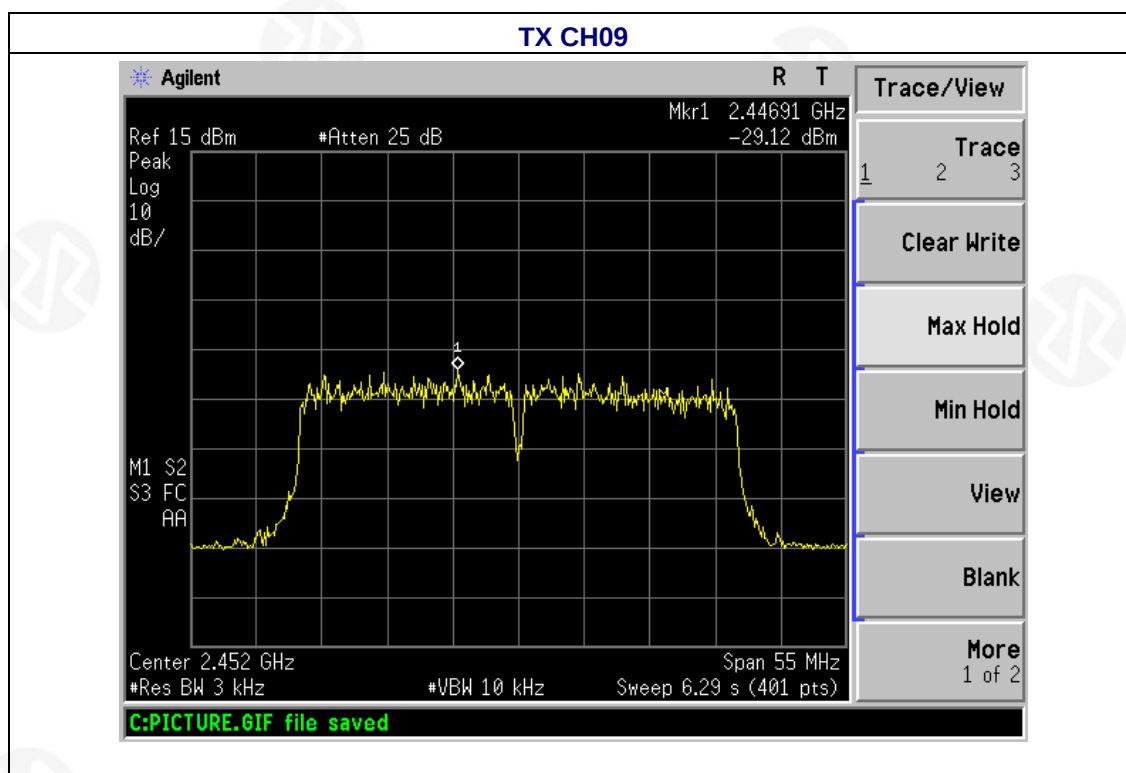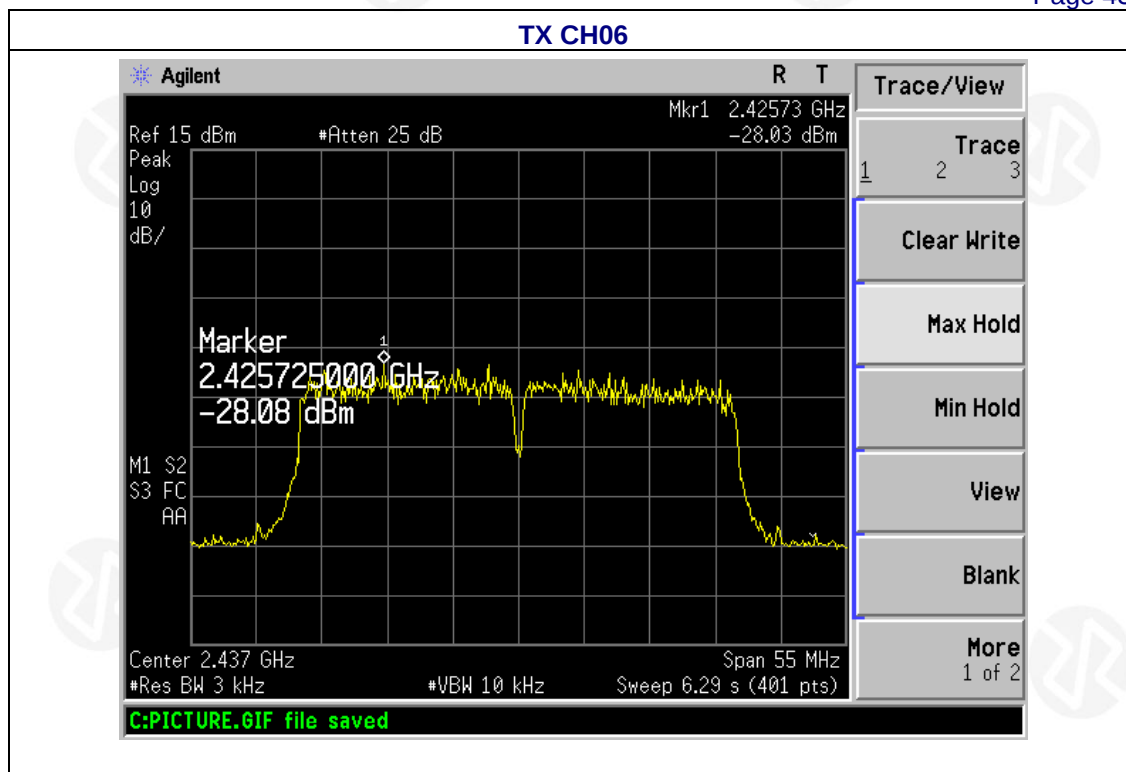

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode		



	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b	2412	10.194	>500	Pass
	2437	9.912	>500	Pass
	2462	9.694	>500	Pass
802.11g	2412	16.243	>500	Pass
	2437	16.248	>500	Pass
	2462	15.785	>500	Pass
802.11n20	2412	15.824	>500	Pass
	2437	16.120	>500	Pass
	2462	17.081	>500	Pass
802.11n40	2422	35.349	>500	Pass
	2437	35.307	>500	Pass
	2452	35.382	>500	Pass

Test plot as follows:



802.11b

802.11g



Lowest channel

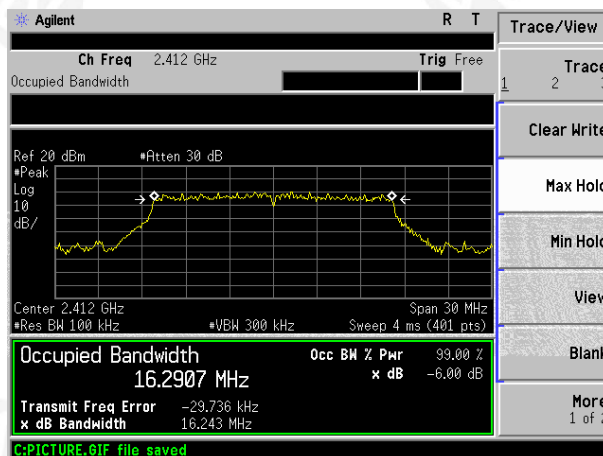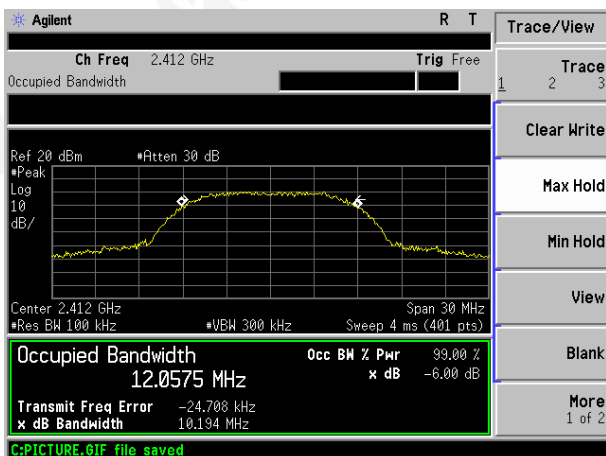

Middle channel

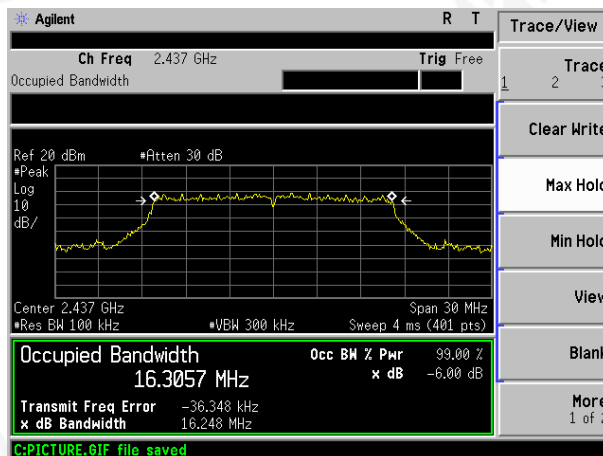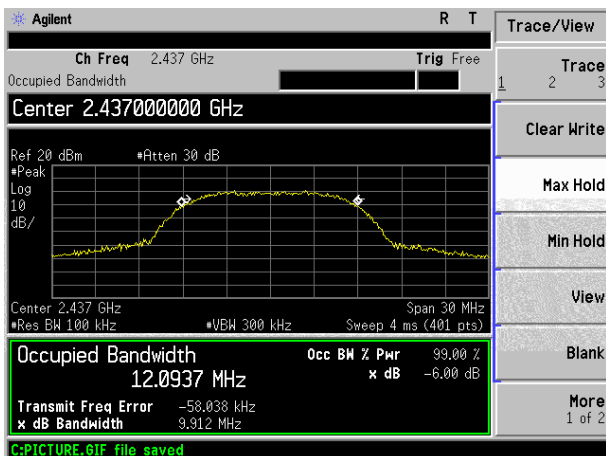



Highest channel

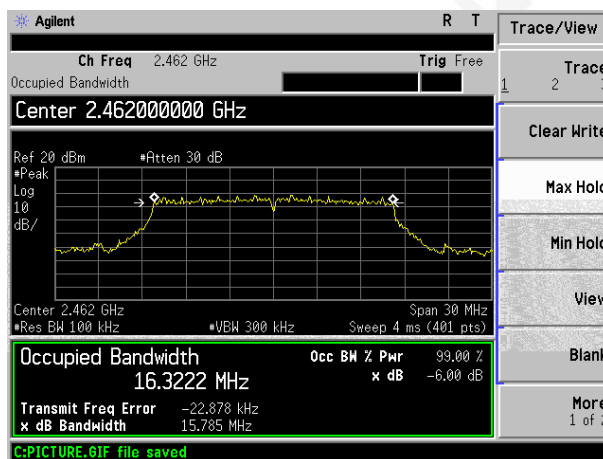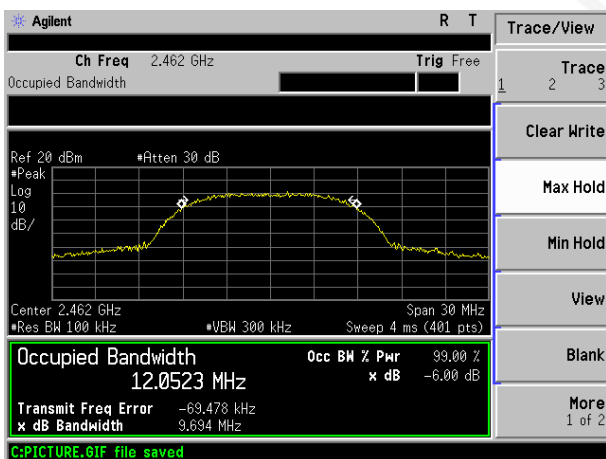



802.11n20

801.11n40



Lowest channel

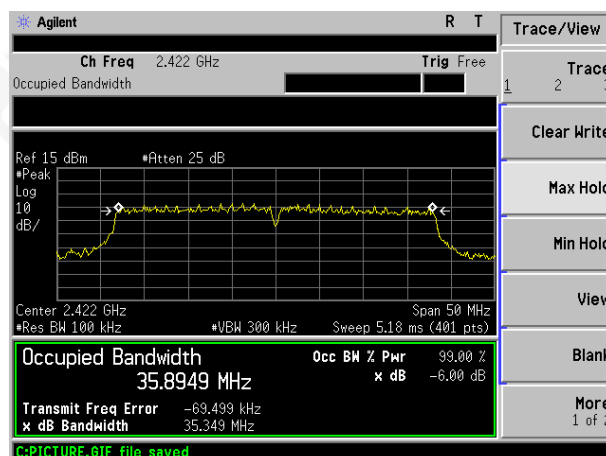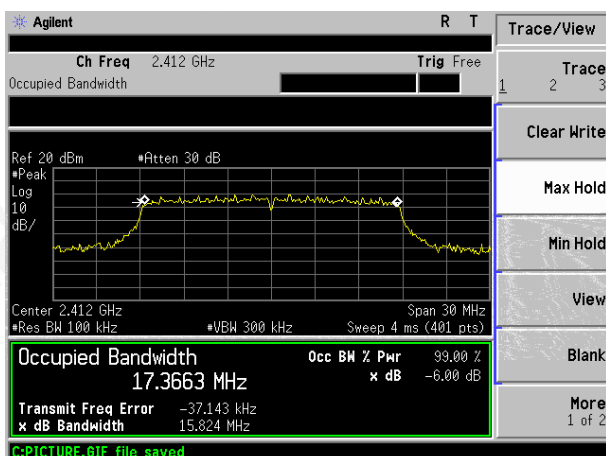

Middle channel

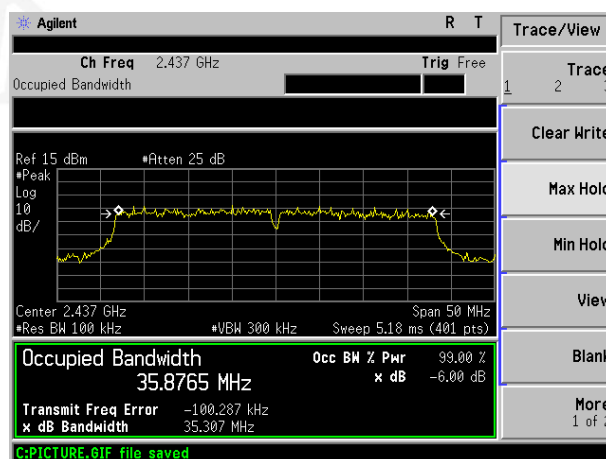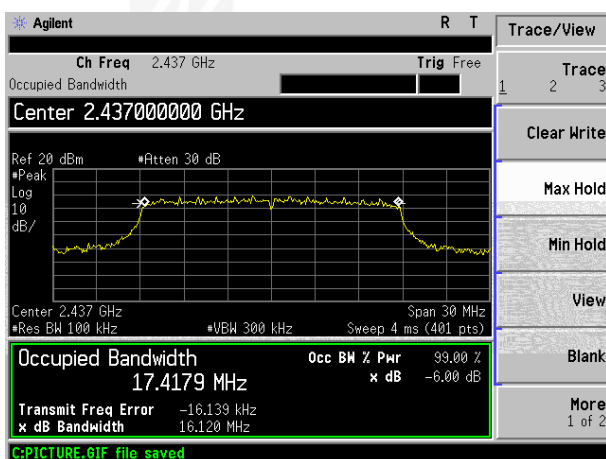

Highest channel

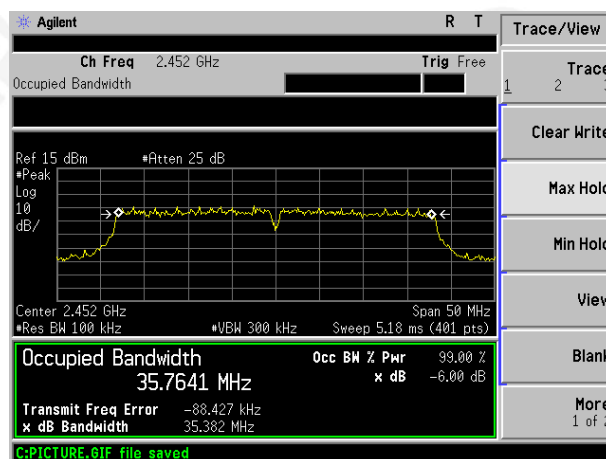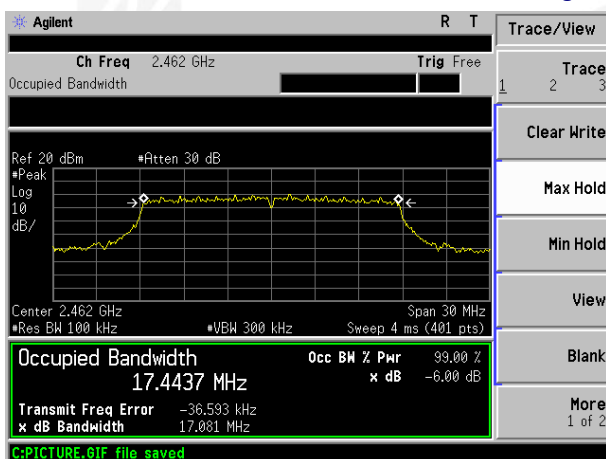

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	8.746	8.587	7.117	8.306	30.00	Pass
Middle	8.798	8.626	7.241	8.317		
Highest	8.530	8.508	7.159	8.336		

	Frequency	Output Power	Antenna gain	EIRP
	(MHz)	(dBm)	(dBi)	(dBm)
802.11b	Lowest	8.746	1.0	9.746
	Middle	8.798	1.0	9.798
	Highest	8.530	1.0	9.530
802.11g	Lowest	8.587	1.0	9.587
	Middle	8.626	1.0	9.626
	Highest	8.508	1.0	9.508
802.11n20	Lowest	7.117	1.0	8.117
	Middle	7.241	1.0	8.241
	Highest	7.159	1.0	8.159
802.11n40	Lowest	8.306	1.0	9.306
	Middle	8.317	1.0	9.317
	Highest	8.336	1.0	9.336


Duty Cyclcy:

802.11b

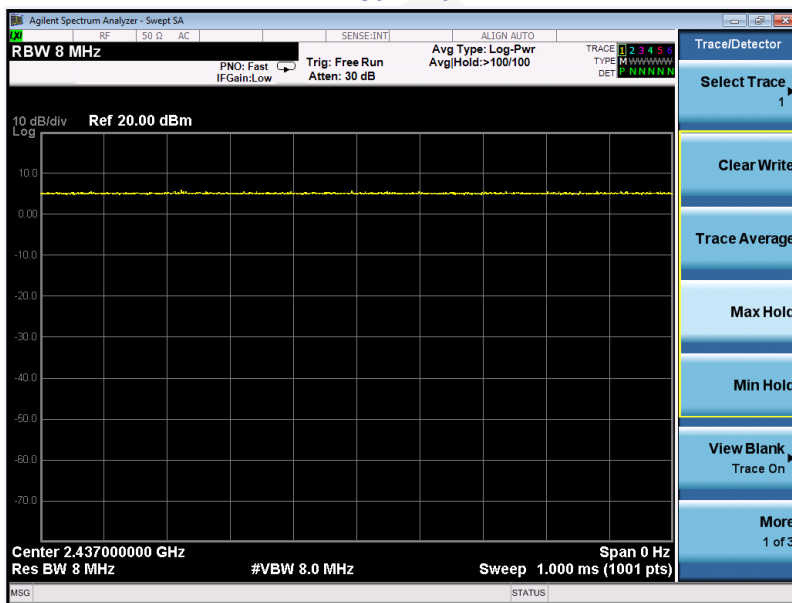


Ton	Tp	Duty cyclcy(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

802.11g

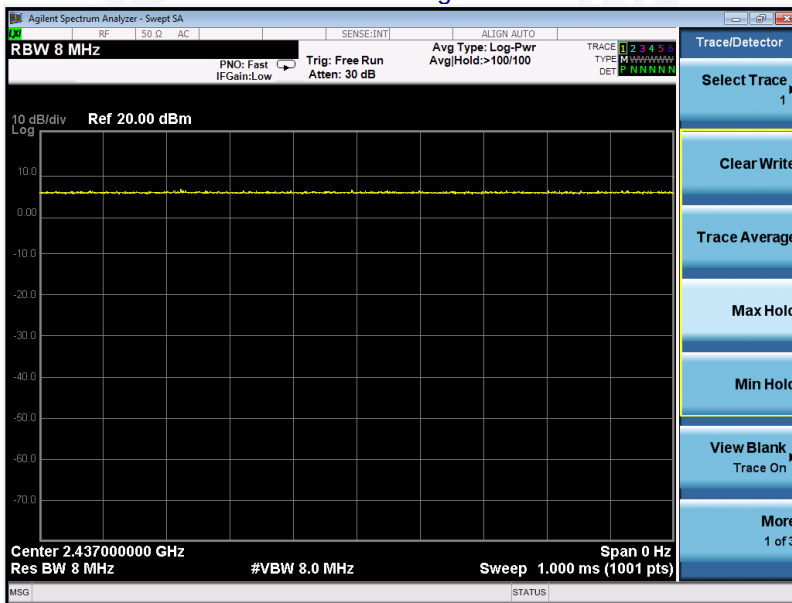


Ton	Tp	Duty cyclcy(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

802.11n20

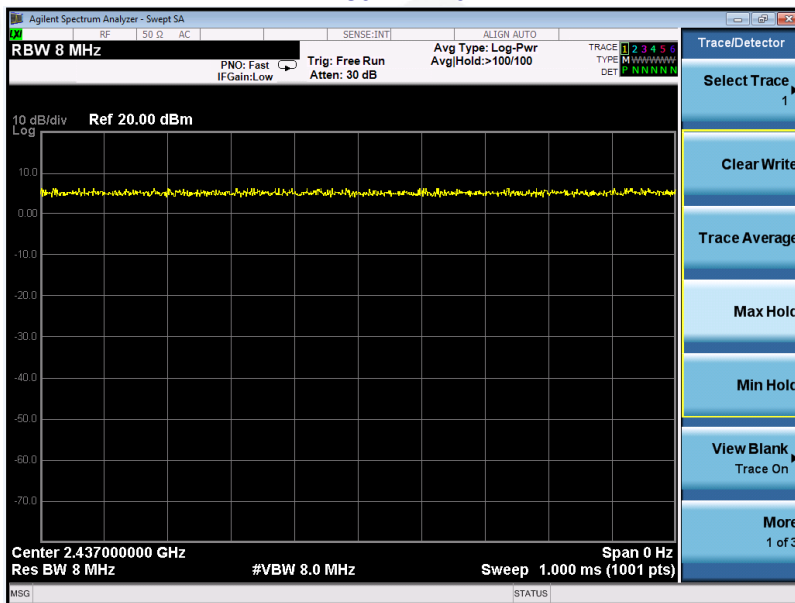

Ton	Tp	Duty cycly(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

802.11n40

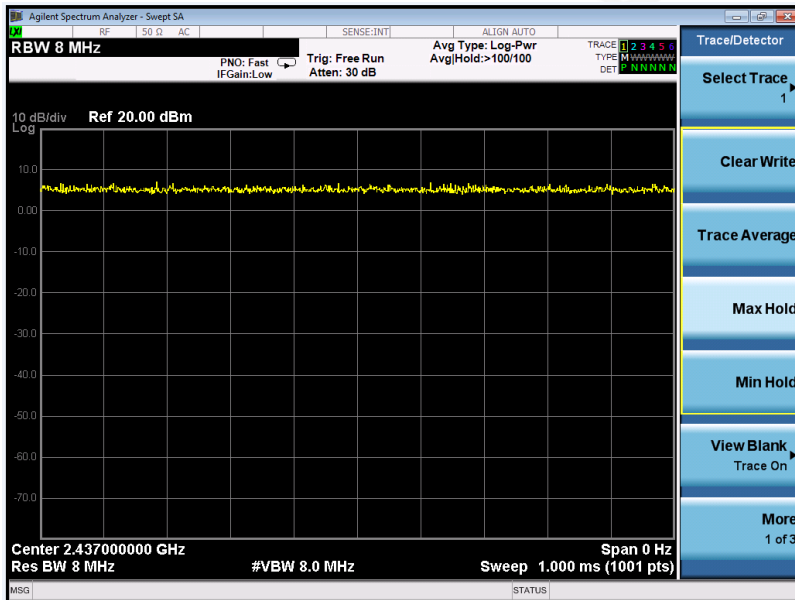

Ton	Tp	Duty cycly(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS

Test plot as follows:

Test mode:	802.11b
------------	---------

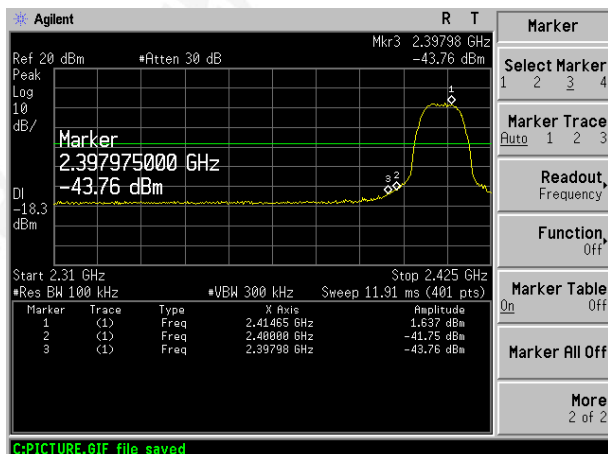


Lowest channel

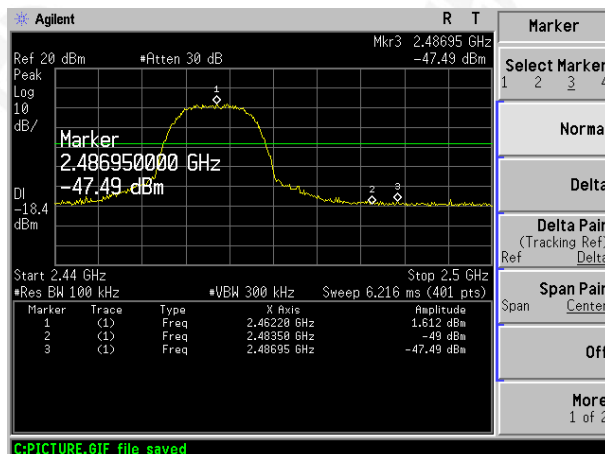


Highest channel

Test mode:	802.11g
------------	---------

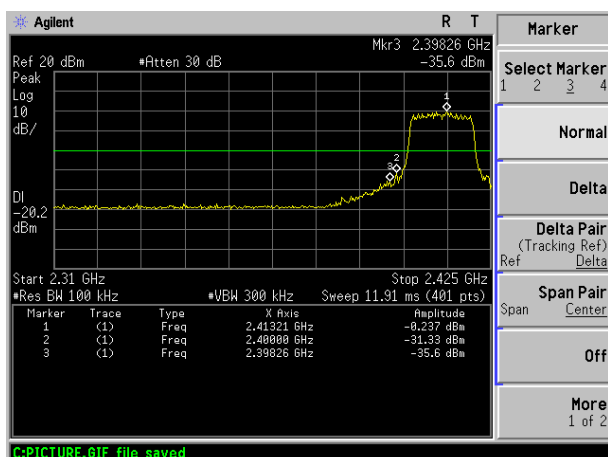


Lowest channel

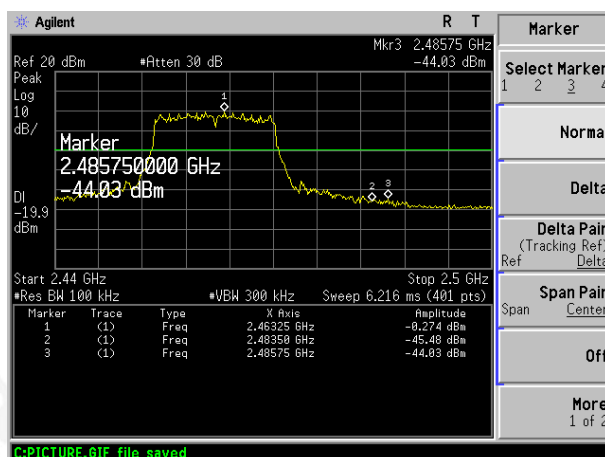


Highest channel

Test mode:

802.11n(HT20)

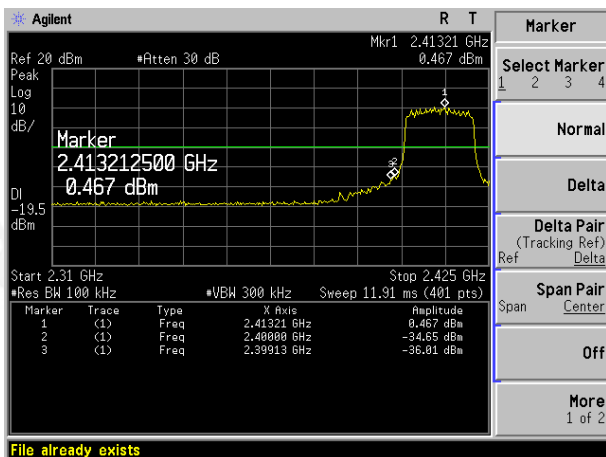


Lowest channel

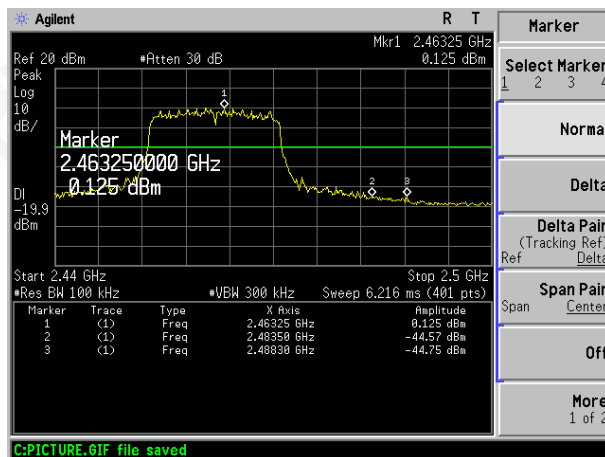


Highest channel

Test mode:

802.11n(HT40)

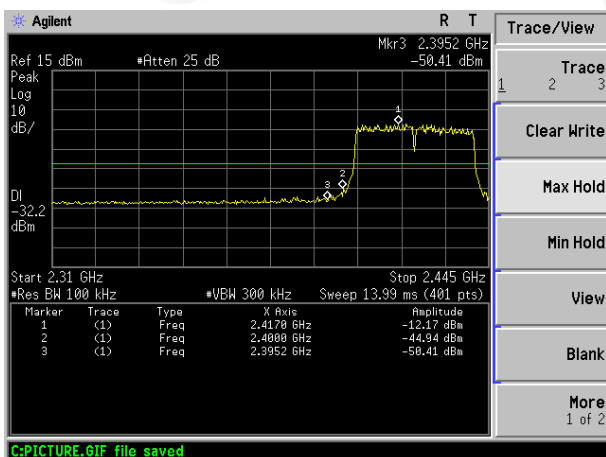


Lowest channel

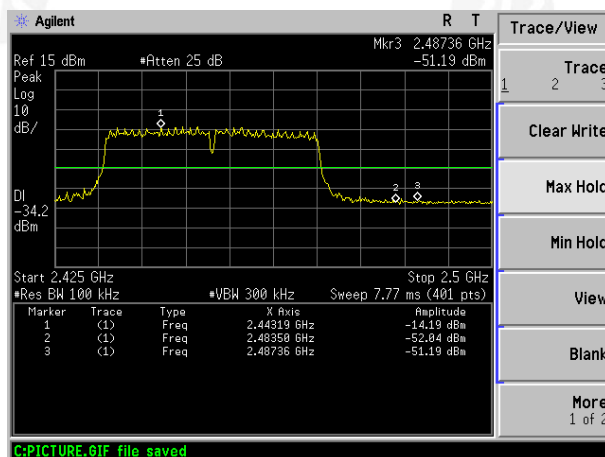






Highest channel

Test plot as follows:


802.11b-Lowest channel

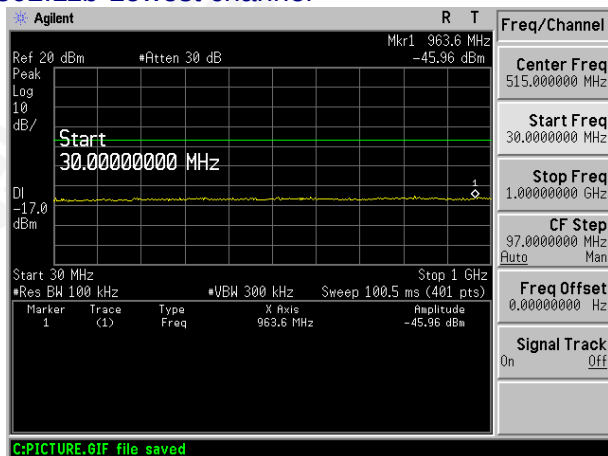

802.11b-Middle channel

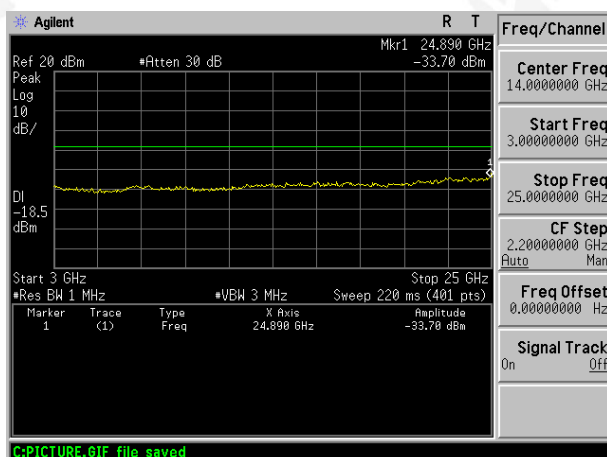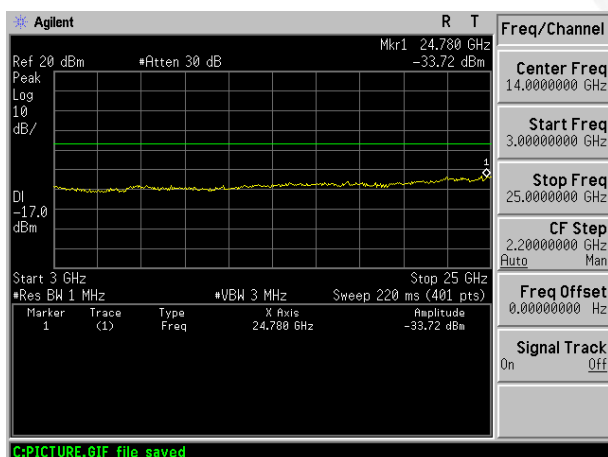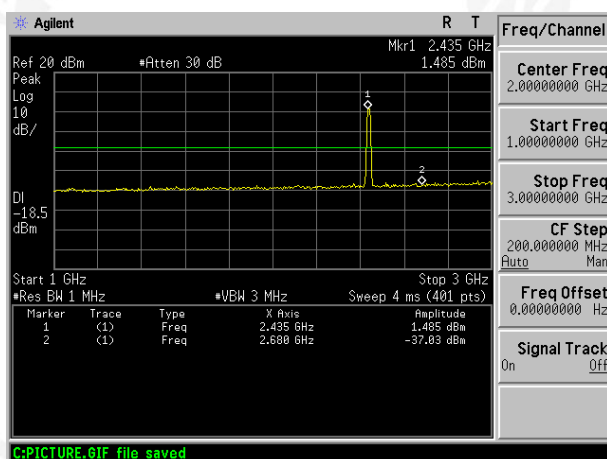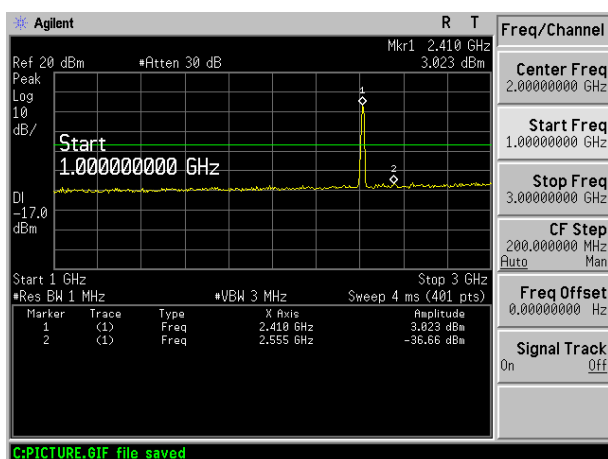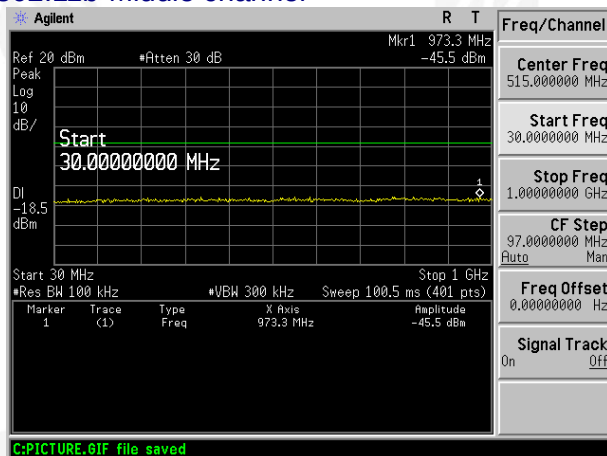


802.11b-Highest channel

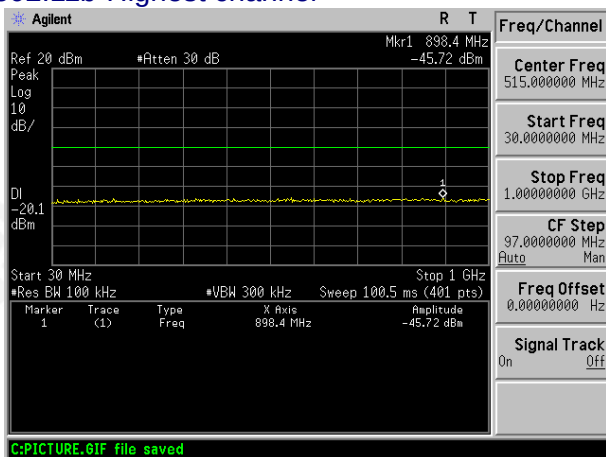


C:PICTURE.GIF file saved


802.11g-Lowest channel

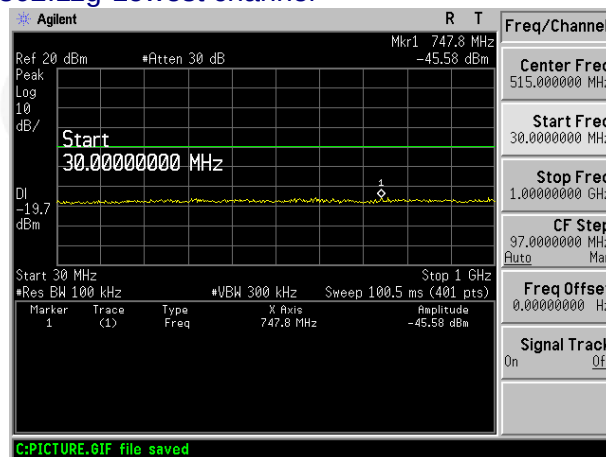

C:PICTURE.GIF file saved

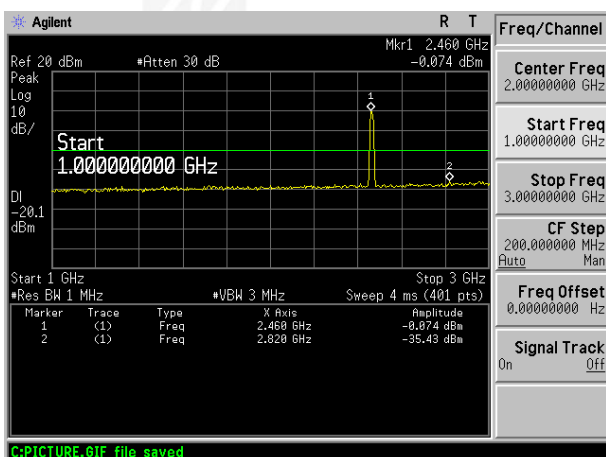

C:PICTURE.GIF file saved

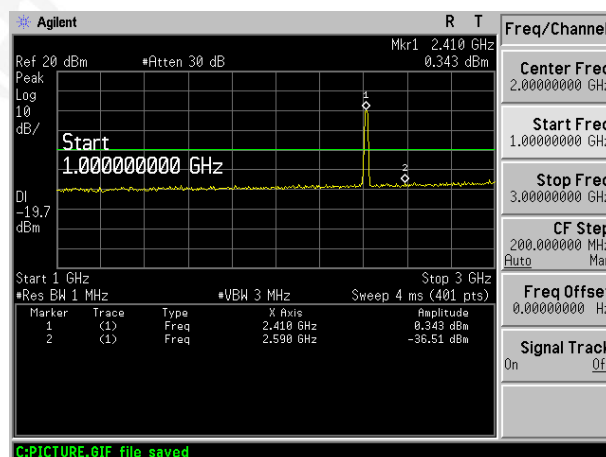


C:PICTURE.GIF file saved

Highest channel



C:PICTURE.GIF file saved

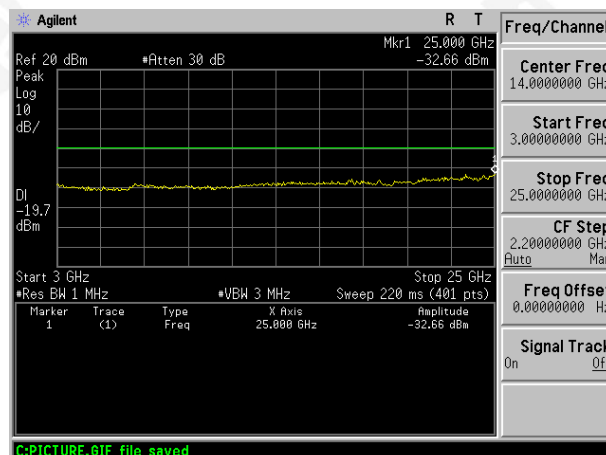


C:PICTURE.GIF file saved

802.11g- Middle channel




C:PICTURE.GIF file saved


802.11g- Highest channel

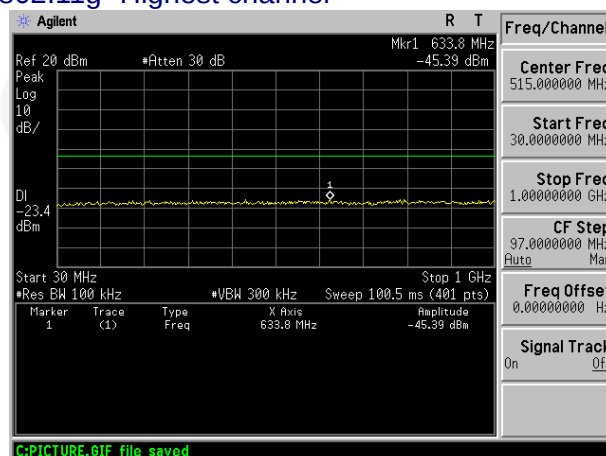


C:PICTURE.GIF file saved

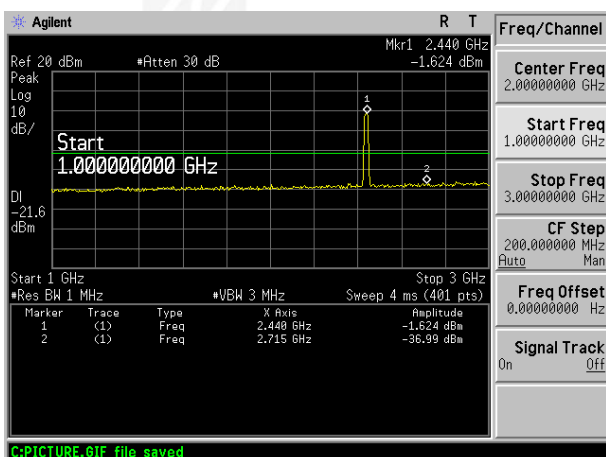


C:PICTURE.GIF file saved

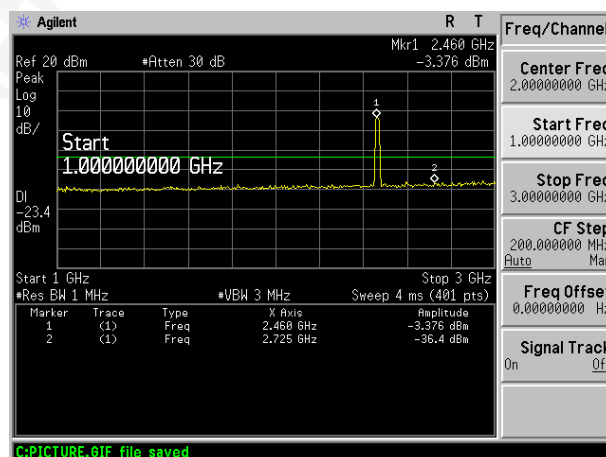

C:PICTURE.GIF file saved

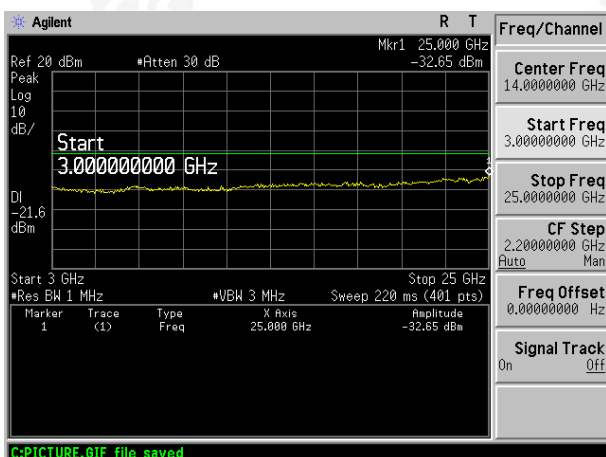


C:PICTURE.GIF file saved





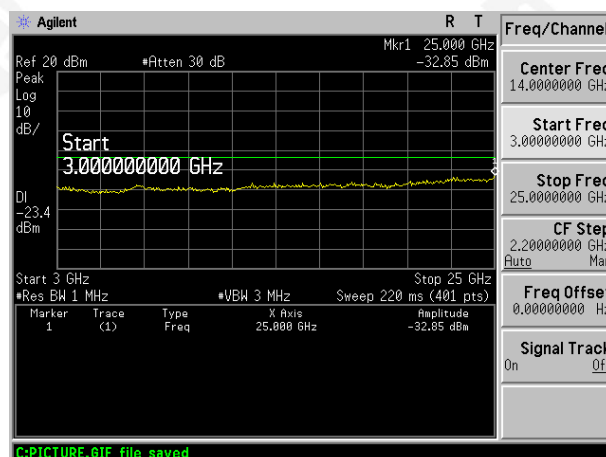


C:PICTURE.GIF file saved


802.11n(HT20)-Lowest channel

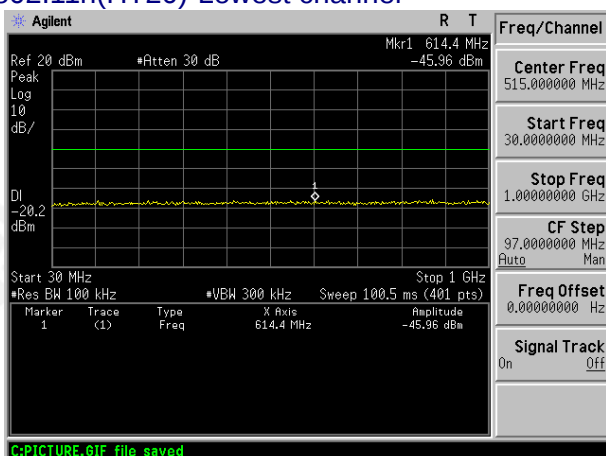

802.11n(HT20)-Middle channel

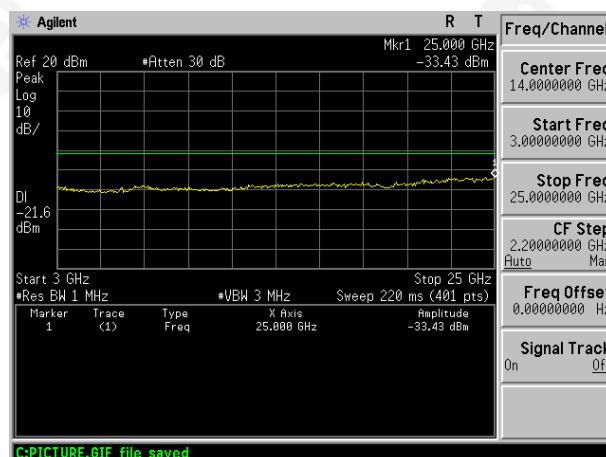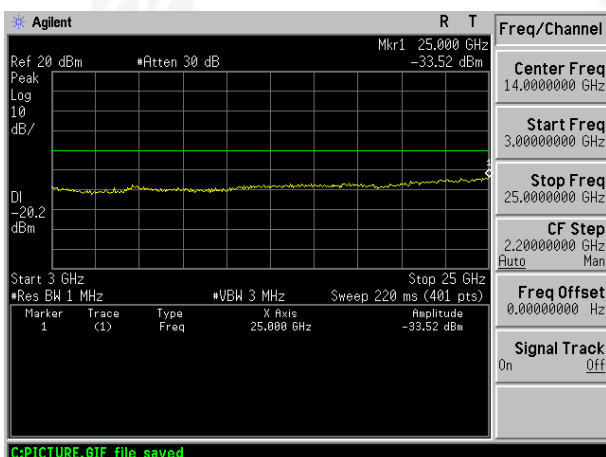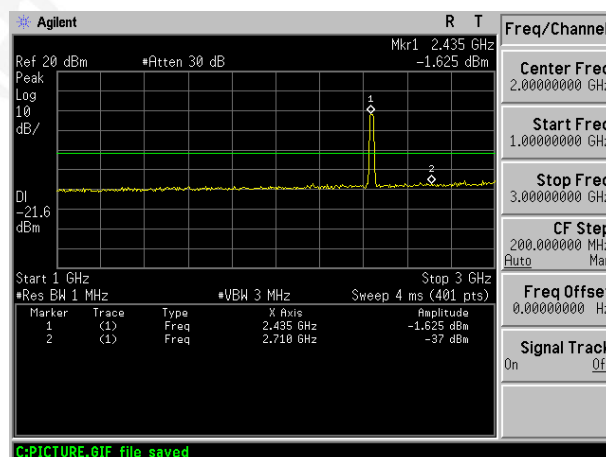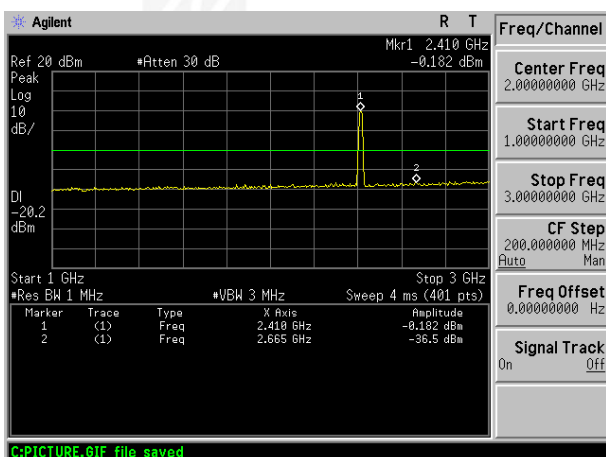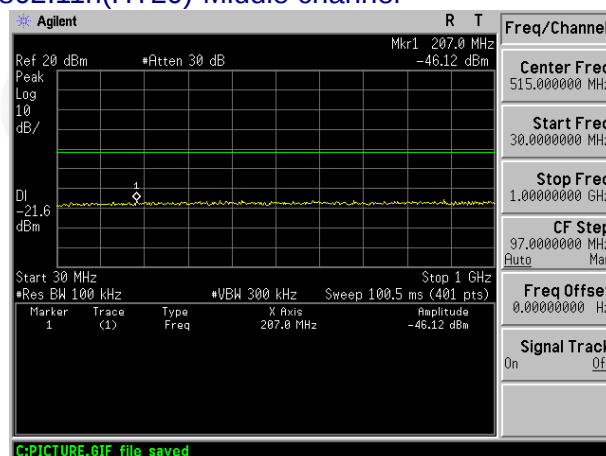


802.11n(HT20)-Highest channel

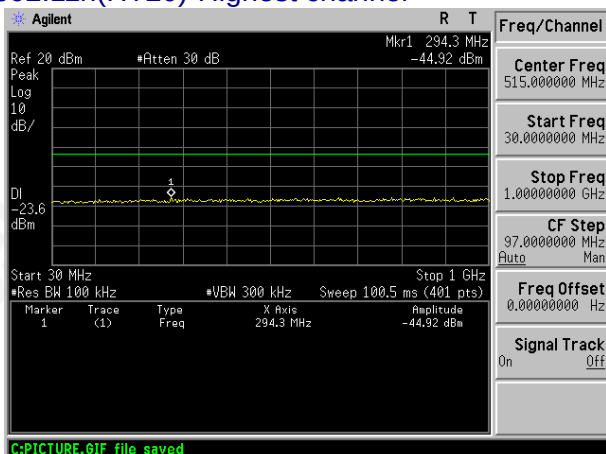


C:PICTURE.GIF file saved


802.11n(HT40)-Lowest channel

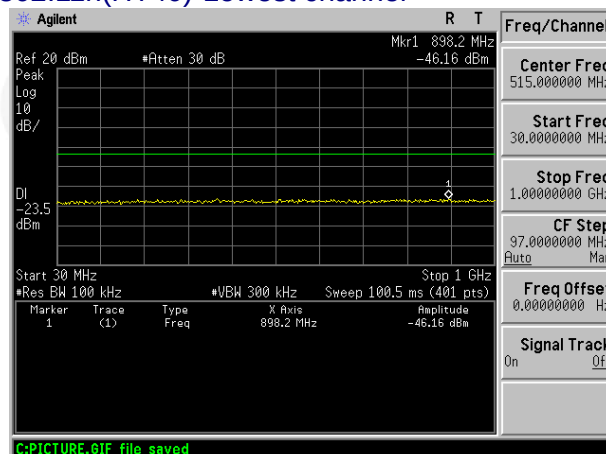


C:PICTURE.GIF file saved

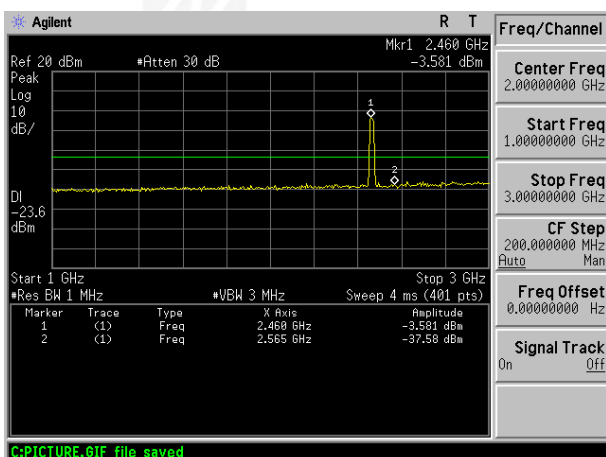


C:PICTURE.GIF file saved

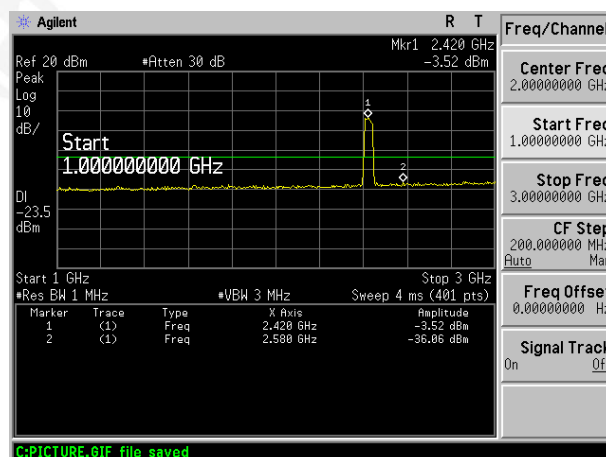

C:PICTURE.GIF file saved

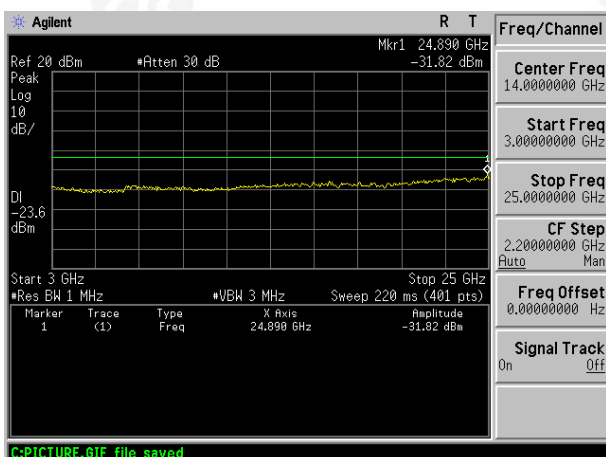


C:PICTURE.GIF file saved





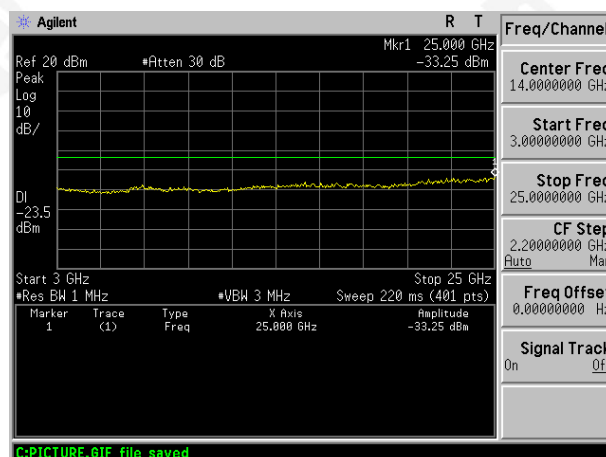


C:PICTURE.GIF file saved

802.11n(HT40)-Middle channel

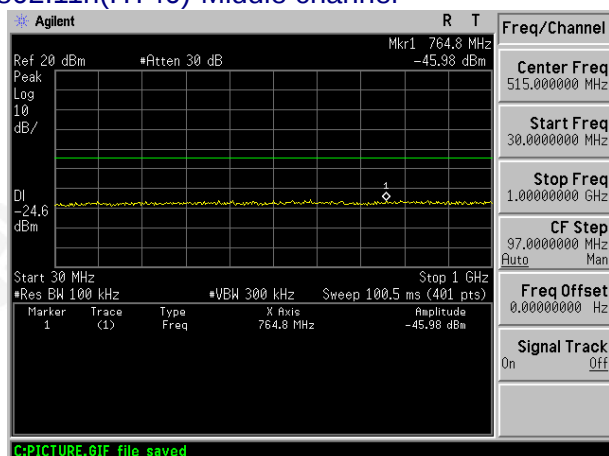

802.11n(HT40)-Highest channel

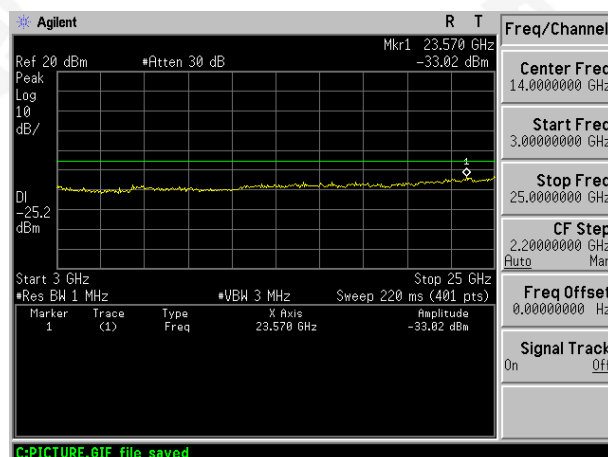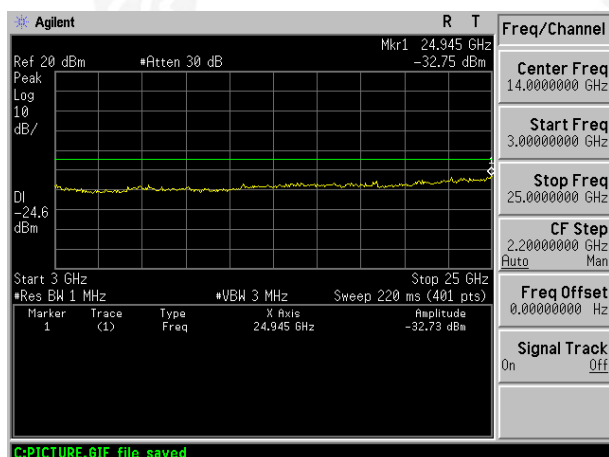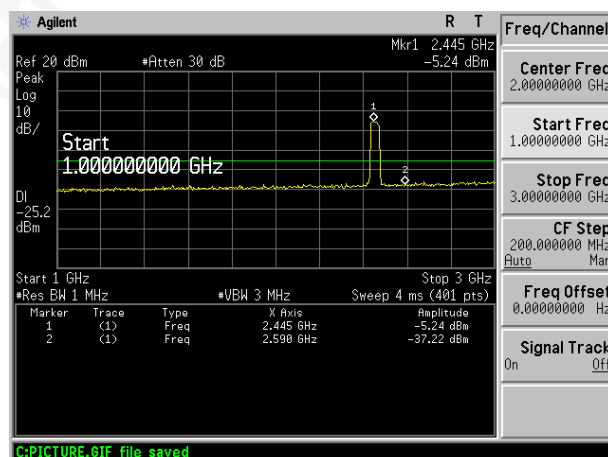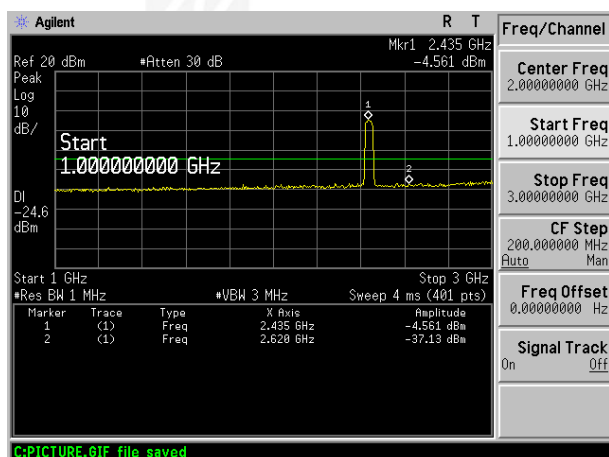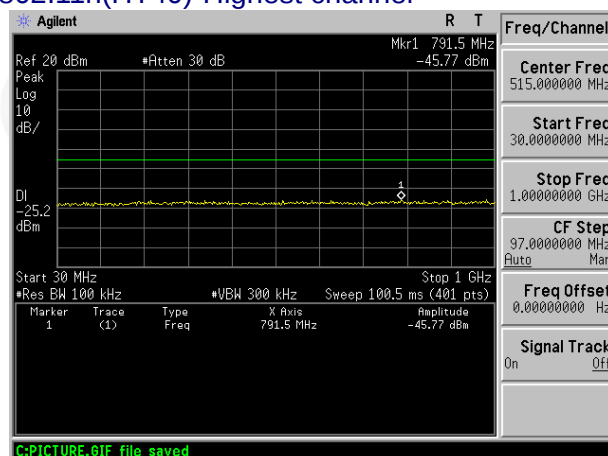

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antennas are FPCB antenna, the best case gain of the antennas are 1.0dBi, reference to the appendix II for details	

11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****