

Page 1 of 60

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Applicant: GadgeTek Inc.

7F.-5,NO.369,FUXING N.RD.,SONGSHAN DIST.,TAIPEI

CITY 10541, TAIWAN

Product Name: Click to Pray eRosary

GTI Brand Name:

Model No.: **GWD902**

Model Difference: N/A

Report Number: T19829W02-RP2 FCC ID: 2AT5G-GWD902 FCC Rule Part: §15.247, Cat: DTS

Sep. 17, 2019 Issue Date:

May 08, 2019 ~ Aug. 01, 2019 Date of Test:

Date of EUT Received: May 08, 2019

Issued by: Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891,

Taiwan. (R.O.C.) service@ccsrf.com

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards. The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 2 of 60

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190829W02-RP2	Rev.00	Initial creation of document	All	Sep. 17, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	.11
6	CONDUCTED EMISSION TEST	.12
7	PEAK OUTPUT POWER MEASUREMENT	.14
8	6dB BANDWIDTH MEASUREMENT	.19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	.22
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	.28
11	POWER SPECTRAL DENSITY	.57
12	ANTENNA REQUIREMENT	60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





GENERAL INFORMATION

1.1 Product Description

Product Name:	Click to Pray eRosary				
Brand Name:	GTI				
Model No.:	GWD902				
Model Difference:	N/A				
Hardware Version:	N/A				
Software Version:	N/A				
Wireless Charger:	Model No.: GWD901C, Supplier: GadgeTek Inc.				
	3.7Vdc from Rechargeable Battery or 5.0V from wireless charger				
Power Supply:	Battery: Model No.: PL400811D, Supplier: Huizhou Everpower Technology Co., Ltd.				

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version	BT V5.0 single mode
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	3.49dBm (BT 4.0) 3.53dBm (BT 5.0)
Antenna Designation:	Chip Antenna, Gain: -20dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 5 of 60

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas. Guidance v05r02

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

1.6 Referencing test data across separate equipment authorization

The test report T190313W07-RP1 under original FCC ID: 2AT5G-GWD901 are fully referred for the new FCC ID: 2AT5G-GWD902 in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 6 of 60

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.


2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port) Emission Configuration



Fig 2-2 Radiated Emission



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	T420	S0012483	Un-shielding	shielding

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated unle testins shirtly in the start report retire only to the sample(s) seed and such sample(s) are testins and the start in this deciment to 30 days only. Per shirtly with the start in the sample(s) are testins and the start in the start i Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 8 of 60

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	N/A
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge	
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant



Page 9 of 60

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	15	2430 MHz	29	2458 MHz
2	2404 MHz	16	2432 MHz	30	2460 MHz
3	2406 MHz	17	2434 MHz	31	2462 MHz
4	2408 MHz	18	2436 MHz	32	2464 MHz
5	2410 MHz	19	2438 MHz	33	2466 MHz
6	2412 MHz	20	2440 MHz	34	2468 MHz
7	2414 MHz	21	2442 MHz	35	2470 MHz
8	2416MHz	22	2444 MHz	36	2472 MHz
9	2418 MHz	23	2446 MHz	37	2474 MHz
10	2420 MHz	24	2448 MHz	38	2476 MHz
11	2422 MHz	25	2450 MHz	39	2478 MHz
12	2424 MHz	26	2452 MHz	40	2480 MHz
13	2426 MHz	27	2454 MHz		
14	2428 MHz	28	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 10 of 60

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)		
	RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth LE	2402 to 2480	2442	GFSK	1		
Bluetooth LE	2402 to 2480	2442	GFSK	2		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2		
1						


Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case H position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page 11 of 60



MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.





CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020	
EMI Test Receiver	R&S	ESCI	101203	10/29/2018	10/28/2019	
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	01/31/2019	01/30/2020	
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020	
Software	EZ-EMC(CCS-3A1-CE)					

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



6.4 Test SET-UP (Block Diagram of Configuration)

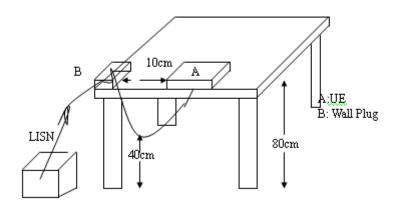

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

N/A, EUT powered from Wireless Charger.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

席手力有処可・児根守結系性對測減之樣必具真,門時此樣必理体質別欠。多報告系經系公司書面評可,不可能价模製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to sold responsibility is to its Client and to sold responsibility is to its Client and to sold responsibility is to its Client and the sold responsibility is to its Client and the sold responsibility is to the find the first of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7.4 Measurement Procedure:

- 1.Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas Guidance & ANSI C63.10...
- 3.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.


Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor:

DATA RATE 1 Mbps:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	63.00	2.01	2.53	3.00

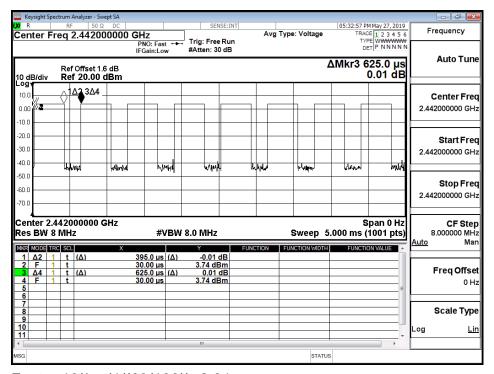


Duty Cycle Factor: 10*log(1/(63/100))=2.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



DATA RATE 2 Mbps (BT 5.0):

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	34.00	4.69	4.76	5.00

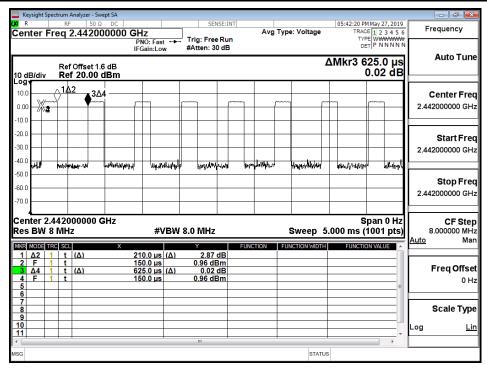

Duty Cycle Factor:10*log(1/(34/100))=4.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the particular of the company of the c transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 17 of 60

7.5 Measurement Result:

DATA RATE 1 Mbps:


BLE mode:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	3.47	1 Watt = 30 dBm
Mid	2442	3.49	1 Watt = 30 dBm
High	2480	3.48	1 Watt = 30 dBm
BLE mo	de:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	3.10	1 Watt = 30 dBm
Mid	2442	3.12	1 Watt = 30 dBm
High	2480	3.11	1 Watt = 30 dBm

*Note: Measured by power meter, cable loss as 1.6 dB that offsets on the power meter in Peak

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

*Note: Max. Output include tune up tolerance Power is average power





DATA RATE 2 Mbps (BT 5.0):

BI F mode:


DLL IIIO	40.		
СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	3.51	1 Watt = 30 dBm
Mid	2442	3.53	1 Watt = 30 dBm
High	2480	3.47	1 Watt = 30 dBm
BLE mo	de:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	3.22	1 Watt = 30 dBm
Mid	2442	3.31	1 Watt = 30 dBm
High	2480	3.25	1 Watt = 30 dBm

^{*}Note: Measured by power meter, cable loss as 1.6 dB that offsets on the power meter in Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power



Page 19 of 60



8 6DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPF					
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2010
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 20 of 60

8.5 Measurement Result:

DATA RATE 1 Mbps:

BLE mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.7016	> 0.5	PASS
2442	0.7013	> 0.5	PASS
2480	0.6983	> 0.5	PASS


DATA RATE 2 Mbps (BT 5.0):

BLE mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	1.184	> 0.5	PASS
2442	1.194	> 0.5	PASS
2480	1.186	> 0.5	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






DATA RATE 1 Mbps:


6dB Band Width Test Data CH-Low

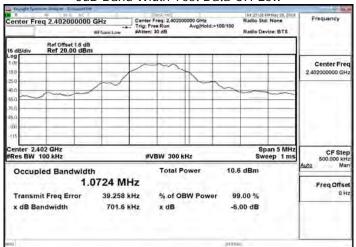

6dB Band Width Test Data CH-Mid

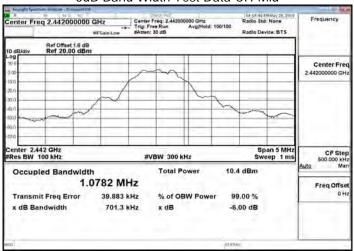


6dB Band Width Test Data CH-High

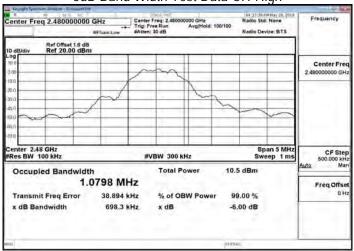

DATA RATE 2 Mbps (BT 5.0):


6dB Band Width Test Data CH-Low

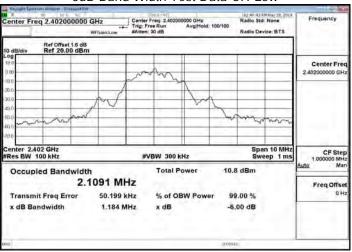

6dB Band Width Test Data CH-Mid



6dB Band Width Test Data CH-High

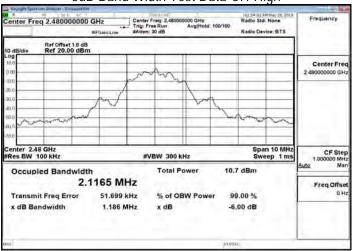

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be reproduced to the full content of the low.



Page 22 of 60

9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

9.2 Measurement Equipment Used:


Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



9.4 Measurement Procedure

Reference Level of Emission Limit:

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 24 of 60

Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

DATA RATE 1 Mbps:

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	3.84	-16.16
2442	3.63	-16.37
2480	3.74	-16.26

NOTE: cable loss as 1.6dB that offsets in the spectrum

NOTE: Refer to next page for plots.

DATA RATE 2 Mbps (BT 5.0):

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	3.84	-16.16
2442	3.69	-16.31
2480	3.71	-16.29


NOTE: cable loss as 1.6dB that offsets in the spectrum

NOTE: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Reference Level_BLE_1M_LowCH00-2402

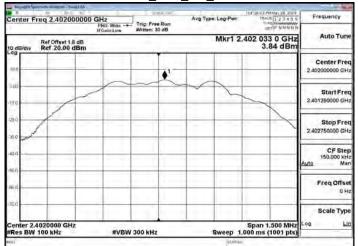


Reference Level_BLE_1M_MidCH19-2442

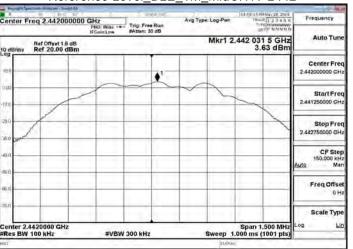


Reference Level_BLE_1M_HighCH39-2480




Reference Level_BLE_2M_LowCH00-2402

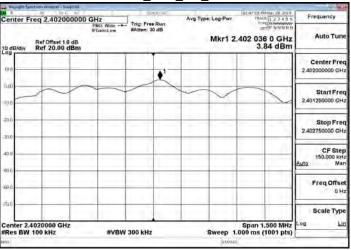

Reference Level_BLE_2M_MidCH19-2442

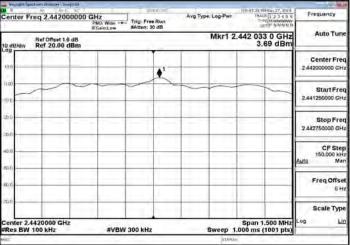

Reference Level_BLE_2M_HighCH39-2480

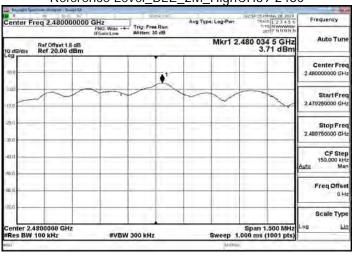


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Physical Refs (Refs) prosecuted to the fullest extent of the law.




Band Edge_BLE_1M_LowCH00-2402

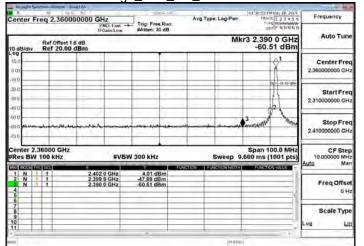


Band Edge_BLE_1M_HighCH39-2480

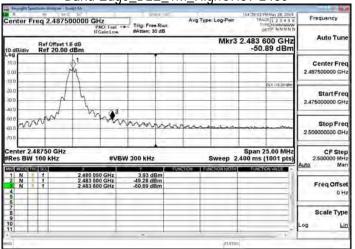

Band Edge_BLE_2M_LowCH00-2402

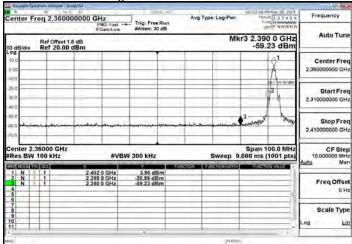

Band Edge_BLE_2M_HighCH39-2480

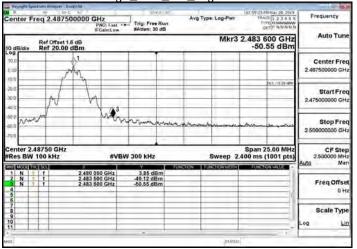


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Physical Refs (Refs) prosecuted to the fullest extent of the law




Spurious Emission_BLE_1M_LowCH00-2402

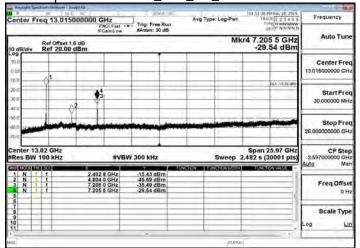


Spurious Emission_BLE_ 1M_MidCH19-2442

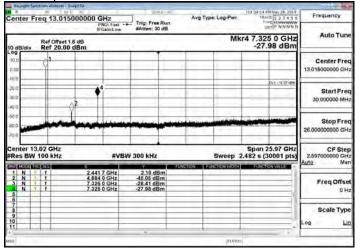


Spurious Emission_BLE_1M_HighCH39-2480

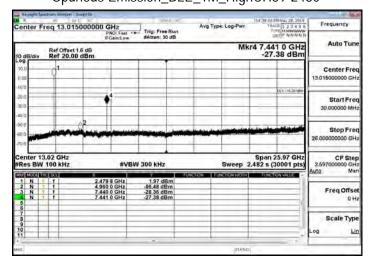


Spurious Emission_BLE_2M_LowCH00-2402

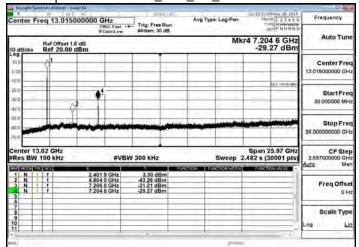

Spurious Emission_BLE_2M_MidCH19-2442

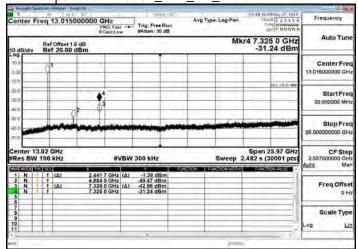


Spurious Emission BLE 2M HighCH39-2480

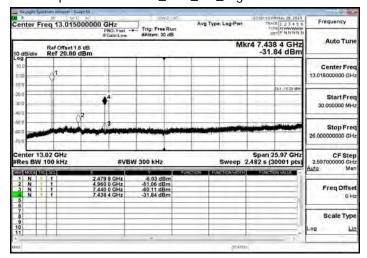

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Physical Refs (Refs) prosecuted to the fullest extent of the law



Page 28 of 60



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.


According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10.2 **Measurement Equipment Used**


966A Chamber							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020		
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020		
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020		
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M0200 3	08/20/2018	08/19/2019		
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020		
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020		
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020		
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019		
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R		
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R		
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R		
Software		e3 V6.1	1-20180413				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




10.3 **Test SET-UP**


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

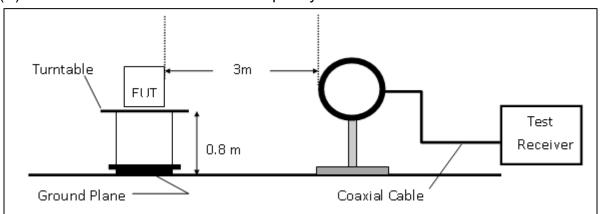


(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

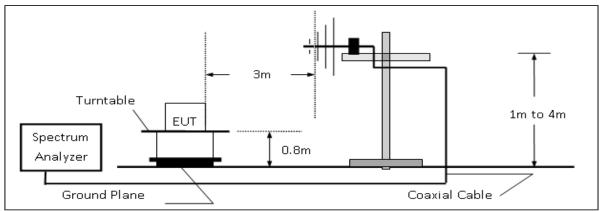

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

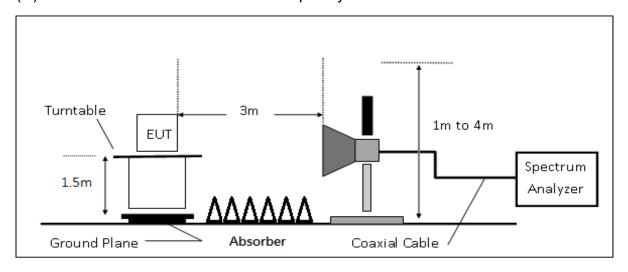

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only





10.4 **Measurement Procedure**

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.



Page 32 of 60

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	<u> </u>	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 33 of 60




Radiated Band Edge Measurement Result **DATA RATE 1 Mbps:**

Project Number :T190313W07 **Operation Band** :BLE 1M Fundamental Frequency :2402 MHz Operation Mode :BE CH Low

EUT Pol. :H Plan **Test Date** :2019-05-08


Temp./Humi. :20/61 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

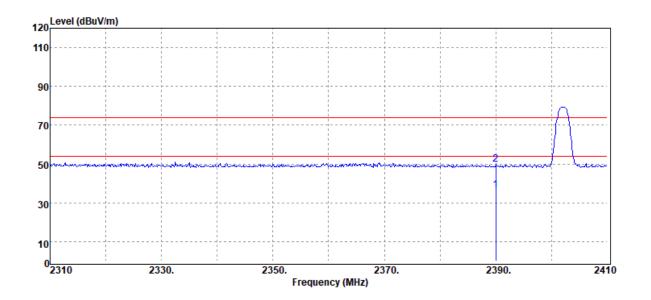

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.0	0 Average	39.90	-3.38	36.52	54.00	-17.48
2390.0	0 Peak	53.25	-3.38	49.87	74.00	-24.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Project Number :T190313W07 **Operation Band** :BLE 1M Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :H Plan


Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

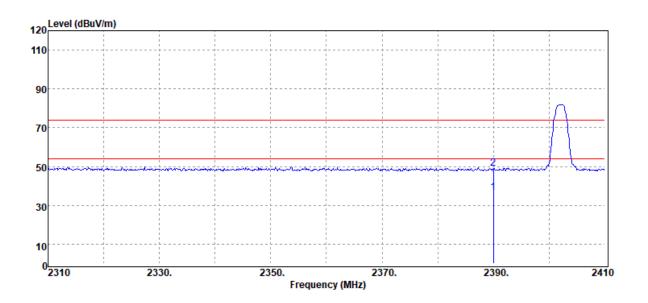

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	39.97	-3.38	36.59	54.00	-17.41
2390.00	Peak	52.37	-3.38	48.99	74.00	-25.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Project Number Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:T190313W07 :BLE 1M :2480 MHz :BE CH High :H Plan

Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

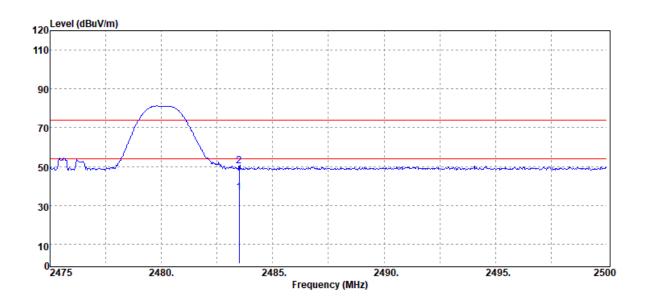

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	39.57	-2.83	36.74	54.00	-17.26
2483.50	Peak	53.14	-2.83	50.31	74.00	-23.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






Project Number Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:T190313W07 :BLE 1M :2480 MHz :BE CH High :H Plan

Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

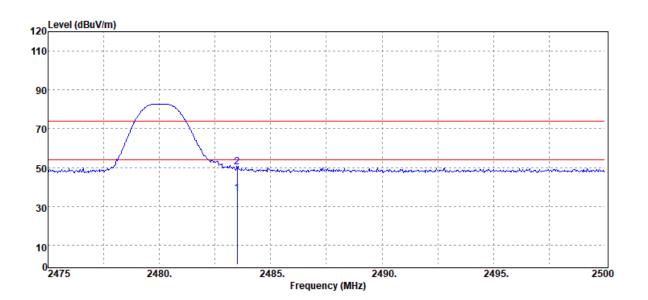

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	39.56	-2.83	36.73	54.00	-17.27
2483.50	Peak	53.07	-2.83	50.24	74.00	-23.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 37 of 60




DATA RATE 2 Mbps (BT 5.0):

Project Number :T190313W07 **Operation Band** :BLE 2M Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :H Plan


Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

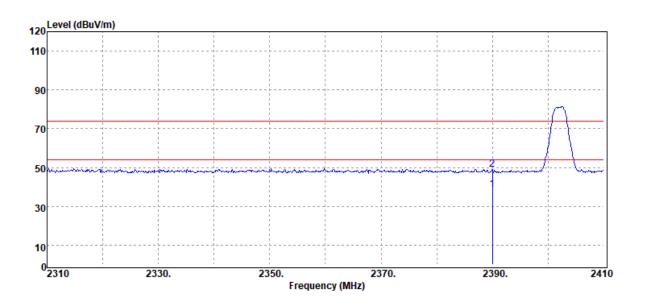

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
2390.00	Average	42.09	-3.38	38.71	54.00	-15.29
2390.00	Peak	52.47	-3.38	49.09	74.00	-24.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






Project Number :T190313W07 **Operation Band** :BLE 2M Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :H Plan


Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

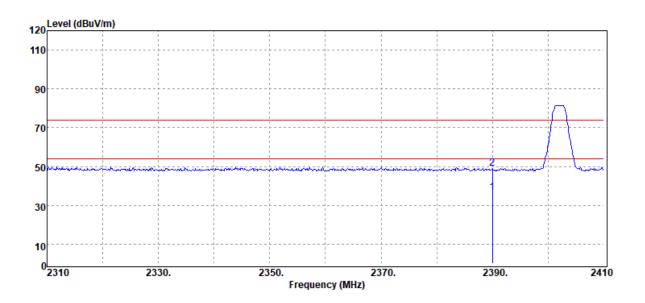

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	39.84	-3.38	36.46	54.00	-17.54
2390.00	Peak	52.36	-3.38	48.98	74.00	-25.02


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 2M :2480 MHz :BE CH High :H Plan

Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

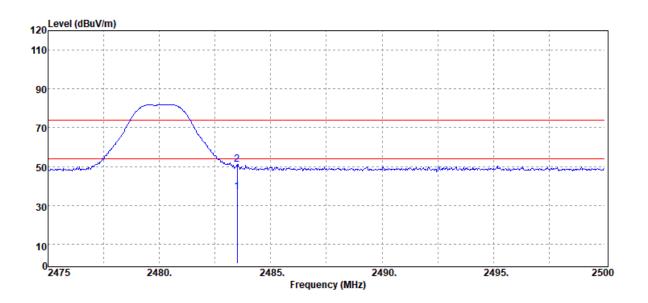

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	39.68	-2.83	36.85	54.00	-17.15
2483.50	Peak	54.10	-2.83	51.27	74.00	-22.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 2M :2480 MHz :BE CH High :H Plan

Test Date :2019-05-08 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

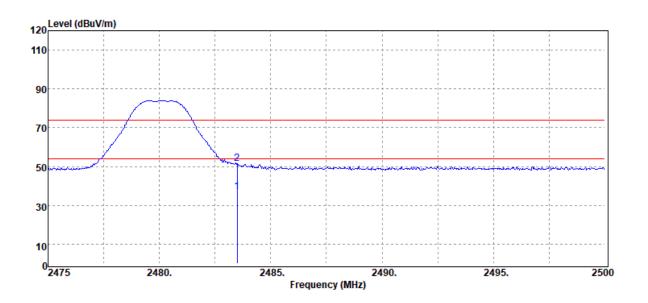

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	39.78	-2.83	36.95	54.00	-17.05
2483.50	Peak	54.49	-2.83	51.66	74.00	-22.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 41 of 60



Radiated Spurious Emission Measurement Result For Frequency form 30MHz to 1000MHz **DATA RATE 1 Mbps:**


Project Number :T190313W07 **Operation Band** :BLE 1M **Fundamental Frequency** :2442 MHz **Operation Mode** :Tx CH Mid EUT Pol. :H Plan

Test Date :2019-05-24 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

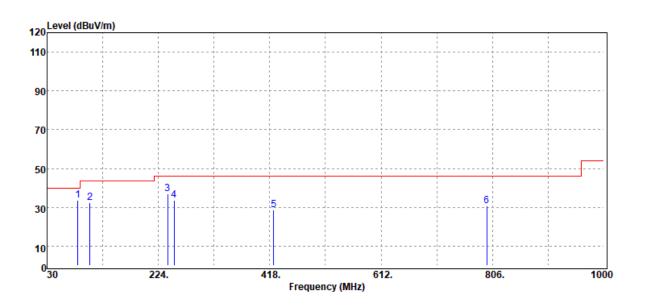

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
83.35	Peak	49.24	-15.52	33.72	40.00	-6.28
104.69	Peak	43.47	-11.18	32.29	43.50	-11.21
240.49	Peak	47.29	-10.25	37.04	46.00	-8.96
251.16	Peak	43.92	-10.38	33.54	46.00	-12.46
424.79	Peak	33.10	-4.51	28.59	46.00	-17.41
796.30	Peak	29.36	1.47	30.83	46.00	-15.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






:T190313W07 :BLE 1M :2442 MHz :Tx CH Mid :H Plan


Test Date :2019-05-24 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

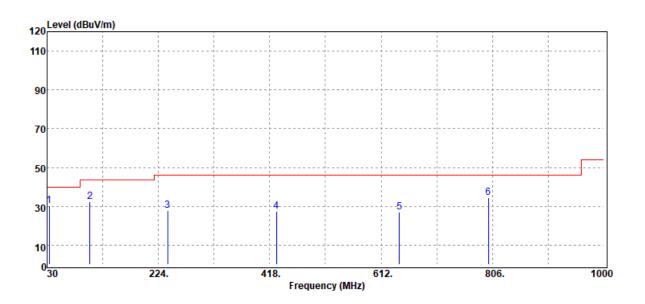

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
33.88	Peak	35.18	-4.78	30.40	40.00	-9.60
104.69	Peak	43.71	-11.18	32.53	43.50	-10.97
240.49	Peak	37.96	-10.25	27.71	46.00	-18.29
429.64	Peak	31.96	-4.51	27.45	46.00	-18.55
644.01	Peak	27.28	-0.39	26.89	46.00	-19.11
799.21	Peak	32.95	1.52	34.47	46.00	-11.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






DATA RATE 2 Mbps (BT5.0):


Project Number :T190313W07 **Operation Band** :BLE 2M Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH Mid EUT Pol. :H Plan

Test Date :2019-05-24 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

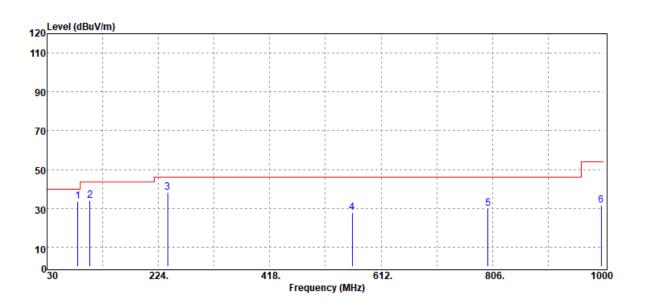

ual	Factor	ctrum Fa	r Spect	Detector	Freq.	
3		ng Level	Reading	Mode		
//m d	dB	3µV (.V dBµ	PK/QP/AV	MHz	
60	-15.52	9.12 -1	49.	Peak	83.35	
02	-11.18	5.20 -1	45.2	Peak	104.69	
40	-10.25	3.65 -1	48.0	Peak	240.49	
01	-2.20).21 -2	30.2	Peak	561.56	
90	1.50	3.40 1	28.4	Peak	798.24	
63	5.17	5.46 5	26.4	Peak	995.15	
02 40 01 90	-11.18 -10.25 -2.20 1.50	5.20 -1 3.65 -1 3.21 -2 3.40 1	45.2 48.6 30.2 28.4	Peak Peak Peak Peak	104.69 240.49 561.56 798.24	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 2M :2442 MHz :Tx CH Mid :H Plan

Test Date :2019-05-24 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

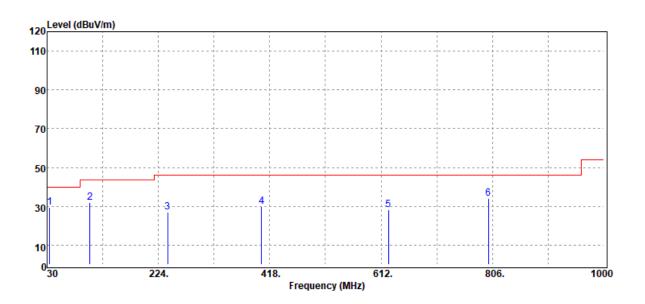

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
34.85	Peak	35.09	-5.51	29.58	40.00	-10.42
104.69	Peak	42.96	-11.18	31.78	43.50	-11.72
240.49	Peak	37.43	-10.25	27.18	46.00	-18.82
403.45	Peak	35.26	-5.49	29.77	46.00	-16.23
624.61	Peak	28.81	-0.55	28.26	46.00	-17.74
799.21	Peak	32.52	1.52	34.04	46.00	-11.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 45 of 60




Radiated Spurious Emission Measurement Result For Frequency above 1GHz

DATA RATE 1 Mbps:


Project Number :T190313W07 **Operation Band** :BLE 1M Fundamental Frequency :2402 MHz Operation Mode :Tx CH Low EUT Pol. :H Plan

Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

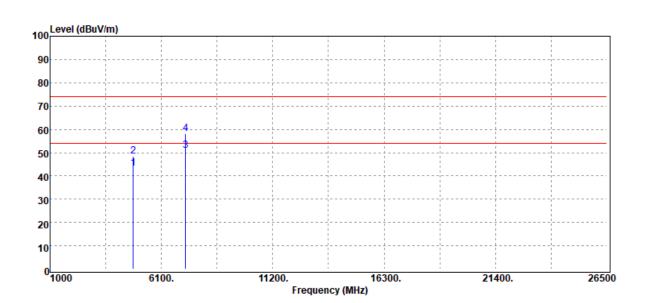

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	40.27	3.05	43.32	54.00	-10.68
4804.00	Peak	45.56	3.05	48.61	74.00	-25.39
7206.00	Average	40.32	10.64	50.96	54.00	-3.04
7206.00	Peak	47.53	10.64	58.17	74.00	-15.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 1M :2402 MHz :Tx CH Low :H Plan


Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

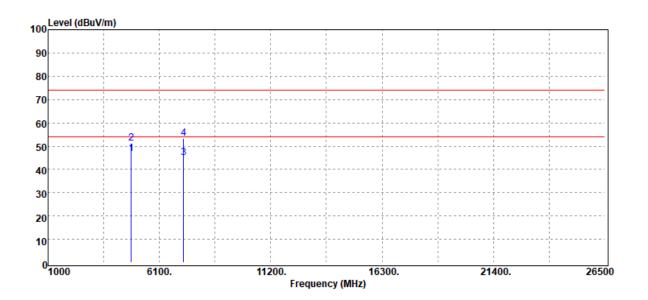

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB
4804.00	Average	43.77	3.05	46.82	54.00	-7.18
4804.00	Peak	48.05	3.05	51.10	74.00	-22.90
7206.00	Average	34.44	10.64	45.08	54.00	-8.92
7206.00	Peak	42.79	10.64	53.43	74.00	-20.57


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 1M :2442 MHz :Tx CH Mid :H Plan

Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

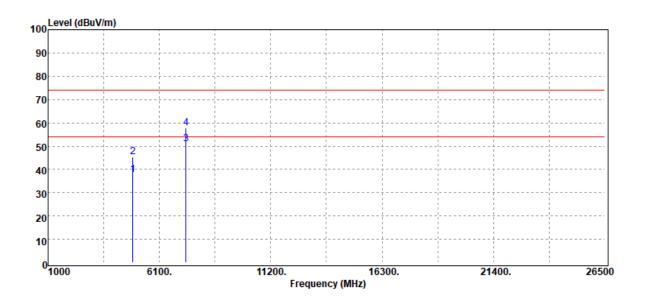

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
4884.00	Average	34.30	3.41	37.71	54.00	-16.29
4884.00	Peak	41.86	3.41	45.27	74.00	-28.73
7326.00	Average	39.88	11.09	50.97	54.00	-3.03
7326.00	Peak	46.70	11.09	57.79	74.00	-16.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 1M :2442 MHz :Tx CH Mid :H Plan


Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

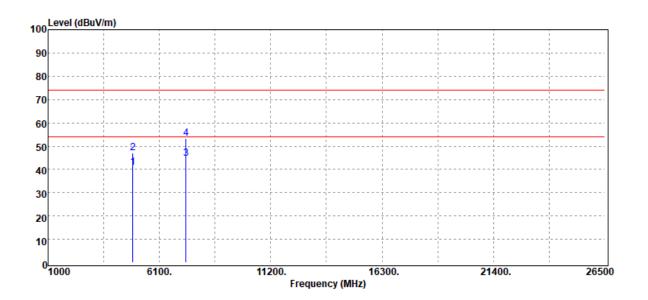

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4884.00	Average	37.52	3.41	40.93	54.00	-13.07
4884.00	Peak	43.52	3.41	46.93	74.00	-27.07
7326.00	Average	33.59	11.09	44.68	54.00	-9.32
7326.00	Peak	42.05	11.09	53.14	74.00	-20.86


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 1M :2480 MHz :Tx CH High :H Plan

Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

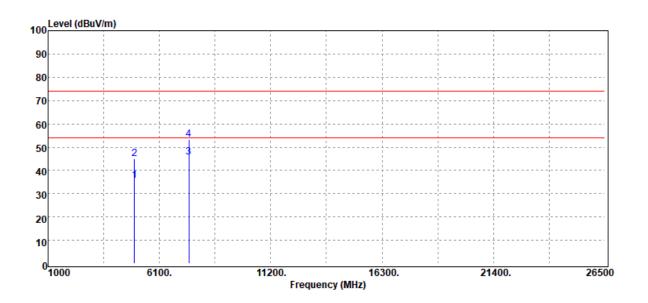

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	31.69	4.06	35.75	54.00	-18.25
4960.00	Peak	40.88	4.06	44.94	74.00	-29.06
7440.00	Average	34.84	10.67	45.51	54.00	-8.49
7440.00	Peak	42.56	10.67	53.23	74.00	-20.77

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 1M :2480 MHz :Tx CH High :H Plan


Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

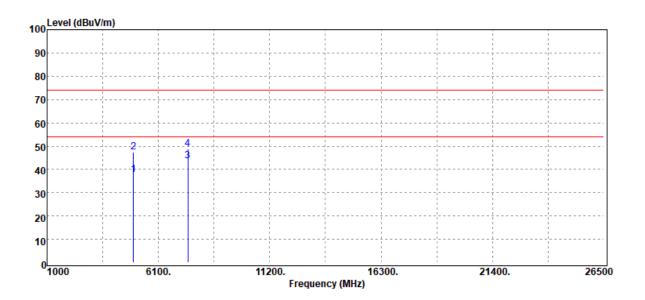

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4960.00	Average	33.53	4.06	37.59	54.00	-16.41
4960.00	Peak	43.28	4.06	47.34	74.00	-26.66
7440.00	Average	32.87	10.67	43.54	54.00	-10.46
7440.00	Peak	38.12	10.67	48.79	74.00	-25.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



:2019-05-23


:20/61



DATA RATE 2 Mbps (BT5.0):


Project Number :T190313W07 **Test Date Operation Band** :BLE 2M Temp./Humi. Fundamental Frequency :2402 MHz Engineer

:Jerry **Operation Mode** :Tx CH Low :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

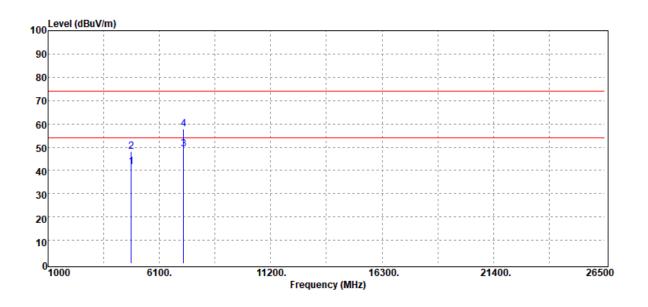

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.00	Average	38.39	3.05	41.44	54.00	-12.56
4804.00	Peak	45.18	3.05	48.23	74.00	-25.77
7206.00	Average	38.34	10.64	48.98	54.00	-5.02
7206.00	Peak	47.02	10.64	57.66	74.00	-16.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






:T190313W07 :BLE 2M :2402 MHz :Tx CH Low :H Plan


Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

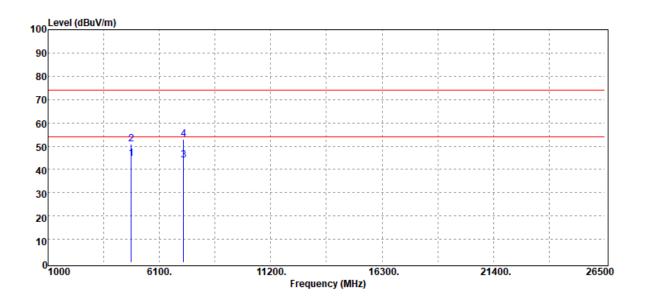

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4804.00	Average	41.46	3.05	44.51	54.00	-9.49
4804.00	Peak	47.96	3.05	51.01	74.00	-22.99
7206.00	Average	33.37	10.64	44.01	54.00	-9.99
7206.00	Peak	42.27	10.64	52.91	74.00	-21.09


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






:T190313W07 :BLE 2M :2442 MHz :Tx CH Mid :H Plan

Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

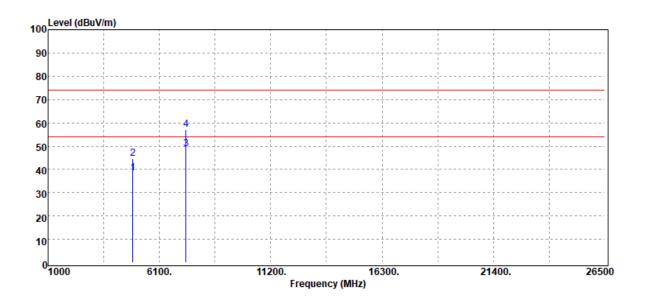

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
4884.00	Average	34.84	3.41	38.25	54.00	-15.75
4884.00	Peak	41.31	3.41	44.72	74.00	-29.28
7326.00	Average	37.58	11.09	48.67	54.00	-5.33
7326.00	Peak	45.93	11.09	57.02	74.00	-16.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:T190313W07 :BLE 2M :2442 MHz :Tx CH Mid :H Plan


Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

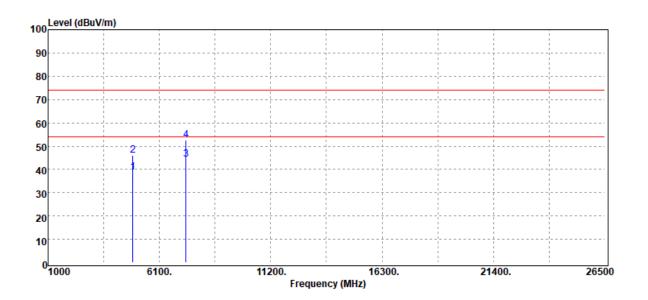

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4884.00	Average	35.22	3.41	38.63	54.00	-15.37
4884.00	Peak	42.69	3.41	46.10	74.00	-27.90
7326.00	Average	33.23	11.09	44.32	54.00	-9.68
7326.00	Peak	41.58	11.09	52.67	74.00	-21.33


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BLE 2M :2480 MHz :Tx CH High :H Plan

Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry :VERTICAL Measurement Antenna Pol.

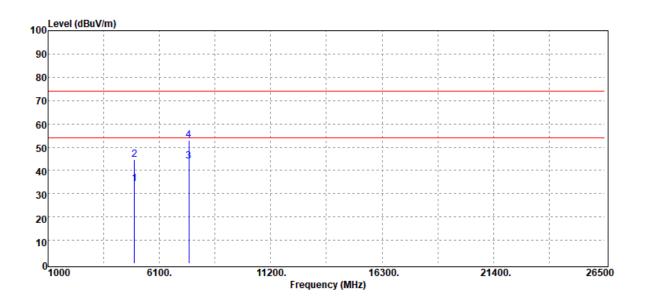

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	30.23	4.06	34.29	54.00	-19.71
4960.00	Peak	40.69	4.06	44.75	74.00	-29.25
7440.00	Average	33.29	10.67	43.96	54.00	-10.04
7440.00	Peak	42.12	10.67	52.79	74.00	-21.21


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Project Number :T190313W07 **Operation Band** :BLE 2M Fundamental Frequency :2480 MHz Operation Mode :Tx CH High EUT Pol. :H Plan

Test Date :2019-05-23 Temp./Humi. :20/61 Engineer :Jerry :HORIZONTAL Measurement Antenna Pol.

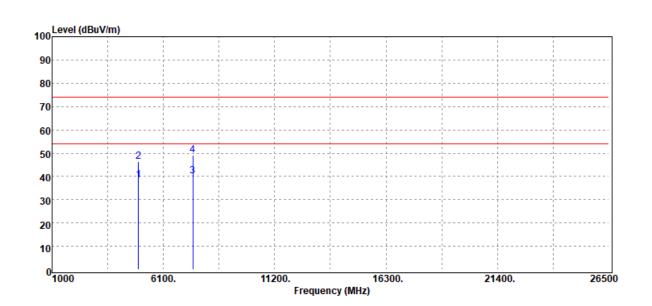

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4960.00	Average	34.28	4.06	38.34	54.00	-15.66
4960.00	Peak	42.35	4.06	46.41	74.00	-27.59
7440.00	Average	29.52	10.67	40.19	54.00	-13.81
7440.00	Peak	38.51	10.67	49.18	74.00	-24.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





11 POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Measurement Result:

DATA RATE 1 Mbps:

RI F mode

DEL IIIOGE			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-13.65	8	PASS
2442	-13.76	8	PASS
2480	-13.63	8	PASS

NOTE: cable loss as 1.6dB that offsets in the spectrum

DATA RATE 2 Mbps (BT 5.0):

BI F mode


Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-15.88	8	PASS
2442	-14.14	8	PASS
2480	-15.90	8	PASS

NOTE: cable loss as 1.6dB that offsets in the spectrum


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Power Density BLE 1M LowCH00-2402

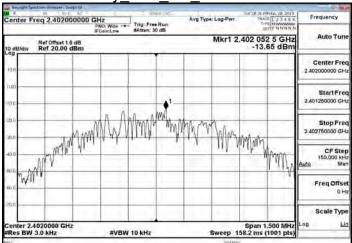


1M MidCH19-2442 Power Density BLE

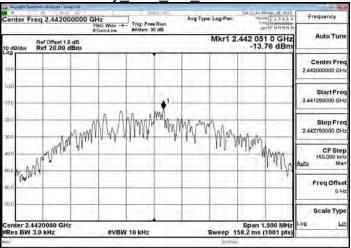


Power Density BLE 1M HighCH39-2480

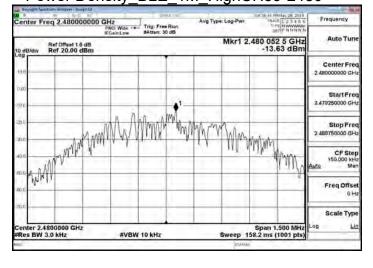


Power Density BLE 2M LowCH00-2402

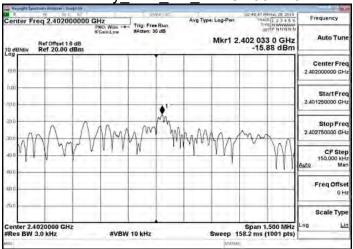

Power Density BLE 2M MidCH19-2442

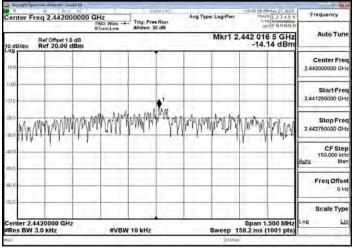

Power Density BLE 2M HighCH39-2480

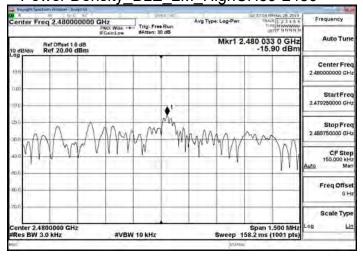

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Report No.: T190829W02-RP2

Page 60 of 60

12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。