

EVALUATION REPORT

for Certification

Manufacturer: Summit Technology

130, Digital-ro, Namsung Plaza suite 611,

Geumcheon-gu, Seoul, South Korea

Attn: Mr. Yong-seong Park / Senior Director

Date of Issue: Jan. 11, 2023

Order Number: GETEC-C1-22-731

Test Report Number: GETEC-E3-22-123

Test Site: GUMI UNIVERSITY EMC CENTER

CAB Designation Number: KR0033

RESPONSIBLE PARTY : Summit Technology

ADDRESS : 130, Digital-ro, Namsung Plaza suite 611, Geumcheon-gu, Seoul, South Korea

CONTACT PERSON : Mr. Yong-seong Park / Senior Director

Rule Part(s) : FCC Part 15 Subpart C-Intentional Radiator § 15.247

Test Method : ANSI C63.10 (2013)

Equipment Class : Digital Transmission System(DTS)

EUT Type : Touch Screen Controller

Type of Authority : Certification

Model Name : TDC-5100


This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10 (2013)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,


Jong-Woo, Park, Senior Engineer
GUMI UNIVERSITY EMC CENTER


Hyun Kim, Technical Manager
GUMI UNIVERSITY EMC CENTER

GETEC-QP-16-008 (Rev.01)

EMC CENTER

This test report only contains the result of a specific sample supplied by applicant for the testing.
It is not allowed to copy this report even partly without the approval of EMC center

verify No.132811208197



Version

Test Report No.	Date	Description
GETEC-E3-22-123	Jan. 11, 2023	- First Approval Report





CONTENTS

1. GENERAL INFORMATION	5
2. INTRODUCTION	6
3. PRODUCT INFORMATION	7
3.1 DESCRIPTION OF EUT.....	7
3.2 DEFINITION OF MODELS	7
3.3 SUPPORT EQUIPMENT / CABLES USED	8
3.4 MODIFICATION ITEM(S).....	8
4. ANTENNA REQUIREMENT - §15.203	9
4.1 DESCRIPTION OF ANTENNA.....	9
5. DESCRIPTION OF TESTS.....	9
5.1 TEST CONDITION.....	9
6. REFERENCES STANDARDS	9
7. SUMMARY OF TEST RESULTS	10
8. 6 DB BANDWIDTH MEASUREMENT	11
8.1 OPERATING ENVIRONMENT.....	11
8.2 TEST SET-UP (LAYOUT)	11
8.3 LIMIT	11
8.4 TEST EQUIPMENT USED.....	11
8.5 TEST TEST PROCEDURE	11
8.6 TEST RESULT	12
9. CONDUCTED MAXIMUM OUTPUT POWER MEASUREMENT	17
9.1 OPERATING ENVIRONMENT.....	17
9.2 TEST SET-UP (LAYOUT)	17
9.3 LIMIT	17
9.4 TEST EQUIPMENT USED.....	17
9.5 TEST PROCEDURE	17
9.6 TEST RESULT	18
10. POWER SPECTRAL DENSITY MEASUREMENT	19
10.1 OPERATING ENVIRONMENT	19
10.2 TEST SET-UP (LAYOUT)	19
10.3 LIMIT	19
10.4 TEST EQUIPMENT USED.....	19
10.5 TEST PROCEDURE	19
10.6 TEST RESULT	20
11. CONDUCTED SPURIOUS EMISSION & OUT OF BAND EMISSION	26
11.1 OPERATING ENVIRONMENT.....	26
11.2 TEST SET-UP (LAY-OUT).....	26
11.3 LIMIT	26
11.4 TEST EQUIPMENT USED	26
11.5 TEST PROCEDURE.....	26
11.6 TEST RESULT	27



12. AC POWER LINE CONDUCTED EMISSION	39
12.1 OPERATING ENVIRONMENT	40
12.2 TEST SET-UP	40
12.3 MEASUREMENT UNCERTAINTY.....	40
12.4 LIMIT	41
12.5 TEST EQUIPMENT USED.....	41
12.6 TEST DATA FOR CONDUCTED EMISSION	41
12.7 TEST RESULT	42
13. RADIATED SPURIOUS & RESTRICTED BAND EDGE EMISSION.....	46
13.1 OPERATING ENVIRONMENT	47
13.2 TEST SET-UP.....	47
13.3 MEASUREMENT UNCERTAINTY	47
13.4 LIMIT	48
13.5 TEST EQUIPMENT USED.....	48
13.6 TEST DATA FOR RADIATED SPURIOUS EMISSION.....	49
13.7 TEST DATA FOR RADIATED RESTRICTED BAND EDGE EMISSION	50
14. SAMPLE CALCULATIONS.....	51
14.1 EXAMPLE 1 :	51
14.2 EXAMPLE 2 :	51
15. RECOMMENDATION & CONCLUSION	52
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – LABELLING	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – SCHEMATIC DIAGRAM	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – EXTERNAL PHOTOGRAPH	
APPENDIX G – INTERNAL PHOTOGRAPH	
APPENDIX H – USER’S MANUAL	
APPENDIX I – OPERATIONAL DESCRIPTION	
APPENDIX J – ANTENNA SPECIFICATION	
APPENDIX K – PART LIST	
APPENDIX L – RF EXPOSURE EVALUATION	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: Summit Technology

Applicant Address: 130, Digital-ro, Namsung Plaza suite 611, Geumcheon-gu, Seoul, South Korea

Manufacturer: Summit Technology

Manufacturer Address: 130, Digital-ro, Namsung Plaza suite 611, Geumcheon-gu, Seoul, South Korea

Contact Person: Mr. Yong-seong Park / Senior Director

Telephone Number: +82-2-6929-3161

- **FCC ID.** 2AT6QTDC5100
- **Equipment Class** Digital Transmission System (DTS)
- **EUT Type** Touch Screen Controller
- **Model Name** TDC-5100
- **Rule Part(s)** FCC Part 15 Subpart C-Intentional Radiator § 15.247
- **Test Method** ANSI C63.10 (2013)
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v05r01(April 2,2019)
- **Dates of Test** Oct. 31, 2022 ~ Jan. 11, 2023
- **Place of Test** **GUMI UNIVERSITY EMC CENTER** (FCC Test firm Registration No.: 269701)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea
- **Test Report Number** GETEC-E3-22-123
- **Dates of Issue** Jan. 11, 2023



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **Summit Technology Touch Screen Controller (Model name: TDC-5100)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.10 (2013)

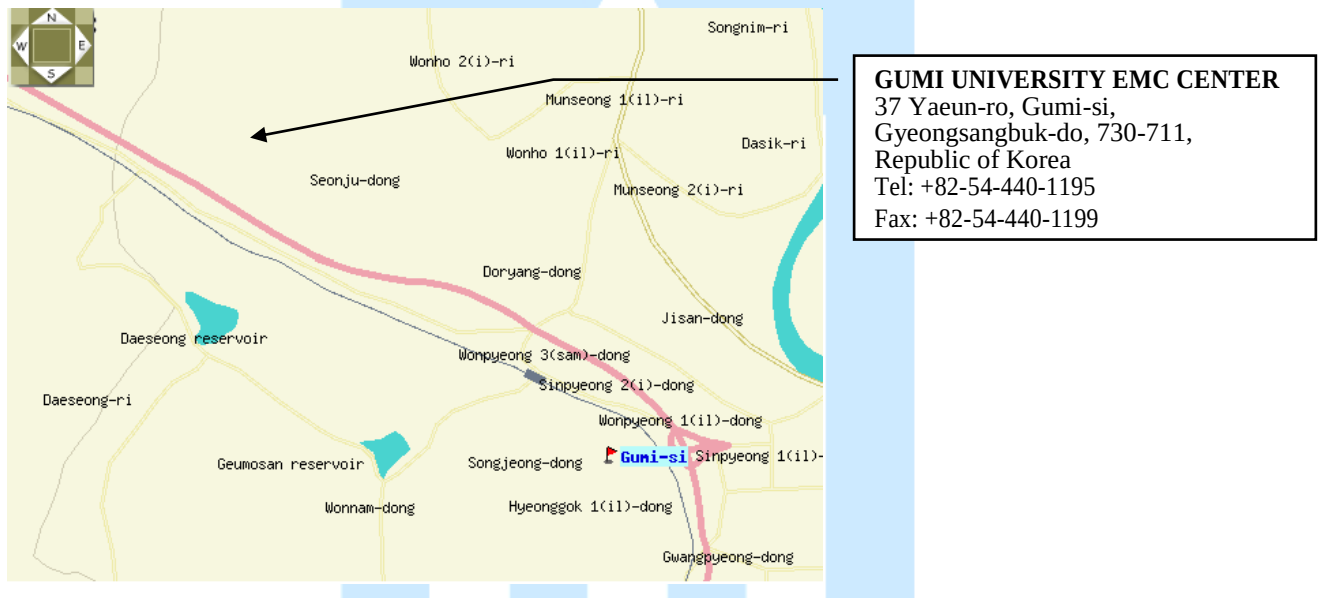


Fig 1. The map above shows the Gumi University in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **Summit Technology Touch Screen Controller (Model Name: TDC-5100)**
FCC ID.: 2AT6QTDC5100

- . Equipment	: Touch Screen Controller						
- . Model name	: TDC-5100						
- . Serial number	: Proto type						
- . Electrical Rating	: DC 3.7 V (Lithium-polymer battery)						
- . Manufacturer	: Summit Technology						
- . Frequency Range (DTS band)	TX 20 MHz BW:	2412 MHz - 2462 MHz					
	40 MHz BW:	2422 MHz - 2462 MHz					
	RX 20 MHz BW:	2412 MHz - 2462 MHz					
	40 MHz BW	2422 MHz - 2462 MHz					
- . Frequency Range (UNII band)	TX 20 MHz BW:	5180 MHz - 5240 MHz (UNII 1) / 5260 MHz - 5320 MHz (UNII 2A) 5500 MHz - 5720 MHz (UNII 2C) / 5745 MHz - 5825 MHz (UNII 3)					
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1) / 5270 MHz - 5310 MHz (UNII 2A) 5510 MHz - 5710 MHz (UNII 2C) / 5755 MHz - 5795 MHz (UNII 3)					
	80 MHz BW:	5210 Mhz (UNII 1) / 5290 MHz (UNII 2A) / 5530 MHz - 5690 MHz (UNII 2C) / 5775 MHz (UNII 3)					
	RX 20 MHz BW:	5180 MHz - 5240 MHz (UNII 1) / 5260 MHz - 5320 MHz (UNII 2A) 5500 MHz - 5720 MHz (UNII 2C) / 5745 MHz - 5825 MHz (UNII 3)					
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1) / 5270 MHz - 5310 MHz (UNII 2A) 5510 MHz - 5710 MHz (UNII 2C) / 5755 MHz - 5795 MHz (UNII 3)					
	80 MHz BW:	5210 Mhz (UNII 1) / 5290 MHz (UNII 2A) / 5530 MHz - 5690 MHz (UNII 2C) / 5775 MHz (UNII 3)					
- . Modulation	: BPSK, QPSK, QAM, CCK, OFDM						
- . Antenna Specification	: Antenna type : FPCB antenna Gain :						
	Freq. (MHz)	2400	2420	2440	2460	2480	2500
	Gain (dBi)	3.29	3.44	3.50	3.69	3.55	3.56
	Freq. (MHz)	5150	5250	5350	5490	5725	5825
	Gain (dBi)	3.11	3.36	3.67	3.70	3.06	3.33
- . Type (DFS)	: Client (without radar detection)						

3.2 Definition of models

-None.



3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
Notebook Computer ¹⁾	SAMSUNG	NT500R3W	S/N: 0Q2V91JJ100096T FCC ID.: N/A

Note)

1) The Support Equipment use only setting to the test mode.

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
AC/DC adapter ¹⁾	DEE VAN ENTERPRISE CO., LTD.	DSA-18QFB FUS A	N/A
AC/DC adapter ²⁾	DEE VAN ENTERPRISE CO., LTD.	DSA-12PF11-05 FUS 050200	N/A

1) Input: 100-240 V, 50/60 Hz, 0.8 A
Output: DC 5 V, 3 A / DC 9 V, 2 A / DC 12 V, 1.5 A

2) Input: 100-240 V, 50/60 Hz, 0.5 A
Output: DC 5 V, 2 A, 10 W

3.3.3 Used Cable(s)

Cable Name	Condition	Description
USB cable	Connected to EUT and AC/DC adapter	1.5 m shielded with a ferrite core

3.4 Modification Item(s)

-. None



4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

4.1 Description of Antenna

The **Summit Technology Touch Screen Controller**, comply with the requirement of §15.203 with a FPCB antenna permanently attached to the transmitter.

5. Description of tests

5.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used.

The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: 3.7 V / DC
- Operating condition during the test(s) :
 - Continuous RF transmitting mode with nominal maximum RF output power.
 - Operating channel frequency and modulation technology

	Mode	Available channel	Frequency	Modulation Technology
DTS	802.11b	1 ~ 11	2412 ~ 2462 MHz	DSSS
	802.11g	1 ~ 11	2412 ~ 2462 MHz	OFDM
	802.11n (HT20)	1 ~ 11	2412 ~ 2462 MHz	OFDM
	802.11n (HT40)	3 ~ 11	2422 ~ 2462 MHz	OFDM

- EUT set condition (Test Software)

Test Software	Android Debug Bridge
Test Software version	N/A

6. References Standards

- FCC Part 15 (2009) Subpart C-Intentional Radiator §15.247
- ANSI C 63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices
- KDB 558074 D01 DTS meas Guidance v05r02 (April 2, 2019): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247



7. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Result
§15.247(a)(2)	6 dB Bandwidth	Pass
§15.247(b)(3)	Conducted Maximum Output Power	Pass
§15.247(e)	Power Spectral Density	Pass
§15.247(d)	Conducted Out of Band Emission Emissions	Pass
§15.207(a)	AC Power line Conducted Emissions	Pass
§15.205, 15.209	Radiated Spurious Emissions	Pass
§15.247(d), 15.205, 15.209	Radiated Restricted Band Edge	Pass




8. 6 dB Bandwidth Measurement

8.1 Operating environment

Temperature : 27.3 °C
Relative Humidity : 54.3 % R.H.

8.2 Test Set-up (Layout)

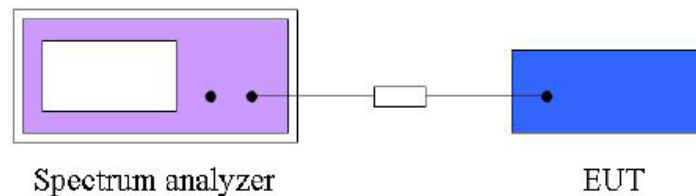

8.3 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

8.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSV	Rohde & Schwarz	Spectrum Analyzer	101552	Apr. 06, 2023
■ - OSP120	Rohde & Schwarz	Open Switch and control platform	101329	Jan. 12, 2023
■ - J12J103539-00-2	JUNFLON	RF Test Cable (OSP_DUT1)	AUG-03-21-066	N/A
■ - J12J103539-00-3	JUNFLON	RF Test Cable (OSP_RX)	AUG-03-21-074	N/A
■ - WMS 32	Rohde & Schwarz	Testing Software	VER10.40.10	N/A

8.5 Test Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



8.6 Test result

- Test Date : Oct. 04, 2022 ~ Nov. 30, 2022
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v05r02(April 2,2019)
- Operating Condition : RF transmitting mode
(1 ch: 2 412 MHz, 3ch: 2 422 MHz, 6 ch: 2 437 MHz, 7ch: 2 442 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency (MHz)	6 dB Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Min. Limit (MHz)	Result
2 412	8.40	2408.125	2416.525	0.50	Complies
2 437	9.05	2432.475	2441.525	0.50	Complies
2 462	9.05	2457.475	2466.525	0.50	Complies

IEEE 802.11g

Frequency (MHz)	6 dB Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Min. Limit (MHz)	Result
2 412	16.55	2403.725	2420.275	0.50	Complies
2 437	16.55	2428.725	2445.275	0.50	Complies
2 462	16.55	2453.725	2470.275	0.50	Complies

IEEE 802.11n (HT20)

Frequency (MHz)	6 dB Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Min. Limit (MHz)	Result
2 412	17.75	2403.125	2420.875	0.50	Complies
2 437	17.80	2428.075	2445.875	0.50	Complies
2 462	17.80	2453.075	2470.875	0.50	Complies

IEEE 802.11n (HT40)


Frequency (MHz)	6 dB Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Min. Limit (MHz)	Result
2 422	35.15	2404.425	2439.575	0.50	Complies
2 442	35.15	2424.425	2459.575	0.50	Complies
2 462	35.15	2444.425	2479.575	0.50	Complies




6 dB Bandwidth Plot on Configuration : IEEE 802.11b 1ch



6 dB Bandwidth Plot on Configuration : IEEE 802.11b 6ch

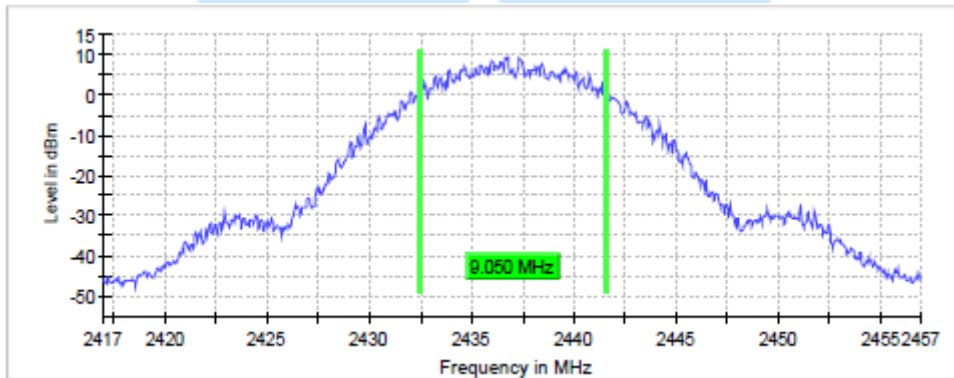


6 dB Bandwidth Plot on Configuration : IEEE 802.11b 11ch

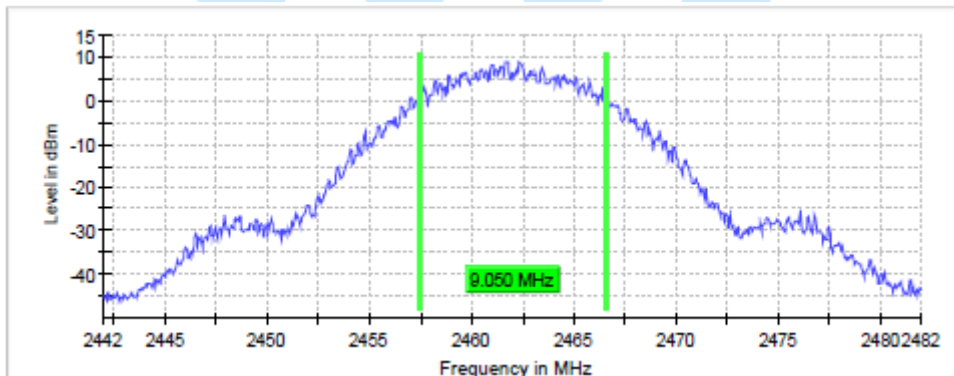





6 dB Bandwidth Plot on Configuration : IEEE 802.11g 1ch

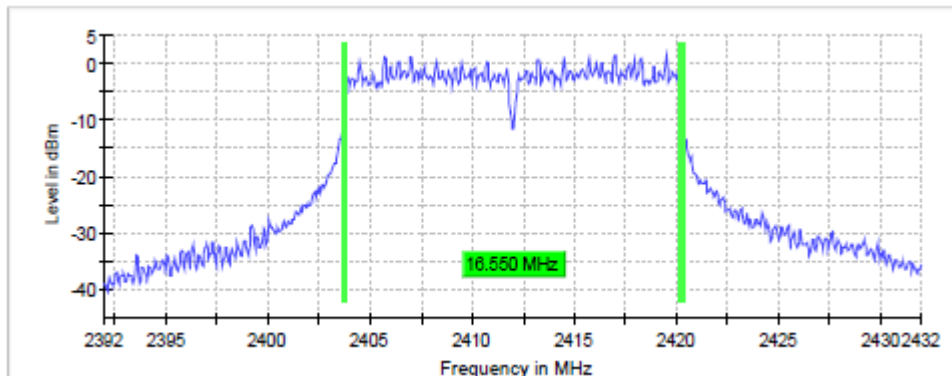

6 dB Bandwidth Plot on Configuration : IEEE 802.11g 6ch

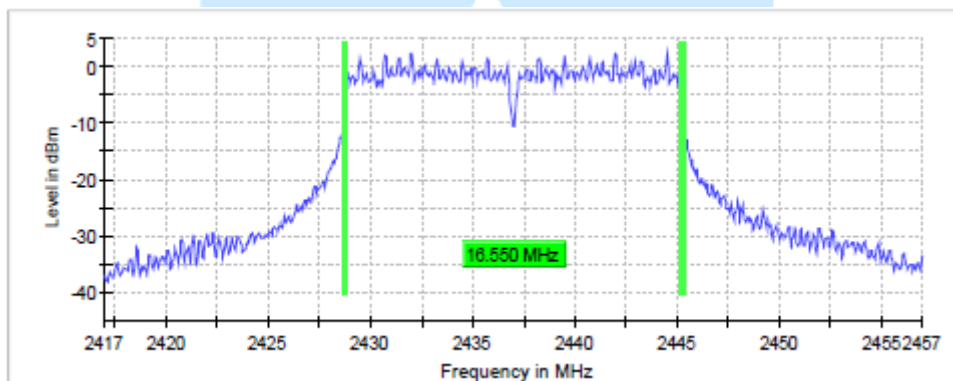


6 dB Bandwidth Plot on Configuration : IEEE 802.11g 11ch

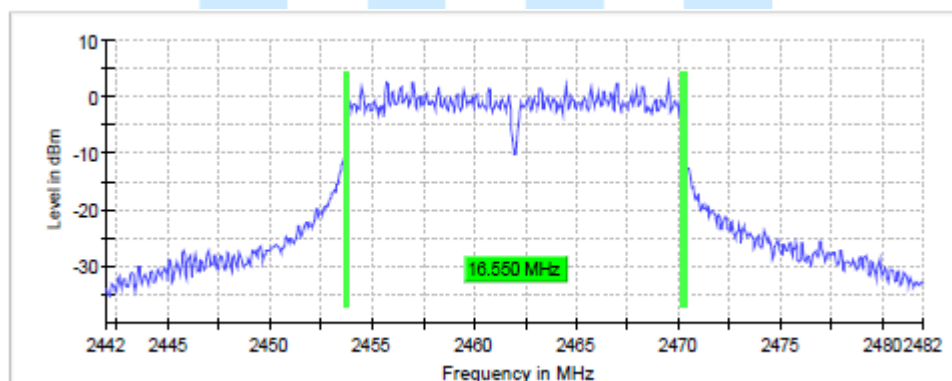





6 dB Bandwidth Plot on Configuration : IEEE 802.11n (HT20) 1ch

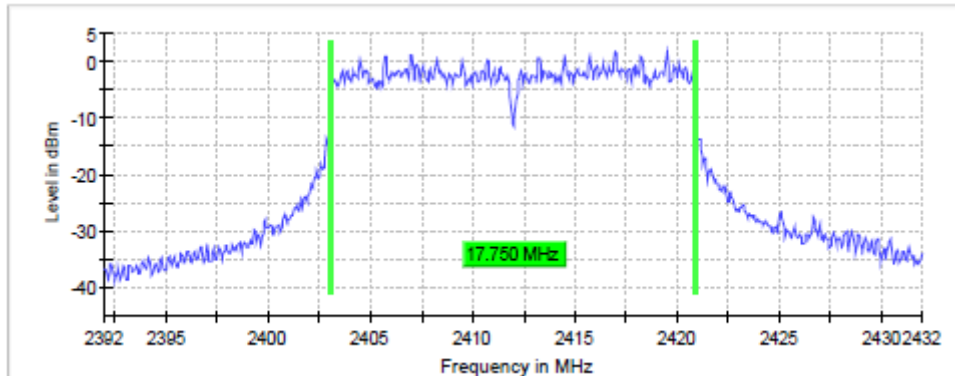

6 dB Bandwidth Plot on Configuration : IEEE 802.11n (HT20) 6ch

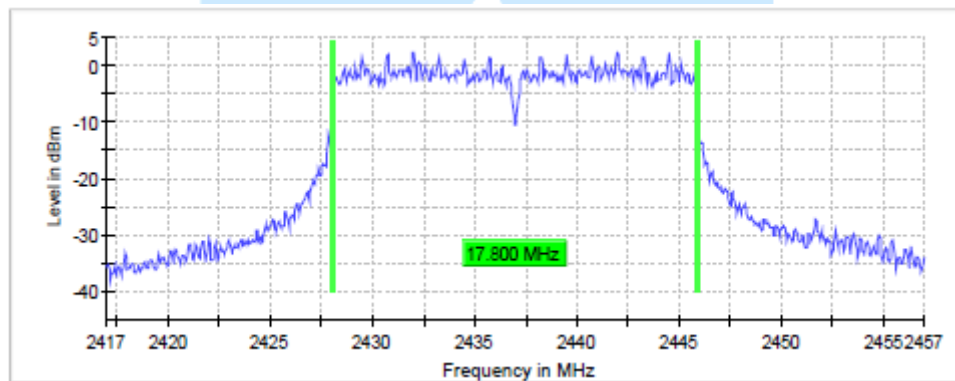


6 dB Bandwidth Plot on Configuration : IEEE 802.11n (HT20) 11ch

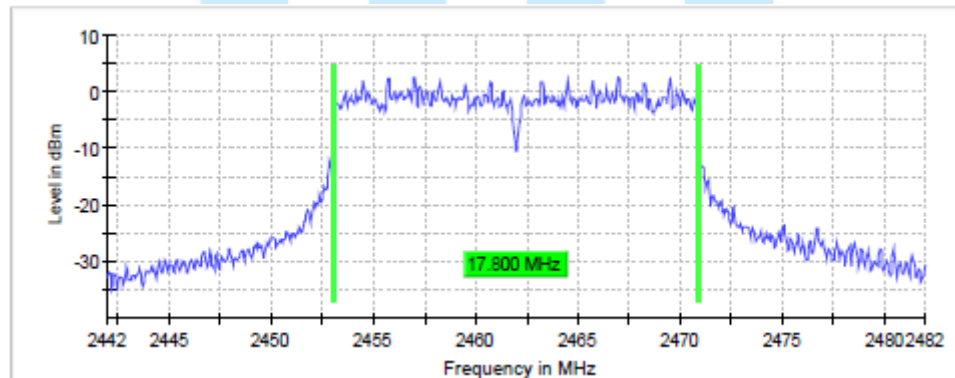





6 dB Bandwidth Plot on Configuration : IEEE 802.11n (HT40) 3ch

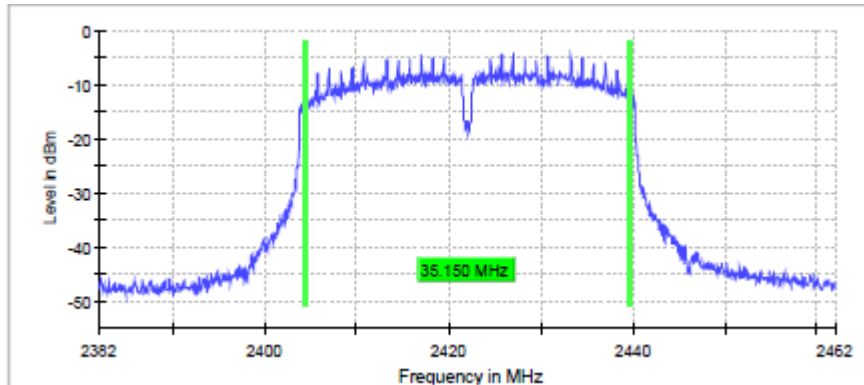

6 dB Bandwidth Plot on Configuration : IEEE 802.11n (HT40) 7ch

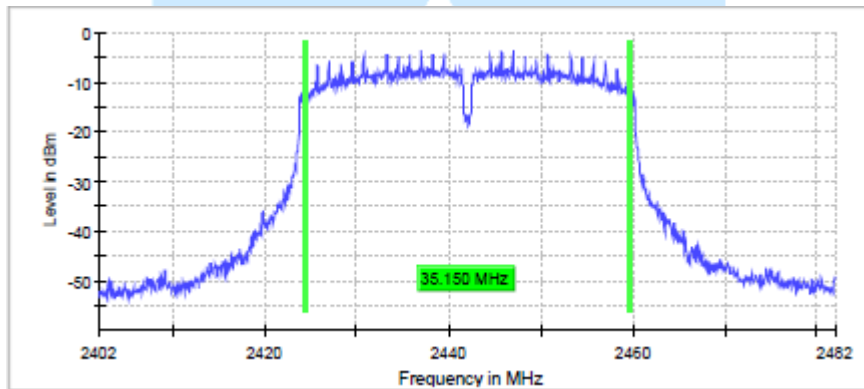

6 dB Bandwidth Plot on Configuration : IEEE 802.11n (HT40) 11ch

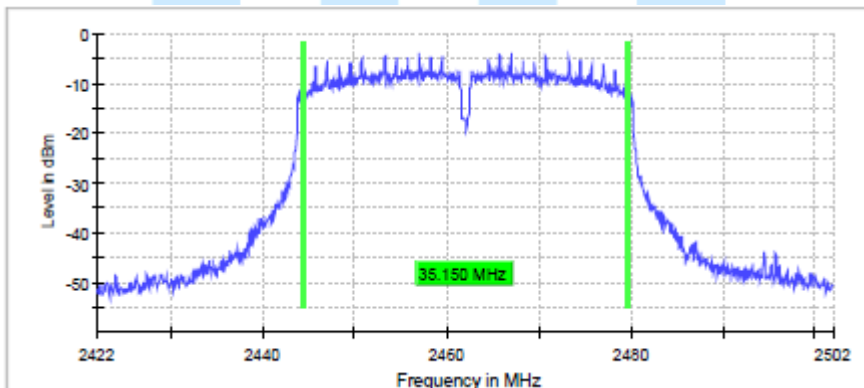




9. Conducted Maximum Output Power Measurement

9.1 Operating environment

Temperature : 27.3 °C
Relative Humidity : 54.3 % R.H.

9.2 Test Set-up (Layout)

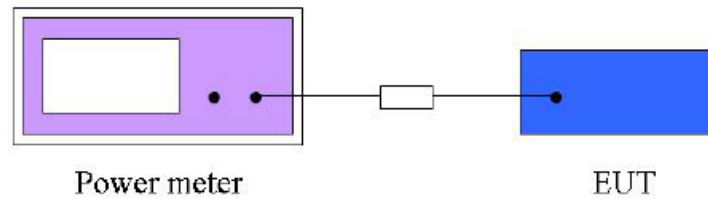

9.3 Limit

For systems using digital modulation in the (2 400~2 483.5) MHz, the limit for peak output power is 30 dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSV	Rohde & Schwarz	Spectrum Analyzer	101552	Apr. 06, 2023
■ - OSP120	Rohde & Schwarz	Open Switch and control platform	101329	Jan. 12, 2023
■ - J12J103539-00-2	JUNFLON	RF Test Cable (OSP_DUT1)	AUG-03-21-066	N/A
■ - J12J103539-00-3	JUNFLON	RF Test Cable (OSP_RX)	AUG-03-21-074	N/A
■ - WMS 32	Rohde & Schwarz	Testing Software	VER10.40.10	N/A

9.5 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



9.6 Test Result

- Test Date : Oct. 04, 2022 ~ Nov. 30, 2022
- Reference Standard : Part 15 Subpart C, Sec. 15.247(b)(3)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v05r02(April 2,2019)
- Operating Condition : RF transmitting mode
(1 ch: 2 412 MHz, 3ch: 2 422 MHz, 6 ch: 2 437 MHz, 7ch: 2 442 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power ¹⁾ (dBm)	Max. Limit (dBm)	Result
2 412	10.9	7.4	30.00	Complies
2 437	11.2	7.5	30.00	Complies
2 462	11.4	7.8	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11g

Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power ¹⁾ (dBm)	Max. Limit (dBm)	Result
2 412	14.2	6.8	30.00	Complies
2 437	14.3	7.0	30.00	Complies
2 462	14.4	7.3	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11n (HT20)

Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power ¹⁾ (dBm)	Max. Limit (dBm)	Result
2 412	14.1	6.5	30.00	Complies
2 437	14.3	6.7	30.00	Complies
2 462	14.6	7.0	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11n (HT40)

Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power ¹⁾ (dBm)	Max. Limit (dBm)	Result
2 422	16.1	6.6	30.00	Complies
2 442	16.2	6.8	30.00	Complies
2 462	16.4	7.0	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.




10. Power Spectral Density Measurement

10.1 Operating Environment

Temperature : 27.3 °C
Relative Humidity : 54.3 % R.H.

10.2 Test Set-up (Layout)

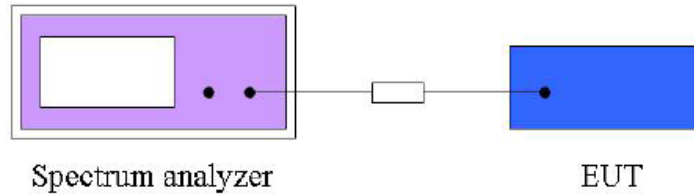

10.3 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

10.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSV	Rohde & Schwarz	Spectrum Analyzer	101552	Apr. 06, 2023
■ - OSP120	Rohde & Schwarz	Open Switch and control platform	101329	Jan. 12, 2023
■ - J12J103539-00-2	JUNFLON	RF Test Cable (OSP_DUT1)	AUG-03-21-066	N/A
■ - J12J103539-00-3	JUNFLON	RF Test Cable (OSP_RX)	AUG-03-21-074	N/A
■ - WMS 32	Rohde & Schwarz	Testing Software	VER10.40.10	N/A

10.5 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to 3 kHz
- Set the VBW to 10 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.



10.6 Test Result

- Test Date : Oct. 04, 2022 ~ Nov. 30, 2022
- Reference Standard : Part 15 Subpart C, Sec. 15.247(e)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v05r02(April 2,2019)
- Operating Condition : RF transmitting mode
(1 ch: 2 412 MHz, 3ch: 2 422 MHz, 6 ch: 2 437 MHz, 7ch: 2 442 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	5.203	8.00	Complies
2 437 MHz	1.540	8.00	Complies
2 462 MHz	4.597	8.00	Complies

IEEE 802.11g

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	1.607	8.00	Complies
2 437 MHz	2.312	8.00	Complies
2 462 MHz	2.661	8.00	Complies

IEEE 802.11n (HT20)


Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	1.643	8.00	Complies
2 437 MHz	2.402	8.00	Complies
2 462 MHz	2.797	8.00	Complies

IEEE 802.11n (HT40)


Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 422 MHz	-3.703	8.00	Complies
2 442 MHz	-3.530	8.00	Complies
2 462 MHz	-3.642	8.00	Complies



Power Density Plot on configuration : IEEE 802.11b 1ch


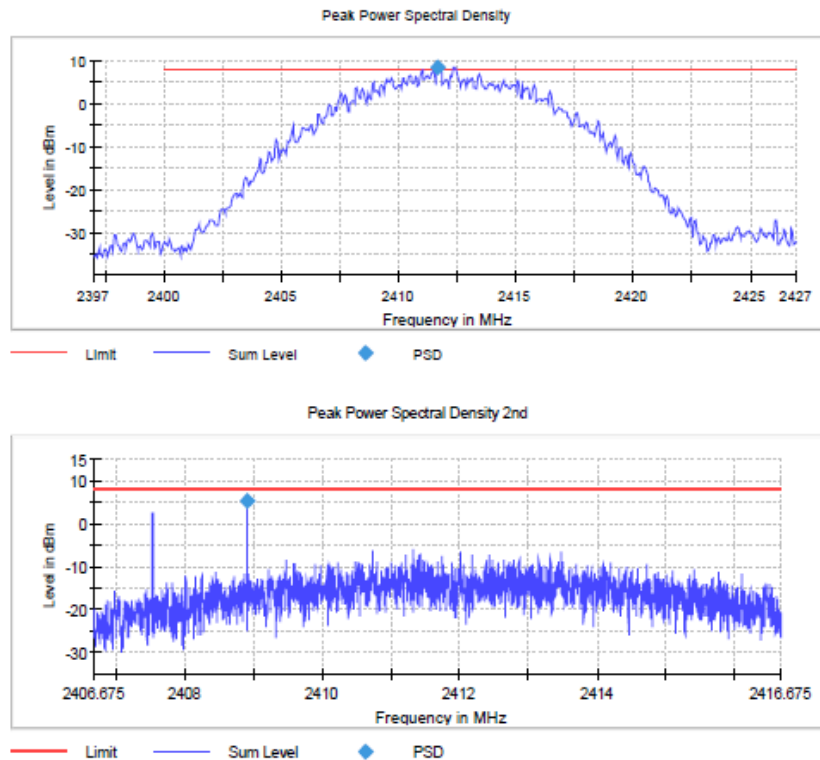


Power Density Plot on configuration : IEEE 802.11b 6ch

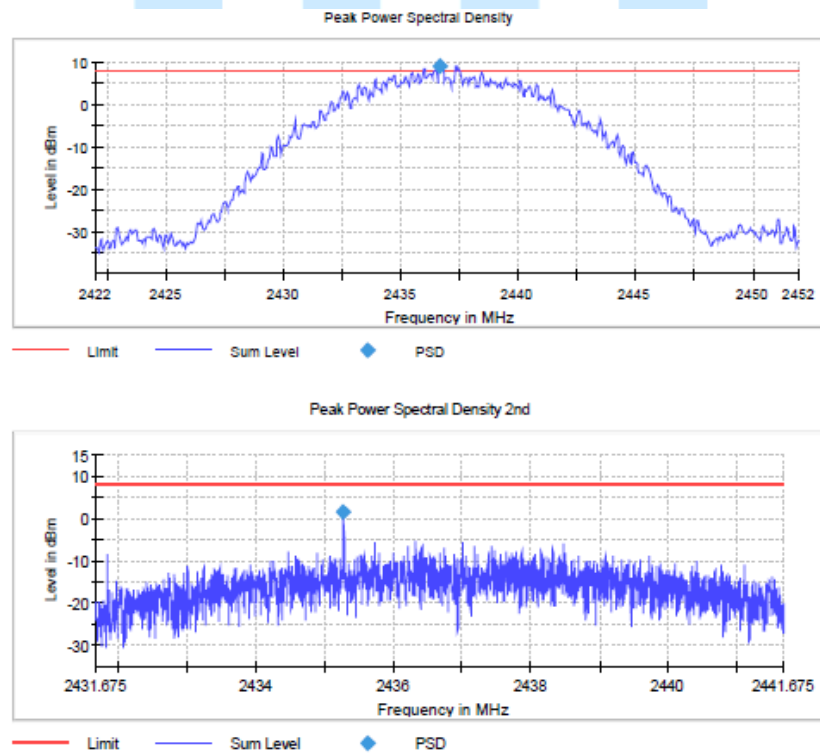




Power Density Plot on configuration : IEEE 802.11b 11ch

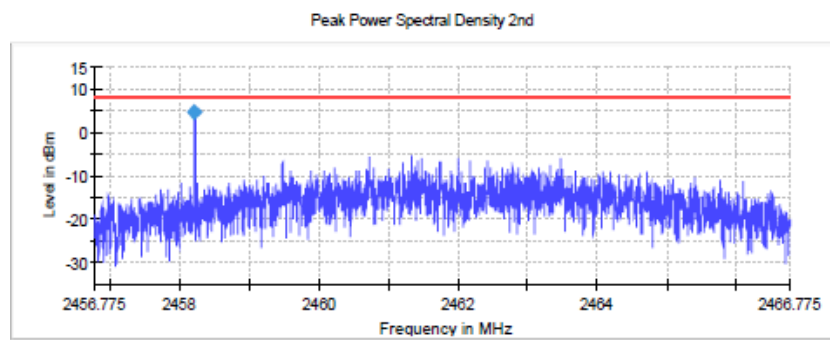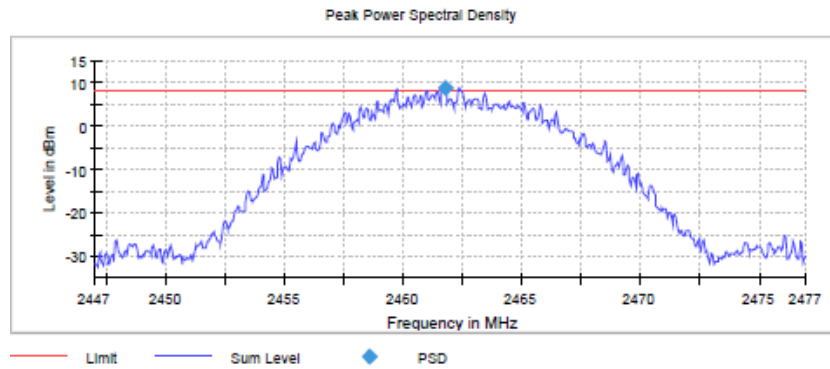





Power Density Plot on configuration : IEEE 802.11g 1ch

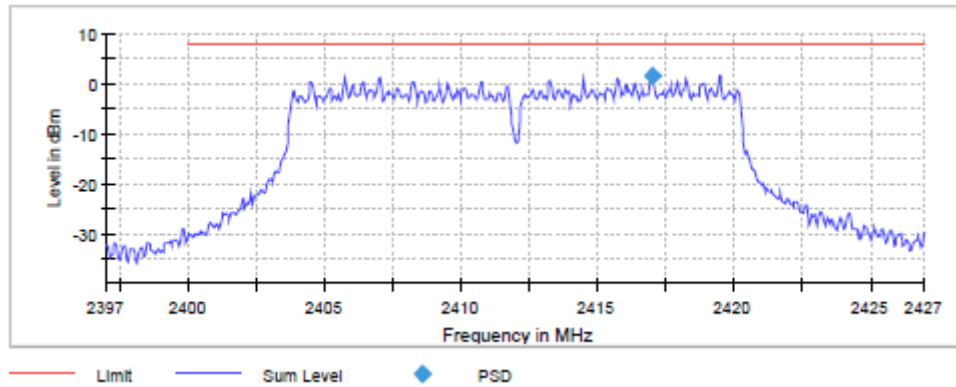

Power Density Plot on configuration : IEEE 802.11g 6ch

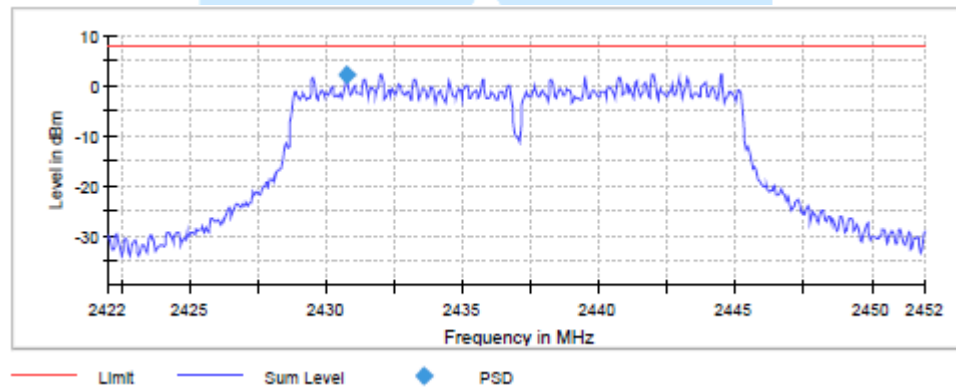


Power Density Plot on configuration : IEEE 802.11g 11ch

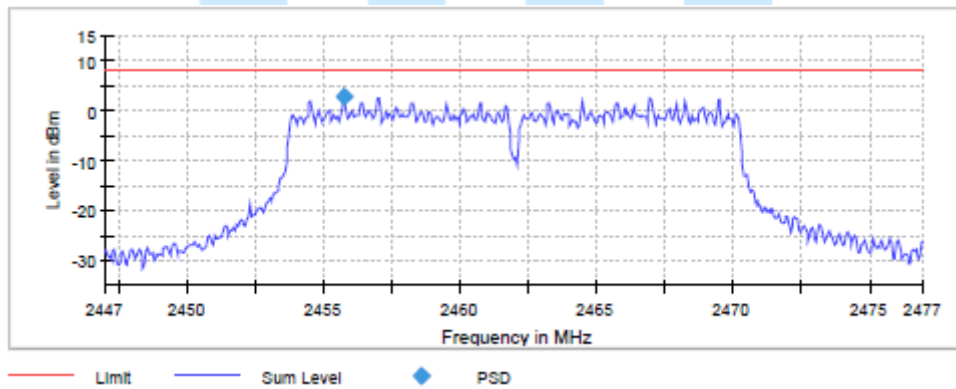





Power Density Plot on configuration : IEEE 802.11n (HT20) 1ch

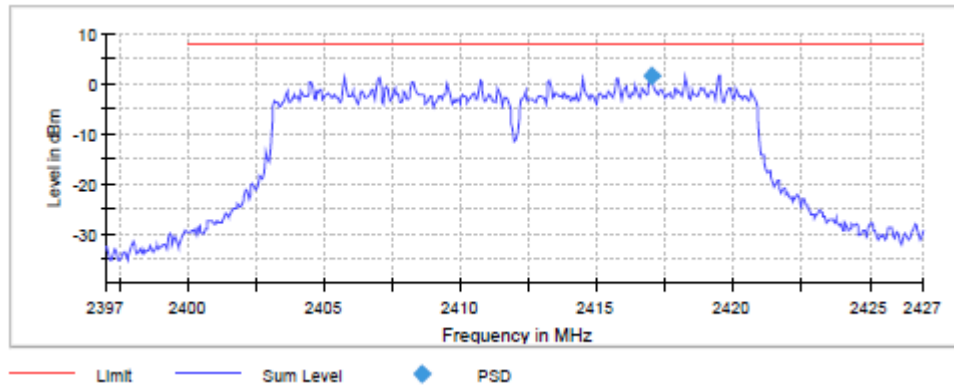

Power Density Plot on configuration : IEEE 802.11n (HT20) 6ch

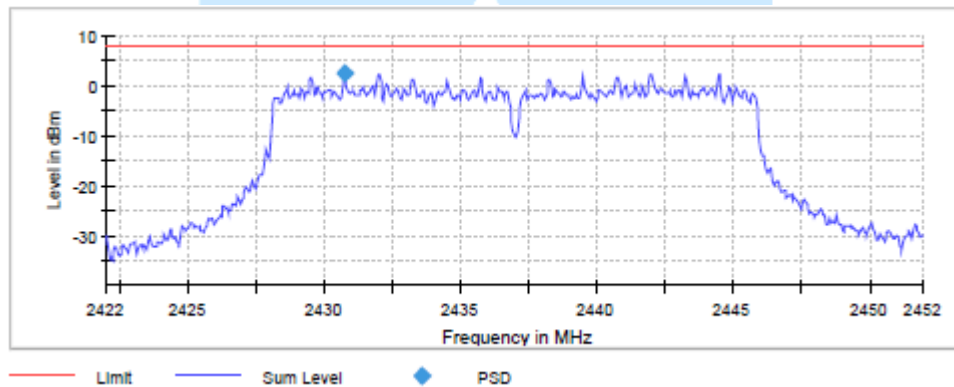


Power Density Plot on configuration : IEEE 802.11n (HT20) 11ch

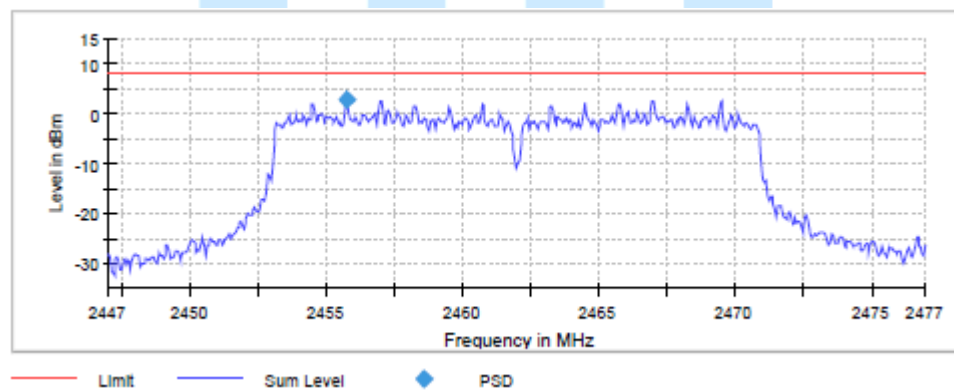





Power Density Plot on configuration : IEEE 802.11n (HT40) 3ch

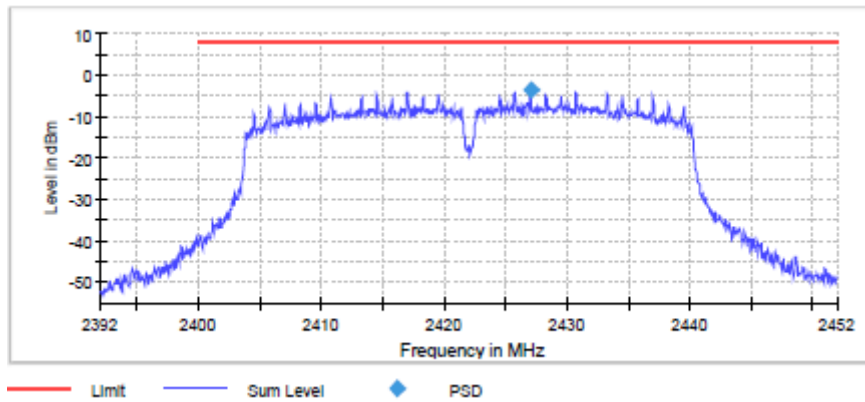

Power Density Plot on configuration : IEEE 802.11n (HT40) 7ch

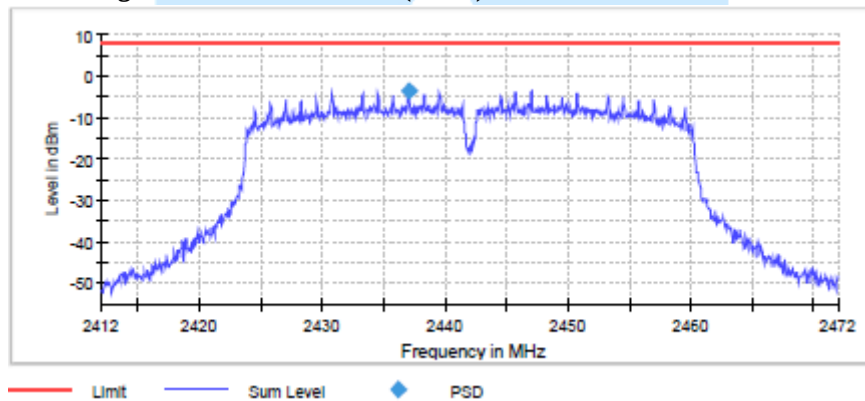

Power Density Plot on configuration : IEEE 802.11n (HT40) 11ch

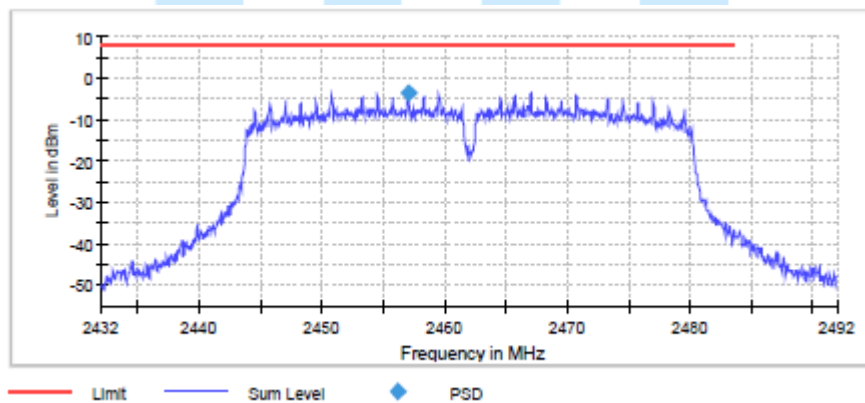




11. Conducted Spurious Emission & Out of Band Emission

11.1 Operating environment

Temperature : 28.3 °C
Relative Humidity : 17.5 % R.H.

11.2 Test set-up (Lay-out)

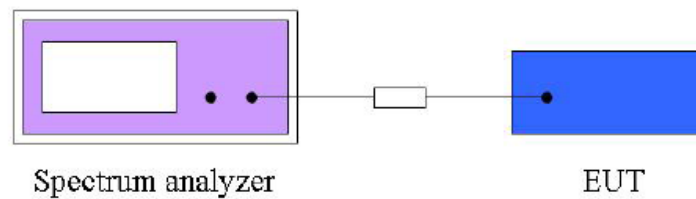

11.3 Limit

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution band width)

11.4 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSV	Rohde & Schwarz	Signal Analyzer	101552	Apr. 11, 2020
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 15, 2020

11.5 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to 3 kHz
- Set the VBW to 10 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.



11.6 Test Result

- Test Date : Nov. 28 ~ 29, 2022
- Reference standard : Part 15 Subpart C, Sec. 15.247(d)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v05r02(April 2,2019)
- Operating condition : RF transmitting mode
(1 ch: 2 412 MHz, 3ch: 2 422 MHz, 6 ch: 2 437 MHz, 7ch: 2 442 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

Conducted Spurious Emission

IEEE 802.11b

Operating Frequency	Fundamental Level (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	0.54	-39.63	-40.17	-20.00	Complies
2 437 MHz	1.15	-39.35	-40.50		Complies
2 462 MHz	1.55	-40.00	-41.55		Complies

IEEE 802.11g

Operating Frequency	Fundamental Level (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-2.31	-39.48	-37.17	-20.00	Complies
2 437 MHz	-1.95	-39.55	-37.60		Complies
2 462 MHz	-1.36	-39.39	-38.03		Complies

IEEE 802.11n (HT20)

Operating Frequency	Fundamental Level (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-2.35	-38.12	-35.77	-20.00	Complies
2 437 MHz	-1.85	-39.54	-37.69		Complies
2 462 MHz	-1.44	-38.96	-37.52		Complies

IEEE 802.11n (HT40)

Operating Frequency	Fundamental Level (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 422 MHz	-5.41	-39.52	-34.11	-20.00	Complies
2 442 MHz	-5.10	-38.70	-33.60		Complies
2 462 MHz	-4.77	-39.23	-34.46		Complies



Conducted Out of Band(Band Edge) Emission

IEEE 802.11b

Operating Frequency	Fundamental Level (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	0.54	-46.88	-47.42	-20.00	Complies
2 462 MHz	1.55	-47.20	-48.75		Complies

IEEE 802.11g

Operating Frequency	Fundamental Level (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-2.31	-41.12	-38.81	-20.00	Complies
2 462 MHz	-1.36	-47.16	-45.80		Complies

IEEE 802.11n (HT20)


Operating Frequency	Fundamental Level (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-2.35	-41.60	-39.25	-20.00	Complies
2 462 MHz	-1.44	-47.21	-45.77		Complies

IEEE 802.11n (HT40)


Operating Frequency	Fundamental Level (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 422 MHz	-5.41	-39.76	-34.35	-20.00	Complies
2 462 MHz	-4.77	-37.53	-32.76		Complies



Conducted spurious Emission Plot on Configuration : IEEE 802.11b 1ch

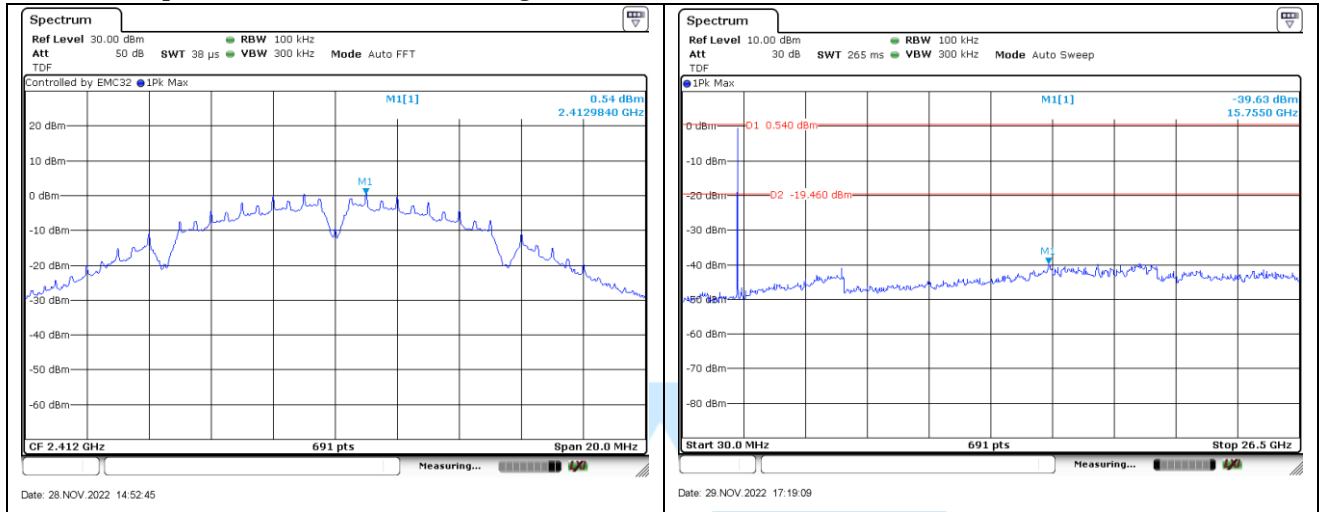


Conducted spurious Emission Plot on Configuration : IEEE 802.11b 6ch

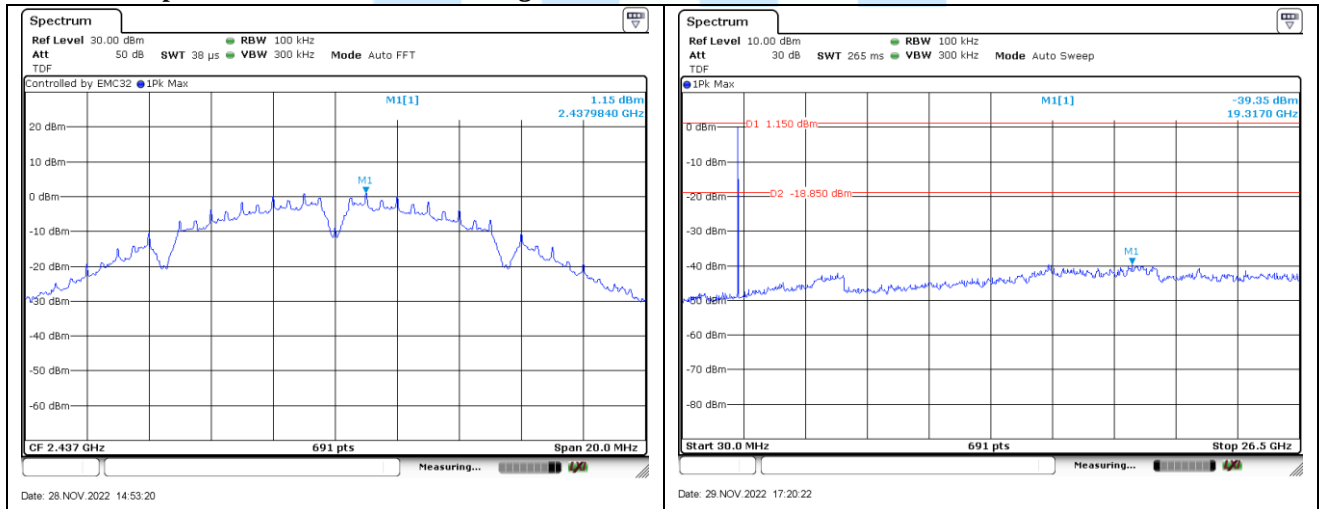




Conducted spurious Emission Plot on Configuration : IEEE 802.11b 11ch

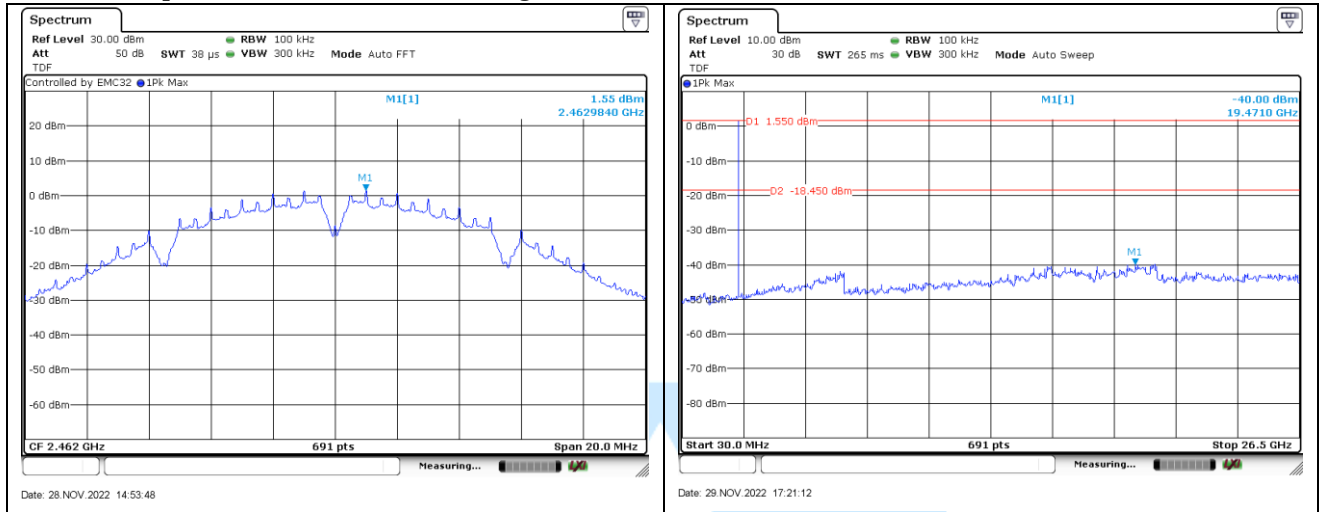


Conducted spurious Emission Plot on Configuration : IEEE 802.11g 1ch

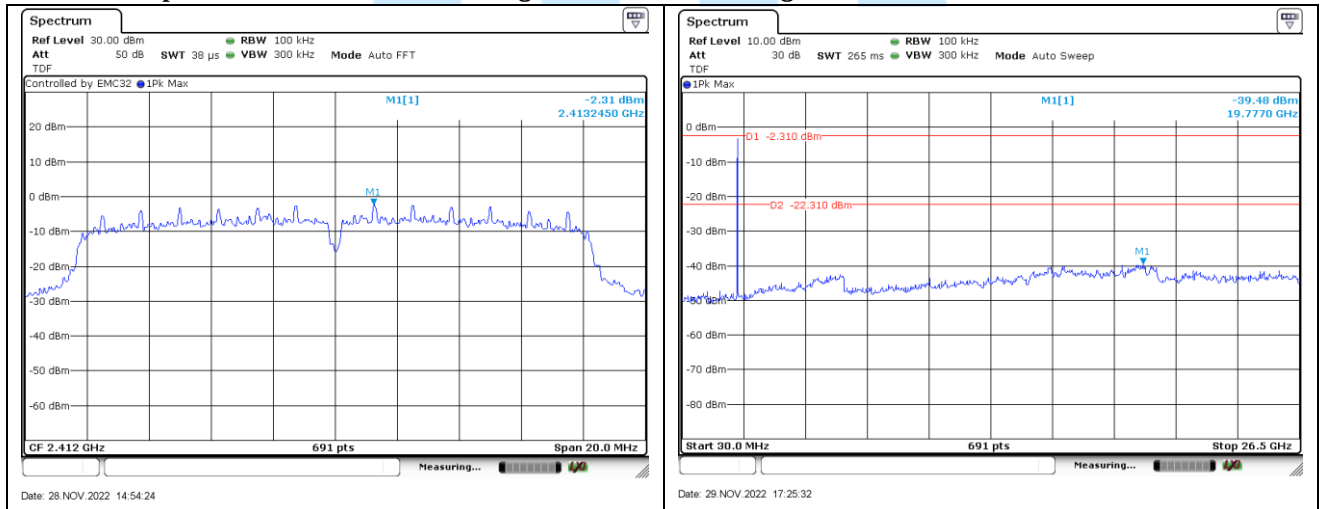




Conducted spurious Emission Plot on Configuration : IEEE 802.11g 6ch

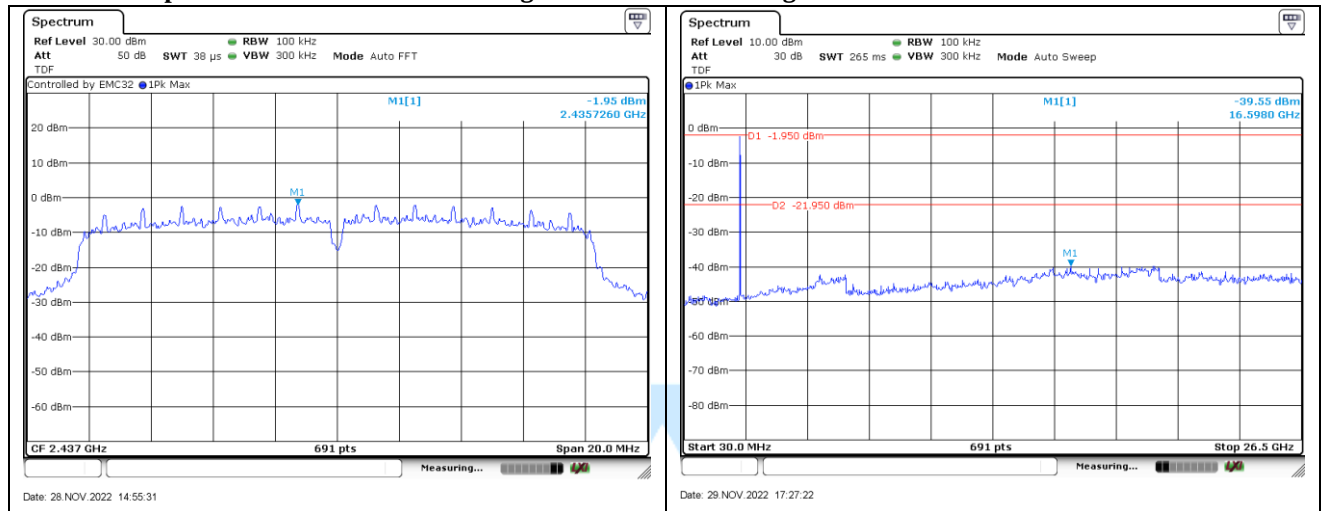


Conducted spurious Emission Plot on Configuration : IEEE 802.11g 11ch

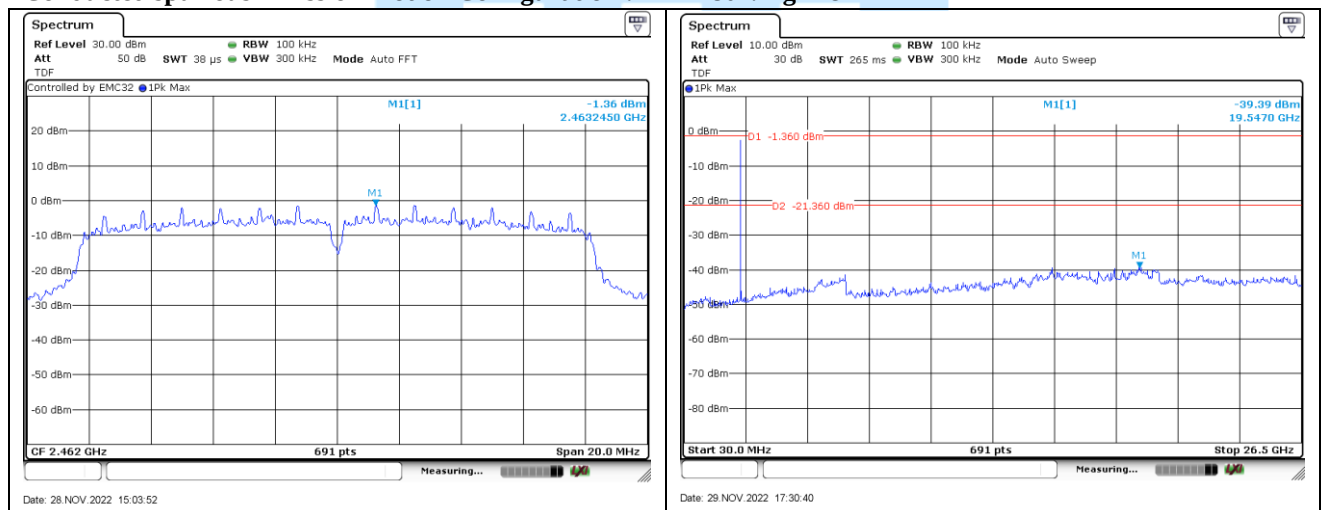




Conducted spurious Emission Plot on Configuration : IEEE 802.11n (HT20) 1ch

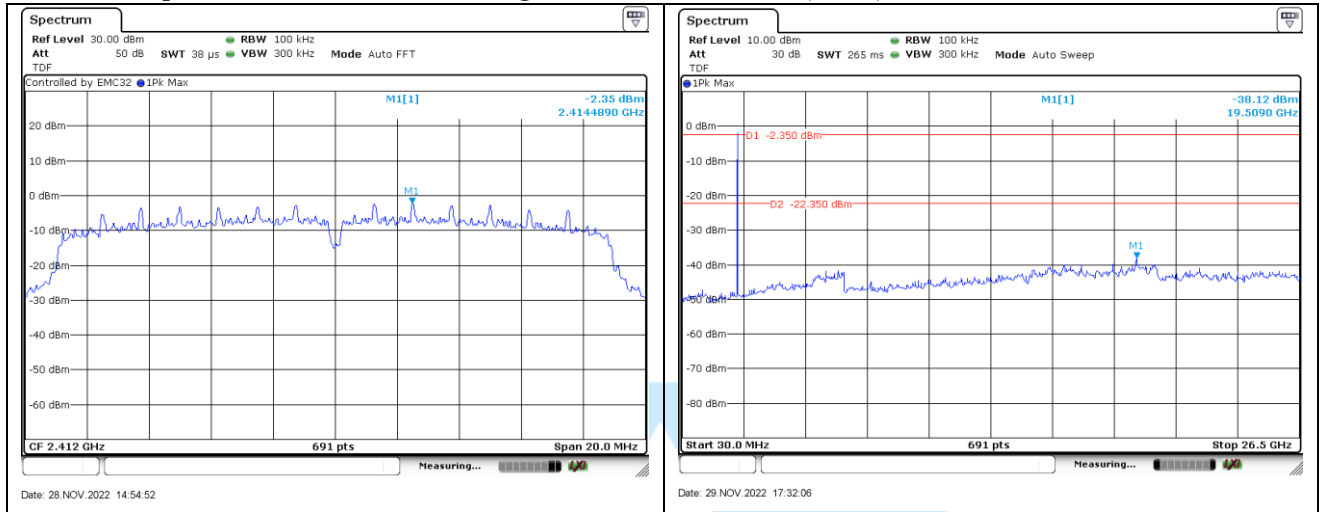


Conducted spurious Emission Plot on Configuration : IEEE 802.11n (HT20) 6ch

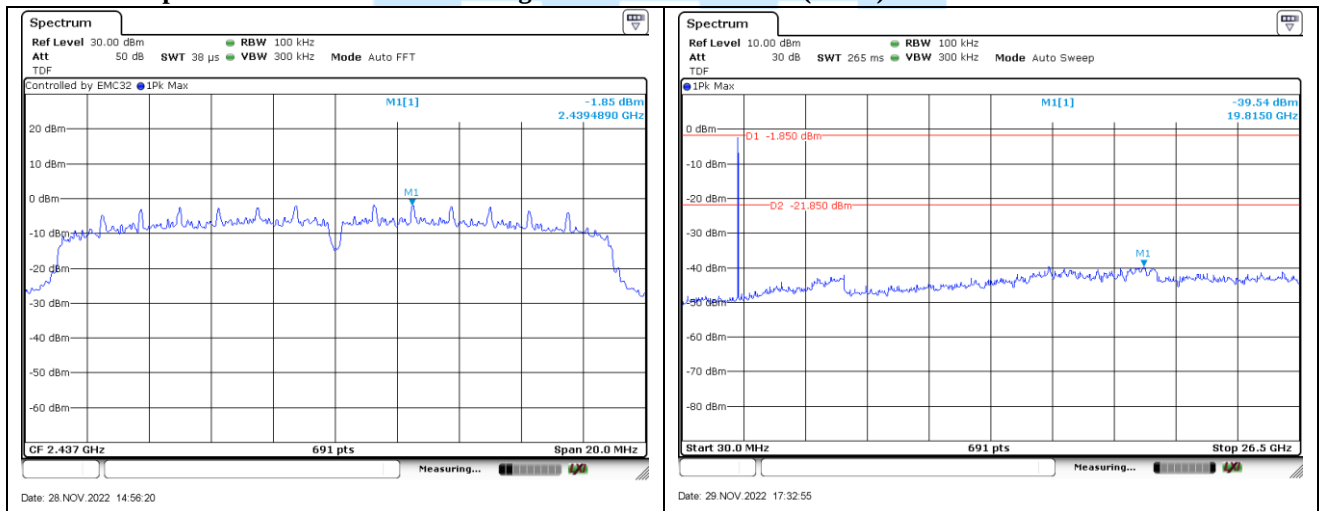




Conducted spurious Emission Plot on Configuration : IEEE 802.11n (HT20) 11ch

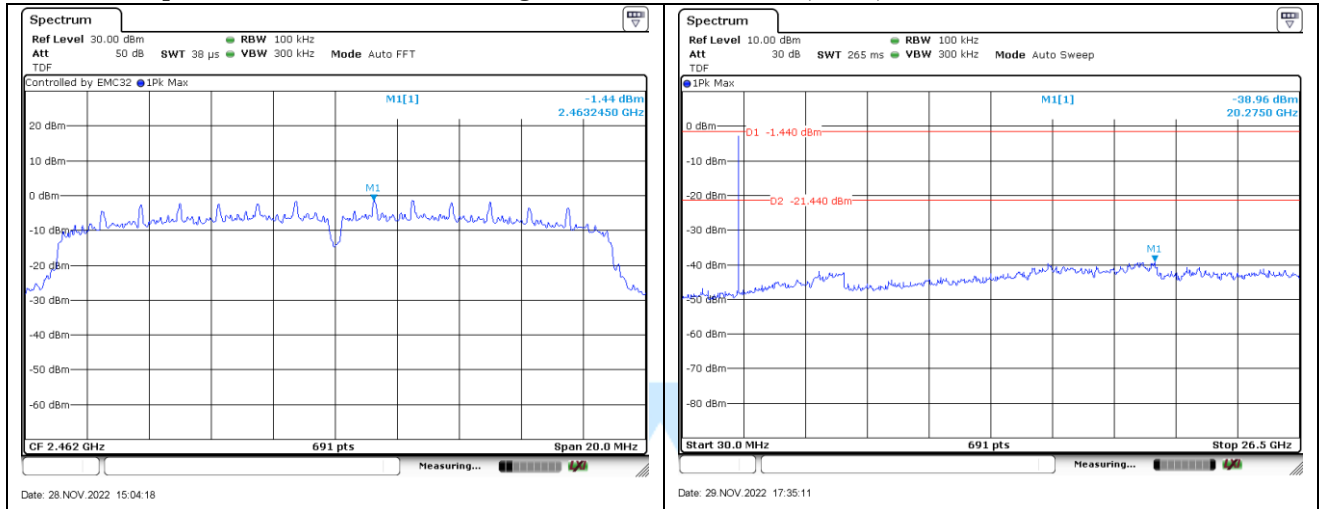


Conducted spurious Emission Plot on Configuration : IEEE 802.11n (HT40) 3ch

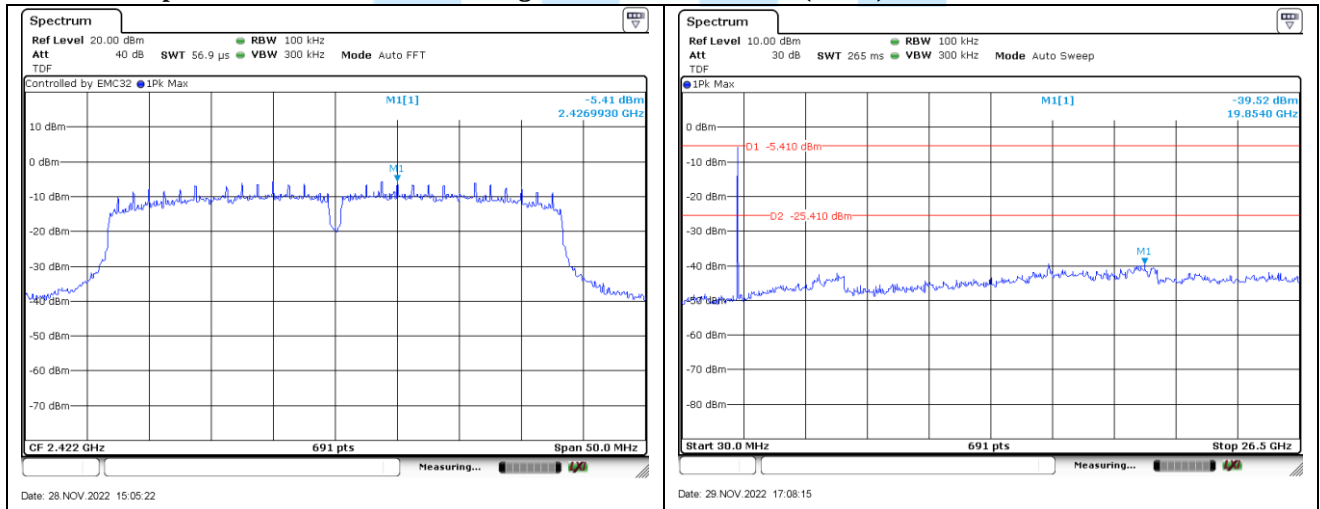




Conducted spurious Emission Plot on Configuration : IEEE 802.11n (HT40) 7ch

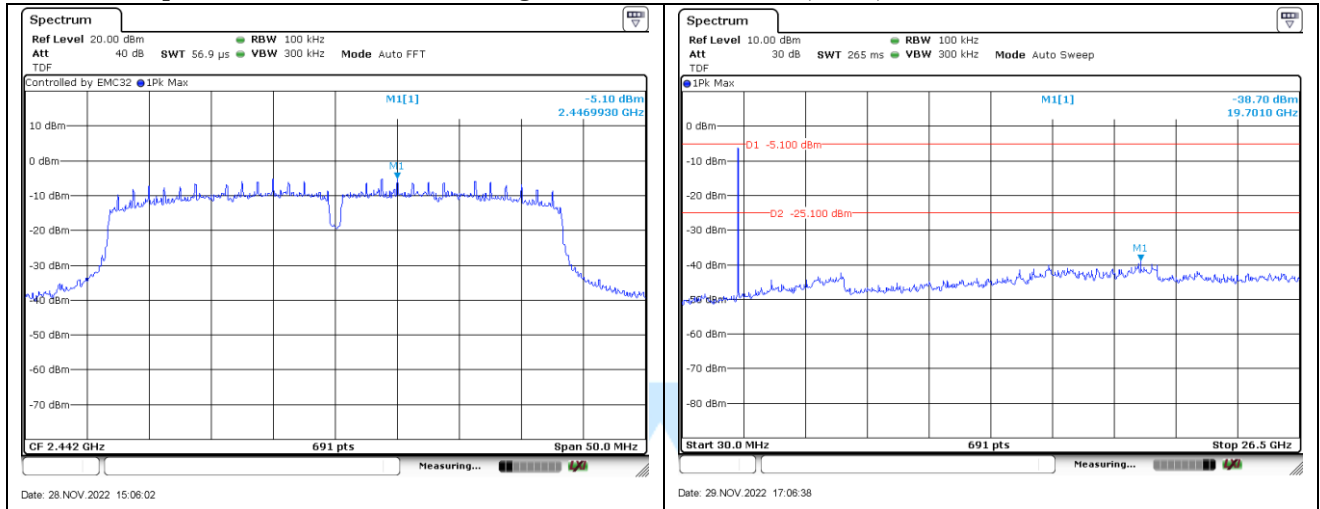


Conducted spurious Emission Plot on Configuration : IEEE 802.11n (HT40) 11ch

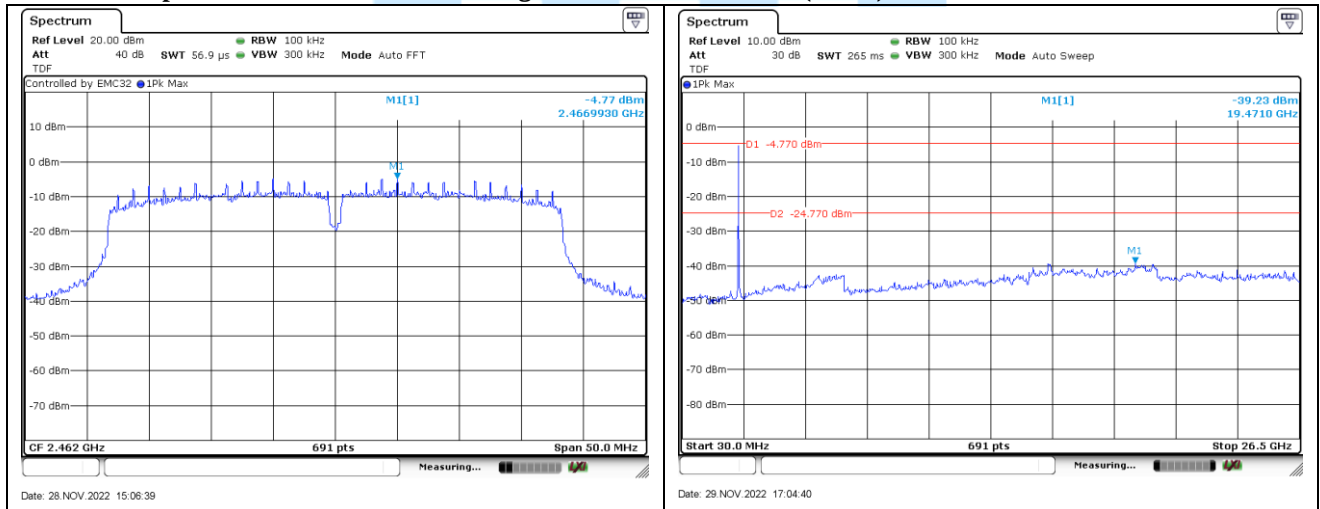




Low Band Edge Plot on Configuration : IEEE 802.11b 1ch

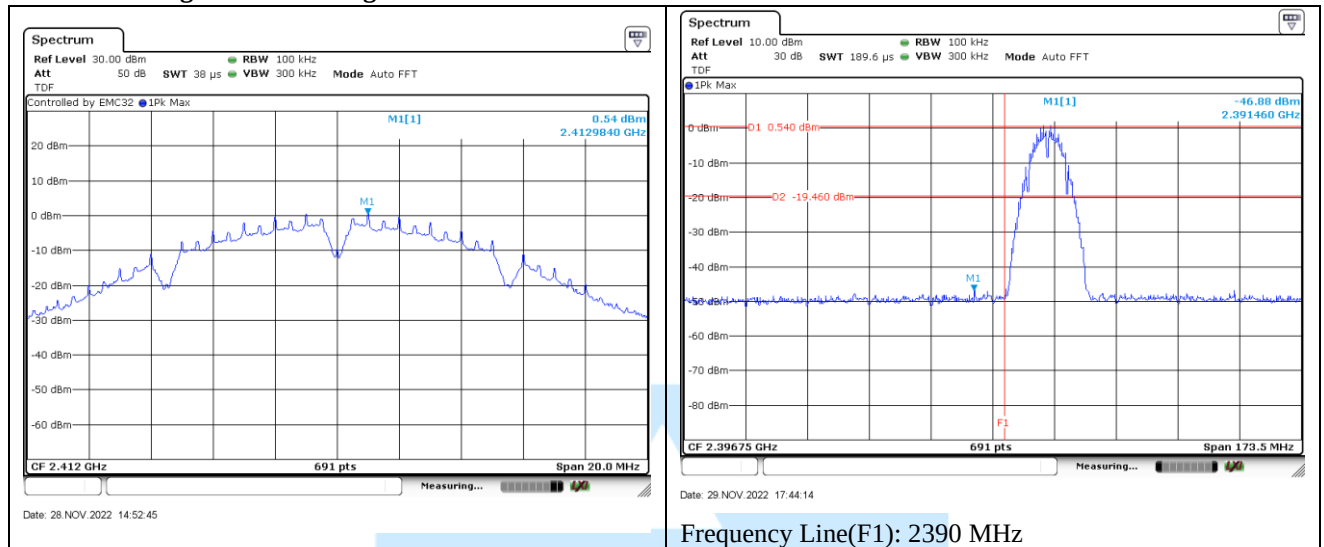


High Band Edge Plot on Configuration : IEEE 802.11b 11ch

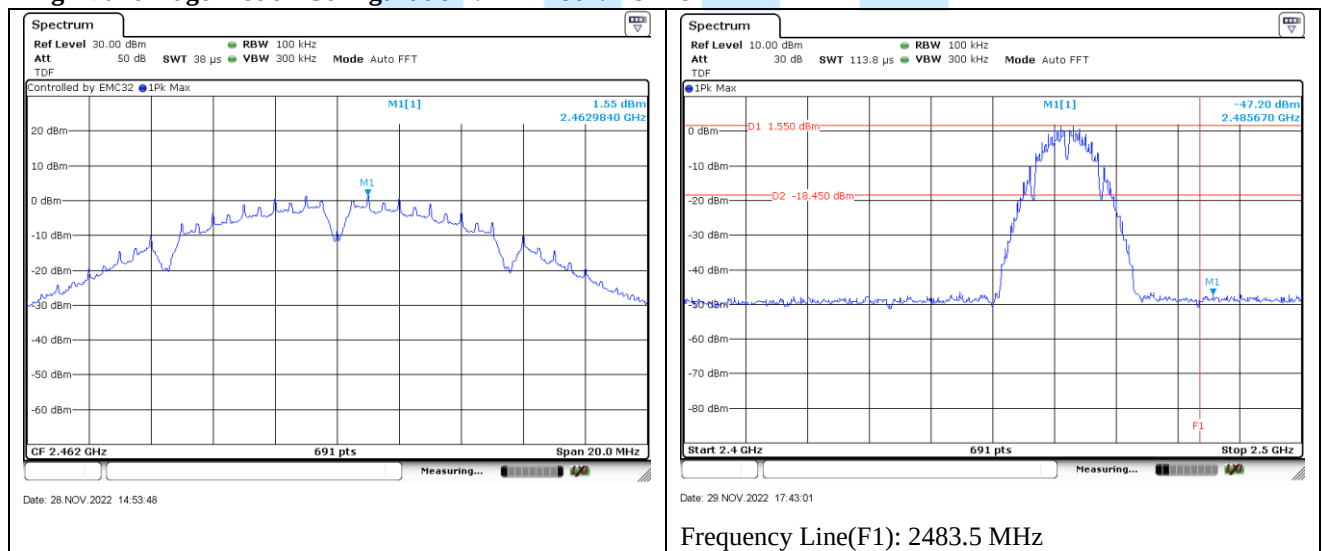




Low Band Edge Plot on Configuration : IEEE 802.11g 1ch

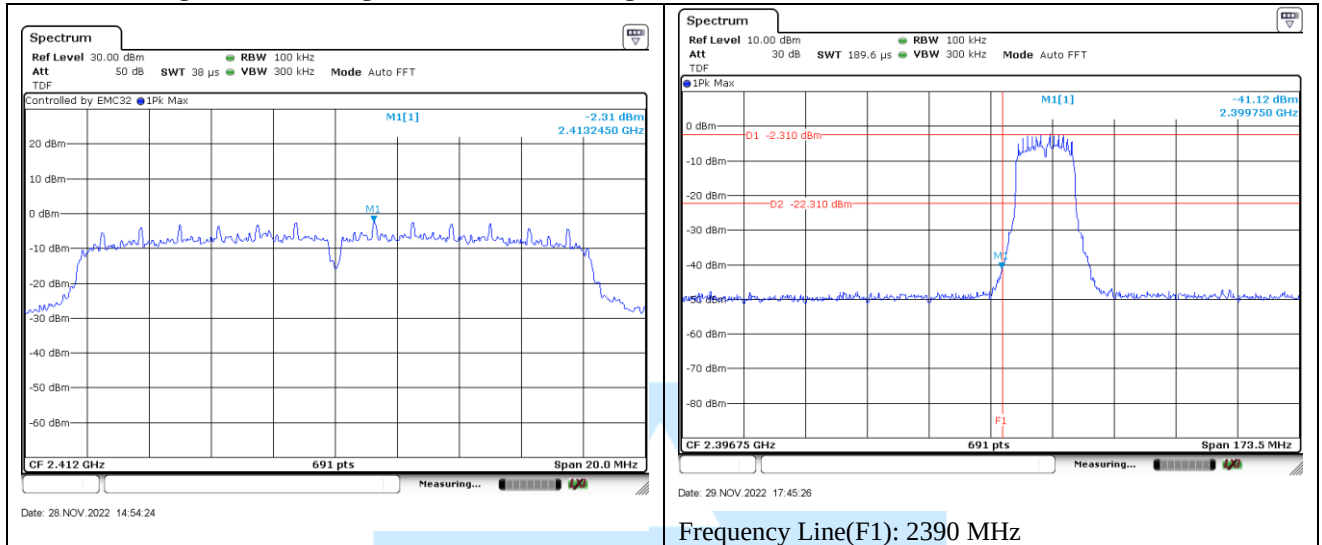


High Band Edge Plot on Configuration : IEEE 802.11g 11ch

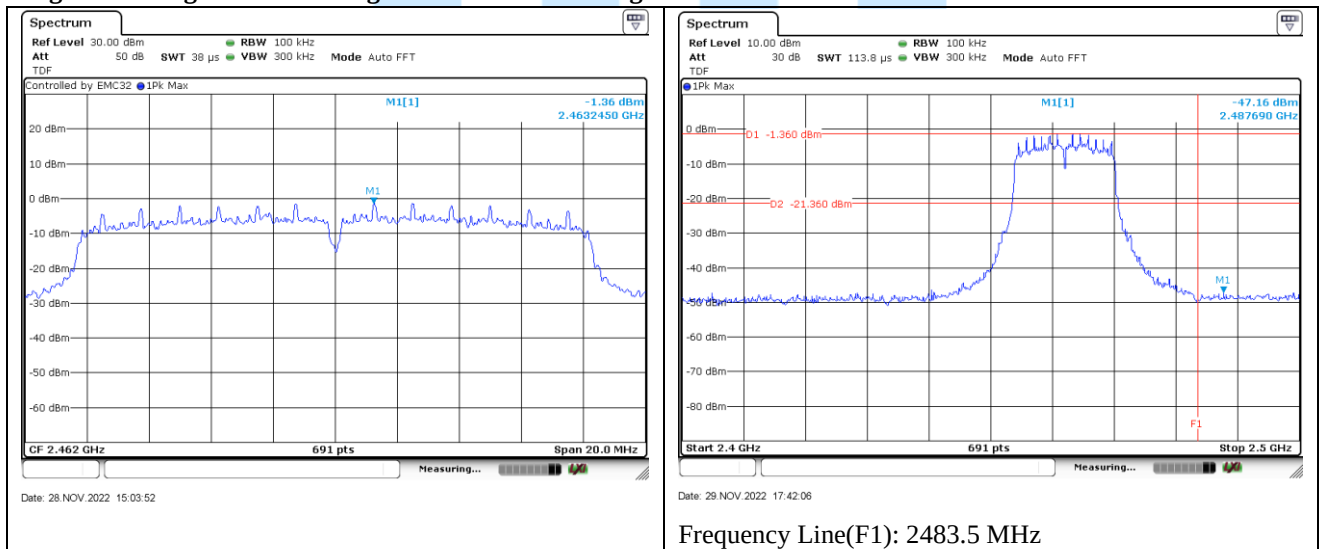




Low Band Edge Plot on Configuration : IEEE 802.11n (HT20) 1ch

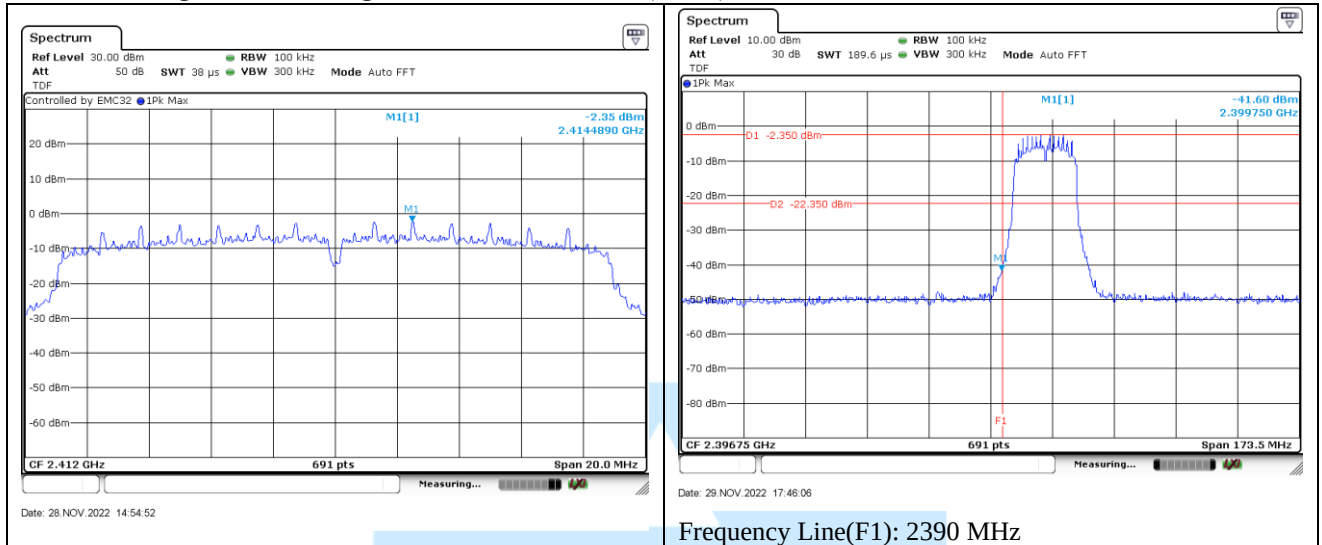


High Band Edge Plot on Configuration : IEEE 802.11n (HT20) 11ch

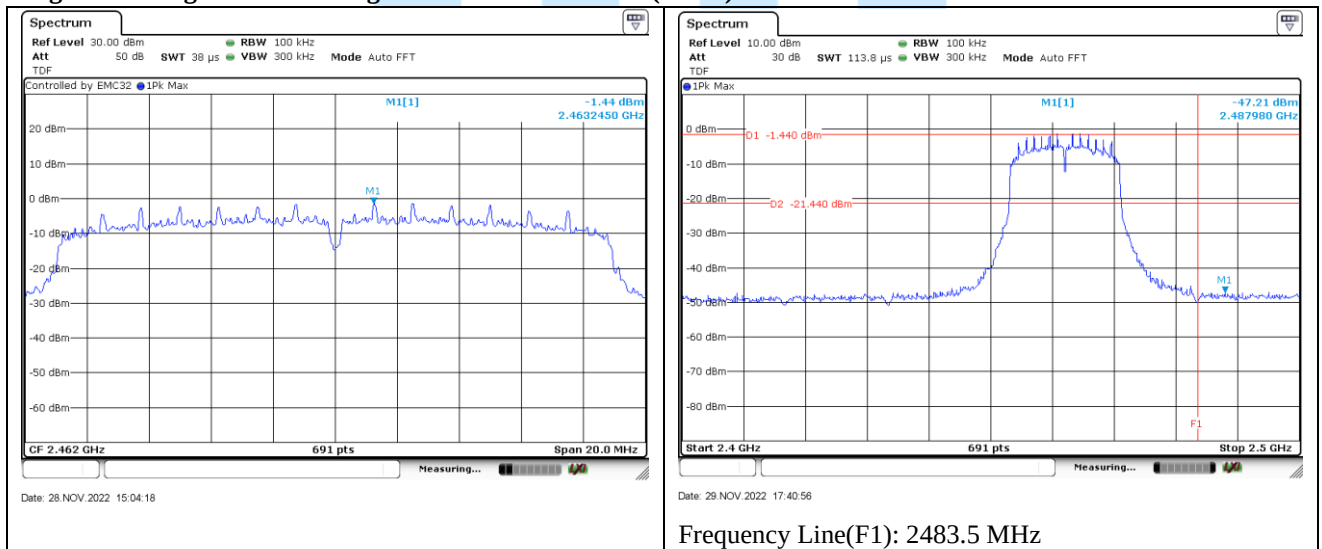




Low Band Edge Plot on Configuration : IEEE 802.11n (HT40) 3ch

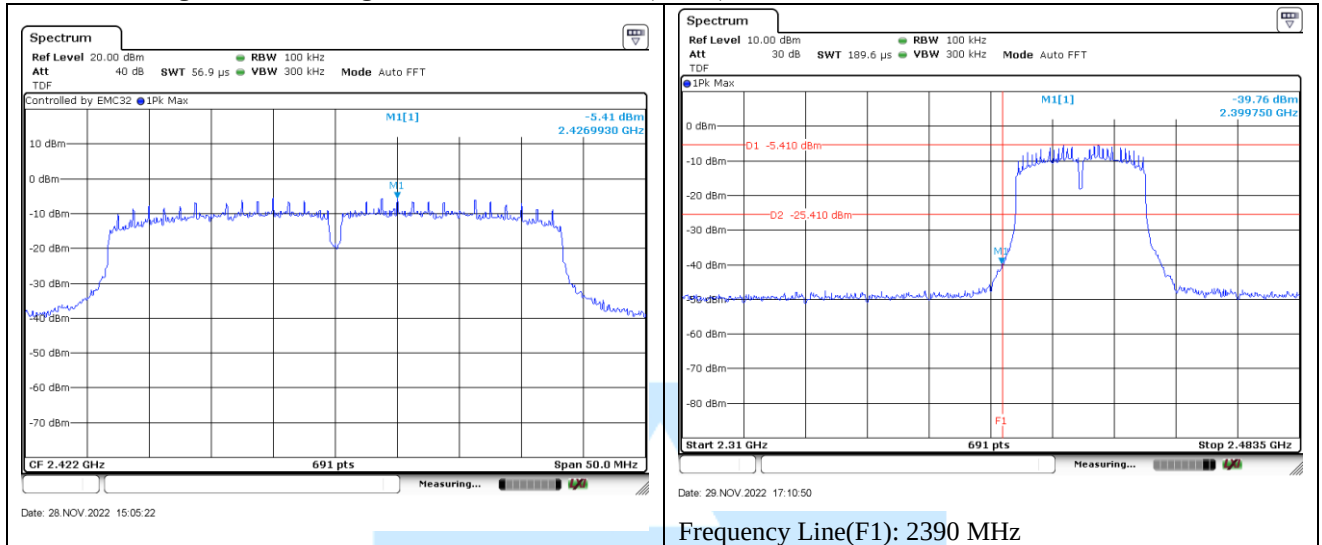

High Band Edge Plot on Configuration : IEEE 802.11n (HT40) 11ch

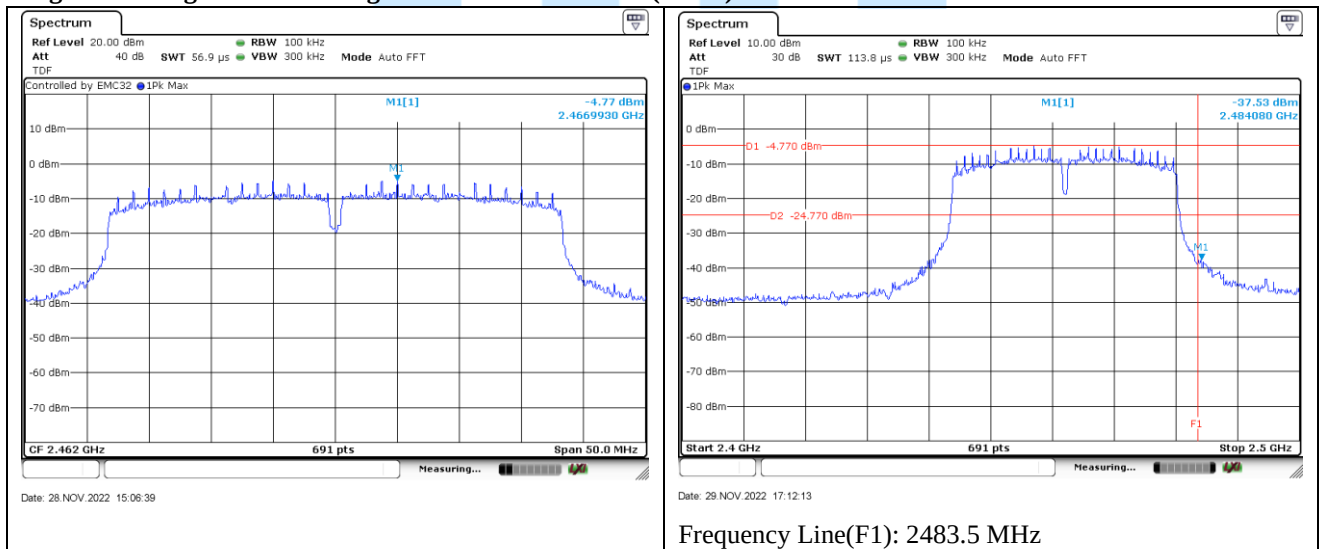



12. AC Power line Conducted emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (Test firm Registration Number: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

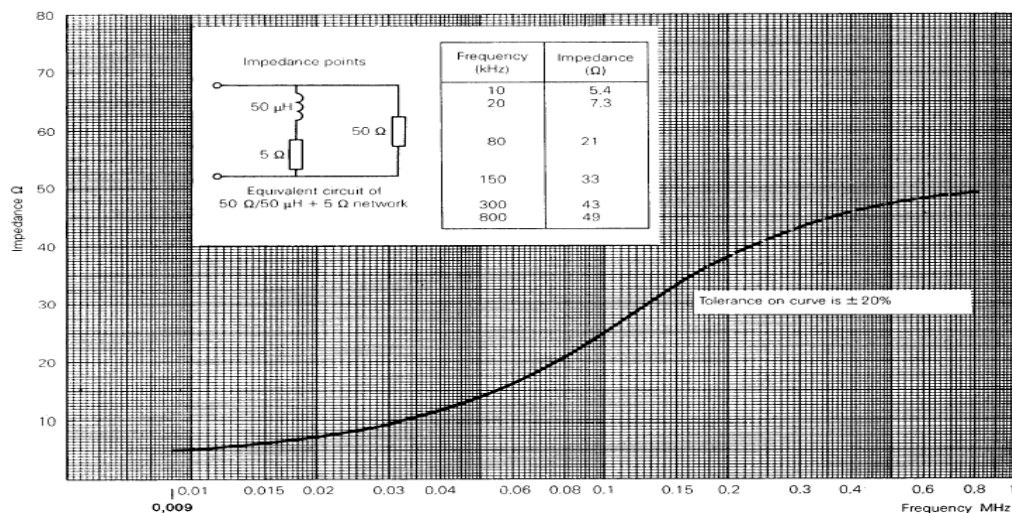


Fig 2. Impedance of LISN



12.1 Operating Environment

Temperature : 20.8 °C
Relative Humidity : 21.9 % R.H.

12.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

12.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.69 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



12.4 Limit

RFI Conducted	FCC Limit(dBμV/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

12.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■- ESCI	Rohde & Schwarz	EMI test receiver	100237	Apr. 05, 2023
□- ENV216	Rohde & Schwarz	LISN	100172	Apr. 05, 2023
■- ENV216	Rohde & Schwarz	LISN	100173	Apr. 05, 2023
■- EMC 32	Rohde & Schwarz	Testing Software	VER8.53	N/A

12.6 Test data for Conducted Emission


- Test Date : Jan. 11, 2023
- Reference Standard : Part 15 Subpart C, Sec. 15.207
- Test Procedure(s) : ANSI C63.10 (2013)
- Operating Condition : Charging mode
- Power Source : AC 120 V / 60 Hz
- Frequency rage : 0.15 MHz to 30 MHz
- Line : AC Power Line (Live and Neutral)
- Comment :



12.7 Test Result

AC/DC adapter_DSA-18QFB FUS A

EUT with cradle

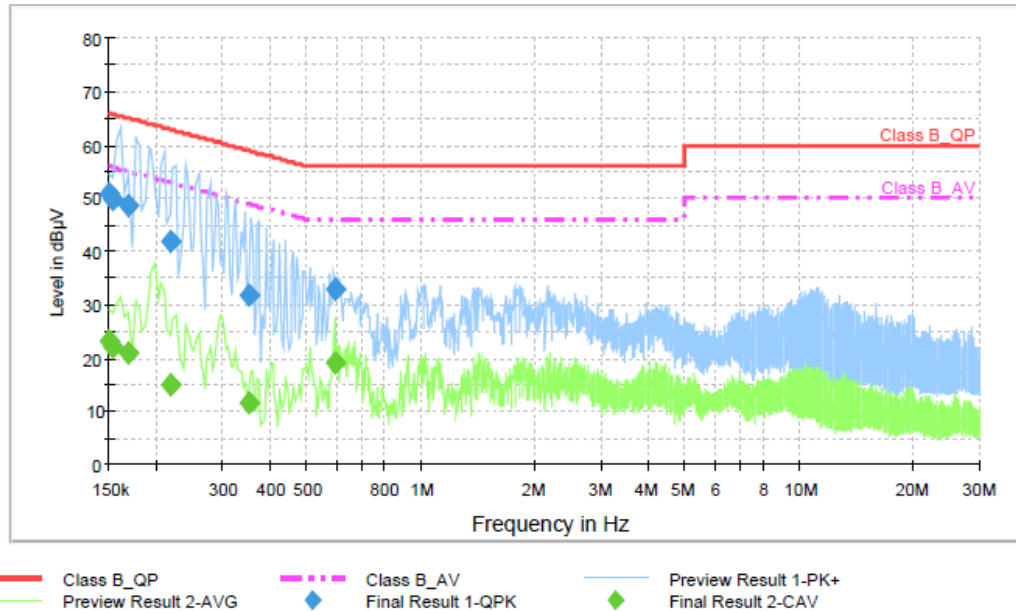

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	50.9	1000.0	9.000	Off	N	9.7	15.1	66.0	
0.154000	49.8	1000.0	9.000	Off	N	9.7	16.0	65.8	
0.168206	48.6	1000.0	9.000	Off	N	9.7	16.4	65.0	
0.216712	42.0	1000.0	9.000	Off	L1	9.7	20.9	62.9	
0.351038	31.7	1000.0	9.000	Off	N	9.7	27.2	58.9	
0.592288	32.9	1000.0	9.000	Off	N	9.7	23.1	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	23.3	1000.0	9.000	Off	N	9.7	32.7	56.0	
0.154000	22.0	1000.0	9.000	Off	N	9.7	33.8	55.8	
0.168206	21.0	1000.0	9.000	Off	N	9.7	34.1	55.0	
0.216712	14.9	1000.0	9.000	Off	L1	9.7	38.1	52.9	
0.351038	11.5	1000.0	9.000	Off	N	9.7	37.4	48.9	
0.592288	19.2	1000.0	9.000	Off	N	9.7	26.8	46.0	



EUT without cradle

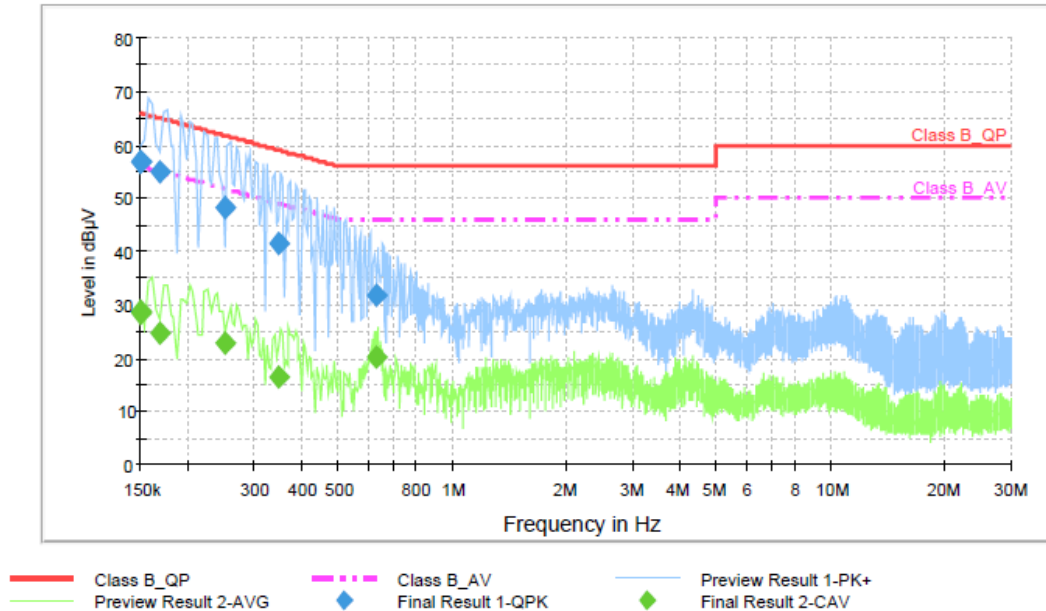

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	56.7	1000.0	9.000	Off	N	9.7	9.3	66.0	
0.150000	56.8	1000.0	9.000	Off	N	9.7	9.2	66.0	
0.168206	55.1	1000.0	9.000	Off	L1	9.7	9.9	65.0	
0.250294	48.2	1000.0	9.000	Off	L1	9.7	13.5	61.7	
0.347306	41.5	1000.0	9.000	Off	N	9.7	17.5	59.0	
0.633062	31.7	1000.0	9.000	Off	N	9.7	24.3	56.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	28.3	1000.0	9.000	Off	N	9.7	27.7	56.0	
0.150000	28.7	1000.0	9.000	Off	N	9.7	27.3	56.0	
0.168206	24.8	1000.0	9.000	Off	L1	9.7	30.3	55.0	
0.250294	22.8	1000.0	9.000	Off	L1	9.7	28.9	51.7	
0.347306	16.5	1000.0	9.000	Off	N	9.7	32.5	49.0	
0.633062	20.2	1000.0	9.000	Off	N	9.7	25.8	46.0	



AC/DC adapter_DSA-12PF11-05 FUS 050200

EUT with cradle

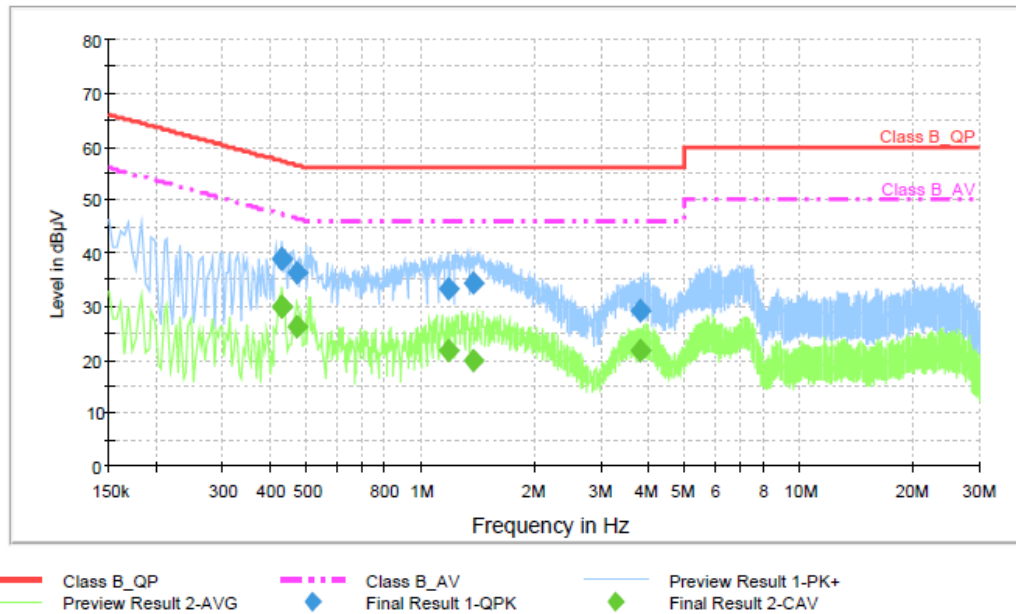

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.427006	38.8	1000.0	9.000	Off	L1	9.7	18.5	57.3	
0.427844	38.7	1000.0	9.000	Off	L1	9.7	18.6	57.3	
0.469694	36.2	1000.0	9.000	Off	N	9.7	20.4	56.5	
1.185825	33.2	1000.0	9.000	Off	L1	9.7	22.8	56.0	
1.372625	34.2	1000.0	9.000	Off	N	9.8	21.8	56.0	
3.822175	29.0	1000.0	9.000	Off	L1	9.9	27.0	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.427006	29.7	1000.0	9.000	Off	L1	9.7	17.6	47.3	
0.427844	29.8	1000.0	9.000	Off	L1	9.7	17.5	47.3	
0.469694	26.3	1000.0	9.000	Off	N	9.7	20.2	46.5	
1.185825	21.6	1000.0	9.000	Off	L1	9.7	24.4	46.0	
1.372625	19.9	1000.0	9.000	Off	N	9.8	26.1	46.0	
3.822175	21.5	1000.0	9.000	Off	L1	9.9	24.5	46.0	



EUT without cradle

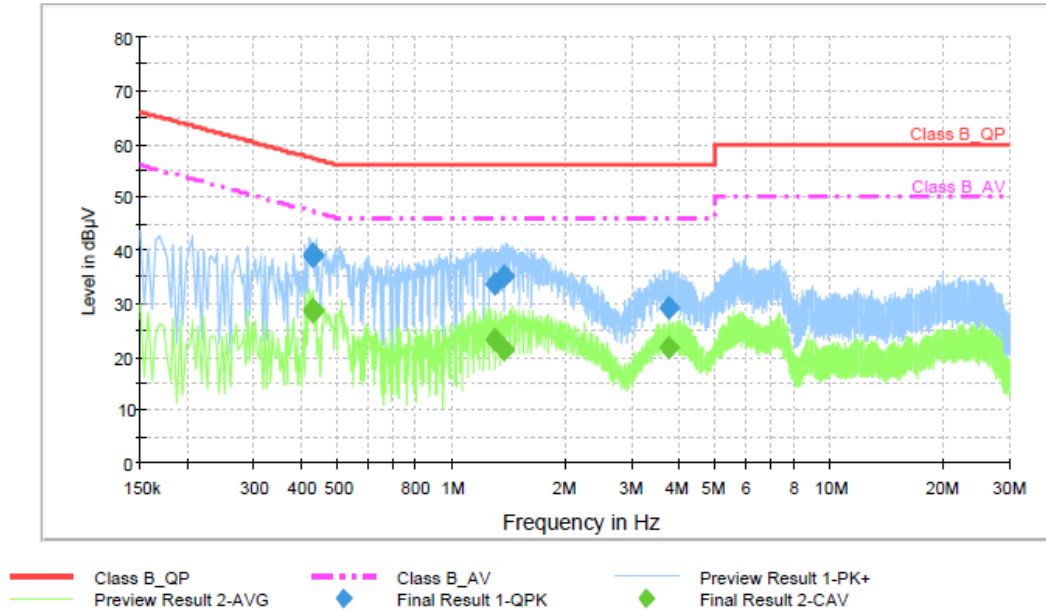

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.427306	38.9	1000.0	9.000	Off	L1	9.7	18.4	57.3	
0.428650	39.2	1000.0	9.000	Off	L1	9.7	18.1	57.3	
0.430469	39.0	1000.0	9.000	Off	L1	9.7	18.3	57.2	
1.300450	33.8	1000.0	9.000	Off	L1	9.8	22.2	56.0	
1.374238	35.1	1000.0	9.000	Off	N	9.8	20.9	56.0	
3.779550	29.3	1000.0	9.000	Off	L1	9.9	26.7	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.427306	28.8	1000.0	9.000	Off	L1	9.7	18.5	47.3	
0.428650	28.7	1000.0	9.000	Off	L1	9.7	18.6	47.3	
0.430469	28.3	1000.0	9.000	Off	L1	9.7	18.9	47.2	
1.300450	23.1	1000.0	9.000	Off	L1	9.8	22.9	46.0	
1.374238	21.2	1000.0	9.000	Off	N	9.8	24.8	46.0	
3.779550	21.8	1000.0	9.000	Off	L1	9.9	24.2	46.0	



13. Radiated Spurious & Restricted Band Edge Emission

Exploratory Radiated measurements were conducted at the 3m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1GHz were made at 3m or 10 m Chamber that complies with CISPR 16/ANSI C63.10. Above 1GHz final measurements were conducted at the 3m Chamber only.

For measurements above 1GHz, the bottom side of 3m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1GHz) and Peak & Average mode (Above 1GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

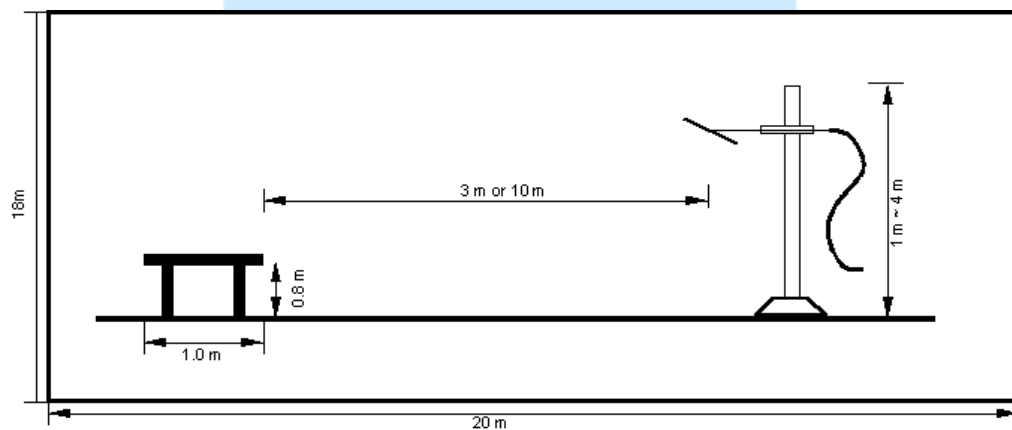


Fig 3. Dimensions of test site (Below 1GHz)

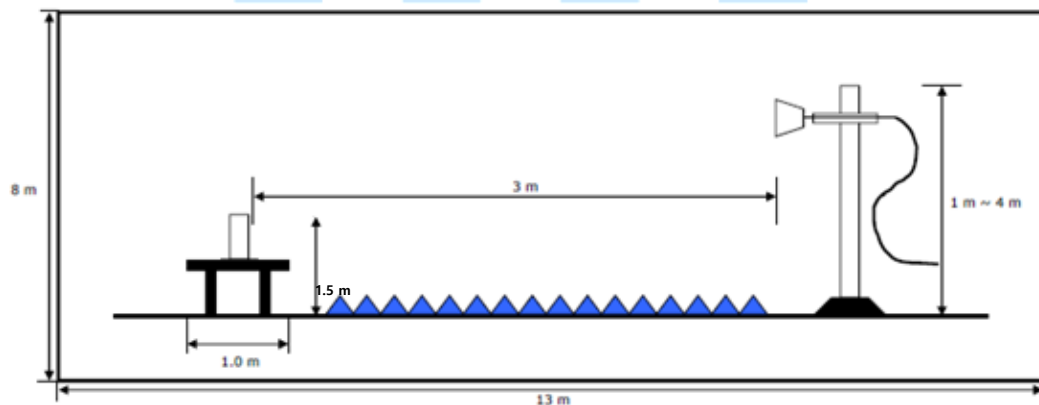


Fig 4. Dimensions of test site (Above 1GHz)



13.1 Operating environment

Temperature : 22.8 °C
Relative humidity : 46.4 % R.H.

13.2 Test set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conducting table.

For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane.

For emission measurements above 1 GHz, the table height is 1.5 m above the reference ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

13.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.78 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.20 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.12 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m, V/H)	5.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 000 MHz ~ 18 000 MHz, 3 m, V/H)	4.88 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (18 000 MHz ~ 26 000 MHz, 3 m, V/H)	5.03 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



13.4 Limit

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2 400/F (kHz)	300
0.490 ~ 1.705	2 400/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

13.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Apr. 06, 2023
■ - HFH2-Z2	Rohde & Schwarz	Loop Antenna	100041	Apr. 14, 2023
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3313	Apr. 05, 2023
■ - BBHA9120D	Schwarzbeck	Horn Antenna	207	Sep. 05, 2023
■ - BBHA9170	Schwarzbeck	Horn Antenna	766	Apr. 25, 2023
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - CO3000	Innco system GmbH	Position Controller	CO3000/1804/4	N/A
			2760218/P	
■ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	5580916	N/A
■ - TK-PA18H	TESTEK	Low Noise Amplifier	180001-L	Apr. 06, 2023
■ - TK-PA1840H	TESTEK	Amplifier	170007-L	May 17, 2023
■ - WHKX3.0/18G-10SS	WAINWRIGHT INSTRUMENTS	High pass filter	SN31	Apr. 07, 2023
■ - EMC 32	Rohde & Schwarz	Testing Software	VER10.50.10	N/A



13.6 Test data for Radiated Spurious Emission

- Test Date : Oct. 31, 2022 ~ Nov. 18, 2022
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Resolution Bandwidth : 200 Hz, 9 kHz(Below 30 MHz) / 120 kHz(30 MHz ~ 1GHz) / 1 MHz(Above 1GHz)
- Detector mode : Quasi Peak detector mode / Peak detector mode / Average detector mode
- Power Source : DC 3.7 V
- Note : Through three orthogonal axes were investigated and the worst case is report

Radiated Spurious Emission (9 kHz to 30 MHz)

※ The reading of emissions are attenuated more than 10 dB below the permissible limits.

Radiated Spurious Emission (30 MHz to 1 000 MHz)

802.11 Standard	Ch.	Frequency [MHz]	Pol.	Reading [dBuV]	Transducer Factor [dB]	Test Result [dBuV/m]	Limits [dBuV/m]	Margin [dB]	Detector Type
b	1	876.27	V	7.25	30.4	37.65	46.00	8.37	QPK
	6	N/A ¹⁾							
	11	876.50	H	8.27	30.4	38.67	46.00	7.35	QPK
g	1	876.66	V	5.94	30.4	36.34	46.00	9.68	QPK
	6	876.80	V	5.93	30.5	36.43	46.00	9.59	QPK
	11	876.15	V	8.78	30.4	39.18	46.00	6.84	QPK
n (HT20)	1	876.75	V	6.75	30.4	37.15	46.00	8.87	QPK
	6	N/A ¹⁾							
	11	N/A ¹⁾							
n (HT40)	3	N/A ¹⁾							
	7	877.86	H	6.09	30.5	36.59	46.00	9.43	QPK
	11	N/A ¹⁾							

Note:

1) The reading of emissions are attenuated more than 10 dB below the permissible limits.

Test Result = Reading + AF+AMP / CL

Where, ACF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass Filter

Pol.: H(Horizontal), V(Vertical)


Radiated Spurious Emission (1 GHz to 26 GHz)

※ If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.



13.7 Test data for Radiated Restricted Band Edge Emission

- Test Date : Nov. 01 ~ 02, 2022
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Resolution Bandwidth : 1 MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : DC 3.7 V
- Note : Through three orthogonal axes were investigated and the worst case is report

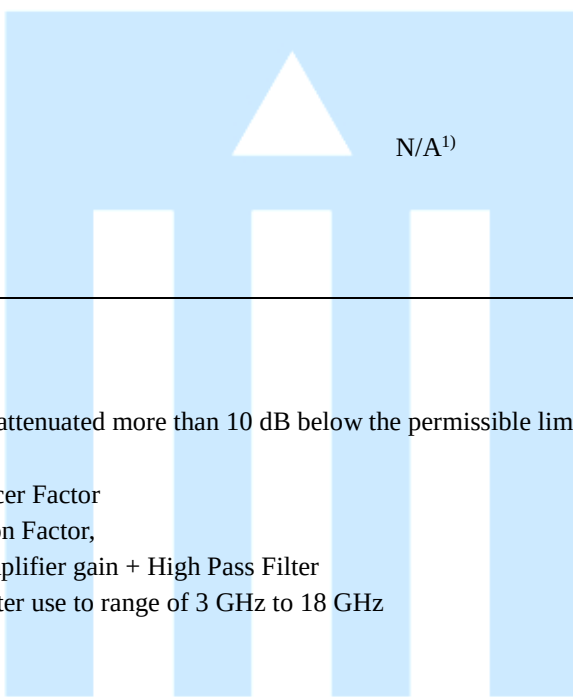802.11 Standard	Ch.	Frequency [MHz]	Pol.	Reading [dBuV]	Transducer Factor [dB]	Test Result [dBuV/m]	Limits [dBuV/m]	Margin [dB]	Detector Type
b	1								
	11								
g	1								
	11								
n (HT20)	1								
	11								
n (HT40)	3								
	11								

Note:

1) The reading of emissions are attenuated more than 10 dB below the permissible limits.

Test Result = Reading + Transducer Factor

Where, ACF : Antenna Collection Factor,

CL = Cable loss + Preamplifier gain + High Pass Filter

※ High Pass Filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)



14. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

14.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

14.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



15. Recommendation & Conclusion

The data collected shows that the **Summit Technology Touch Screen Controller (Model Name: TDC-5100)** was complies with §15.247 of the FCC Rules.

- The end -

