

Test Report

Applicant: SportBak

Address of Applicant: 60 avenue Andre Roussin 13016, Marseille, France

Manufacturer: SportBak

Address of Manufacturer: 60 avenue Andre Roussin 13016, Marseille, France

Equipment Under Test (EUT)

Product Name: Ankle Wrist

Model No.: FutBak V1

FCC ID: 2AT74-FUTBAK

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: November 12, 2019

Date of Test: November 13-December 12, 2019

Date of report issued: December 13, 2019

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	December 13, 2019	Original

Prepared By:




Project Engineer

Date:

December 13, 2019

Check By:



Reviewer

Date:

December 13, 2019

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 CONDUCTED EMISSIONS	10
7.2 CONDUCTED PEAK OUTPUT POWER	13
7.3 20dB EMISSION BANDWIDTH	15
7.4 CARRIER FREQUENCIES SEPARATION	17
7.5 HOPPING CHANNEL NUMBER	19
7.6 DWELL TIME	20
7.7 BAND EDGE	24
7.7.1 Conducted Emission Method	24
7.8 SPURIOUS EMISSION	26
7.8.1 Conducted Emission Method	26
7.8.2 Radiated Emission Method	29
8 TEST SETUP PHOTO	40
9 EUT CONSTRUCTIONAL DETAILS	40

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 3.8039\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 3.9679\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.29\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.44\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Ankle Wrist
Model No.:	FutBak V1
Serial No.:	NA
Hardware Version:	V1
Software Version:	V1
Test sample(s) ID:	GTS201911000064-1
Sample(s) Status:	Engineer sample
Operation Frequency:	902.750MHz~927.250MHz
Channel numbers:	50
Channel separation:	0.5MHz
Modulation type:	PR-ASK
Antenna Type:	Inner Antenna
Antenna gain:	-2.3dBi(Declare by applicant)
Power supply:	Battery: DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	902.750MHz	16	910.250MHz	31	917.750MHz	46	925.250MHz
2	903.250MHz	17	910.750MHz	32	918.250MHz	47	925.750MHz
3	903.750MHz	18	911.250MHz	33	918.750MHz	48	926.250MHz
4	904.250MHz	19	911.750MHz	34	919.250MHz	49	926.750MHz
5	904.750MHz	20	912.250MHz	35	919.750MHz	50	927.250MHz
6	905.250MHz	21	912.750MHz	36	920.250MHz		
7	905.750MHz	22	913.250MHz	37	920.750MHz		
8	906.250MHz	23	913.750MHz	38	921.250MHz		
9	906.750MHz	24	914.250MHz	39	921.750MHz		
10	907.250MHz	25	914.750MHz	40	922.250MHz		
11	907.750MHz	26	915.250MHz	41	922.750MHz		
12	908.250MHz	27	915.750MHz	42	923.250MHz		
13	908.750MHz	28	916.250MHz	43	923.750MHz		
14	909.250MHz	29	916.750MHz	44	924.250MHz		
15	909.750MHz	30	917.250MHz	45	924.750MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	902.750MHz
The middle channel	915.250MHz
The Highest channel	927.250MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
DELTA	ADAPTER	ADP-60ADT	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. ● IC—Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A. ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 26 2019	June. 25 2020
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 26 2019	June. 25 2020
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 26 2019	June. 25 2020
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 26 2019	June. 25 2020
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 26 2019	June. 25 2020

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020


7 Test results and Measurement Data

7.1 Conducted Emissions

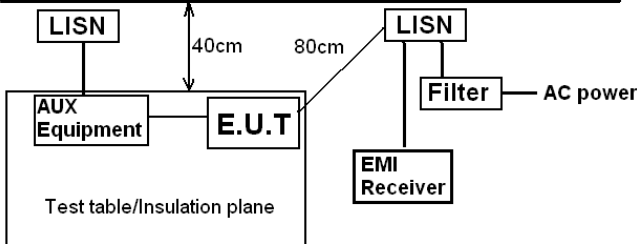Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test results:	Pass					


Measurement data:

Line:

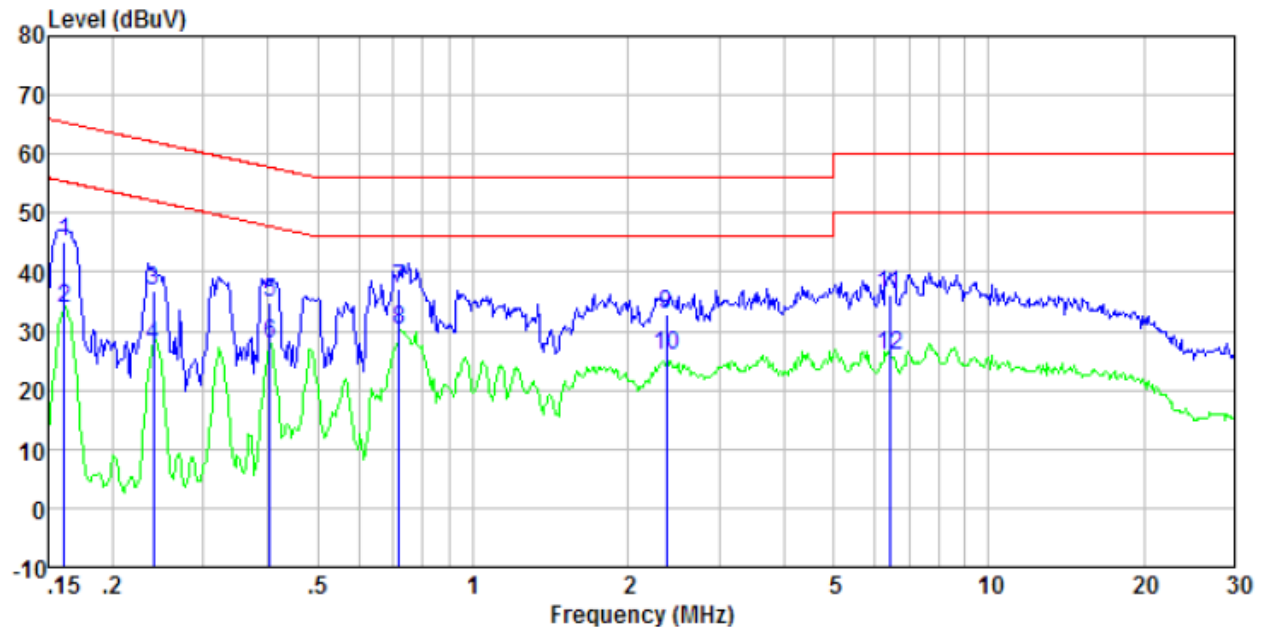

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.16	44.57	0.40	0.08	45.05	65.38	-20.33	QP
0.16	33.25	0.40	0.08	33.73	55.38	-21.65	Average
0.24	36.17	0.40	0.11	36.68	62.08	-25.40	QP
0.24	27.02	0.40	0.11	27.53	52.08	-24.55	Average
0.40	34.41	0.35	0.11	34.87	57.77	-22.90	QP
0.40	27.28	0.35	0.11	27.74	47.77	-20.03	Average
0.72	36.85	0.26	0.13	37.24	56.00	-18.76	QP
0.72	29.72	0.26	0.13	30.11	46.00	-15.89	Average
2.37	32.43	0.20	0.18	32.81	56.00	-23.19	QP
2.37	25.40	0.20	0.18	25.78	46.00	-20.22	Average
6.42	35.86	0.20	0.18	36.24	60.00	-23.76	QP
6.42	25.34	0.20	0.18	25.72	50.00	-24.28	Average

Neutral:

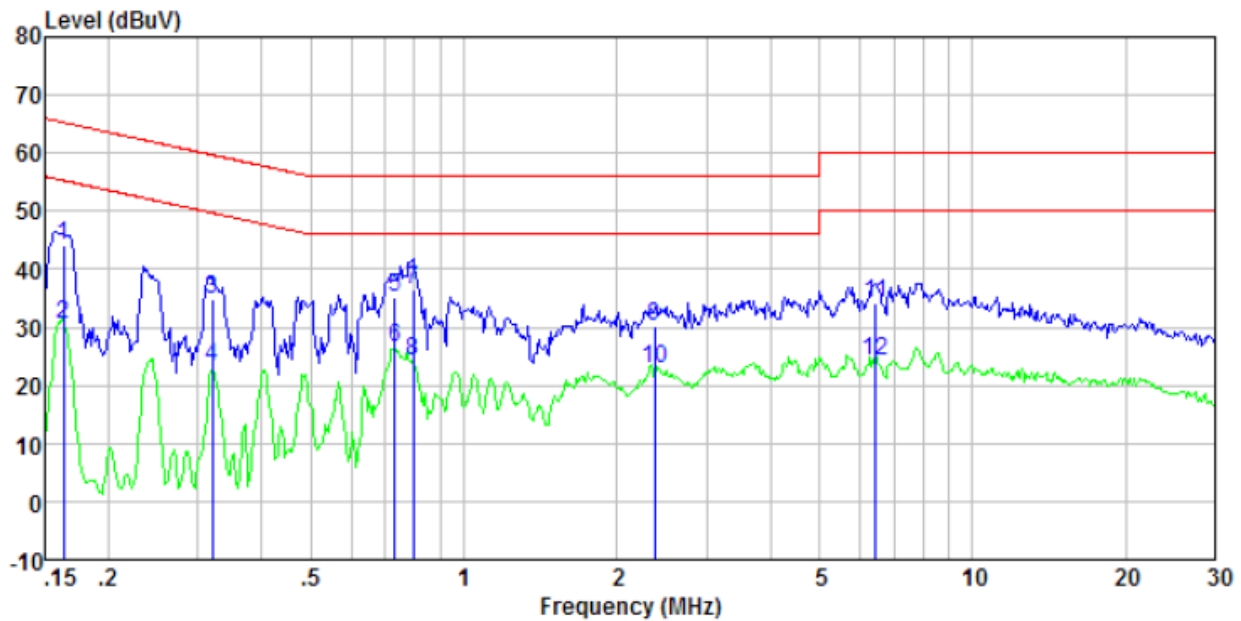


Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.16	43.60	0.40	0.08	44.08	65.30	-21.22	QP
0.16	30.11	0.40	0.08	30.59	55.30	-24.71	Average
0.32	34.25	0.39	0.10	34.74	59.71	-24.97	QP
0.32	22.62	0.39	0.10	23.11	49.71	-26.60	Average
0.73	34.84	0.25	0.13	35.22	56.00	-20.78	QP
0.73	26.22	0.25	0.13	26.60	46.00	-19.40	Average
0.80	36.14	0.24	0.14	36.52	56.00	-19.48	QP
0.80	23.75	0.24	0.14	24.13	46.00	-21.87	Average
2.37	29.93	0.20	0.18	30.31	56.00	-25.69	QP
2.37	22.46	0.20	0.18	22.84	46.00	-23.16	Average
6.45	33.89	0.20	0.18	34.27	60.00	-25.73	QP
6.45	23.74	0.20	0.18	24.12	50.00	-25.88	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss


7.2 Conducted Peak Output Power

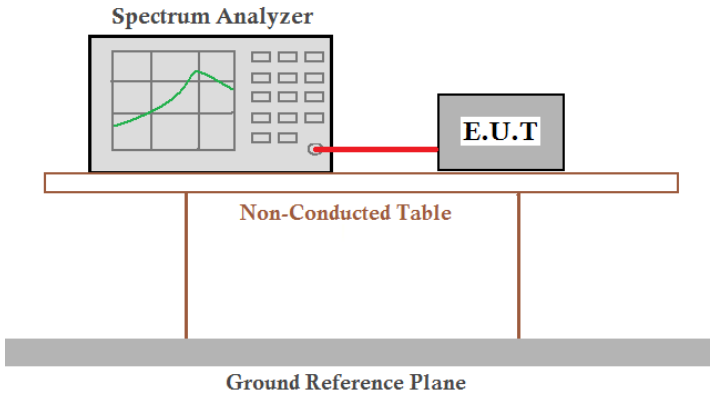Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	20dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	14.59	20.00	Pass
Middle	14.94		
Highest	14.62		


Test plot as follows:

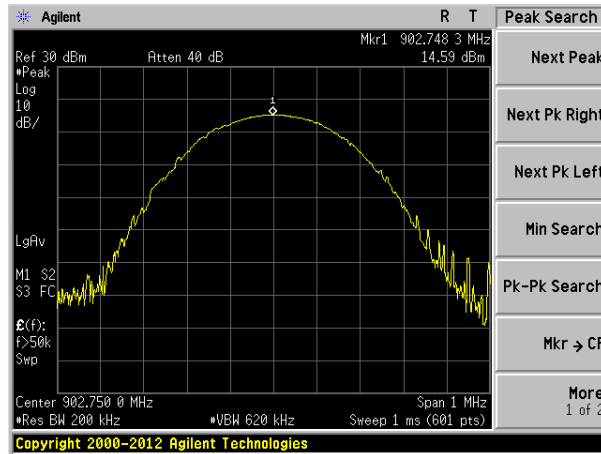

Lowest channel

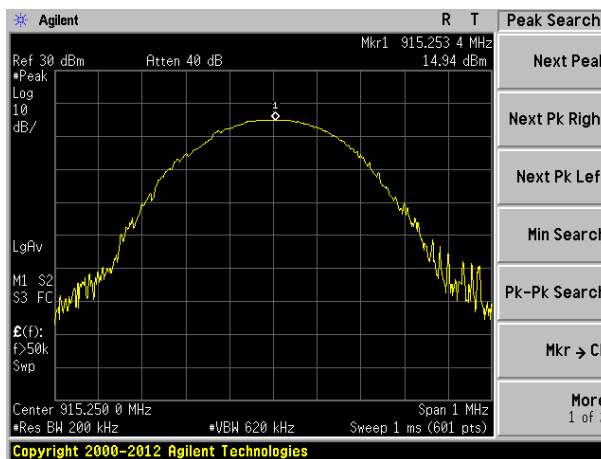


Middle channel

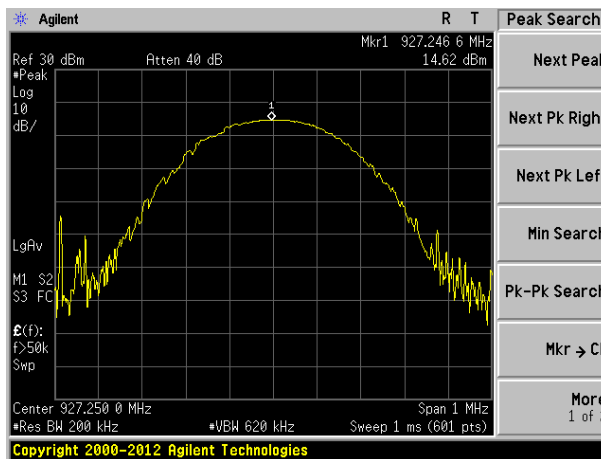

Highest channel


7.3 20dB Emission Bandwidth

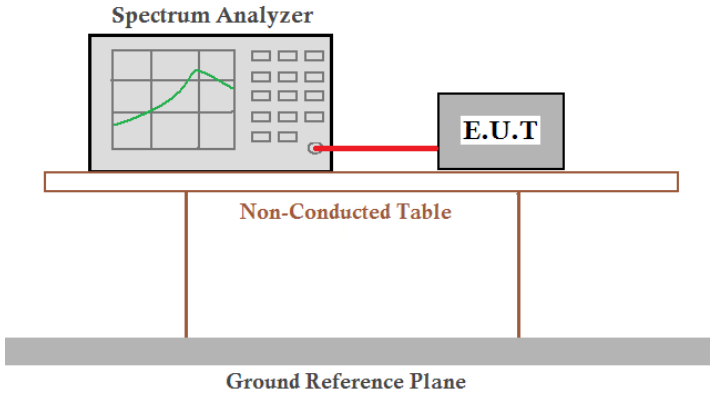Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB Emission Bandwidth (KHz)	Result
Lowest	137.081	Pass
Middle	92.523	
Highest	129.624	


Test plot as follows:

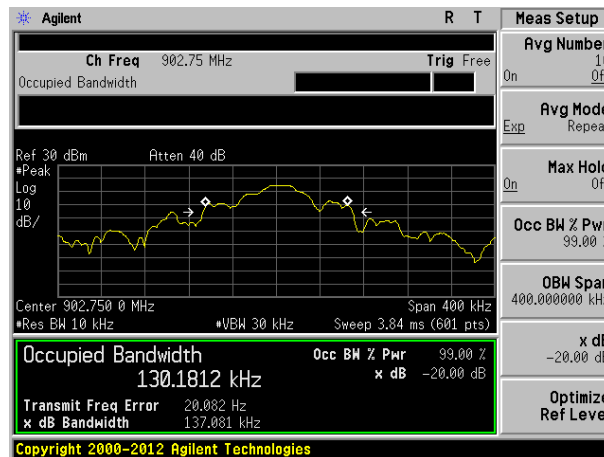

Lowest channel

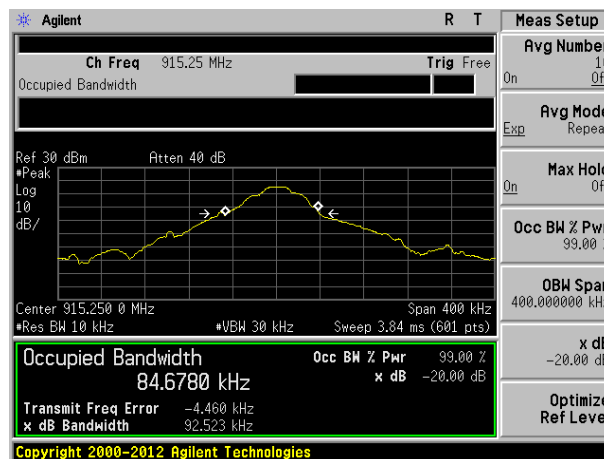


Middle channel

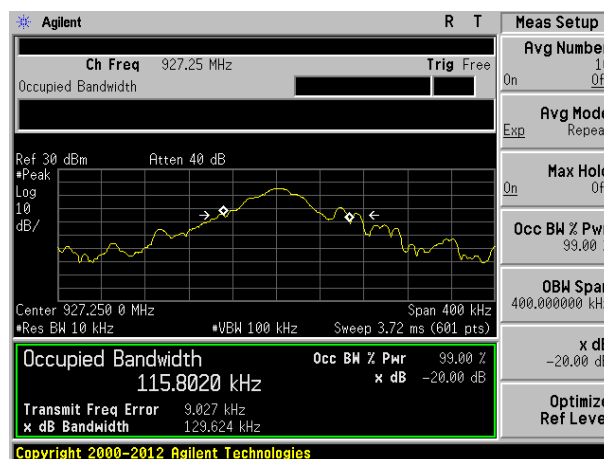

Highest channel

7.4 Carrier Frequencies Separation

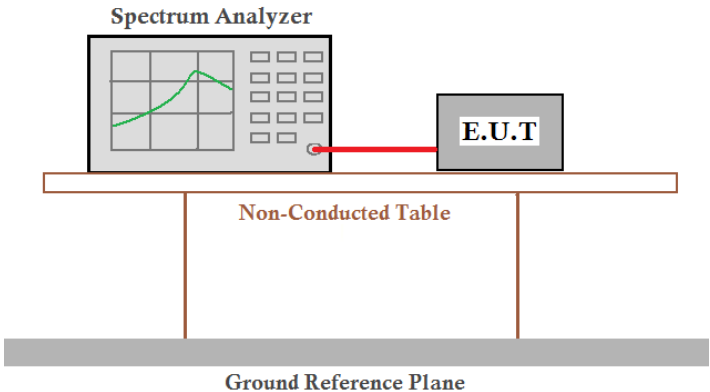Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	20dB bandwidth
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	499.0	137.081	Pass
Middle	490.7	137.081	Pass
Highest	499.7	137.081	Pass


Note: According to section 7.4

20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
137.081	137.081


Test plot as follows:

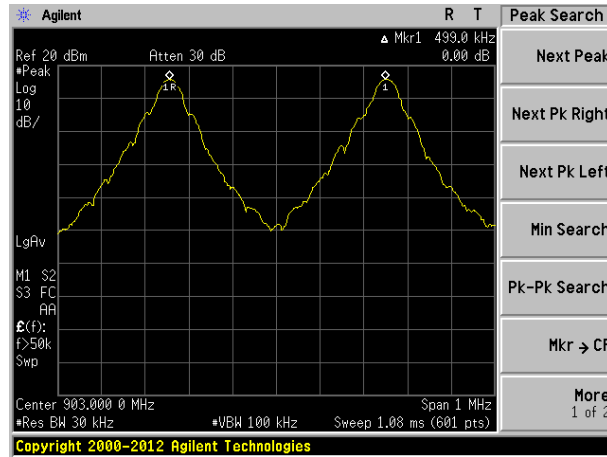

Lowest channel

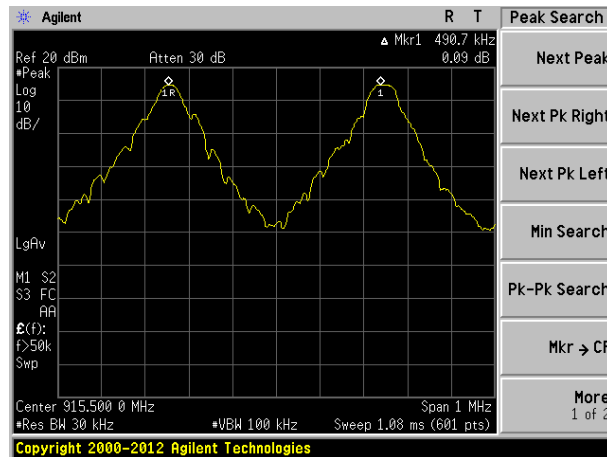


Middle channel

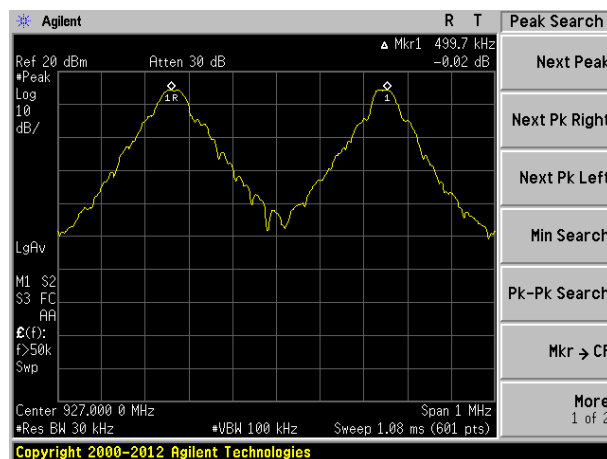

Highest channel


7.5 Hopping Channel Number

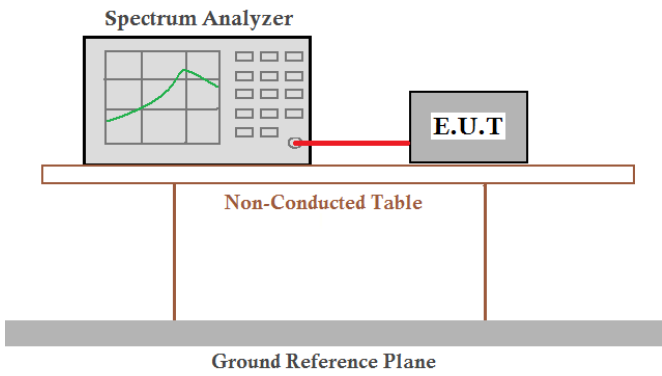Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	50 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Hopping channel numbers	Limit	Result
50	50	Pass

Test plot as follows:

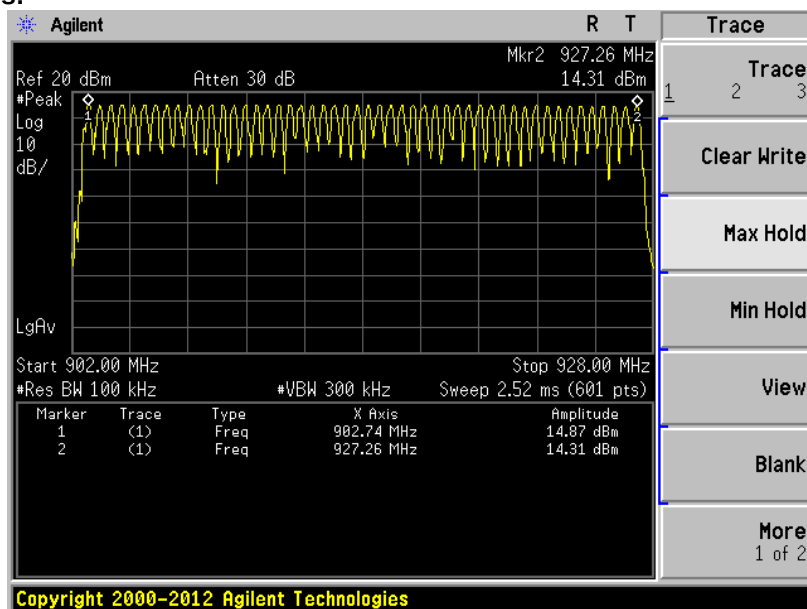

7.6 Dwell Time

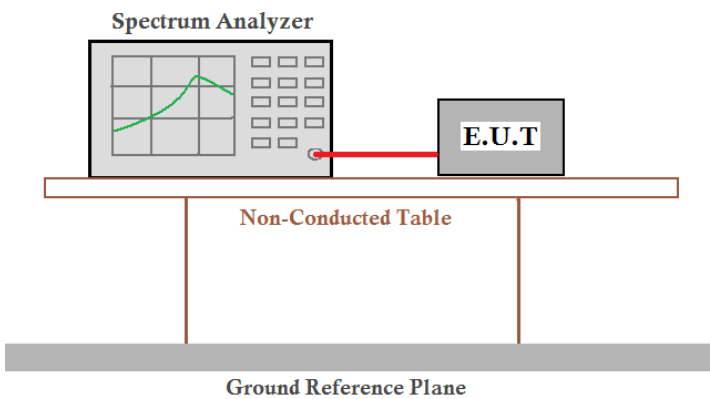
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Frequency	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
902.750MHz	5.05	30.30	400	Pass
915.250MHz	5.00	30.00	400	Pass
927.250MHz	5.05	30.30	400	Pass

Test plot as follows:

Test channel:	902.750MHz
---------------	------------

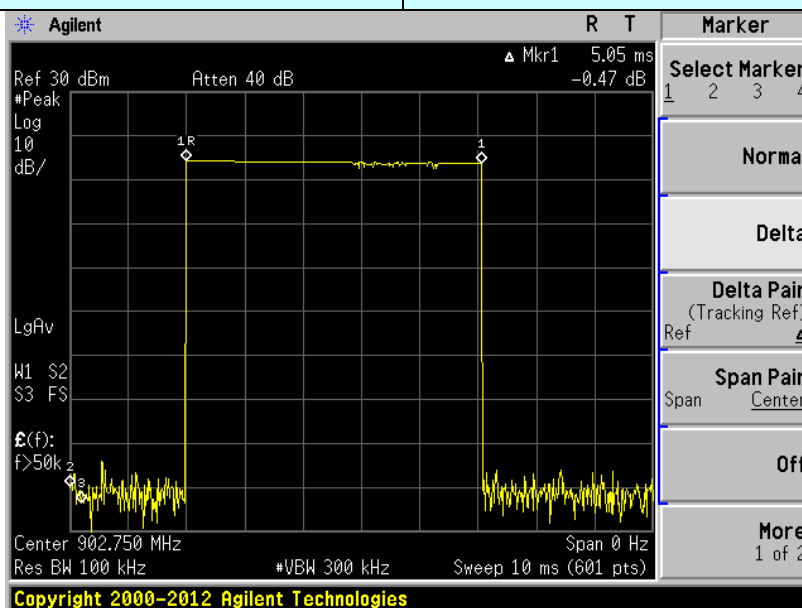


Ton

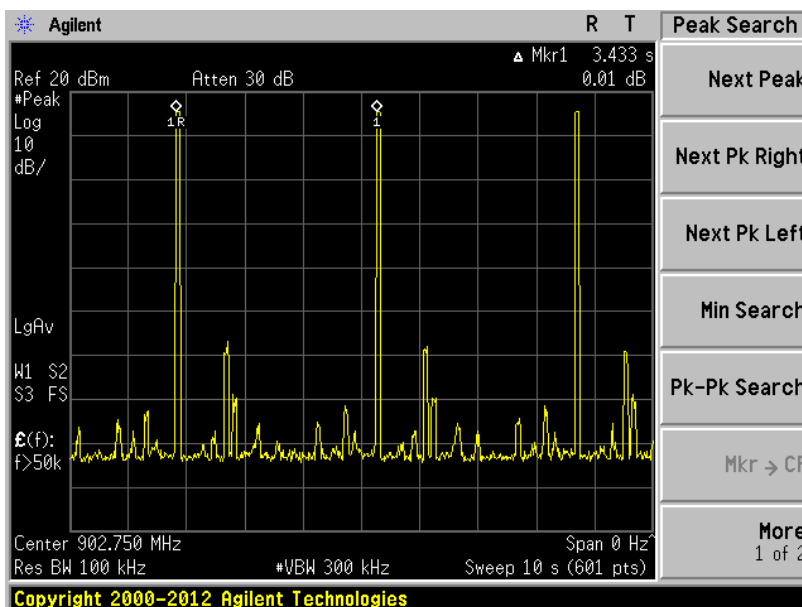


Ton times in 10s

Test channel:	915.250MHz
---------------	------------

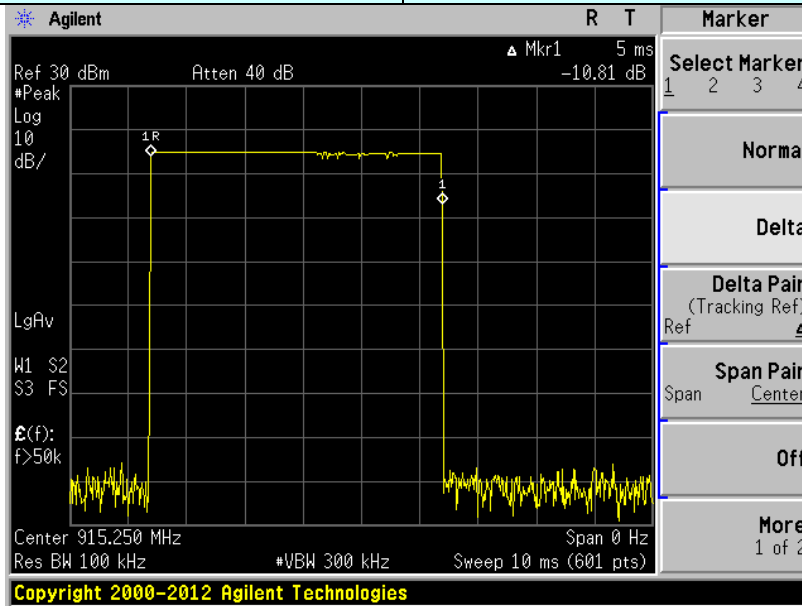


Ton

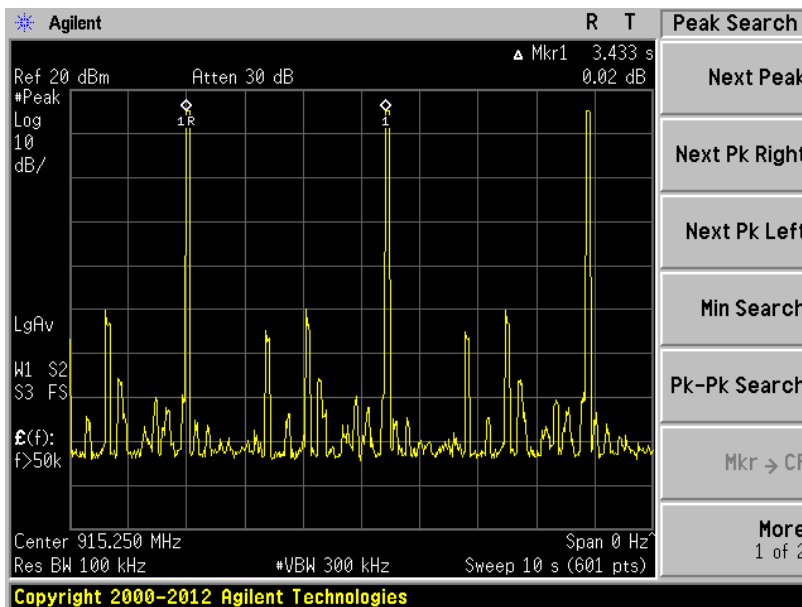


Ton times in 10s

Test channel:	927.250MHz
---------------	------------

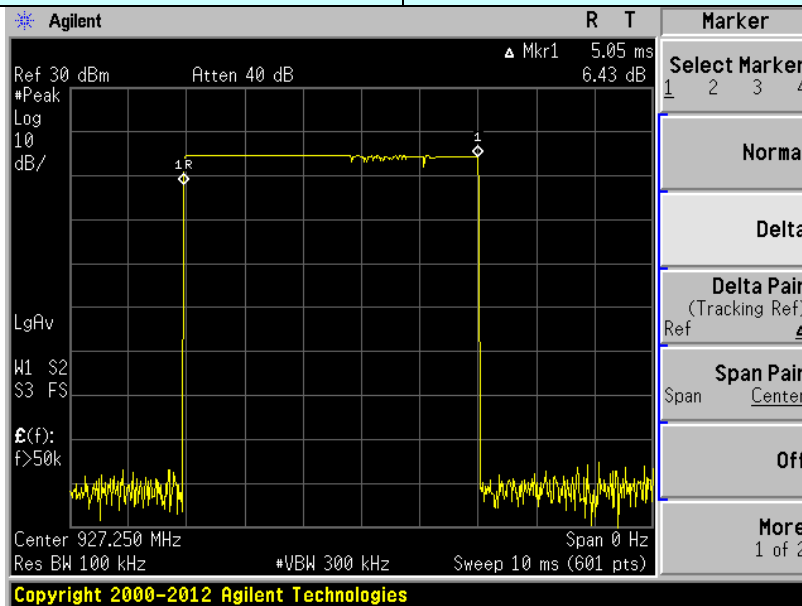


Ton

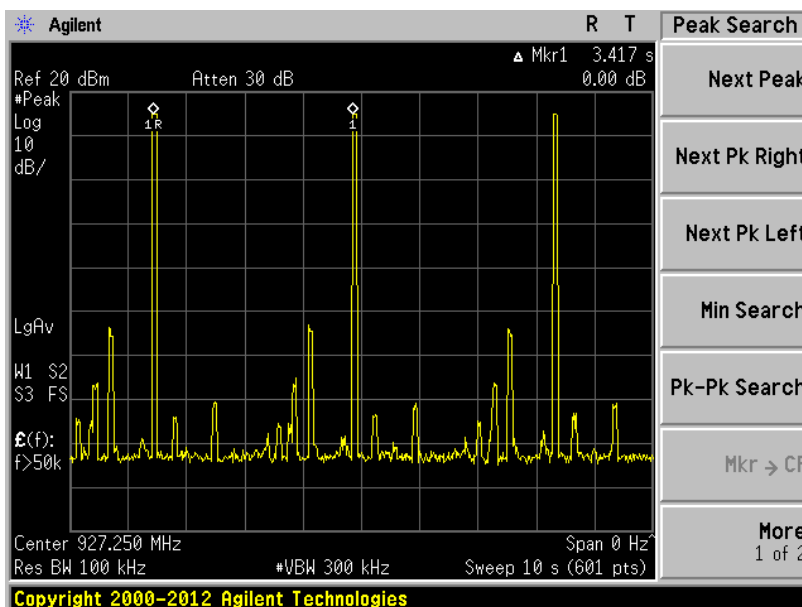


Ton times in 10s

7.7 Band Edge

7.7.1 Conducted Emission Method

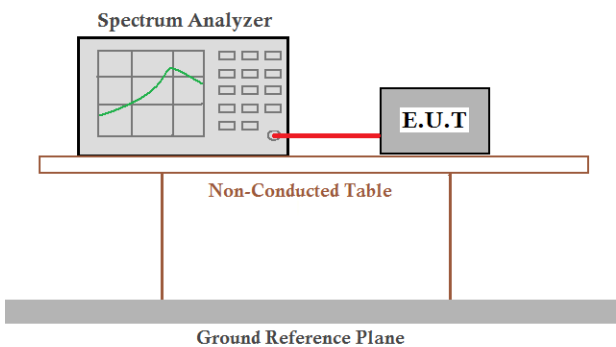
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

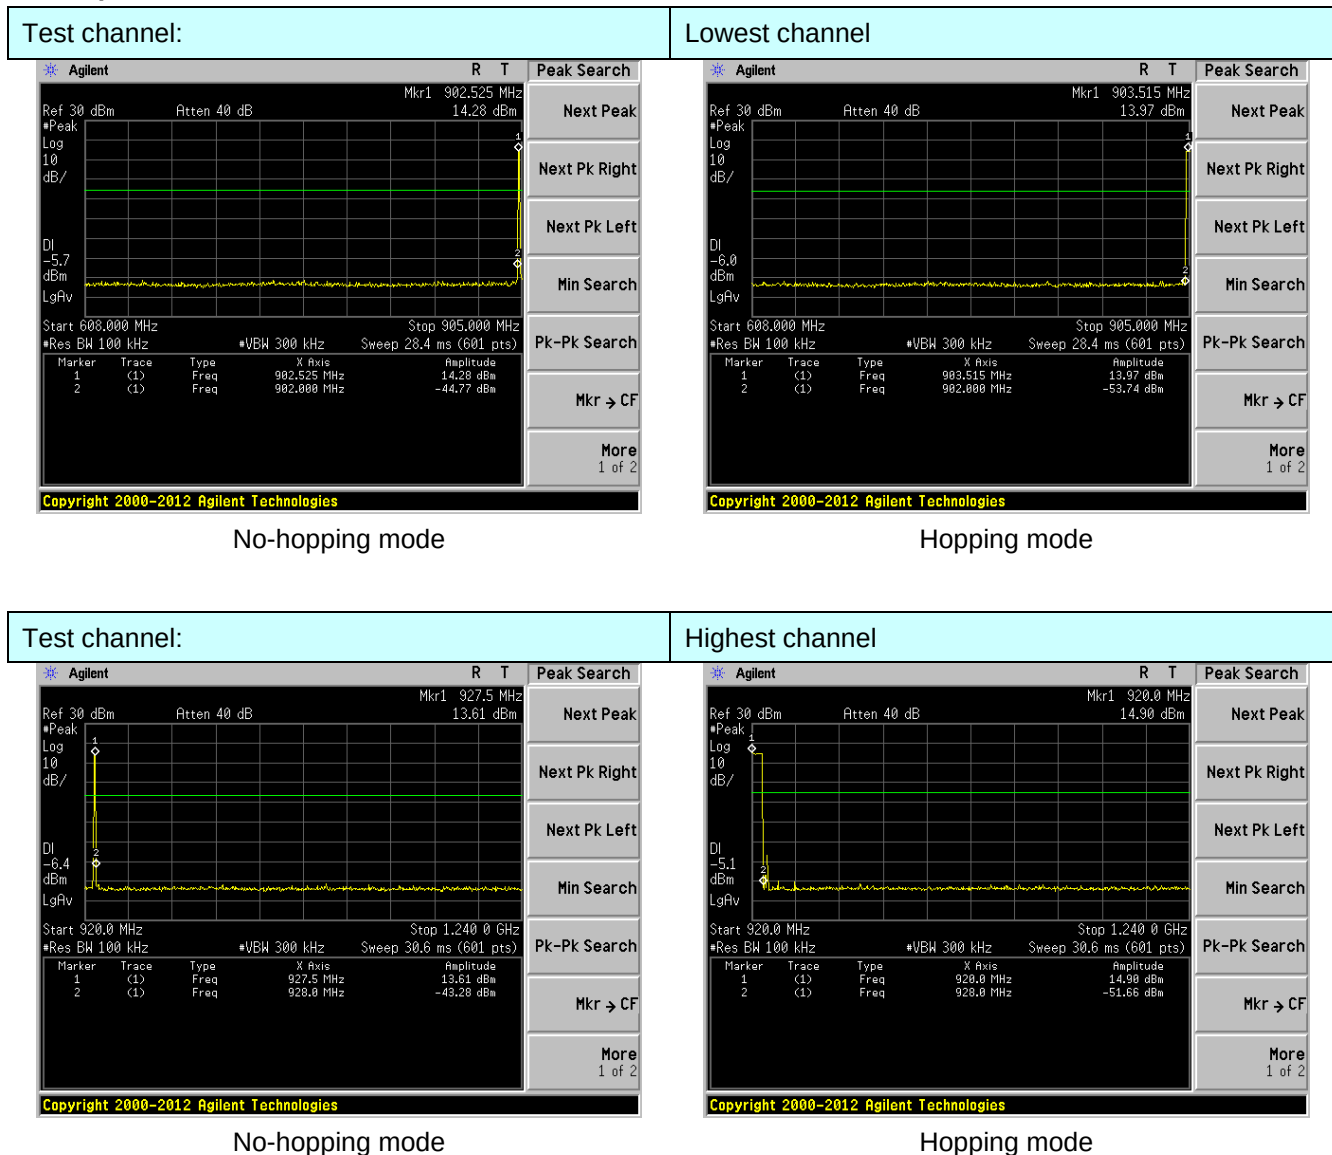


7.8 Spurious Emission

7.8.1 Conducted Emission Method

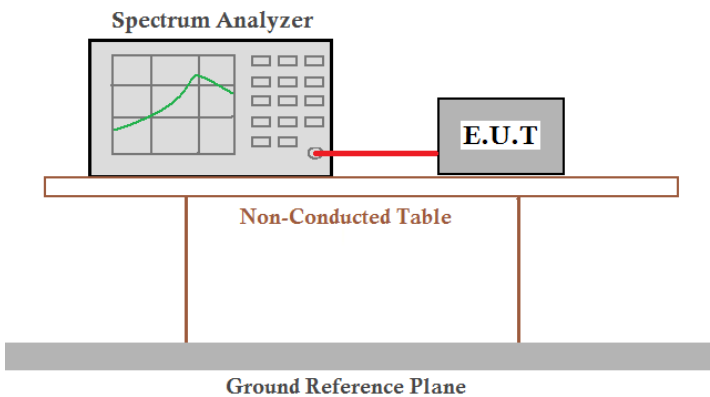Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test channel:


Lowest channel

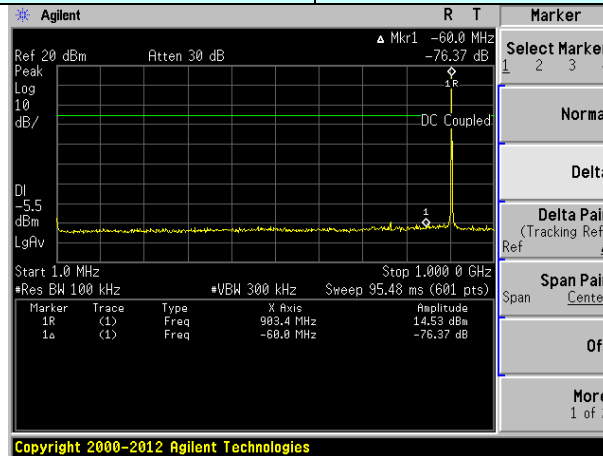

30MHz~1GHz

Test channel:


Middle channel

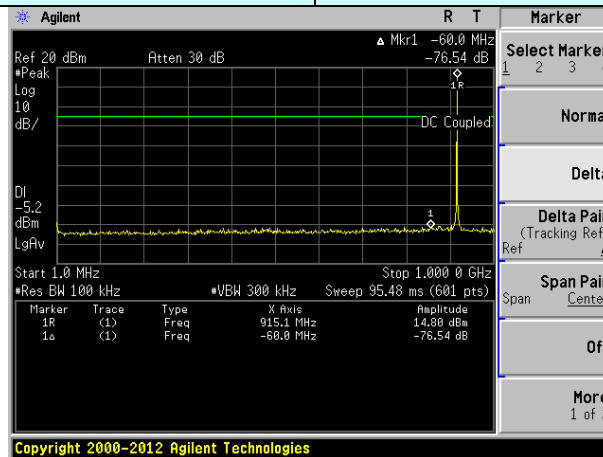

30MHz~1GHz

Test channel:


Highest channel

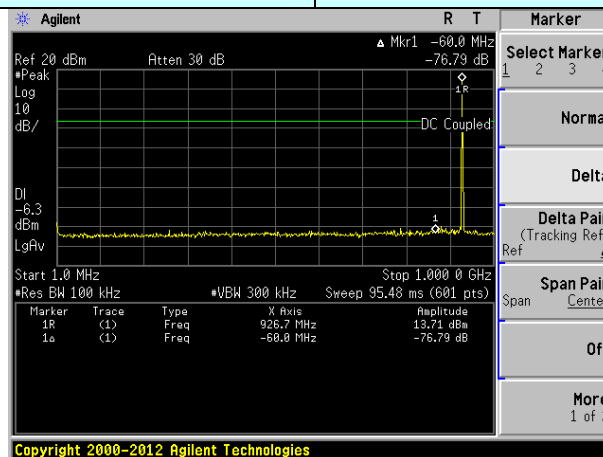

30MHz~1GHz

Test channel:


Lowest channel

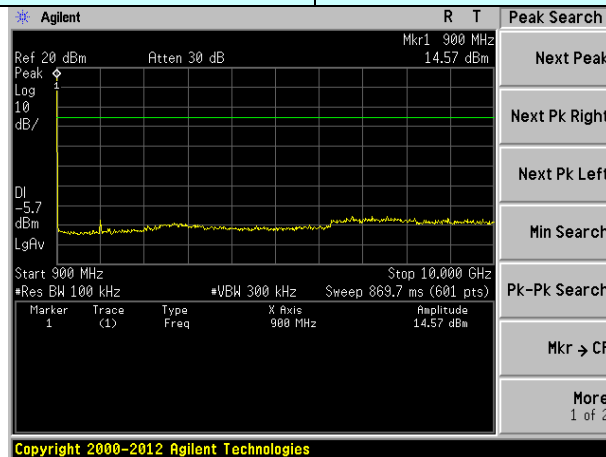

900MHz~10GHz

Test channel:


Middle channel

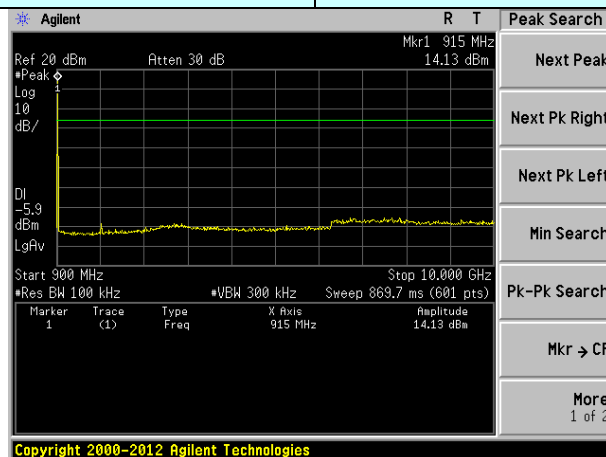

900MHz~10GHz


Test channel:



Highest channel

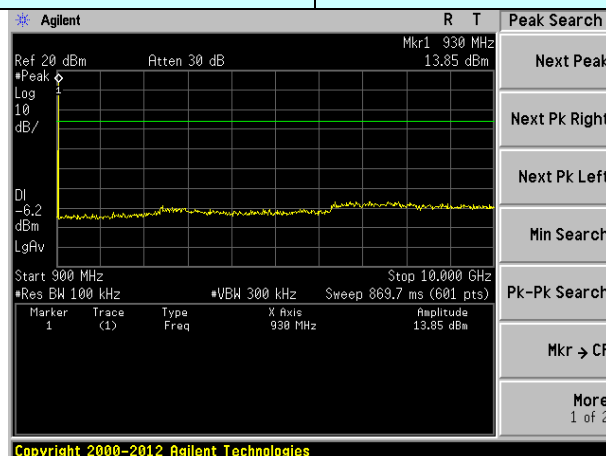

900MHz~10GHz

7.8.2 Radiated Emission Method

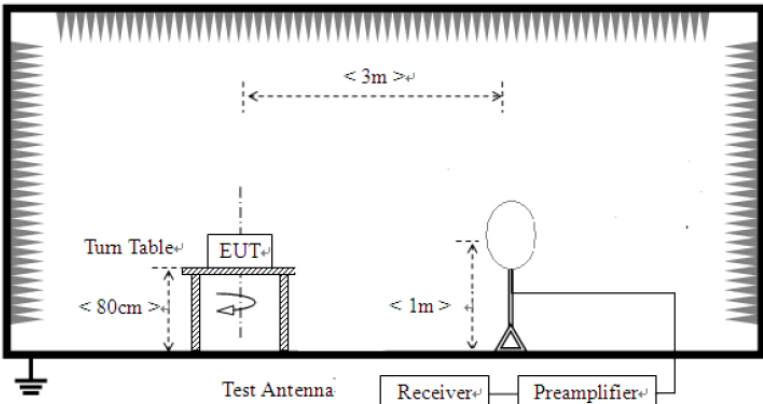Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)		Value	Measurement Distance
	0.009MHz-0.490MHz	2400/F(KHz)		QP	300m
	0.490MHz-1.705MHz	24000/F(KHz)		QP	30m
	1.705MHz-30MHz	30		QP	30m
	30MHz-88MHz	100		QP	3m
	88MHz-216MHz	150		QP	
	216MHz-960MHz	200		QP	
	960MHz-1GHz	500		QP	
	Above 1GHz	500		Average	
		5000		Peak	
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

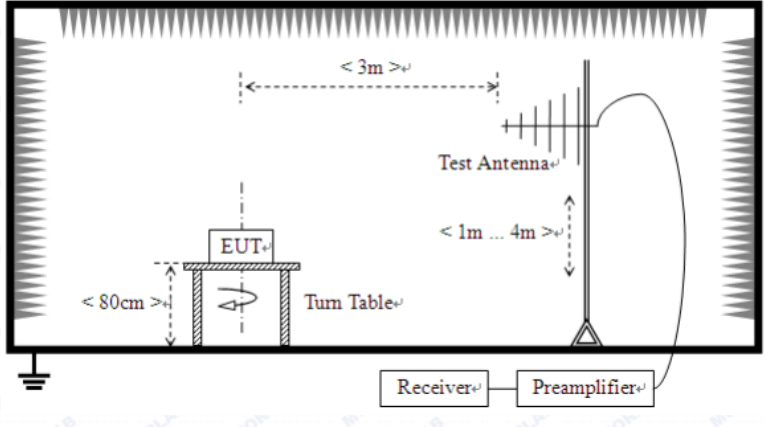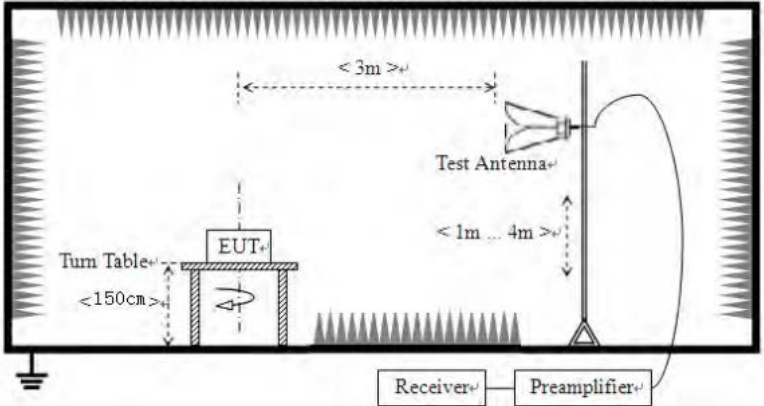	For radiated emissions from 30MHz to 1GHz  For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have

	10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:*Remarks:*


1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


■ Below 1GHz

Horizontal:

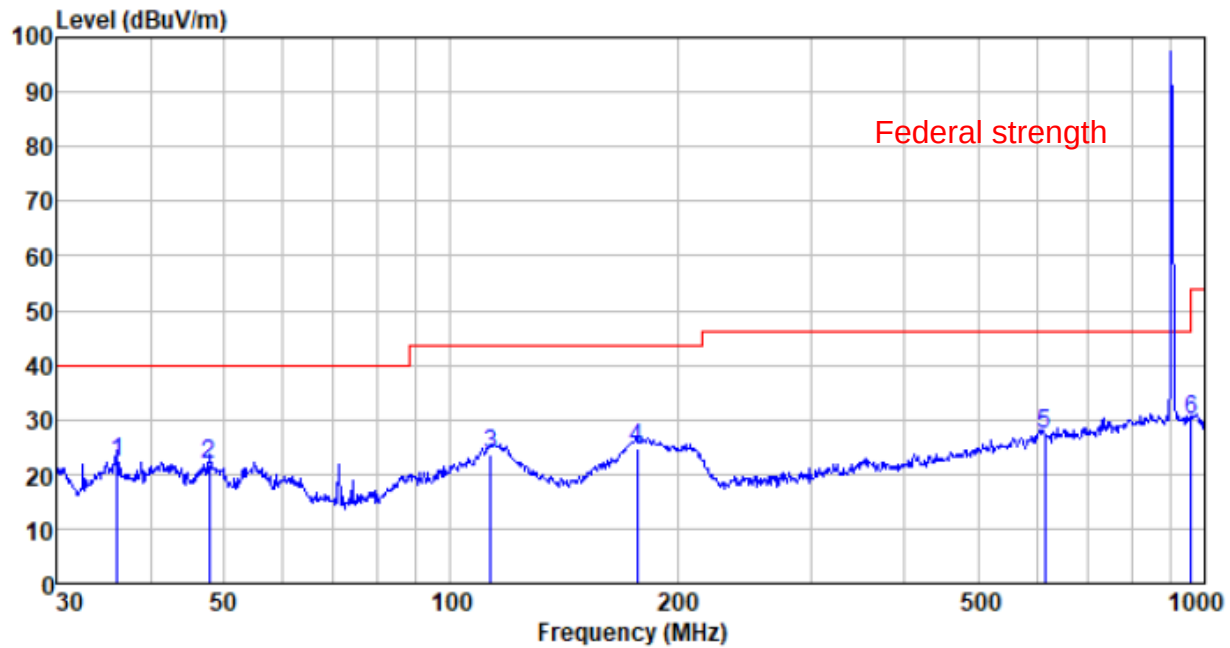

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
36.127	40.72	11.52	0.14	30.13	22.25	40.00	-17.75	QP
47.826	38.98	12.28	0.50	30.02	21.74	40.00	-18.26	QP
112.920	41.87	10.59	0.95	29.83	23.58	43.50	-19.92	QP
176.888	44.42	8.77	1.17	29.57	24.79	43.50	-18.71	QP
614.000	37.22	19.52	0.00	29.44	27.30	46.00	-18.70	QP
960.000	36.60	22.55	0.00	29.34	29.81	46.00	-16.19	QP

Vertical:

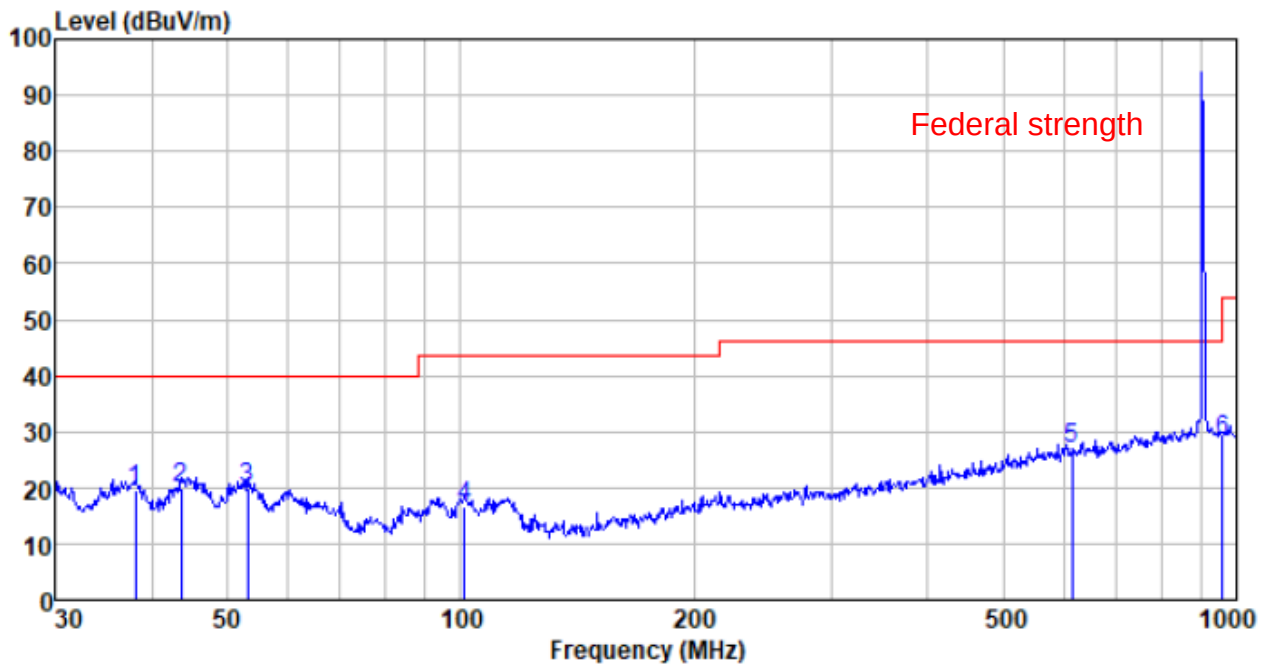


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
38.078	37.49	11.89	0.14	30.11	19.41	40.00	-20.59	QP
43.659	37.44	12.24	0.32	30.05	19.95	40.00	-20.05	QP
53.131	37.30	11.98	0.63	29.99	19.92	40.00	-20.08	QP
101.289	33.54	12.04	0.90	29.89	16.59	43.50	-26.91	QP
614.000	36.68	19.52	0.00	29.44	26.76	46.00	-19.24	QP
960.000	35.17	22.55	0.00	29.34	28.38	46.00	-17.62	QP

■ Above 1GHz


Test channel:	Lowest
---------------	--------

Horizontal:

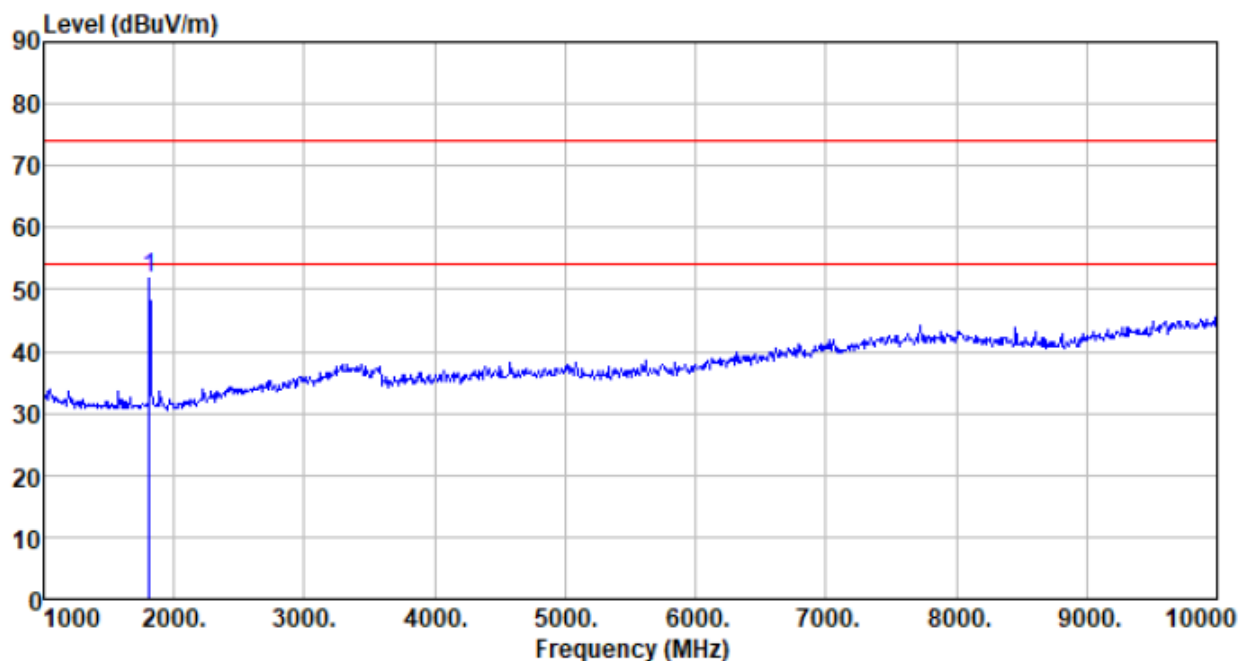

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1810.000	57.67	25.82	2.49	34.14	51.84	74.00	-22.16	Peak


Vertical:

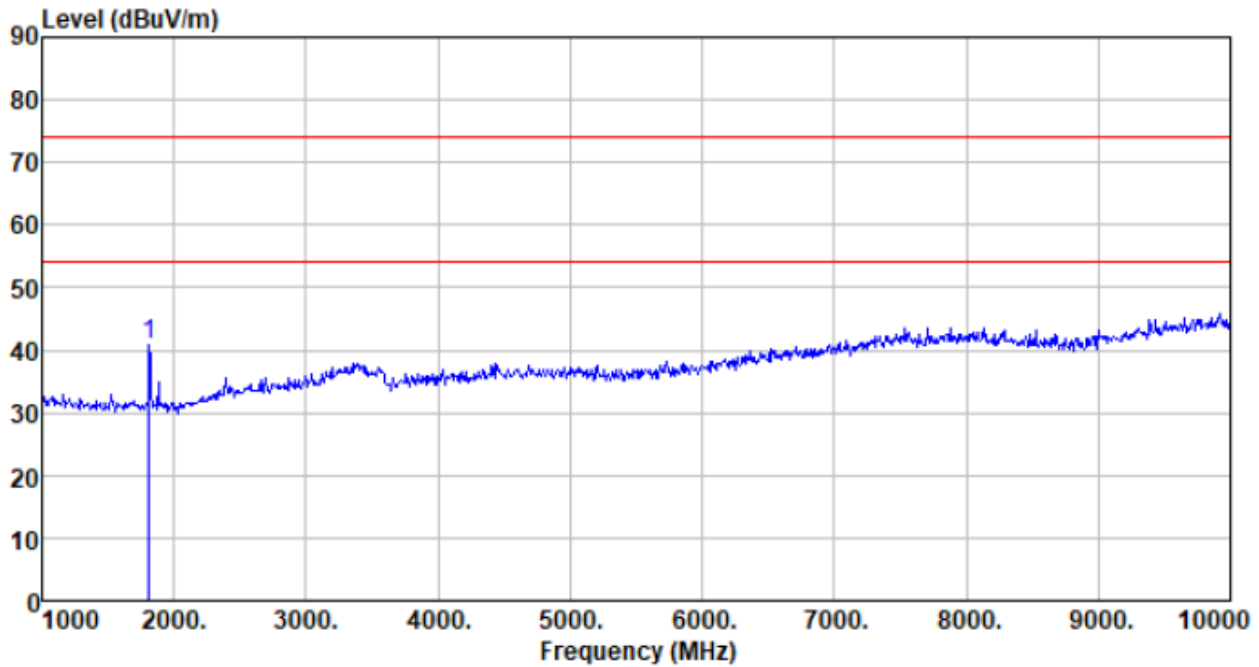

Freq MHz	Reading level dBUV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBUV	Limit level dBUV/m	Over limit dB	Remark
1810.000	46.62	25.82	2.49	34.14	40.79	74.00	-33.21	Peak


Test channel:	Middle
---------------	--------

Horizontal:

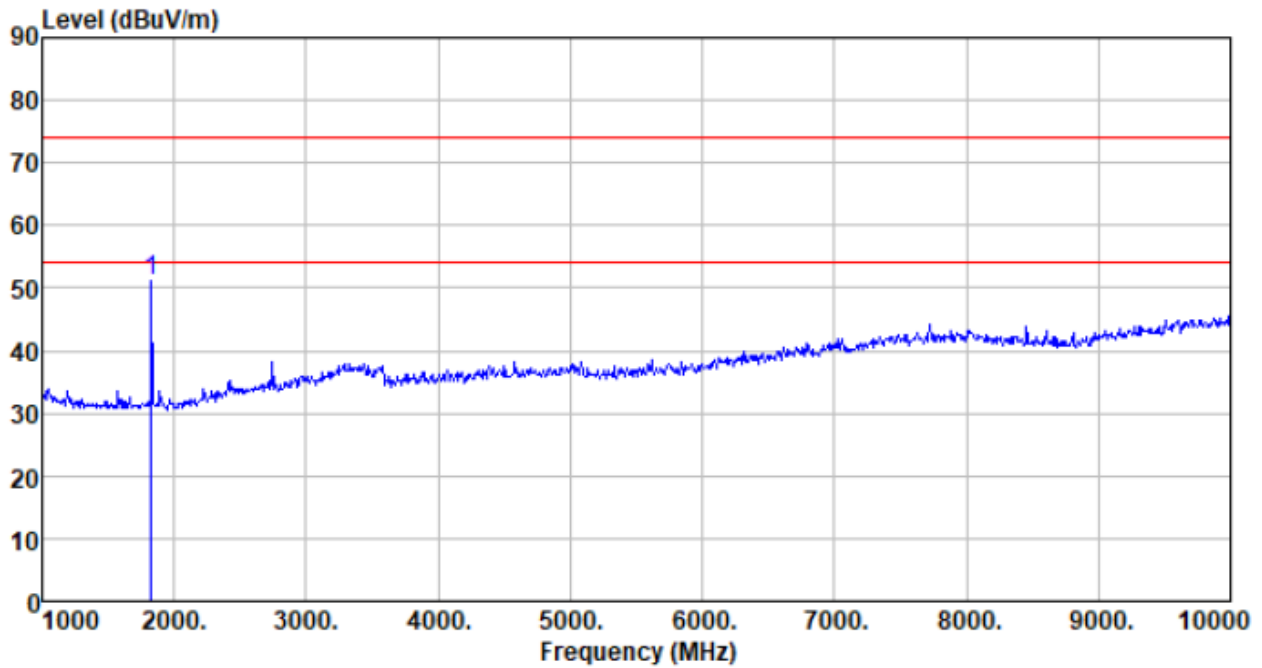

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1828.000	56.82	25.85	2.49	34.17	50.99	74.00	-23.01	Peak


Vertical:

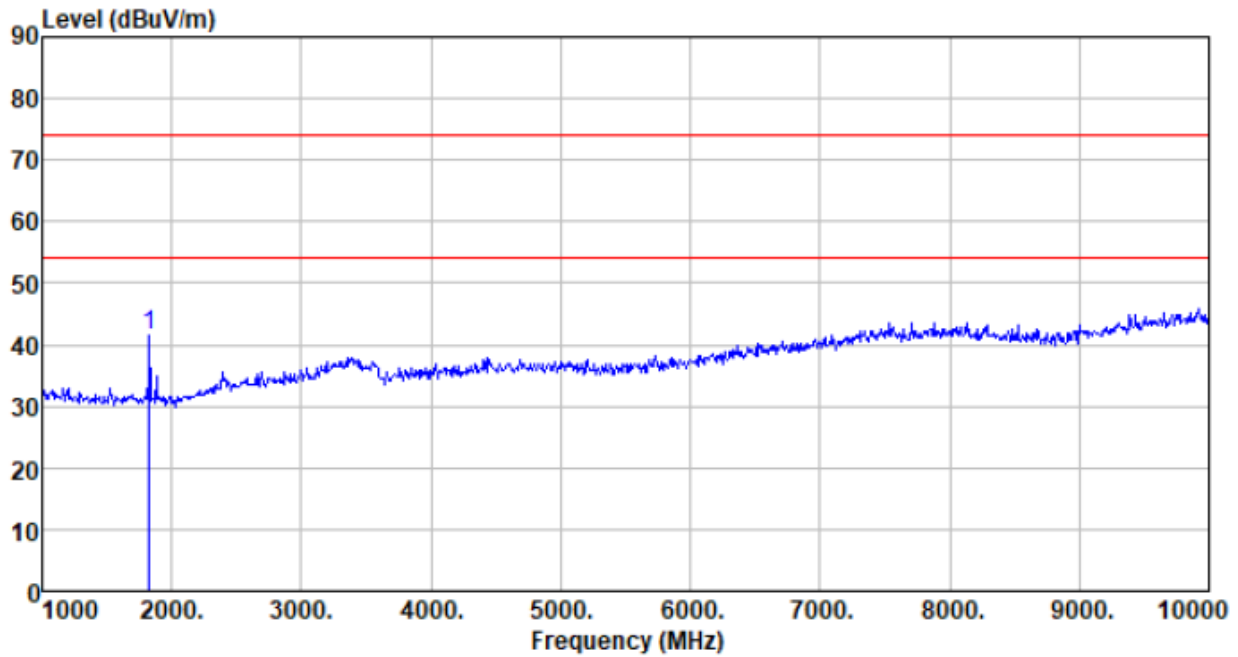

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1828.000	47.39	25.85	2.49	34.17	41.56	74.00	-32.44	Peak


Test channel:	Highest
---------------	---------

Horizontal:

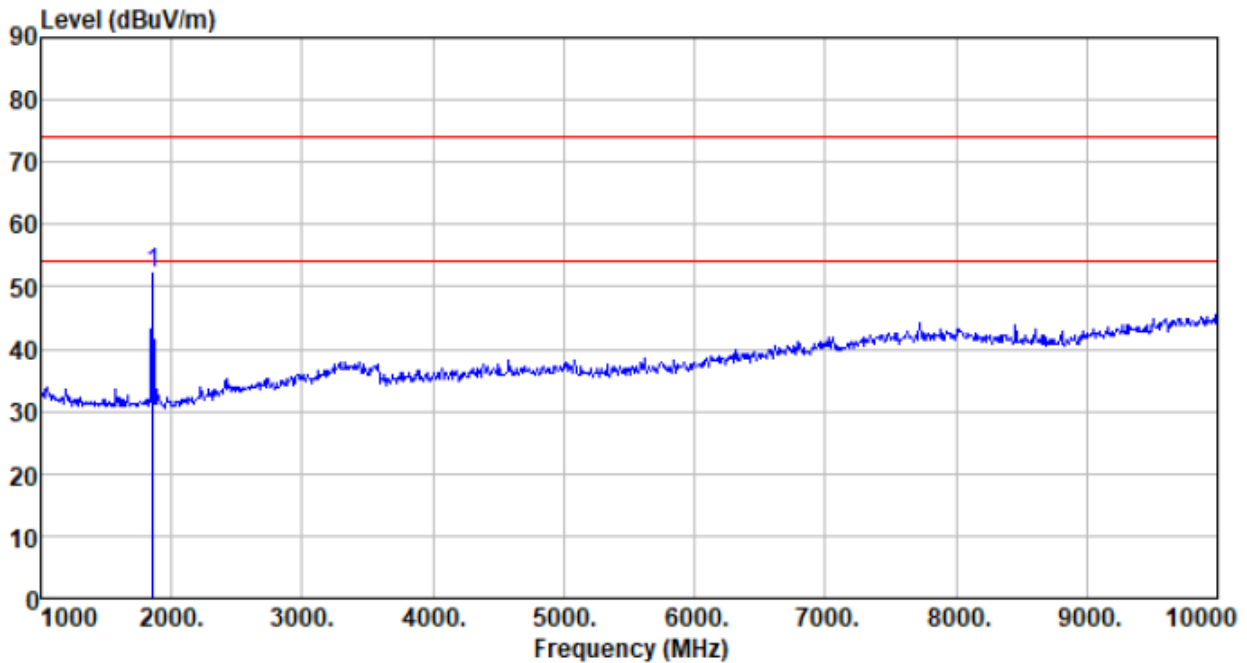

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1855.000	57.98	25.89	2.49	34.20	52.16	74.00	-21.84	Peak

Vertical:

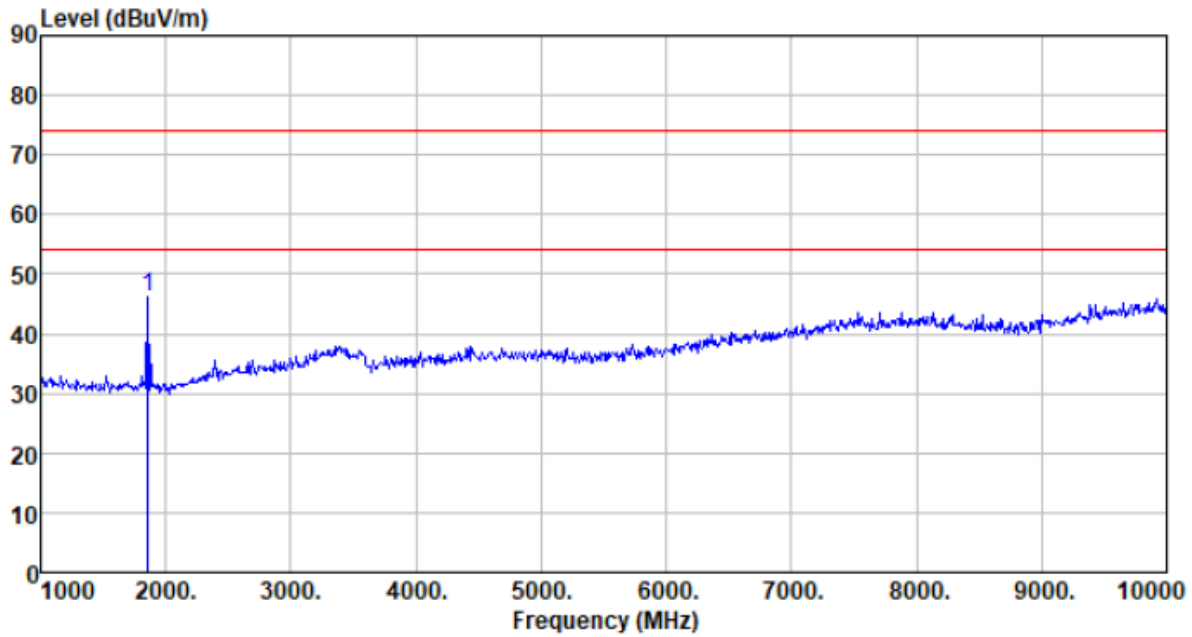

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1855.000	51.93	25.89	2.49	34.20	46.11	74.00	-27.89	Peak

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

3.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----