INWA®

MZ-622

Bluetooth Wall-Mounted Speaker

Inwa®

Product Manual

MZ-622
Bluetooth Wall-Mounted Speaker

Thank you for buying this product. Please read all safety information and operation instruction before using the bluetooth speaker.

Safety Rules

- Please read and follow this instruction.
- Please keep or use at room temperature.
- Please do not use this product near heat sources such as radiators, enthalpy regulators, stoves or other heat generating instruments (including amplifiers).
- All types of malfunction should be repaired by professional maintenance staff, disassemble without permission will void the warranty.

Package Contents

Speaker X 2

Remote control
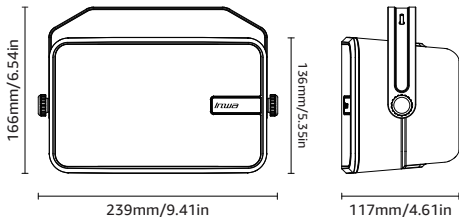
User manual

Power adapter

5-meter RCA cable

Plastic expansion

Screw

Dimensions

166mm/6.54in

136mm/5.35in

239mm/9.41in

117mm/4.61in

Control Panel and Interface

⏻ On/Off key: short press to turn on/off

EQ Sound effect Key: short press to switch music/news mode

▶‖ Short press: play/pause

◀ Short press: previous song

▶ Short press: next song

◀)) Short press: increase volume

◀) Short press: decrease volume

M Mode button:
short press to switch to BT/AUX

✳ Bluetooth pairing key: short press to enter Bluetooth pairing status

🔇 Speaker mute key: click to mute

Parameter

Bluetooth version:	5.2
Wireless distance:	≤15M
Input voltage:	DC 19V
Output power:	40W
THD:	< 1%
Frequency range:	20Hz-20KHz
SNR:	>90dB
Waterproof level:	IPX5

# Operating Instructions

1. Bluetooth connection:

   Short press the power button " ⏻ " to turn on the speaker, there will be a power-on sound prompt, the blue light will flash quickly. Search for and connect to "MZ-622" in the Bluetooth settings of your phone. Once successfully paired, the blue light will stay on constantly, and will remain on while playing music.

Blue light stays on

Distance≤15M
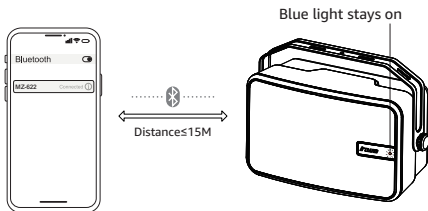
2. Speaker connected to new device:

  When the speaker is connecting to a new device, aim the remote control at the speaker and press the Bluetooth pairing button " ✳ " briefly to disconnect the current connection. The blue light will flash quickly, allowing you to connect to the new device.
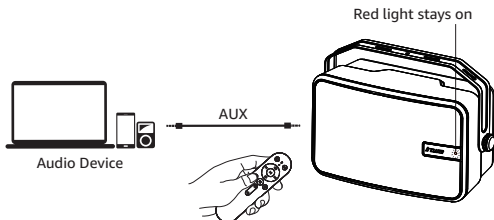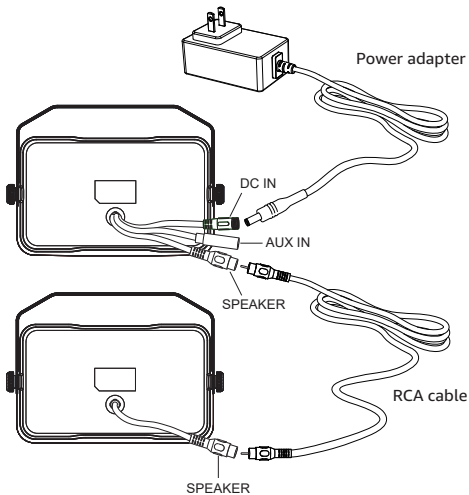
Blue light
flashing quickly
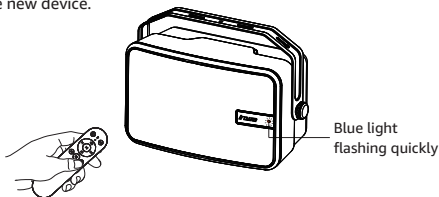
3. Mode switching:

  When a 3.5mm audio cable is plugged into the AUX port of the speaker, press the mode button " M " on the remote control to switch to AUX mode, and the red light will stay on. The red light will remain on when playing music.

Red light stays on

AUX

Audio Device

Connection Method

Power adapter

DC IN

AUX IN

SPEAKER

RCA cable

SPEAKER

Installation Diagram

Note:
1. Please confirm the speaker can work normally before installing.
2. Tools in Figure A are not included.

Step 1

Remove the bracket from the product and drill two mounting holes in the wall spaced apart (see Figure A).


Step 2

Screw the bracket to the mounting holes on the wall with the screws in the accessories.

Step 3

Install the speaker on the bracket, adjust it to your desired angle and tighten the screw.

FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any inte rference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interferenceto radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

INWA®
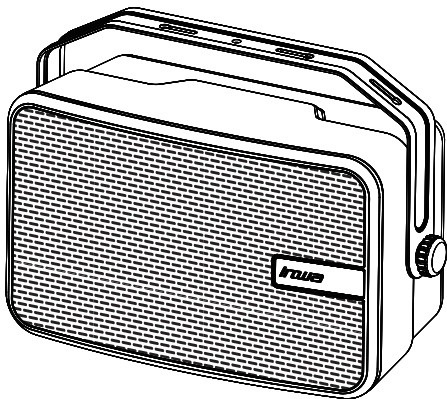
MZ-622

蓝 牙 壁 挂 音 箱

Inwa®

MZ-622

蓝牙壁挂音箱

感谢您购买此产品。 在使用无线音箱之前，请阅读所有安全信息和操作说明。

安全守则

- 请阅读并遵循本说明。
- 请在室温下保存或使用。
- 请勿在热源附近使用本产品，如散热器、焙调节器、火炉或其他发热仪器（包括放大器）。
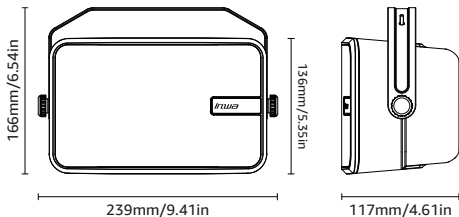- 各类故障均应由专业维修人员进行维修，擅自拆卸将导致保修失效。

包装内容

| 音箱 X 2 | 遥控器 | 说明书 | 电源适配器 | 5米 RCA线 | 塑料膨胀钉 | 螺丝钉 |

产品描述

166mm/6.54in
136mm/5.35in
239mm/9.41in
117mm/4.61in

控制面板和界面

⏻ 开关键：短按开关机

EQ 音效键：短按切换音乐/新闻模式

▶‖ 播放/暂停键：短按播放暂停

|◀ 上一曲：短按上一曲

▶| 下一曲：短按下一曲

◀» 音量+：短按增加音量

◀» 音量−：短按降低音量

M 模式键：短按BT/AUX输入功能切换

✳ 蓝牙配对键：短按进入蓝牙配对状态

🔇 功放静音键：单击静音

▶ 产品参数

蓝牙版本:	5.2
无线距离:	≤15M
输入电压:	DC 19V
输出功率:	40W
失真度:	< 1%
频率响应:	20Hz-20KHz
信噪比:	>90dB
防水等级:	IPX5

▶ 操作指令

1. 蓝牙连接:
短按开关键 ⏻ 打开音箱电源，有开机提示音，蓝灯快闪，在手机蓝牙中搜索并连接"MZ-622"。配对成功后蓝灯长亮，播放音乐时蓝灯长亮。

蓝灯长亮

距离≤15米
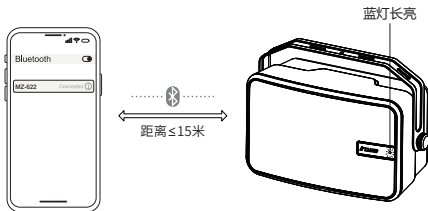
2. 音箱与新设备连接：

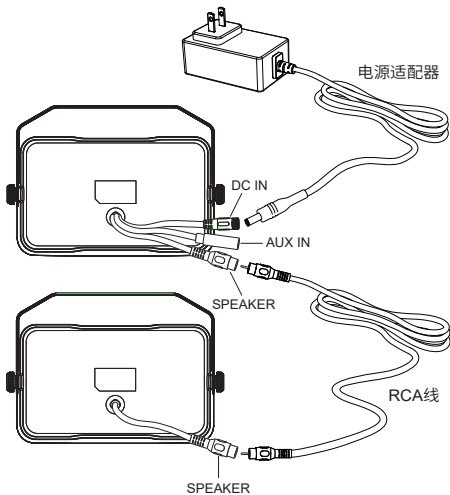音箱连接新设备时，将遥控器对准音箱并短按蓝牙配对键 ✱ 以切断当前连接，蓝灯快闪，即可连接新设备。

蓝灯快闪

3. 模式切换：

音箱在AUX端口插入3.5mm音频线时，短按遥控器上的模式键 M 以切换AUX模式，红灯长亮。播放音乐时红灯长亮。

红灯长亮

AUX

音频设备

连接方式

电源适配器

DC IN

AUX IN

SPEAKER

RCA线

SPEAKER
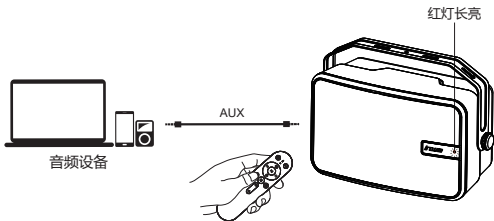
安装步骤

注意
1.安装前请确认音箱能正常工作。
2.图A中的工具不包括在内。

步骤1
从产品上拆下支架，按照间距在墙上钻两个安装孔（见图A）。

步骤2
使用附件中的螺钉将支架拧入墙壁上的安装孔。

步骤3
将音箱安装在支架上，将其调整到您想要的角度并拧紧螺丝。

▶ Support Information

Need further help, you can contact us by:
A. Service Email: inwa_support@innosystemtech.com
B. Or Scan the QR code for quick contact.

C. Or Contact us on Amazon:
1. Go to Your Orders.
2. Find your order.
3. Select "Problem with order."
4. Choose your topic, then select "Contact seller."

S/N: MP202501
Model number: MZ-622
Brand Name: Inwa
Manufacture: hunanshenchangdeshitaoyuanxianzhangjiangjie
daoguanjiapingshequyanxidonglu1haohuidechanyeyuan
Email: innosystemtech@outlook.com