



TESTING LABORATORY  
CERTIFICATE #4820.01



## FCC PART 15.249

### TEST REPORT

For

**NEWEST ONE TECH Co., Ltd**

A-607, 908, 910 DAEWOO TECHNO PARK, 261 DOYAK-RO WONMI-GU, BUCHEON, Gyeonggi,  
Korea 14523

**FCC ID: 2AT7URM-02**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Radar Object Detection Sensor
<b>Report Number:</b>	<u>RGZ191227002-00</u>
<b>Report Date:</b>	<u>2020-02-24</u>
<b>Reviewed By:</b>	Ivan Cao Assistant Manager
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY .....	4
DECLARATIONS.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
ANTENNA CONNECTOR CONSTRUCTION .....	7
<b>FCC§15.205, §15.209&amp;§15.249- RADIATED EMISSIONS .....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
EUT SETUP .....	8
TEST EQUIPMENT SETUP .....	10
TEST PROCEDURE .....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA .....	11
<b>FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA .....	23

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Radar Object Detection Sensor
<b>Test Model:</b>	RM-02
<b>Multiple Models:</b>	RM-02-F, RODS-M, RODS-M-F, RODS-XX, RODS-X-X
<b>Operation Frequency:</b>	24150 MHz
<b>Modulation Type:</b>	FMCW
<b>Rated Input Voltage:</b>	DC 12~32V from system
<b>Serial Number:</b>	RGZ191227002-RF-S1(for firmware 1) RGZ191227002-RF-S2(for firmware 2)
<b>EUT Received Date:</b>	2020.01.03
<b>EUT Received Status:</b>	Good

*Note: each model have two different firmware, both firmware were provided sample to test respectively.*

### Objective

This type approval report is prepared on behalf of **NEWEST ONE TECH Co., Ltd** in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

### Related Submittal(s)/Grant(s)

N/A.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “ $\Delta$ ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured in swept mode for testing which was provided by the manufacturer.

### EUT Exercise Software

No software was used in test.

### Equipment Modifications

No modifications were made to the EUT.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Pro instrument	DC Power Supply	pps3300	3300012

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Power Cable	No	No	3	DC Power Supply	EUT

### Block Diagram of Test Setup

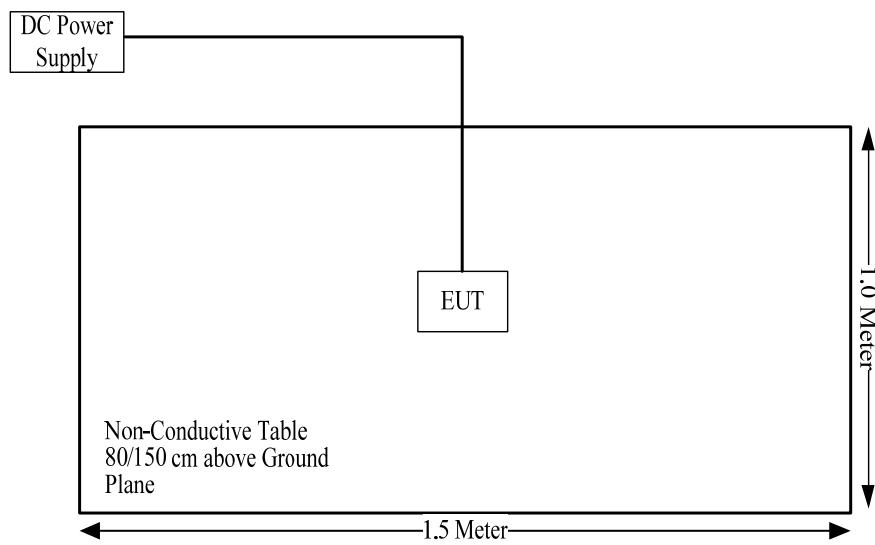

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Not Applicable: the device powered by DC of vehicle.

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement, and the antenna gain is 14 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.

## FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

### Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### EUT Setup


Below 1 GHz:

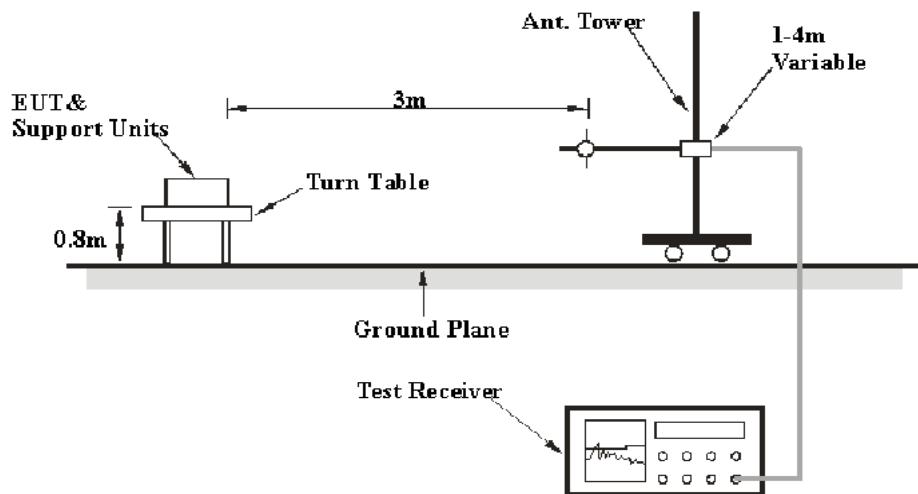

1-26.5 GHz:

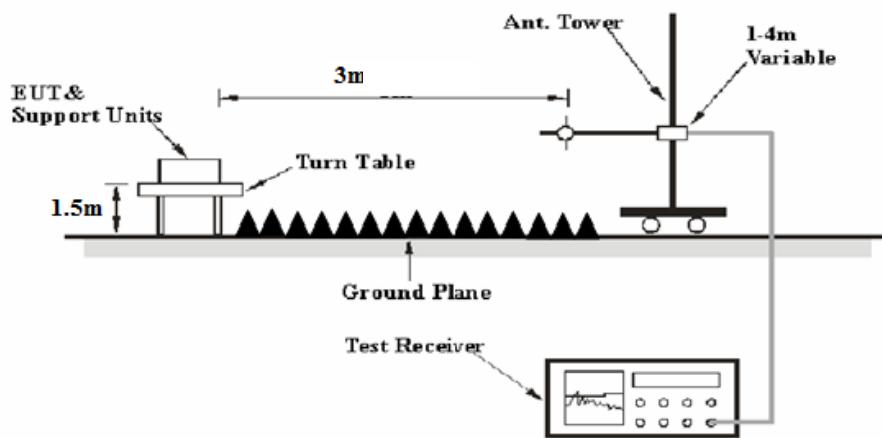

26.5-40 GHz:

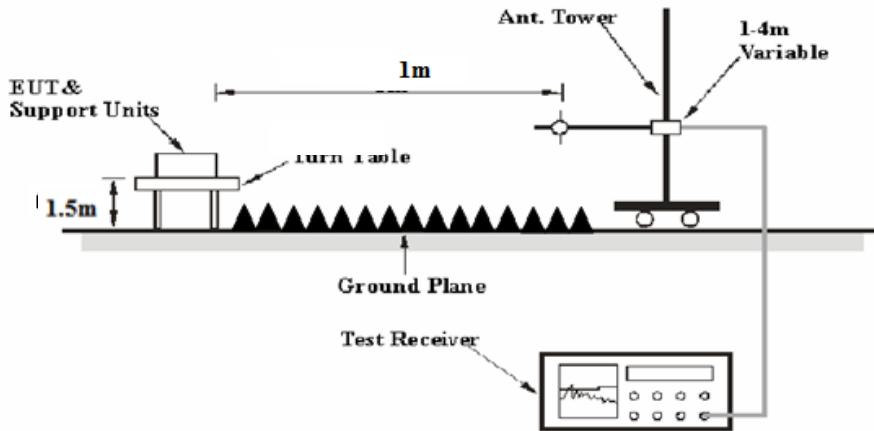

The radiated emission tests were performed in the 3 meters Chamber A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

According to C63.10, the 26.5- 100GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$  dB

Extrapolation result = Corrected Amplitude (dB $\mu$ V/m) - distance extrapolation factor (9.54dB)

For above 40GHz, external harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1m from the EUT for 40-60GHz, and 0.5m for 60-140GHz. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

## Test Equipment Setup

The system was investigated from 30 MHz to 140 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Or

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2020-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-24	2020-09-24
Sonoma	Amplifier	310N	185914	2019-10-13	2020-10-13
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
R&S	Spectrum Analyzer	8564E	3943A01781	2019-03-02	2020-03-02
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2019-09-05	2020-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2017-12-06	2020-12-05
OML	Harmonic Mixer	WR19/M19HWD	U60313-1	2019-10-14	2022-10-14
OML	Horn Antenna	M19RH	11648-01	2019-10-14	2022-10-14
OML	Harmonic Mixer	WR12/M12HWD	E60120-1	2019-10-19	2022-10-19
OML	Horn Antenna	M12RH	E60120-2	2019-10-19	2022-10-19
OML	Harmonic Mixer	WR08/M08HWD	F60313-1	2019-10-24	2022-10-24
OML	Horn Antenna	M08RH	F60313-2	2019-10-24	2022-10-24
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27


\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data


### Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
<b>Temperature:</b>	24.3 °C	27.3°C
<b>Relative Humidity:</b>	43%	56 %
<b>ATM Pressure:</b>	100.8 kPa	100.8 kPa
<b>Tester:</b>	Jackson Zhang	Vern Shen
<b>Test Date:</b>	2020-01-15	2020-02-17

*Test Mode: Transmitting*

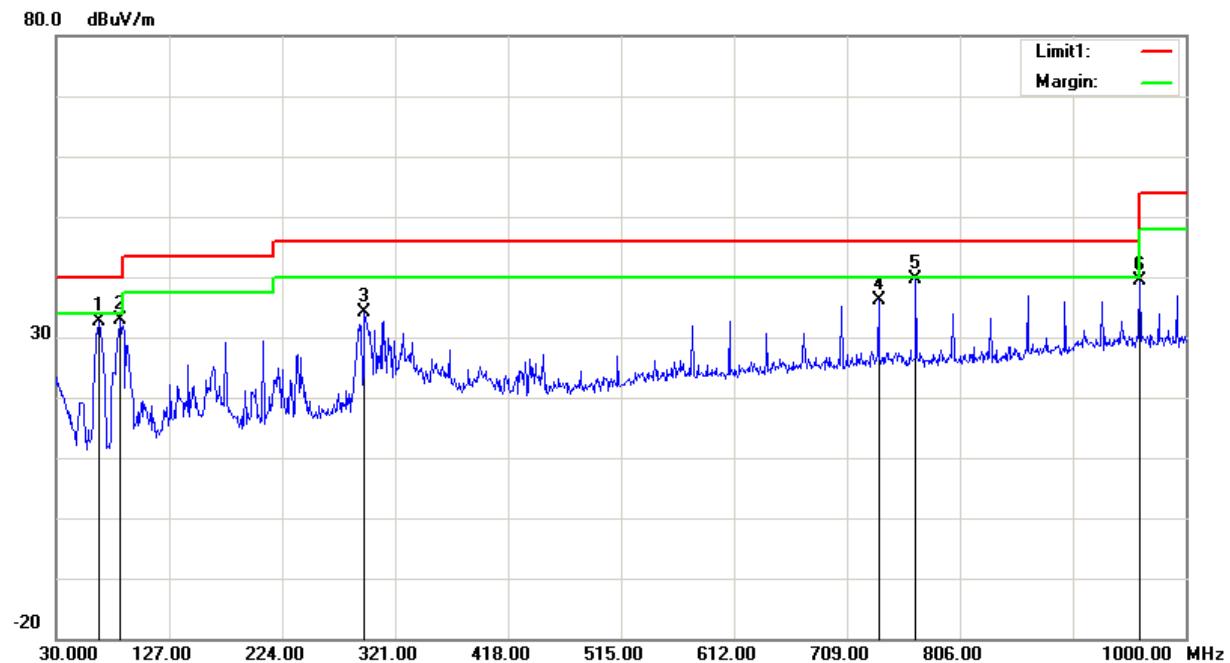**Firmware 1:****1) 30MHz-1GHz:****Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
66.8600	49.14	peak	-16.61	32.53	40.00	7.47
85.2900	48.52	peak	-15.55	32.97	40.00	7.03
294.8100	41.88	peak	-7.73	34.15	46.00	11.85
736.1600	35.38	peak	0.78	36.16	46.00	9.84
768.1700	38.47	peak	1.08	39.55	46.00	6.45
960.2300	34.57	peak	4.75	39.32	54.00	14.68

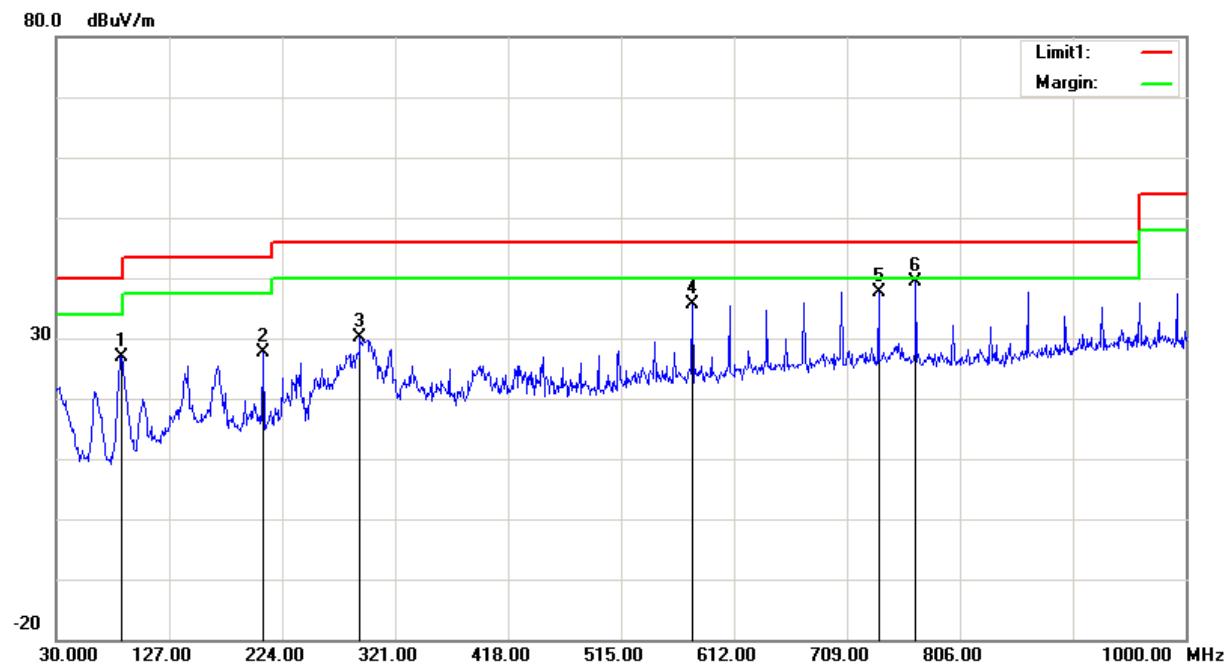**Vertical:**

Frequency (MHz)	Receiver Reading (dB <sub>uV</sub> )	Detector	Correction Factor (dB/m)	Cord. Amp. (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)
86.2600	42.47	peak	-15.49	26.98	40.00	13.02
207.5100	38.56	peak	-10.95	27.61	43.50	15.89
290.9300	38.04	peak	-8.00	30.04	46.00	15.96
576.1100	37.04	peak	-1.45	35.59	46.00	10.41
736.1600	36.91	peak	0.78	37.69	46.00	8.31
768.1700	38.36	peak	1.08	39.44	46.00	6.56


## 2) 1GHz-40GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)					
24150.00	104.71	PK	H	35.50	10.96	37.12	114.05	127.96	13.91
24150.00	93.26	AV	H	35.50	10.96	37.12	102.60	107.96	5.36
24150.00	90.15	PK	V	35.50	10.96	37.12	99.49	127.96	28.47
24150.00	76.90	AV	V	35.50	10.96	37.12	86.24	107.96	21.72
24000.00	54.74	PK	H	35.50	10.87	37.40	63.71	74.00	10.29
24000.00	31.89	AV	H	35.50	10.87	37.40	40.86	54.00	13.14
24250.00	46.87	PK	H	35.50	11.02	36.94	56.45	74.00	17.55
24250.00	31.99	AV	H	35.50	11.02	36.94	41.57	54.00	12.43
1510.00	47.25	PK	H	25.24	1.76	25.75	48.50	74.00	25.50
1510.00	40.24	AV	H	25.24	1.76	25.75	41.49	54.00	12.51
4515.00	37.83	PK	H	32.33	3.02	25.72	47.46	74.00	26.54
4515.00	30.14	AV	H	32.33	3.02	25.72	39.77	54.00	14.23


## 3) 40GHz-140GHz:

Frequency (GHz)	Receiver		Rx Antenna		Corrected Amplitude (dB $\mu$ V/m)	Extrapolation result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)				
56.70	38.1	PK	H	41.4	79.5	69.96	74	4.04
56.70	19.7	AV	H	41.4	61.1	51.56	54	2.44
90.00	36.37	PK	H	45.11	81.48	65.92	74	8.08
90.00	20.7	AV	H	45.11	65.81	50.25	54	3.75

Note:1. for the range 40-60GHz, the test performed at the distance 1m. for the range 60-100GHz, the test performed at the distance 0.5m.

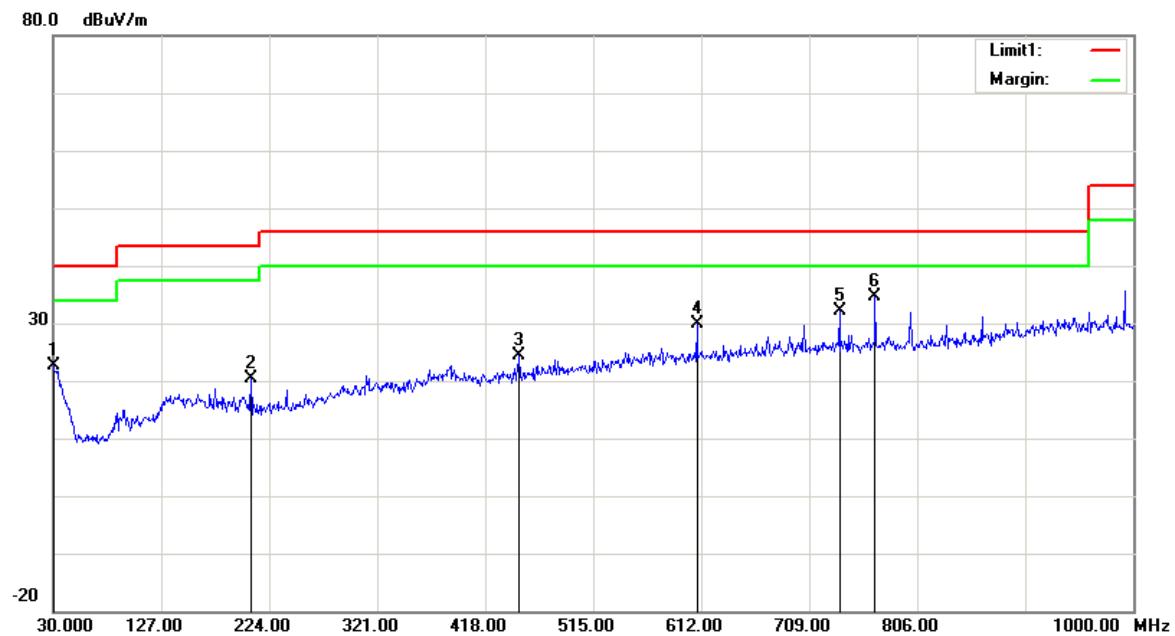**Firmware 2:****1) 30MHz-1GHz:****Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	26.87	peak	-4.33	22.54	40.00	17.46
207.5100	31.38	peak	-10.95	20.43	43.50	23.07
448.0700	28.79	peak	-4.37	24.42	46.00	21.58
608.1200	30.98	peak	-1.06	29.92	46.00	16.08
736.1600	31.28	peak	0.78	32.06	46.00	13.94
768.1700	33.51	peak	1.08	34.59	46.00	11.41

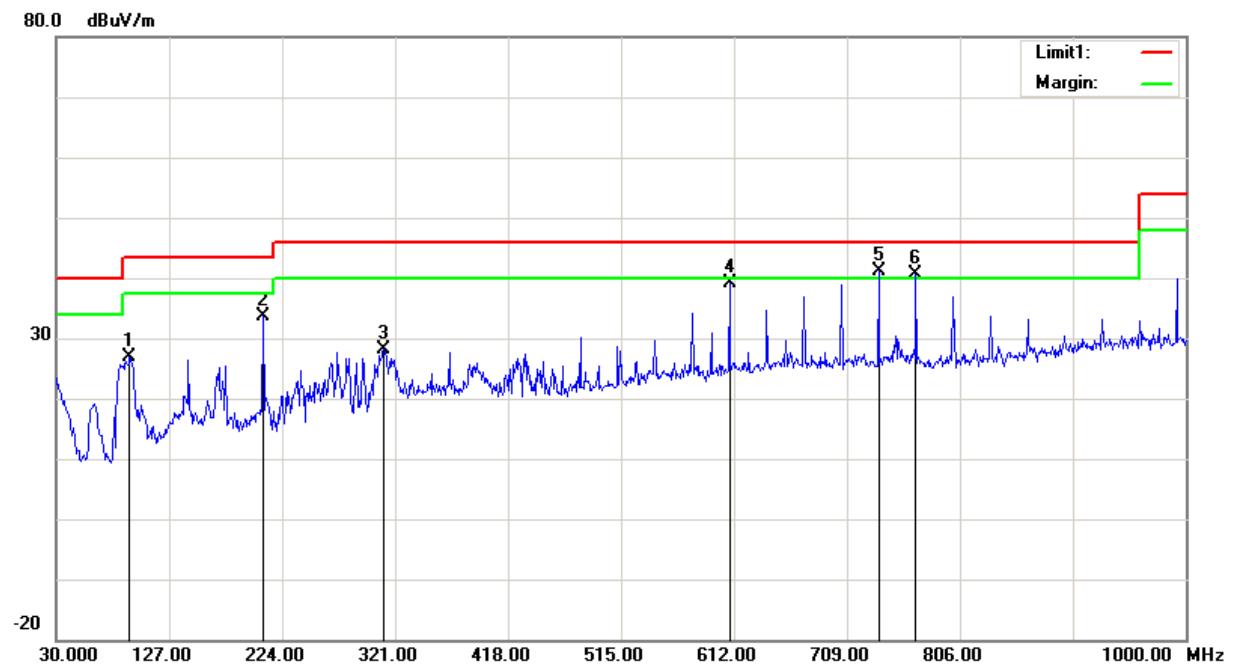**Vertical:**

Frequency (MHz)	Receiver Reading (dB <sub>uV</sub> )	Detector	Correction Factor (dB/m)	Cord. Amp. (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)
93.0500	41.94	peak	-14.99	26.95	43.50	16.55
207.5100	44.58	peak	-10.95	33.63	43.50	9.87
311.3000	35.07	peak	-7.06	28.01	46.00	17.99
608.1200	40.24	peak	-1.06	39.18	46.00	6.82
736.1600	40.46	QP	0.78	41.24	46.00	4.76
768.1700	39.43	QP	1.08	40.51	46.00	5.49


## 2) 1GHz-40GHz:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)					
24150.00	101.32	PK	H	35.50	10.96	37.12	110.66	127.96	17.30
24150.00	90.15	AV	H	35.50	10.96	37.12	99.49	107.96	8.47
24150.00	88.70	PK	V	35.50	10.96	37.12	98.04	127.96	29.92
24150.00	75.37	AV	V	35.50	10.96	37.12	84.71	107.96	23.25
24000.00	51.42	PK	H	35.50	10.87	37.40	60.39	74.00	13.61
24000.00	31.71	AV	H	35.50	10.87	37.40	40.68	54.00	13.32
24250.00	53.42	PK	H	35.50	11.02	36.94	63.00	74.00	11.00
24250.00	33.96	AV	H	35.50	11.02	36.94	43.54	54.00	10.46
1510.00	46.70	PK	H	25.24	1.76	25.75	47.95	74.00	26.05
1510.00	41.10	AV	H	25.24	1.76	25.75	42.35	54.00	11.65
4515.00	38.57	PK	H	32.33	3.02	25.72	48.20	74.00	25.80
4515.00	30.70	AV	H	32.33	3.02	25.72	40.33	54.00	13.67


## 3) 40GHz-100GHz:

Frequency (GHz)	Receiver		Rx Antenna		Corrected Amplitude (dB $\mu$ V/m)	Extrapolation result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)				
55.57	35.7	PK	H	41.22	76.92	67.38	74	6.62
55.57	18.7	AV	H	41.22	59.92	50.38	54	3.62
89.20	35.4	PK	H	45.01	80.41	70.87	74	3.13
89.20	16.87	AV	H	45.01	61.88	52.34	54	1.66

Note:1. for the range 40-60GHz, the test performed at the distance 1m. for the range 60-100GHz, the test performed at the distance 0.5m.


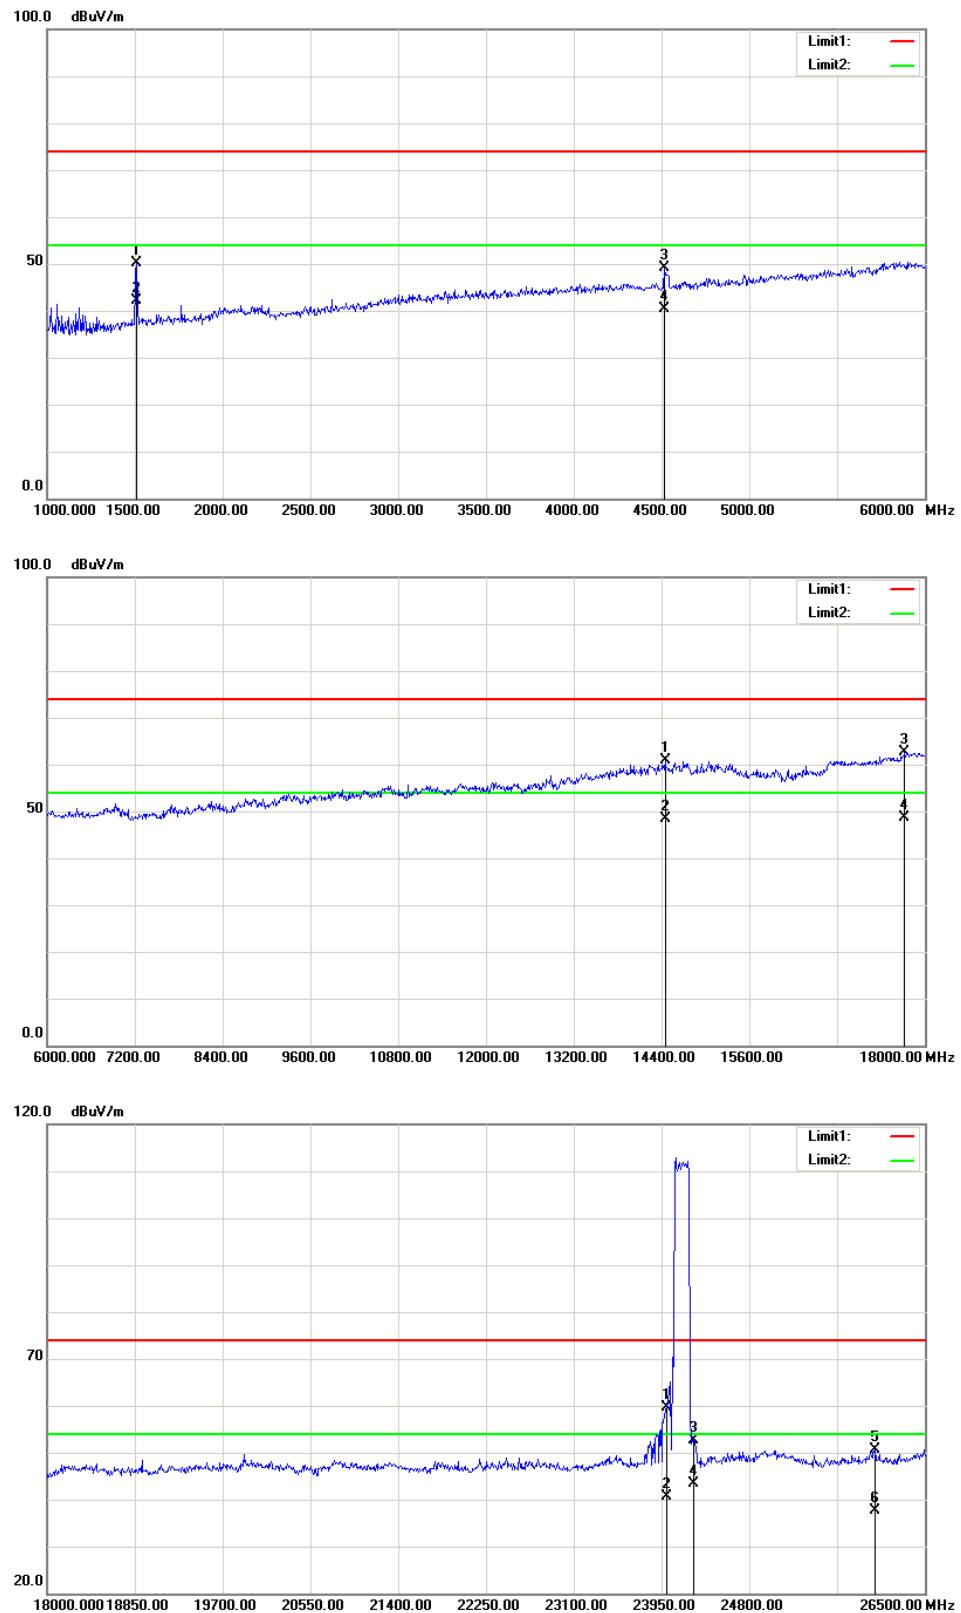
**Test Plots for above 1GHz(Firmware 2 was the worst)**

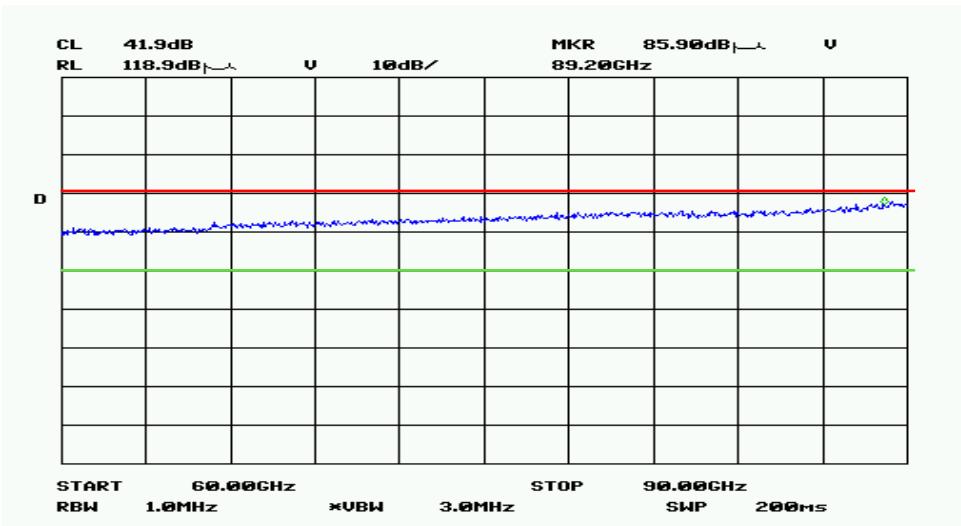
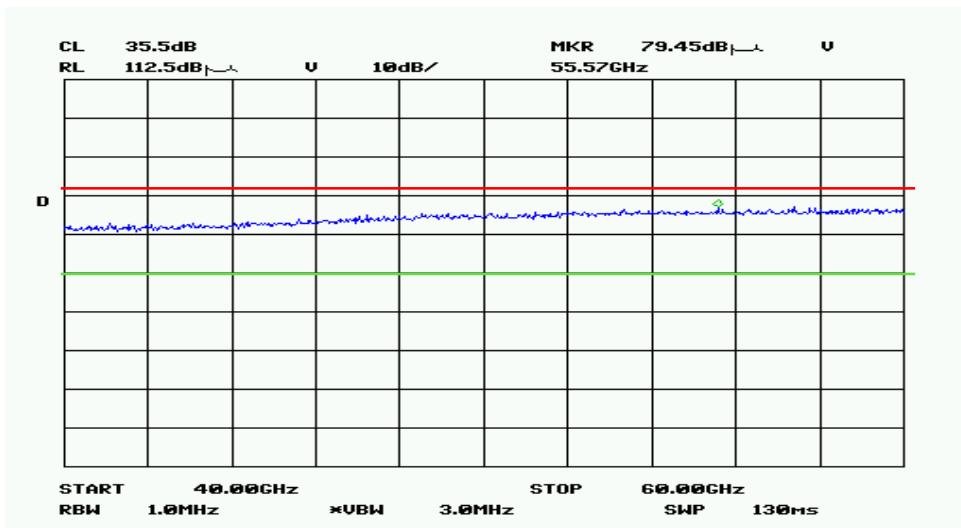
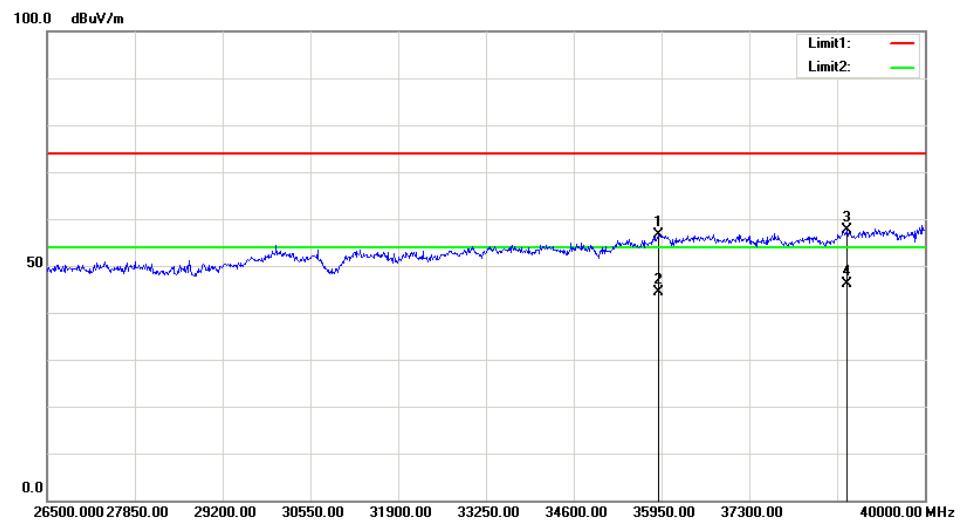



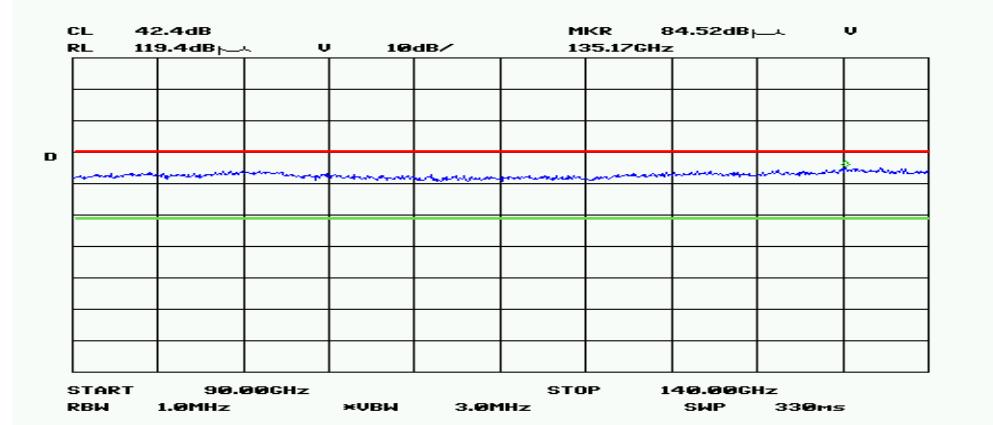


Note: the plots above 40GHz have not add the Extrapolation factor

### Vertical

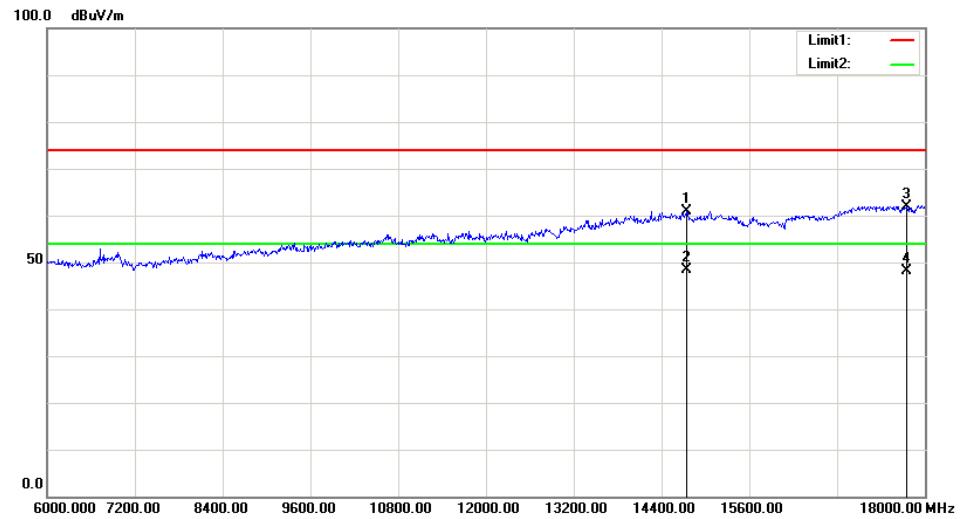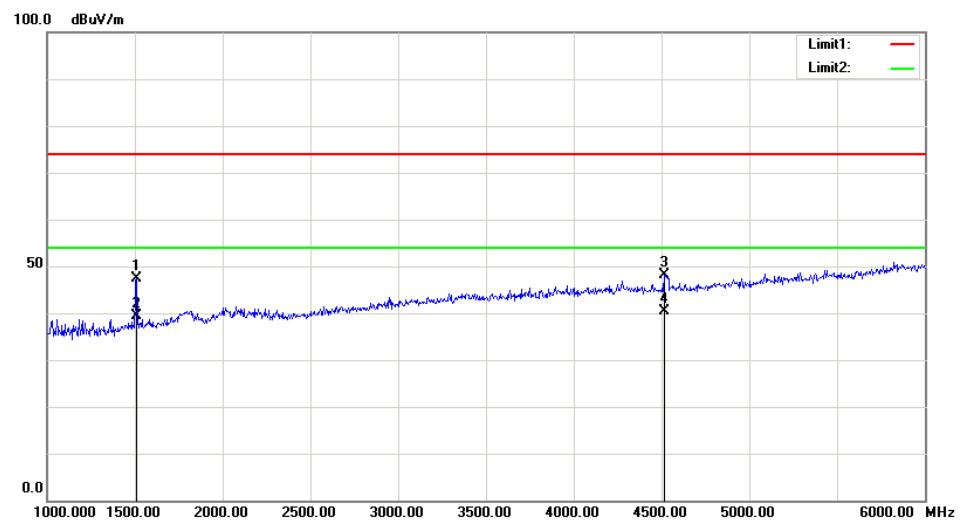

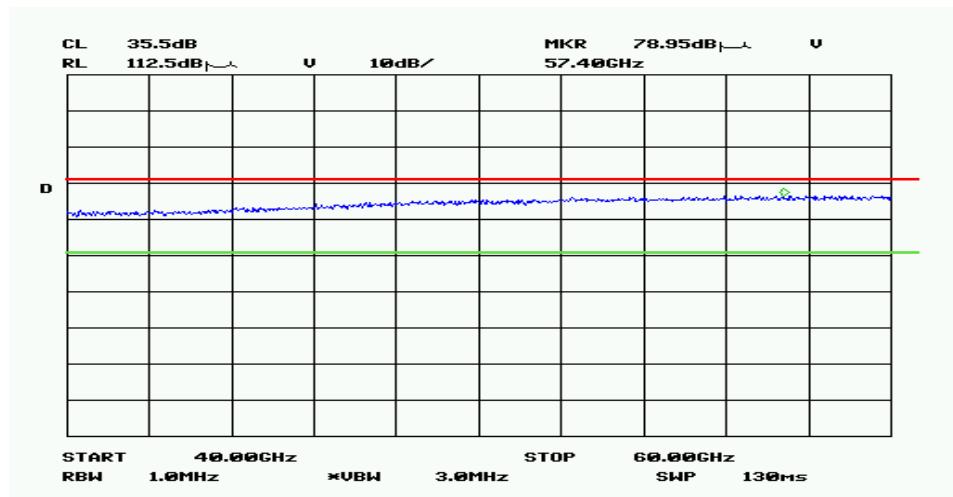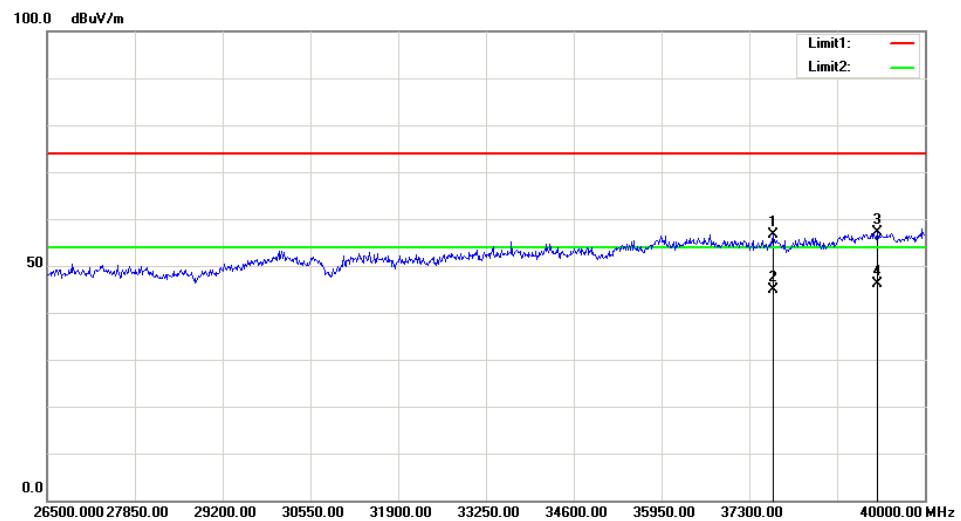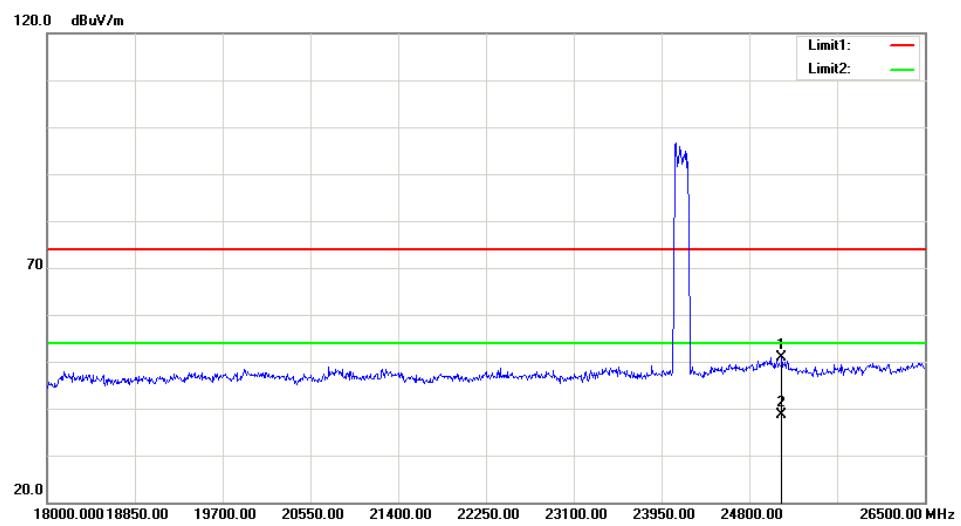

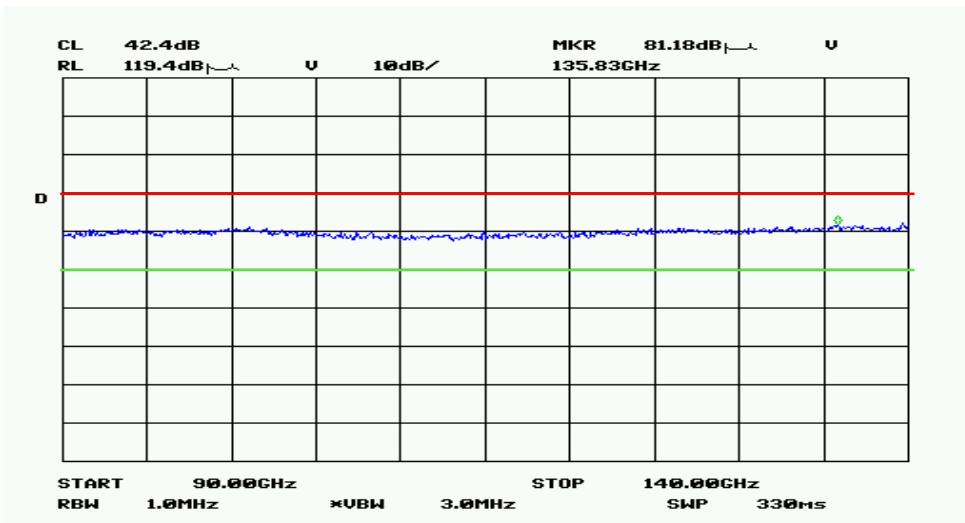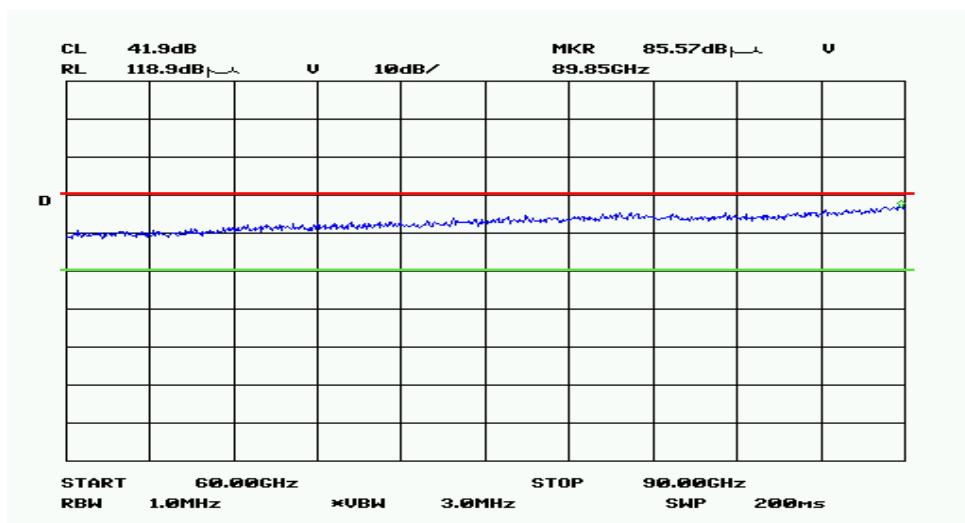

*Note: the plots above 40GHz have not add the Extrapolation factor*

## FCC §15.215(c) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-01-09	2021-01-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	28.1 °C
Relative Humidity:	60%
ATM Pressure:	100.4 kPa
Tester:	Sun Zhong
Test Date:	2020-01-20

**Test Result:** Compliant.


Please refer to following tables and plots

*Test Mode: Transmitting*

Firmware	Frequency (MHz)	20 dB Bandwidth (MHz)
1	24150	172.36
2	24150	139.80

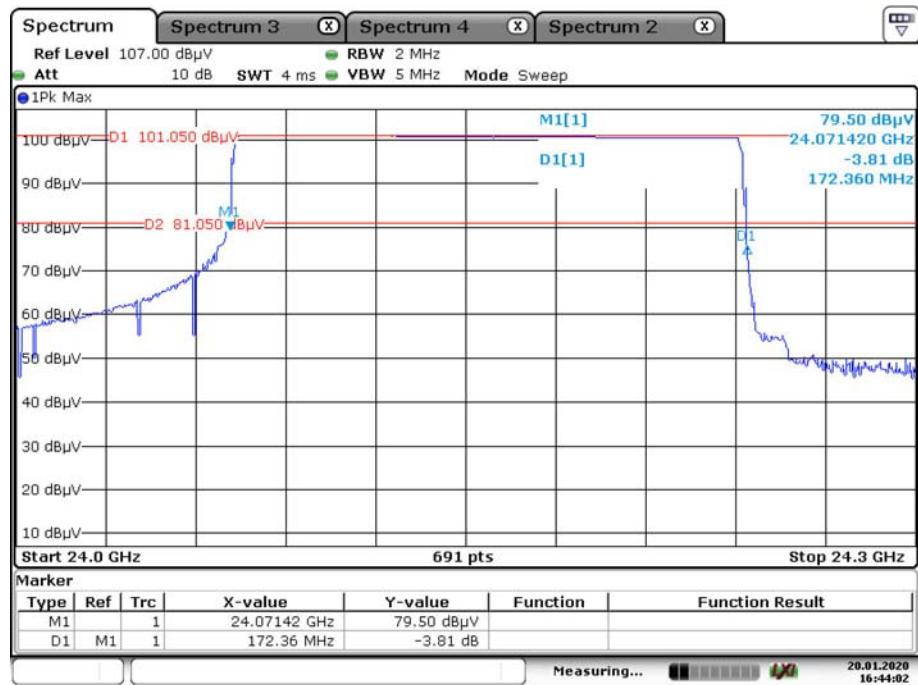**Firmware 1**

Date: 20.JAN.2020 16:44:02

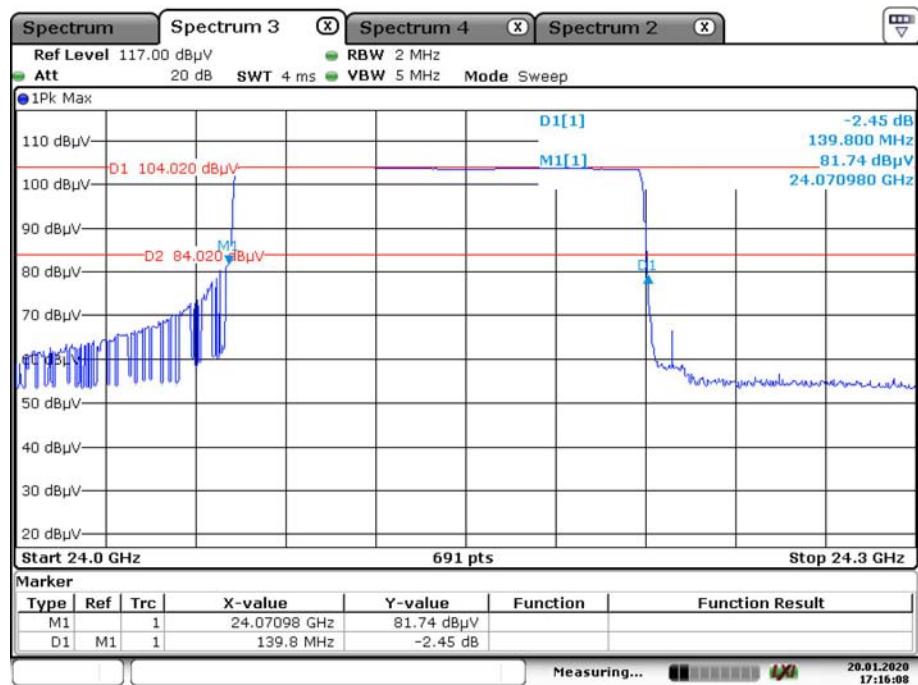**Firmware 2**

Date: 20.JAN.2020 17:16:08

**\*\*\*\*\* END OF REPORT \*\*\*\*\***