

Certificate of Test

NCT Co., Ltd.

211-71, Geumgok-ro, Hwaseong-si,
Gyeonggi-do, 18511, Korea
(Tel: +82-31-323-6070 / Fax: +82-31-323-6071)

Report No.:
NW2004-F002

Page (1) / (78)



1. Client

- Name : T&F Global Co., Ltd.
- Address : 604, 303DONG, 397, SEOKCHEON-RO OJEONG-GU, GYEONGGI-DO, KOREA
(303-604, BUCHEON TECHNO PARK SSANGYONG 3CHA, 397, Seokcheon-ro, Bucheon-si, Gyeonggi-do, Korea)
- Date of Receipt : 2020-03-27

2. Use of Report : FCC & IC Approval

3. Test Sample

- Description / Model Name : Rear Seat Entertainment / RSE
- FCC ID : 2AT7Y-RSE / IC : 26002-RSE

4. Date of Test : 2020-03-27 ~ 2020-04-07

5. Test method used : FCC Part 15 Subpart C 15.247

RSS-247 Issue 2(2017-02), RSS-GEN Issue 5(2019-03)

6. Testing Environment :

- Temperature: $(25 \pm 5) ^\circ\text{C}$, Humidity: Less than 75 % R.H.
* Unless specified otherwise in the individual methods, the tests were conducted on ambient conditions.

7. Test Results : Refer to the test results

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This Test Report cannot be reproduced, except in full
This test report is prepared according to the requirements of ISO / IEC 17025.

Affirmation	Tested by Jong-Myoung, Shin	 (signature)	Technical Manager Kyung-Taek, Lee	 (signature)
-------------	---------------------------------------	--	---	--

April 20, 2020

NCT CO., LTD.



Table of contents

1. General Information -----	3
2. Information's about Test Item -----	3
3. Test Report -----	5
3.1 Test Summary -----	5
3.2 Test Report Version -----	6
3.3 Transmitter Requirements	
3.3.1 Antenna Requirement -----	7
3.3.2 6 dB Bandwidth & Occupied Bandwidth -----	8
3.3.3 Maximum Conducted Output Power -----	20
3.3.4 Peak Power Spectral Density -----	27
3.3.5 TX Radiated Spurious Emission and Conducted Spurious Emission -----	33
3.3.6 Conducted Emission -----	70

APPENDIX

APPENDIX I TEST SETUP -----	71
APPENDIX II TEST EQUIPMENT USED FOR TESTS -----	73
APPENDIX III DUTY CYCLE CORRECTION FACTOR -----	75



1. General Information's

1.1 Test Performed

Laboratory : NCT Co., Ltd.
Address : 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, 18511, Korea
Telephone : +82-31-323-6070
Facsimile : +82-31-323-6071
FCC Designation No. : KR0166
FCC Registration Number : 409631
IC Site Registration No. : 25897

2. Information's about Test Item

2.1 Applicant Information

Company name : T&F Global Co., Ltd.
Address : 604, 303DONG, 397, SEOKCHEON-RO OJEONG-GU, GYEONGGI-DO, KOREA
(303-604, BUCHEON TECHNO PARK SSANGYONG 3CHA, 397, Seokcheon-ro,
Bucheon-si, Gyeonggi-do, Korea)
Telephone / Facsimile : +82-2-855-0501 / +82-2-855-0580

2.2 Equipment Under Test (EUT) description

Test item particulars : Rear Seat Entertainment
Model and/or type reference : RSE
Additional model name : -
Serial number : Identification
Antenna type and gain : Chip Antenna with Max gain :1.88 dB
Date (s) of performance of tests: : 2020-03-27 ~ 2020-04-07
Date of receipt of test item : 2020-03-27
EUT condition : Pre-production, not damaged
Number of channel : 11 for 802.11b/g/n_HT20
EUT Power Source : DC 12 V
Type of Modulation : OFDM
Firmware version : RSE_US_K101_1.0.0 for FCC
RSE_CA_K101_1.0.0 for IC
Hardware version : 1.0
Test software name(version) : TeraTerm(4.105)

Test Repot No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

2.3 Tested Frequency

Test Mode	Test frequency (MHz)		
	Low frequency	Middle frequency	High frequency
802.11b	2 412	2 437	2 462
802.11g	2 412	2 437	2 462
802.11n_HT20	2 412	2 437	2 462

2.4 Transmitting Configuration of EUT

Test Mode	Data rate
802.11b	1 ~ 11 Mbps
802.11g	6 ~ 54 Mbps
802.11n_HT20	MCS 0 ~ 7

 Test Report No.: NW2004-F002

 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



3. Test Report

3.1 Test Summary

Applied	FCC Rule	IC Rule	Test Items	Test Condition	Result
<input checked="" type="checkbox"/>	15.203	-	Antenna Requirement	Conducted	C
<input checked="" type="checkbox"/>	15.247(a)	RSS-247 (5.2)	6 dB Bandwidth		C
<input checked="" type="checkbox"/>	-	RSS GEN (6.7)	Occupied Bandwidth (99%)		C
<input checked="" type="checkbox"/>	15.247(b)	RSS-247 (5.4)	Maximum Conducted Output Power		C
<input checked="" type="checkbox"/>	15.247(e)	RSS-247 (5.2)	Peak Power Spectral Density		C
<input checked="" type="checkbox"/>	15.247(d)	RSS-247 (5.5)	Conducted Spurious Emission		C
<input checked="" type="checkbox"/>	15.247(d) 15.205 & 15.209	RSS-247 (5.5) RSS-GEN (8.9 & 8.10)	Radiated Spurious Emission	Radiated	C ^{note2}
<input type="checkbox"/>	15.207	RSS-GEN (8.8)	Conducted Emissions	AC Line Conducted	NA ^{note3}

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: This test item was performed in each axis and the worst case data was reported.

Note 3: This product is only using DC power. So, AC conducted emission test has not been performed.

The sample was tested according to the following specification: ANSI C63.10:2013.

Compliance was determined by specification limits of the applicable standard according to customer requirements.

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Page 5 of 78



3.2 Test Report Version

Test Report No.	Date	Description
NW2004-F002	2020-04-20	Initial issue

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



3.3 Transmitter Requirements

3.3.1 Antenna Requirement

According to §15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to §15.247(b)(4) the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.1.1 Result

Complies

(The transmitter has a Chip Antenna. The directional peak gain of the antenna is 1.88 dBi.)

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Page 7 of 78



3.3.2 6 dB Bandwidth & Occupied Bandwidth

3.3.2.1 Test Setup

Refer to the APPENDIX I.

3.3.2.2 Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

3.3.2.3 Test Procedure

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = Max Hold.
5. Sweep = Auto
6. Allow the trace to stabilize.
7. Option 1 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2 - The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.



3.3.2.4 Test Result

Test Mode	Test Frequency	6 dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
802.11b	Low	8.09	12.02
	Middle	8.13	11.94
	High	8.13	11.94
802.11g	Low	16.36	16.83
	Middle	16.44	16.83
	High	16.43	16.75
802.11n_HT20	Low	17.42	18.11
	Middle	17.34	18.03
	High	17.53	17.87

 Test Report No.: NW2004-F002

 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.2.5 Test Plot

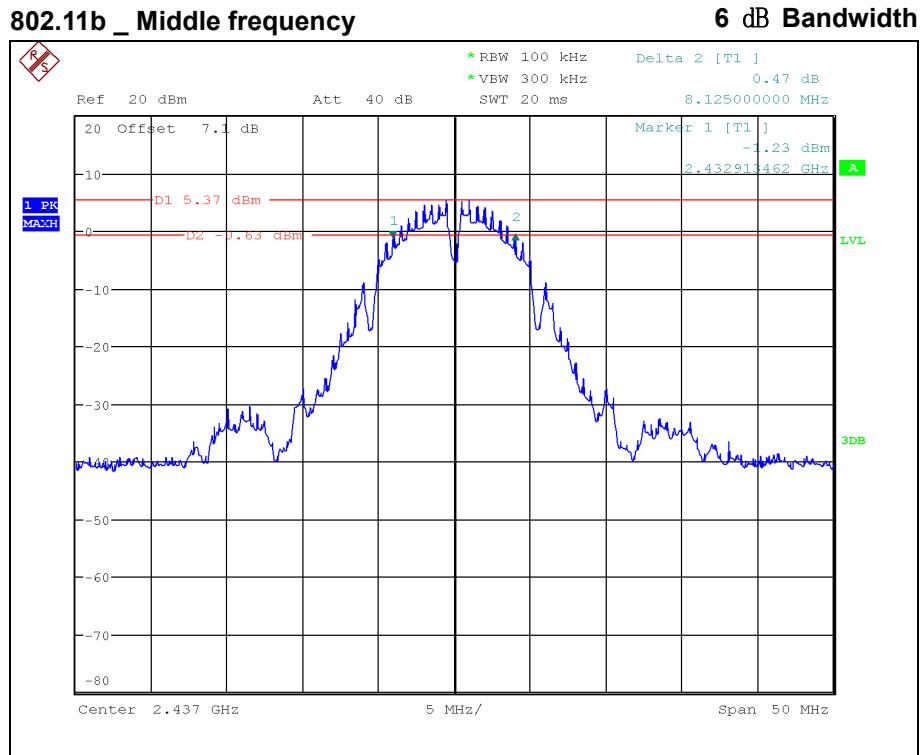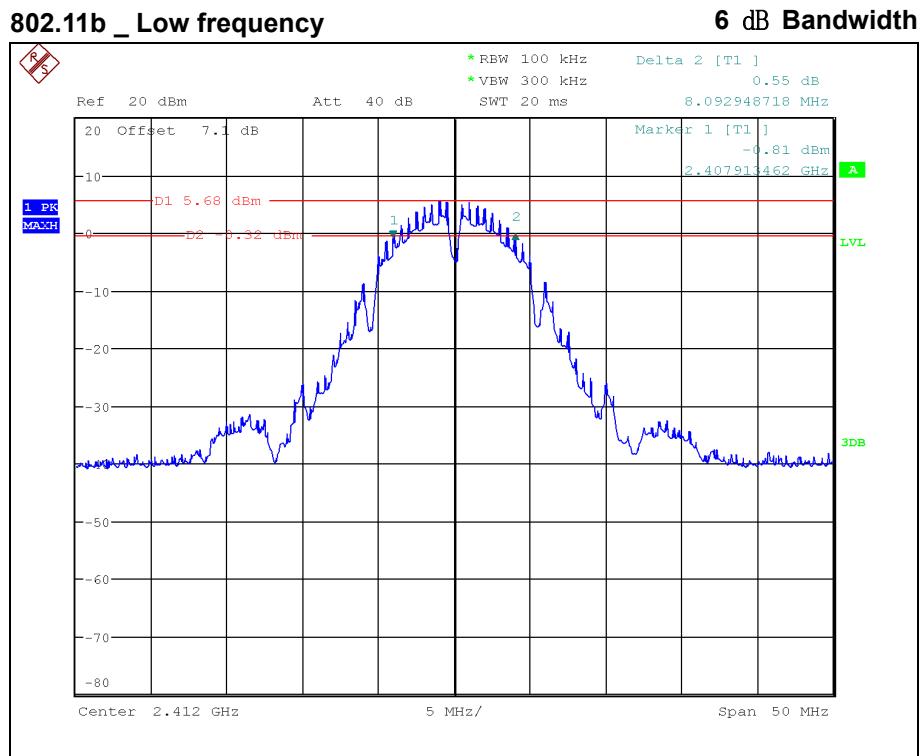


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ High frequency

6 dB Bandwidth

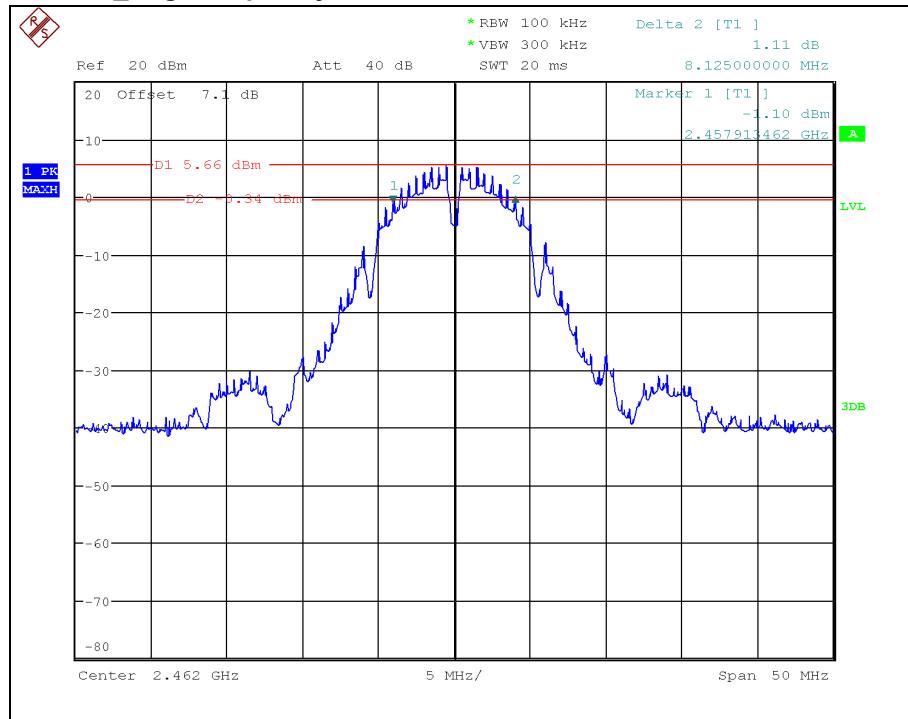

802.11g _ Low frequency

6 dB Bandwidth

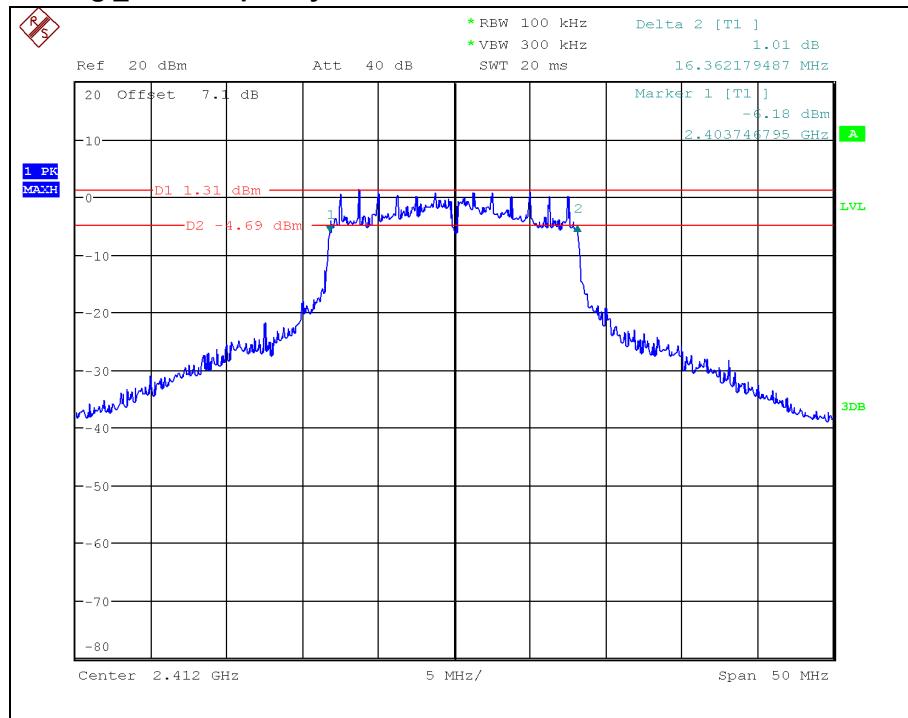


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Middle frequency

6 dB Bandwidth

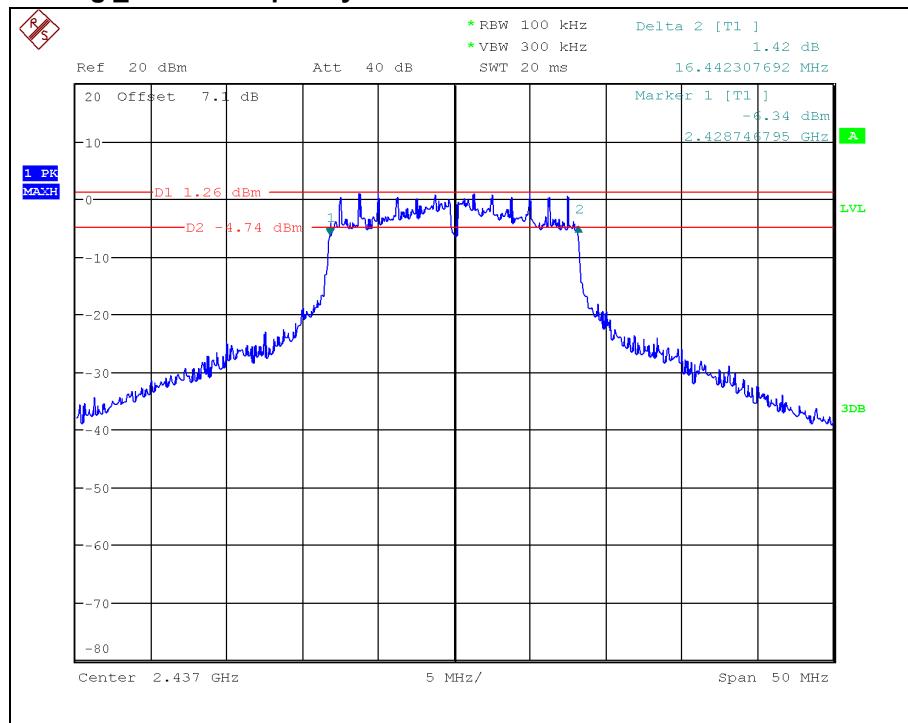

802.11g _ High frequency

6 dB Bandwidth

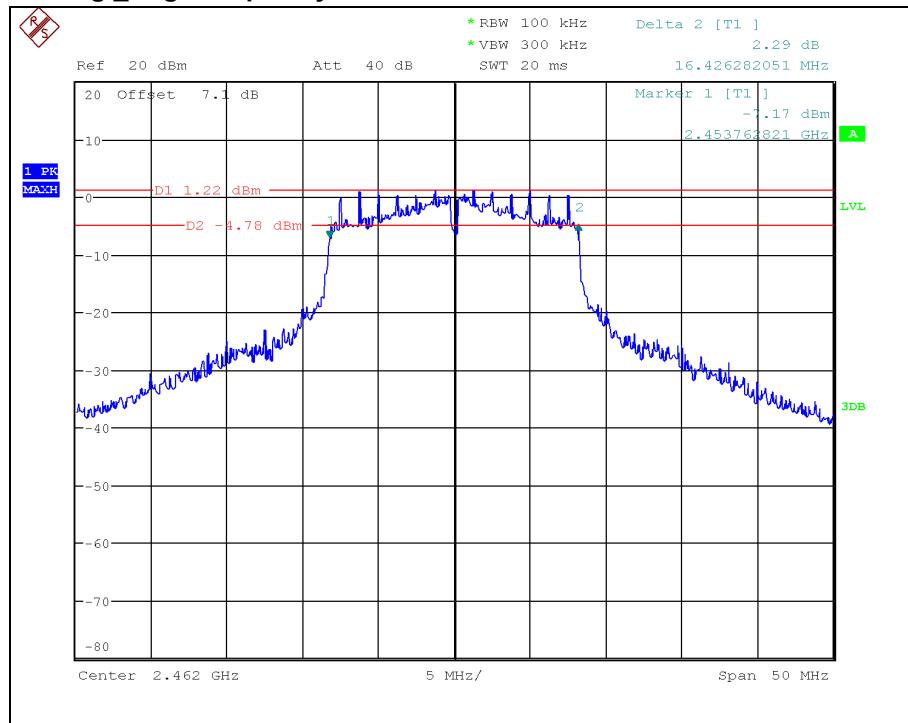


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

6 dB Bandwidth

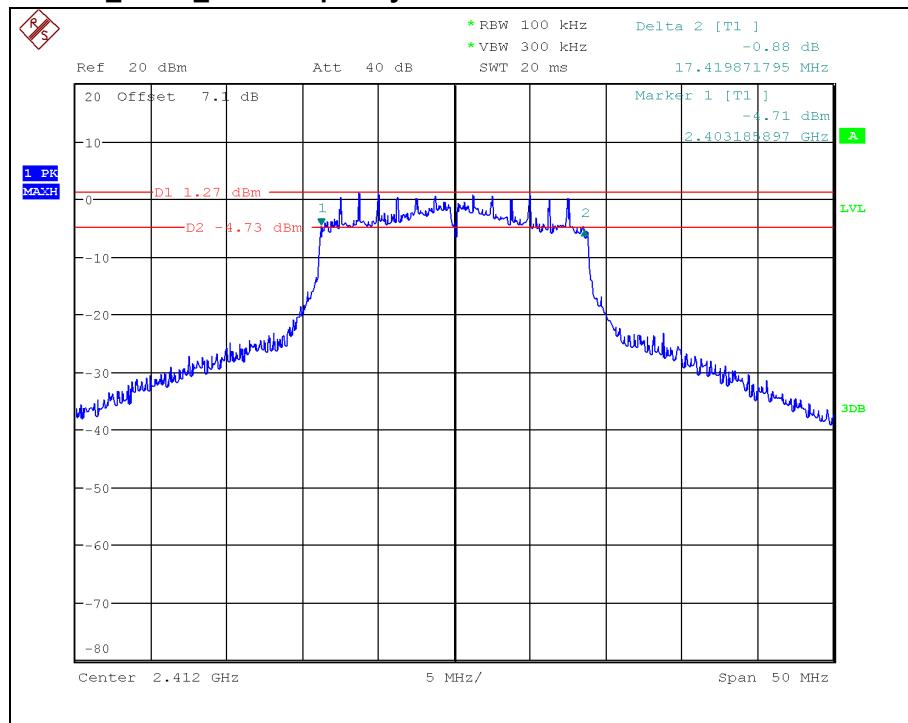

802.11n_HT20 _ Middle frequency

6 dB Bandwidth

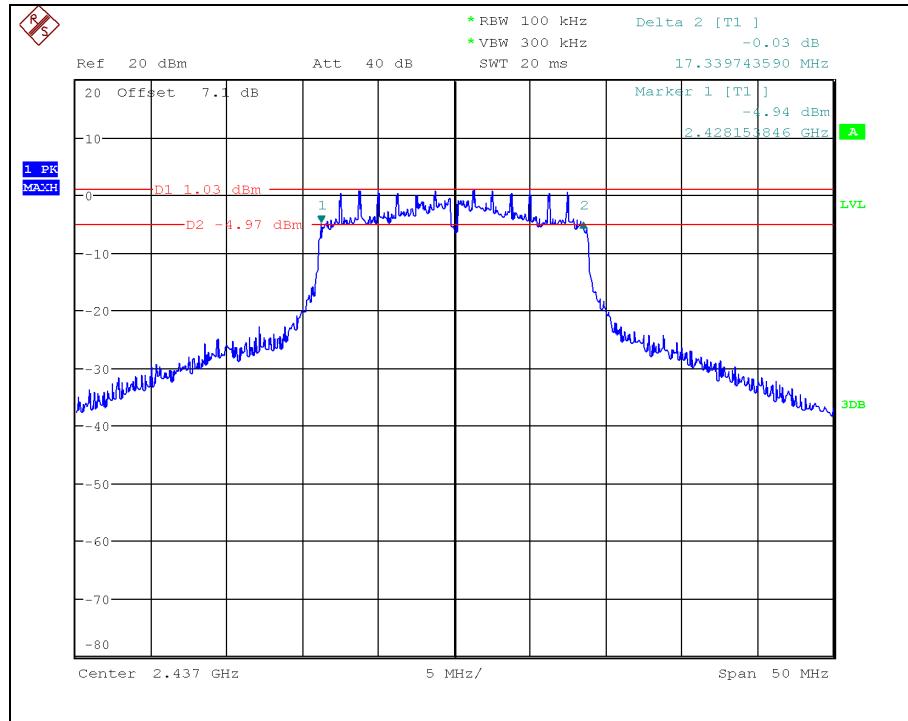


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20_High frequency

6 dB Bandwidth

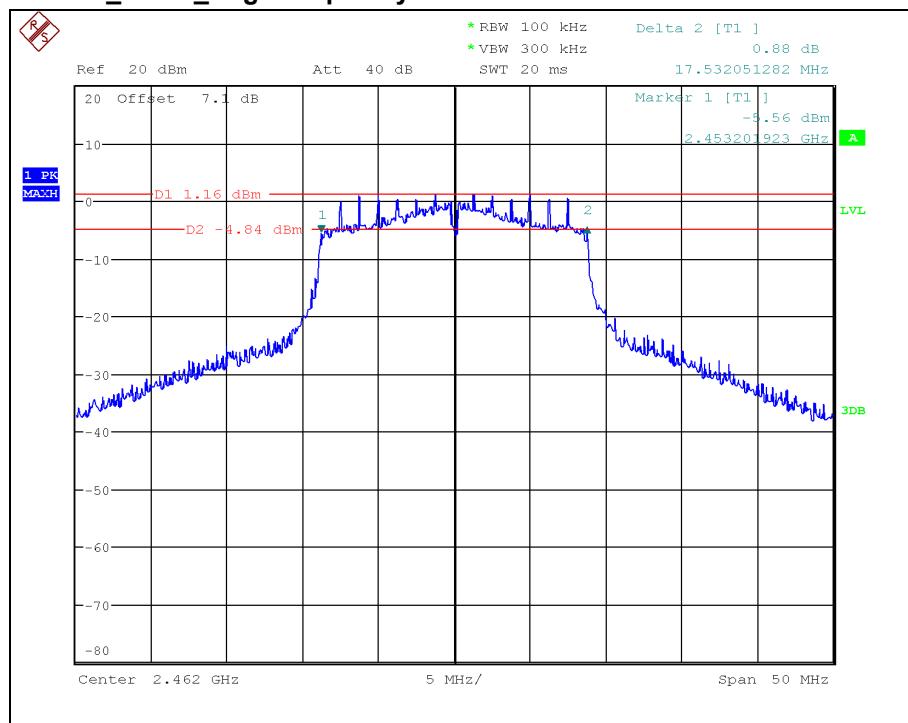


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ Low frequency

Occupied Bandwidth

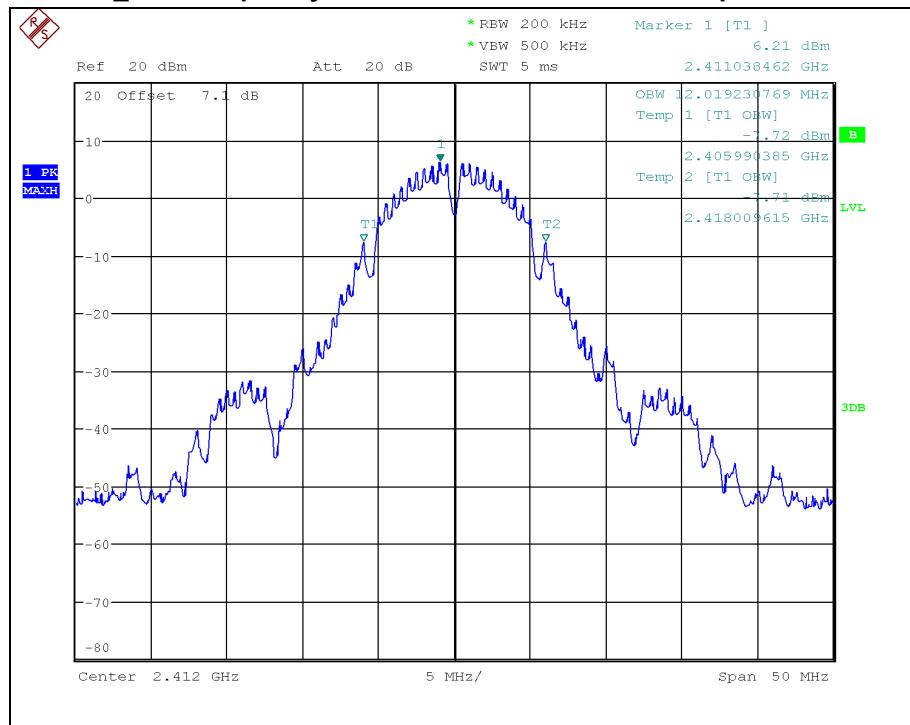

802.11b _ Middle frequency

Occupied Bandwidth

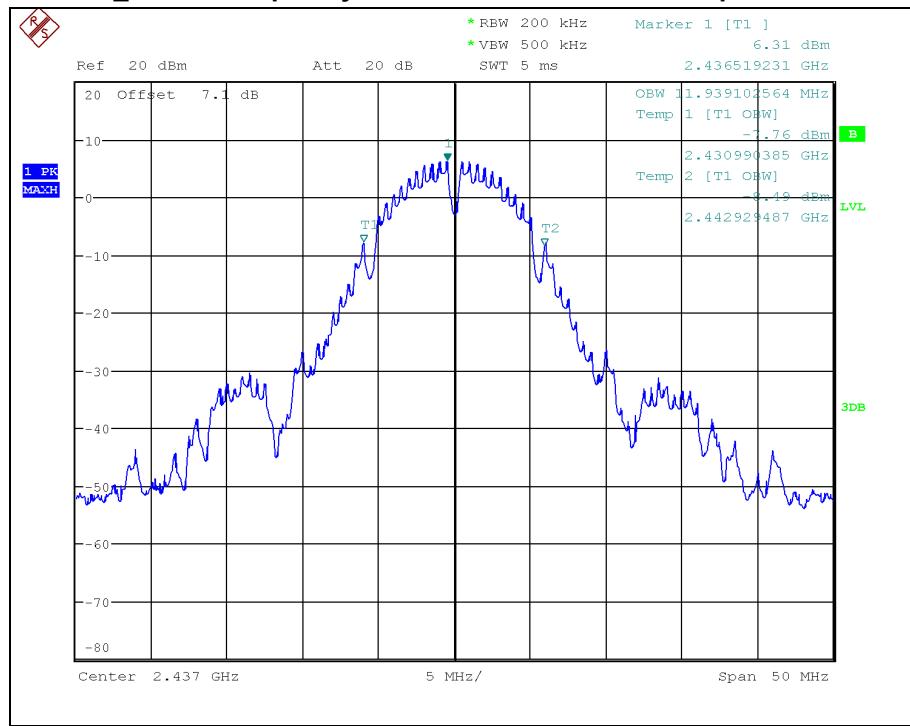


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ High frequency

Occupied Bandwidth

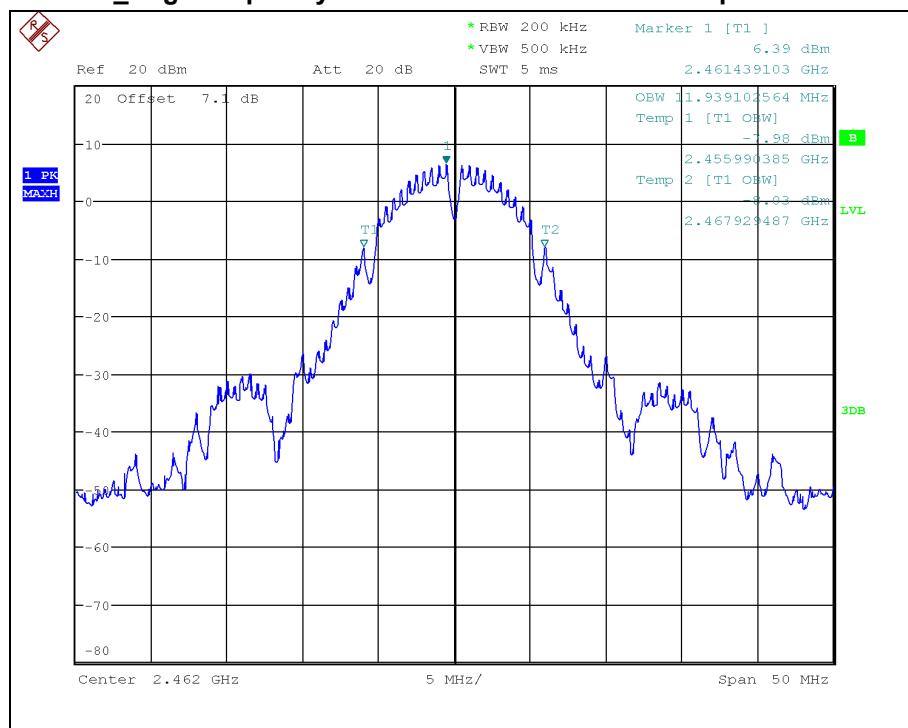

802.11g _ Low frequency



Occupied Bandwidth

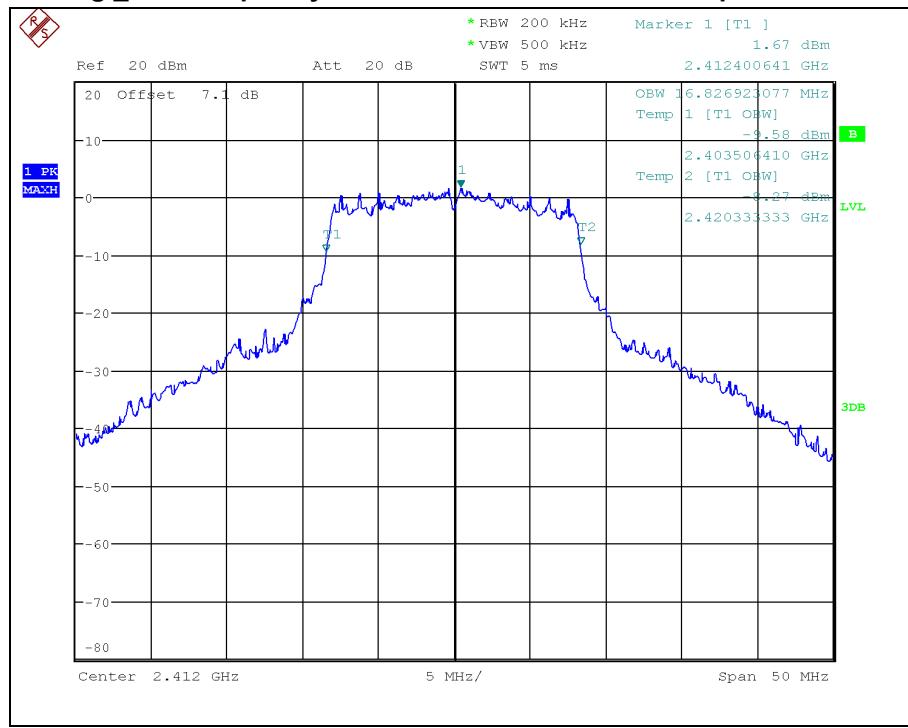

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

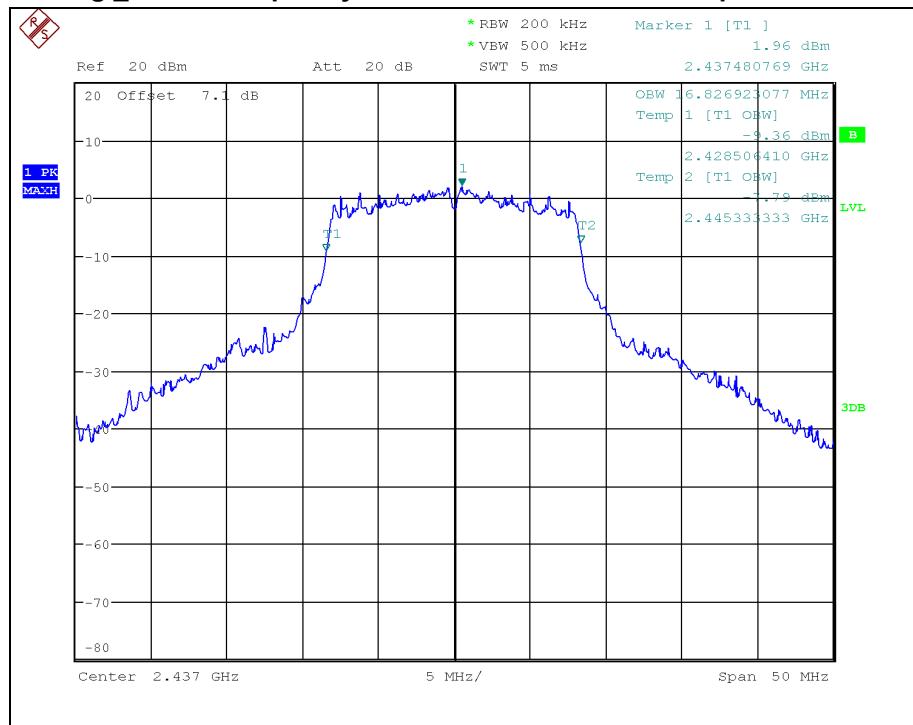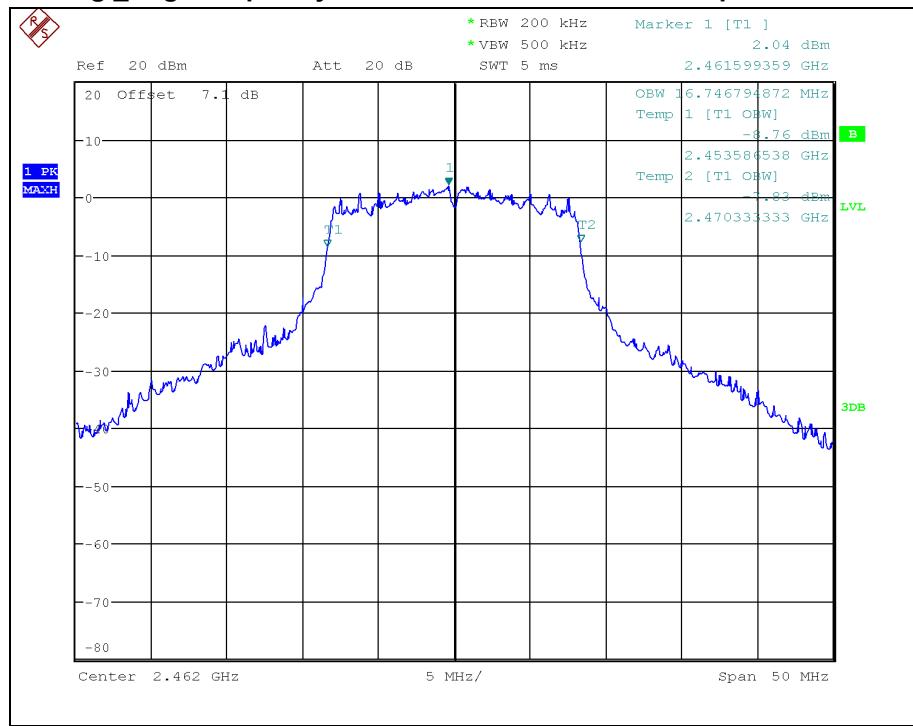
802.11g _ Middle frequency

802.11g _ High frequency


 Test Report No.: NW2004-F002

 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

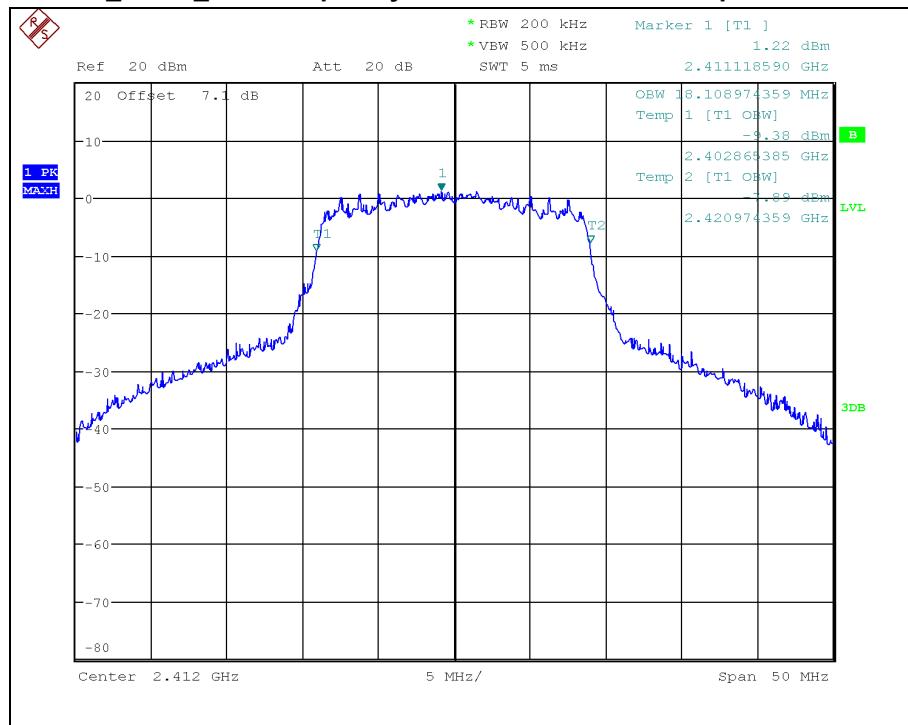Occupied Bandwidth



802.11n_HT20 _ Middle frequency

Occupied Bandwidth

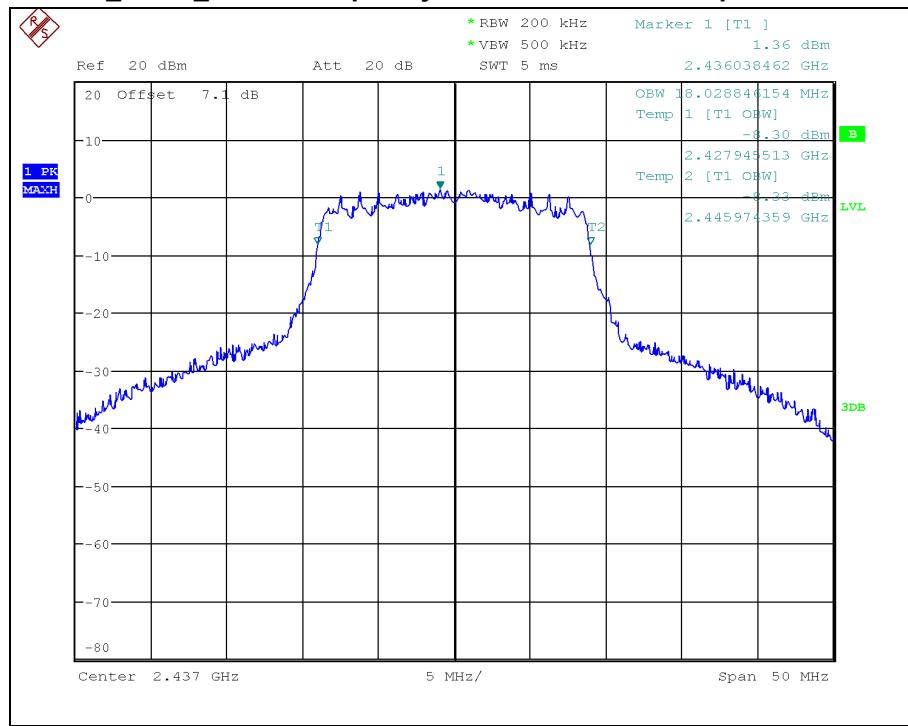


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20 _ High frequency

Occupied Bandwidth

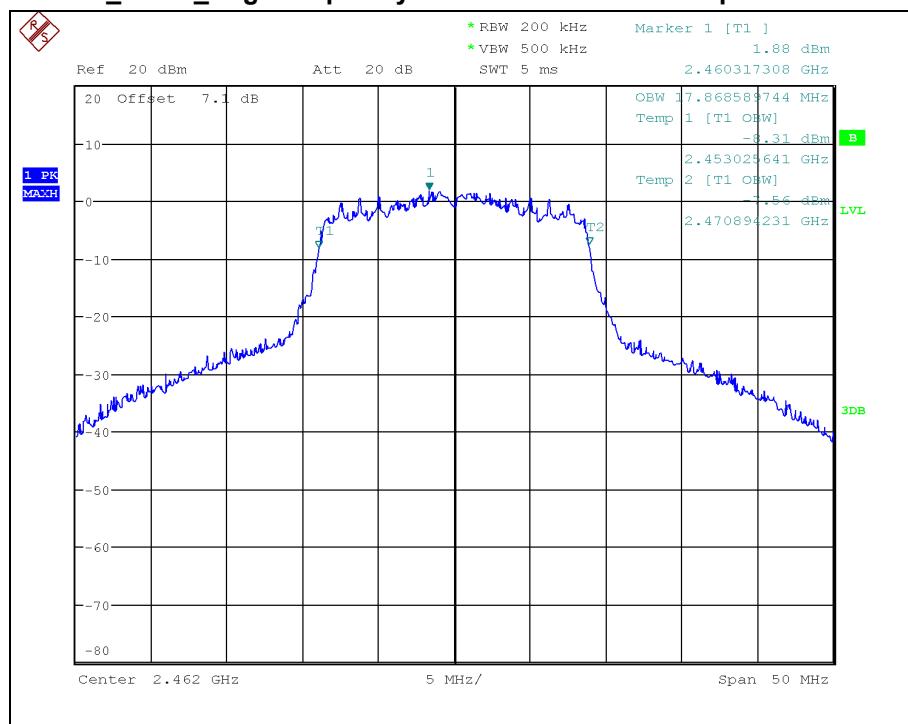

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



3.3.3 Maximum Conducted Output Power

3.3.3.1 Test Setup

Refer to the APPENDIX I.

3.3.3.2 Limit

The maximum permissible conducted output power is 1 Watt.

3.3.3.3 Test Procedure

A transmitter antenna terminal of EUT is connected to the input of a spectrum analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

1. Measure the duty cycle D of the transmitter output signal
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
4. Set VBW \geq 3 x RBW
5. Number of points in sweep \geq $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = RMS (power averaging)
8. Do not use sweep triggering. Allow the sweep to "free run."
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter
10. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
11. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is 25%.

3.3.3.4 Test Result

Test Mode	Test Frequency	Maximum Conducted Output Power			
		Reading	C.F	Test Result	
		(dBm)	(dB)	(dBm)	(mW)
802.11b	Low	12.98	0.07	13.05	20.18
	Middle	13.03	0.07	13.10	20.41
	High	12.99	0.07	13.06	20.23
802.11g	Low	12.10	0.41	12.51	17.80
	Middle	12.23	0.41	12.64	18.35
	High	12.39	0.41	12.80	19.03
802.11n_HT20	Low	11.94	0.41	12.35	17.17
	Middle	11.86	0.41	12.27	16.85
	High	11.95	0.41	12.36	17.21

Note 1: C.F(Correction Factor)

Correction Factor = DCCF

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 2: Sample Calculation.

Test Result = Reading + C.F


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511


www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.3.5 Test Plot

802.11b _ Low frequency

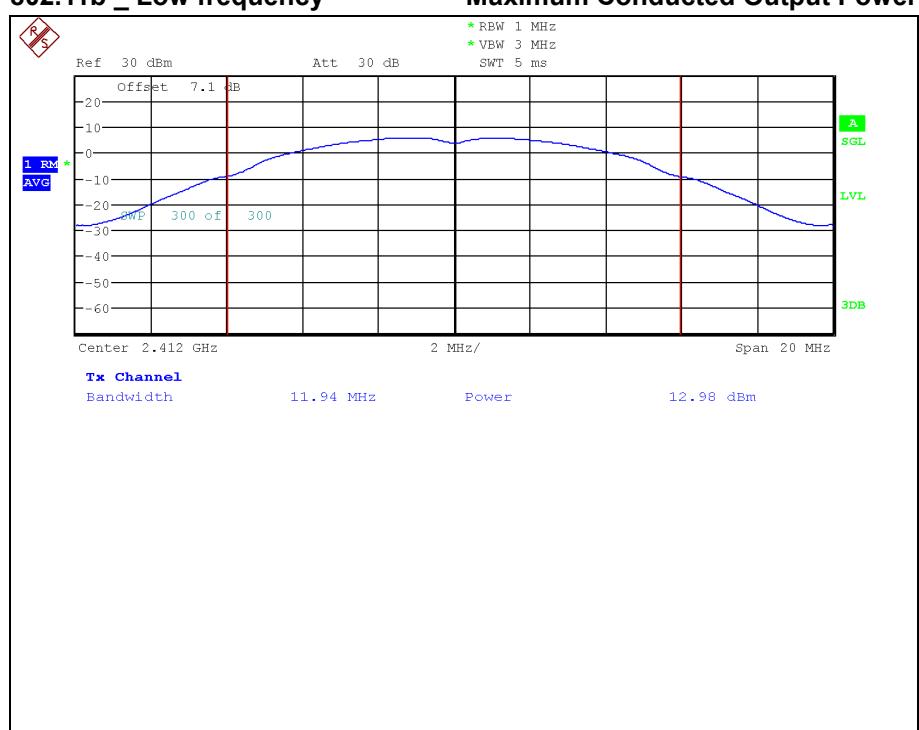

802.11b _ Middle frequency

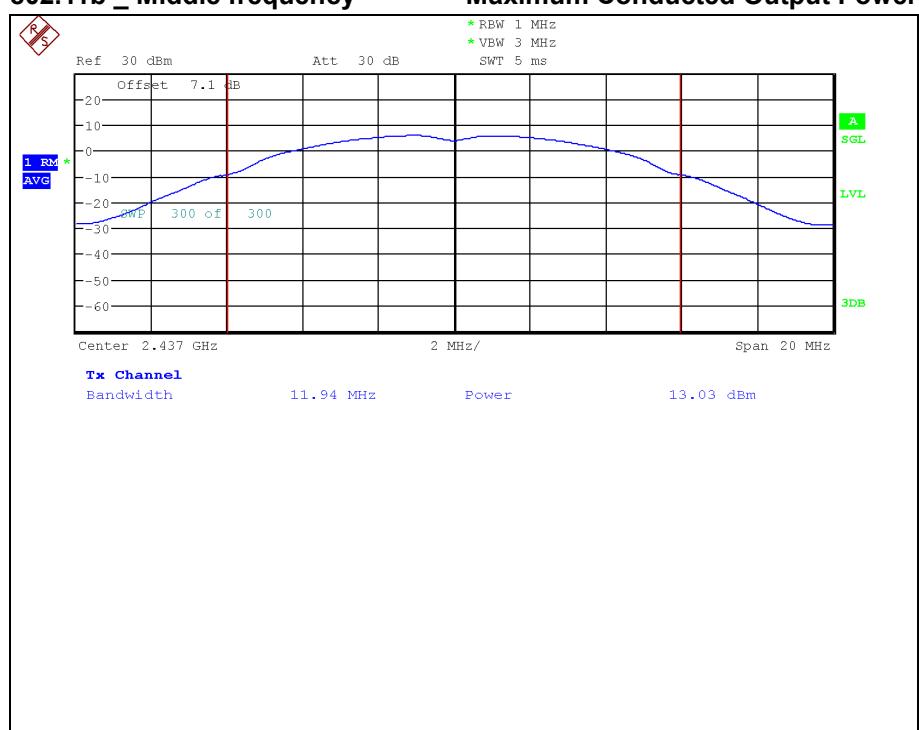


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ High frequency

Maximum Conducted Output Power

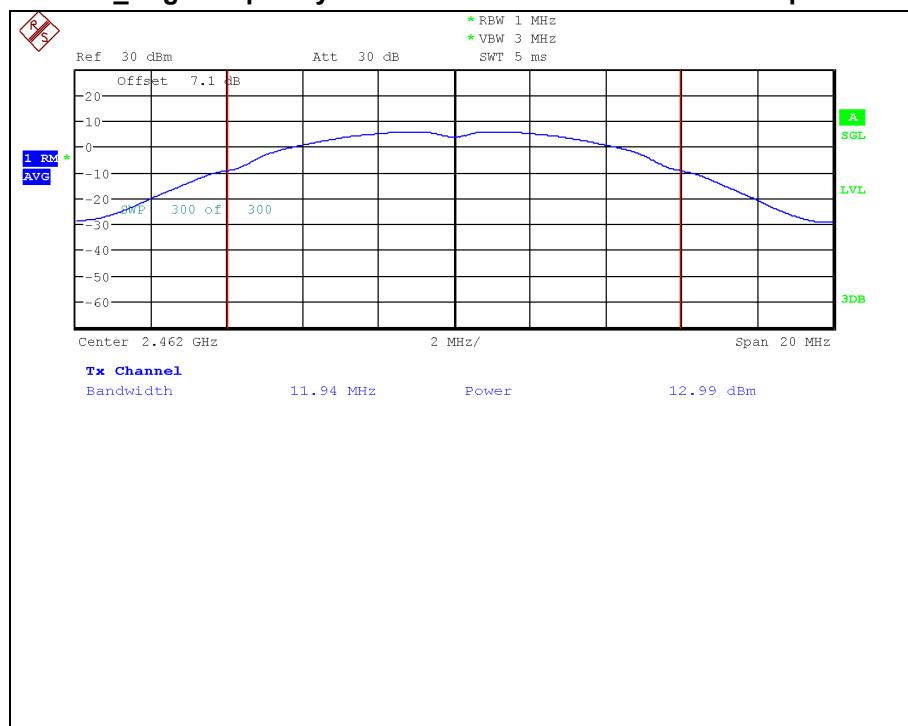

802.11g _ Low frequency

Maximum Conducted Output Power

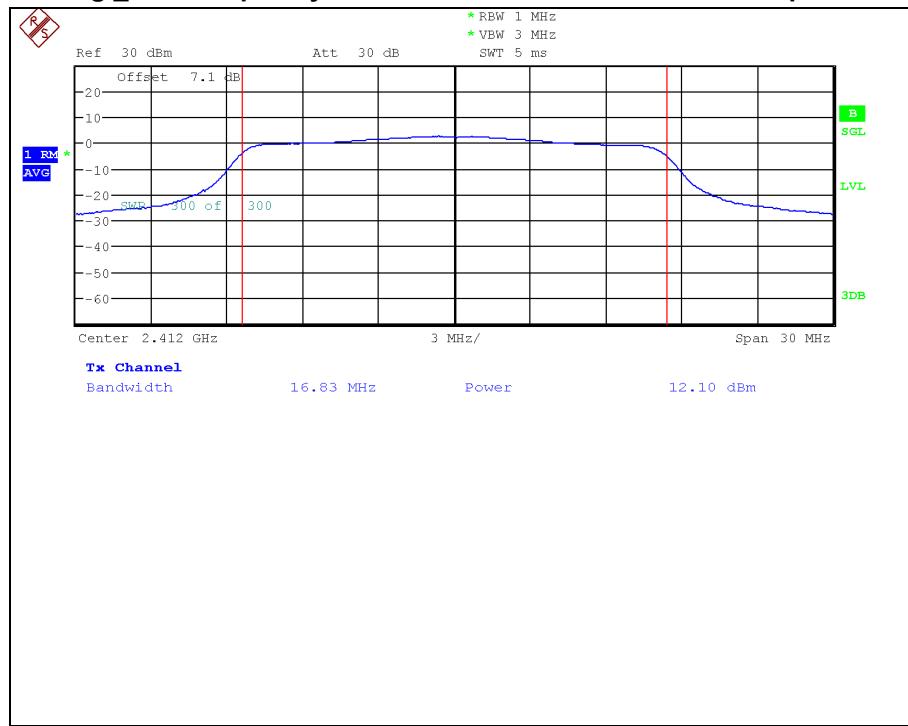


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Middle frequency

Maximum Conducted Output Power

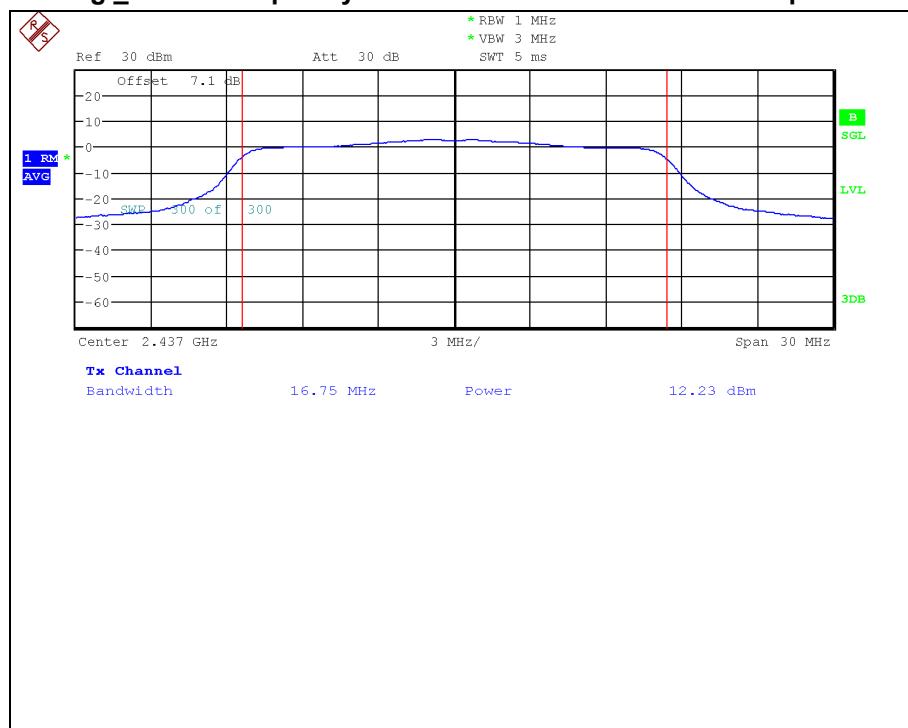

802.11g _ High frequency

Maximum Conducted Output Power

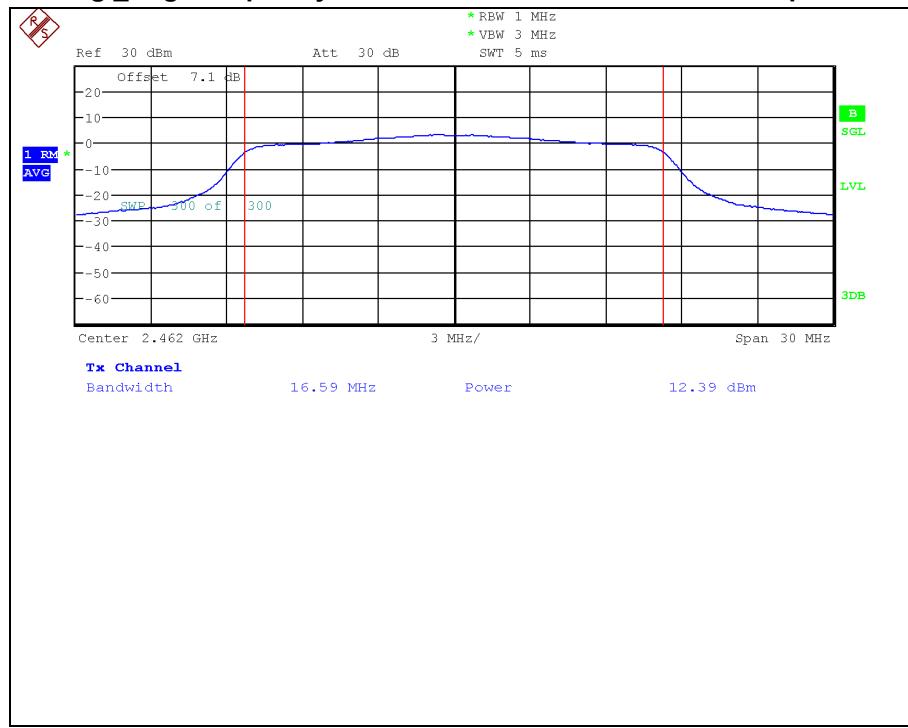


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

Maximum Conducted Output Power

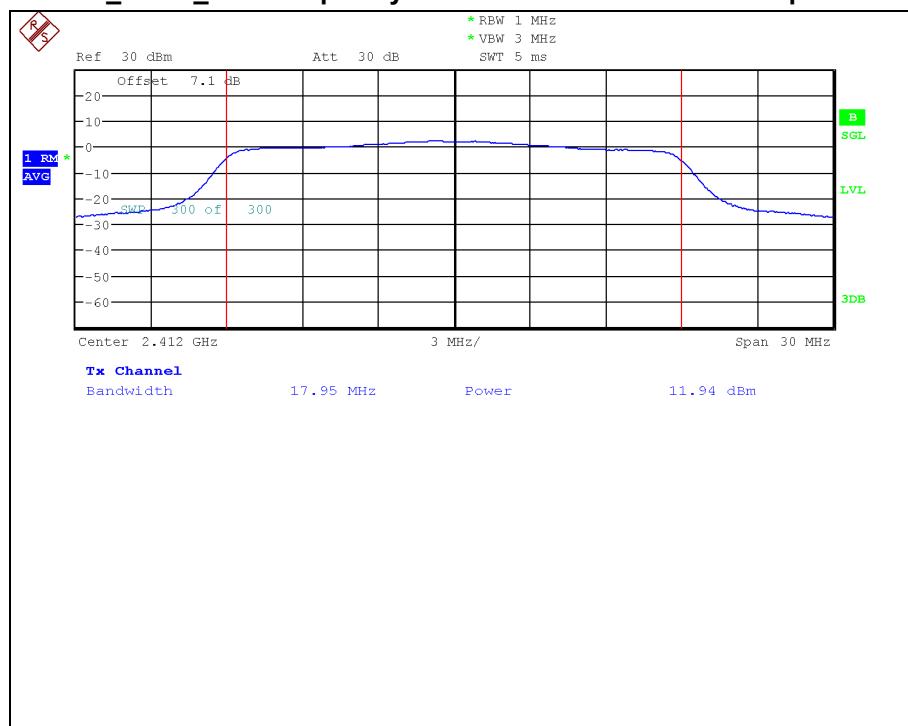

802.11n_HT20 _ Middle frequency

Maximum Conducted Output Power

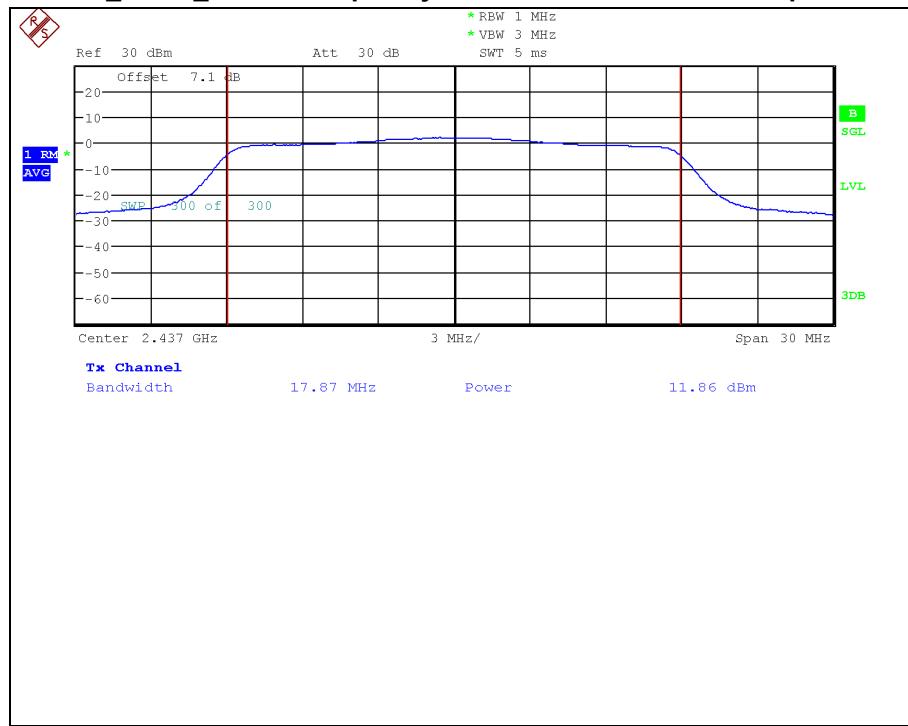


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20 _ High frequency

Maximum Conducted Output Power

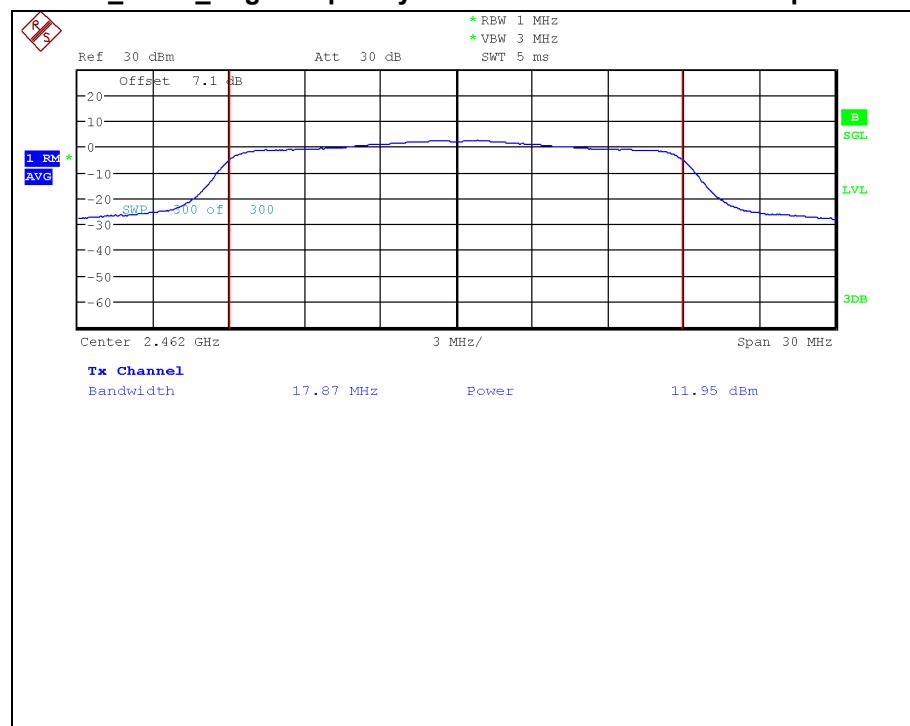

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.4 Peak Power Spectral Density

3.3.4.1 Test Setup

Refer to the APPENDIX I.

3.3.4.2 Limit

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

3.3.4.3 Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

(ANSI C63.10-2013 _ Section 11.10.2 - Method PKPSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = Auto
7. Trace mode = Max Hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

3.3.4.4 Test Result


Test Mode	Test Frequency	Peak Power Spectral Density (dBm)
802.11b	Low	-8.20
	Middle	-6.81
	High	-7.30
802.11g	Low	-10.72
	Middle	-11.25
	High	-10.71
802.11n_HT20	Low	-10.42
	Middle	-11.40
	High	-11.31

Test Report No.: NW2004-F002


211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.4.5 Test Plot

802.11b _ Low frequency

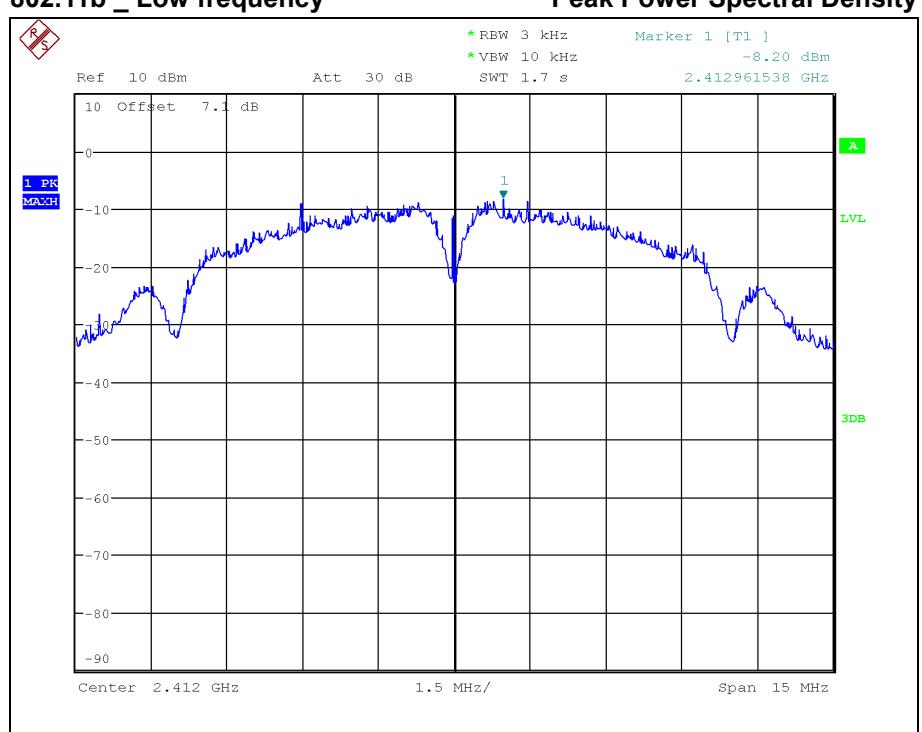


802.11b _ Middle frequency

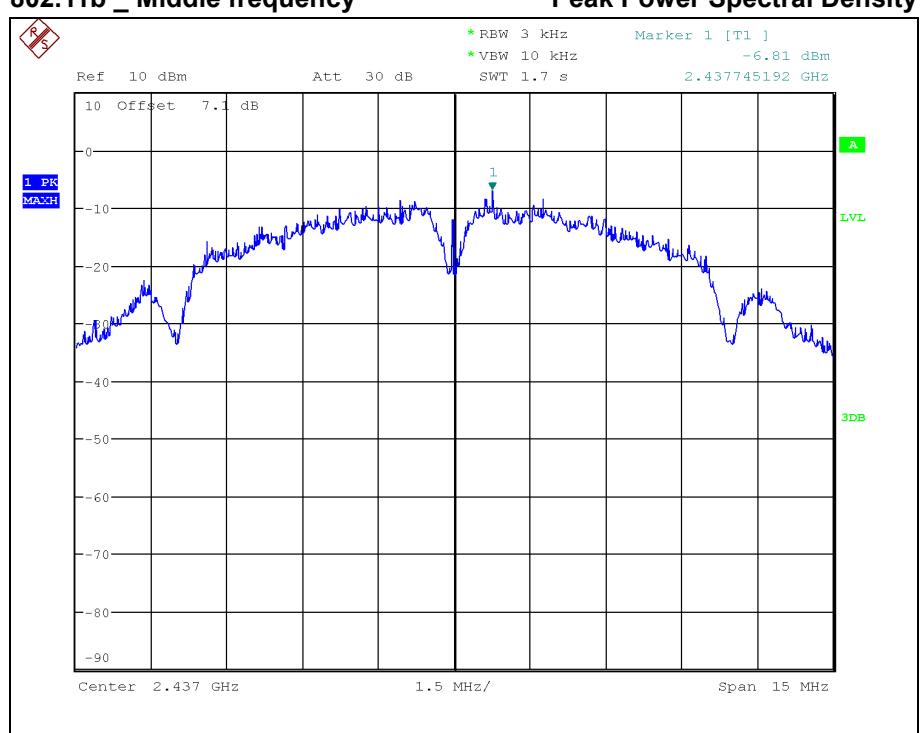


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11b _ High frequency

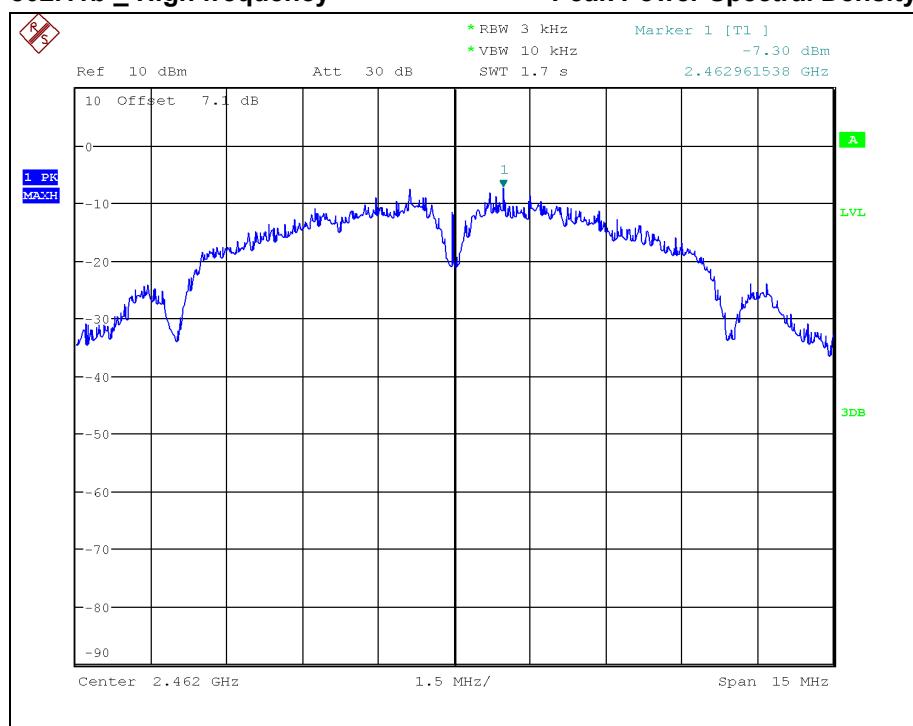

802.11g _ Low frequency

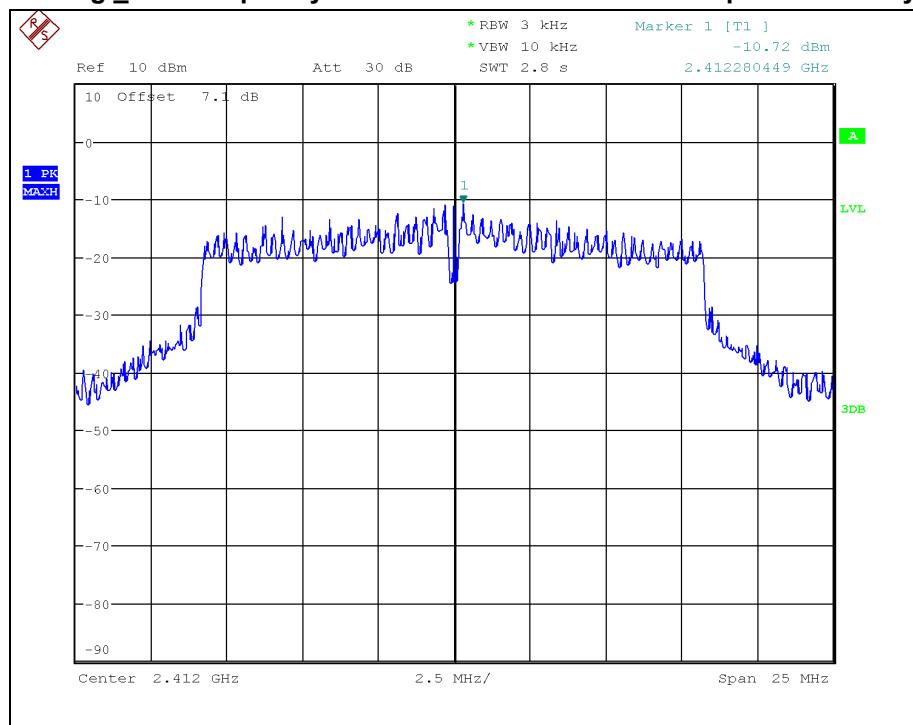


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Middle frequency

Peak Power Spectral Density

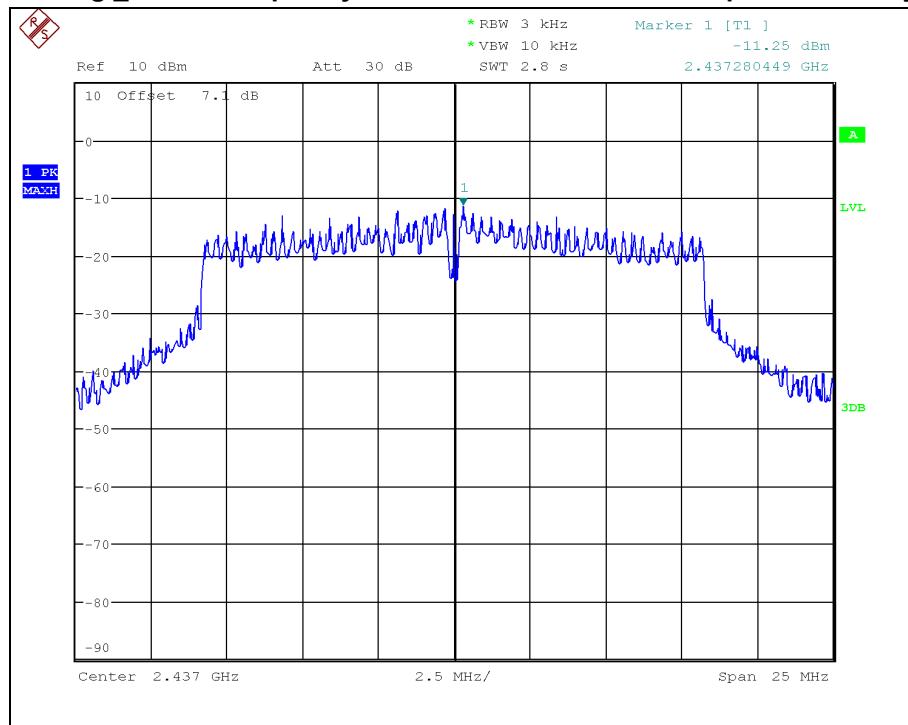

802.11g _ High frequency

Peak Power Spectral Density

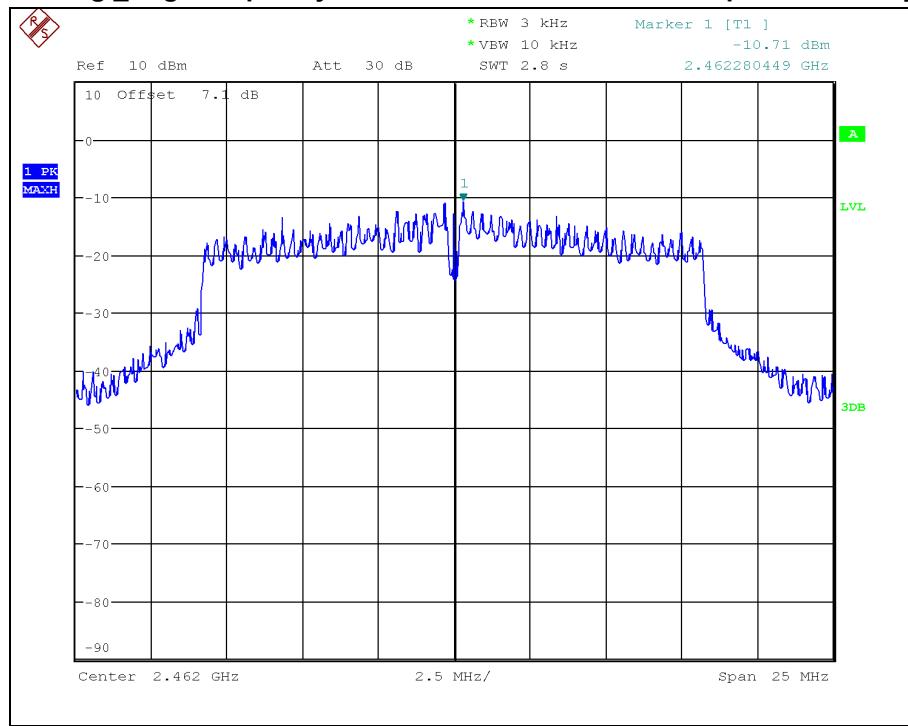


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

Peak Power Spectral Density

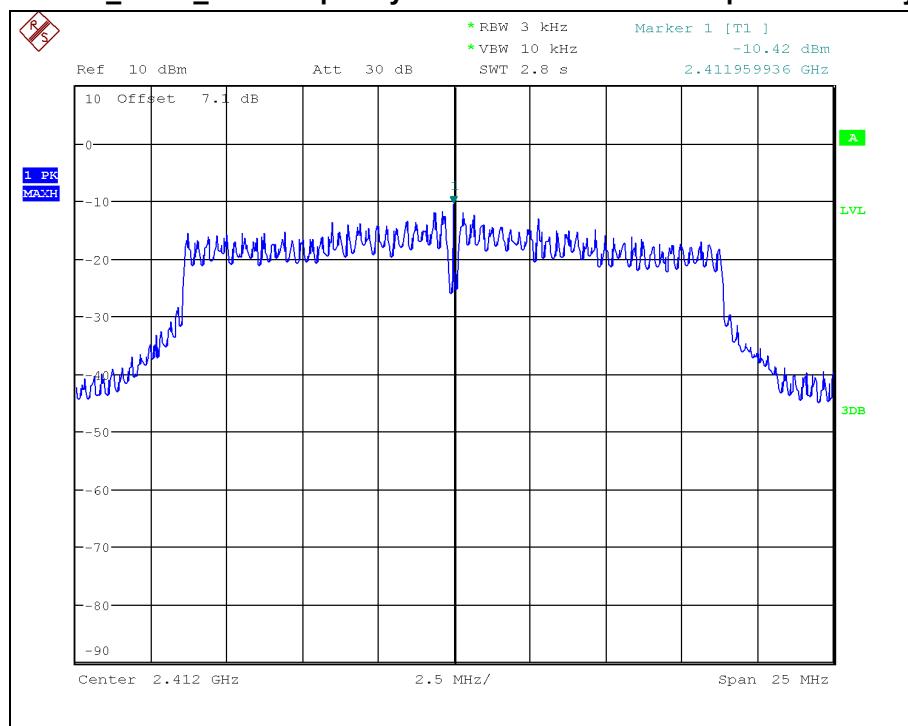

802.11n_HT20 _ Middle frequency

Peak Power Spectral Density

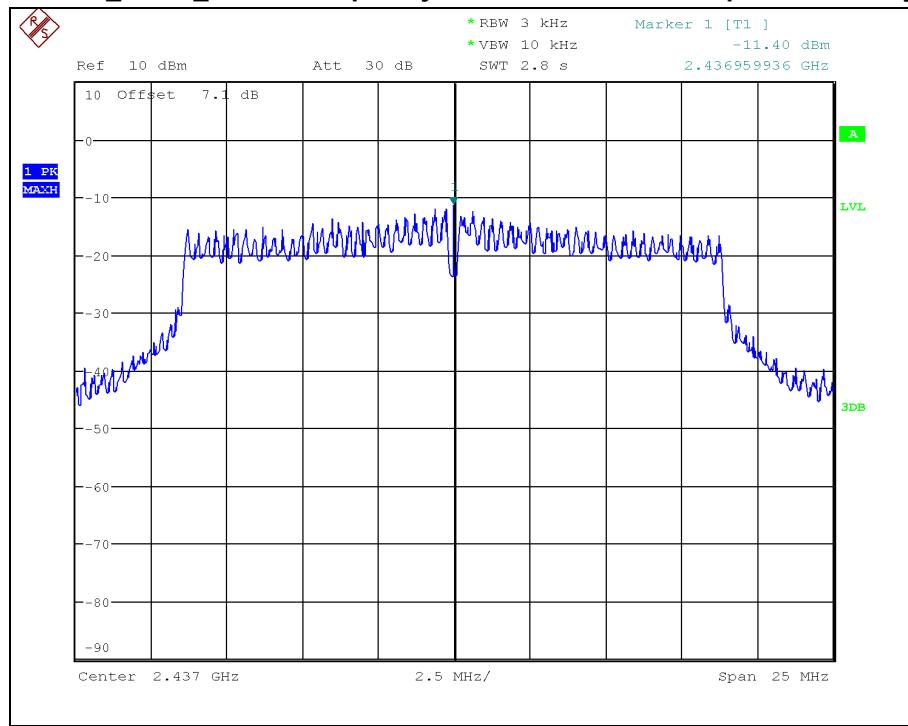


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20 _ High frequency

Peak Power Spectral Density

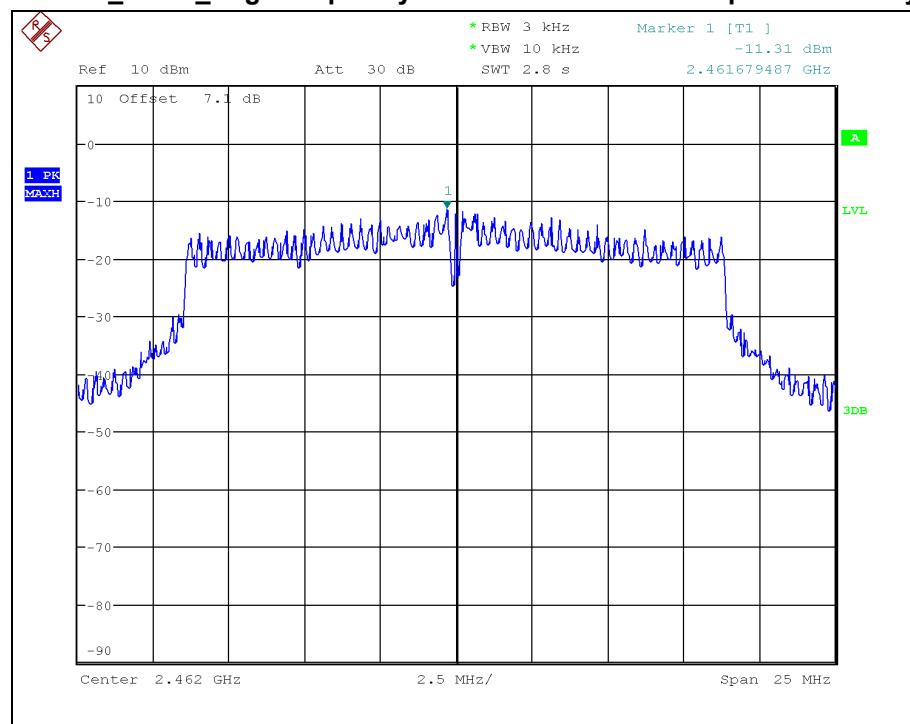

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.5 TX Radiated Spurious Emission and Conducted Spurious Emission

3.3.5.1 Test Setup

Refer to the APPENDIX I.

3.3.5.2 Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as defined in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1705	24000/F (kHz)	30
1705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 – 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 ~ 0.110	16.42 ~ 16.423	399.90 ~ 410	4.5 ~ 5.15
0.495 ~ 0.505	16.69475 ~ 16.69525	608 ~ 614	5.35 ~ 5.46
2.1735 ~ 2.1905	16.80425 ~ 16.80475	960 ~ 1240	7.25 ~ 7.75
4.125 ~ 4.128	25.5 ~ 25.67	1300 ~ 1427	8.025 ~ 8.5
4.17725 ~ 4.17775	37.5 ~ 38.	1435 ~ 1626.5	9.0 ~ 9.2
4.20725 ~ 4.20775	25.73 ~ 74.6	1645.5 ~ 1646.5	9.3 ~ 9.5
4.17725 ~ 4.17775	74.8 ~ 75.2	1660 ~ 1710	10.6 ~ 12.7
6.215 ~ 6.218	108 ~ 121.94	1718.8 ~ 1722.2	13.25 ~ 13.4
6.26775 ~ 6.26825	149.9 ~ 150.05	2200 ~ 2300	14.47 ~ 14.5
6.31175 ~ 6.31225	156.52475 ~ 156.52525	2310 ~ 2390	15.35 ~ 16.2
8.291 ~ 8.294	156.7 ~ 156.9	2483.5 ~ 2500	17.7 ~ 21.4
8.362 ~ 8.366	162.0125 ~ 167.17	2690 ~ 2900	22.01 ~ 23.12
8.37625 ~ 8.38675	3345.8 ~ 3358	3260 ~ 3267	23.6 ~ 24.0
8.41425 ~ 8.41475	3600 ~ 4400	3332 ~ 3339	31.2 ~ 31.8
12.51975 ~ 12.52025	3345.8 ~ 3358	240 ~ 285	36.43 ~ 36.5
12.57675 ~ 12.57725	3600 ~ 4400	322 ~ 335.4	Above 38.6
13.36 ~ 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

3.3.5.3 Test Procedure for Radiated Spurious Emission

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a Broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. Repeat above procedures until the measurements for all frequencies are complete.

Measurement Instrument Setting

1. Frequency Range: Below 1 GHz
RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

2. Frequency Range: Above 1 GHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto,
Trace mode = Max Hold until the trace stabilizes

Average Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = RMS (Number of points \geq 2 x Span / RBW),
Trace Mode = Average (Averaging type = power(i.e. RMS)), Sweep Time = Auto,
Sweep Count = at least 100 traces

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
- 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous (\geq 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.



3.3.5.4 Test Procedure for Conducted Spurious Emission

1. The transmitter output was connected to the spectrum analyzer.
2. The reference level of the fundamental frequency was measured with the spectrum analyzer using
RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.
Frequency range: 30 MHz ~ 26.5 GHz
RBW = 100 kHz, VBW = 300 kHz, Sweep Time = Auto, Detector = Peak,
Trace = Max Hold

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Page 36 of 78

3.3.5.5 Test Result

9 kHz ~ 25 GHz Data for 802.11b

- Low frequency

Frequency	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	(MHz)	AV / Peak				AV / Peak								
4 824.00	51.32	56.12	V	-9.63	0.07	54.0	74.0	41.8	46.5	12.2	27.5			
7 236.00	41.49	50.13	V	-0.46	0.07	54.0	74.0	41.1	49.7	12.9	24.3			

- Middle frequency

Frequency	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	(MHz)	AV / Peak				AV / Peak								
4 874.00	48.10	53.80	V	-9.57	0.07	54.0	74.0	38.6	44.2	15.4	29.8			
7 311.00	42.07	50.39	V	-0.44	0.07	54.0	74.0	41.7	50.0	12.3	24.1			

- High frequency

Frequency	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	(MHz)	AV / Peak				AV / Peak								
4 924.00	41.57	50.09	V	-9.66	0.07	54.0	74.0	32.0	40.4	22.0	33.6			
7 386.00	43.86	51.92	V	-0.48	0.07	54.0	74.0	43.4	51.4	10.6	22.6			

Note 1: The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found above listed frequencies.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF
 TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

9 kHz ~ 25 GHz Data for 802.11g

● Low frequency

Frequency (MHz)	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	AV	Peak				AV	Peak	AV	Peak	AV	Peak			
4 824.00	41.37	56.56	V	-9.63	0.41	54.0	74.0	32.1	46.9	21.9	27.1			
7 236.00	36.54	50.19	V	-0.46	0.41	54.0	74.0	36.5	49.7	17.5	24.3			

● Middle frequency

Frequency (MHz)	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	AV	Peak				AV	Peak	AV	Peak	AV	Peak			
4 874.00	41.01	55.13	V	-9.57	0.41	54.0	74.0	31.8	45.6	22.2	28.4			
7 311.00	36.75	50.36	V	-0.44	0.41	54.0	74.0	36.7	49.9	17.3	24.1			

● High frequency

Frequency (MHz)	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	AV	Peak				AV	Peak	AV	Peak	AV	Peak			
4 924.00	47.15	61.62	V	-9.66	0.41	54.0	74.0	37.9	52.0	16.1	22.0			
7 386.00	39.16	54.02	V	-0.48	0.41	54.0	74.0	39.1	53.5	14.9	20.5			

Note 1: The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found above listed frequencies.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

9 kHz ~ 25 GHz Data for 802.11n-HT20

● Low frequency

Frequency (MHz)	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	AV	Peak				AV	Peak	AV	Peak	AV	Peak			
4 824.00	40.31	55.49	V	-9.63	0.41	54.0	74.0	31.1	45.9	22.9	28.1			
7 236.00	35.67	49.61	V	-0.46	0.41	54.0	74.0	35.6	49.2	18.4	24.9			

● Middle frequency

Frequency (MHz)	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	AV	Peak				AV	Peak	AV	Peak	AV	Peak			
4 874.00	40.31	55.20	V	-9.57	0.41	54.0	74.0	31.1	45.6	22.9	28.4			
7 311.00	36.27	51.49	V	-0.44	0.41	54.0	74.0	36.2	51.1	17.8	23.0			

● High frequency

Frequency (MHz)	Reading		Pol.	TF (dB)	DCCF (dB)	Limits		Result		Margin				
	(dB uV/m)					(dB uV/m)		(dB uV/m)		(dB)				
	AV	Peak				AV	Peak	AV	Peak	AV	Peak			
4 924.00	46.35	62.50	V	-9.66	0.41	54.0	74.0	37.1	52.8	16.9	21.2			
7 386.00	38.42	53.67	V	-0.48	0.41	54.0	74.0	38.3	53.2	15.7	20.8			

Note 1: The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found above listed frequencies.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF


TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.5.6 Test Plot for Radiated Spurious Emission

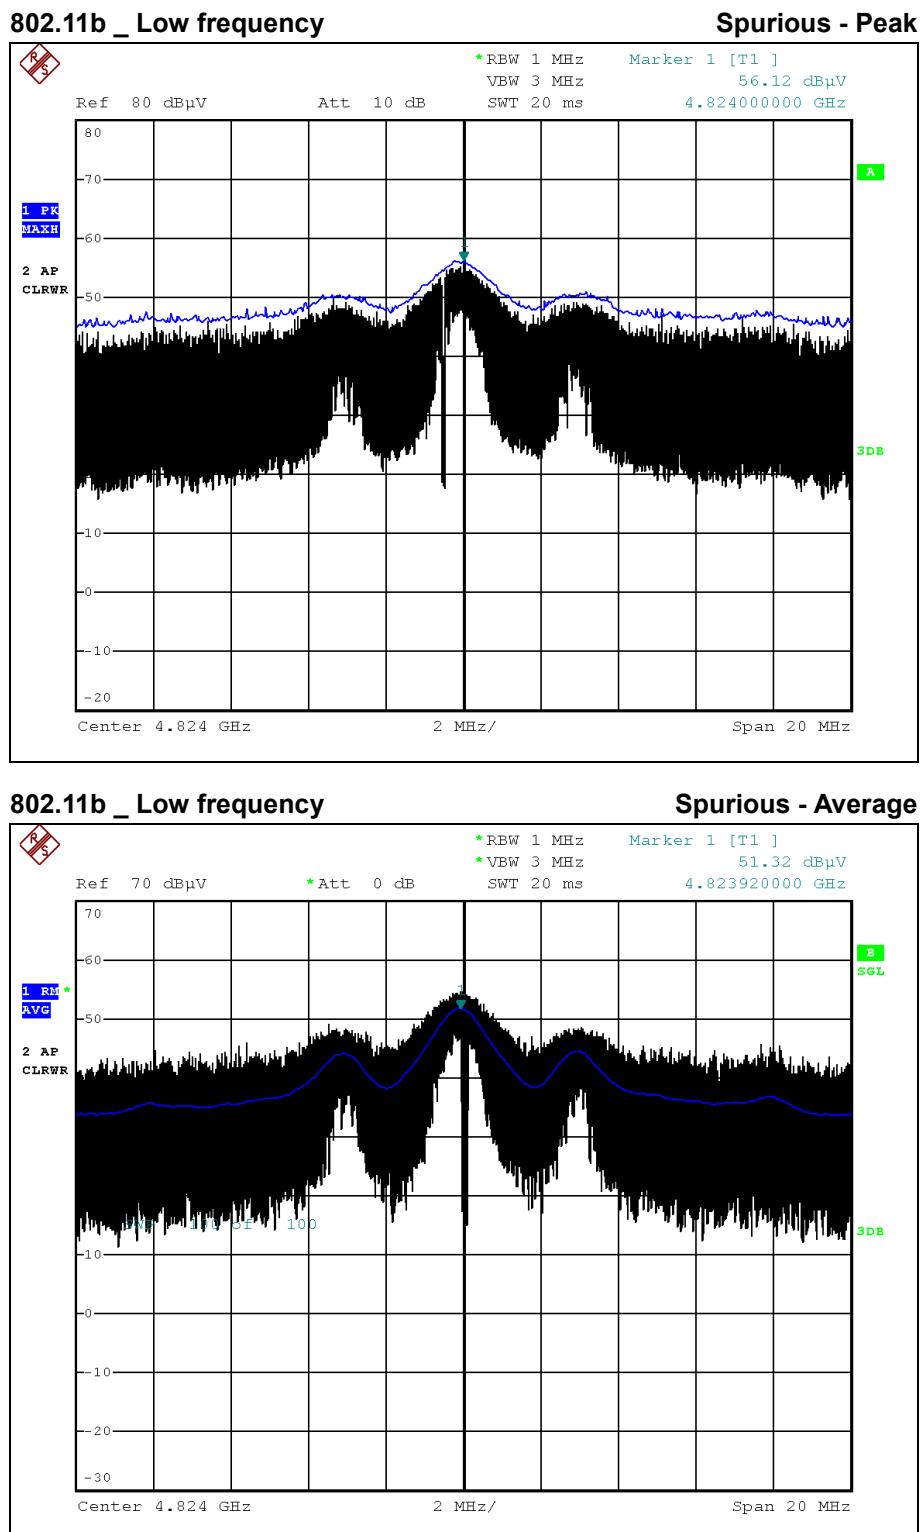


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ Low frequency

Spurious - Peak

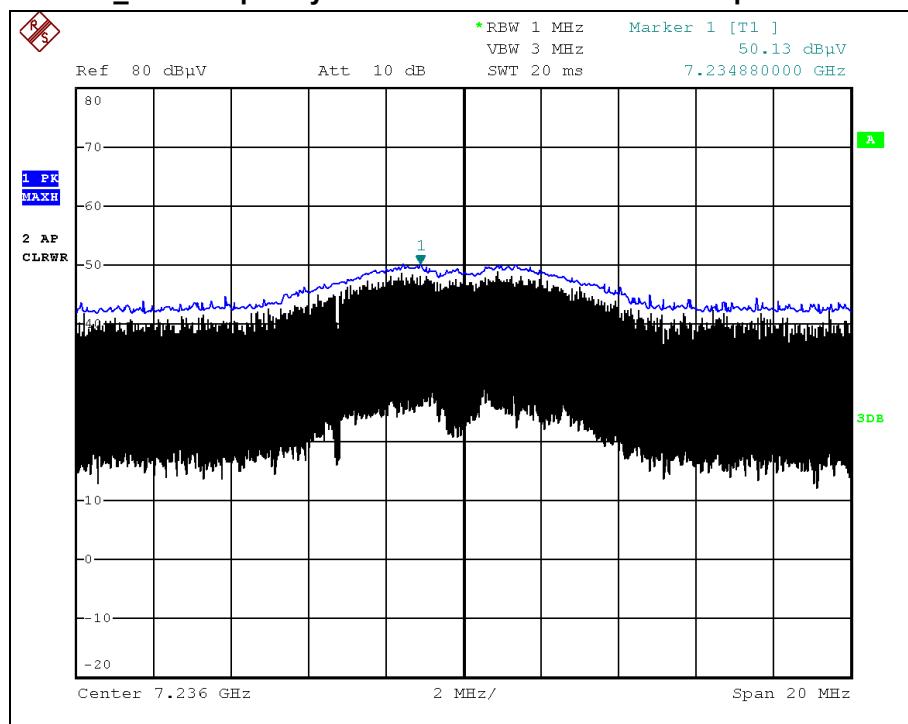

802.11b _ Low frequency

Spurious - Average

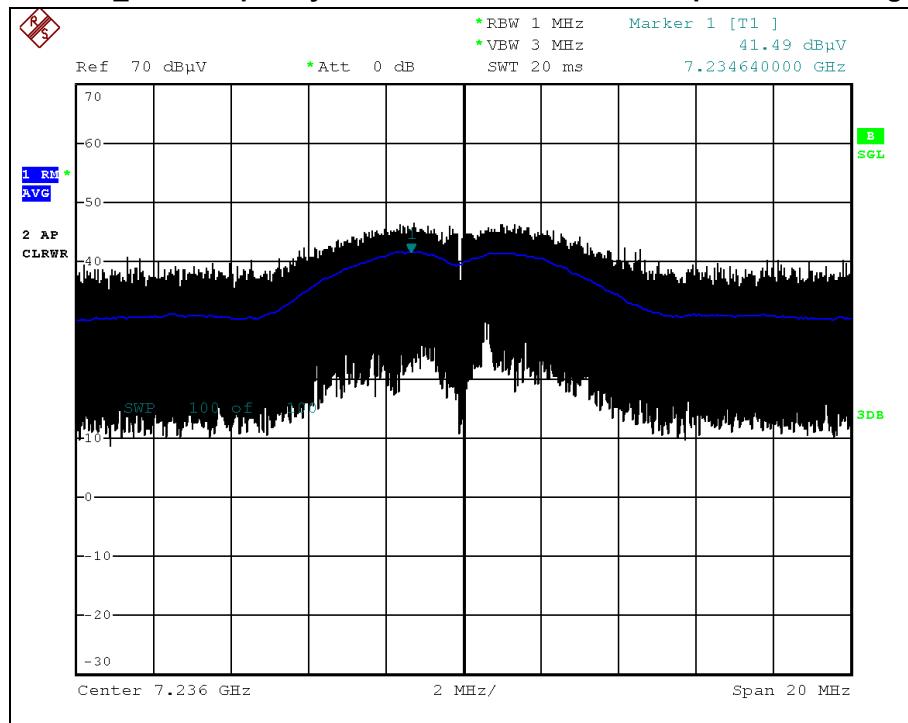


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ Middle frequency

Spurious - Peak

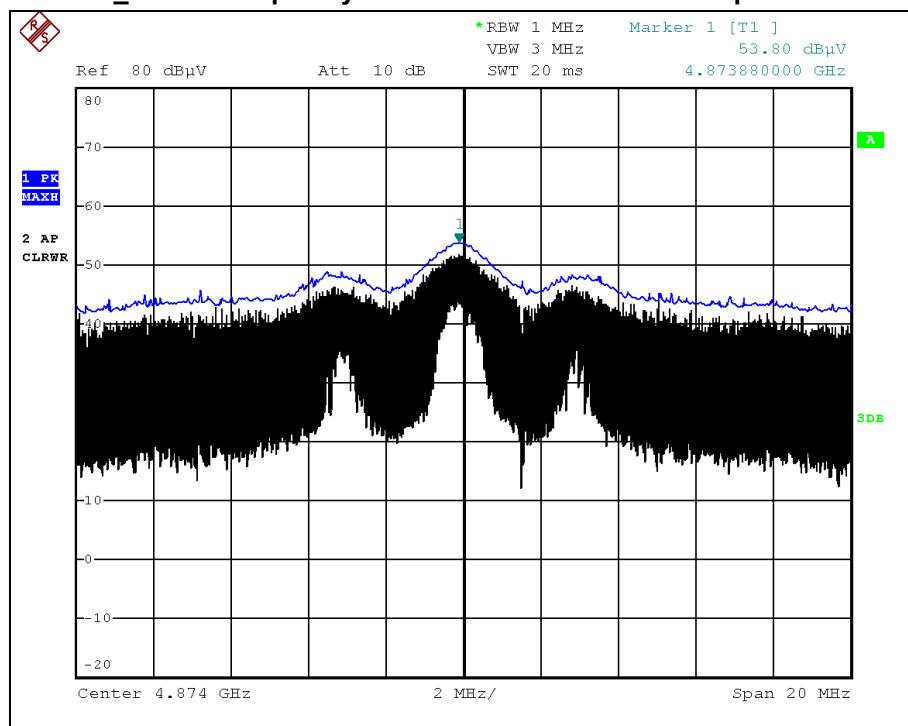

802.11b _ Middle frequency

Spurious - Average

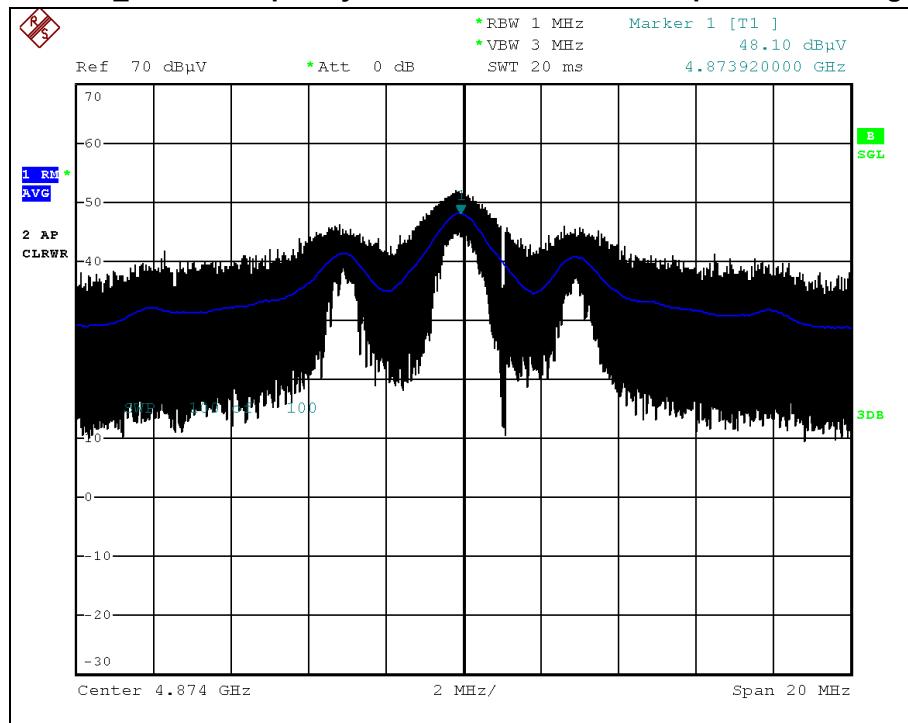


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ Middle frequency

Spurious - Peak

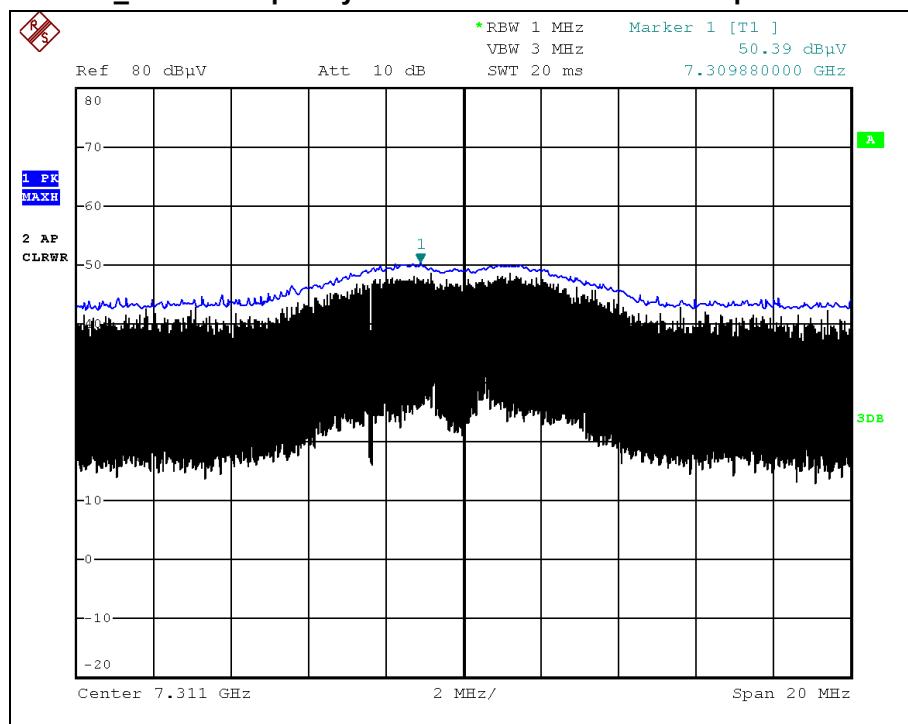

802.11b _ Middle frequency

Spurious - Average

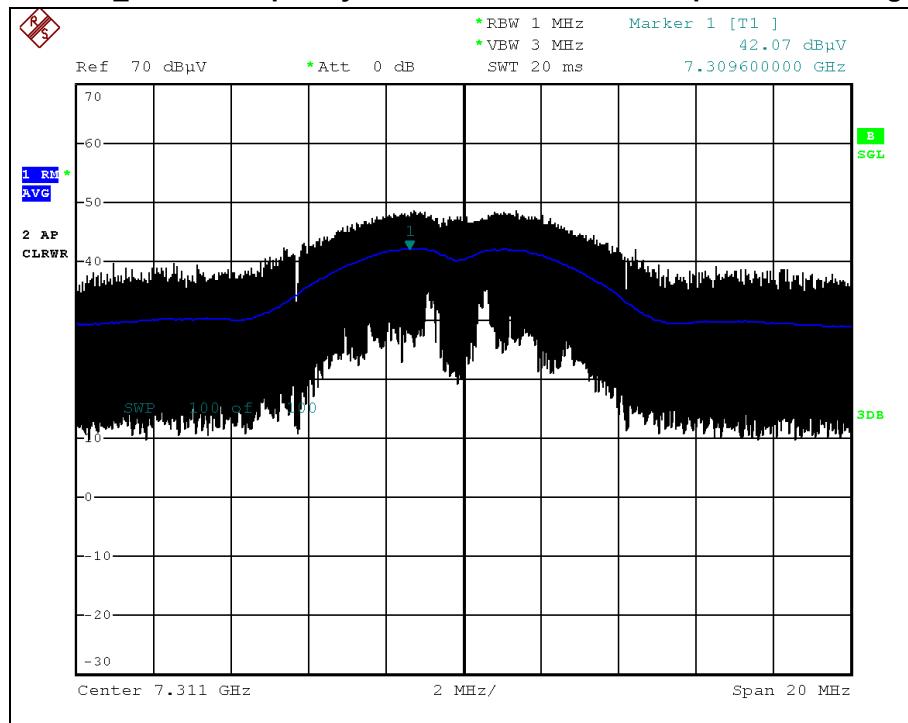


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ High frequency

Spurious - Peak

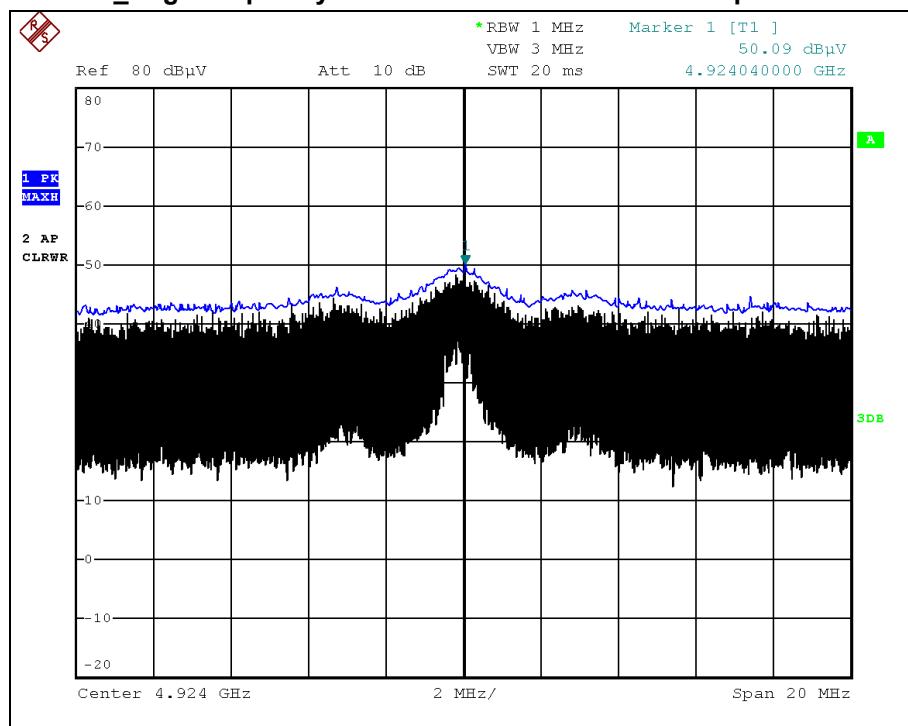

802.11b _ High frequency

Spurious - Average

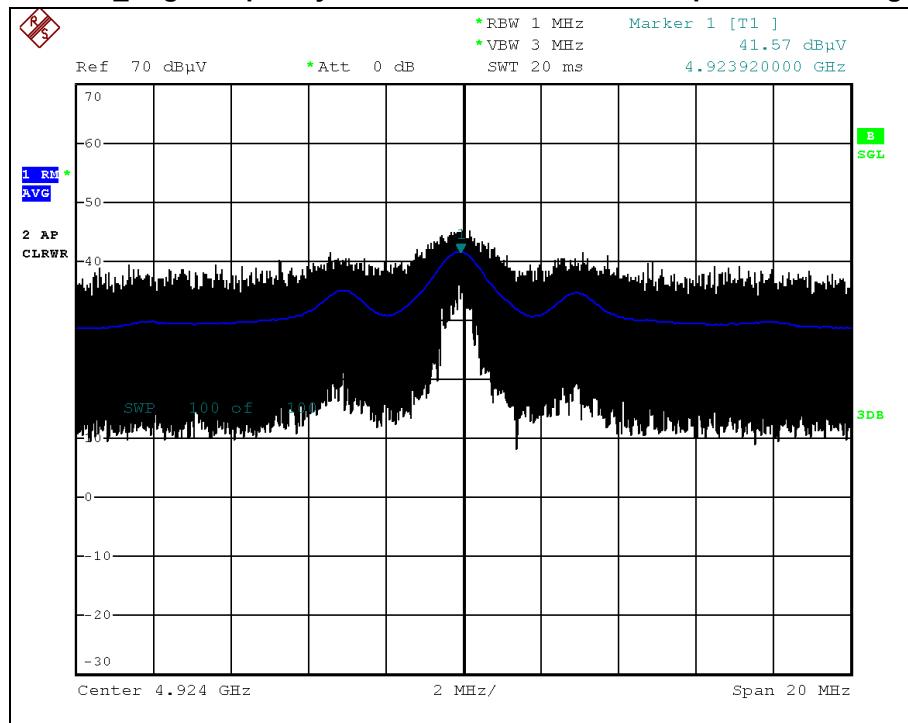


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ Low frequency

Spurious - Peak

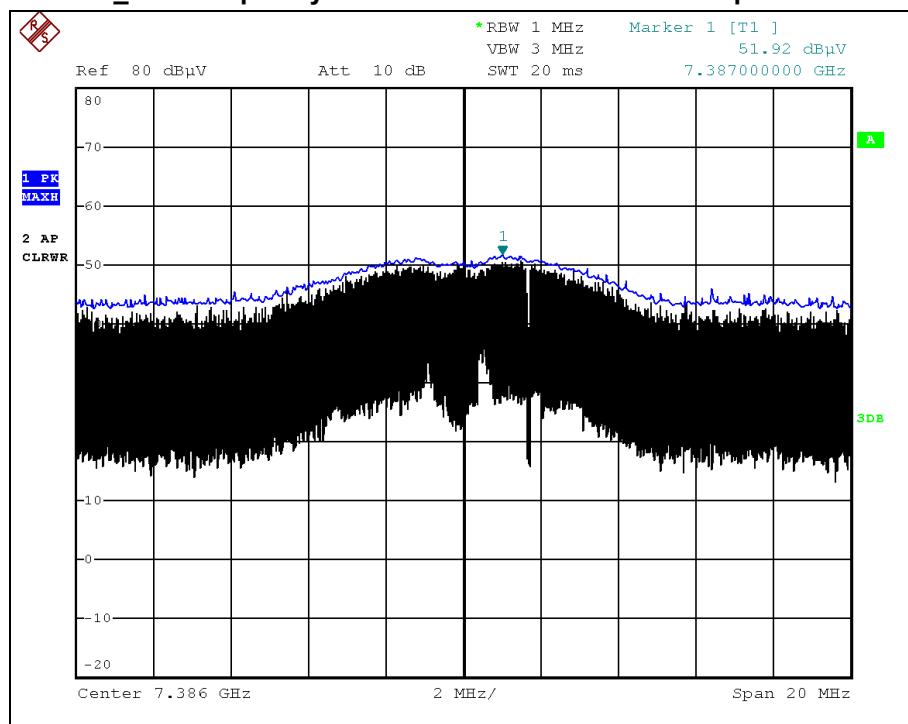

802.11b _ Low frequency

Spurious - Average

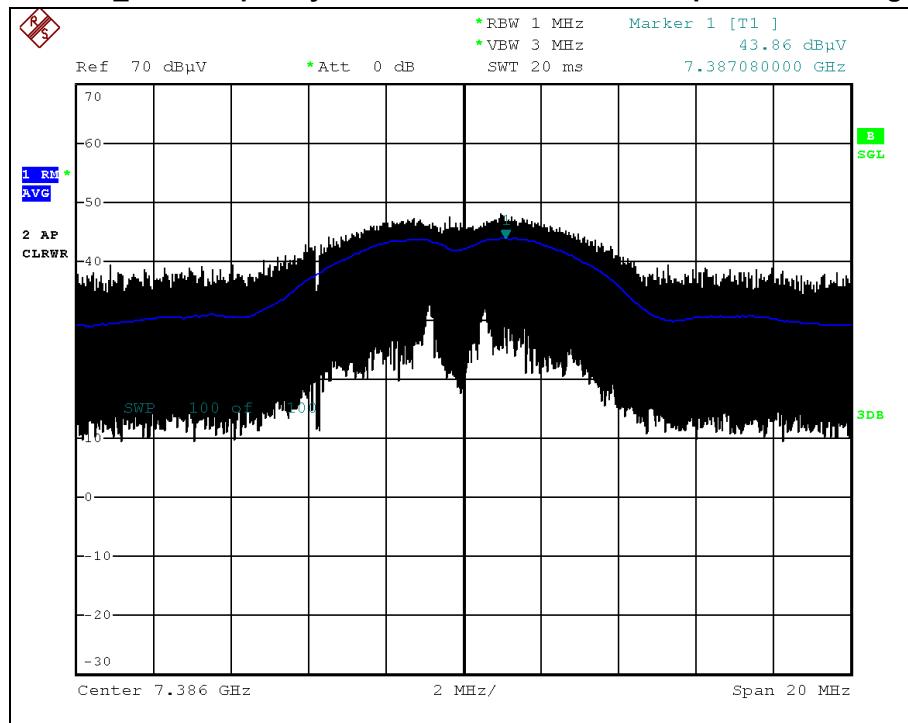


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Low frequency

Spurious - Peak

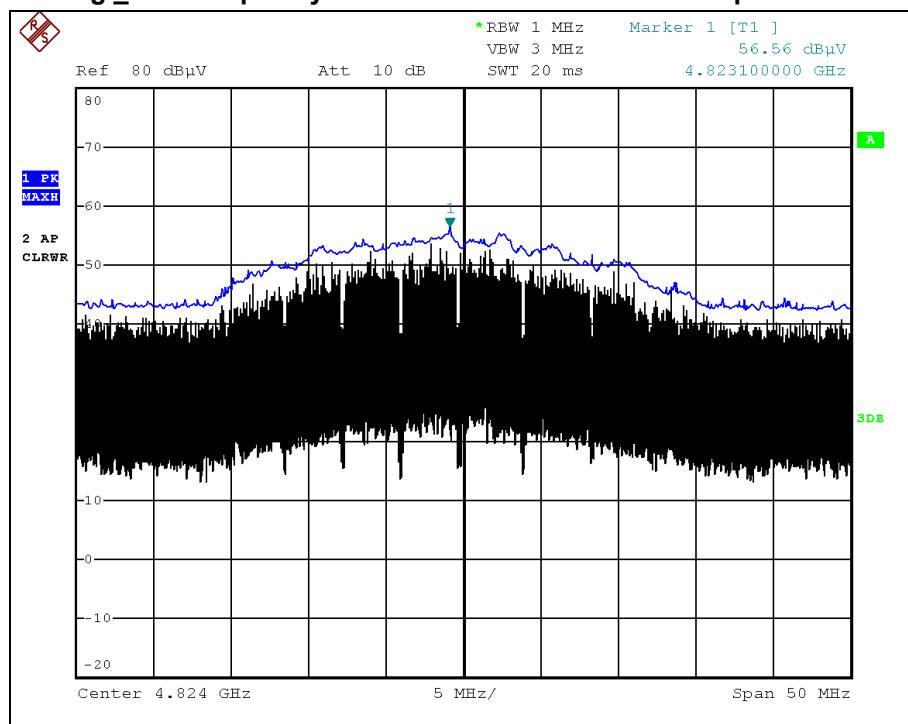

802.11g _ Low frequency

Spurious - Average

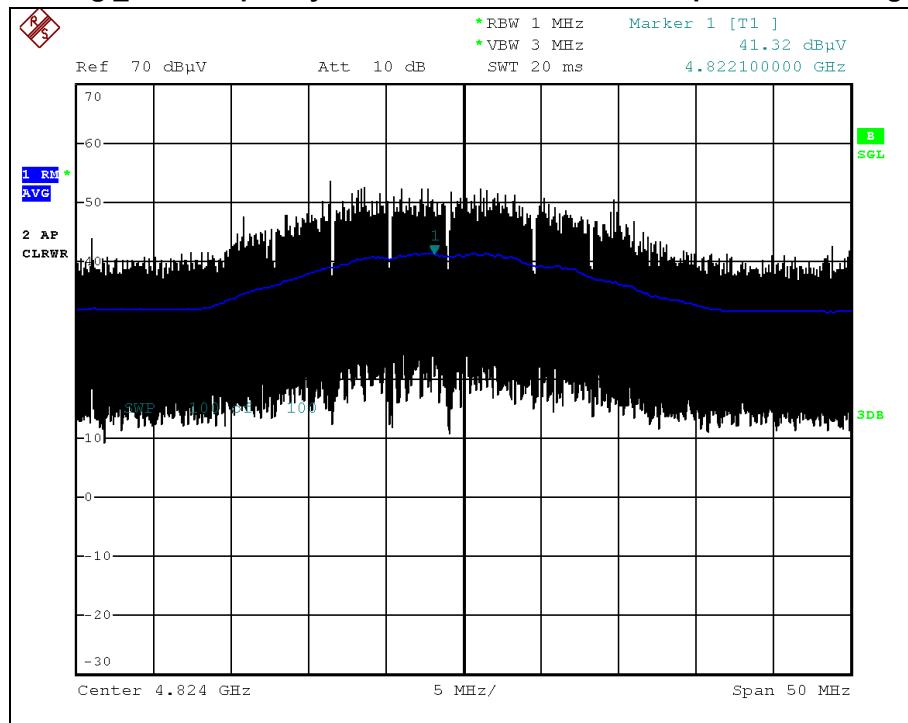


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Low frequency

Spurious - Peak

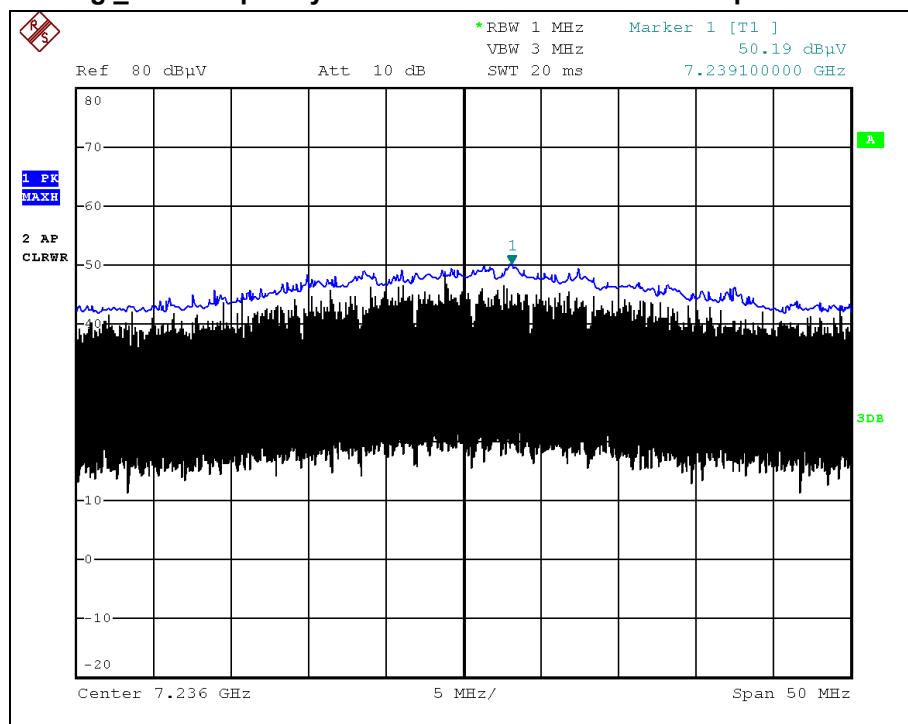

802.11g _ Low frequency

Spurious - Average

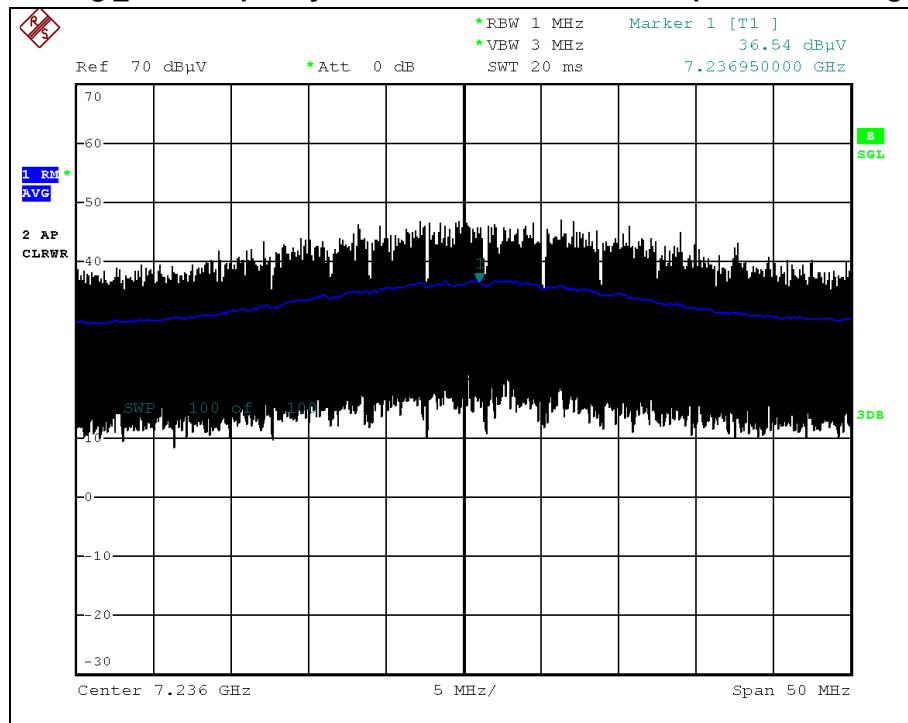


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Middle frequency

Spurious - Peak

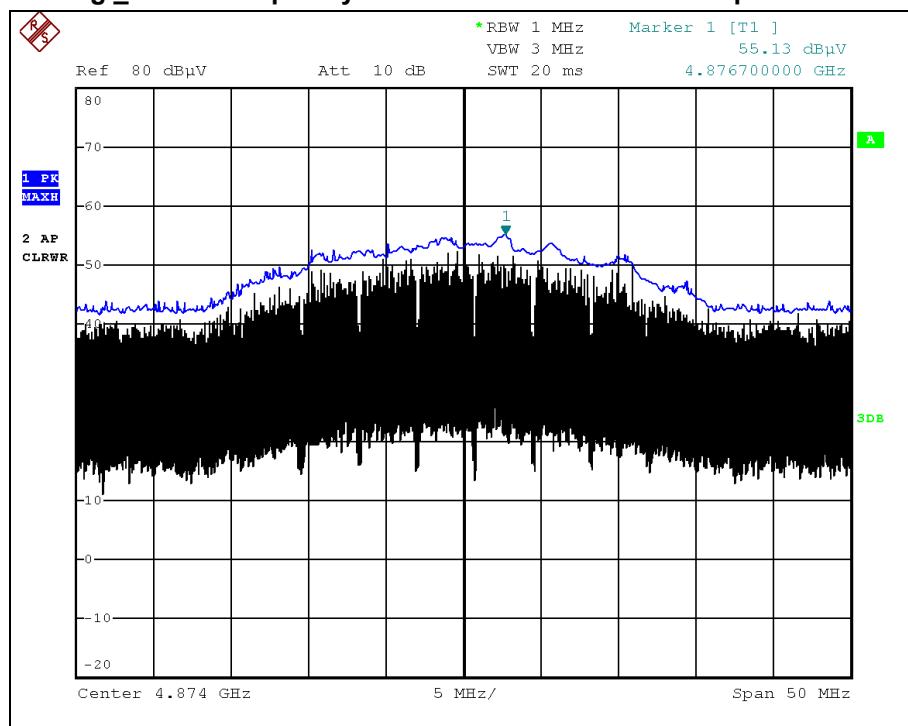

802.11g _ Middle frequency

Spurious - Average

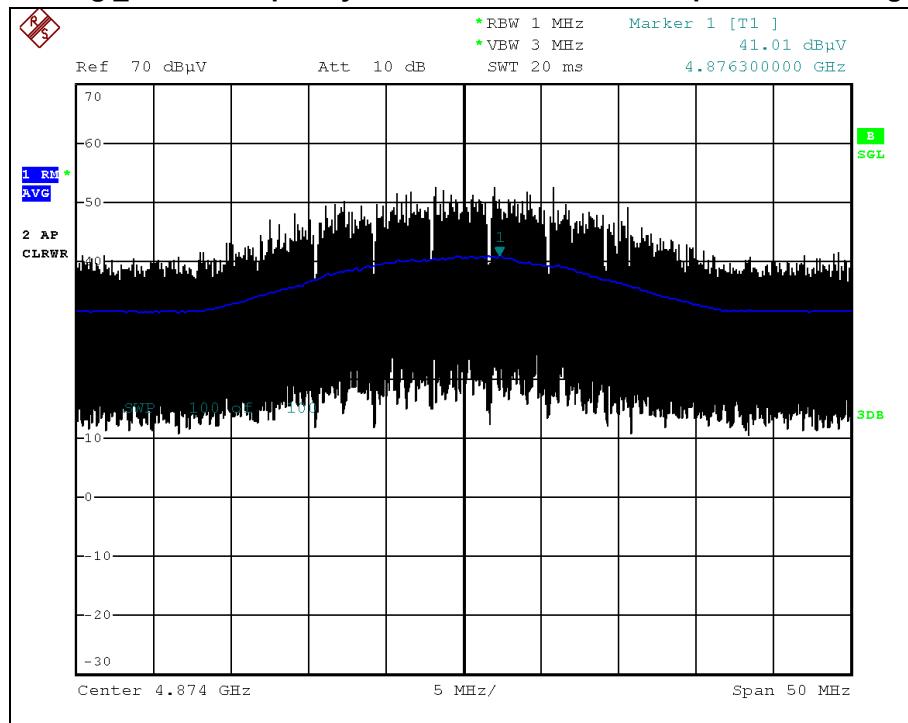


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Middle frequency

Spurious - Peak

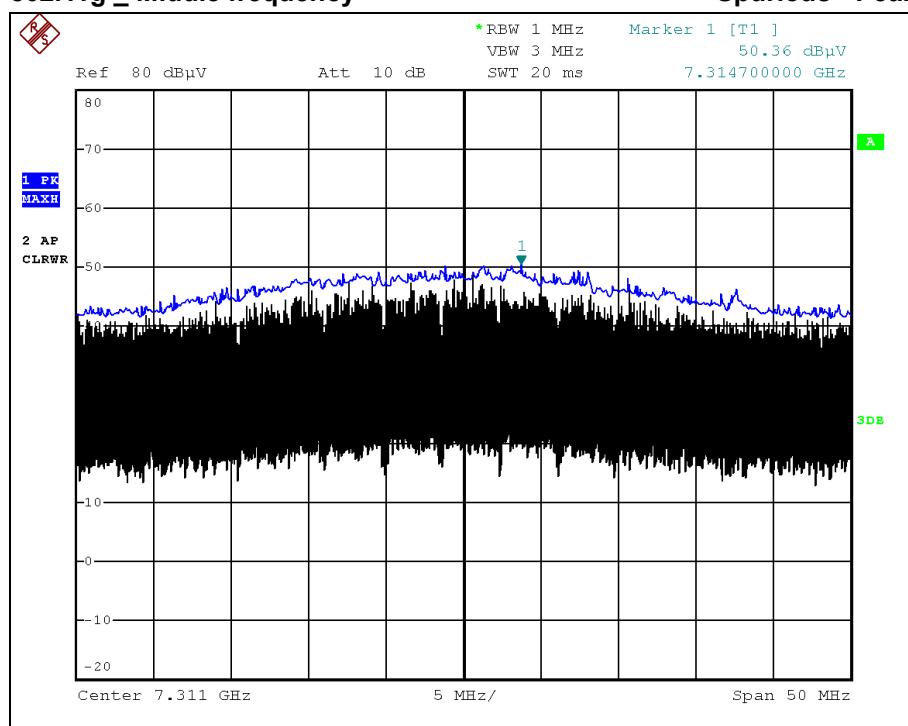

802.11g _ Middle frequency

Spurious - Average

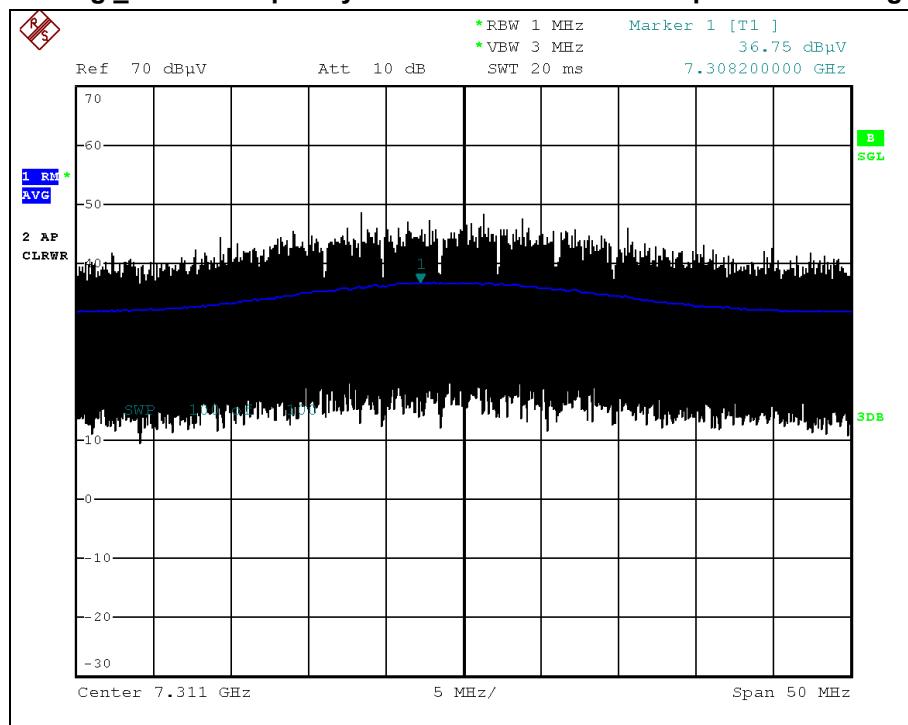


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ High frequency

Spurious - Peak

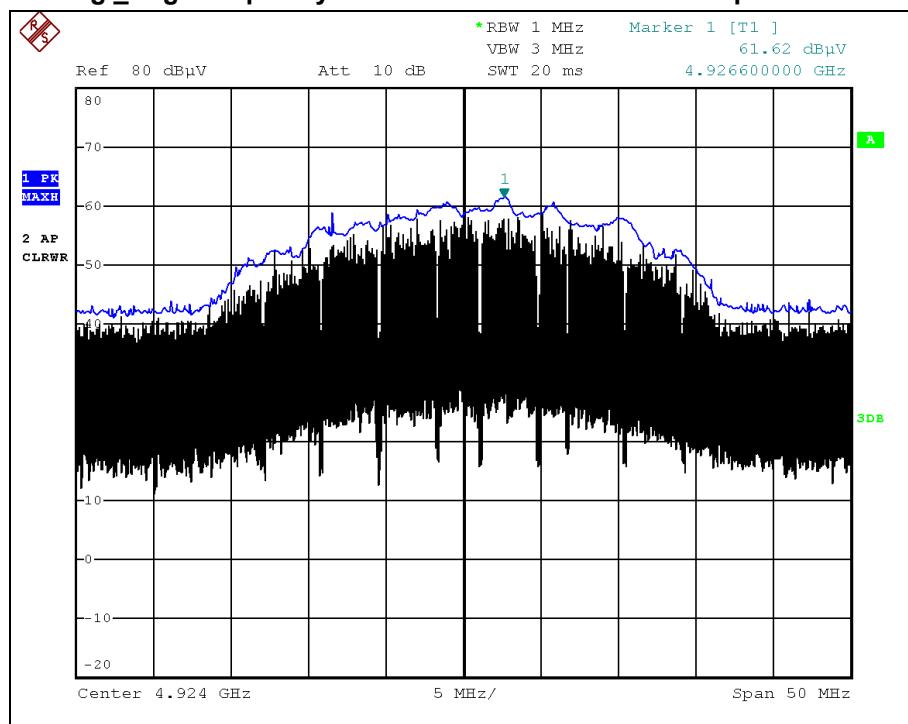

802.11g _ High frequency

Spurious - Average

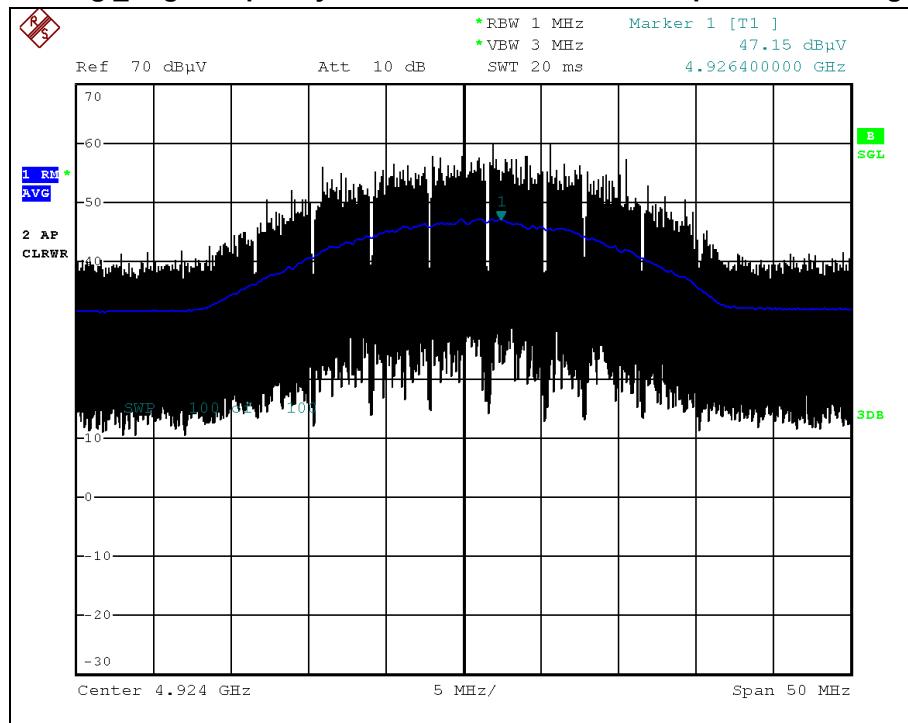


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ High frequency

Spurious - Peak

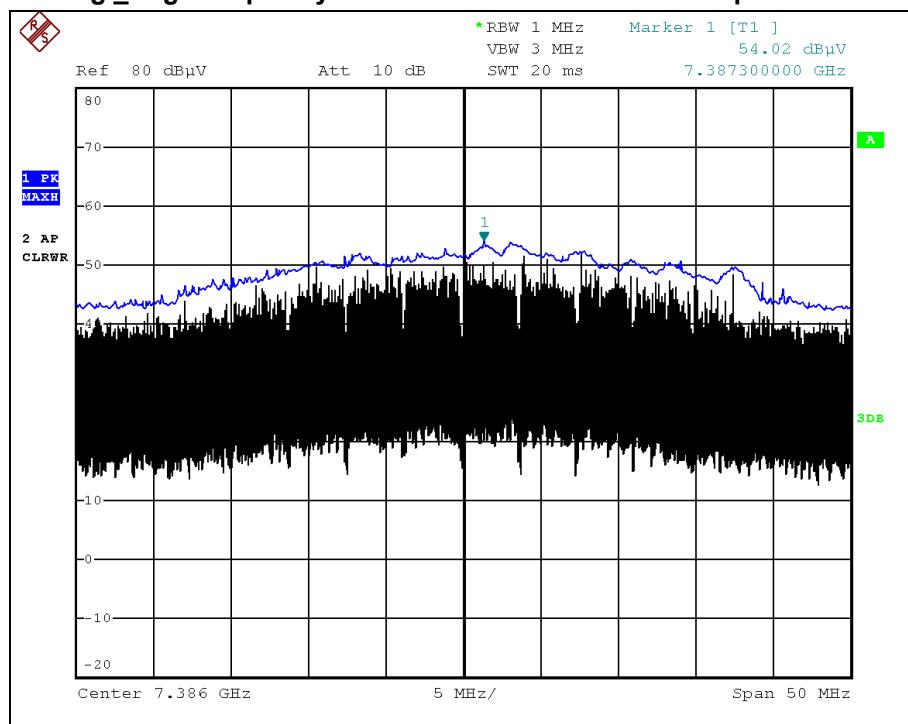

802.11g _ High frequency

Spurious - Average

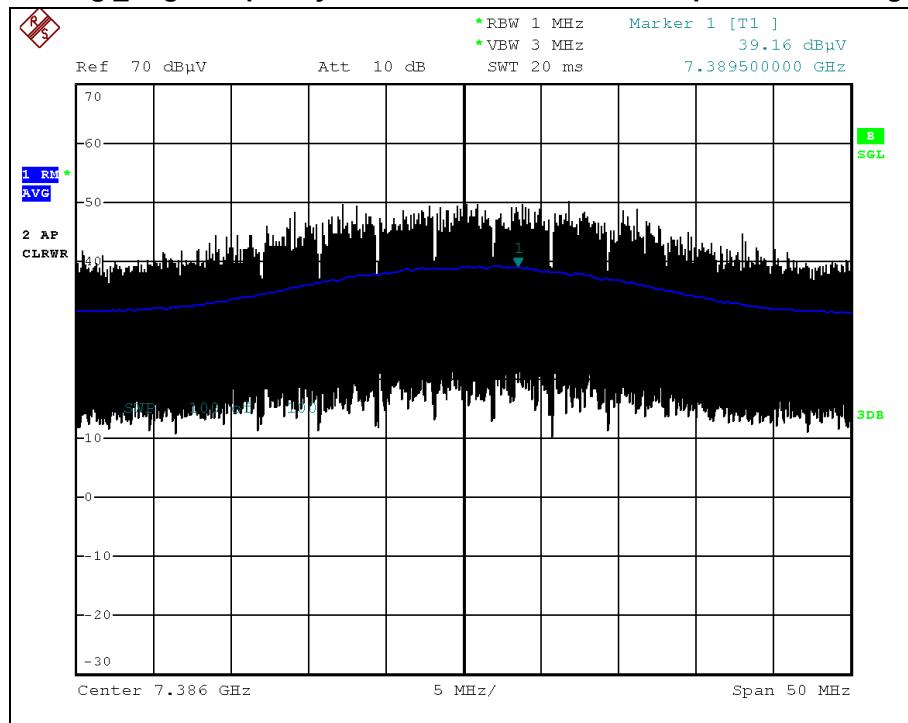


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

Spurious - Peak

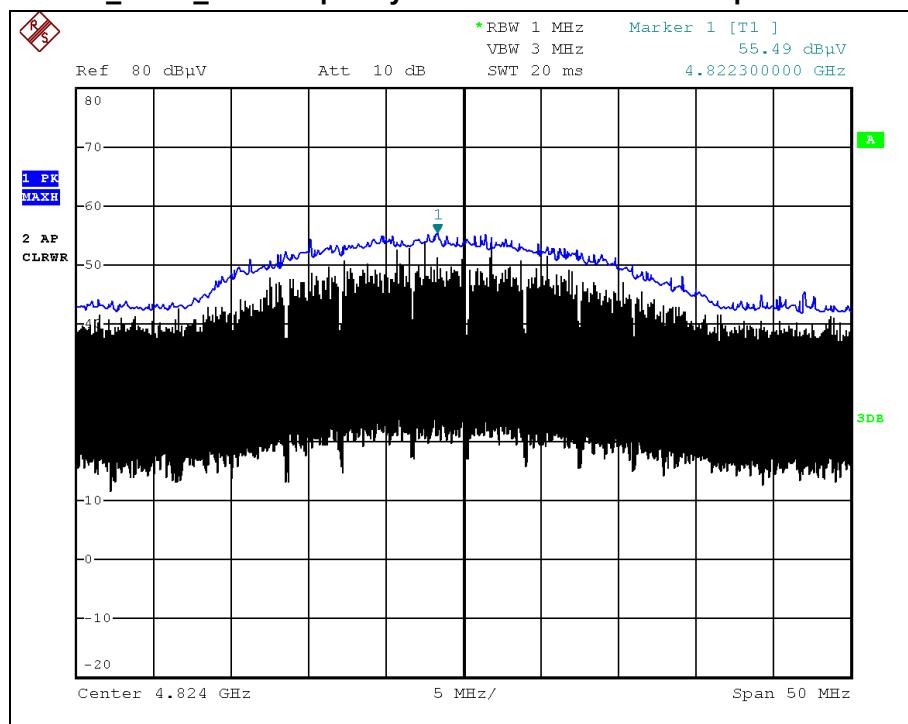

802.11n_HT20 _ Low frequency

Spurious - Average

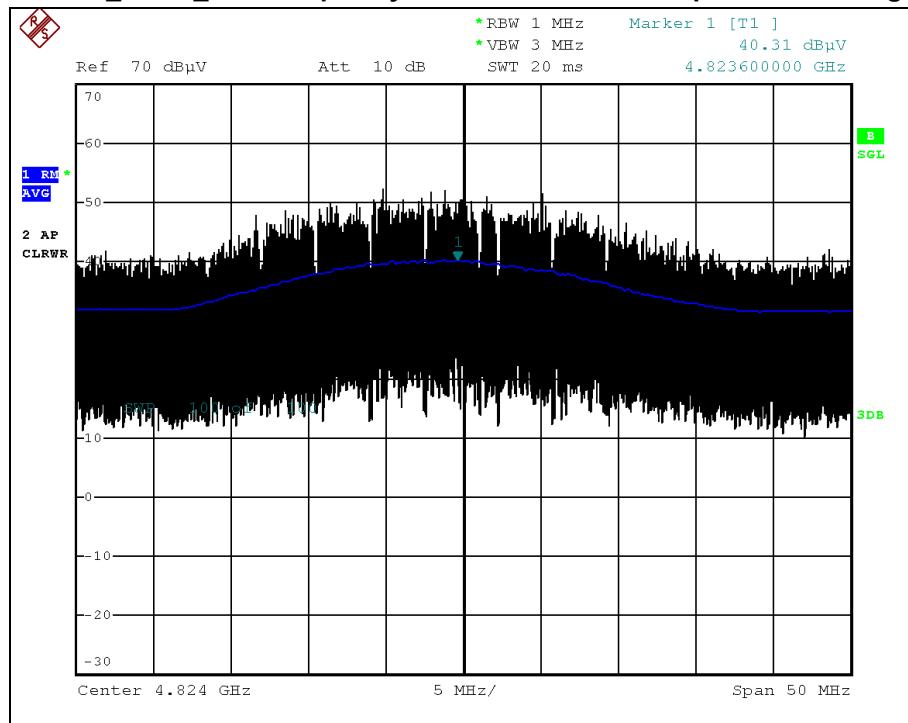


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

Spurious - Peak

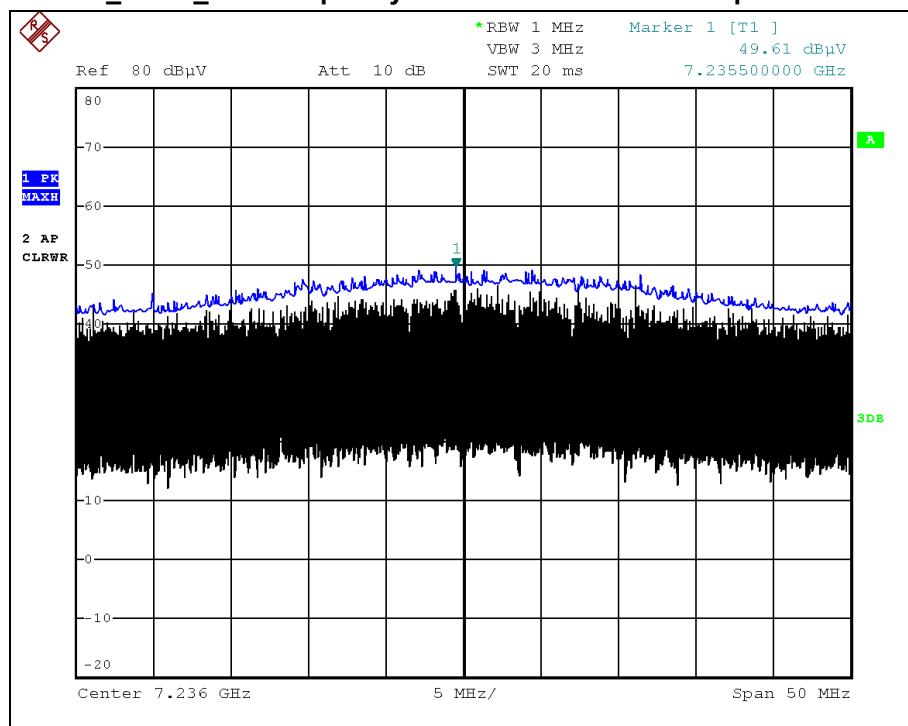

802.11n_HT20 _ Low frequency

Spurious - Average

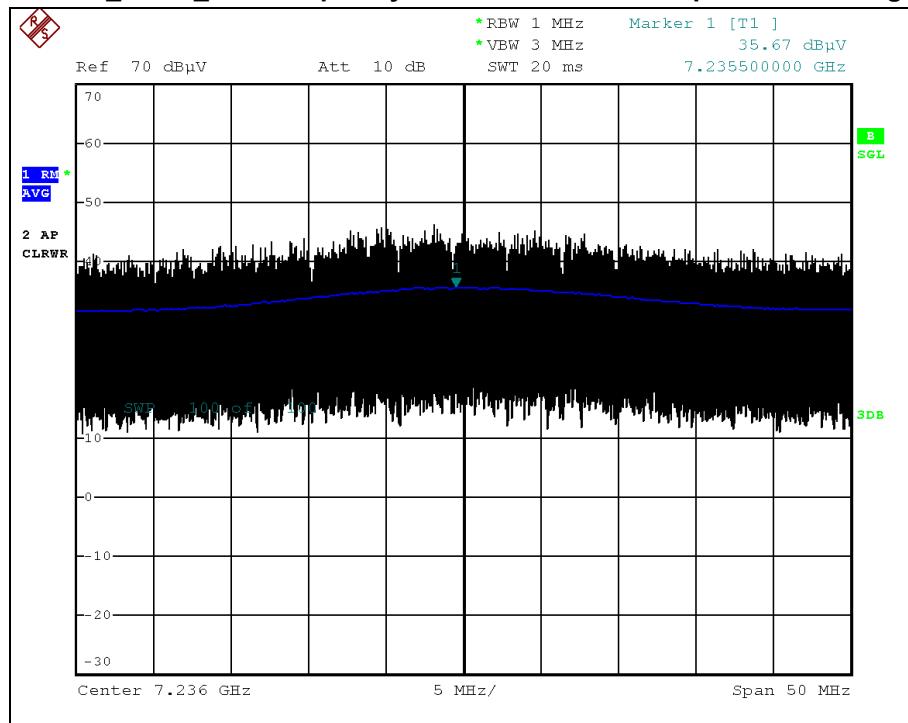


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Middle frequency

Spurious - Peak

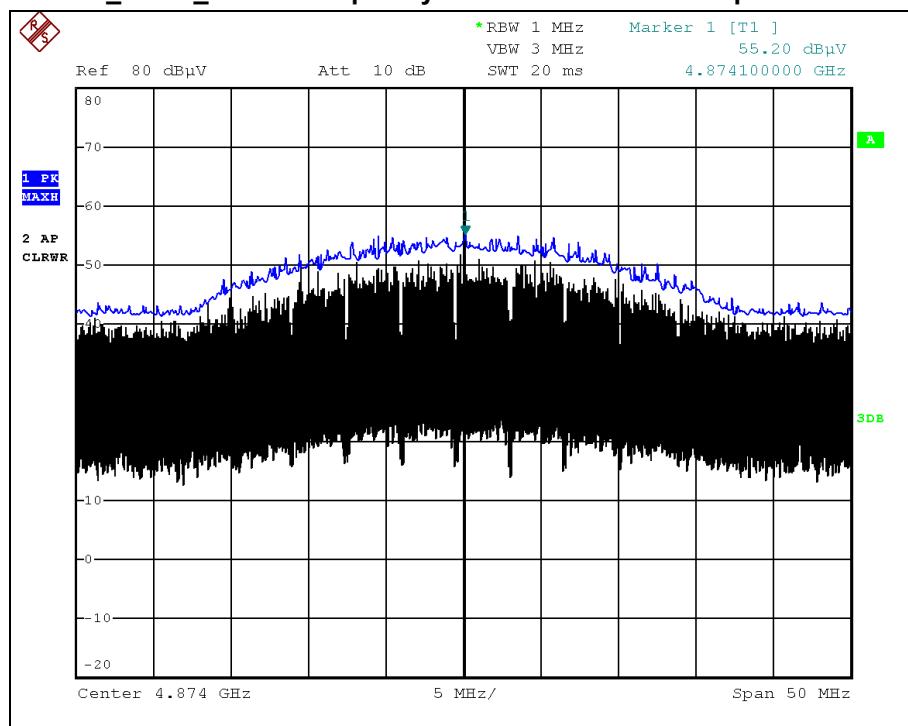

802.11n_HT20 _ Middle frequency

Spurious - Average

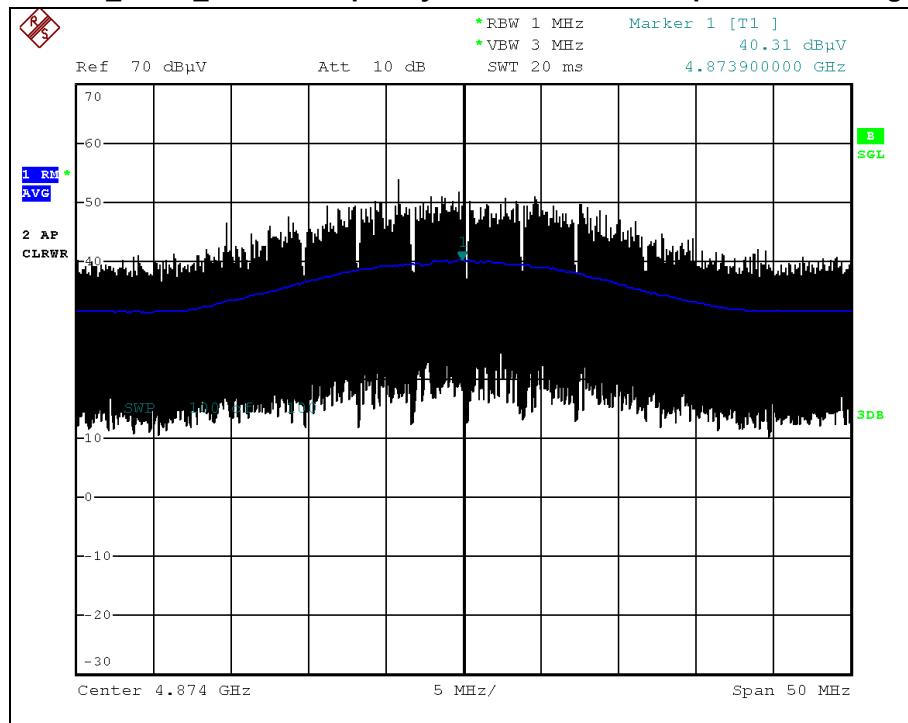


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Middle frequency

Spurious - Peak

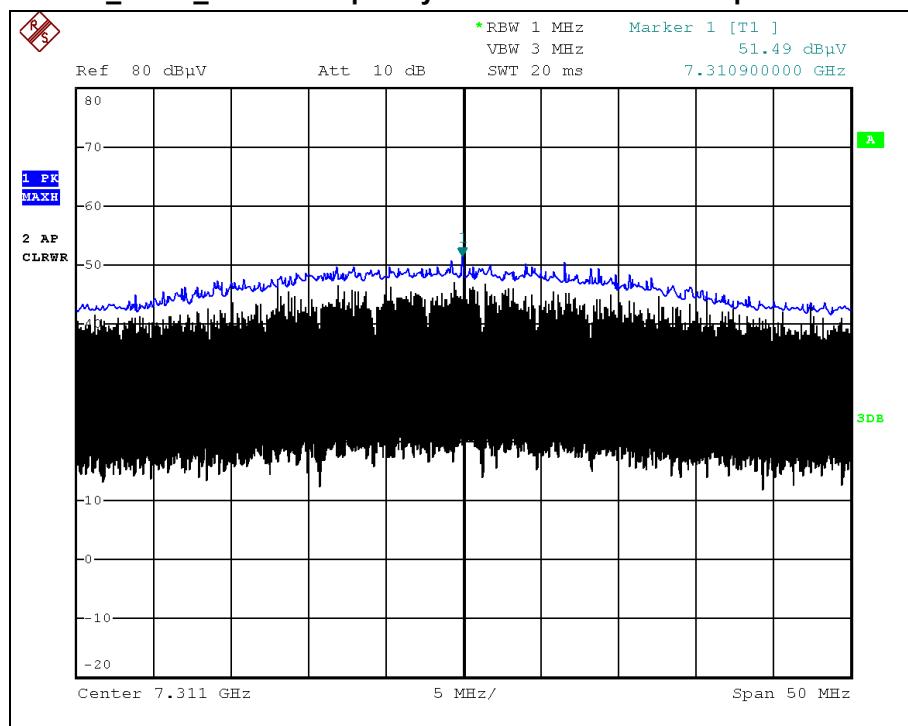

802.11n_HT20 _ Middle frequency

Spurious - Average

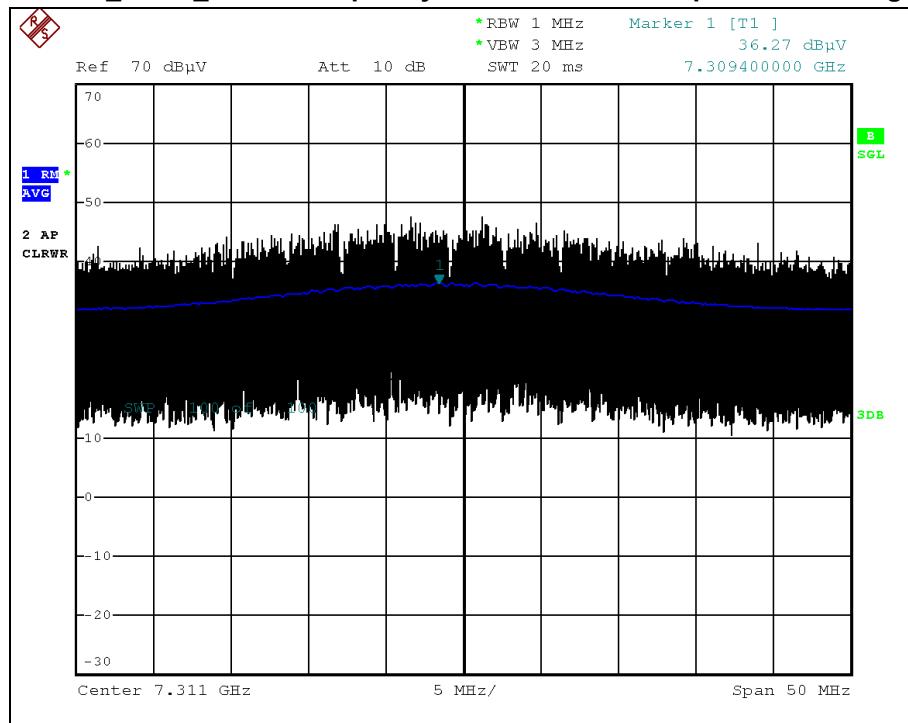


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ High frequency

Spurious - Peak

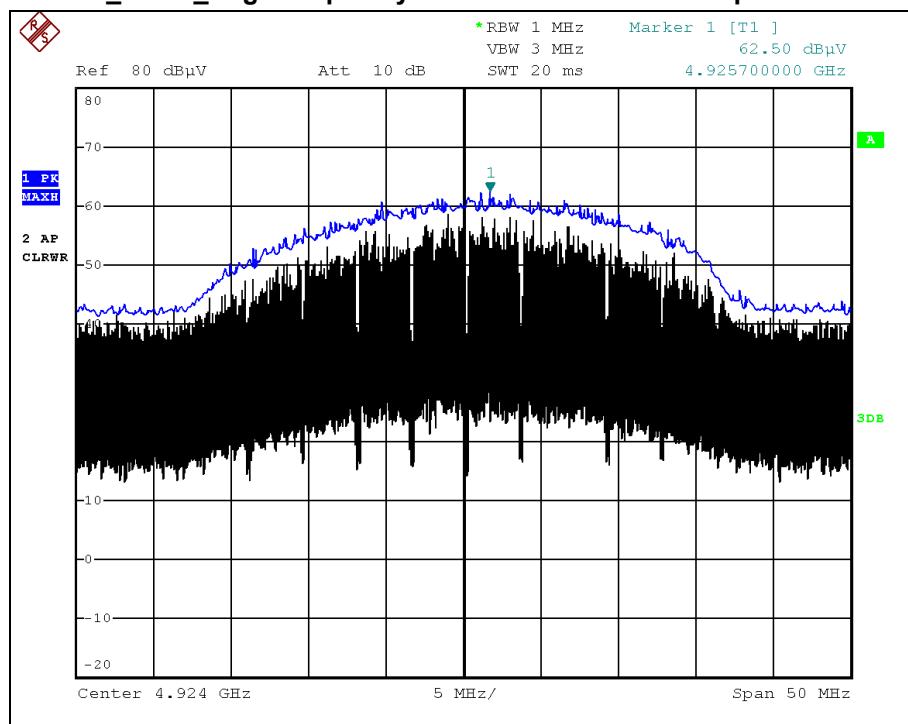

802.11n_HT20 _ High frequency

Spurious - Average

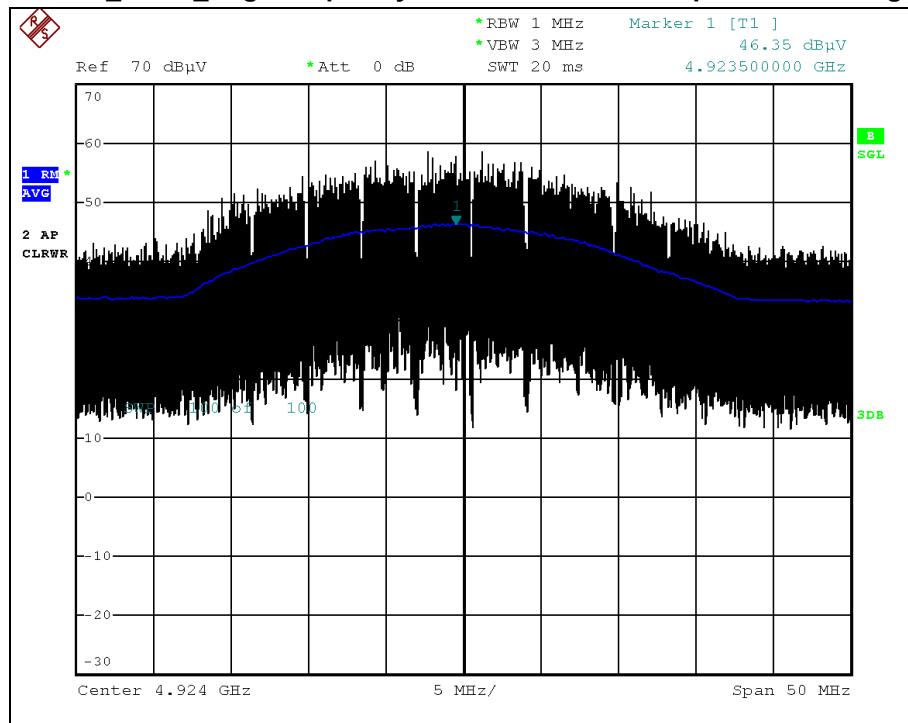


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ High frequency

Spurious - Peak

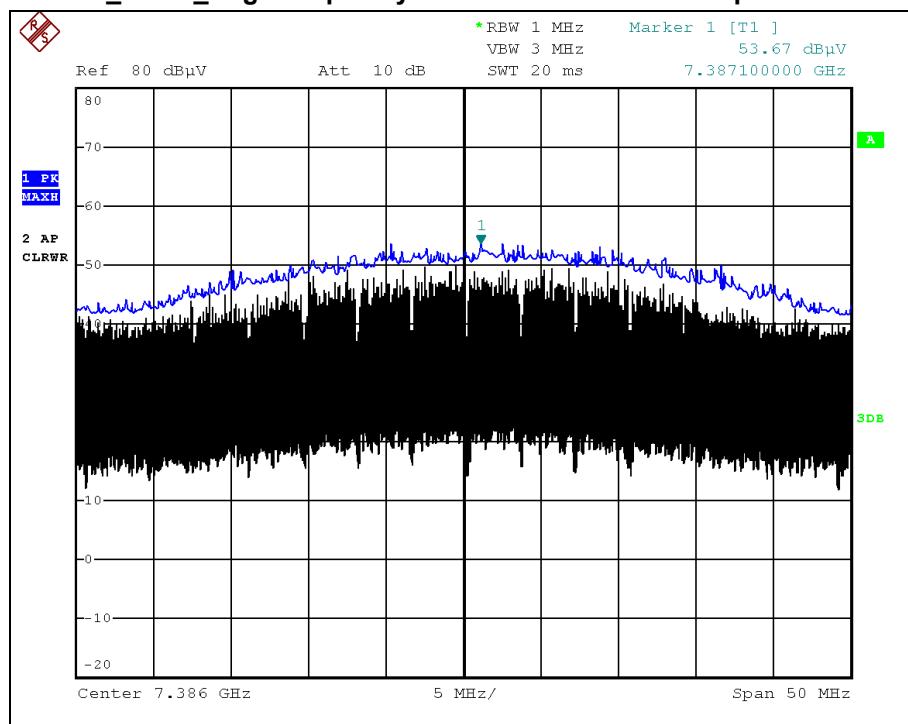

802.11n_HT20 _ High frequency

Spurious - Average

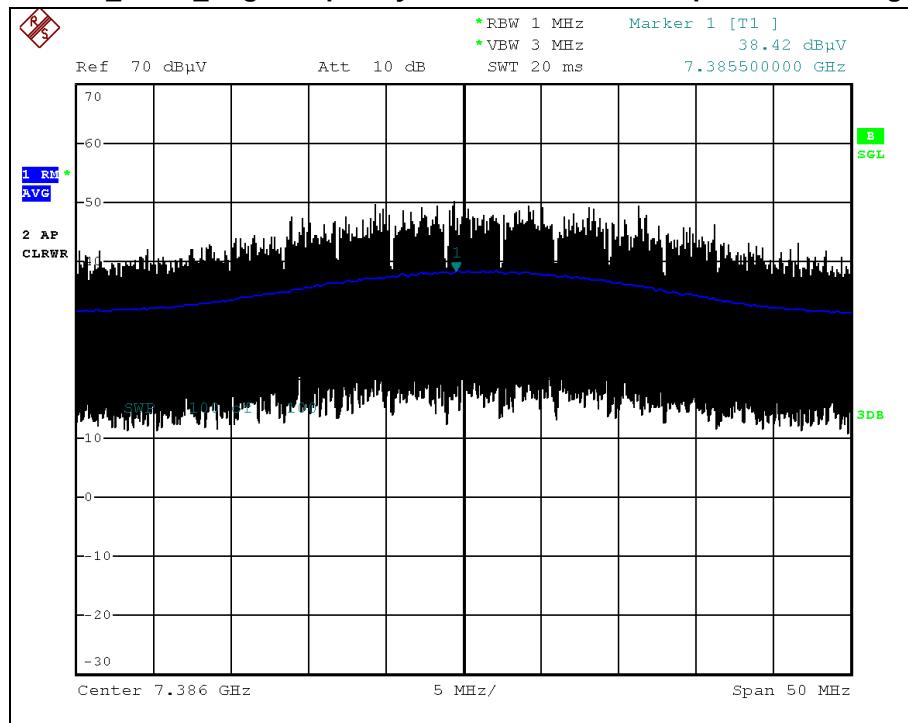


Test Report No.: NW2004-F002


211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.5.7 Test Plot for Conducted Spurious Emission

802.11b _ Low frequency

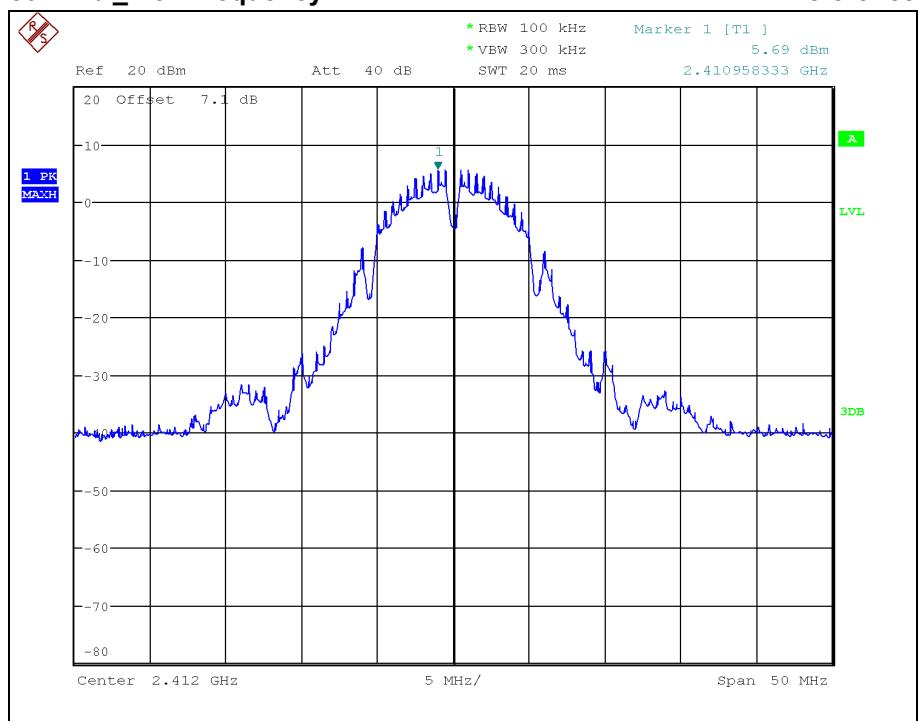


802.11b _ Low frequency

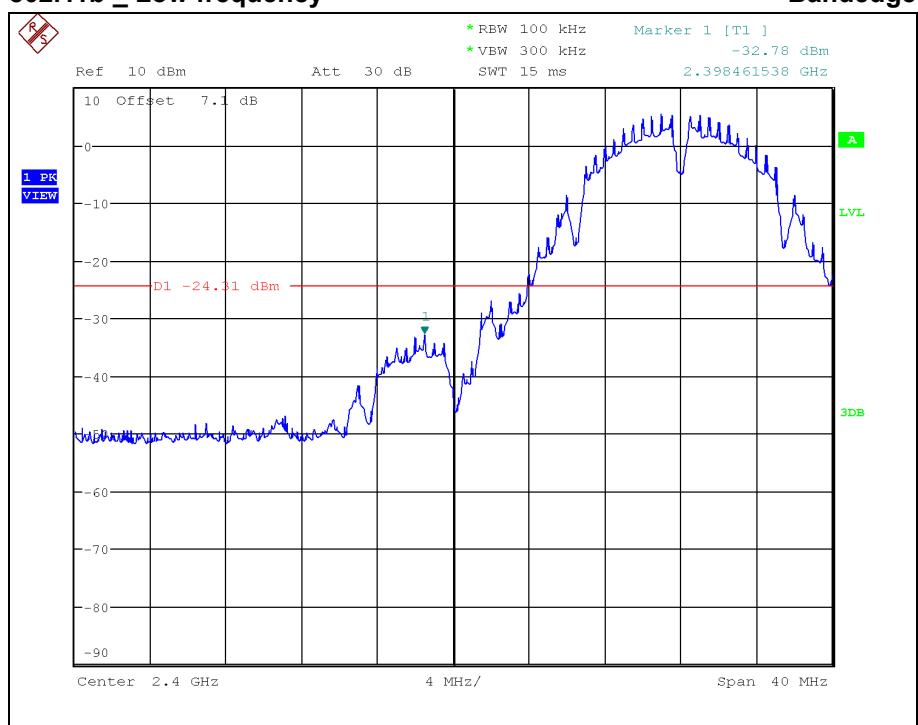


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11b _ Low frequency

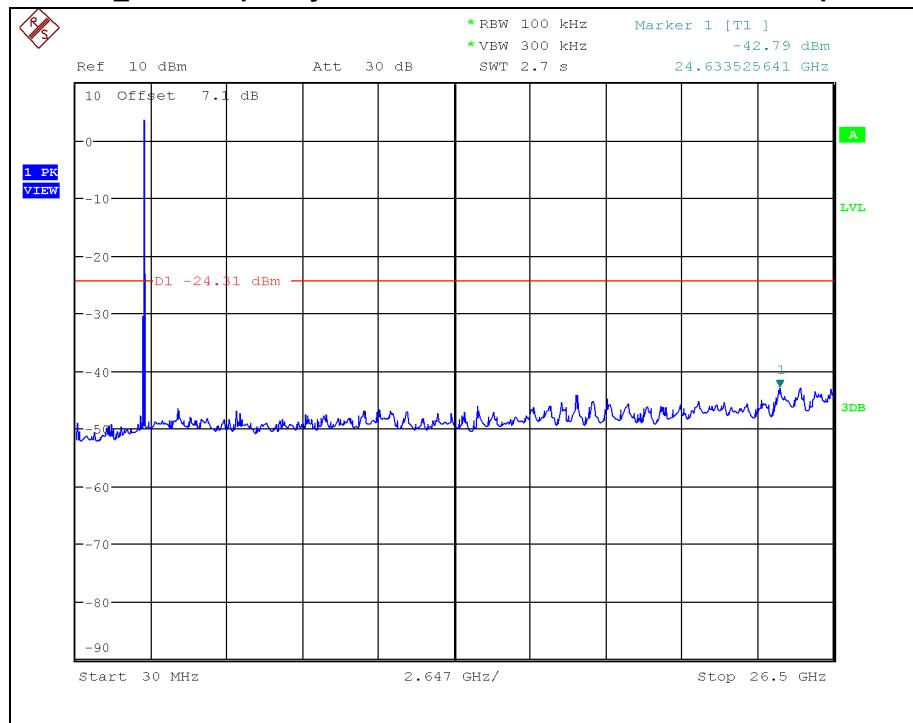


802.11b _ Middle frequency

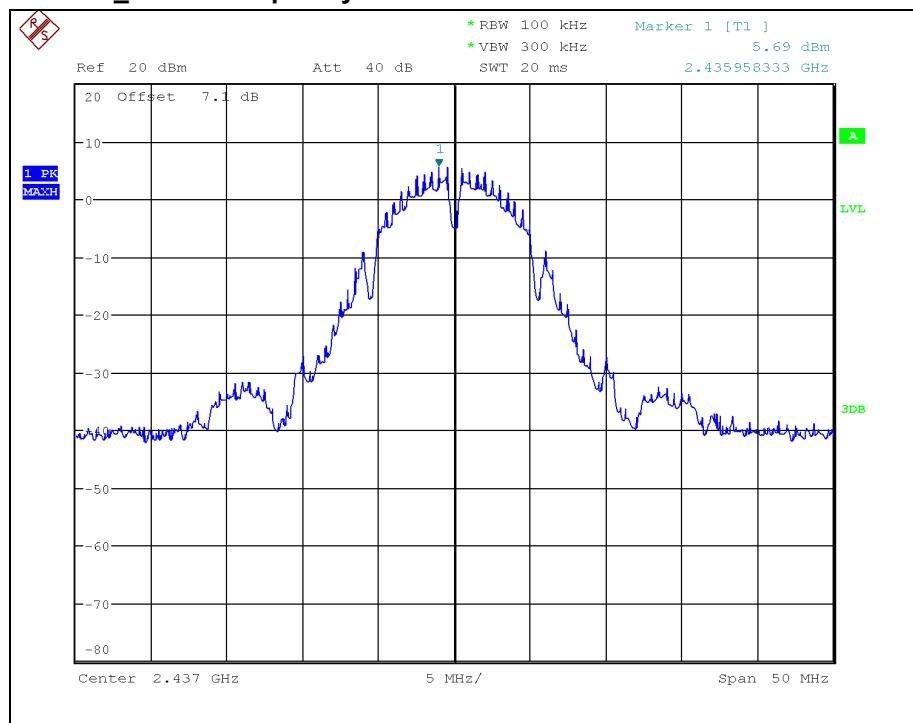


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11b _ Middle frequency

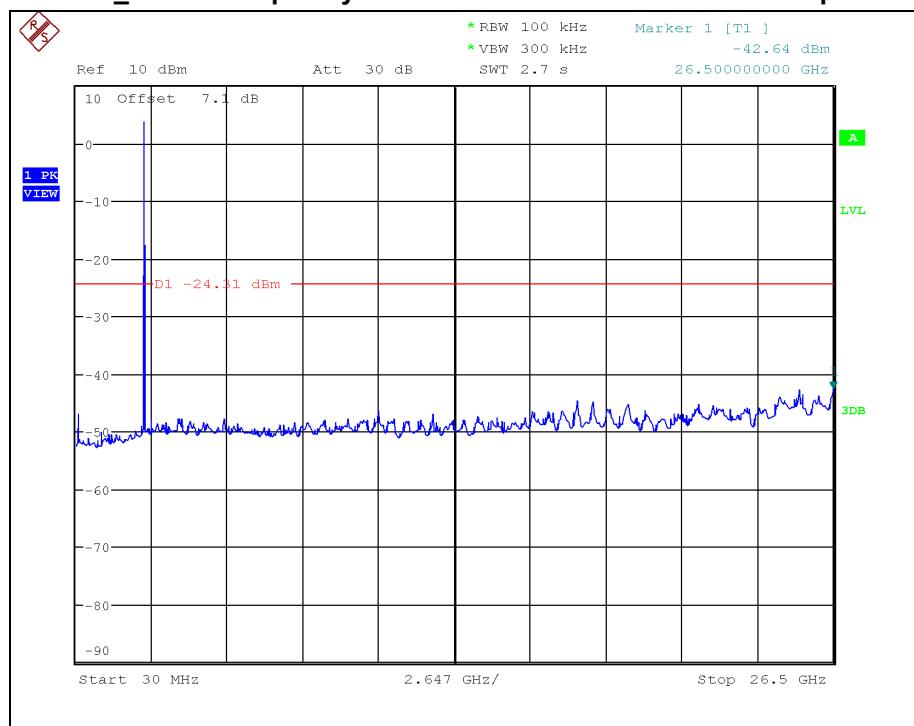

802.11b _ High frequency

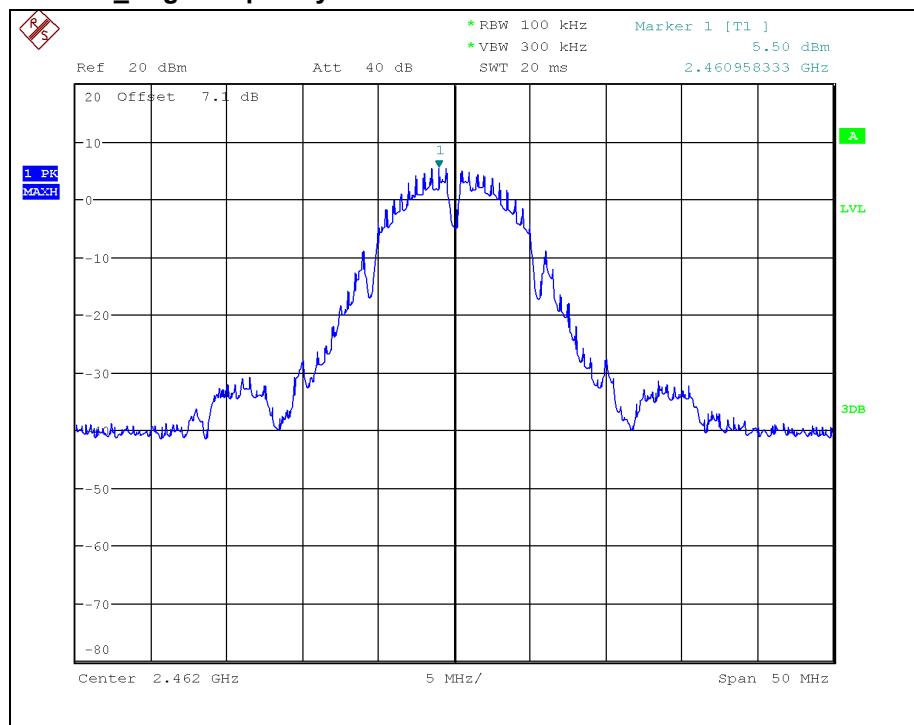


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11b _ High frequency

Bandedge

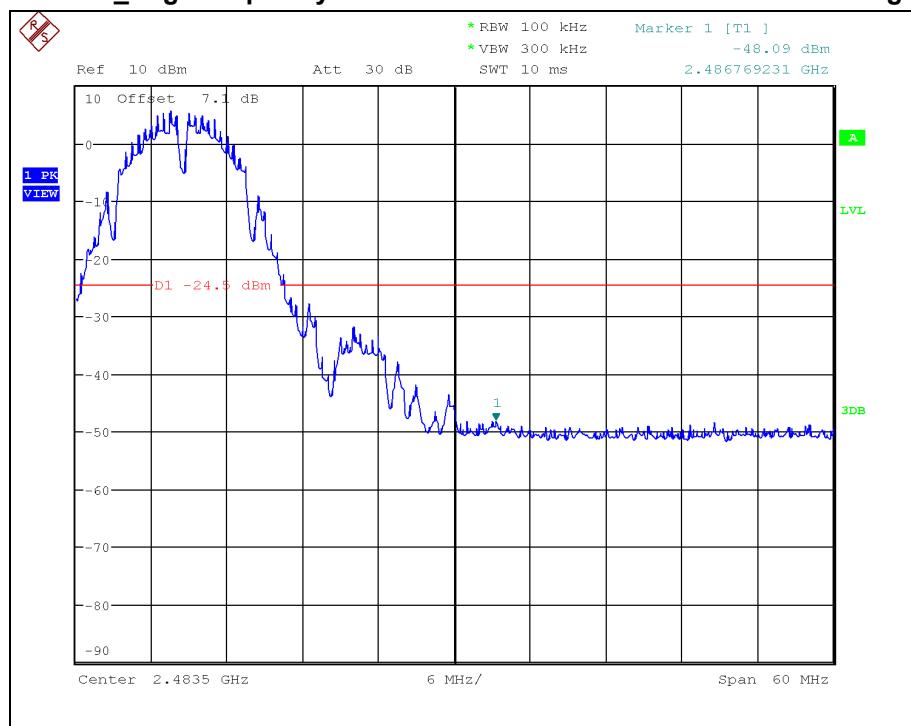

802.11b _ High frequency

Spurious

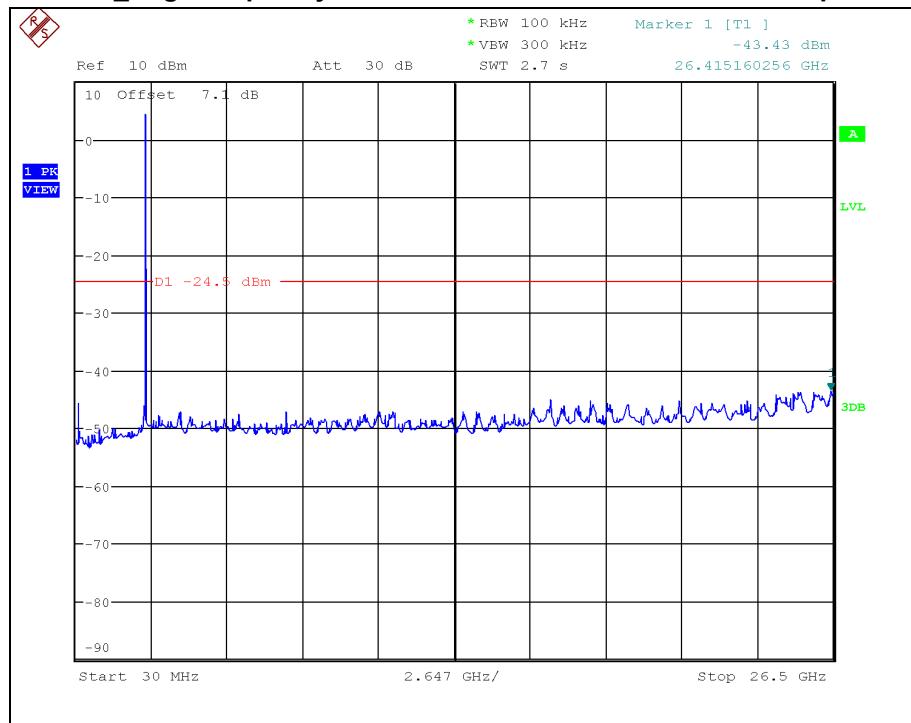


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11g _ Low frequency

Reference

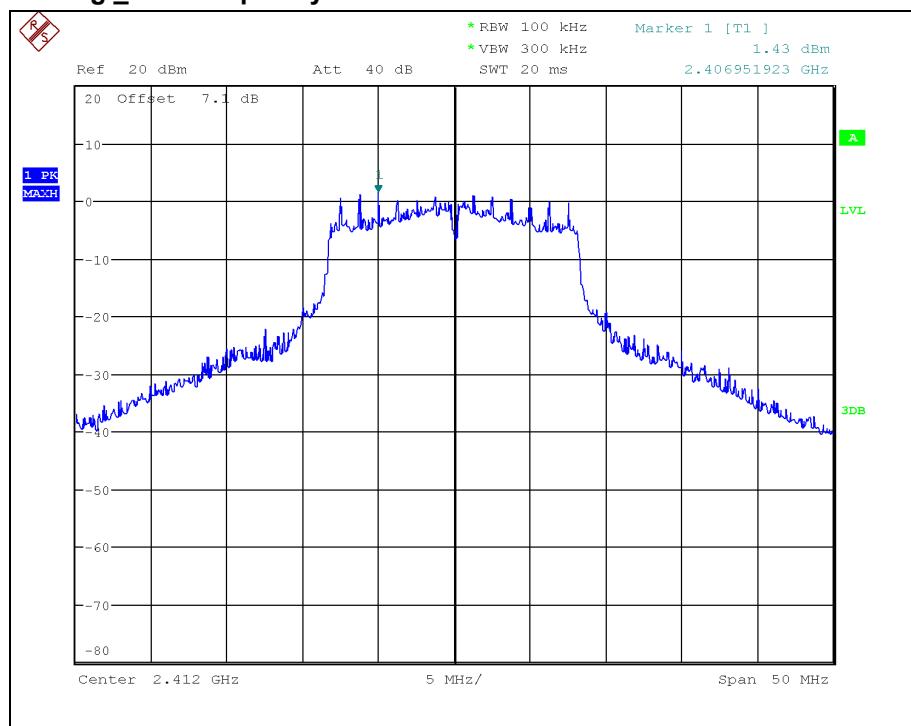

802.11g _ Low frequency

Bandedge

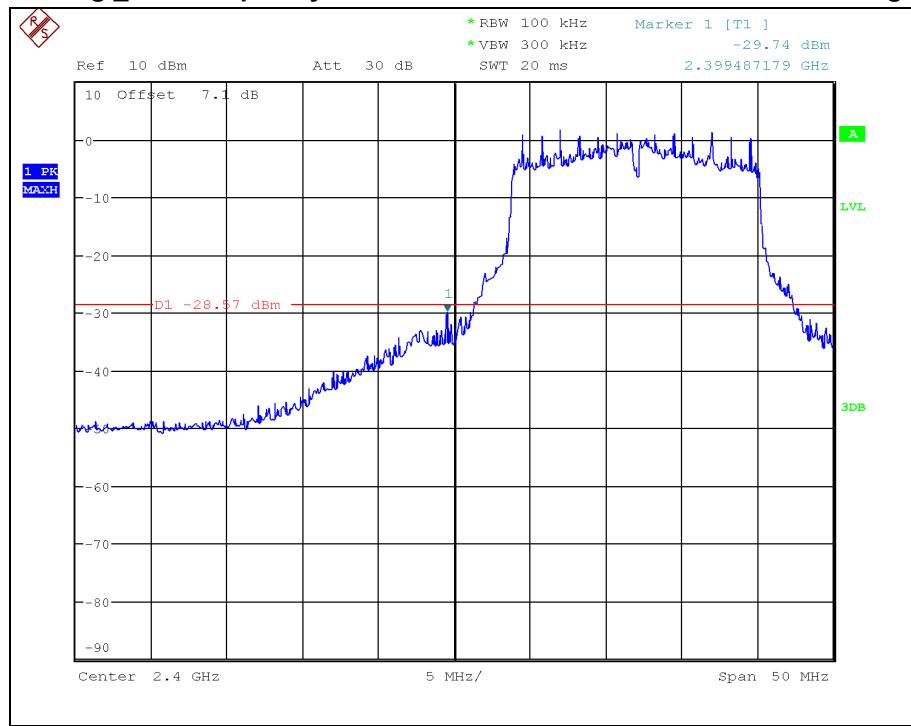


Test Report No.: NW2004-F002


211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11g _ Low frequency

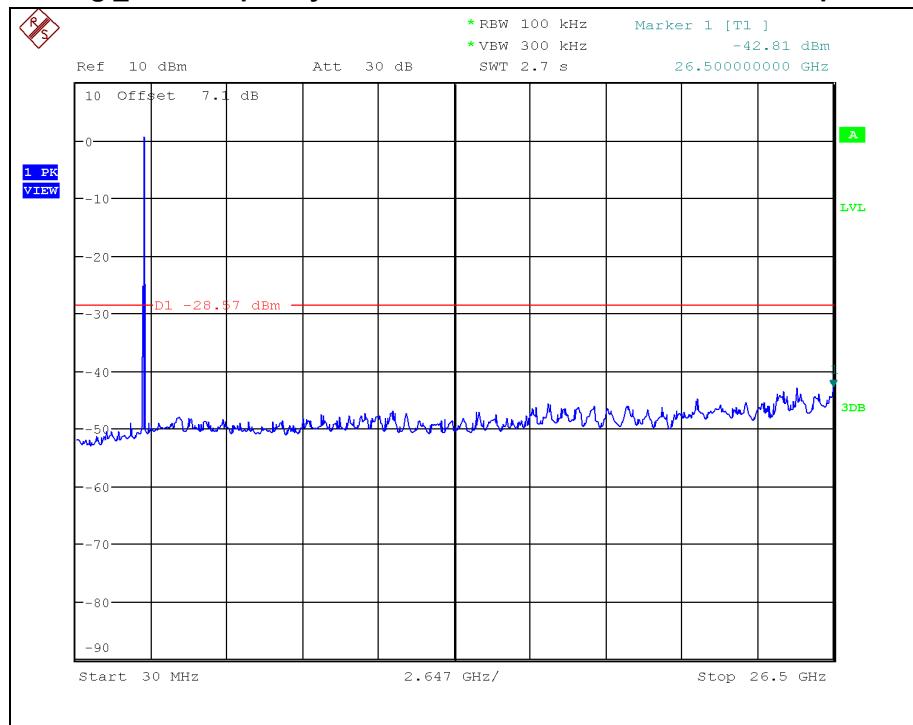


802.11g _ Middle frequency

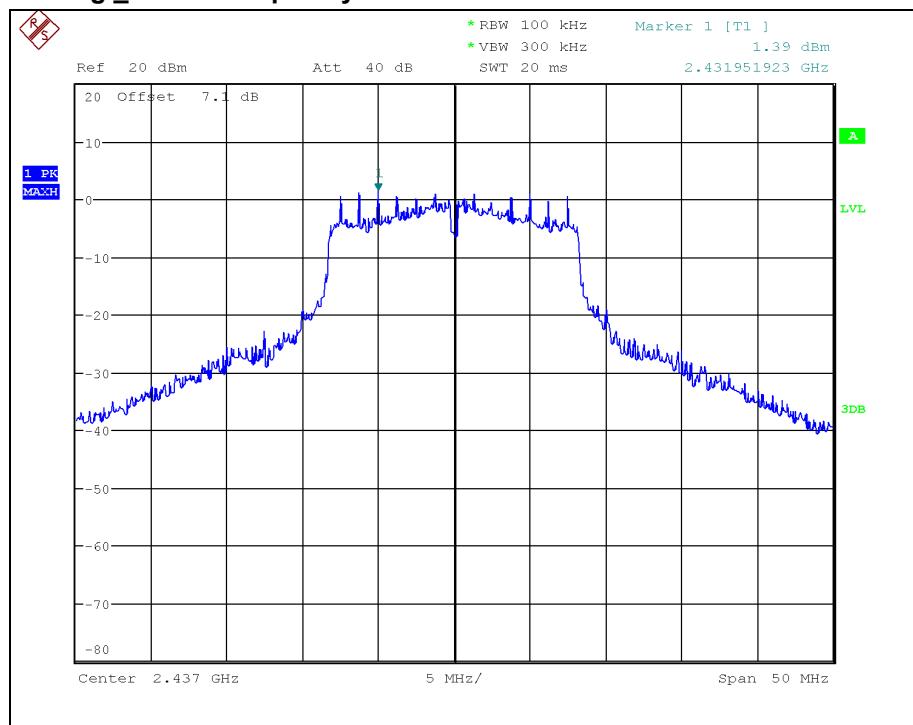


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11g _ Middle frequency

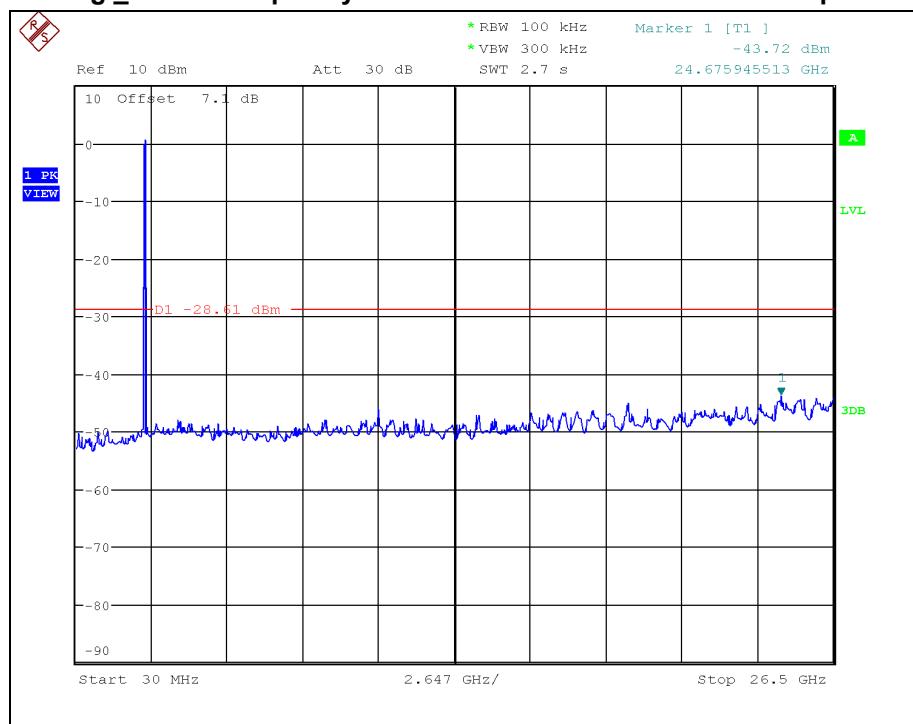


802.11g _ High frequency

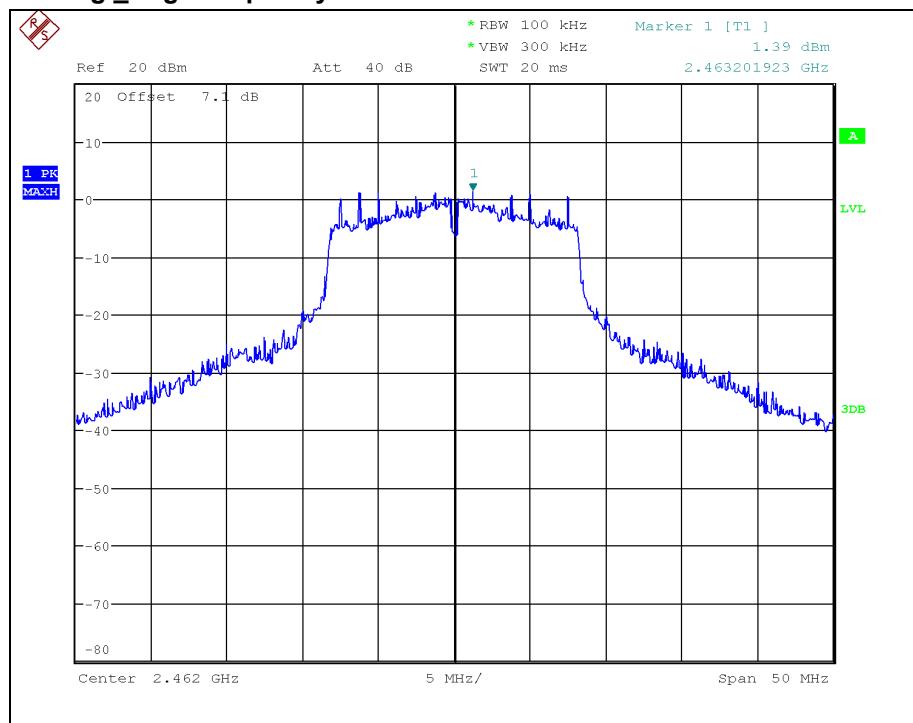


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11g _ High frequency

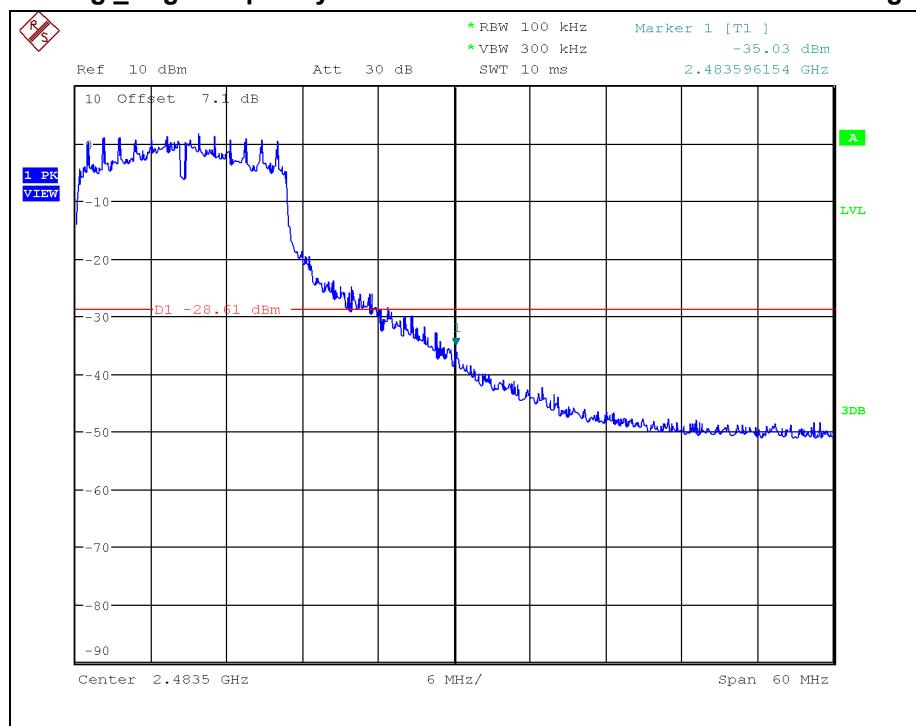

802.11g _ High frequency

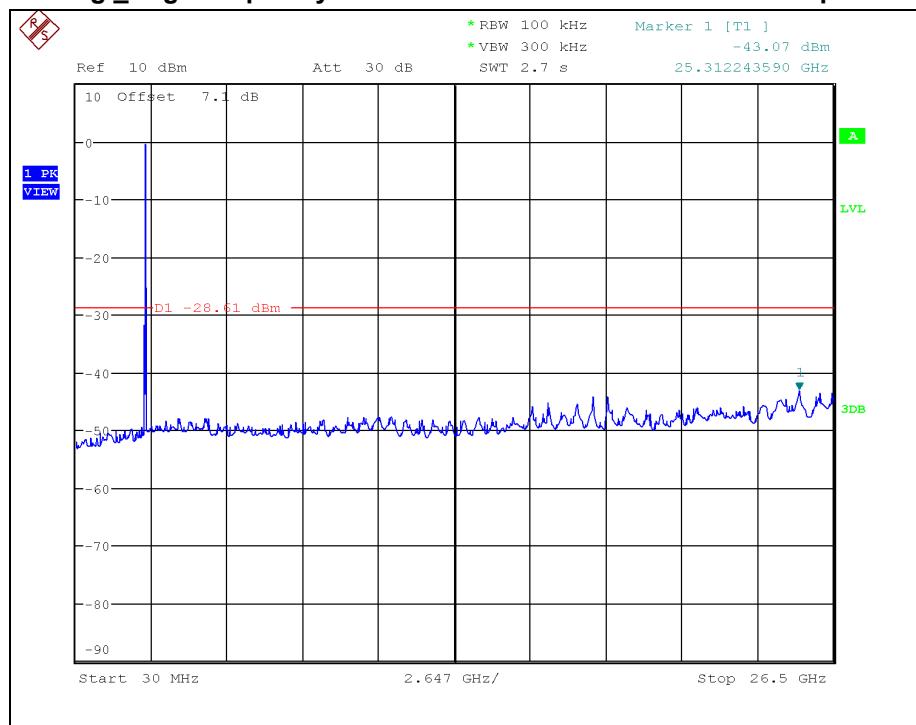


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ Low frequency

Reference

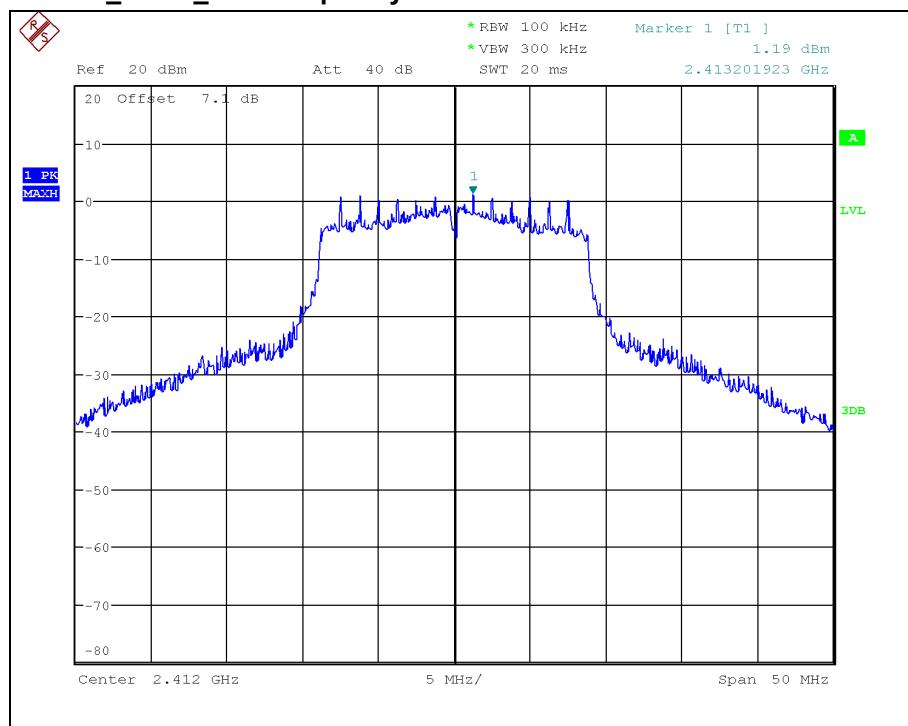

802.11n_HT20 _ Low frequency


Bandedge

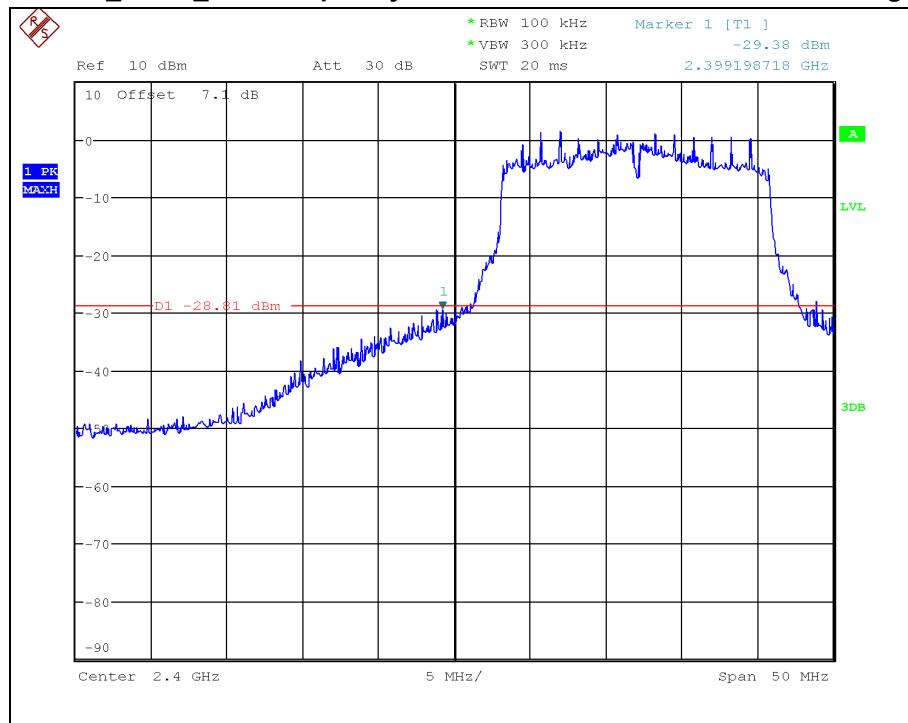


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20 _ Low frequency

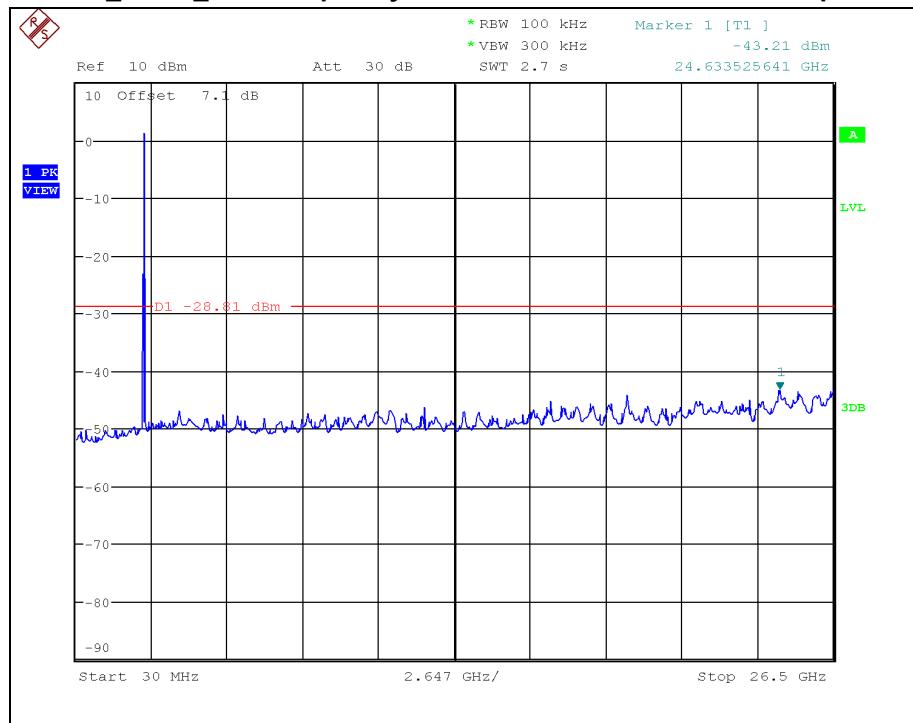


802.11n_HT20 _ Middle frequency

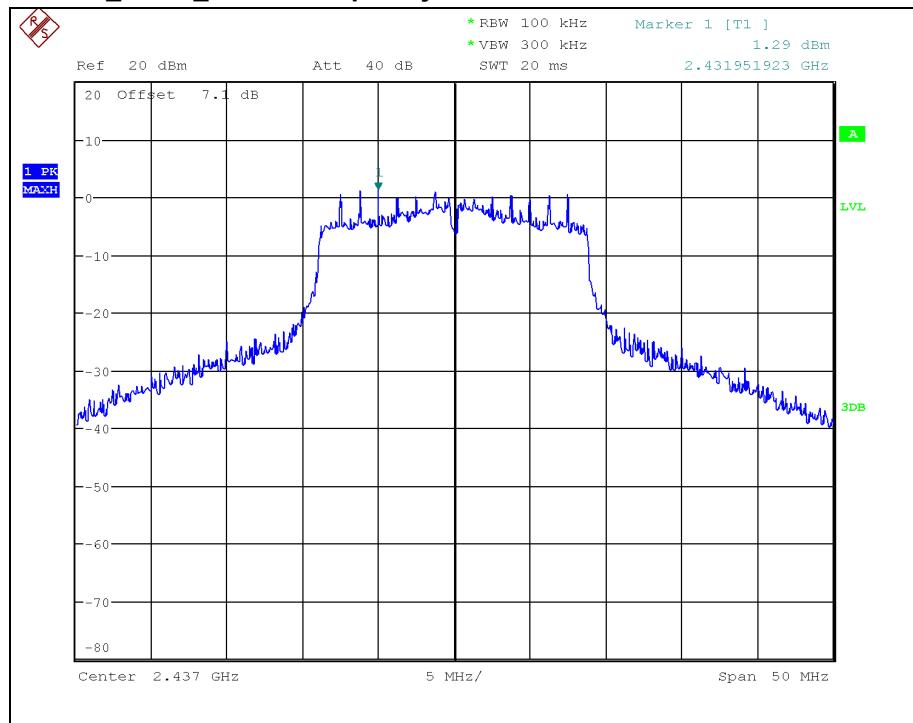


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20 _ Middle frequency

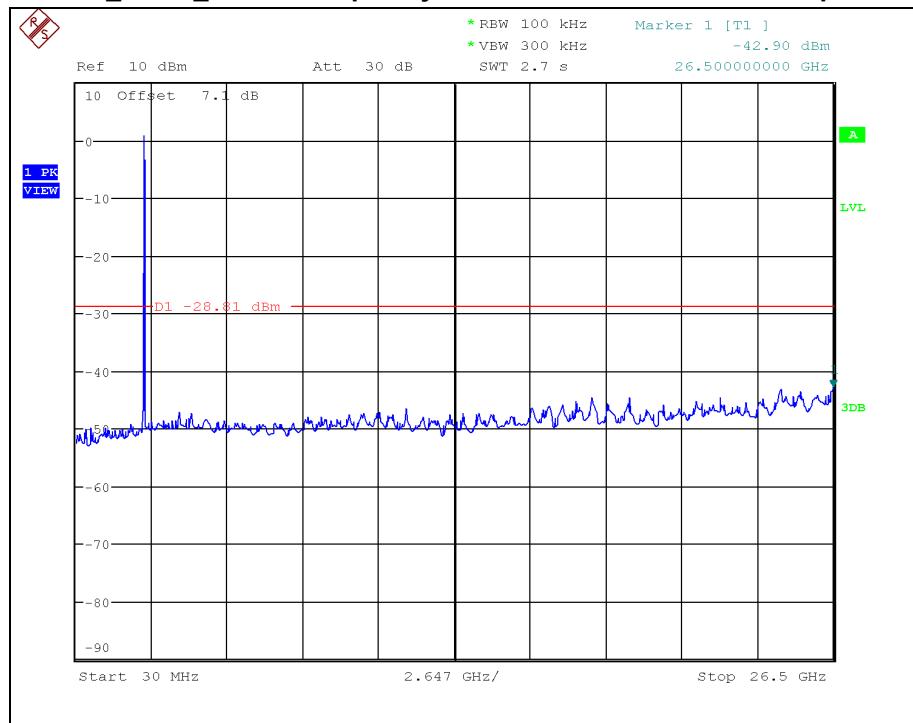


802.11n_HT20 _ High frequency

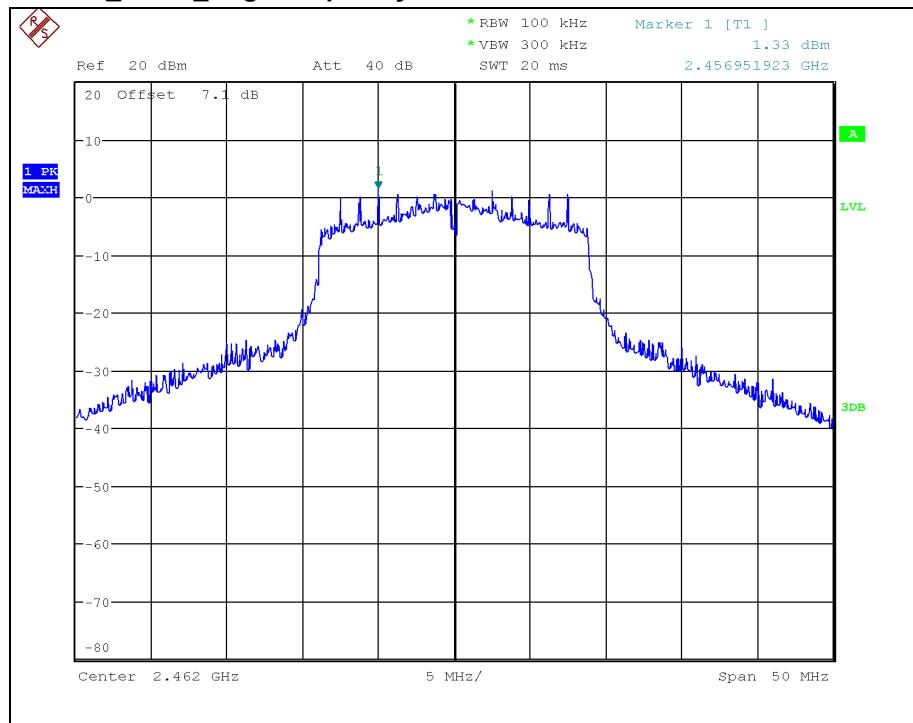


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20 _ High frequency

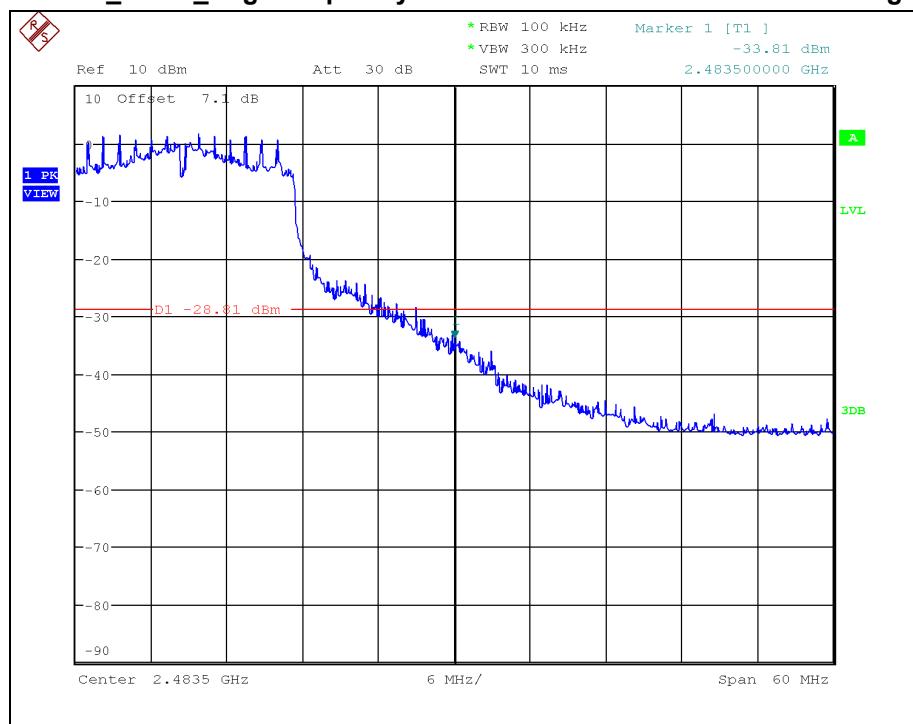

802.11n_HT20 _ High frequency

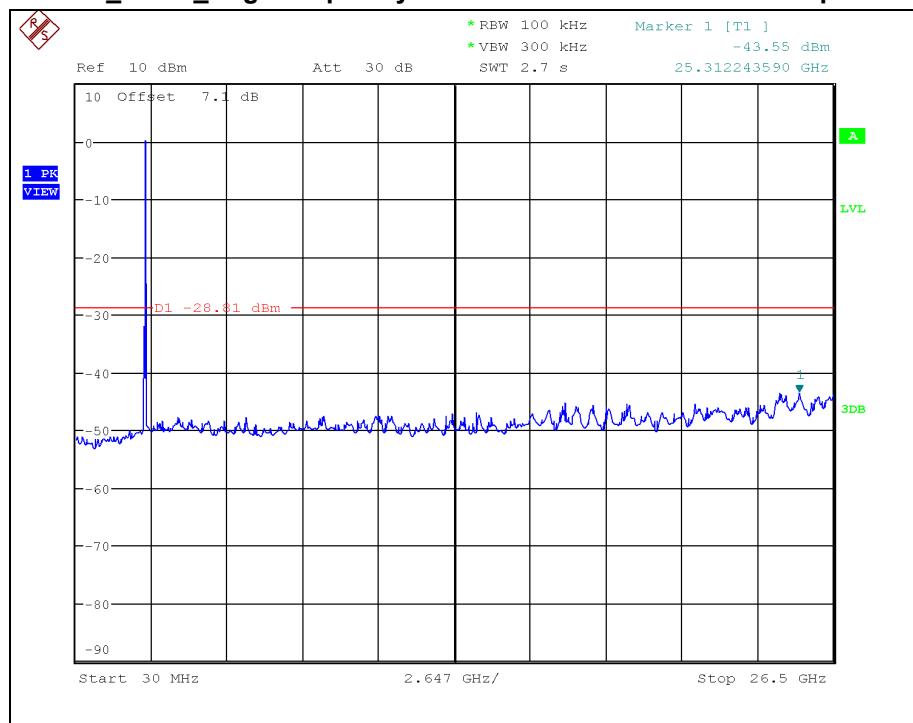

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.6 Conducted Emission

3.3.6.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

3.3.6.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz , shall not exceed the limits in the following table, as measured using a 50 μH /50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

3.3.6.3 Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a $6.5 \text{ m} \times 3.5 \text{ m} \times 3.5 \text{ m}$ ($L \times W \times H$) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) \times 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

3.3.6.4 Test Result

Not Applicable

(This product is only using DC power. So, AC conducted emission test has not been performed.)




APPENDIX I

TEST SETUP


Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

- Radiated Measurement

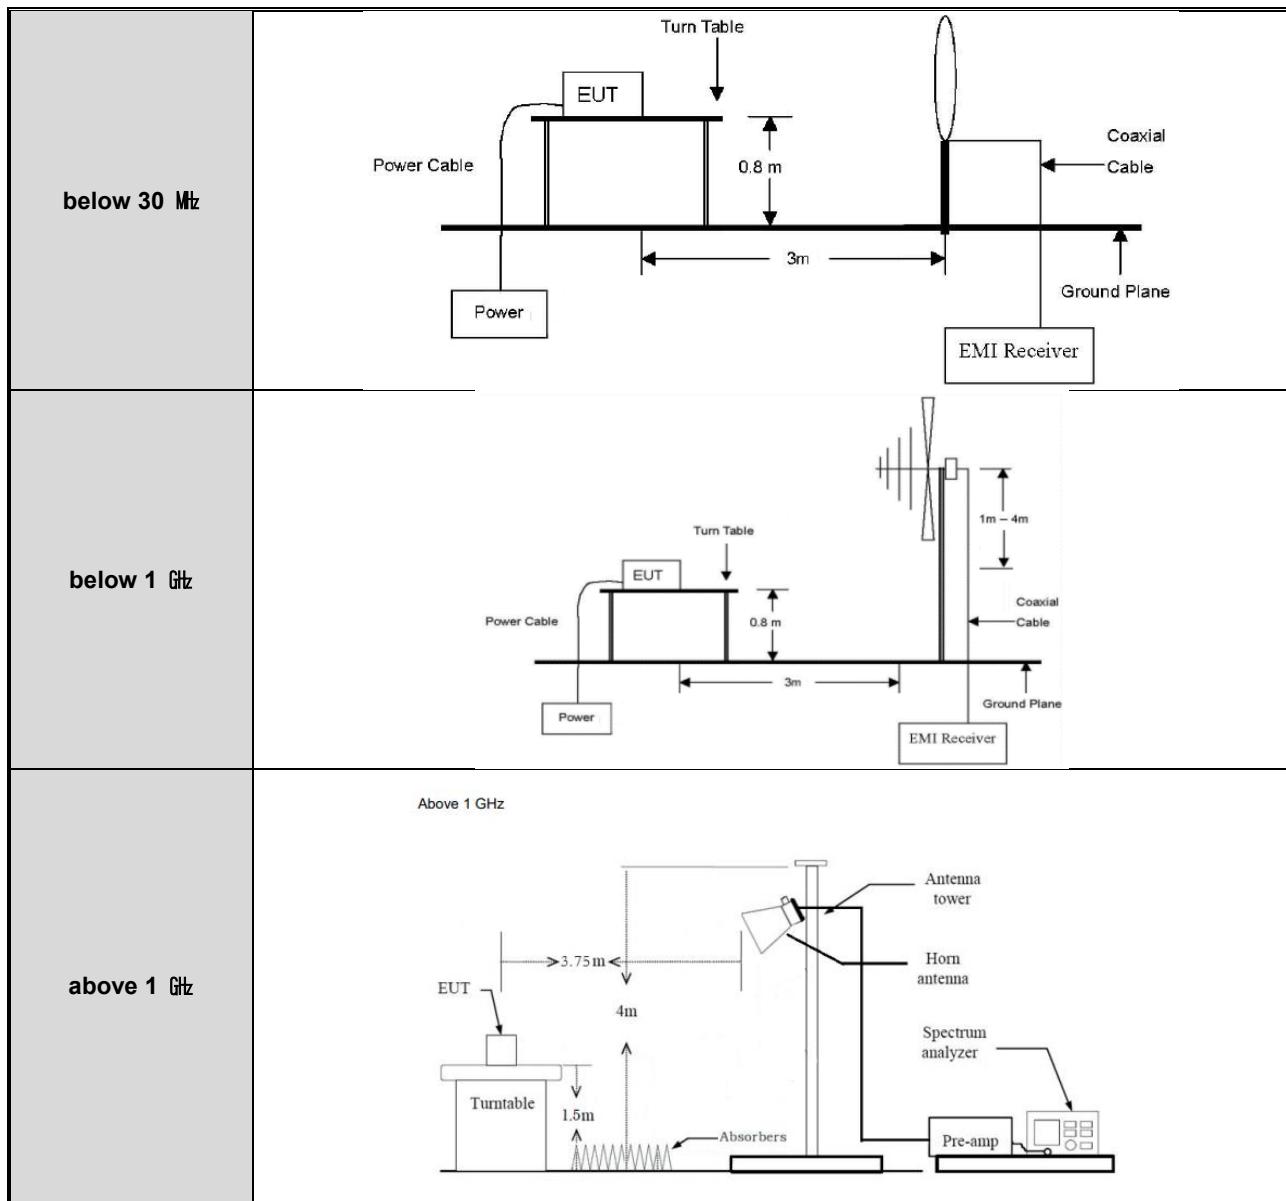

- Conducted Measurement

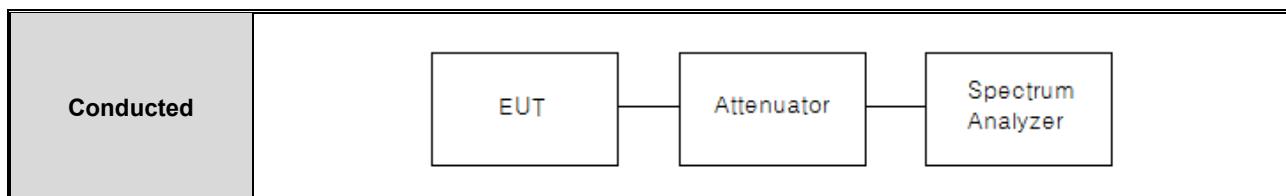

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



APPENDIX II

TEST EQUIPMENT USED FOR TESTS

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

	Description	Manufacturer	Serial No.	Model No.	Cal. Date	Next Cal. Date
1	SPECTRUM ANALYZER	R&S	100250	FSU26	2019-09-23	2020-09-23
2	SPECTRUM ANALYZER	R&S	100617	FSP40	2020-03-10	2021-03-10
3	USB Power sensor	Agilent	MY52500002	U2021XA	2020-03-10	2021-03-10
4	Humi./Baro/Temp. data recorder	Lutron	38420	MHB-382SD	2019-11-18	2020-11-18
5	Temperature & humidity cabinet	TERCHY	1060906	MHCB-64AZDA	2019-12-09	2020-12-09
6	SIGNAL GENERATOR	HP	3614A00312	83640B	2019-11-22	2020-11-22
7	Vector SG	R&S	255563	SMBV100A	2020-03-10	2021-03-10
8	Power supply	GWInstsk	EH120798	PST-3202	2020-03-10	2021-03-10
9	Triple Output DC Power Supply	Agilent	MY40038816	E3631A	2020-03-10	2021-03-10
10	ATTENUATOR	Agilent	08259	8493C	2020-03-11	2021-03-11
11	ATTENUATOR	Weinschel	none	WA1444-14	2020-03-11	2021-03-11
12	ATTENUATOR	Weinschel	none	WA41/12-30-12	2020-03-10	2021-03-10
13	Attenuator	BRACKE	1	BM10060.6	2019-11-15	2020-11-15
14	POWER DIVIDER	Agilent	11664	11636B	2020-03-11	2021-03-11
15	POWER DIVIDER	Agilent	51623	11636B	2020-03-11	2021-03-11
16	STEP ATTENUATOR	HP	2852A00842	8495D	2020-03-11	2021-03-11
17	TRILOG BroadBand Antenna	Schwarzbeck	01027	VULB 9168	2019-06-17	2020-06-17
18	TRILOG BroadBand Antenna	Schwarzbeck	01029	VULB 9168	2019-06-20	2020-06-20
19	Double Ridged BroadBand Horn Antenna	Schwarzbeck	02087	BBHA 9120D	2019-07-26	2020-07-26
20	Double Ridged BroadBand Horn Antenna	Schwarzbeck	02086	BBHA 9120D	2019-07-26	2020-07-26
21	BroadBand Horn Antenna	Schwarzbeck	00938	BBHA 9170	2019-07-10	2020-07-10
22	BroadBand Horn Antenna	Schwarzbeck	00937	BBHA 9170	2019-07-10	2020-07-10
23	Amplifier	TESTEK	190007-L	TK-PA18H	2019-05-29	2020-05-29
24	Amplifier	TESTEK	190008-L	TK-PA1840H	2019-06-03	2020-06-03
25	LOOP-ANTENNA	Schwarzbeck	00124	FMZB1519 B	2019-06-27	2020-06-27
26	LISN	Schwarzbeck	00984	NSLK 8127	2019-06-20	2020-06-20
27	EMI Test Receiver	R&S	102116	ESRP3	2019-07-24	2020-07-24

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



APPENDIX III

DUTY CYCLE CORRECTION FACTOR

Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Test Procedure



Duty Cycle [X = On Time / (On + Off time)] is measured using Measurement Procedure of KDB558074 D01v05r02

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW \geq RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 (T = On time of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

Test Result

Test Mode	Data Rate	Test Channel	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor (dB)	50/T (kHz)
			On Time (ms)	(On+Off) Time (ms)	x		
802.11b	1 Mbps	6	8.404	8.538	0.984	0.07	5.95
802.11g	6 Mbps	6	1.377	1.511	0.911	0.41	36.32
802.11ac _VHT40	MCS 0	6	1.288	1.415	0.911	0.41	38.81

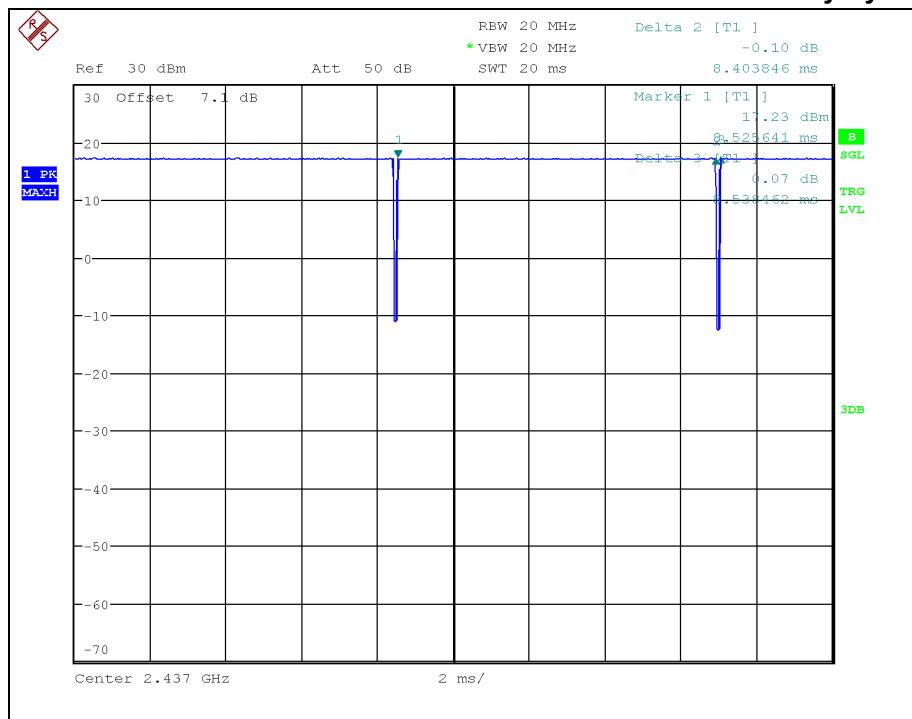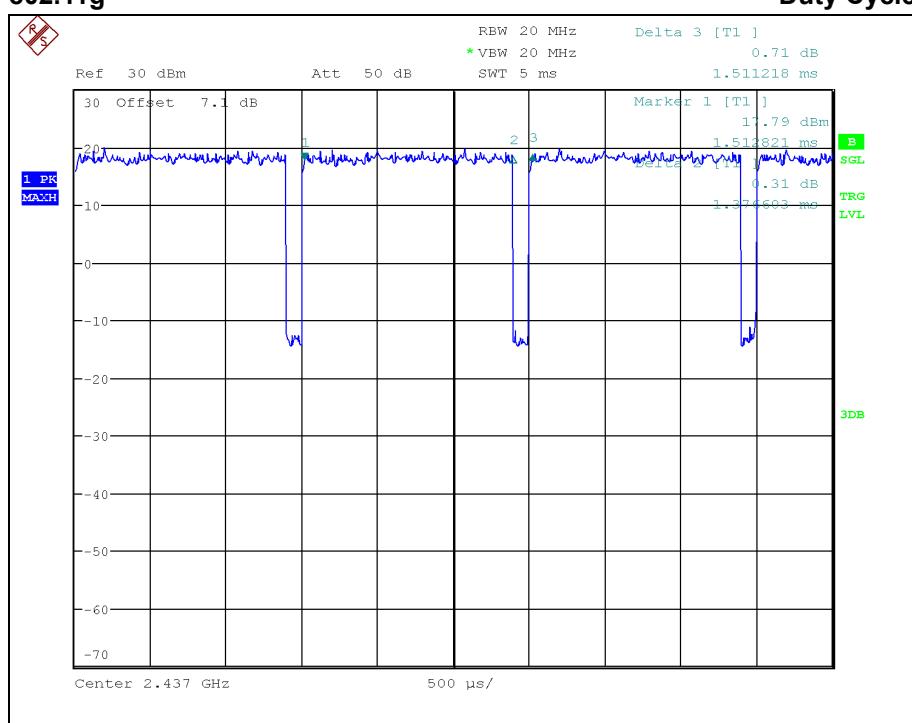
Test Plot
802.11b

802.11g


 Test Report No.: NW2004-F002

 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT20

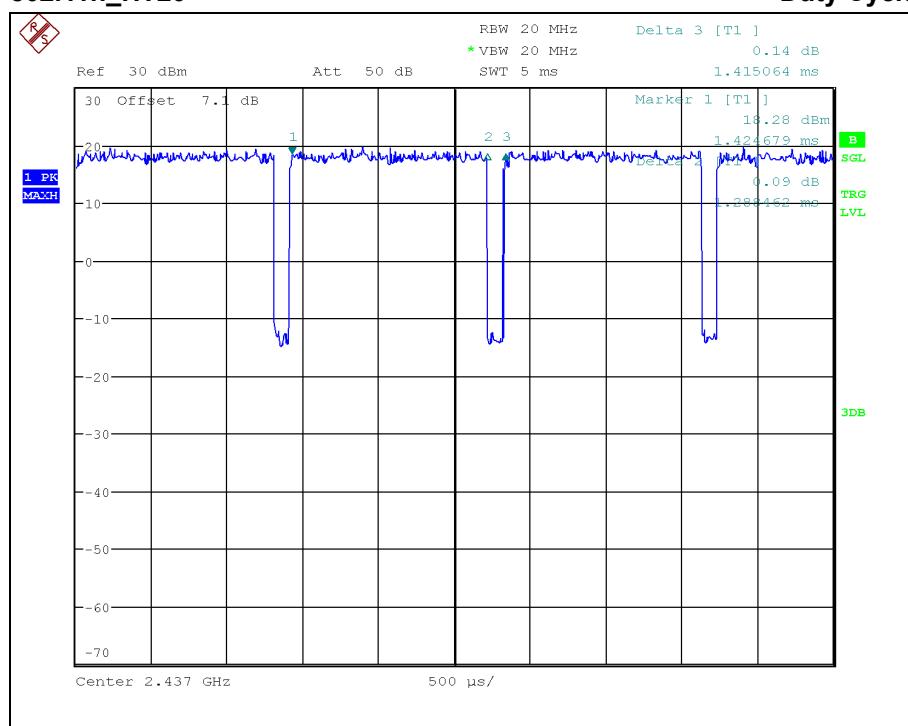Duty Cycle



Test Report No.: NW2004-F002

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071