

3.3.5 Peak Power Spectral Density

3.3.5.1 Test Setup

Refer to the APPENDIX I.

3.3.5.2 Limit

Part. 15.407(a)

- (1) For the band 5.15 - 5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}
 - (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}
 - (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
 - (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}
- (2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}
- (3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. ^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-topoint operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

RSS-247

- (1) For the band 5.15 - 5.25 GHz.

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

(2) For the band 5.25 - 5.35 GHz.

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(3) For the band 5.47 - 5.60 GHz and 5.65 - 5.725 GHz.

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(4) For the band 5.725 - 5.85 GHz.

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipointFootnote3 systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.3.5.3 Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA - 1, SA - 2, SA - 3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA - 2 or SA - 2 Alternative was used, add $10 \log(1 / x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA - 3 Alternative was used and the linear mode was used in step II.E.2.g (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725 - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz.

3.3.5.4 Test Result

Test Mode	Band	Test Channel	Peak Power Spectral Density				Limit	
			Reading	C.F	Test Result		15.407	RSS-247
			(dBm)	(dB)	(dBm)	(dBm e.i.r.p)	(dBm)	(dBm e.i.r.p)
802.11a	U-NII 1	36	-2.32	0.39	-1.93	1.67	11.00	10.00
		44	-2.63	0.39	-2.24	1.36	11.00	10.00
		48	-2.51	0.39	-2.12	1.48	11.00	10.00
	U-NII 2A	52	-2.37	0.39	-1.98	1.62	11.00	11.00
		60	-2.70	0.39	-2.31	1.29	11.00	11.00
		64	-2.53	0.39	-2.14	1.46	11.00	11.00
	U-NII 2C	100	-2.09	0.39	-1.70	1.90	11.00	11.00
		120	-2.06	0.39	-1.67	1.93	11.00	11.00
		140	-3.38	0.39	-2.99	0.61	11.00	11.00
	U-NII 3	149	-5.77	0.39	-5.38	-1.78	30.00	30.00
		157	-6.15	0.39	-5.76	-2.16	30.00	30.00
		165	-7.06	0.39	-6.67	-3.07	30.00	30.00

Note 1: C.F(Correction Factor)

Correction Factor = DCCF

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 2: Sample Calculation.

Test Result = Reading + C.F

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Test Mode	Band	Test Channel	Peak Power Spectral Density				Limit	
			Reading	C.F	Test Result		15.407	RSS-247
			(dBm)	(dB)	(dBm)	(dBm e.i.r.p)	(dBm)	(dBm e.i.r.p)
802.11n _HT20	U-NII 1	36	-2.81	0.40	-2.41	1.19	11.00	10.00
		44	-3.16	0.40	-2.76	0.84	11.00	10.00
		48	-3.05	0.40	-2.65	0.95	11.00	10.00
	U-NII 2A	52	-2.95	0.40	-2.55	1.05	11.00	11.00
		60	-3.00	0.40	-2.60	1.00	11.00	11.00
		64	-3.21	0.40	-2.81	0.79	11.00	11.00
	U-NII 2C	100	-2.68	0.40	-2.28	1.32	11.00	11.00
		120	-2.59	0.40	-2.19	1.41	11.00	11.00
		140	-3.78	0.40	-3.38	0.22	11.00	11.00
	U-NII 3	149	-6.19	0.40	-5.79	-2.19	30.00	30.00
		157	-6.88	0.40	-6.48	-2.88	30.00	30.00
		165	-7.51	0.40	-7.11	-3.51	30.00	30.00
802.11n _HT40	U-NII 1	38	-5.20	0.40	-4.80	-1.20	11.00	10.00
		46	-5.30	0.40	-4.90	-1.30	11.00	10.00
	U-NII 2A	54	-5.45	0.40	-5.05	-1.45	11.00	11.00
		62	-5.61	0.40	-5.21	-1.61	11.00	11.00
	U-NII 2C	102	-4.98	0.40	-4.58	-0.98	11.00	11.00
		118	-4.78	0.40	-4.38	-0.78	11.00	11.00
		134	-5.43	0.40	-5.03	-1.43	11.00	11.00
	U-NII 3	151	-9.09	0.40	-8.69	-5.09	30.00	30.00
		159	-9.86	0.40	-9.46	-5.86	30.00	30.00

Note 1: C.F(Correction Factor)

Correction Factor = DCCF

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 2: Sample Calculation.

Test Result = Reading + C.F

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Page 112 of 221

Test Mode	Band	Test Channel	Peak Power Spectral Density				Limit	
			Reading	C.F	Test Result		15.407	RSS-247
			(dBm)	(dB)	(dBm)	(dBm e.i.r.p)	(dBm)	(dBm e.i.r.p)
802.11ac _VHT20	U-NII 1	36	-4.21	0.38	-3.83	-0.23	11.00	10.00
		44	-4.71	0.38	-4.33	-0.73	11.00	10.00
		48	-4.41	0.38	-4.03	-0.43	11.00	10.00
	U-NII 2A	52	-4.37	0.38	-3.99	-0.39	11.00	11.00
		60	-4.69	0.38	-4.31	-0.71	11.00	11.00
		64	-4.61	0.38	-4.23	-0.63	11.00	11.00
	U-NII 2C	100	-3.99	0.38	-3.61	-0.01	11.00	11.00
		120	-3.62	0.38	-3.24	0.36	11.00	11.00
		140	-4.90	0.38	-4.52	-0.92	11.00	11.00
	U-NII 3	149	-7.33	0.38	-6.95	-3.35	30.00	30.00
		157	-8.02	0.38	-7.64	-4.04	30.00	30.00
		165	-8.73	0.38	-8.35	-4.75	30.00	30.00
802.11ac _VHT40	U-NII 1	38	-6.42	0.41	-6.01	-2.41	11.00	10.00
		46	-6.61	0.41	-6.20	-2.60	11.00	10.00
	U-NII 2A	54	-6.82	0.41	-6.41	-2.81	11.00	11.00
		62	-6.81	0.41	-6.40	-2.80	11.00	11.00
	U-NII 2C	102	-5.94	0.41	-5.53	-1.93	11.00	11.00
		118	-5.85	0.41	-5.44	-1.84	11.00	11.00
		134	-6.50	0.41	-6.09	-2.49	11.00	11.00
	U-NII 3	151	-10.14	0.41	-9.73	-6.13	30.00	30.00
		159	-11.03	0.41	-10.62	-7.02	30.00	30.00

Note 1: C.F(Correction Factor)

Correction Factor = DCCF

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 2: Sample Calculation.

Test Result = Reading + C.F

Test Report No.: NW2004-F003


211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.5.5 Test Plot


802.11a _ ch.36

Peak Power Spectral Density

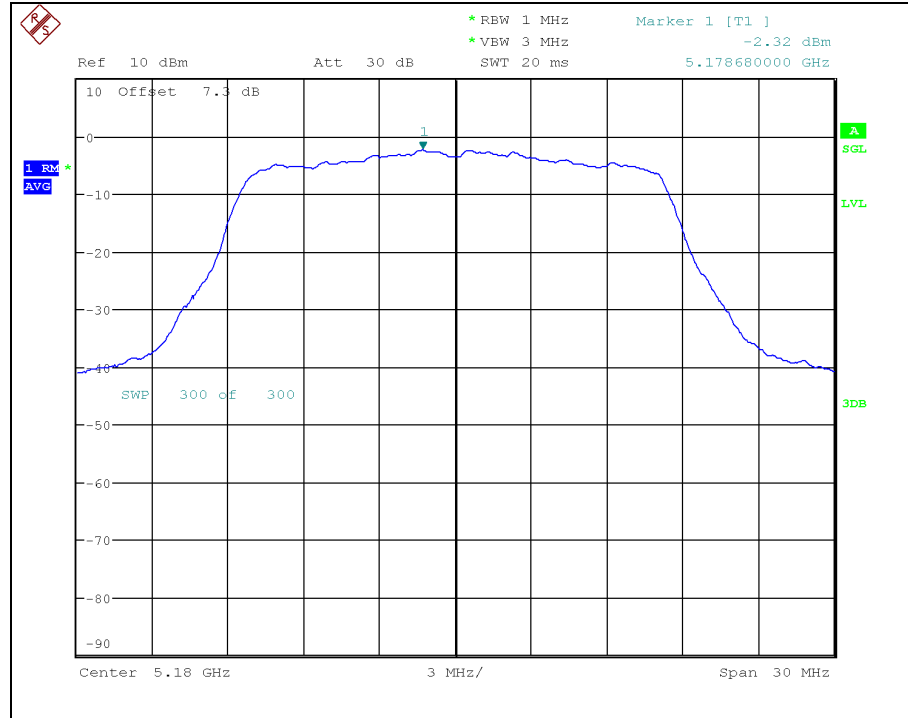

802.11a _ ch.44

Peak Power Spectral Density

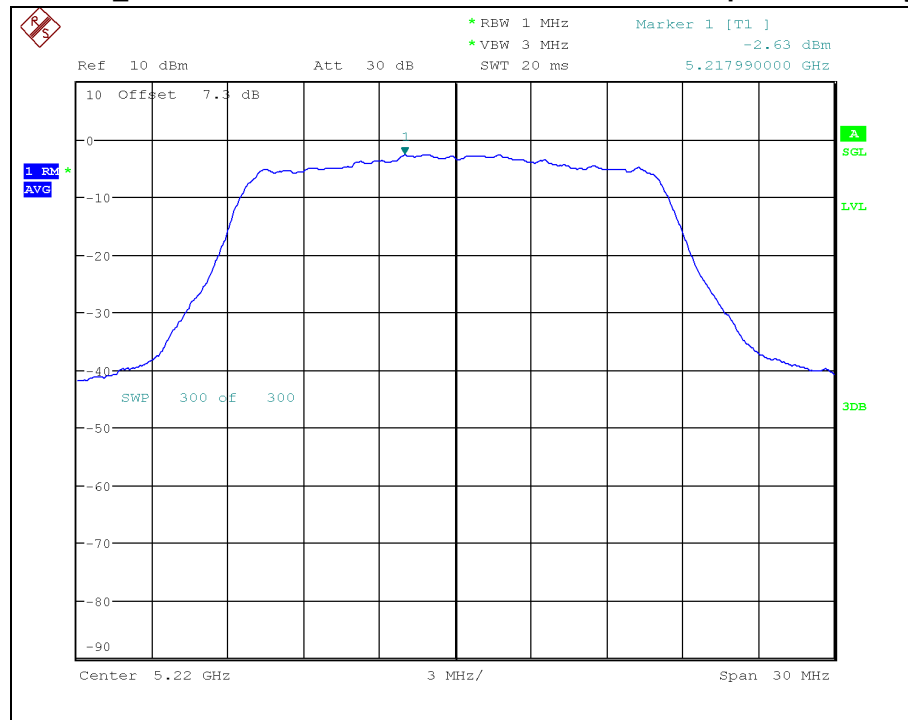


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ ch.48

Peak Power Spectral Density

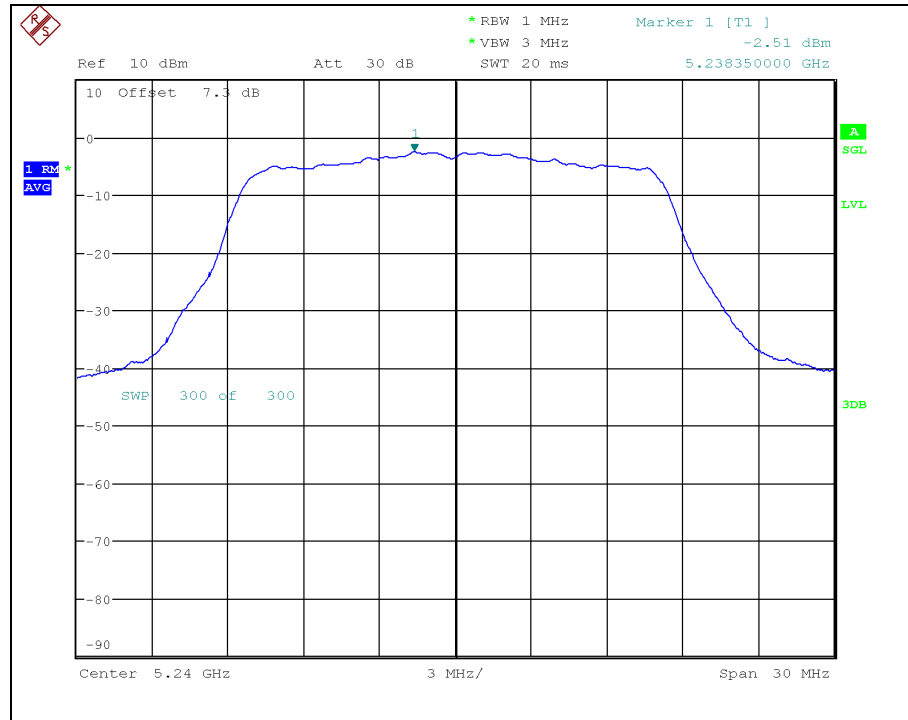

802.11a _ ch.52

Peak Power Spectral Density

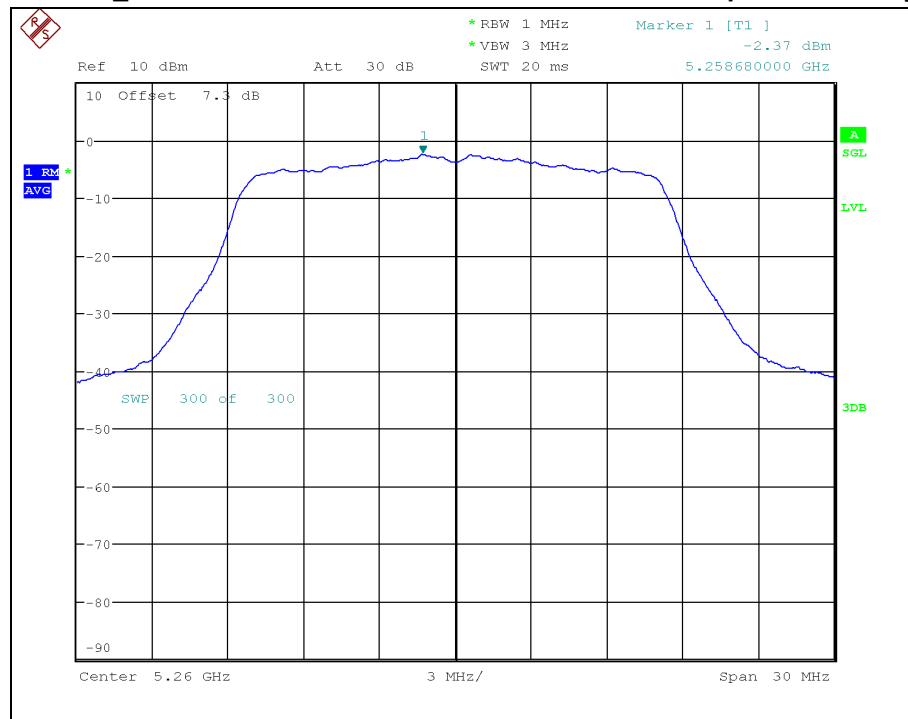


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ ch.60

Peak Power Spectral Density

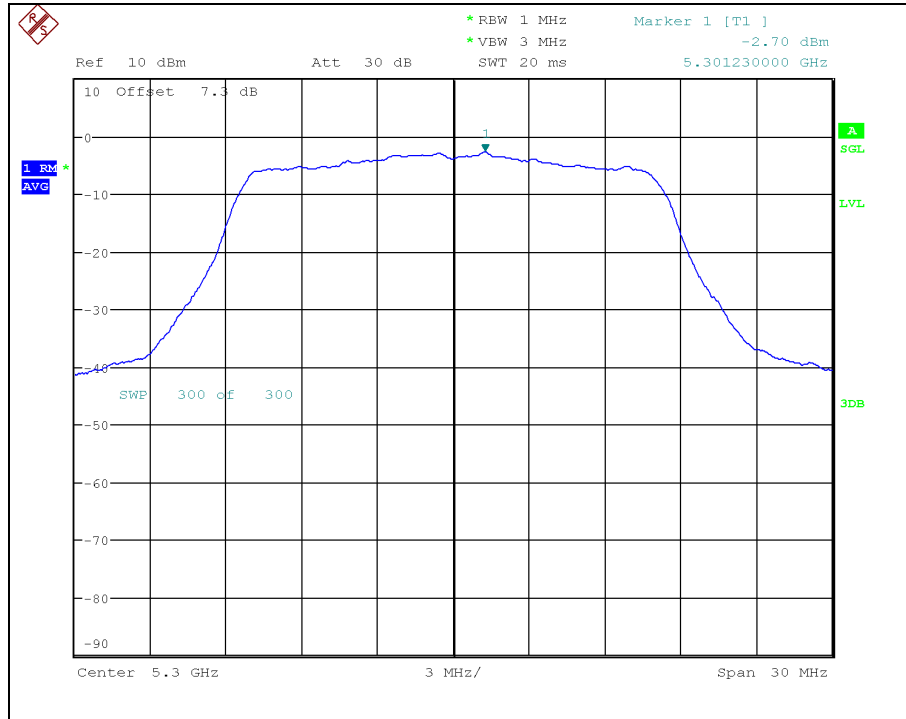

802.11a _ ch.64

Peak Power Spectral Density

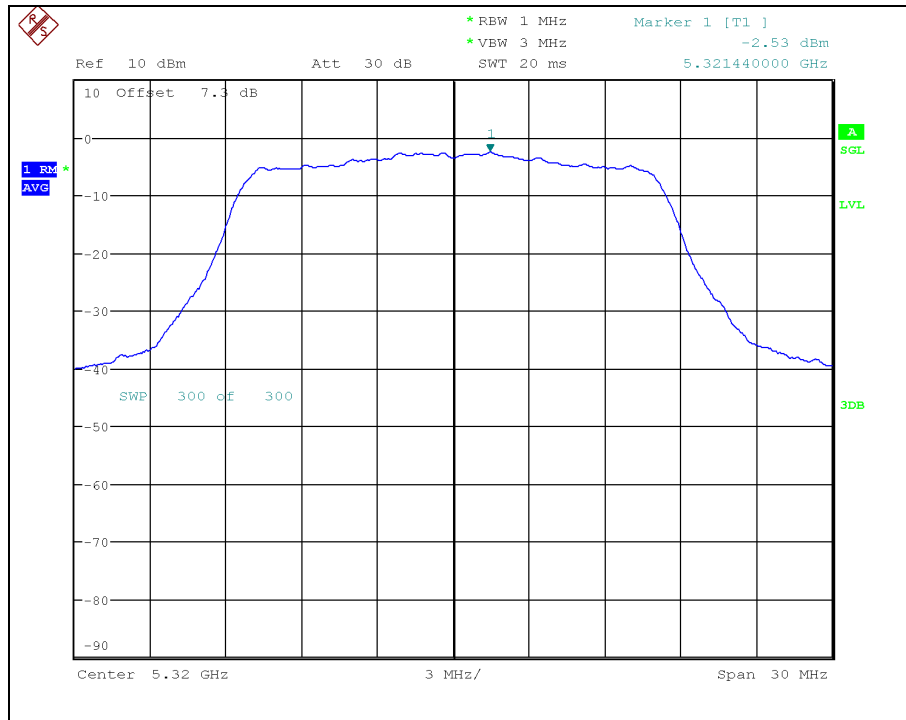


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ ch.100

Peak Power Spectral Density

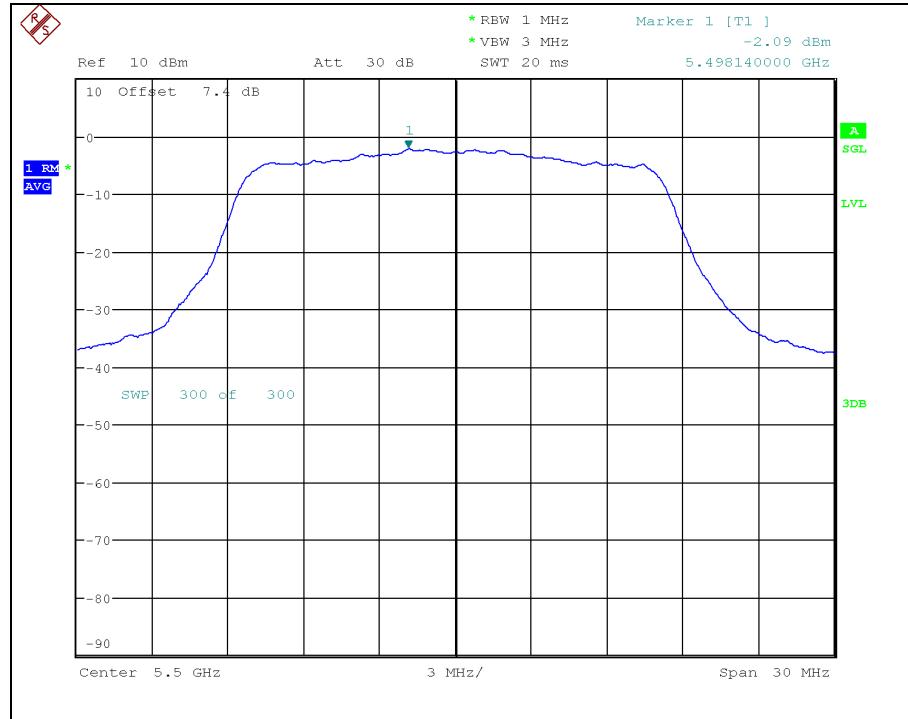

802.11a _ ch.120

Peak Power Spectral Density

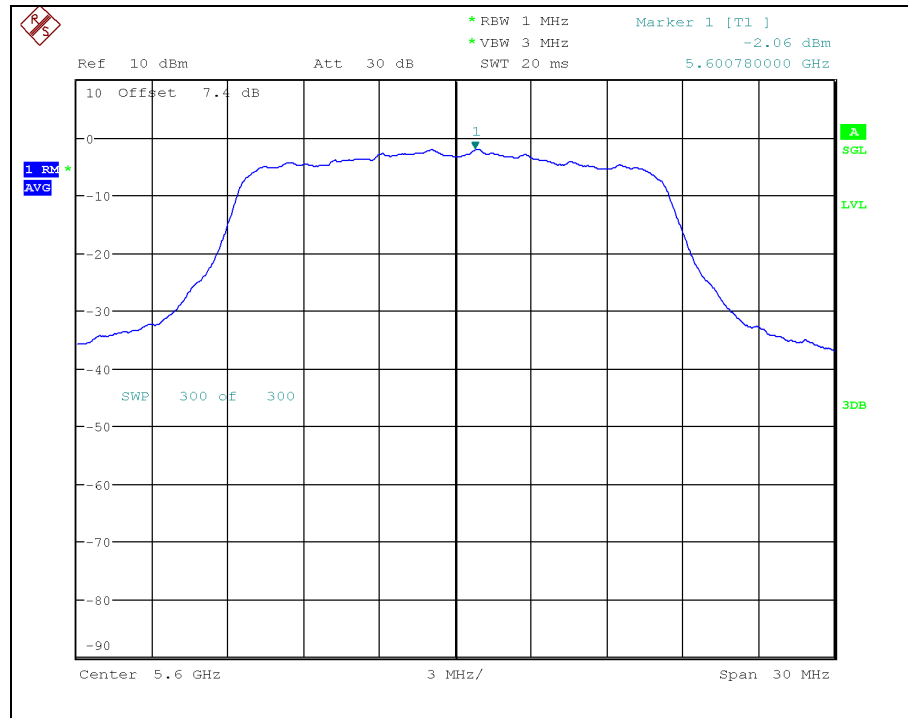


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ ch.140

Peak Power Spectral Density

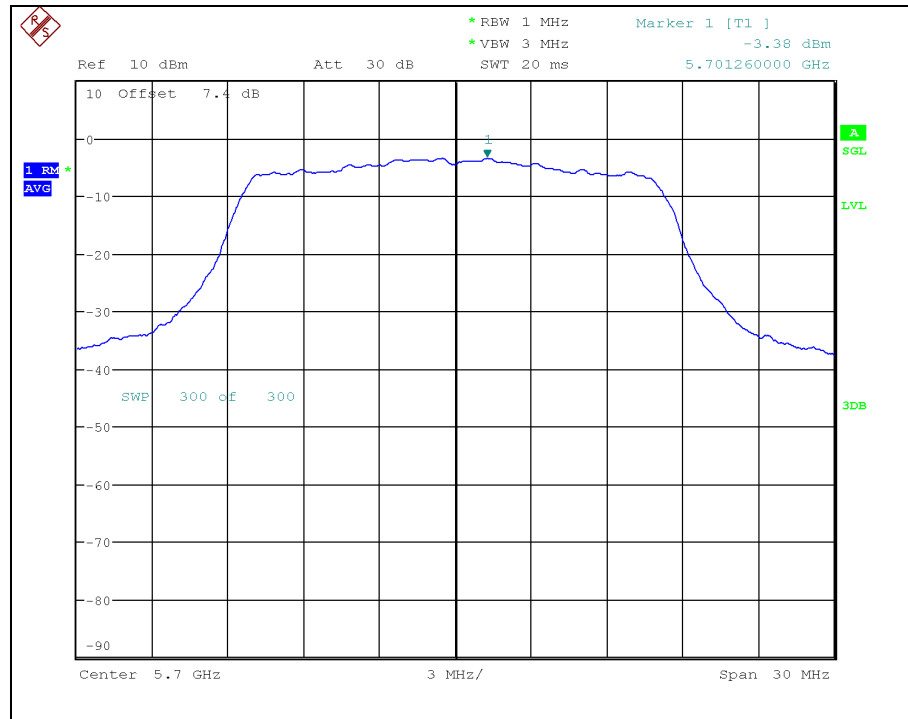

802.11a _ ch.149

Peak Power Spectral Density

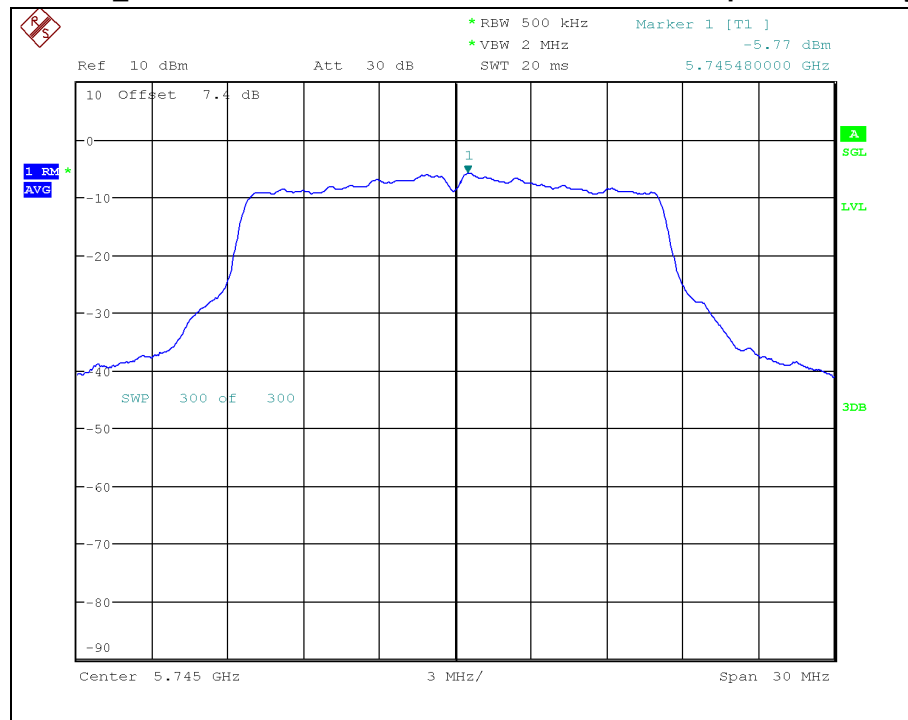


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ ch.157

Peak Power Spectral Density

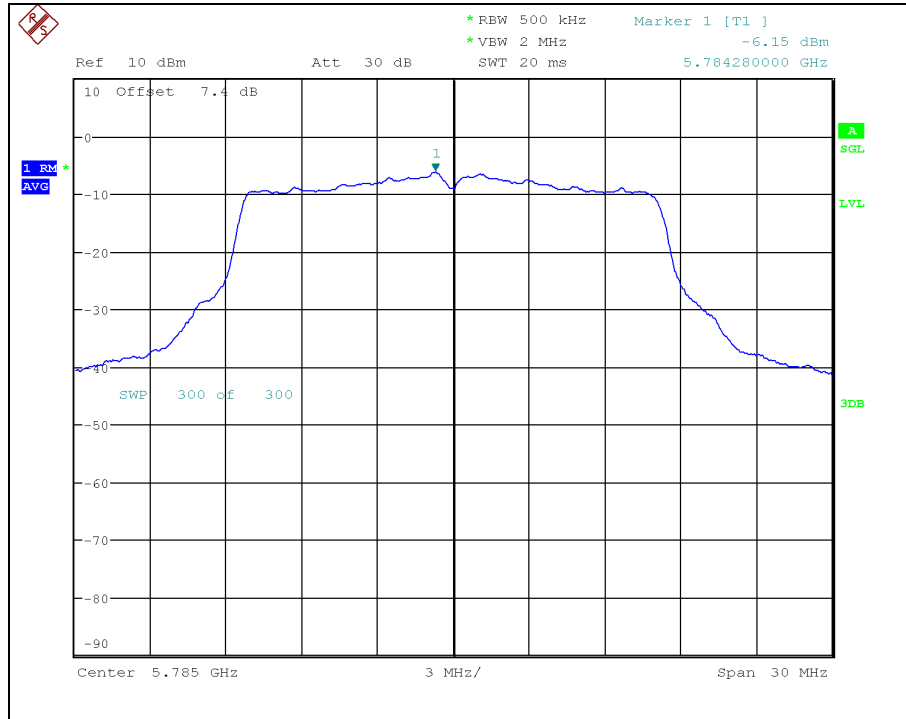

802.11a _ ch.165

Peak Power Spectral Density

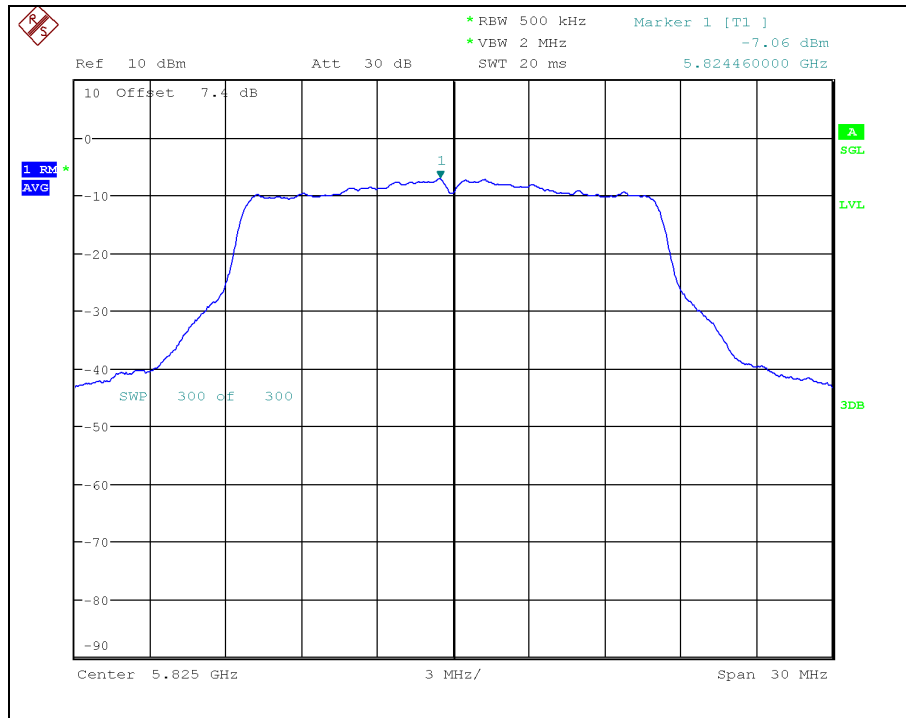


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20_ch.36

Peak Power Spectral Density

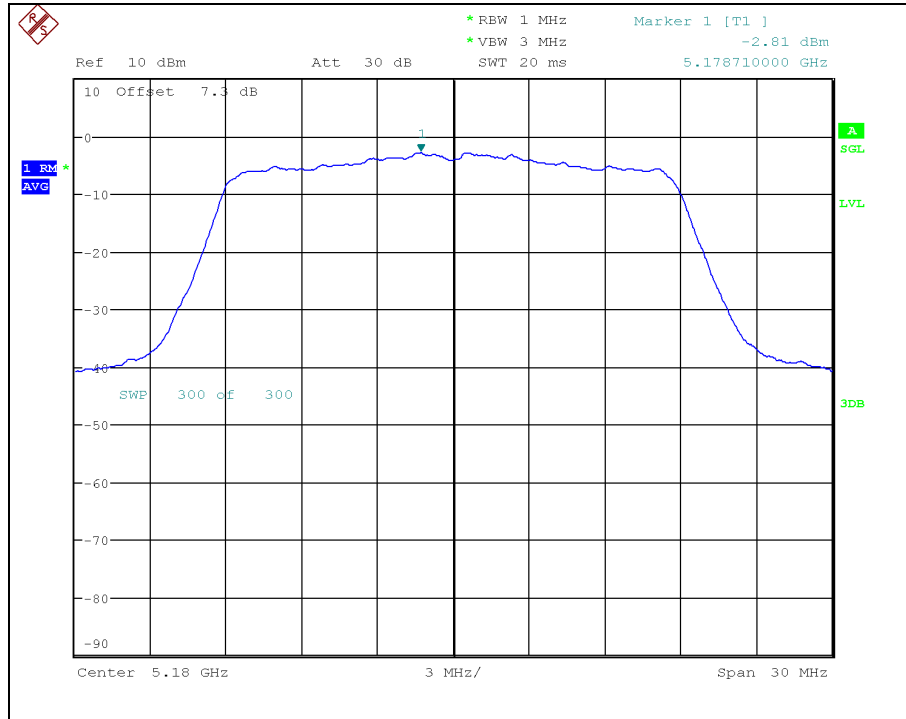

802.11n_HT20_ch.44

Peak Power Spectral Density

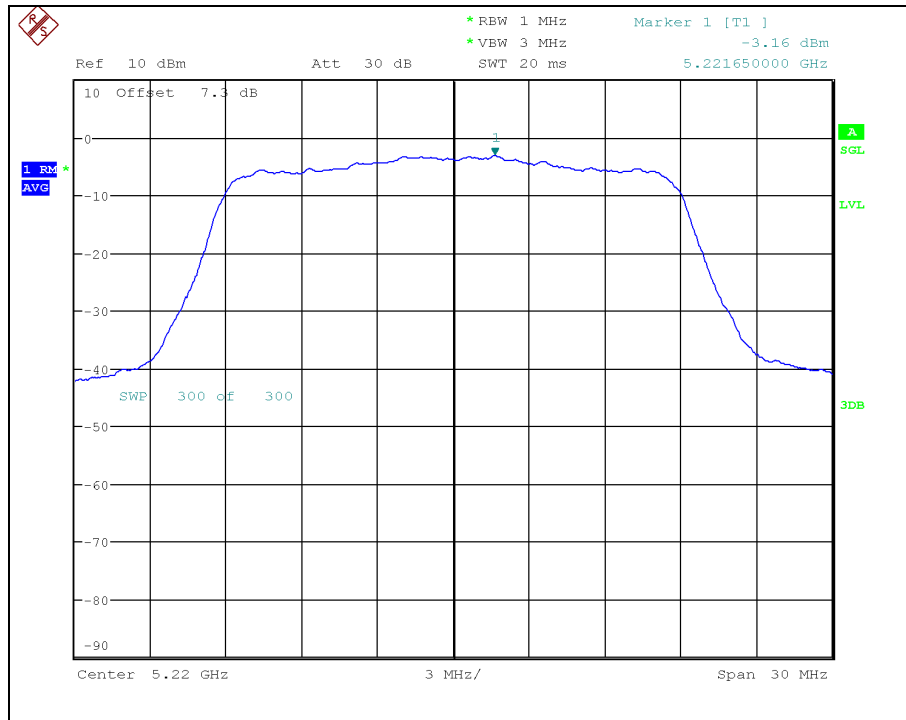


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ ch.48

Peak Power Spectral Density

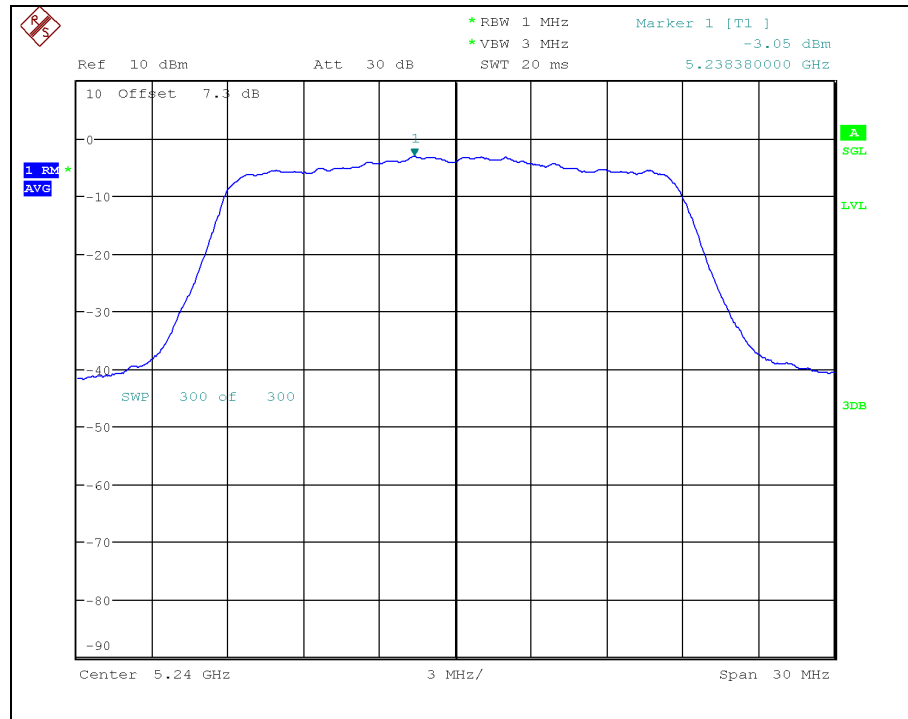

802.11n_HT20 _ ch.52

Peak Power Spectral Density

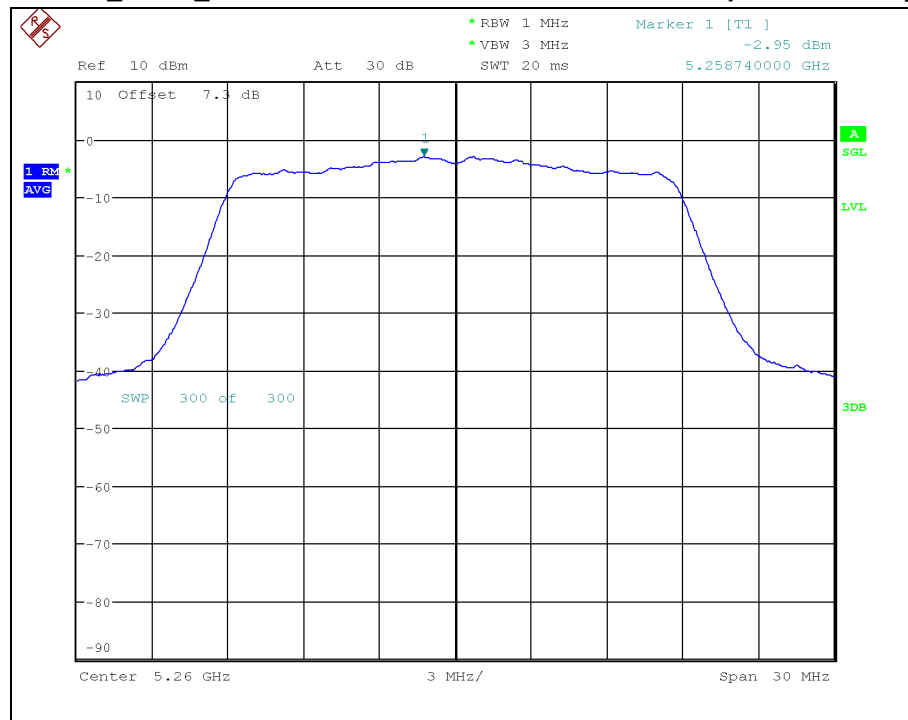


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20_ch.60

Peak Power Spectral Density

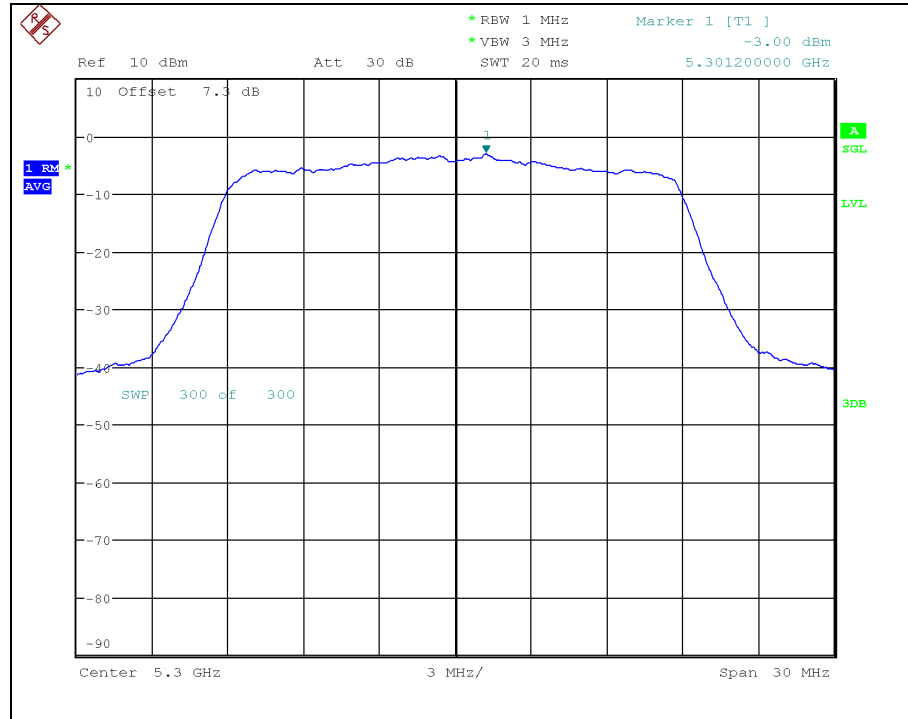

802.11n_HT20_ch.64

Peak Power Spectral Density

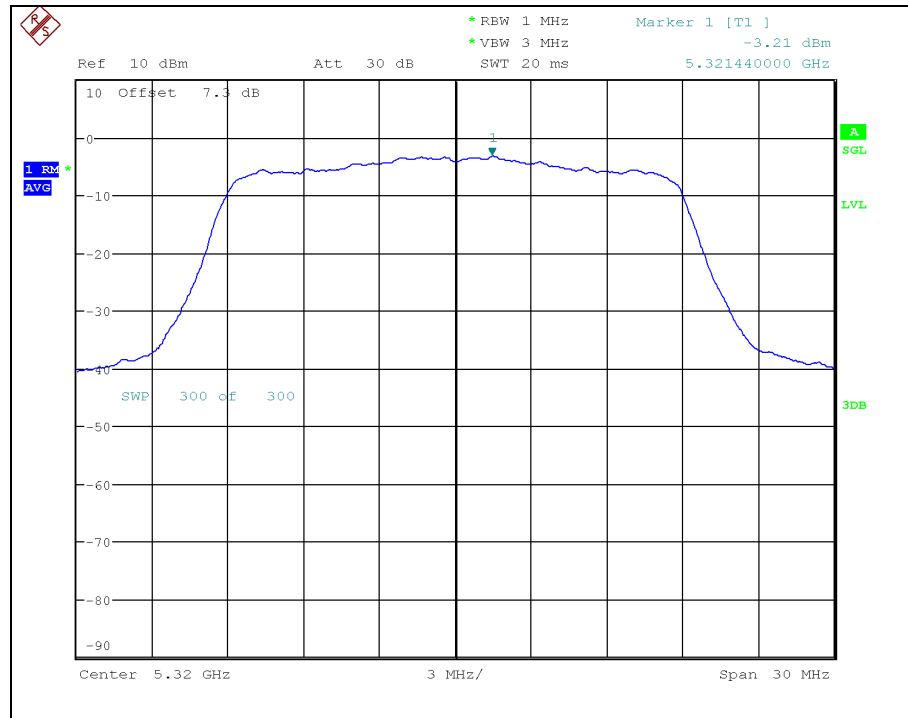


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ ch.100

Peak Power Spectral Density

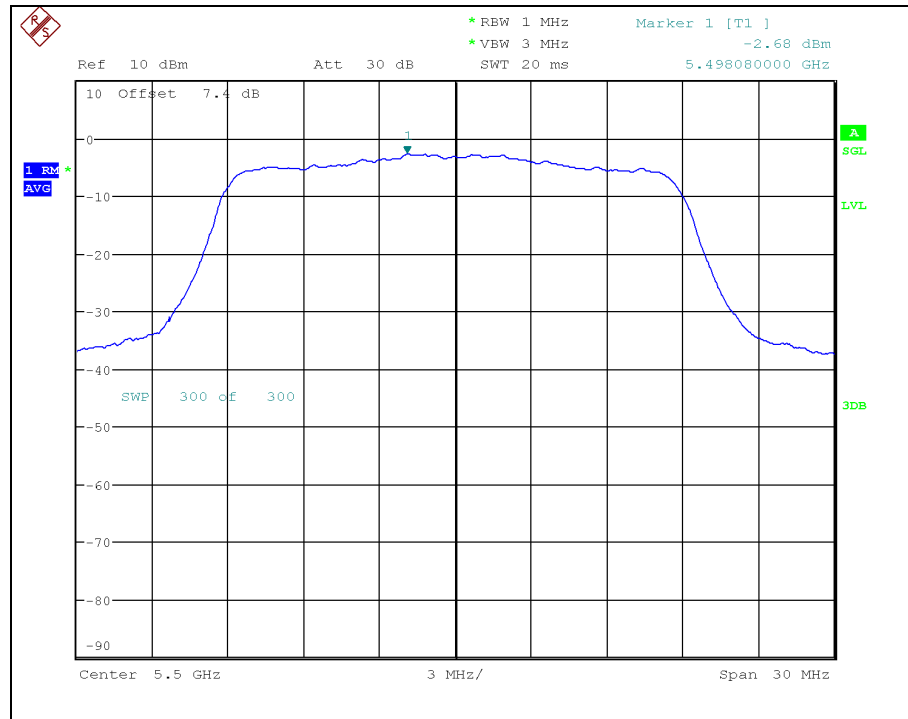

802.11n_HT20 _ ch.120

Peak Power Spectral Density

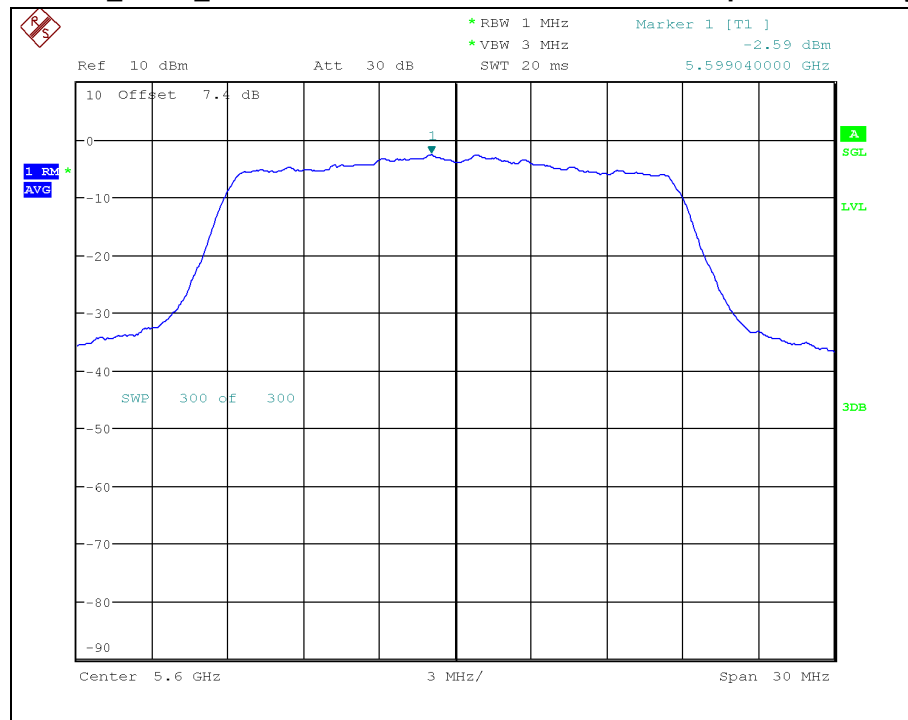


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ ch.140

Peak Power Spectral Density

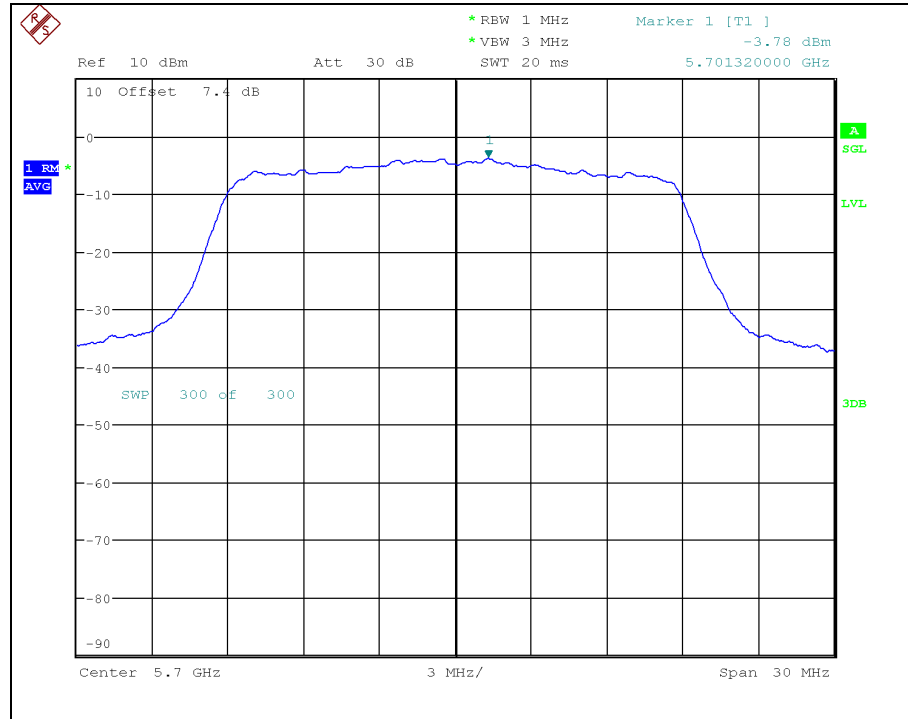

802.11n_HT20 _ ch.149

Peak Power Spectral Density

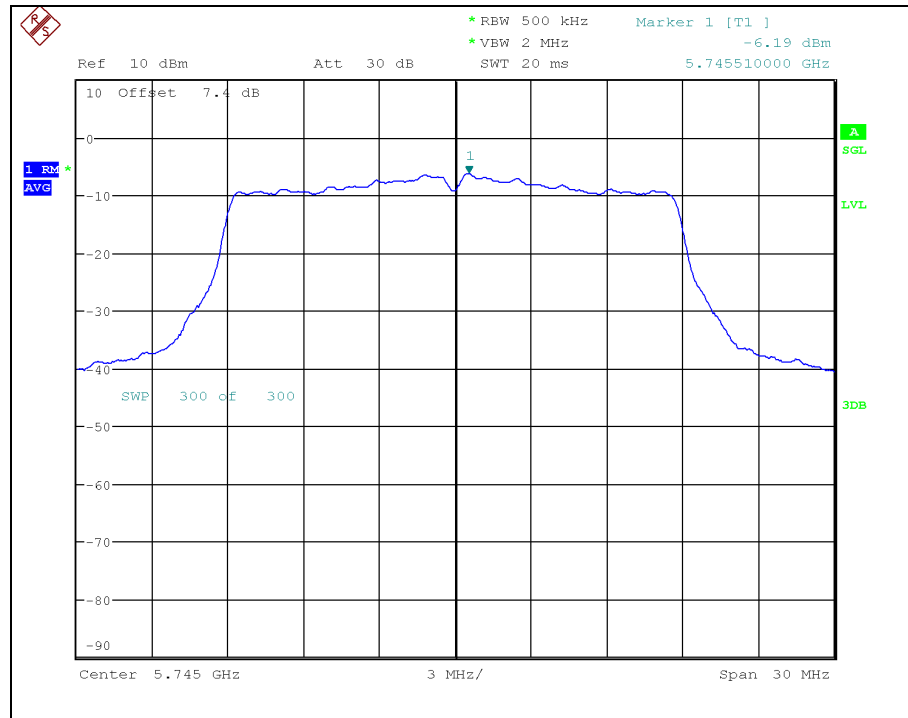


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ ch.157

Peak Power Spectral Density

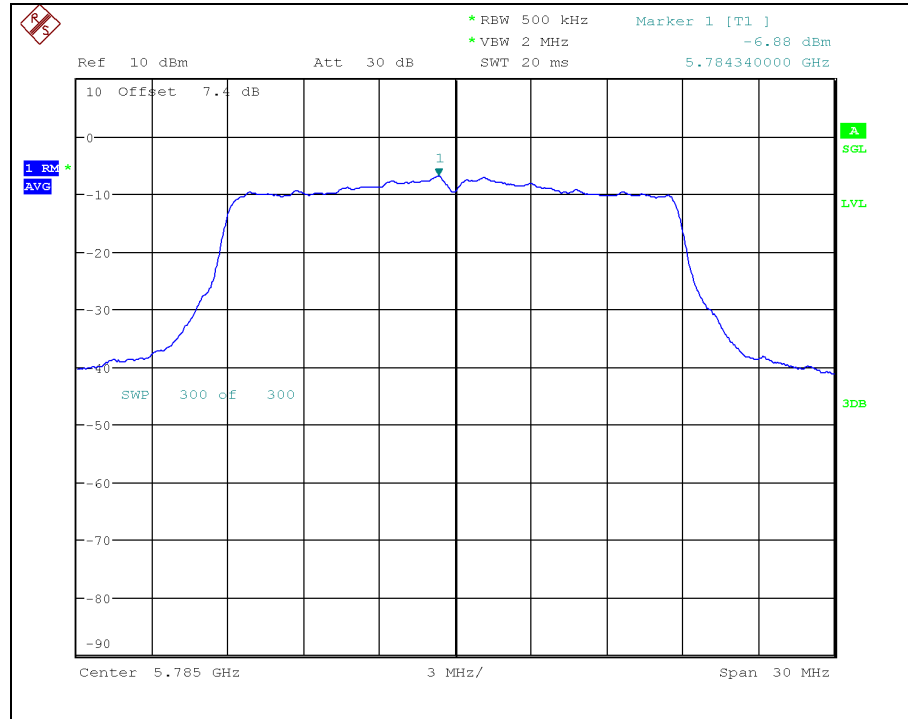

802.11n_HT20 _ ch.165

Peak Power Spectral Density

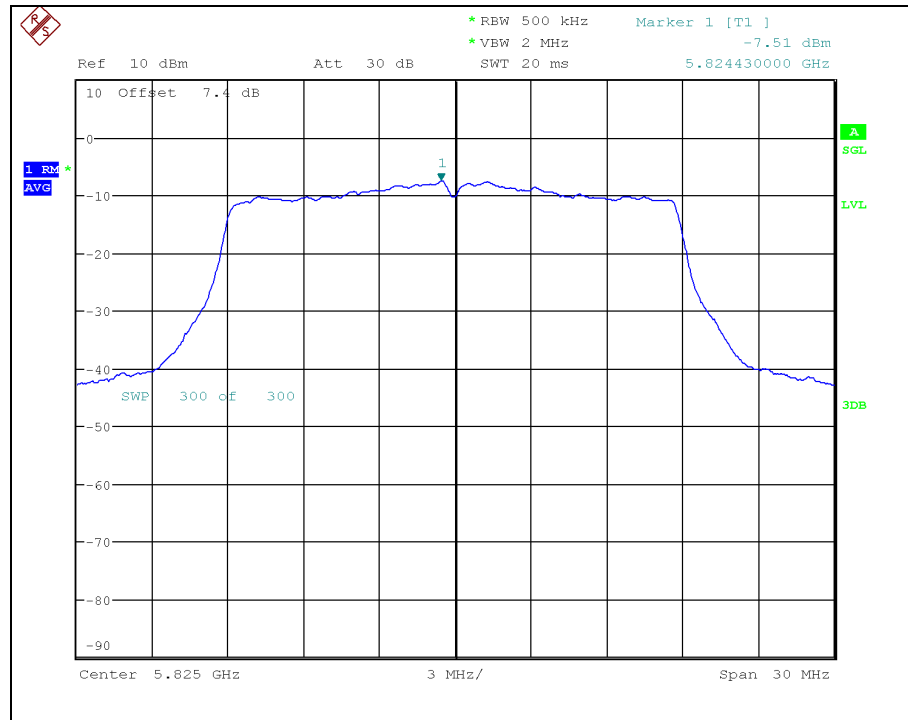


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40_ch.38

Peak Power Spectral Density

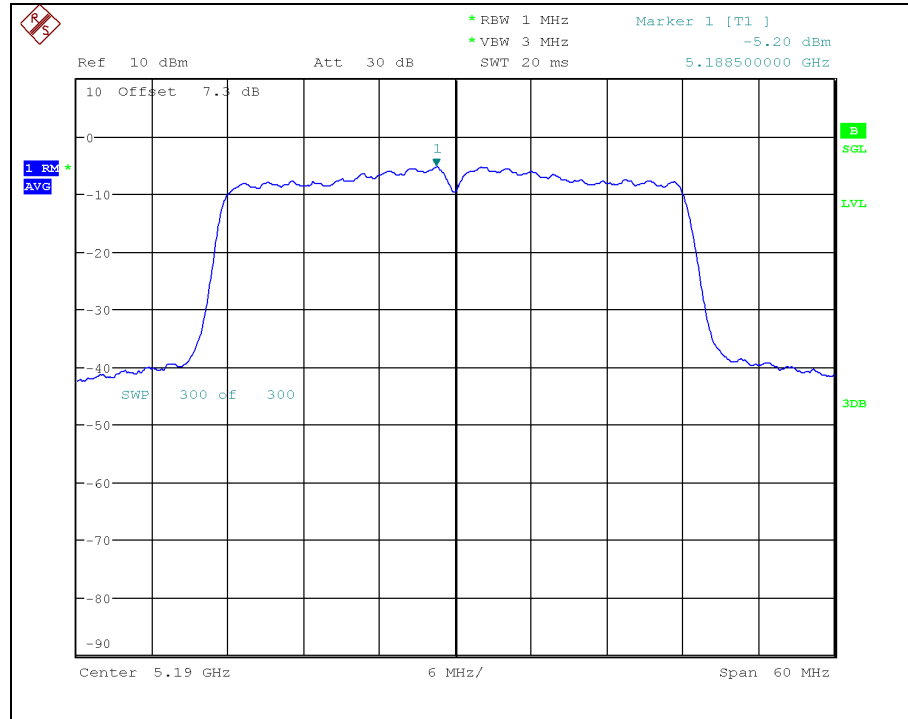

802.11n_HT40_ch.46

Peak Power Spectral Density

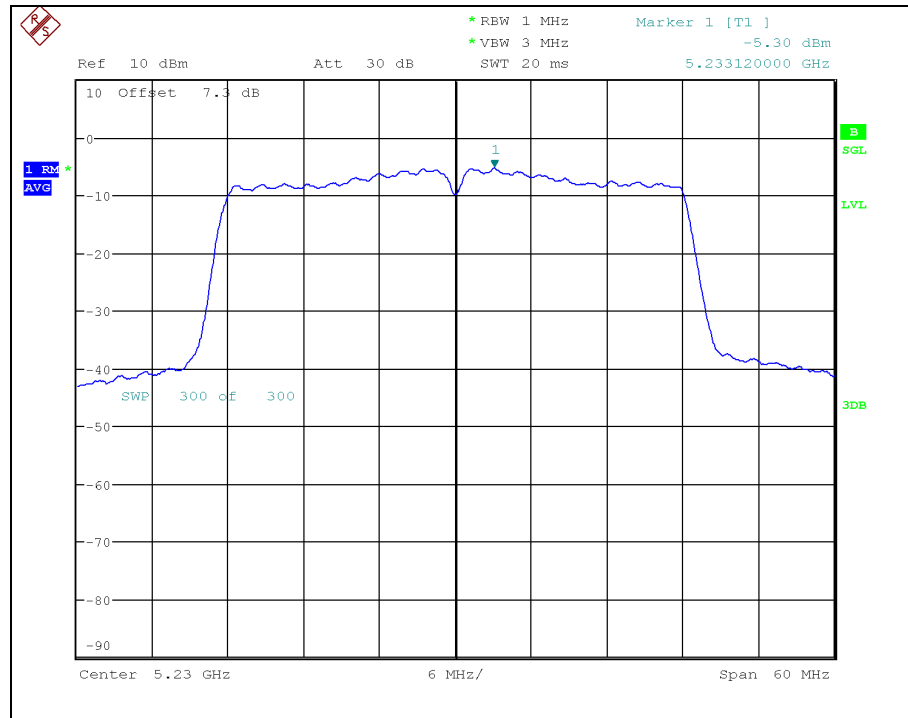


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40_ch.54

Peak Power Spectral Density

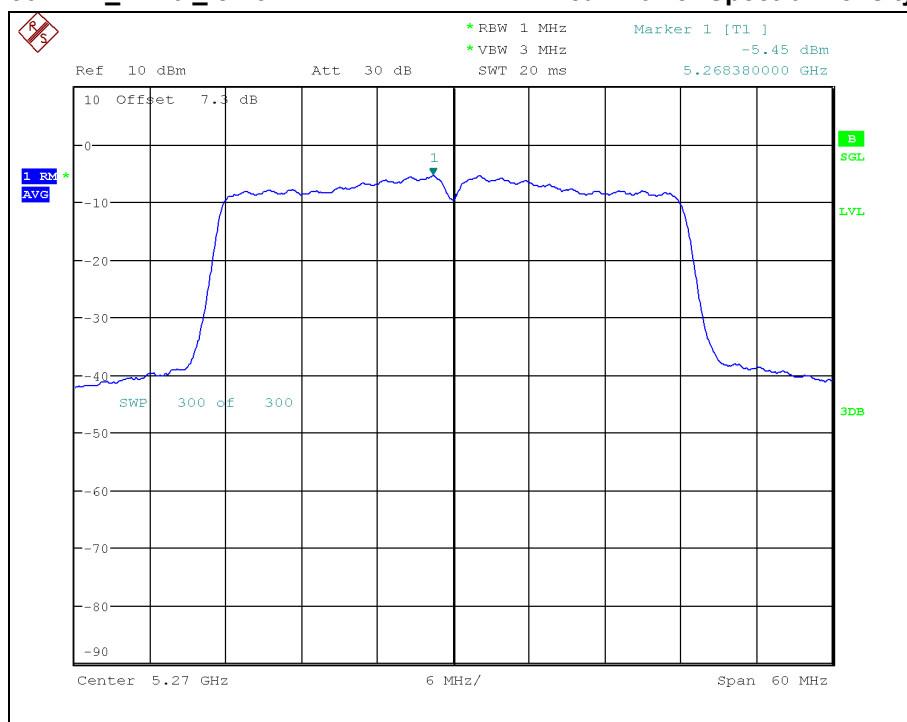


802.11n_HT40_ch.62

Peak Power Spectral Density

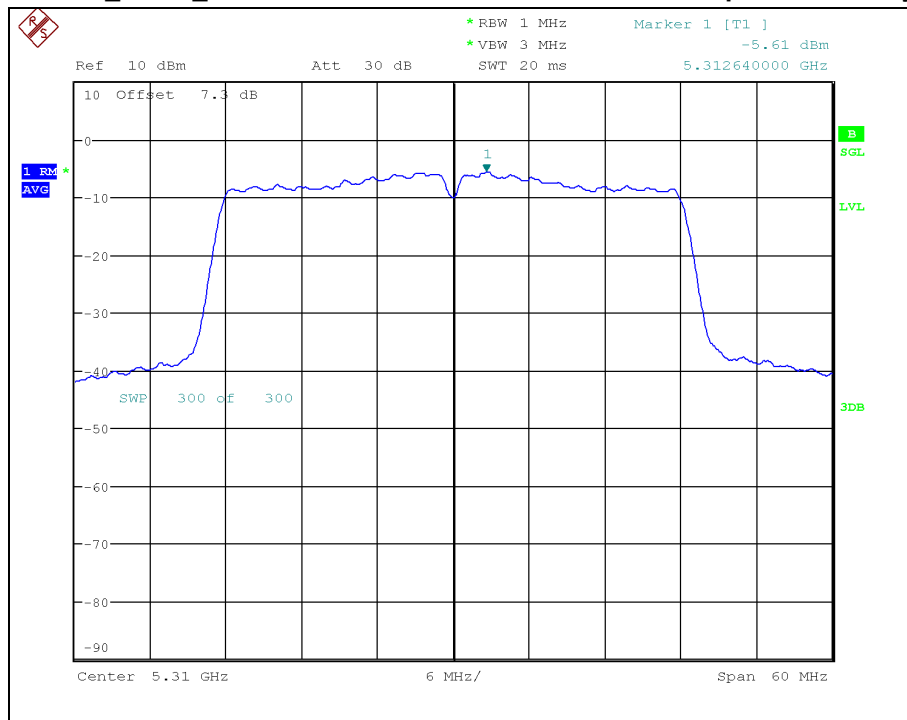


802.11n_HT40_ch.102

Peak Power Spectral Density

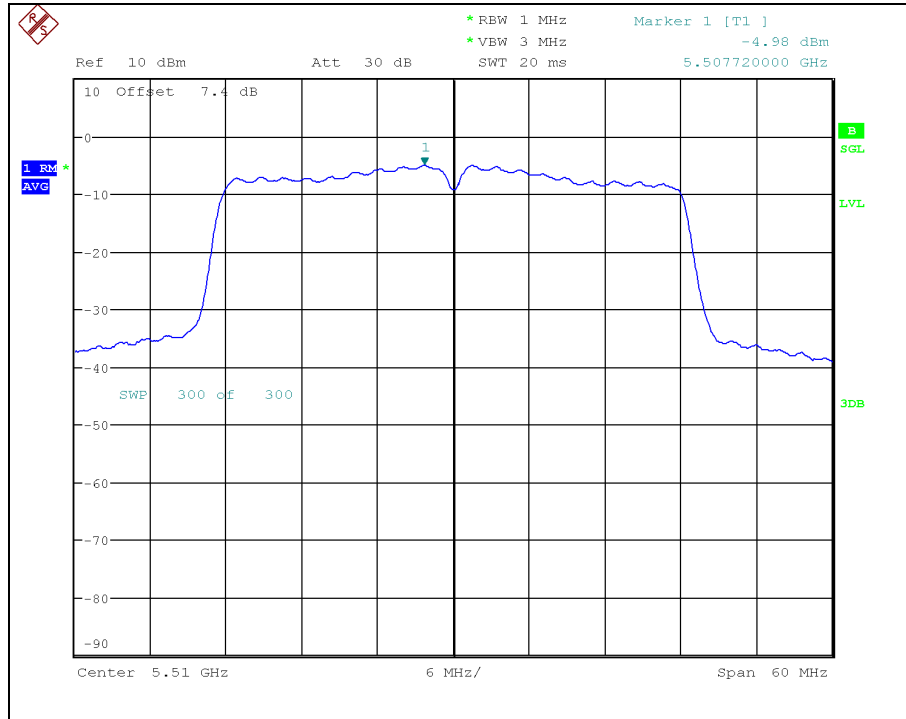

802.11n_HT40_ch.118

Peak Power Spectral Density

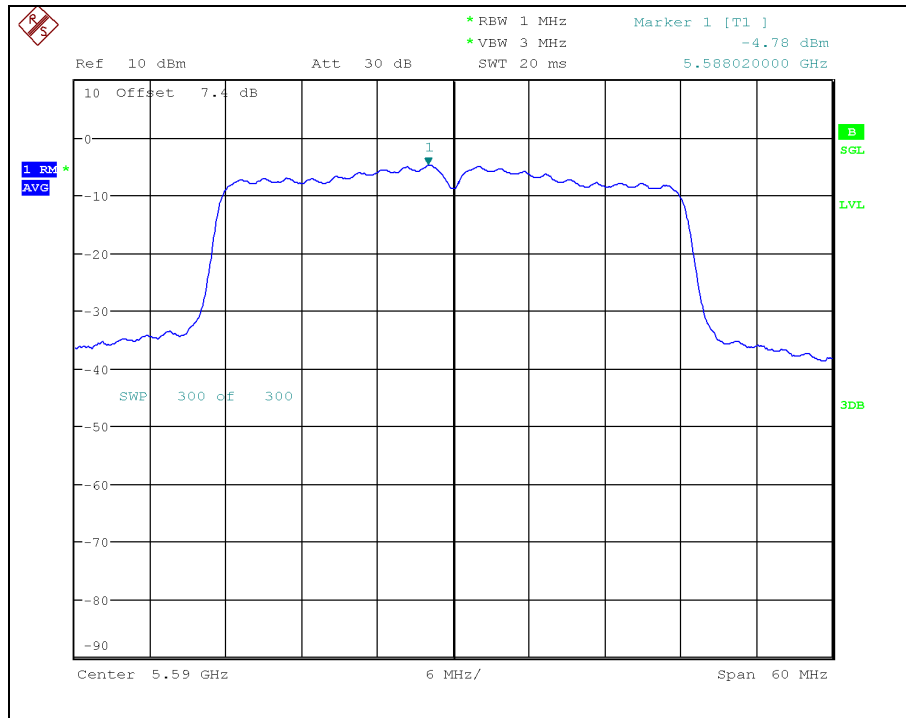


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40_ch.134

Peak Power Spectral Density

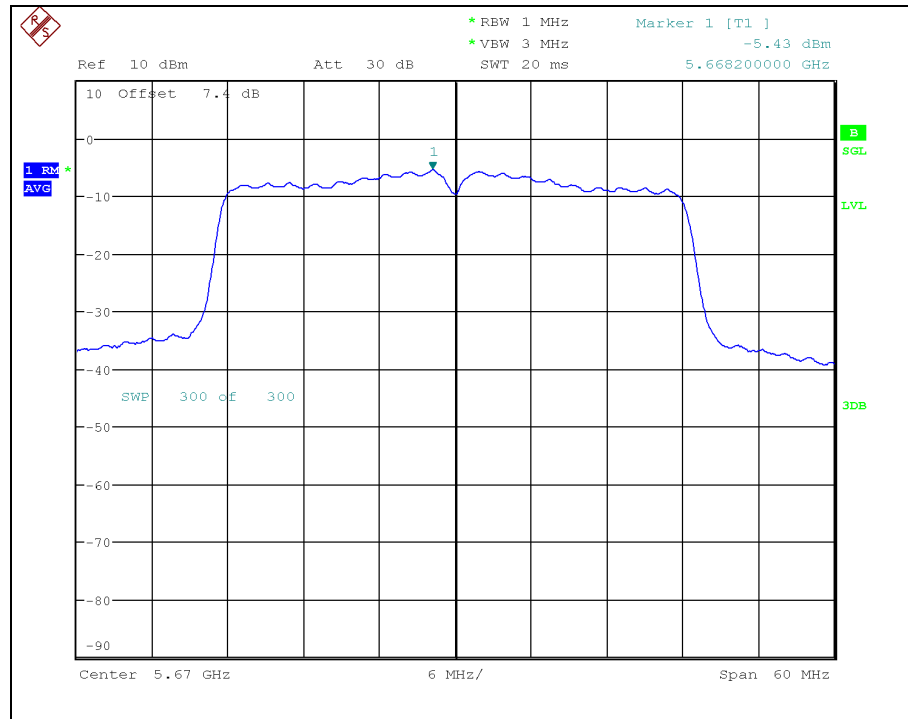

802.11n_HT40_ch.151

Peak Power Spectral Density

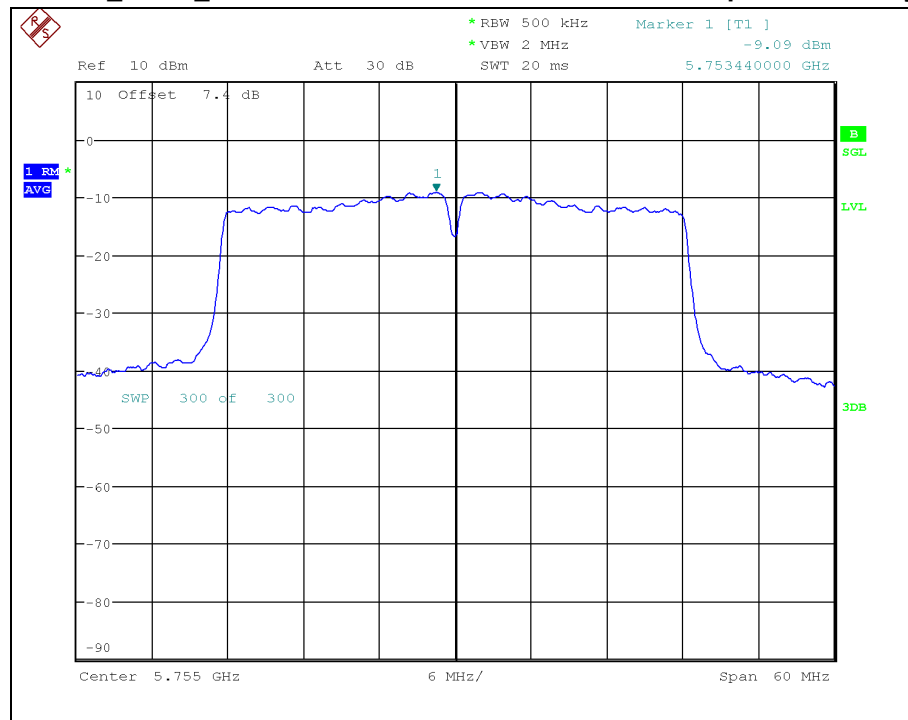


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11n_HT40 _ ch.159

Peak Power Spectral Density

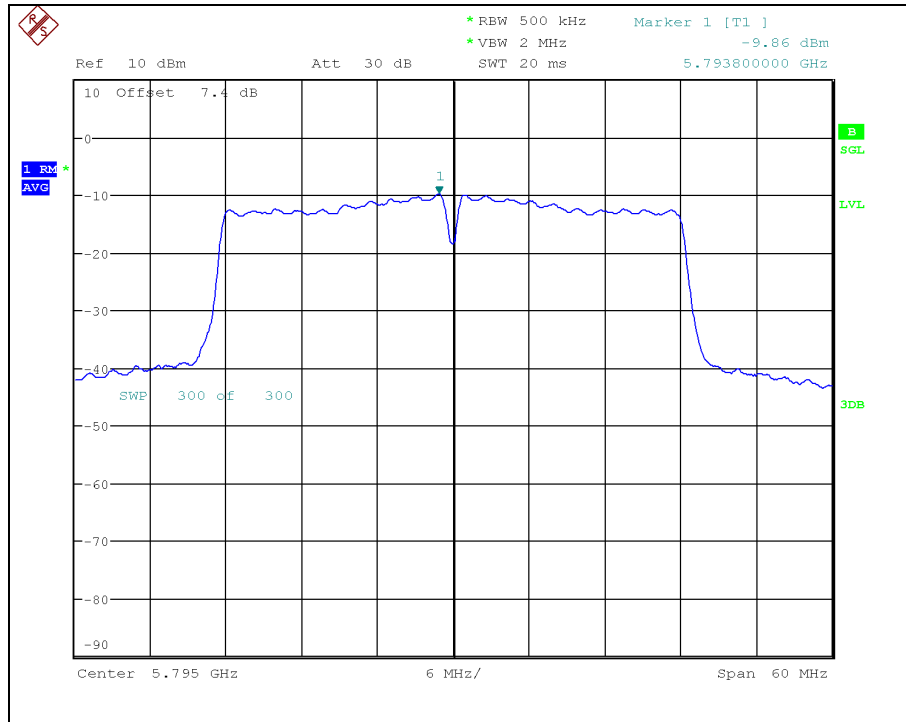


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20_ch.36

Peak Power Spectral Density

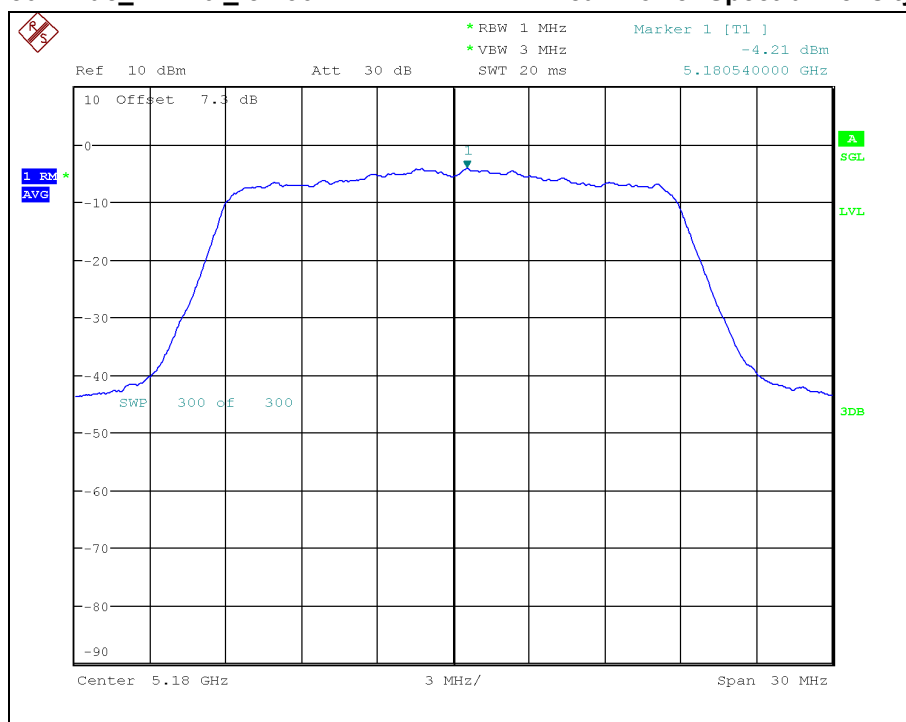


802.11ac_VHT20_ch.44

Peak Power Spectral Density

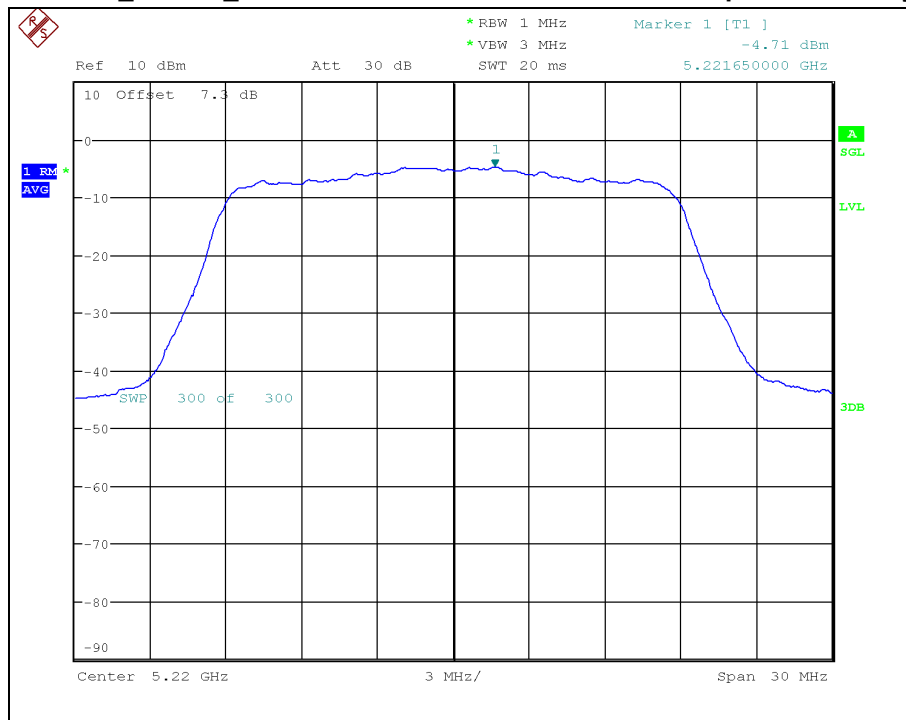


802.11ac_VHT20_ch.48

Peak Power Spectral Density

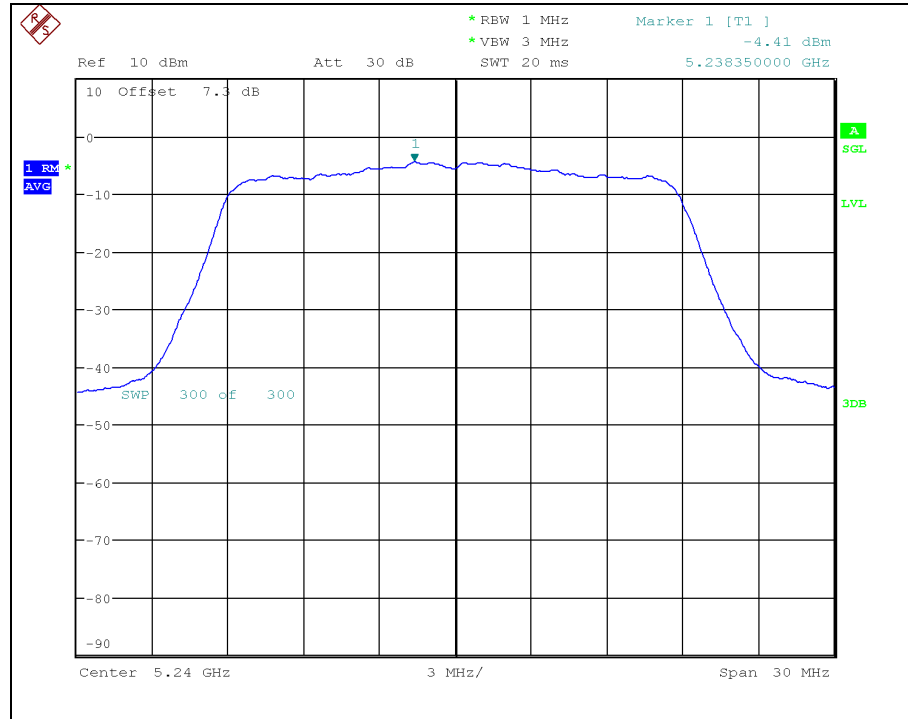

802.11ac_VHT20_ch.52

Peak Power Spectral Density

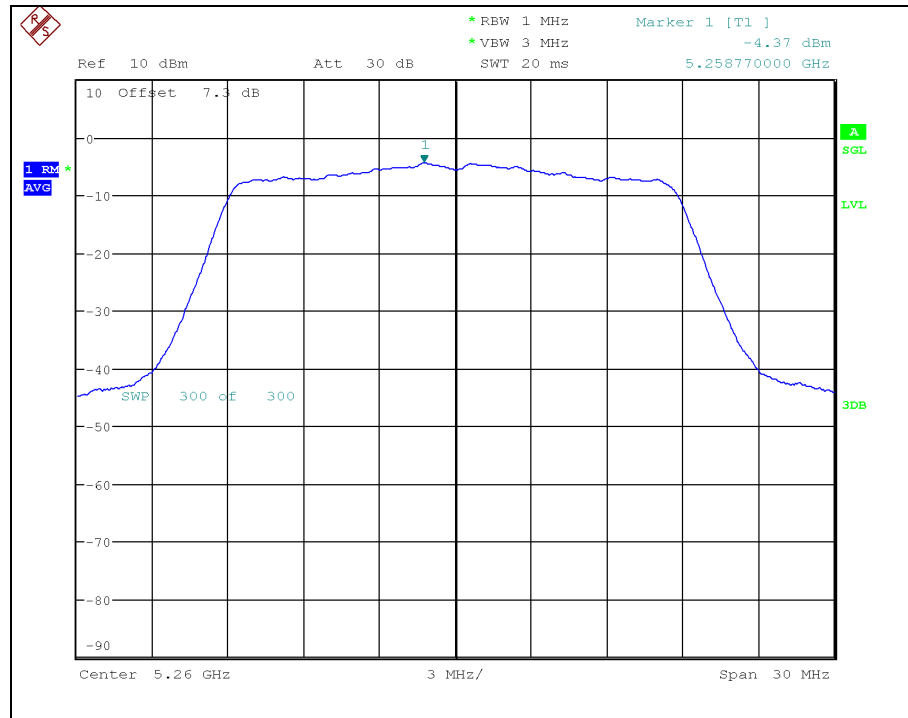


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20_ch.60

Peak Power Spectral Density

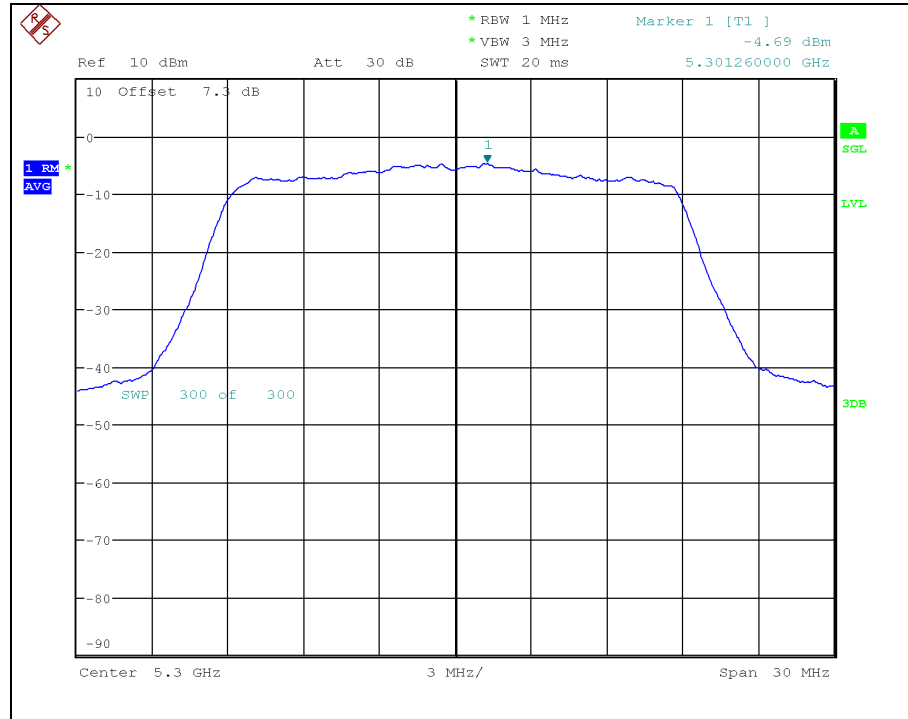

802.11ac_VHT20_ch.64

Peak Power Spectral Density

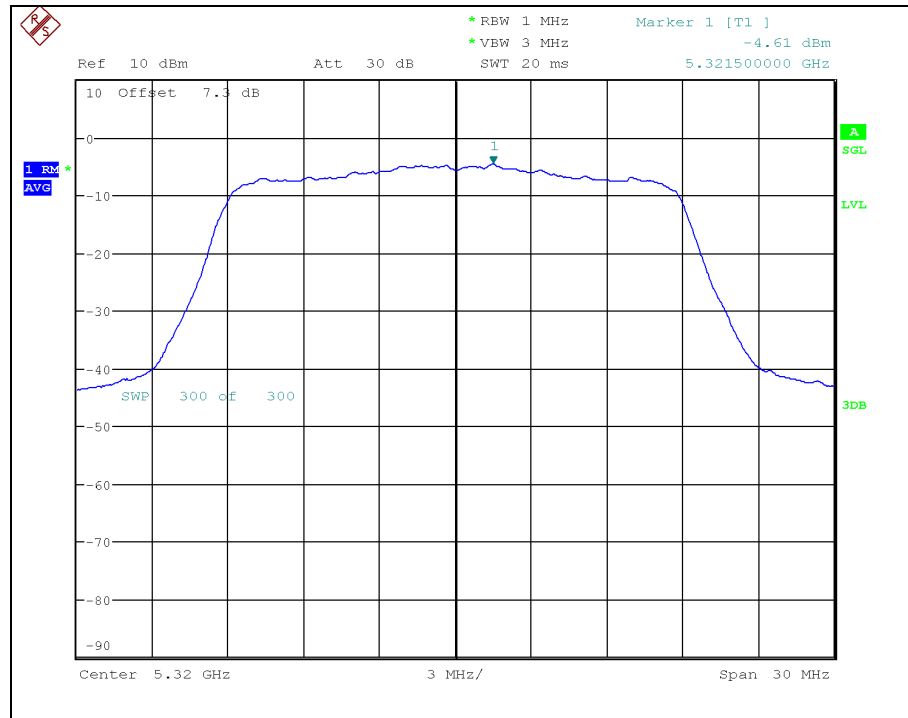


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20_ch.100

Peak Power Spectral Density

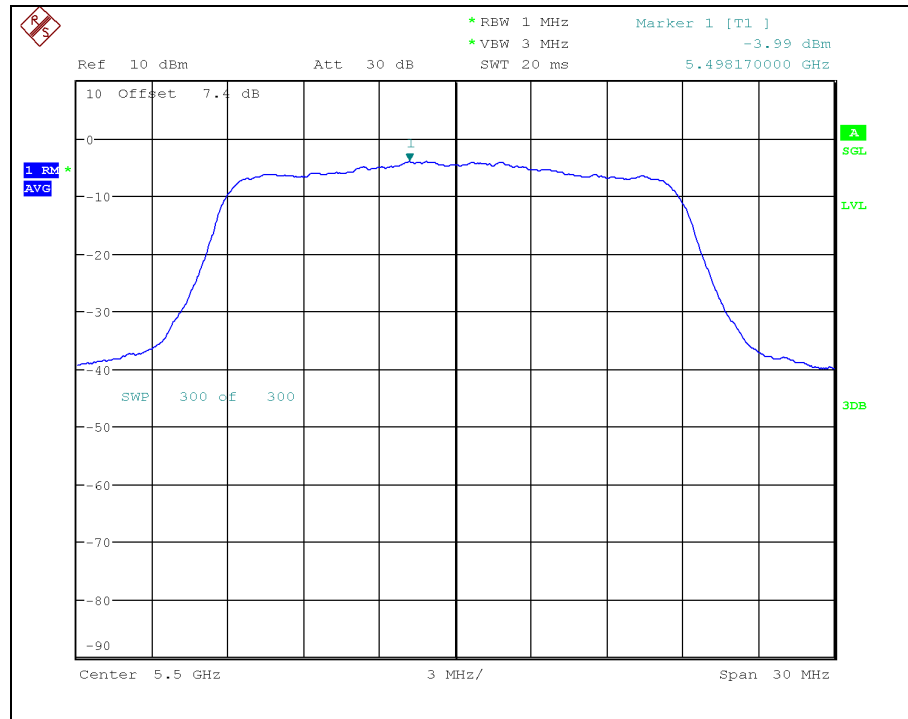

802.11ac_VHT20_ch.120

Peak Power Spectral Density

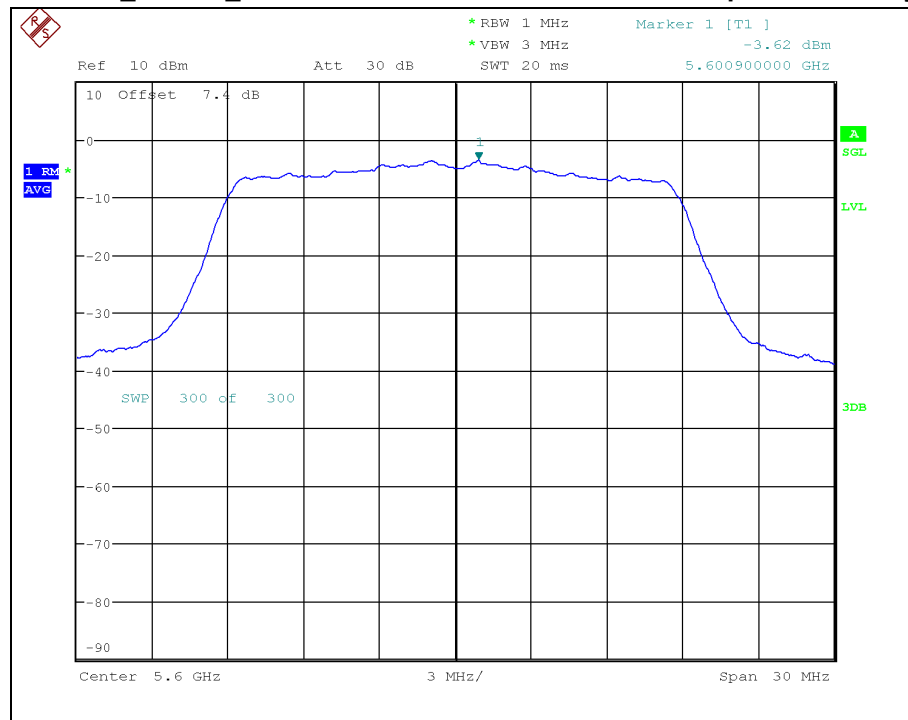


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20_ch.140

Peak Power Spectral Density

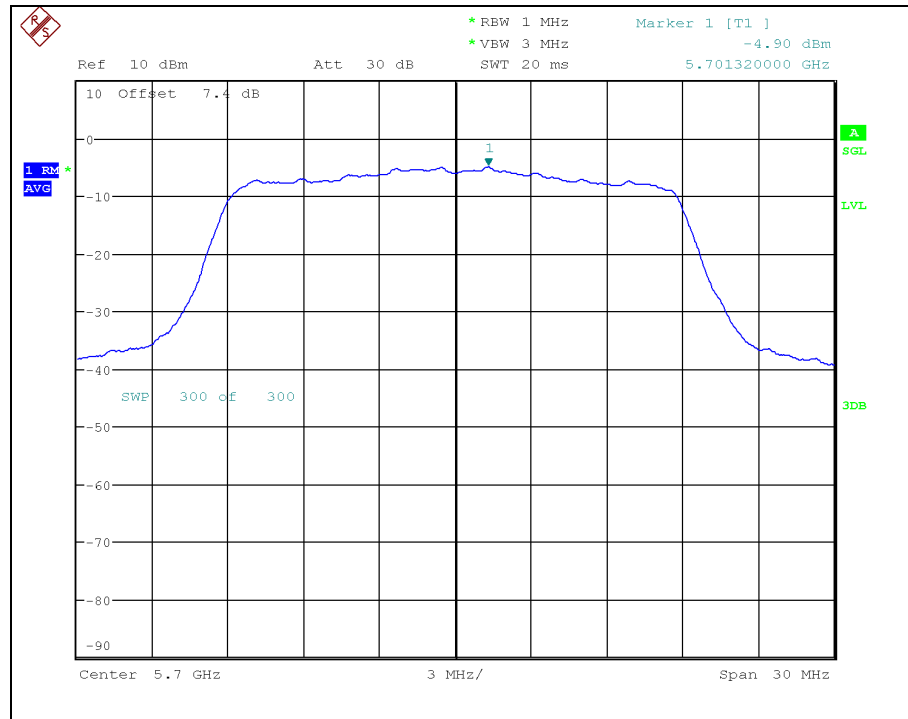

802.11ac_VHT20_ch.149

Peak Power Spectral Density

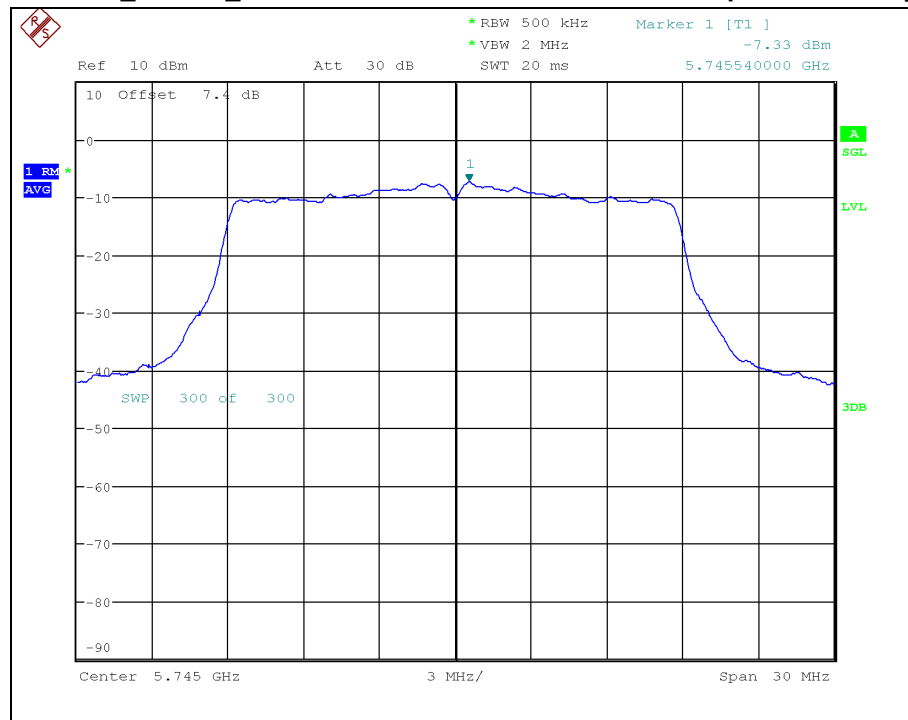


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20_ch.157

Peak Power Spectral Density

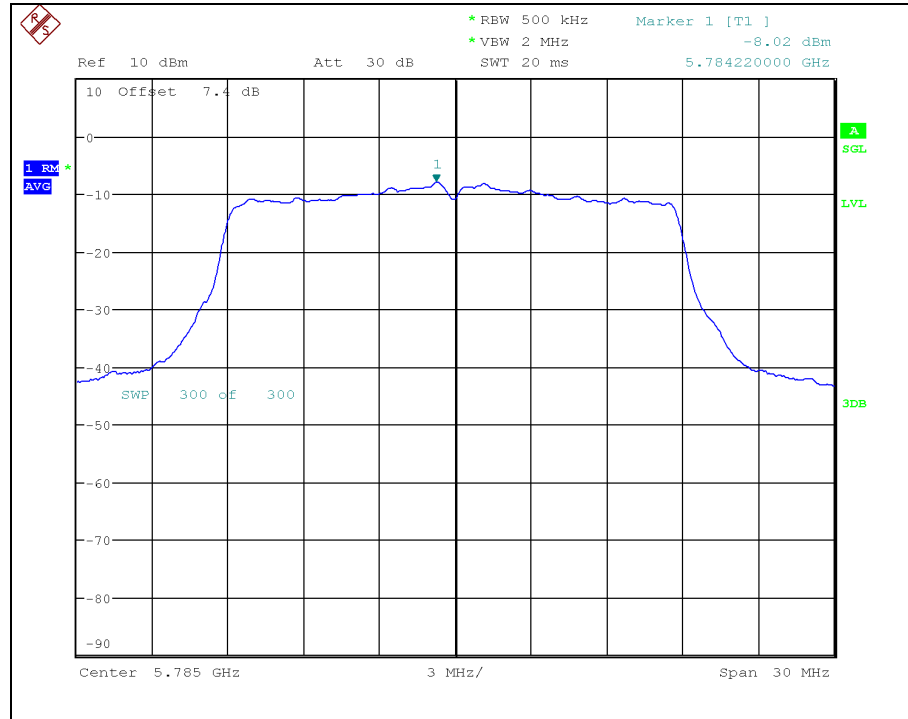

802.11ac_VHT20_ch.165

Peak Power Spectral Density

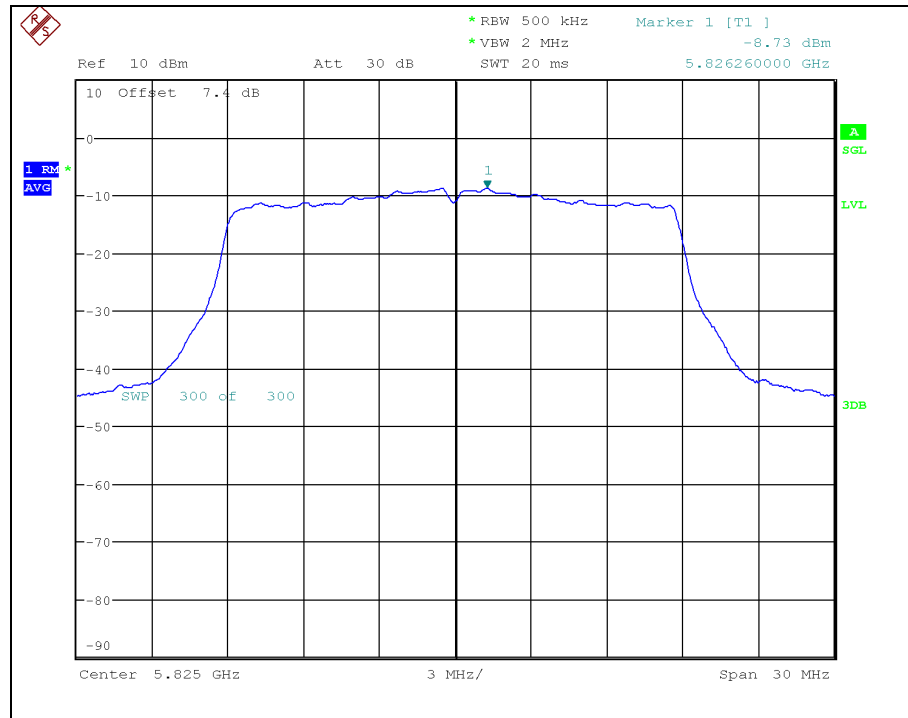


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40_ch.38

Peak Power Spectral Density

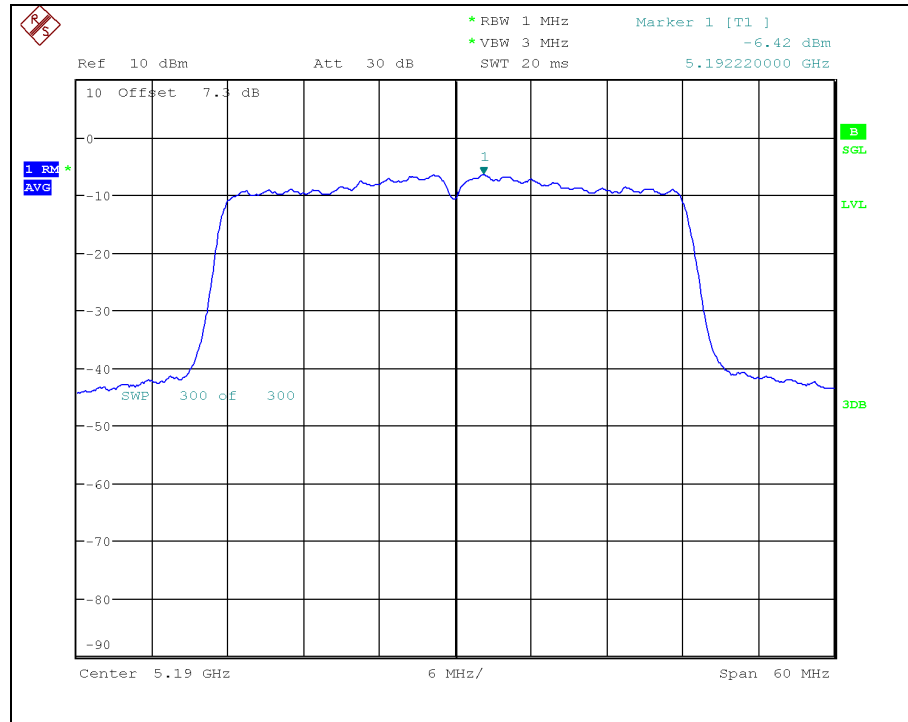

802.11ac_VHT40_ch.46

Peak Power Spectral Density

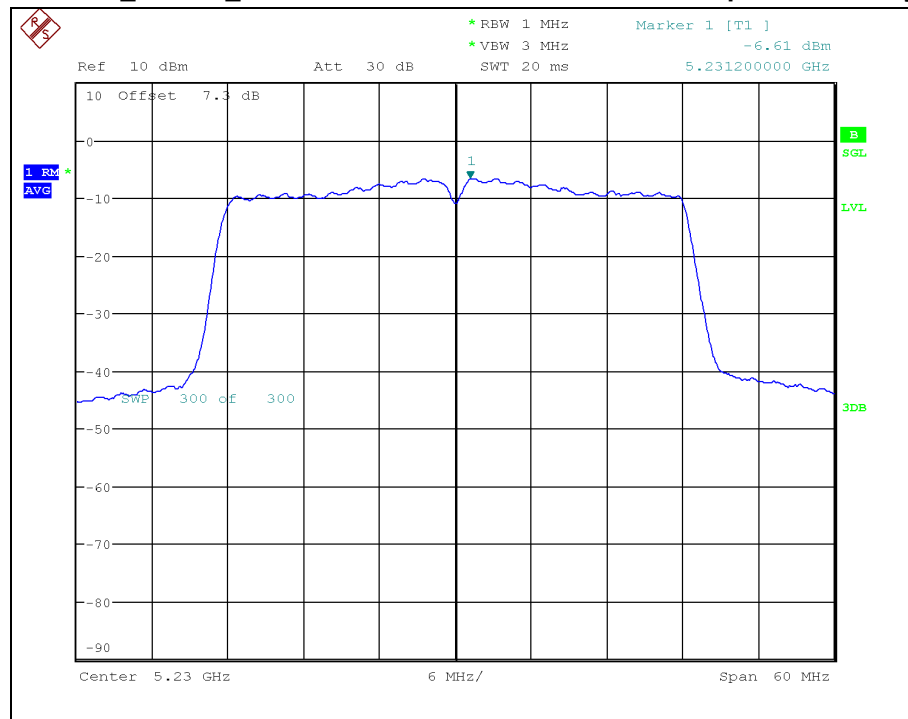


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40_ch.54

Peak Power Spectral Density

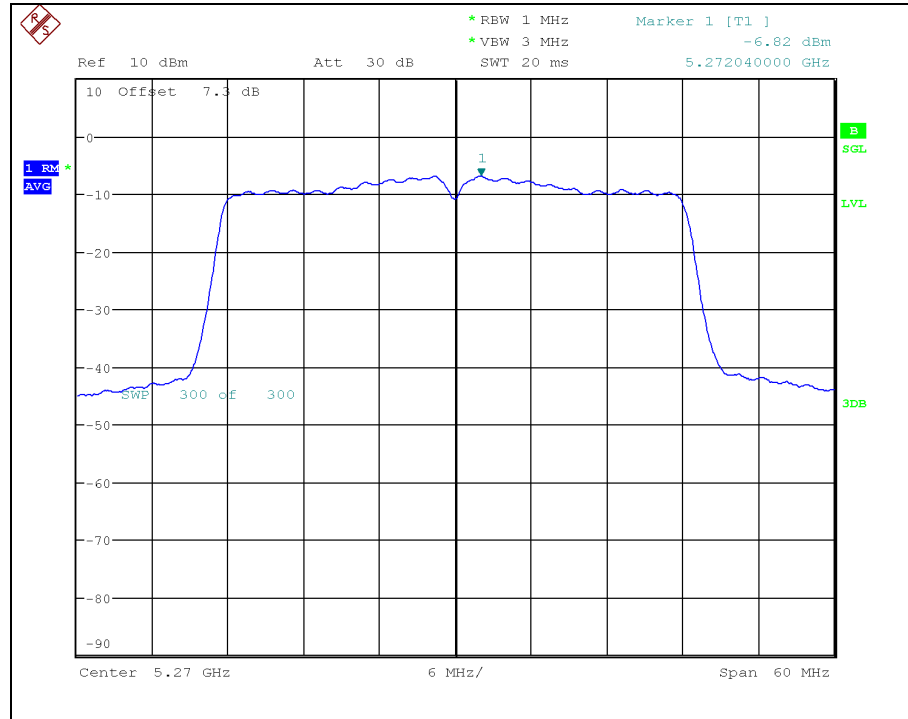

802.11ac_VHT40_ch.62

Peak Power Spectral Density

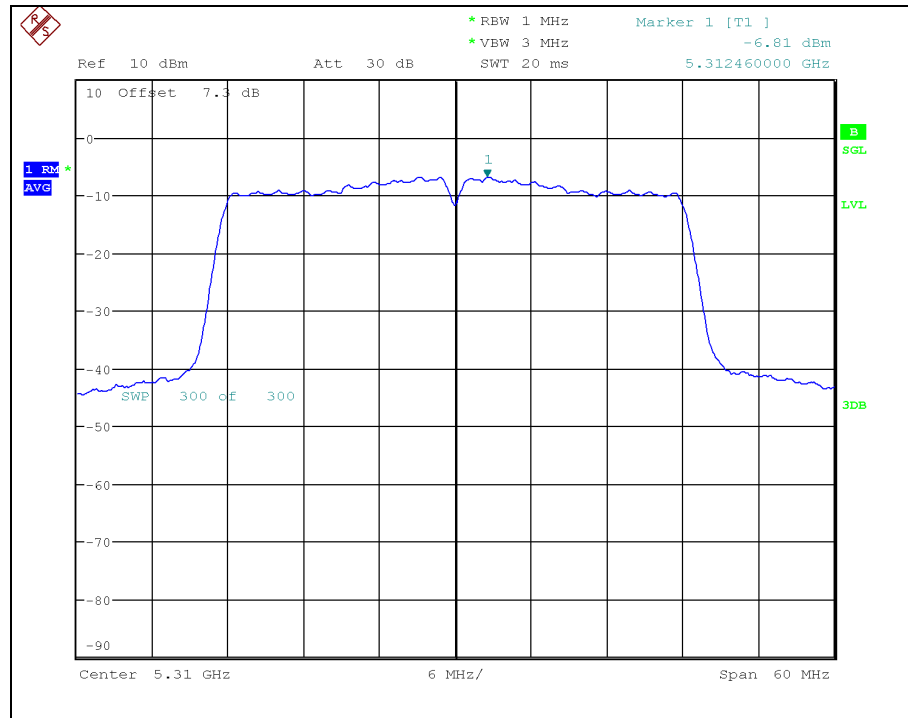


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40_ch.102

Peak Power Spectral Density

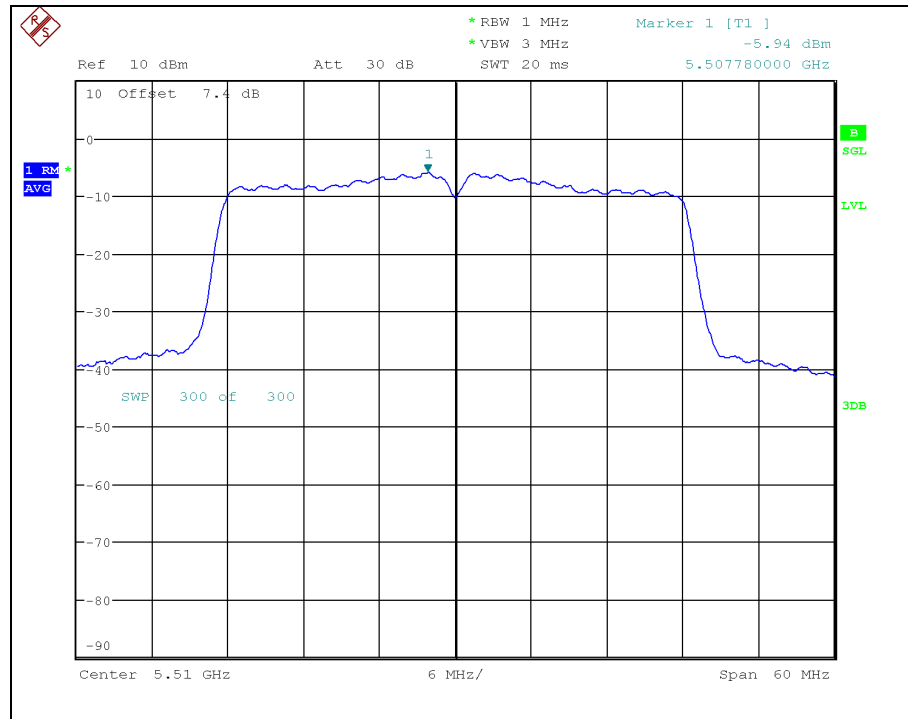

802.11ac_VHT40_ch.118


Peak Power Spectral Density

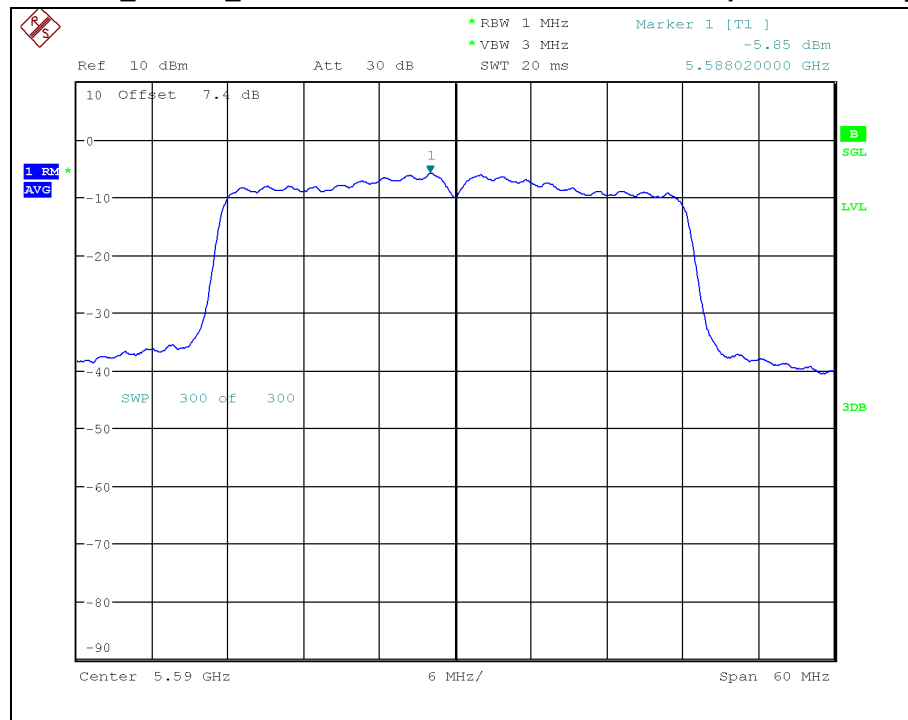


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Peak Power Spectral Density

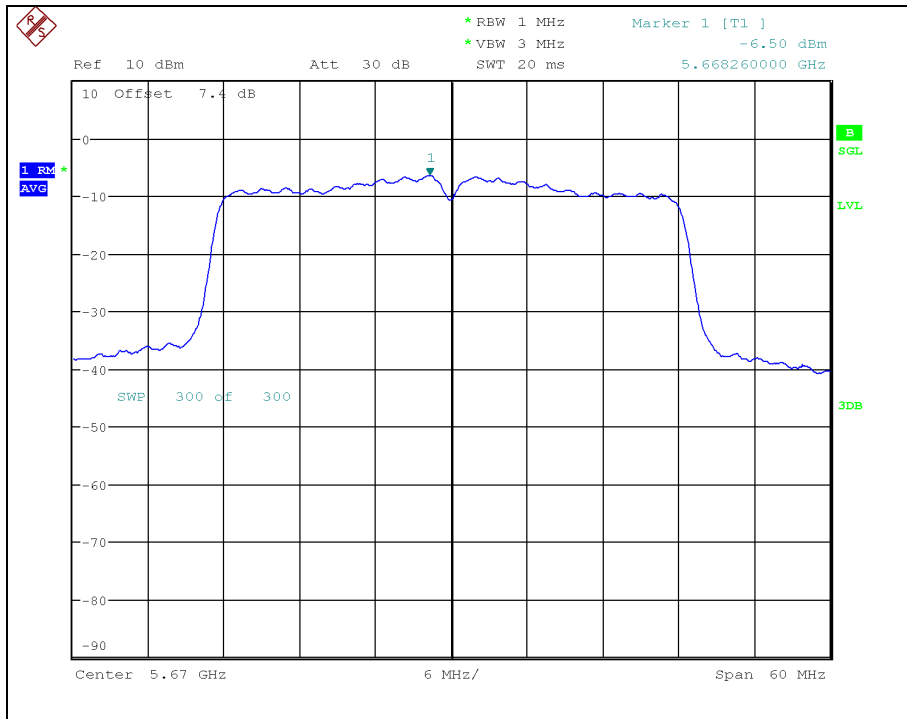


Peak Power Spectral Density

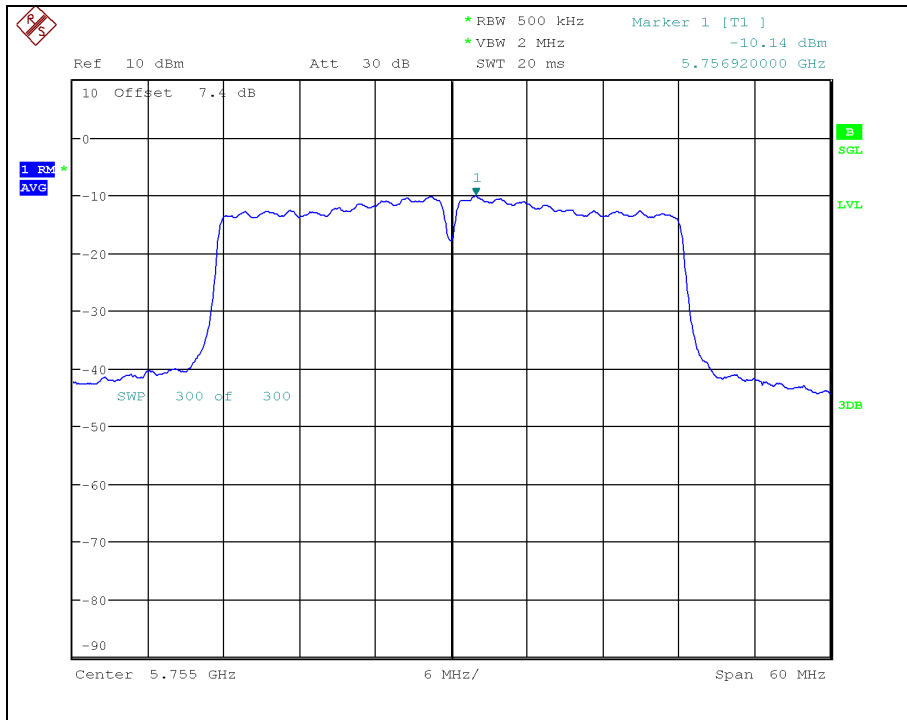

802.11ac_VHT40_ch.159

Peak Power Spectral Density

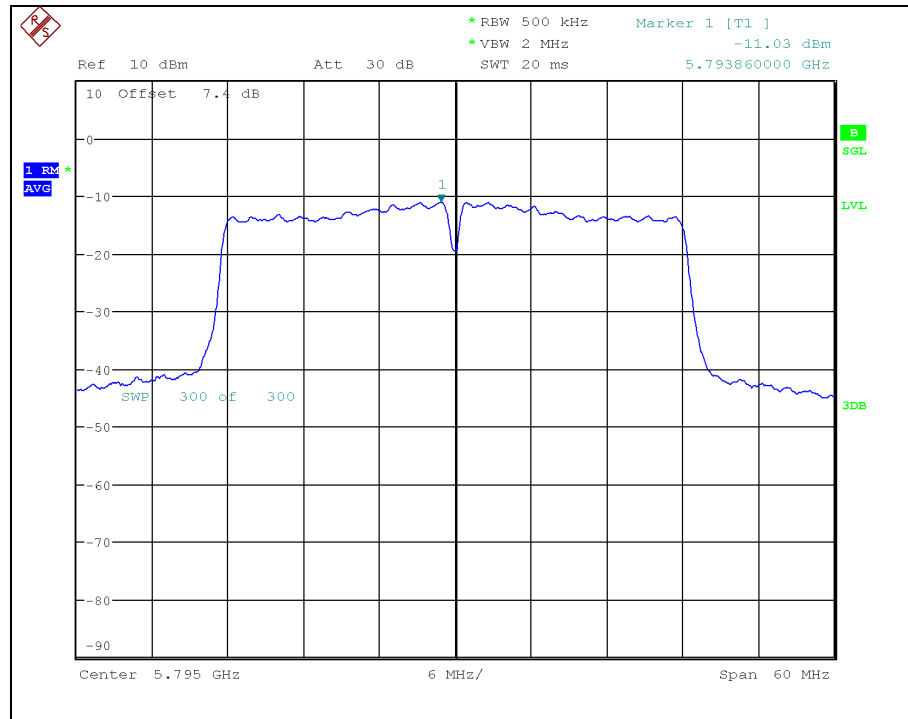

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.6 TX Radiated Spurious Emission

3.3.6.1 Test Setup

Refer to the APPENDIX I.

3.3.6.2 Limit

FCC Part 15.407 (b): Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (μV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1705	24000/F (kHz)	30
1705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 ~ 0.110	16.42 ~ 16.423	399.90 ~ 410	4.5 ~ 5.15
0.495 ~ 0.505	16.69475 ~ 16.69525	608 ~ 614	5.35 ~ 5.46
2.1735 ~ 2.1905	16.80425 ~ 16.80475	960 ~ 1240	7.25 ~ 7.75
4.125 ~ 4.128	25.5 ~ 25.67	1300 ~ 1427	8.025 ~ 8.5
4.17725 ~ 4.17775	37.5 ~ 38.	1435 ~ 1626.5	9.0 ~ 9.2
4.20725 ~ 4.20775	25 73 ~ 74.6	1645.5 ~ 1646.5	9.3 ~ 9.5
4.17725 ~ 4.17775	74.8 ~ 75.2	1660 ~ 1710	10.6 ~ 12.7
6.215 ~ 6.218	108 ~ 121.94	1718.8 ~ 1722.2	13.25 ~ 13.4
6.26775 ~ 6.26825	149.9 ~ 150.05	2200 ~ 2300	14.47 ~ 14.5
6.31175 ~ 6.31225	156.52475 ~ 156.52525	2310 ~ 2390	15.35 ~ 16.2
8.291 ~ 8.294	156.7 ~ 156.9	2483.5 ~ 2500	17.7 ~ 21.4
8.362 ~ 8.366	162.0125 ~ 167.17	2690 ~ 2900	22.01 ~ 23.12
8.37625 ~ 8.38675	3345.8 ~ 3358	3260 ~ 3267	23.6 ~ 24.0
8.41425 ~ 8.41475	3600 ~ 4400	3332 ~ 3339	31.2 ~ 31.8
12.51975 ~ 12.52025	3345.8 ~ 3358	240 ~ 285	36.43 ~ 36.5
12.57675 ~ 12.57725	3600 ~ 4400	322 ~ 335.4	Above 38.6
13.36 ~ 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

3.3.6.3 Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a Broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
(The EUT was pre-tested with three axes (X, Y, Z) and the final test was performed at the worst case.)
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of **KDB789033 D02v02r01**

General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

• EUT Duty Cycle

- (1) The EUT shall be configured or modified to transmit continuously except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- (2) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
- (3) Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Measurements below 1 GHz

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Measurements above 1 GHz (Peak)

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Peak emission levels are measured by setting the analyzer as follows:
 - (i) RBW = 1 MHz.
 - (ii) VBW $\geq$ 3 MHz.
 - (iii) Detector = Peak.
 - (iv) Sweep time = Auto.
 - (v) Trace mode = Max hold.
 - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle.

For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Measurements above 1 GHz (Method AD)

- (i) RBW = 1 MHz.
- (ii) VBW $\geq$ 3 MHz.
- (iii) Detector = RMS, if span / (# of points in sweep) $\leq$ RBW / 2. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (iv) Averaging type = power (i.e., RMS)
 - As an alternative, the detector and averaging type may be set for linear voltage averaging. Some analyzers require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- (v) Sweep time = Auto.
- (vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of 1/x, where x is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces shall be averaged.
- (vii) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - If power averaging (RMS) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Please refer to Appendix III for the duty cycle correction factor

3.3.6.4 Test Result

9 kHz ~ 40 GHz Data for 802.11a

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 1	36	4 552.00	19.17	31.84	V	19.39	0.39	54.0	74.0	39.0	51.2	15.0	22.8
		10 360.00	N/A	62.34	V	1.85	0.39	N/A	68.2	N/A	64.2	N/A	4.0
	44	10 440.00	N/A	59.91	V	1.95	0.39	N/A	68.2	N/A	61.9	N/A	6.3
	48	10 480.00	N/A	57.87	V	2.15	0.39	N/A	68.2	N/A	60.0	N/A	8.2
U-NII 2A	52	10 520.00	N/A	58.74	V	3.28	0.39	N/A	68.2	N/A	62.0	N/A	6.2
	60	10 600.00	47.44	61.10	V	3.28	0.39	54.0	74.0	51.1	64.4	2.9	9.6
	64	10 640.00	46.69	60.28	V	3.28	0.39	54.0	74.0	50.4	63.6	3.6	10.4

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 2C	100	5 374.64	19.09	30.91	V	20.99	0.39	54.0	74.0	40.5	51.9	13.5	22.1
		11 000.00	44.18	58.26	V	4.15	0.39	54.0	74.0	48.7	62.4	5.3	11.6
	120	11 200.00	38.03	52.28	V	3.55	0.39	54.0	74.0	42.0	55.8	12.0	18.2
	140	11 400.00	37.95	51.89	V	3.85	0.39	54.0	74.0	42.2	55.7	11.8	18.3
U-NII 3	149	11 490.00	39.37	53.33	V	3.95	0.39	54.0	74.0	43.7	57.3	10.3	16.7
	157	11 570.00	39.96	53.85	V	4.03	0.39	54.0	74.0	44.4	57.9	9.6	16.1
	165	11 650.00	39.68	54.05	V	3.63	0.39	54.0	74.0	43.7	57.7	10.3	16.3

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

9 kHz ~ 40 GHz Data for 802.11n_HT20

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 1	36	10 360.00	N/A	61.32	V	1.85	0.40	N/A	68.2	N/A	63.2	N/A	5.0
	44	10 440.00	N/A	60.08	V	1.95	0.40	N/A	68.2	N/A	62.0	N/A	6.2
	48	10 480.00	N/A	57.50	V	2.15	0.40	N/A	68.2	N/A	59.7	N/A	8.6
U-NII 2A	52	10 520.00	N/A	59.32	V	3.28	0.40	N/A	68.2	N/A	62.6	N/A	5.6
	60	10 600.00	45.96	61.13	V	3.28	0.40	54.0	74.0	49.6	64.4	4.4	9.6
	64	10 640.00	45.51	61.38	V	3.28	0.40	54.0	74.0	49.2	64.7	4.8	9.3

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 2C	100	11 000.00	42.92	60.29	V	4.15	0.40	54.0	74.0	47.5	64.4	6.5	9.6
	120	11 200.00	37.51	53.20	V	3.55	0.40	54.0	74.0	41.5	56.8	12.5	17.3
	140	11 400.00	37.25	52.21	V	3.85	0.40	54.0	74.0	41.5	56.1	12.5	17.9
U-NII 3	149	11 490.00	38.23	54.47	V	3.95	0.40	54.0	74.0	42.6	58.4	11.4	15.6
	157	11 570.00	39.99	55.87	V	4.03	0.40	54.0	74.0	44.4	59.9	9.6	14.1
	165	11 650.00	38.92	54.49	V	3.63	0.40	54.0	74.0	42.9	58.1	11.1	15.9

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

9 kHz ~ 40 GHz Data for 802.11n_HT40

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 1	38	10 380.00	N/A	58.04	V	1.85	0.40	N/A	68.2	N/A	59.9	N/A	8.3
	46	10 460.00	N/A	56.26	V	2.15	0.40	N/A	68.2	N/A	58.4	N/A	9.8
U-NII 2A	54	10 540.00	N/A	57.15	V	3.28	0.40	N/A	68.2	N/A	60.4	N/A	7.8
	62	10 620.00	43.94	58.64	V	3.28	0.40	54.0	74.0	47.6	61.9	6.4	12.1

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 2C	102	11 020.00	41.37	57.18	V	4.15	0.40	54.0	74.0	45.9	61.3	8.1	12.7
	118	11 180.00	36.69	51.37	V	3.65	0.40	54.0	74.0	40.7	55.0	13.3	19.0
	134	11 340.00	34.87	46.82	V	3.65	0.40	54.0	74.0	38.9	50.5	15.1	23.5
U-NII 3	151	11 510.00	39.08	54.71	V	4.13	0.40	54.0	74.0	43.6	58.8	10.4	15.2
	159	11 590.00	38.16	53.08	V	4.03	0.40	54.0	74.0	42.6	57.1	11.4	16.9

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

9 kHz ~ 40 GHz Data for 802.11ac_VHT20

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 1	36	10 360.00	N/A	62.04	0	1.85	0.38	N/A	68.2	N/A	63.9	N/A	4.3
	44	10 440.00	N/A	62.16	0	1.95	0.38	N/A	68.2	N/A	64.1	N/A	4.1
	48	10 480.00	N/A	58.33	0	2.15	0.38	N/A	68.2	N/A	60.5	N/A	7.7
U-NII 2A	52	10 520.00	N/A	59.10	0	3.28	0.38	N/A	68.2	N/A	62.4	N/A	5.8
	60	10 600.00	46.03	61.22	0	3.28	0.38	54.0	74.0	49.7	64.5	4.3	9.5
	64	10 640.00	45.90	61.09	0	3.28	0.38	54.0	74.0	49.6	64.4	4.4	9.6

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 2C	100	11 000.00	44.21	60.17	0	4.15	0.38	54.0	74.0	48.7	64.3	5.3	9.7
	120	11 200.00	37.59	53.34	0	3.55	0.38	54.0	74.0	41.5	56.9	12.5	17.1
	140	11 400.00	36.77	51.93	0	3.85	0.38	54.0	74.0	41.0	55.8	13.0	18.2
U-NII 3	149	11 490.00	38.74	53.78	0	3.95	0.38	54.0	74.0	43.1	57.7	10.9	16.3
	157	11 570.00	39.85	55.37	0	4.03	0.38	54.0	74.0	44.3	59.4	9.7	14.6
	165	11 650.00	37.58	53.87	0	3.63	0.38	54.0	74.0	41.6	57.5	12.4	16.5

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

9 kHz ~ 40 GHz Data for 802.11ac_VHT40

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 1	38	10 380.00	N/A	57.55	0	1.85	0.41	N/A	68.2	N/A	59.4	N/A	8.8
	46	10 460.00	N/A	57.42	0	2.15	0.41	N/A	68.2	N/A	59.6	N/A	8.6
U-NII 2A	54	10 540.00	N/A	57.14	0	3.28	0.41	N/A	68.2	N/A	60.4	N/A	7.8
	62	10 620.00	42.52	57.82	0	3.28	0.41	54.0	74.0	46.2	61.1	7.8	12.9

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength

$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Band	Tested Channel	Freq.	Reading		Pol.	T.F (dB)	DCCF (dB)	Limits		Result		Margin	
			(dBμV/m)					(dBμV/m)		(dB)			
		(MHz)	AV / Peak					AV / Peak		AV / Peak		AV / Peak	
U-NII 2C	102	11 020.00	41.14	56.45	0	4.15	0.41	54.0	74.0	45.7	60.6	8.3	13.4
	118	11 180.00	36.75	51.23	0	3.65	0.41	54.0	74.0	40.8	54.9	13.2	19.1
	134	11 340.00	35.75	49.57	0	3.65	0.41	54.0	74.0	39.8	53.2	14.2	20.8
U-NII 3	151	11 510.00	38.65	54.63	0	4.13	0.41	54.0	74.0	43.2	58.8	10.8	15.2
	159	11 590.00	37.93	53.70	0	4.03	0.41	54.0	74.0	42.4	57.7	11.6	16.3

Note 1: No other spurious and harmonic emissions were found greater than listed emissions on above table.

Note 2: DCCF(Duty Cycle Correction Factor)

For DCCF(Duty Cycle Correction Factor) please refer to appendix III.

Note 3: Sample Calculation.

Margin = Limit – Result / Peak Result = Peak Reading + TF / Average Result = Average Reading + TF + DCCF

TF = Ant factor + Cable Loss + Filter Loss – Amp Gain

Note 4: The limit is converted to field strength



$E[dB\mu V/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 \text{ dB} = 68.2 \text{ dB}\mu V/m$

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511

www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.5.5 Test Plot for Radiated Spurious Emission

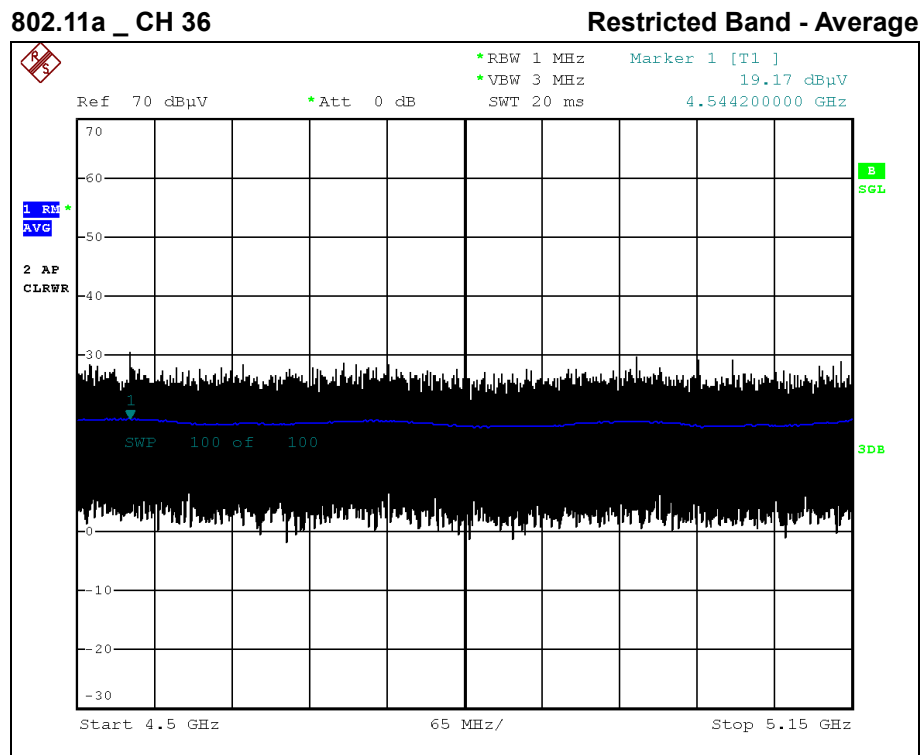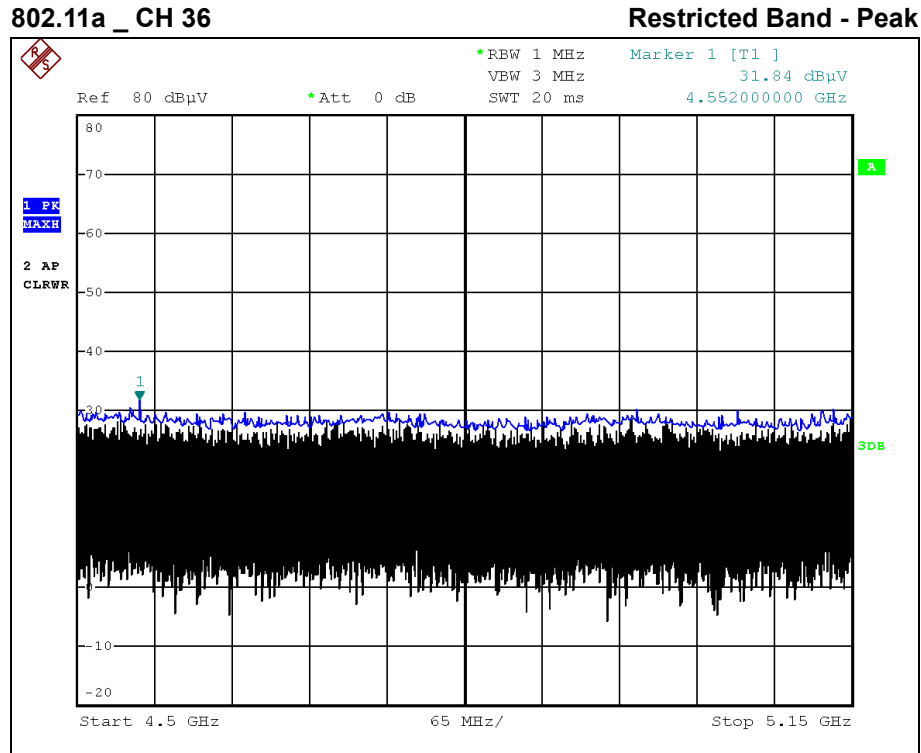


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 36

Spurious - Peak

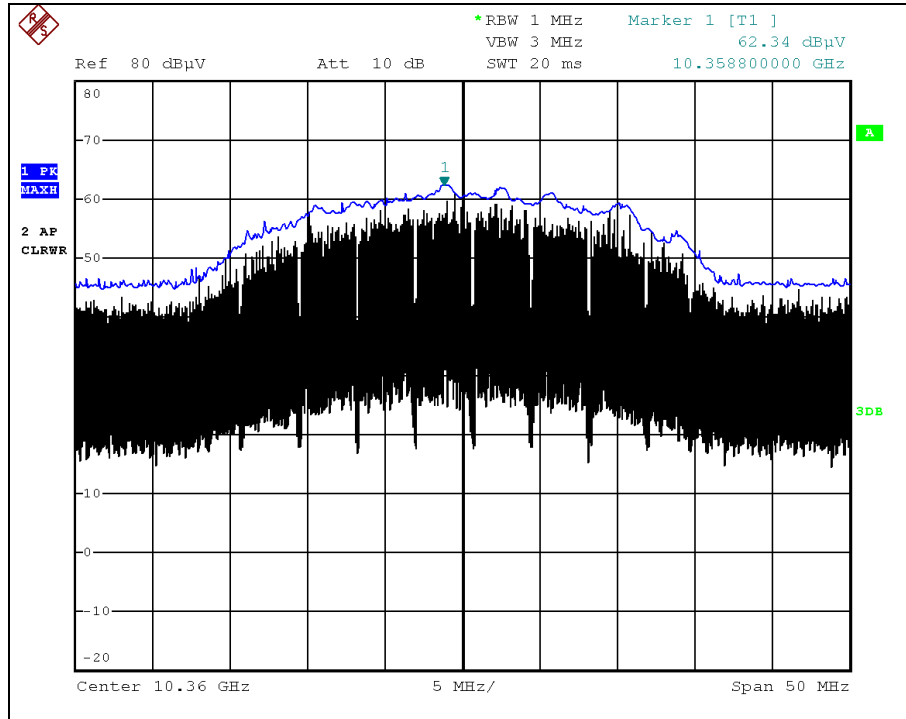

802.11a _ CH 36

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 44

Spurious - Peak

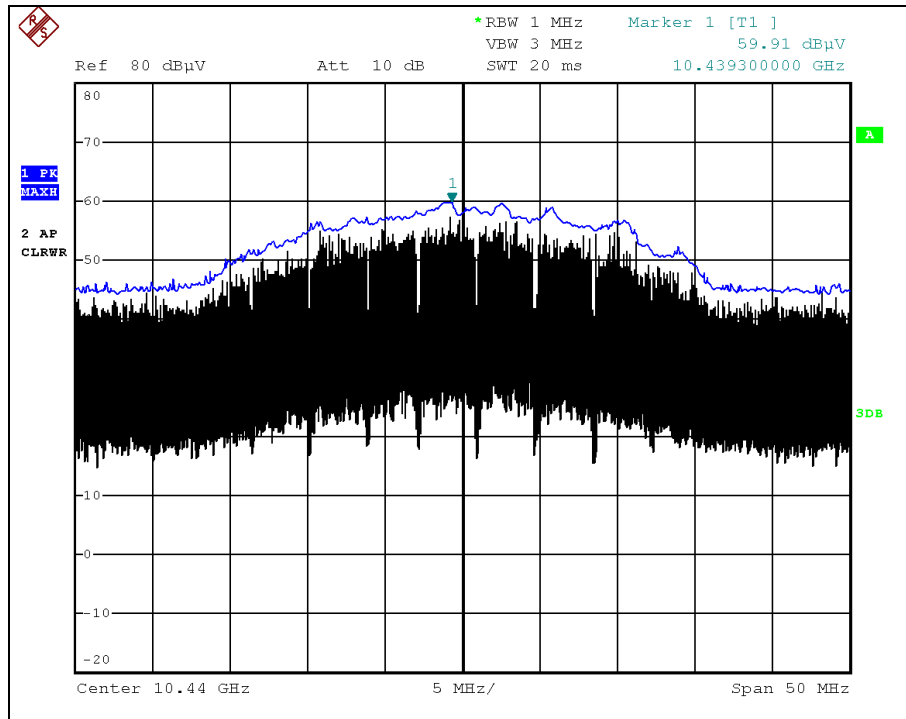

802.11a _ CH 44

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 48

Spurious - Peak

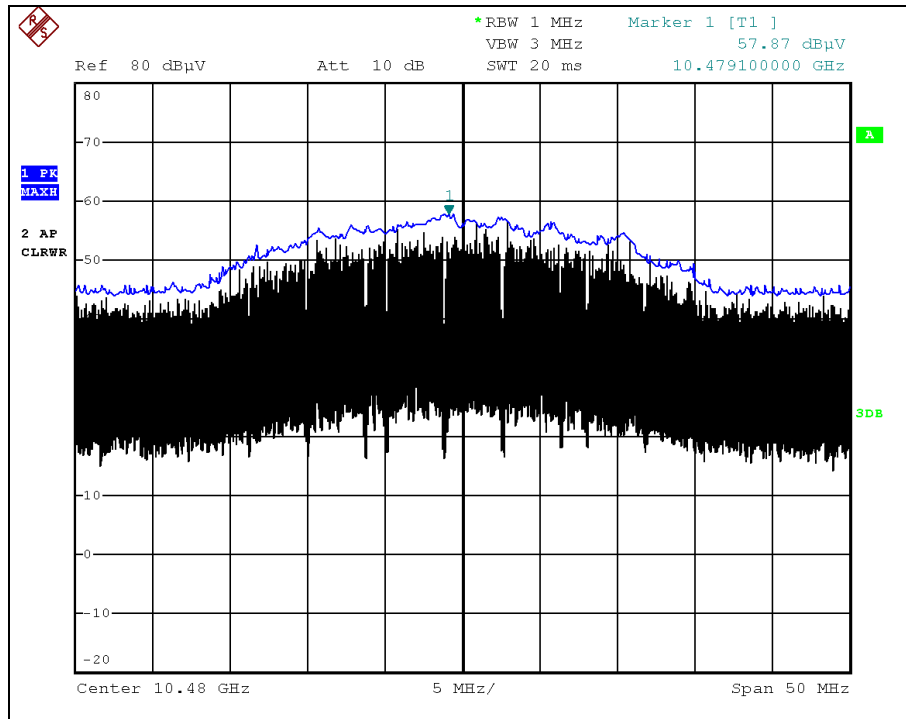

802.11a _ CH 48

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 52

Spurious - Peak

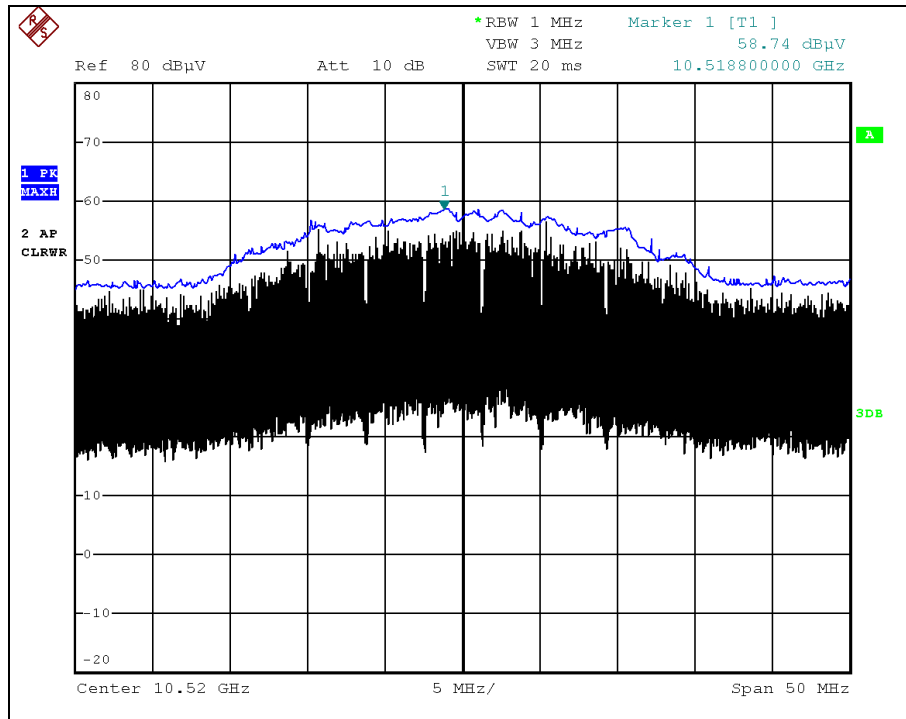

802.11a _ CH 52

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 60

Spurious - Peak

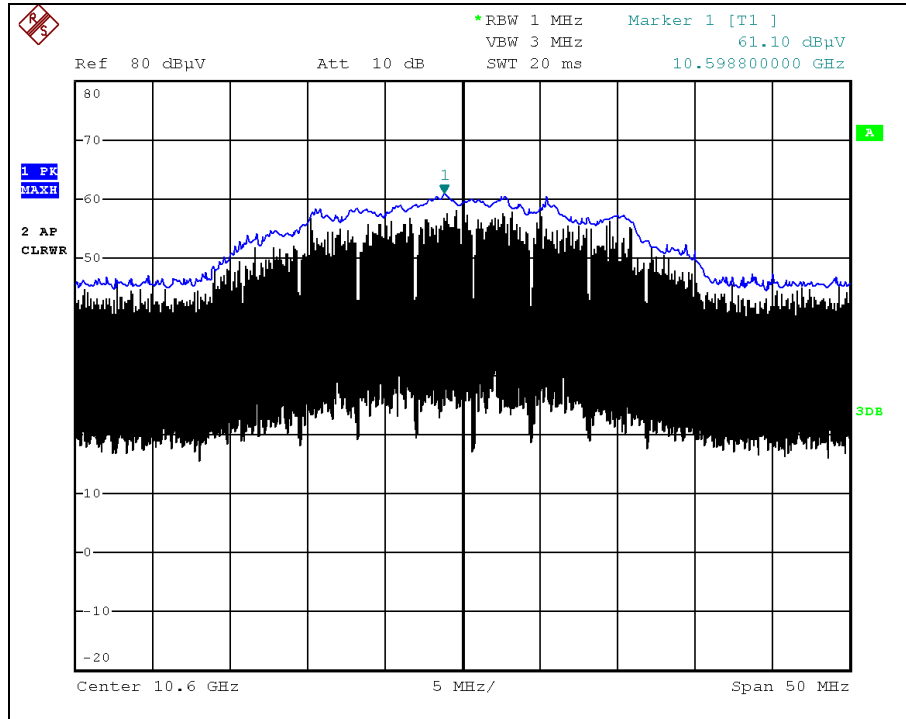

802.11a _ CH 60

Spurious - Average

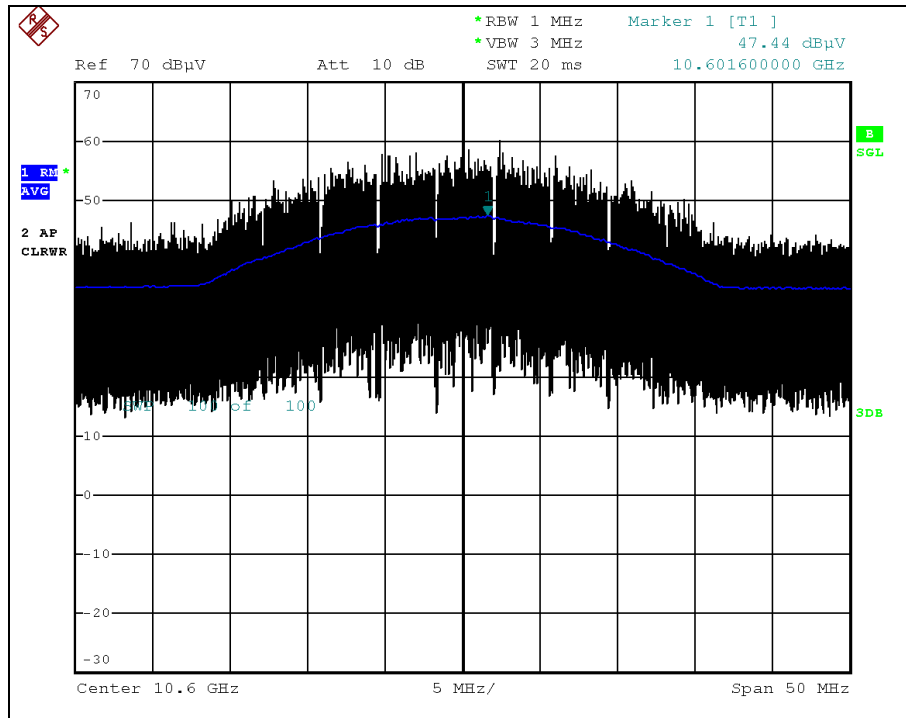


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 64

Spurious - Peak

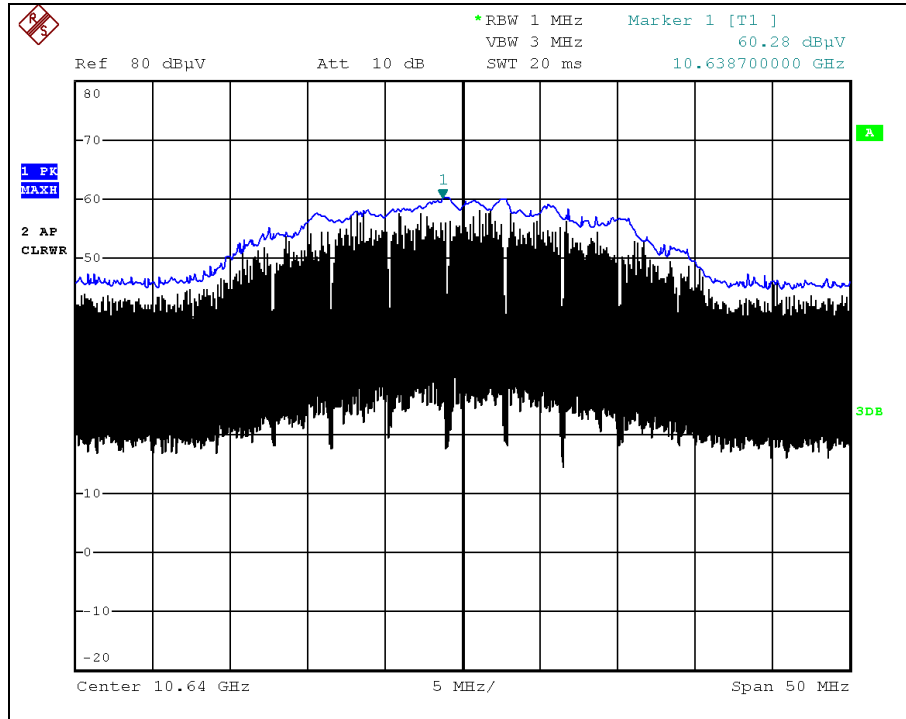

802.11a _ CH 64

Spurious - Average

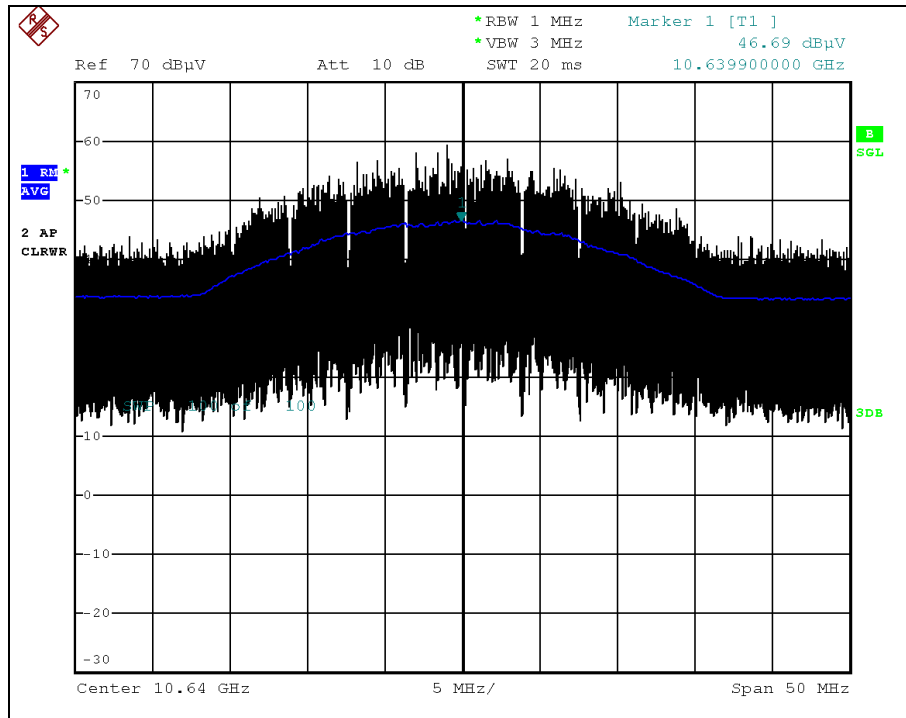


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 100

Restricted Band - Peak

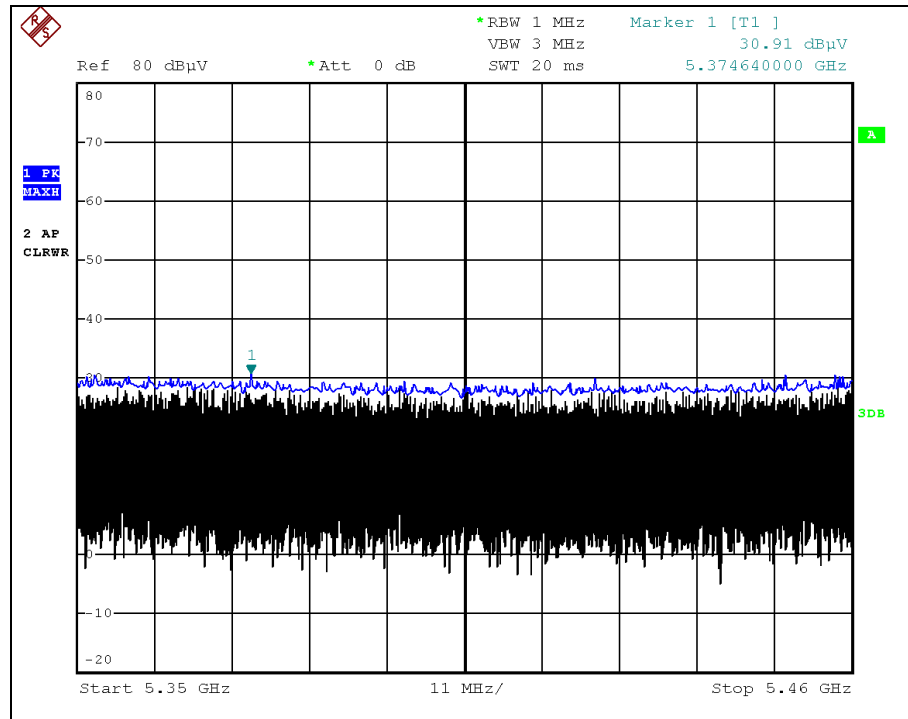

802.11a _ CH 100

Restricted Band - Average

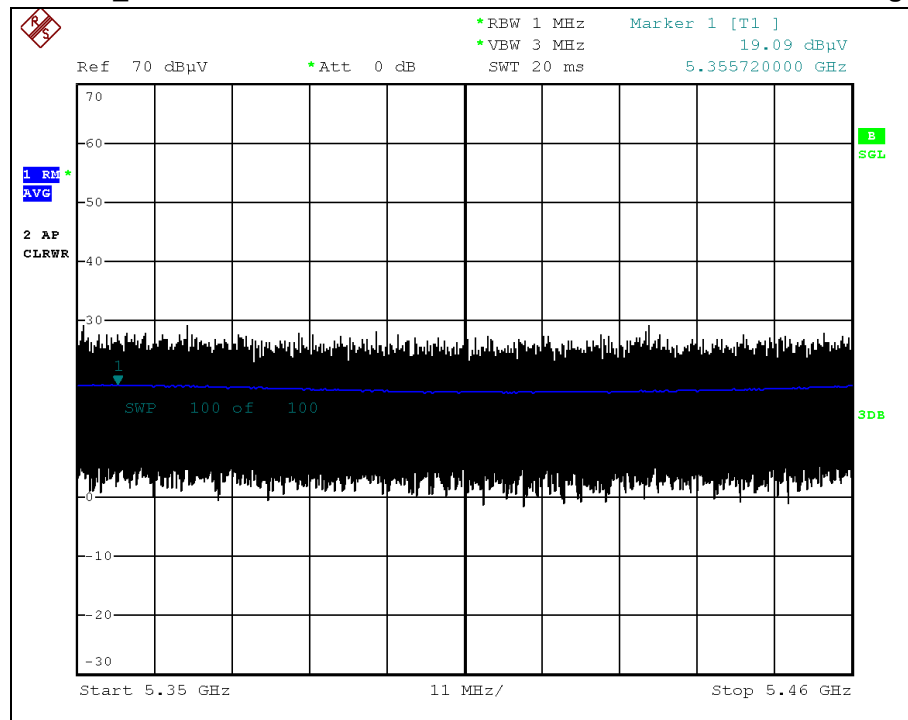


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 100

Spurious - Peak

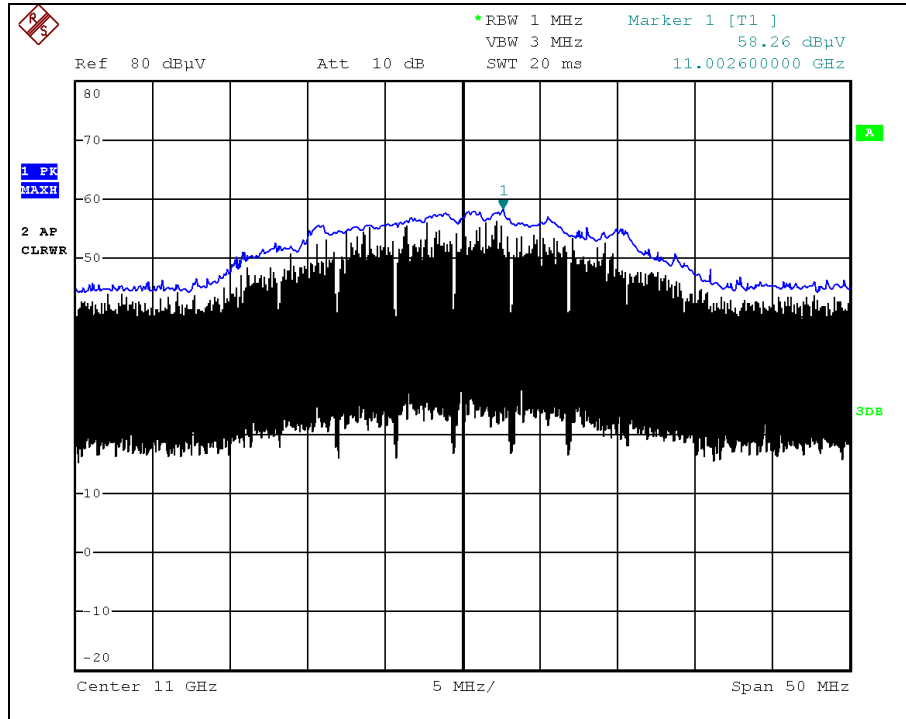

802.11a _ CH 100

Spurious - Average

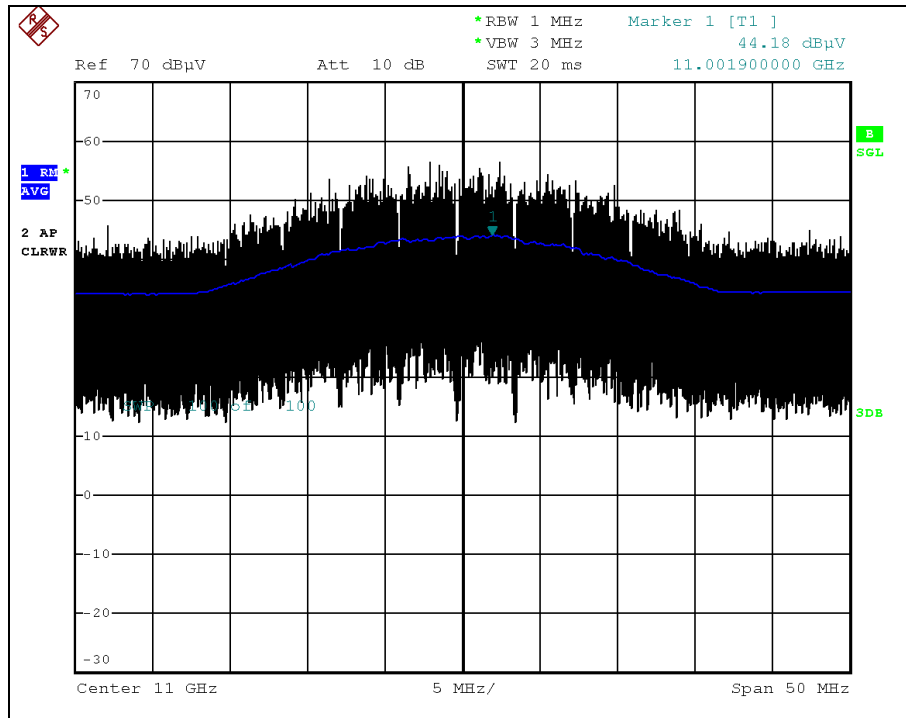


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 120

Spurious - Peak

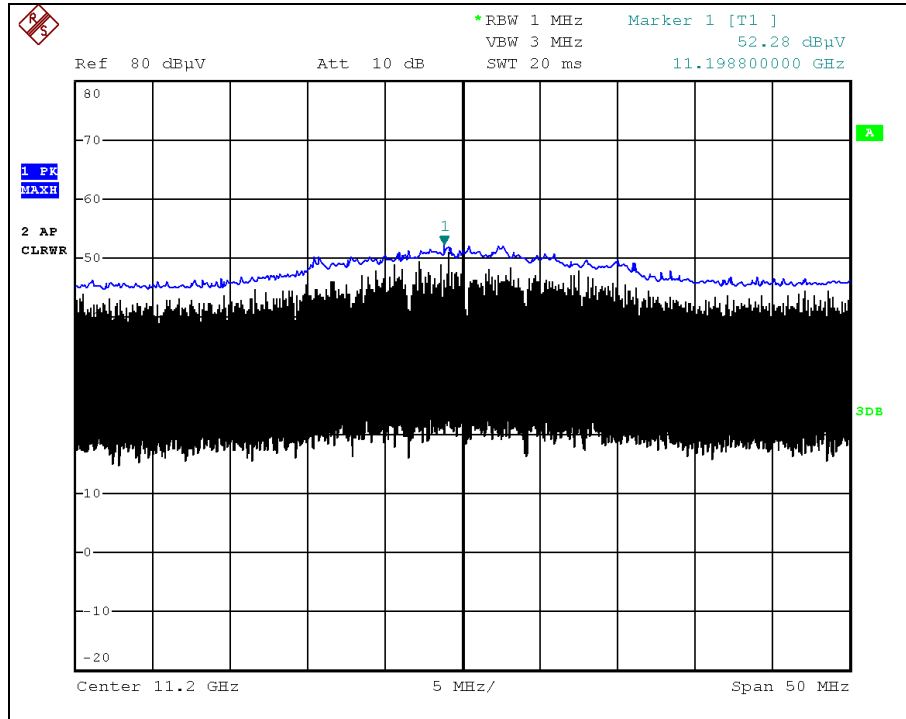

802.11a _ CH 120

Spurious - Average

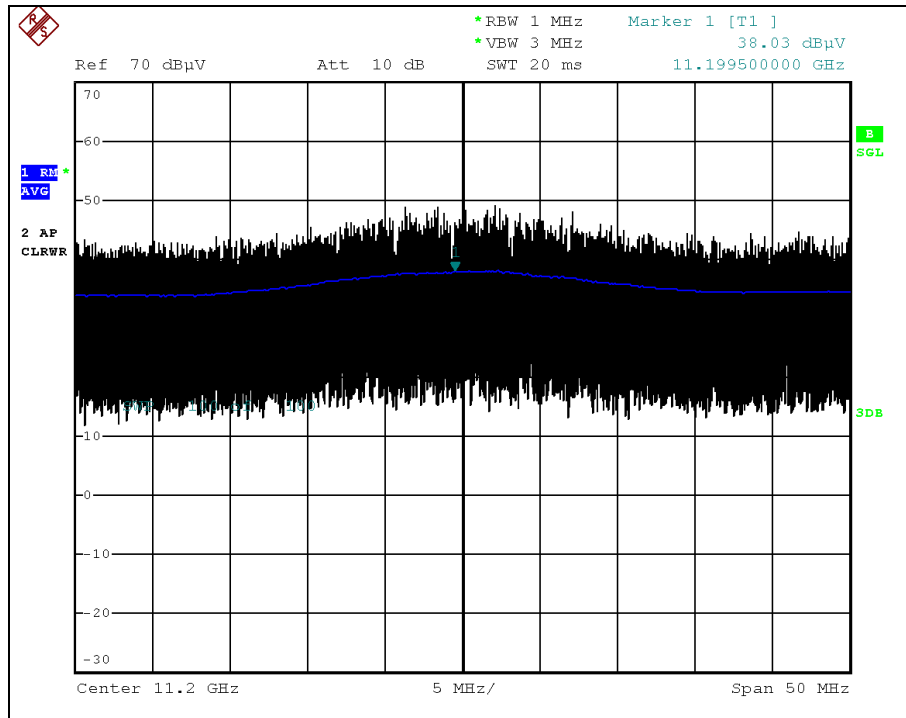


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 140

Spurious - Peak

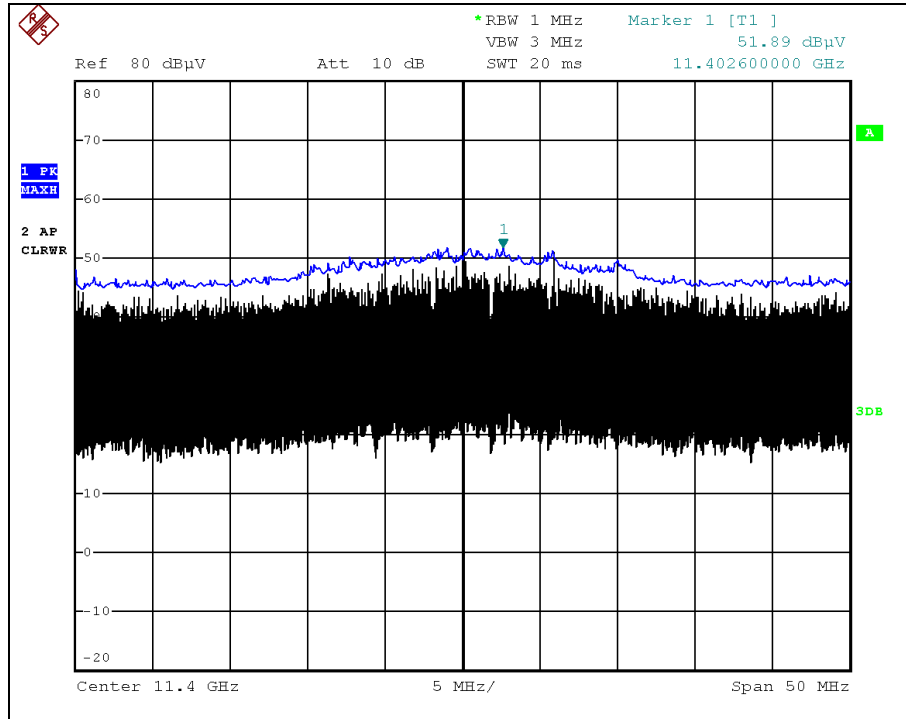

802.11a _ CH 140

Spurious - Average

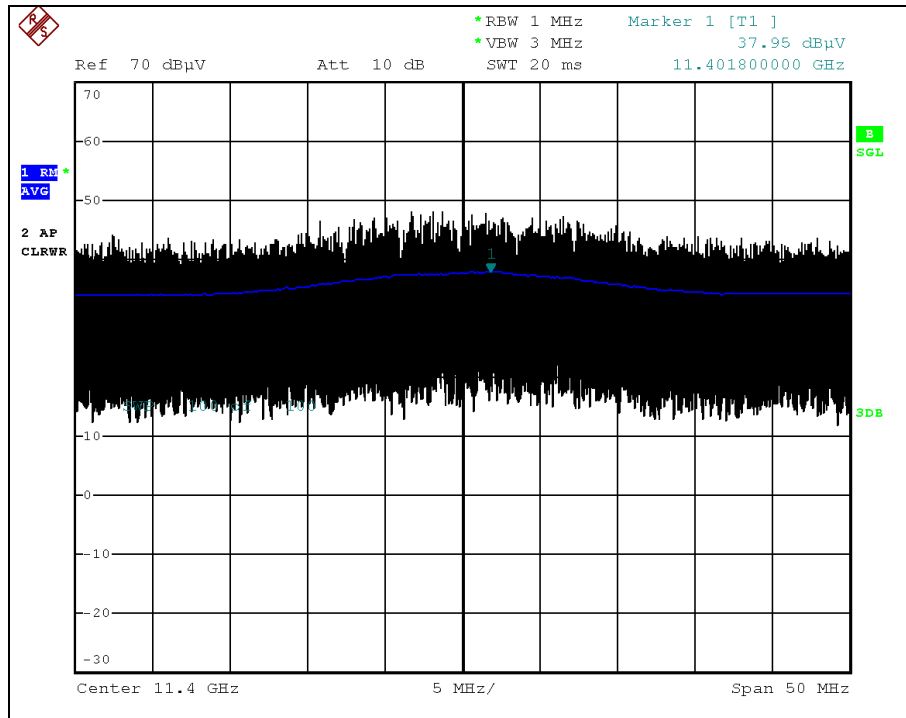


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 149

Spurious - Peak

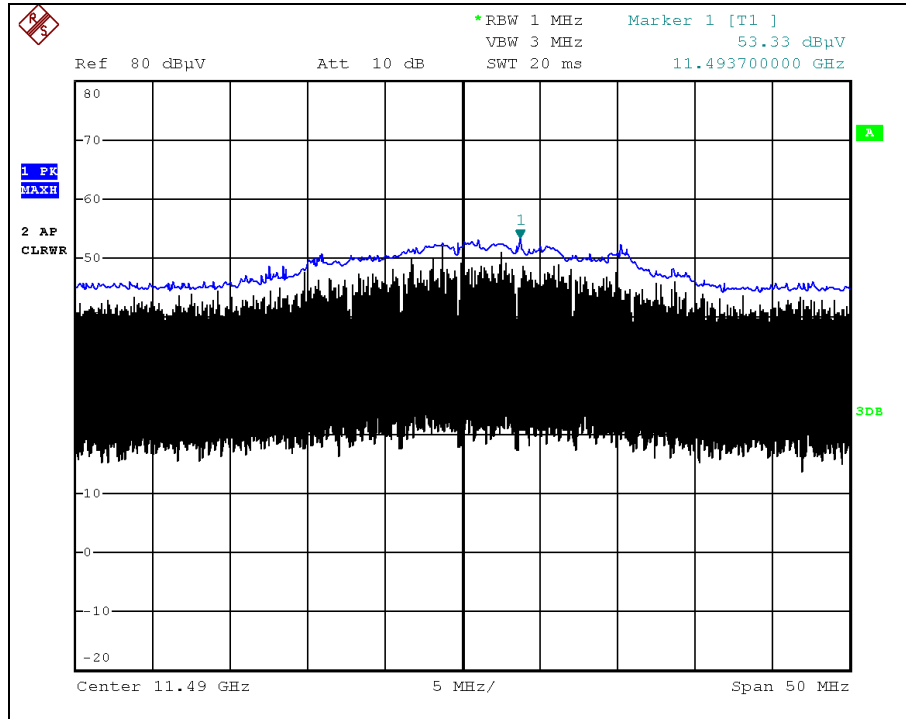

802.11a _ CH 149

Spurious - Average

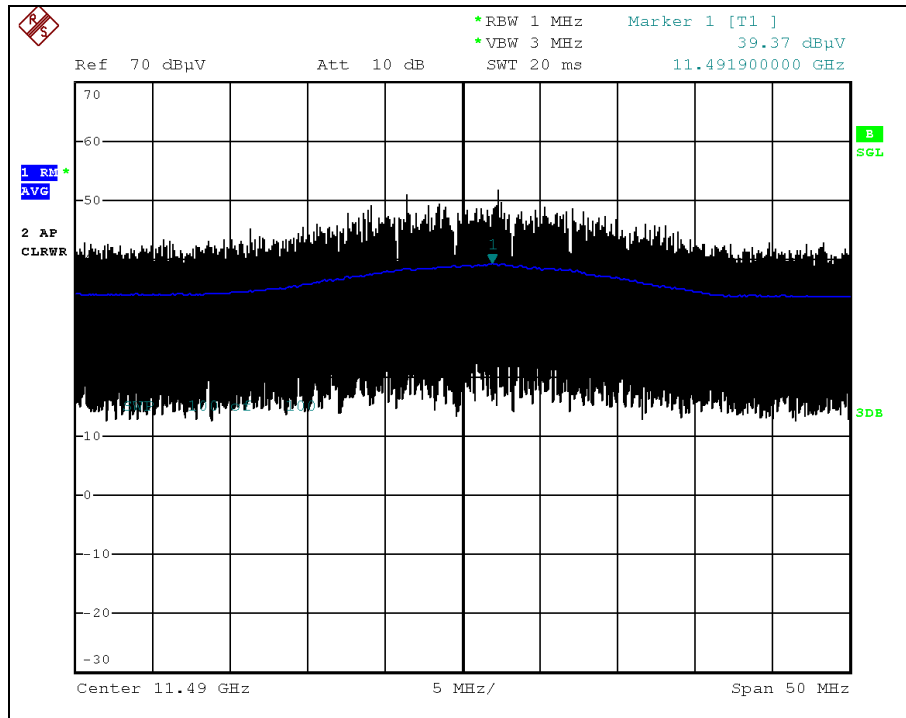


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 157

Spurious - Peak

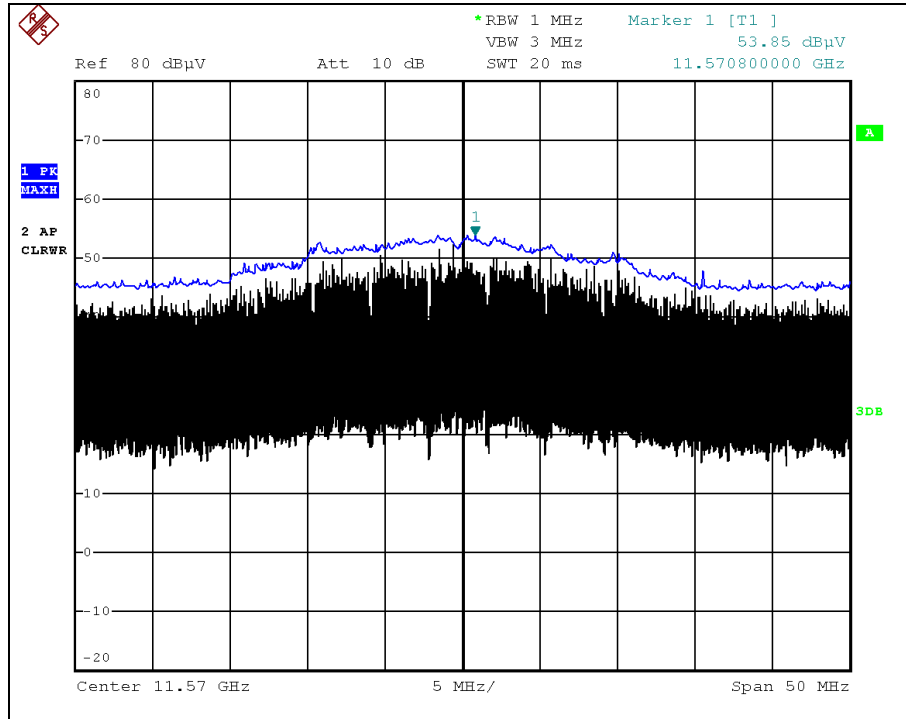

802.11a _ CH 157

Spurious - Average

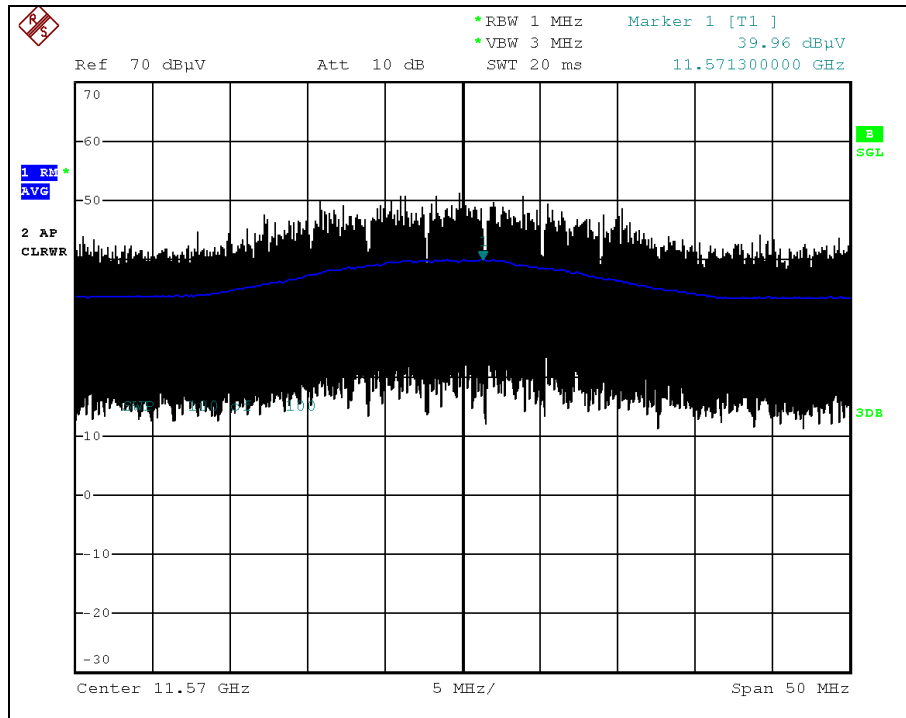


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11a _ CH 165

Spurious - Peak

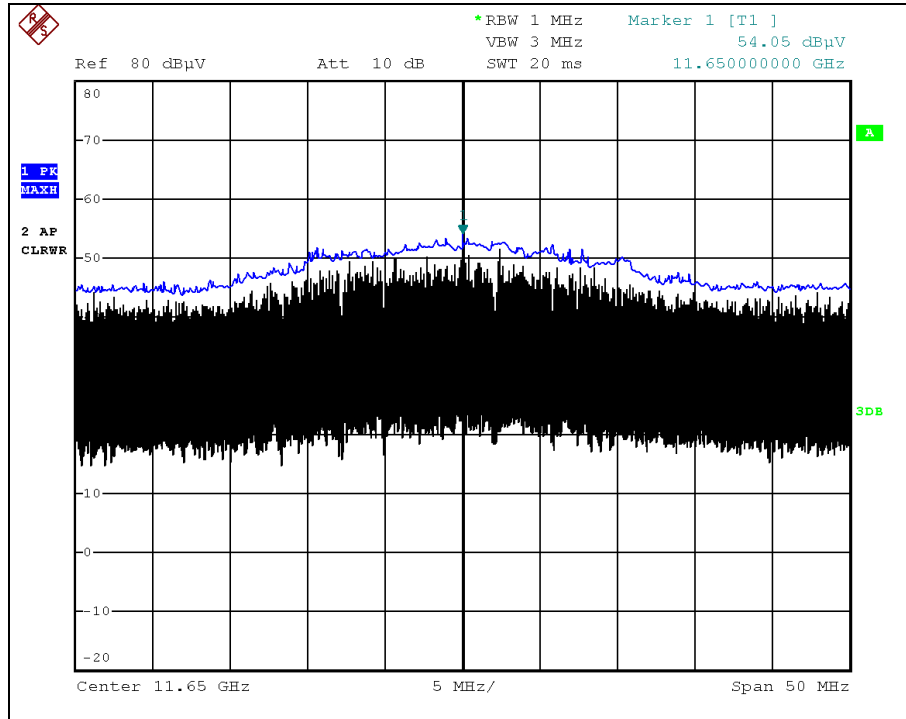

802.11a _ CH 165

Spurious - Average

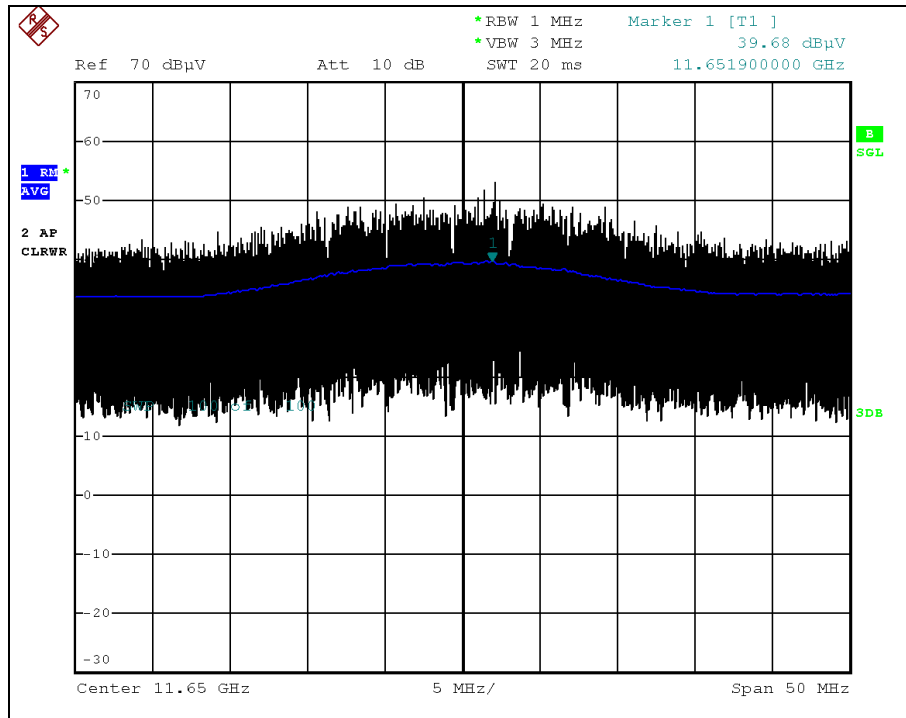


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 36

Spurious - Peak

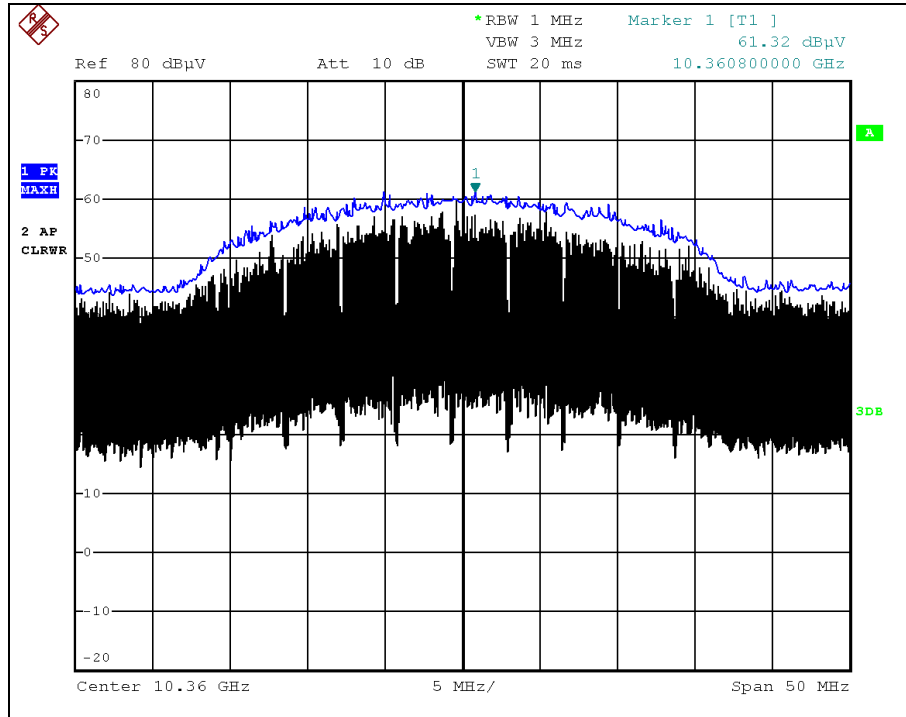

802.11n_HT20 _ CH 36

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 44

Spurious - Peak

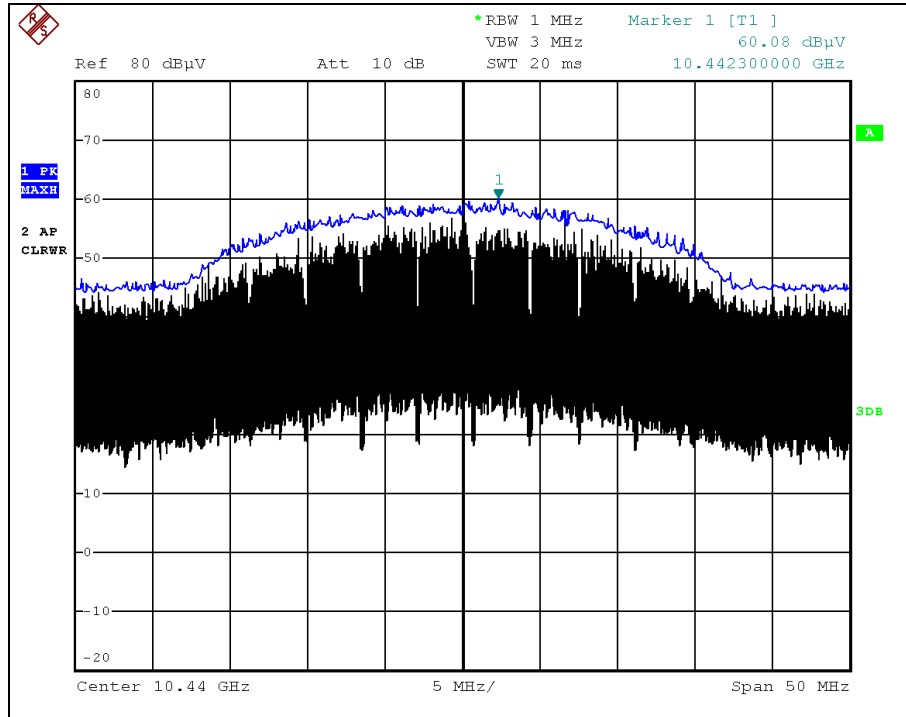

802.11n_HT20 _ CH 44

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 48

Spurious - Peak

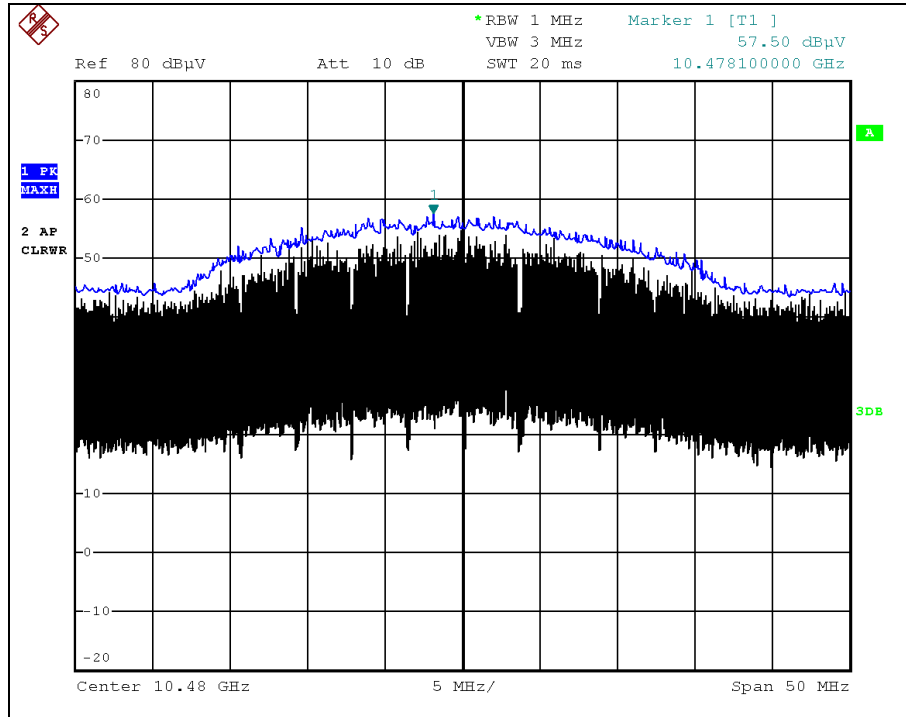

802.11n_HT20 _ CH 48

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 52

Spurious - Peak

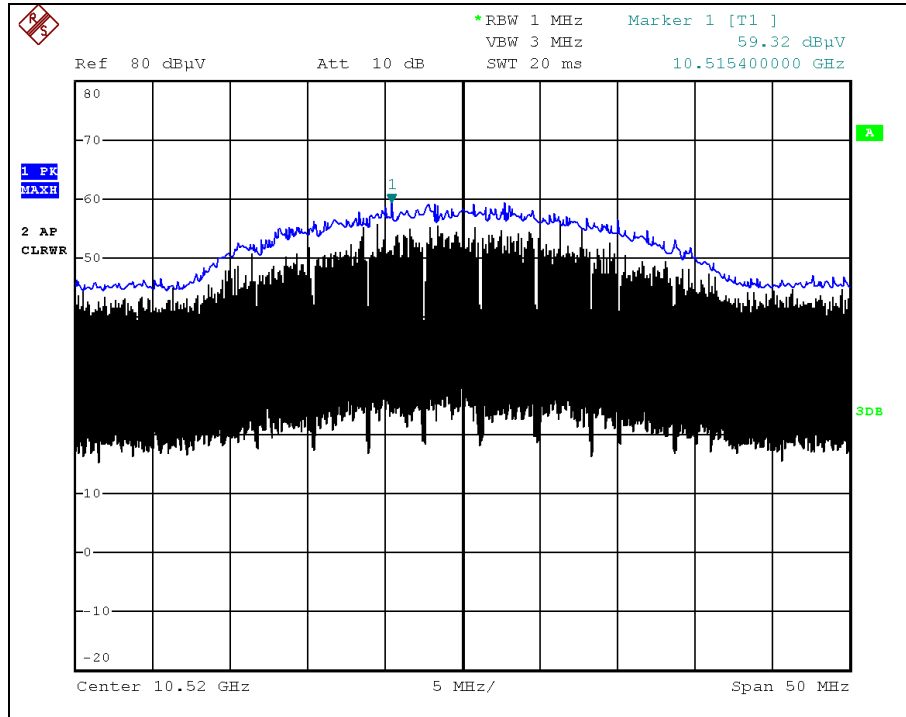

802.11n_HT20 _ CH 52

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 60

Spurious - Peak

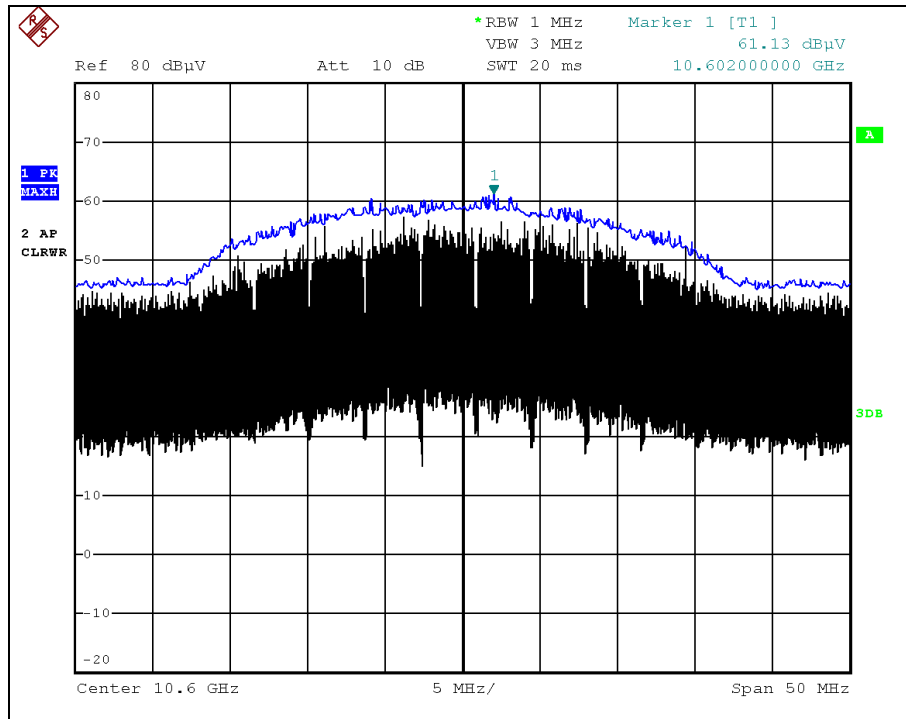

802.11n_HT20 _ CH 60

Spurious - Average

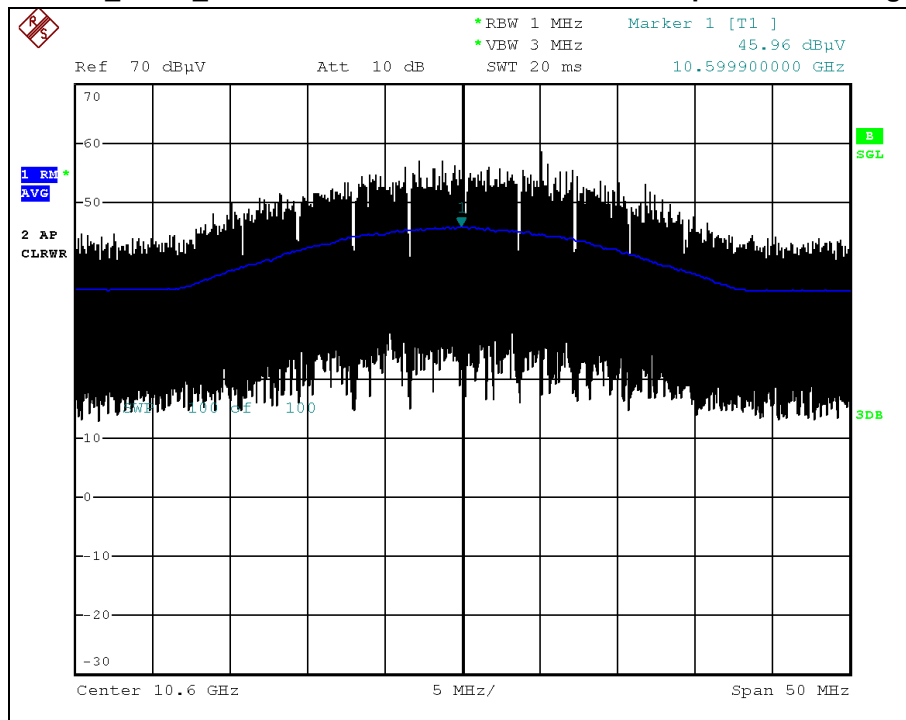


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 64

Spurious - Peak

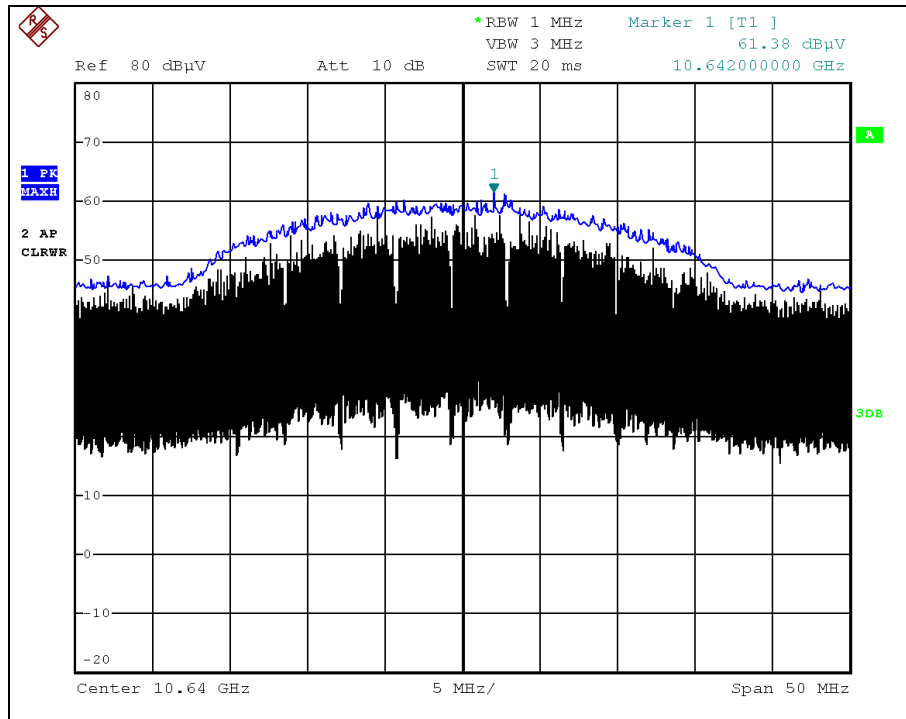

802.11n_HT20 _ CH 64

Spurious - Average

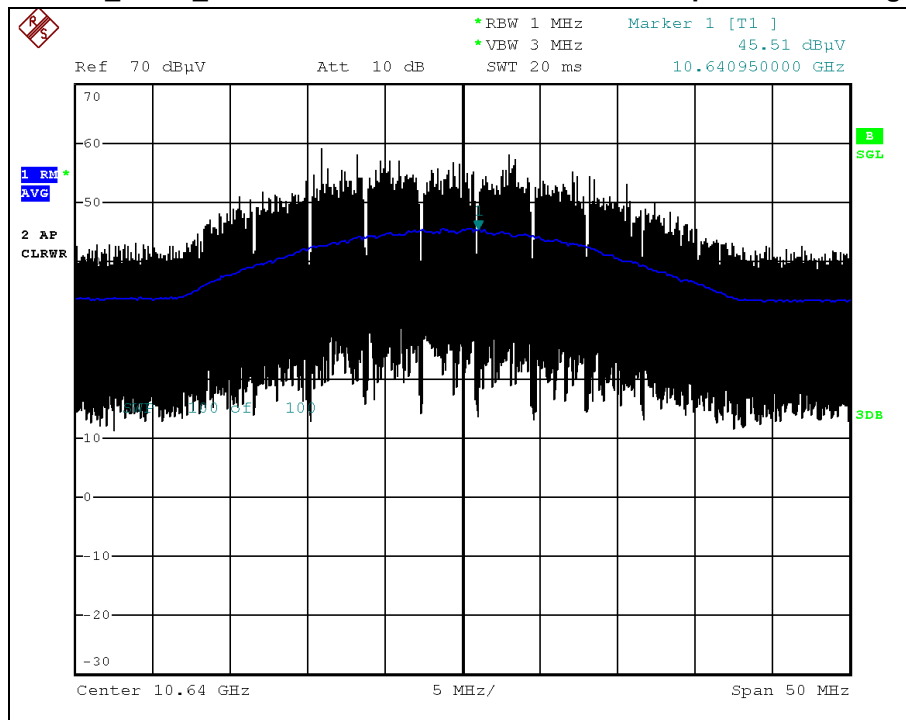


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 100

Spurious - Peak

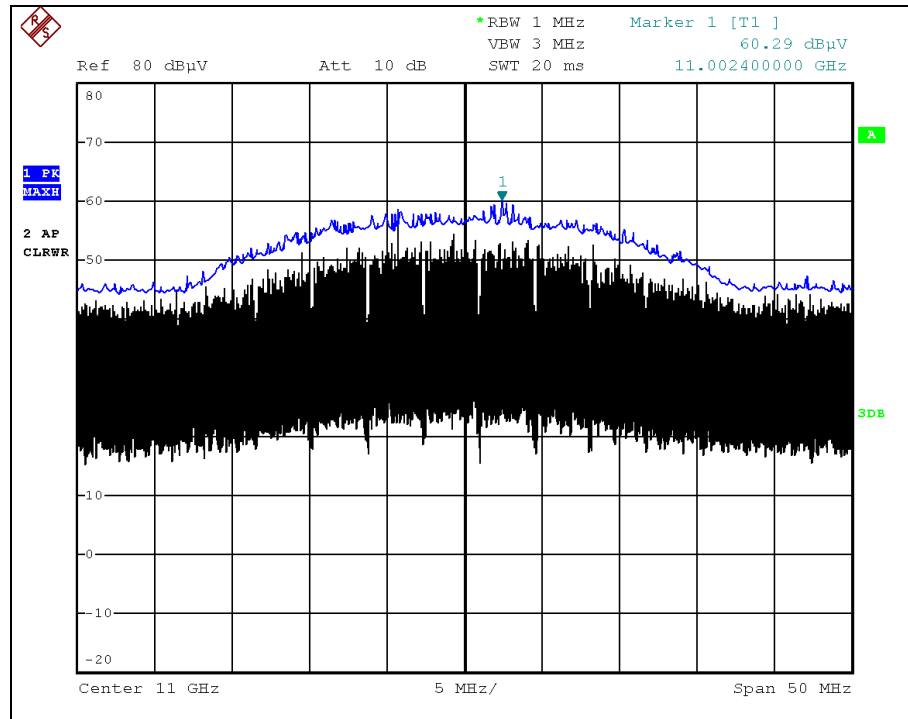

802.11n_HT20 _ CH 100

Spurious - Average

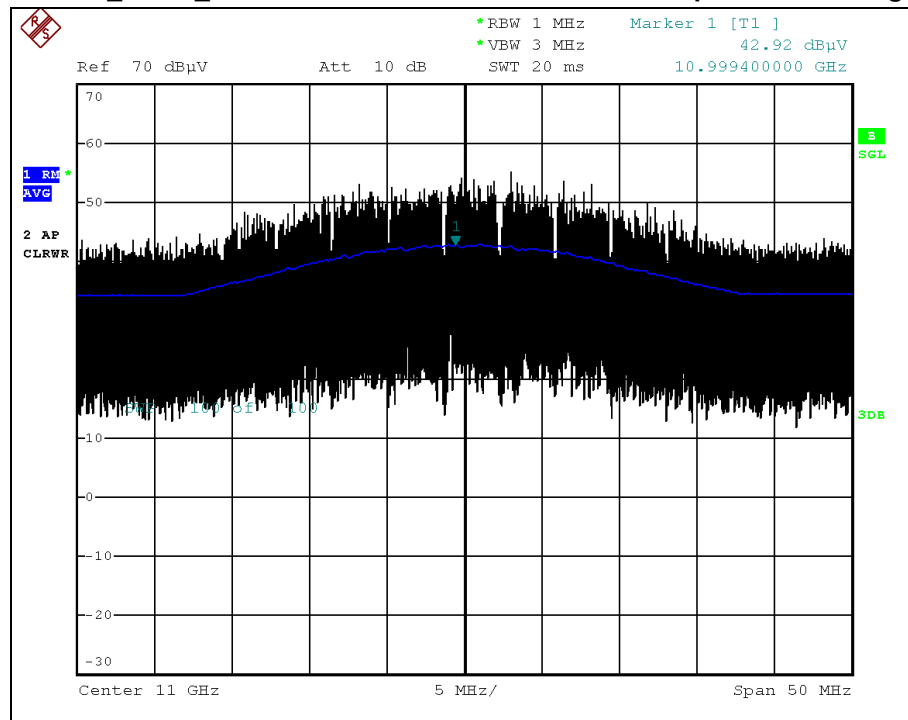


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 120

Spurious - Peak

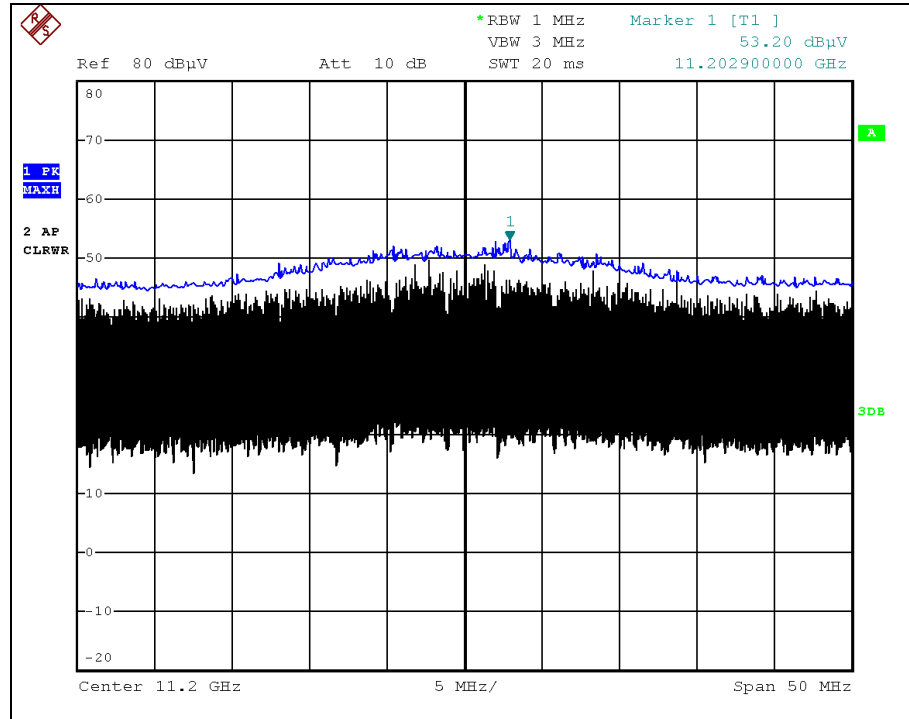

802.11n_HT20 _ CH 120

Spurious - Average

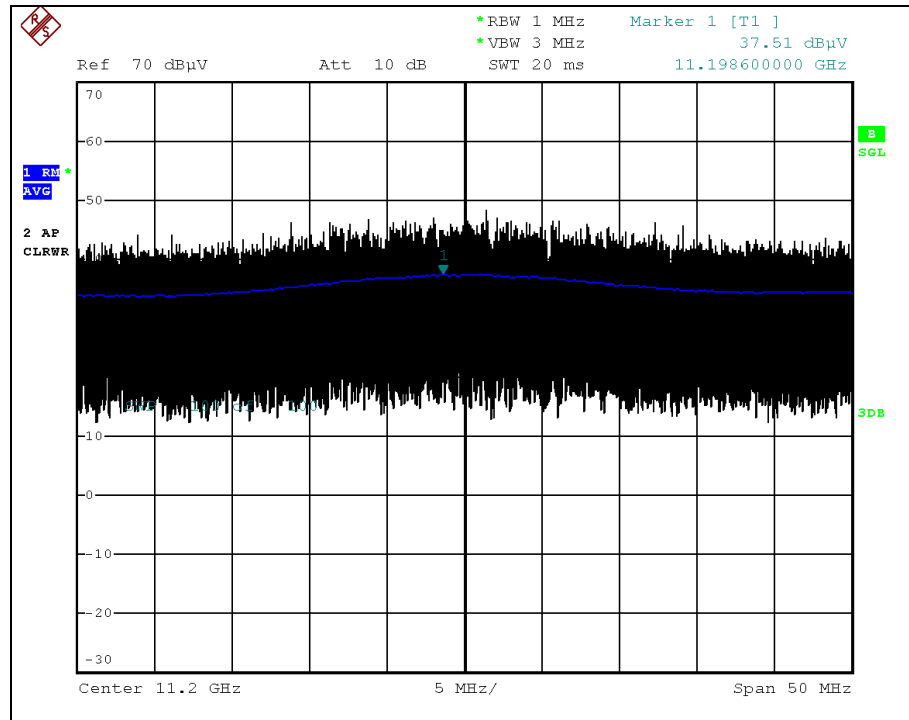


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 140

Spurious - Peak

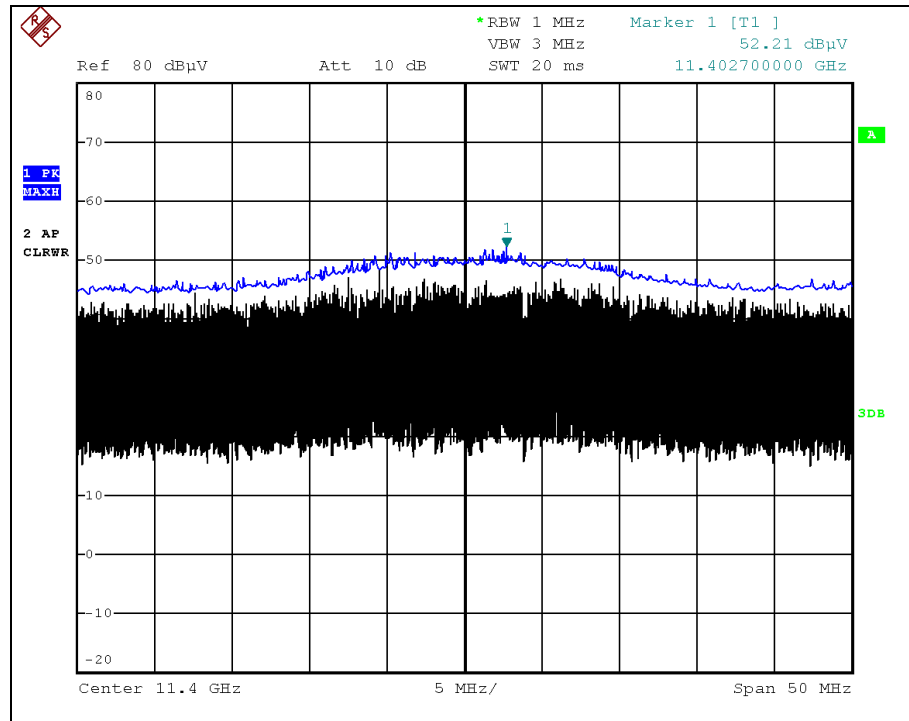

802.11n_HT20 _ CH 140

Spurious - Average

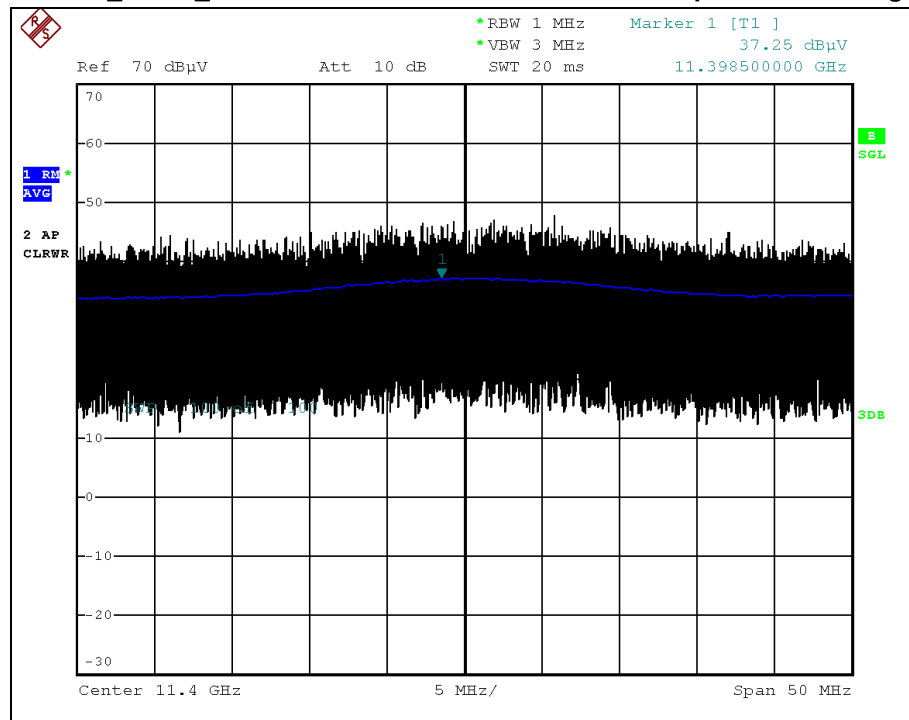


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 149

Spurious - Peak

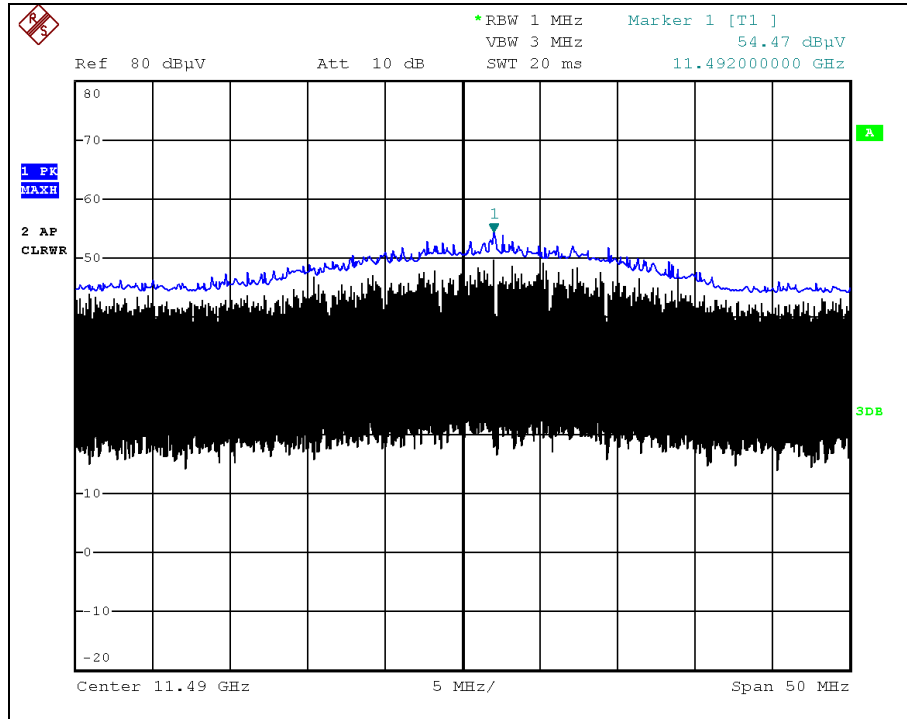

802.11n_HT20 _ CH 149

Spurious - Average

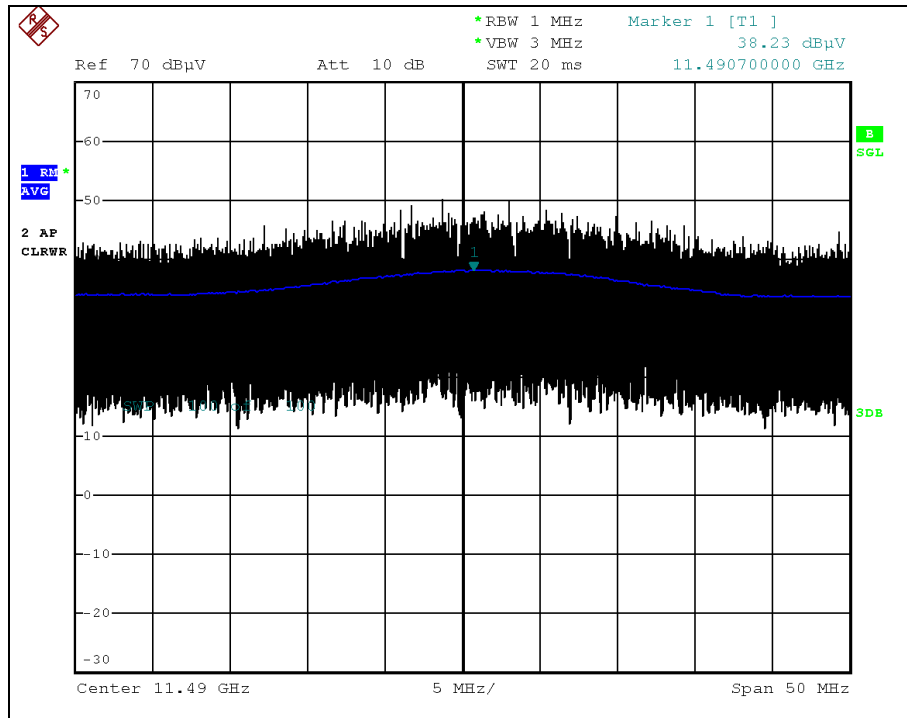


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 157

Spurious - Peak

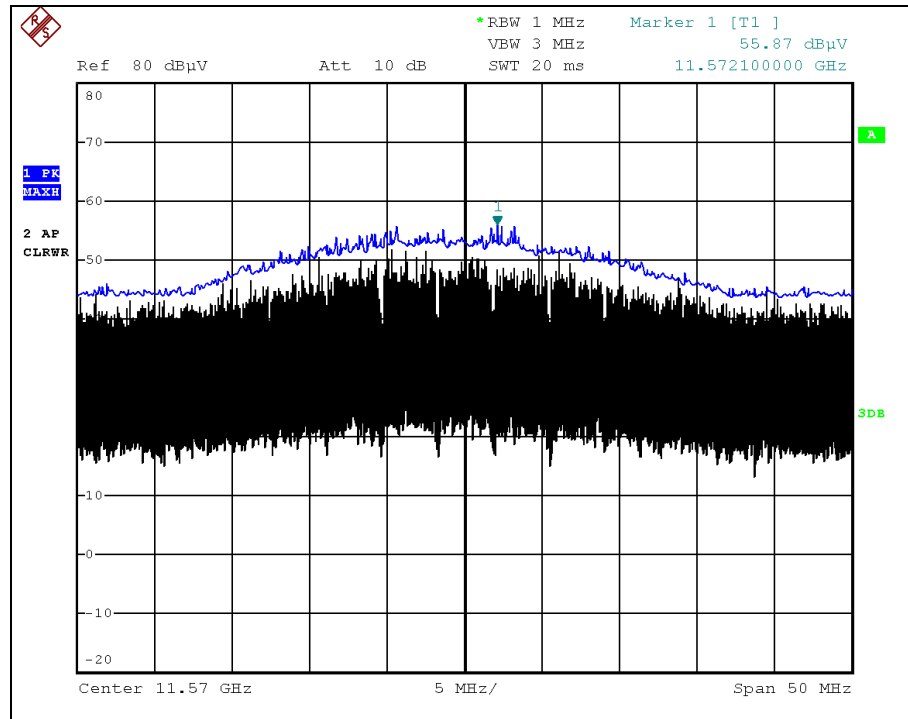

802.11n_HT20 _ CH 157

Spurious - Average

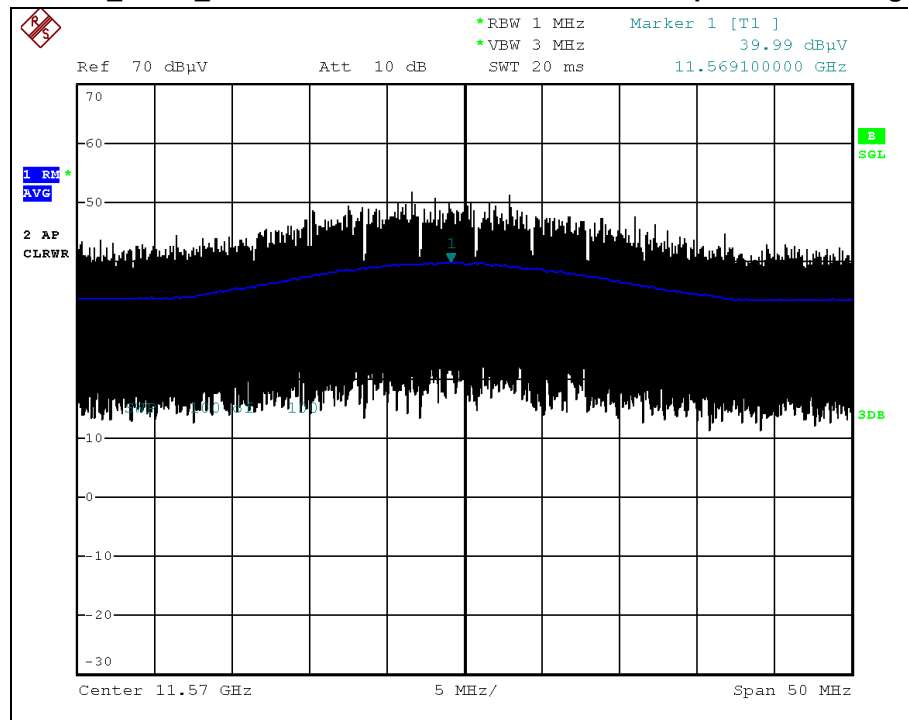


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT20 _ CH 165

Spurious - Peak

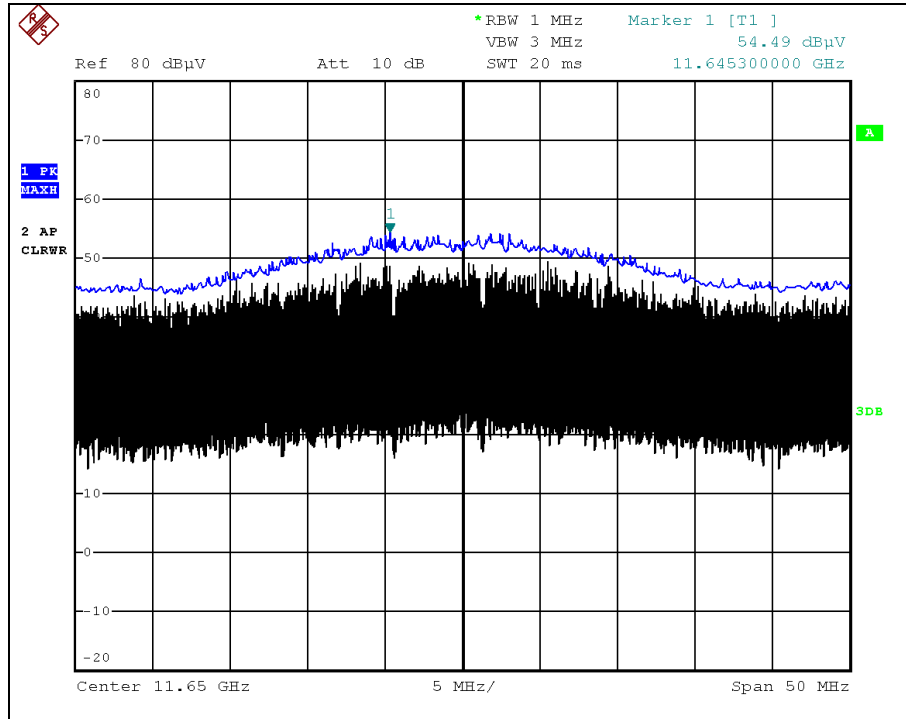

802.11n_HT20 _ CH 165

Spurious - Average

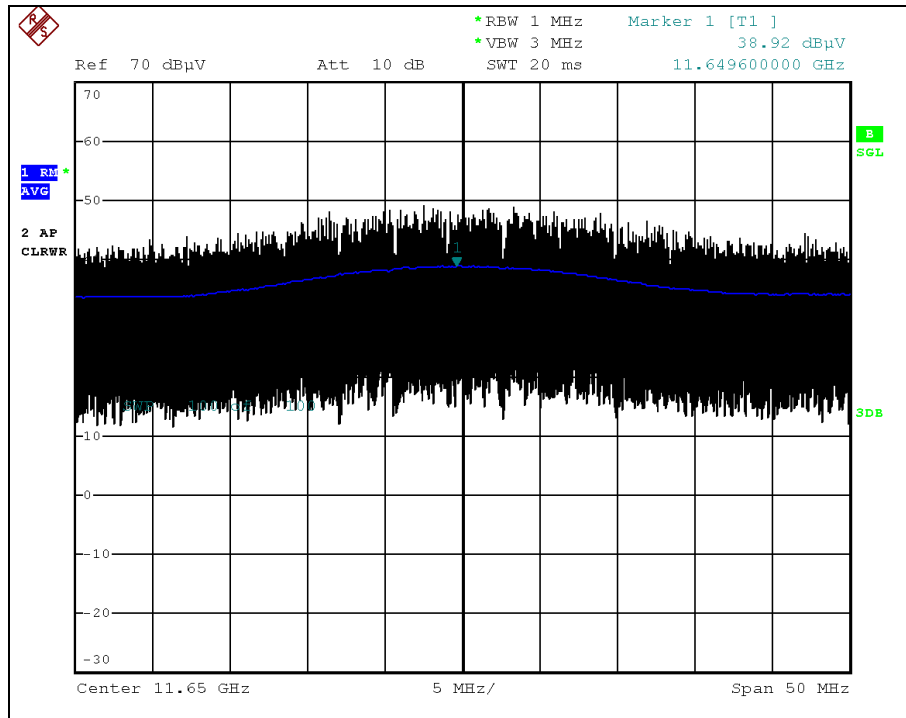


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 38

Spurious - Peak

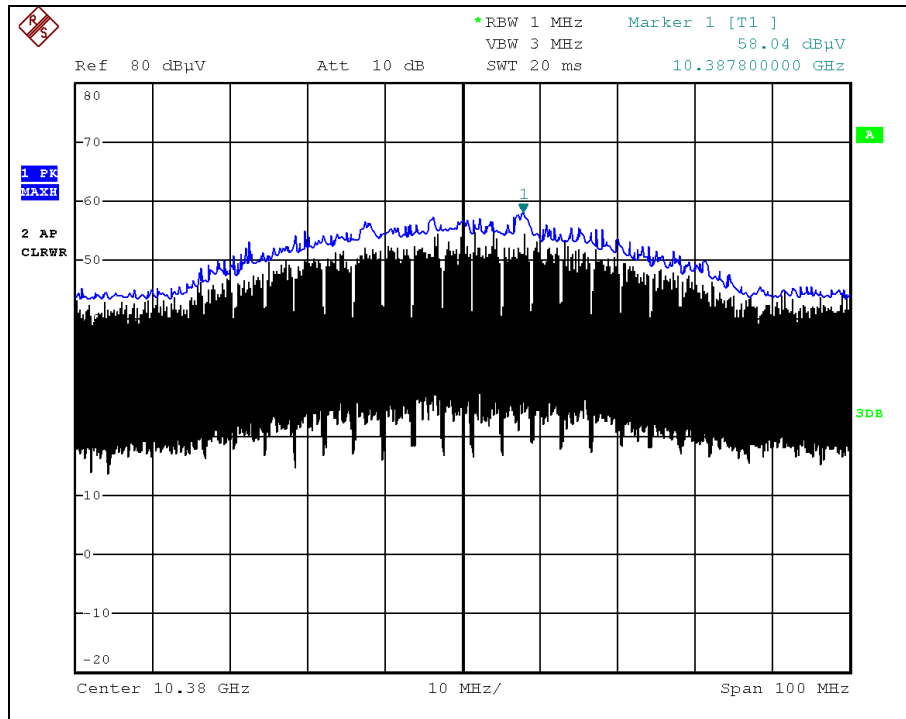

802.11n_HT40 _ CH 38

Spurious - Average




Test Repot No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 46

Spurious - Peak

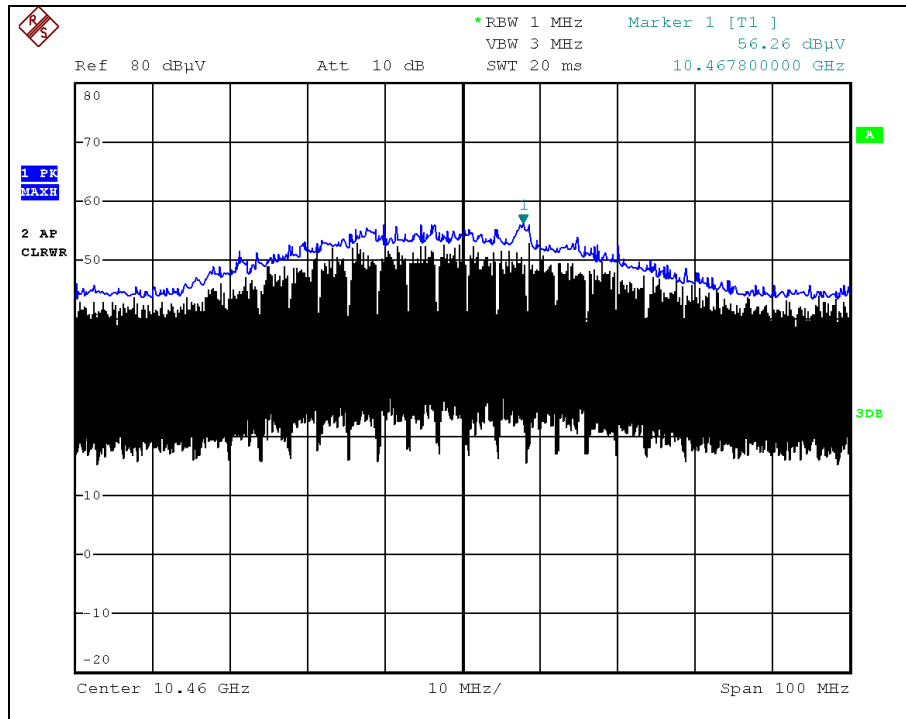

802.11n_HT40 _ CH 46

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 54

Spurious - Peak

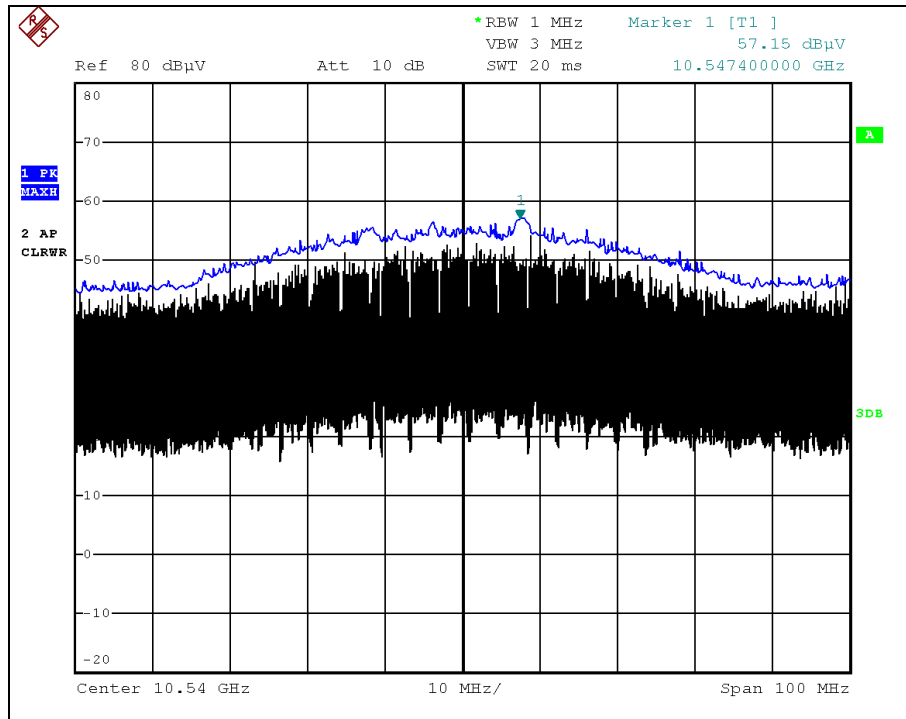


802.11n_HT40 _ CH 54

Spurious - Average




802.11n_HT40 _ CH 62

Spurious - Peak

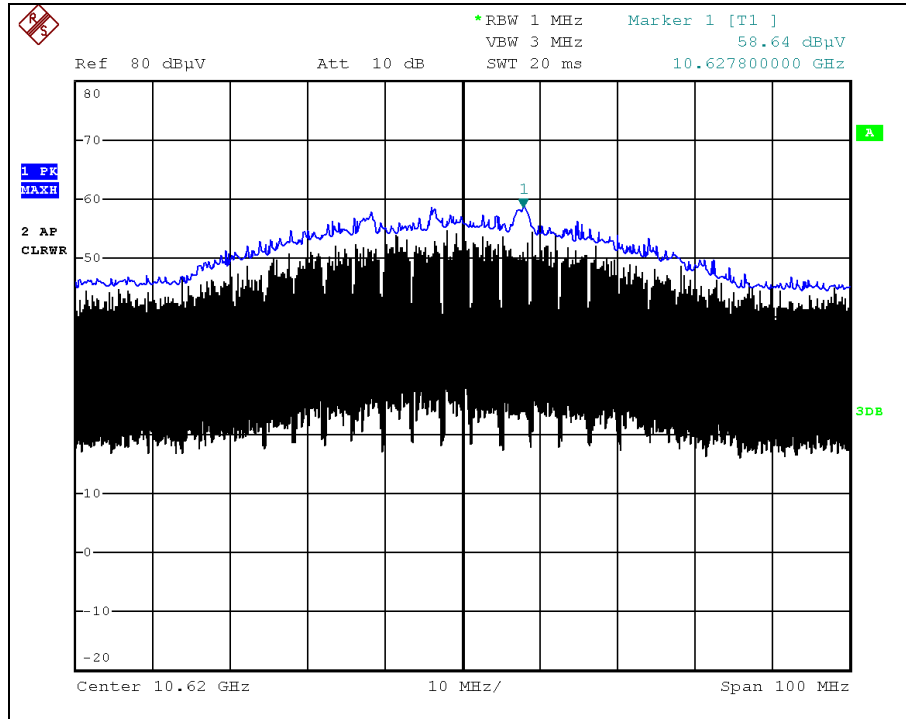

802.11n_HT40 _ CH 62

Spurious - Average

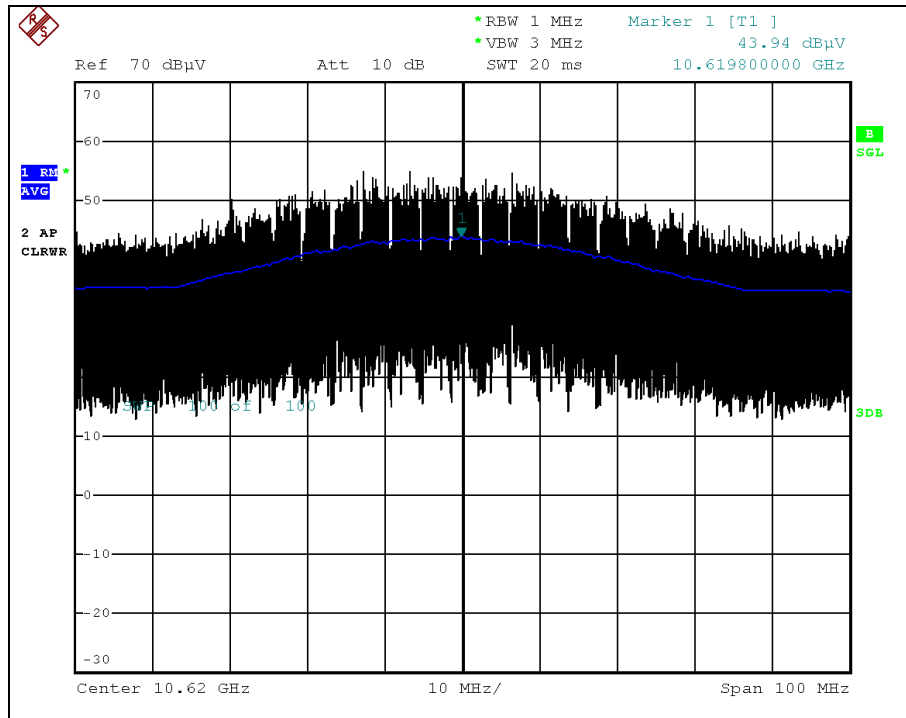


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 102

Spurious - Peak

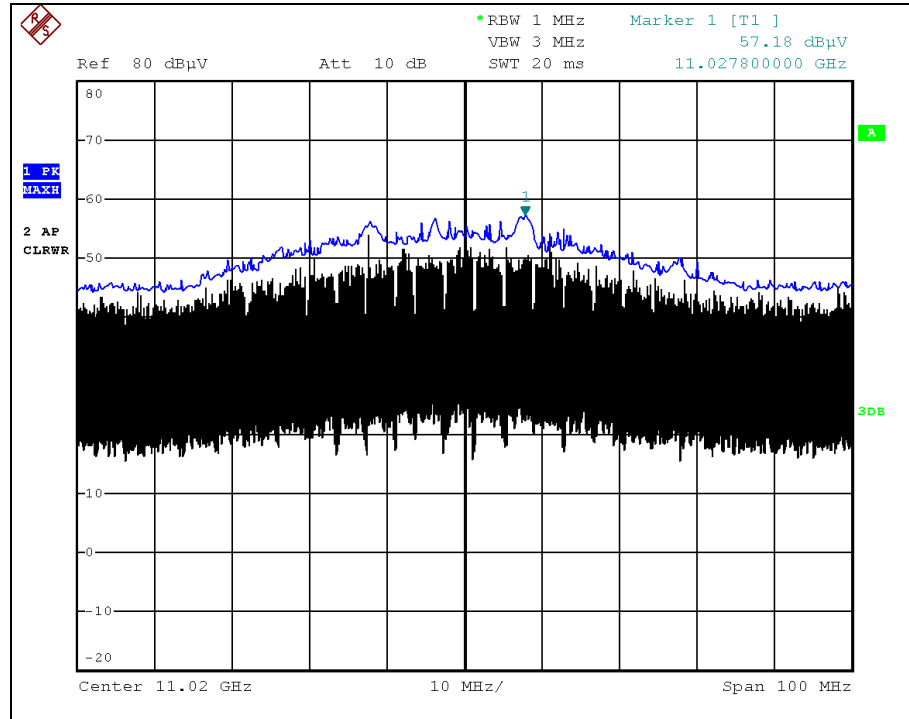

802.11n_HT40 _ CH 102

Spurious - Average

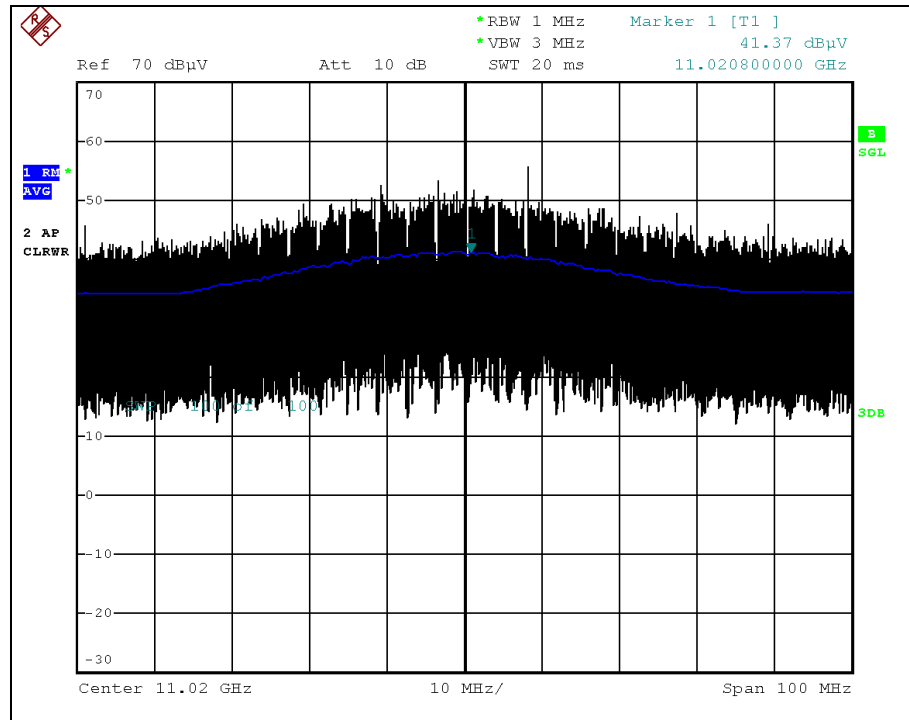


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 118

Spurious - Peak

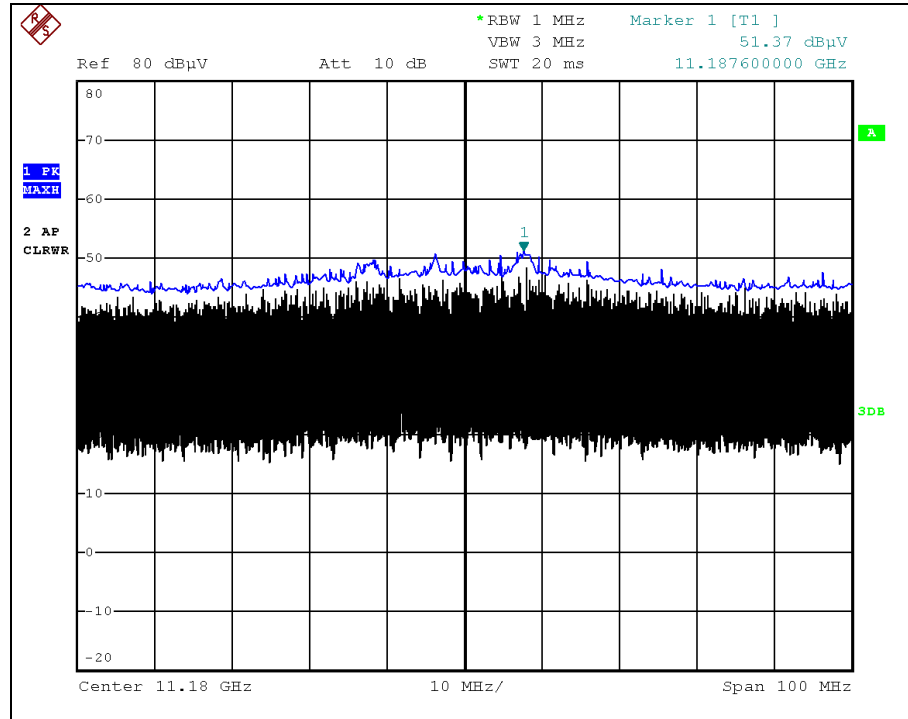

802.11n_HT40 _ CH 118

Spurious - Average

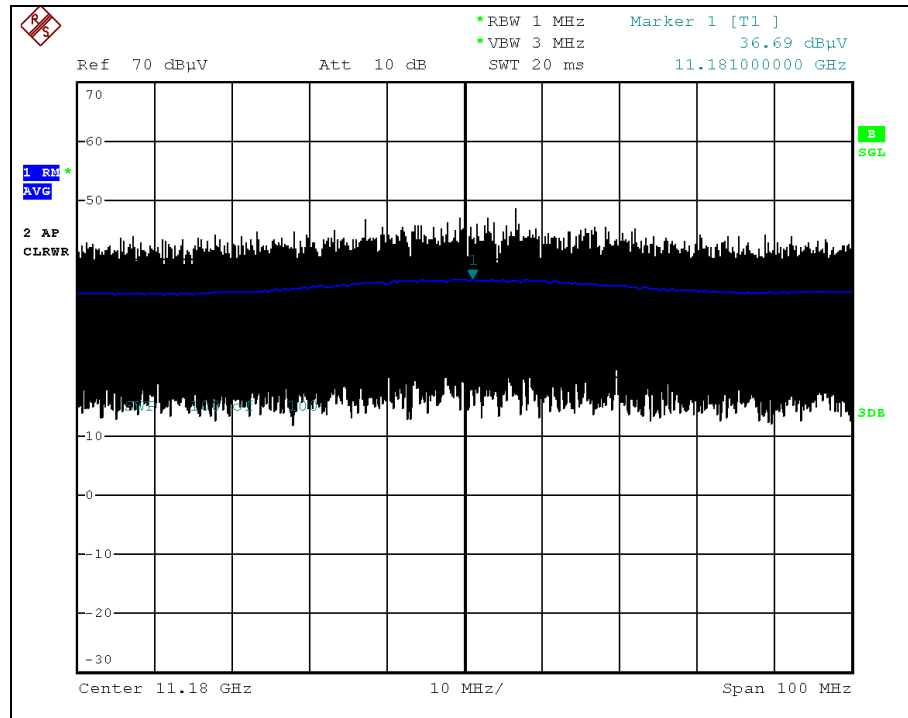


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 134

Spurious - Peak

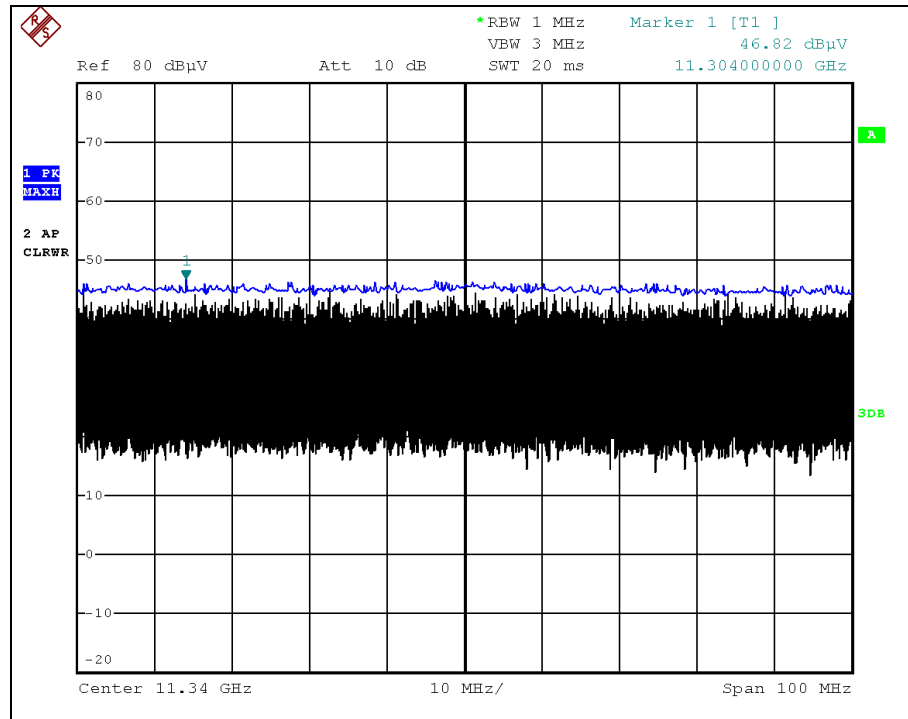

802.11n_HT40 _ CH 134

Spurious - Average

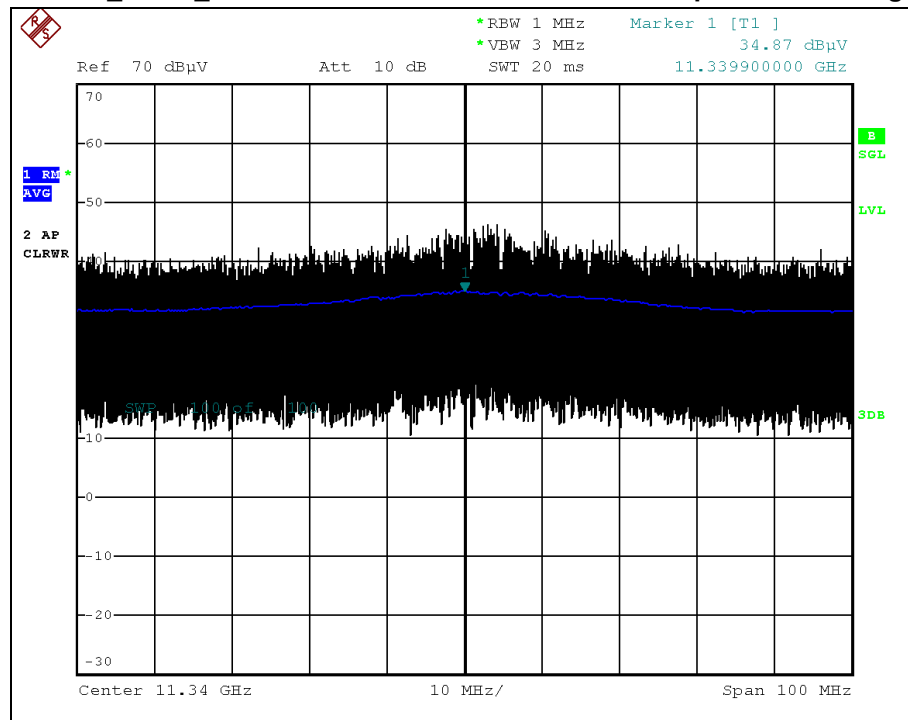


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 151

Spurious - Peak

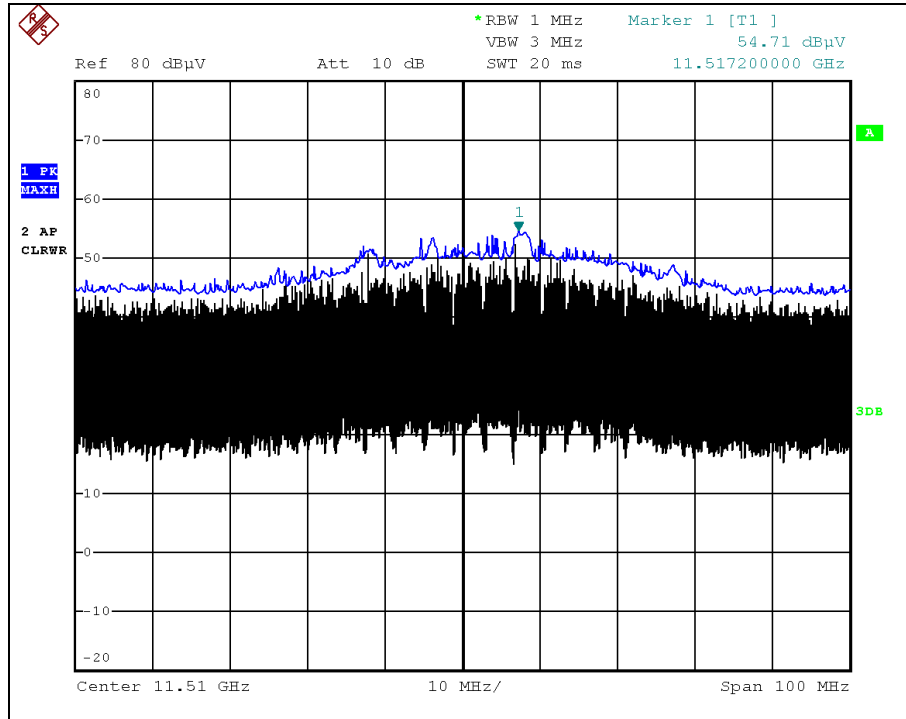

802.11n_HT40 _ CH 151

Spurious - Average

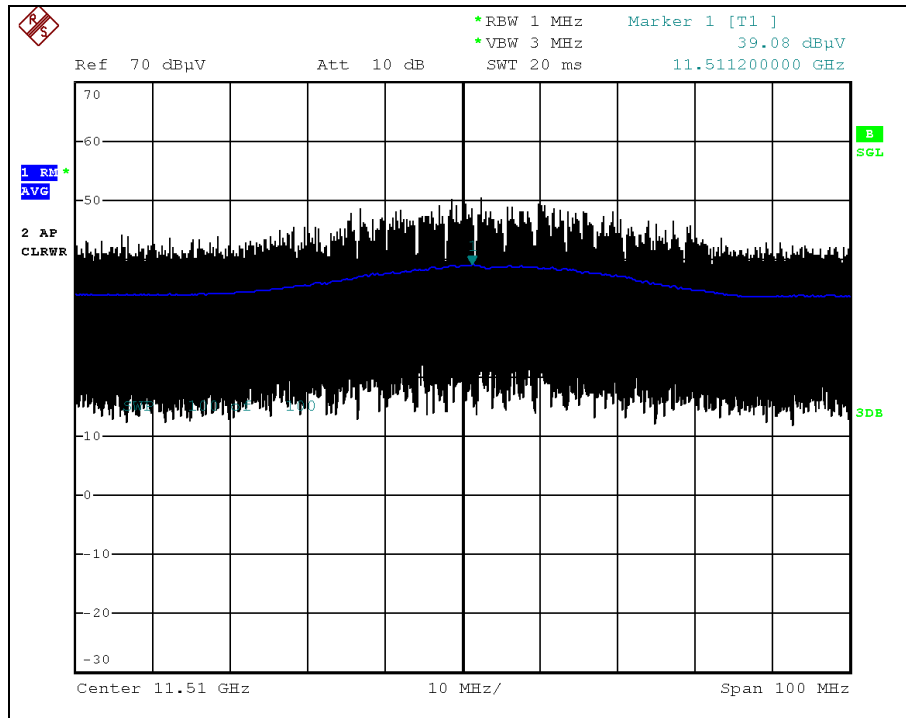


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40 _ CH 159

Spurious - Peak

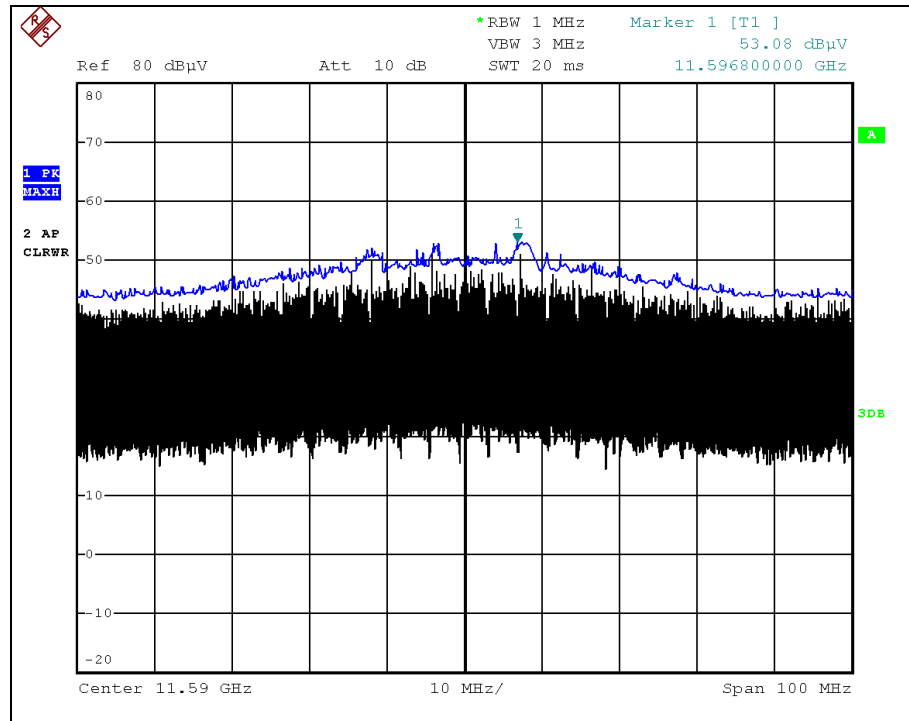

802.11n_HT40 _ CH 159

Spurious - Average

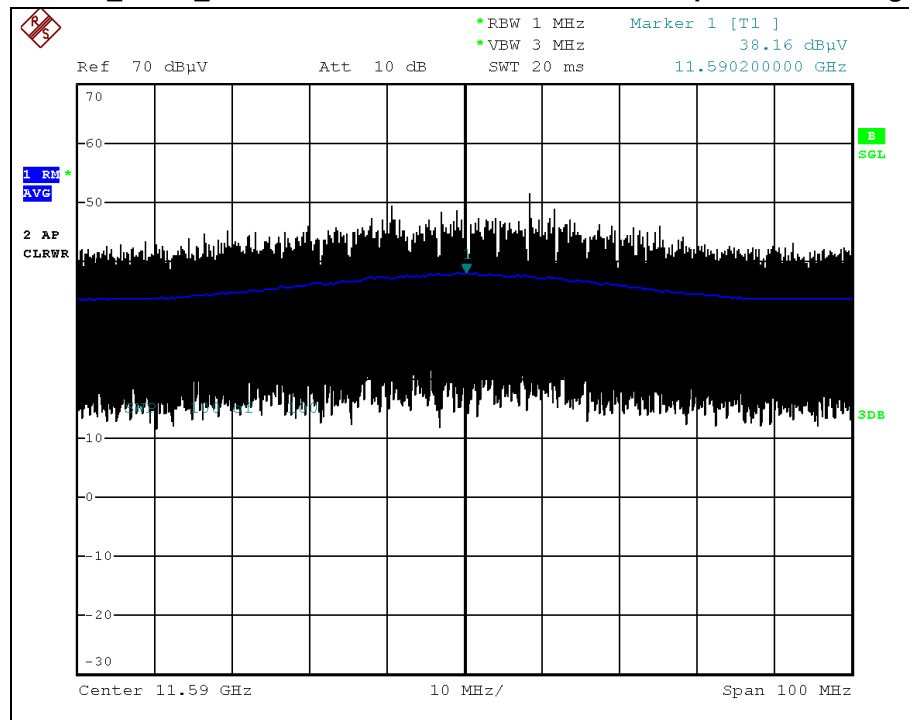


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 36

Spurious - Peak

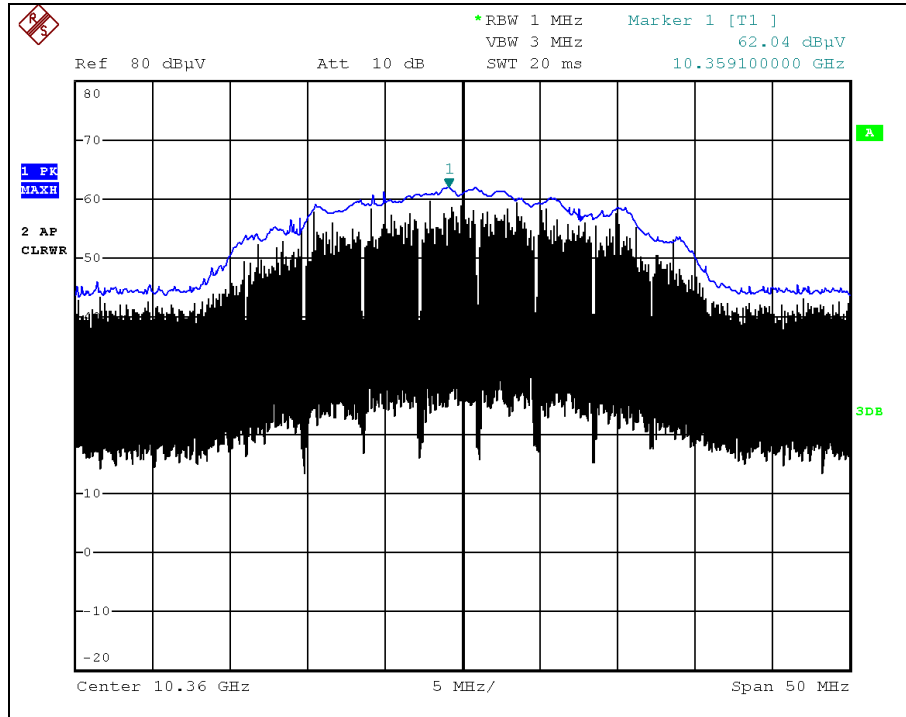

802.11ac_VHT20 _ CH 36

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 44

Spurious - Peak

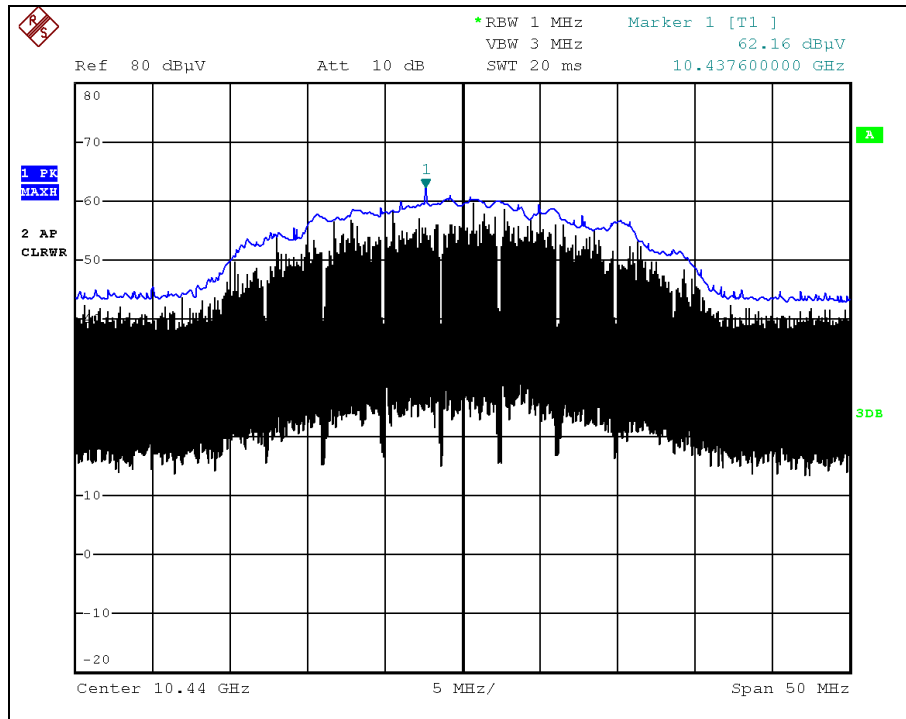

802.11ac_VHT20 _ CH 44

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 48

Spurious - Peak

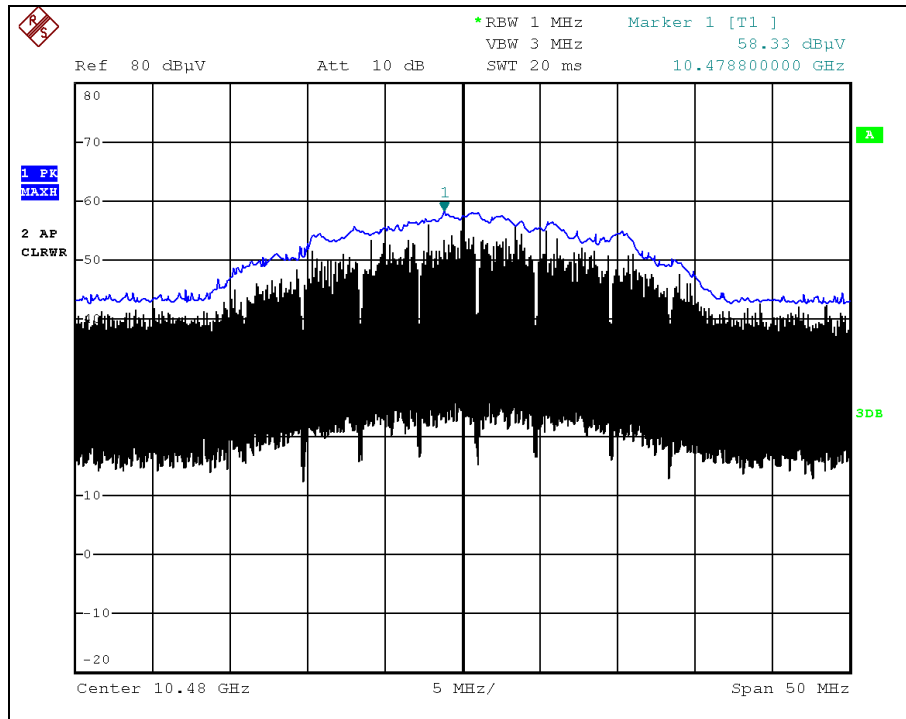

802.11ac_VHT20 _ CH 48

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 52

Spurious - Peak

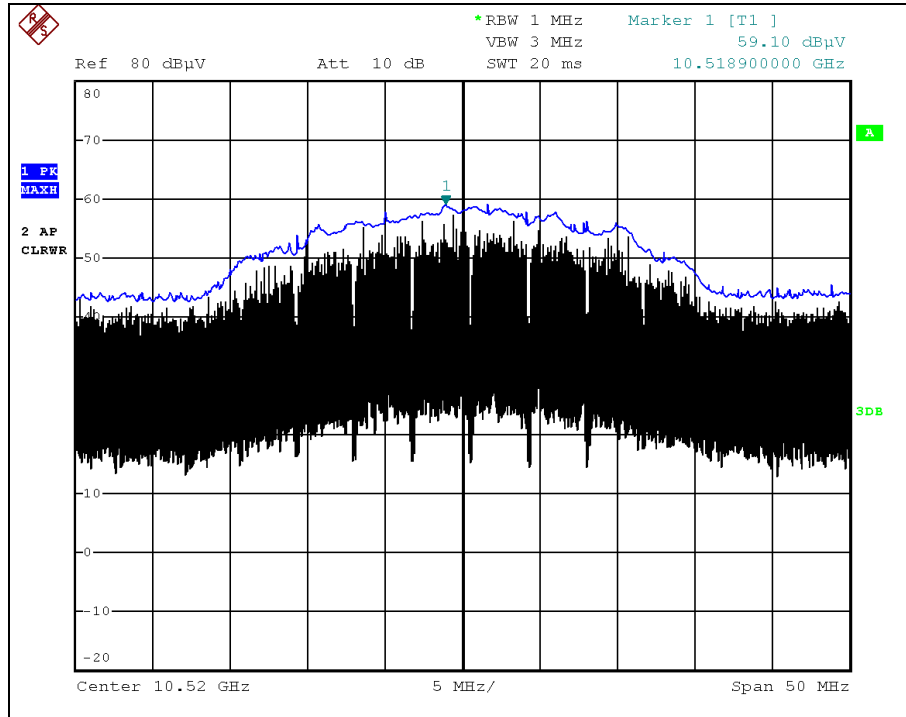

802.11ac_VHT20 _ CH 52

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 60

Spurious - Peak

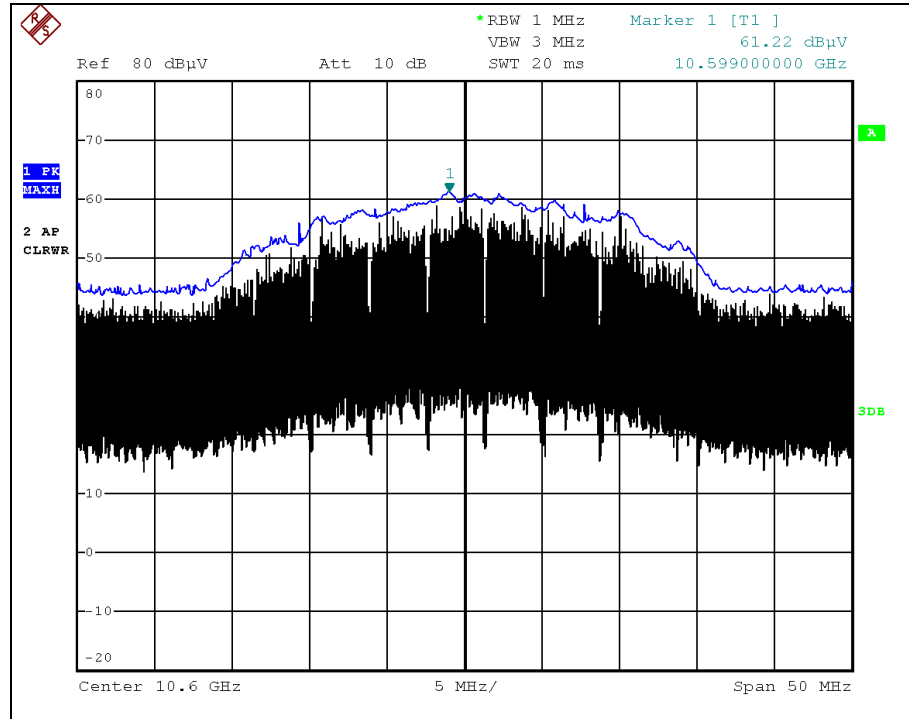

802.11ac_VHT20 _ CH 60

Spurious - Average

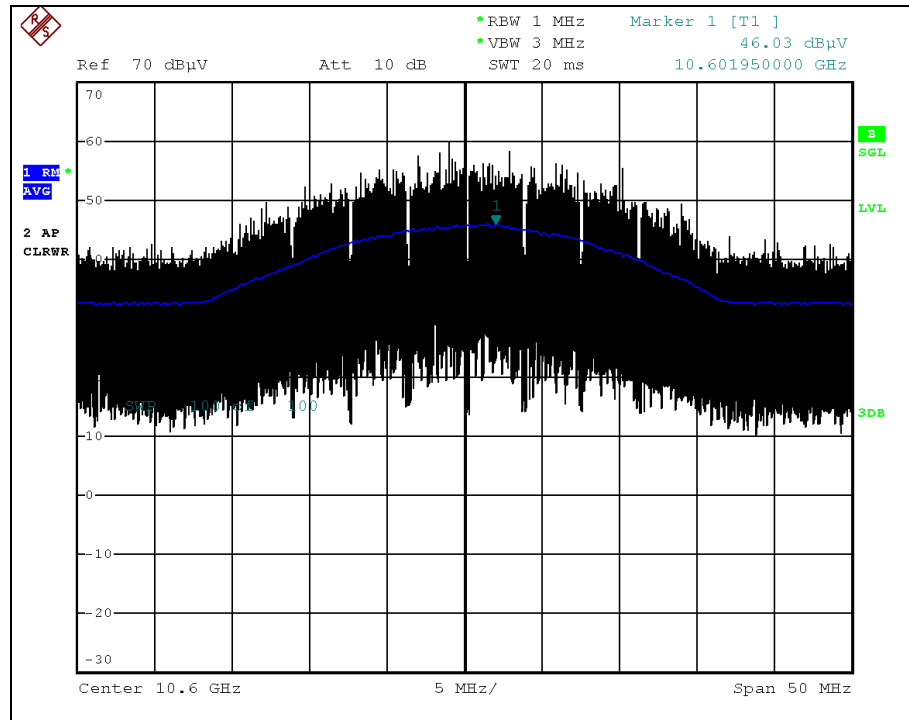


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 64

Spurious - Peak

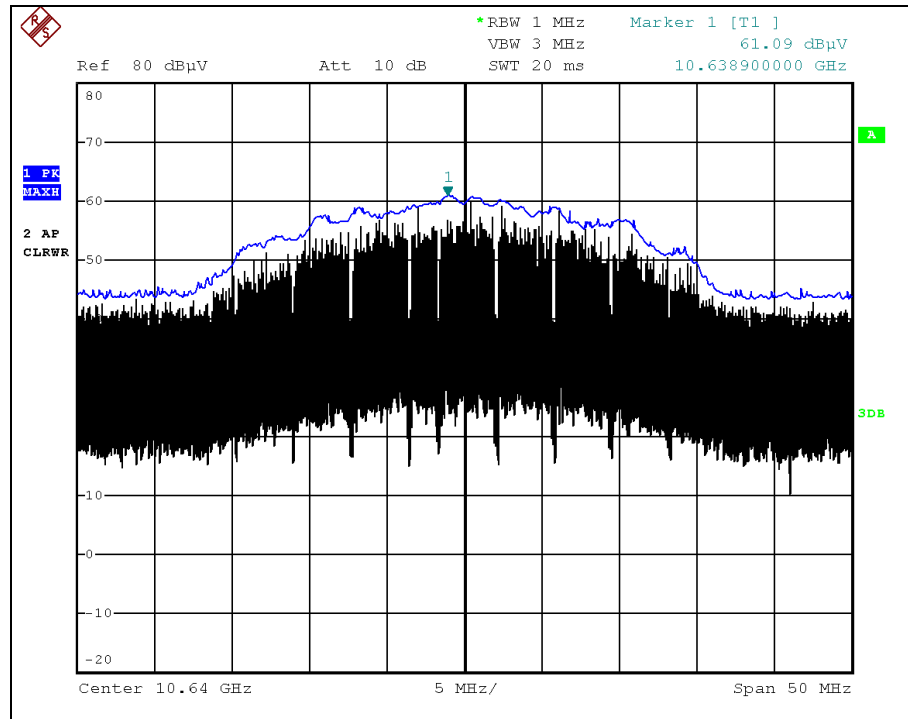

802.11ac_VHT20 _ CH 64

Spurious - Average

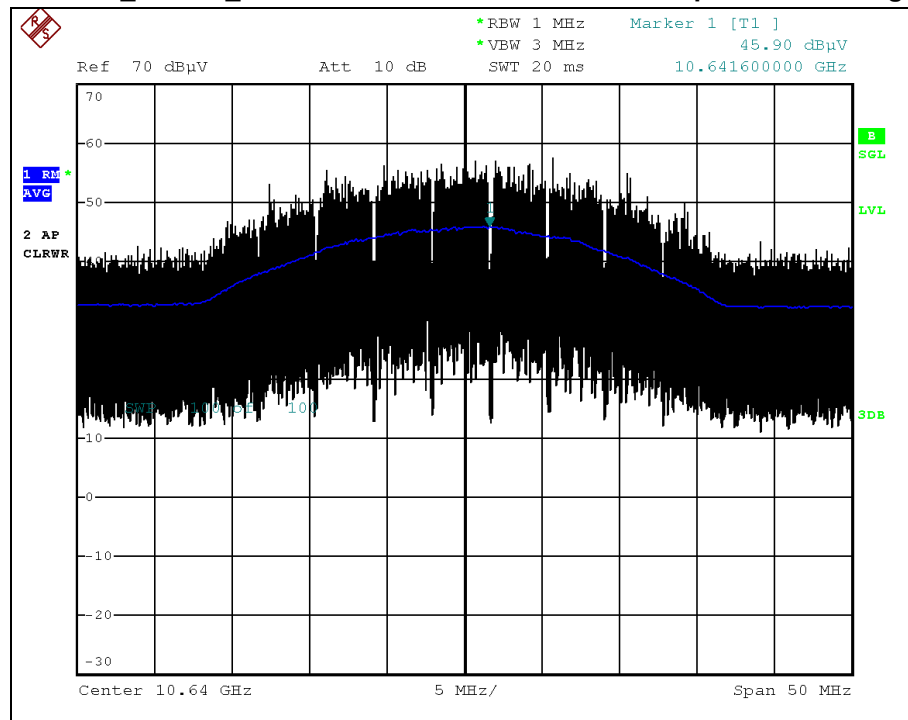


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 100

Spurious - Peak

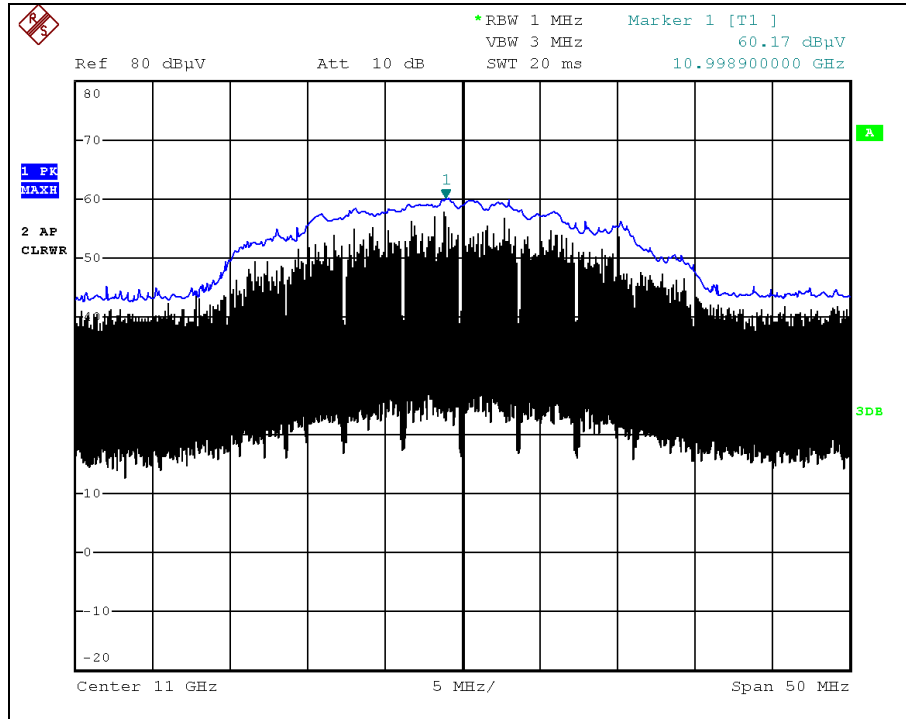

802.11ac_VHT20 _ CH 100

Spurious - Average

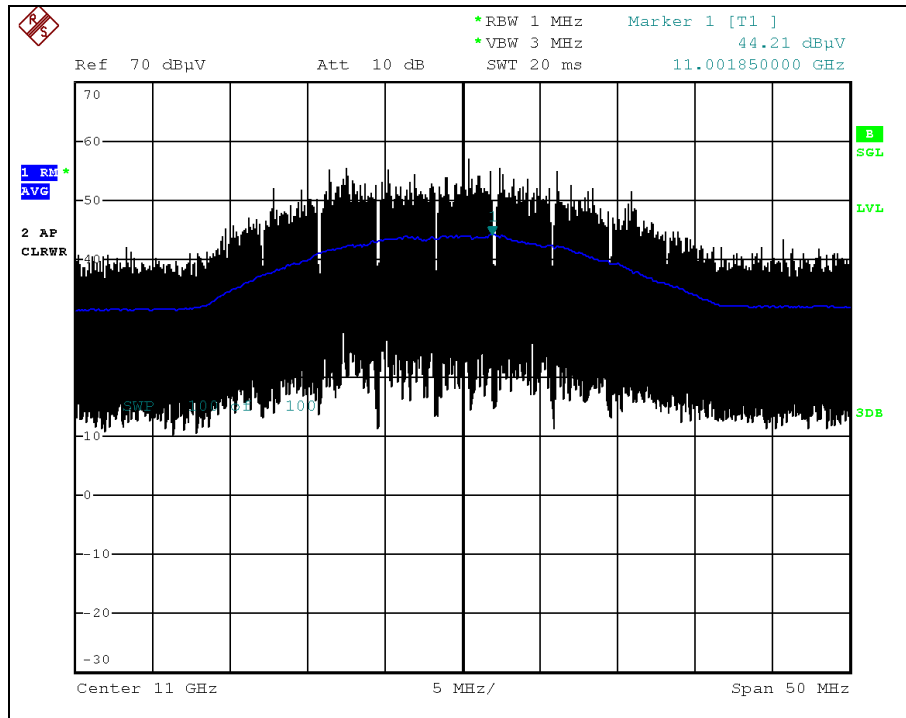


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 120

Spurious - Peak

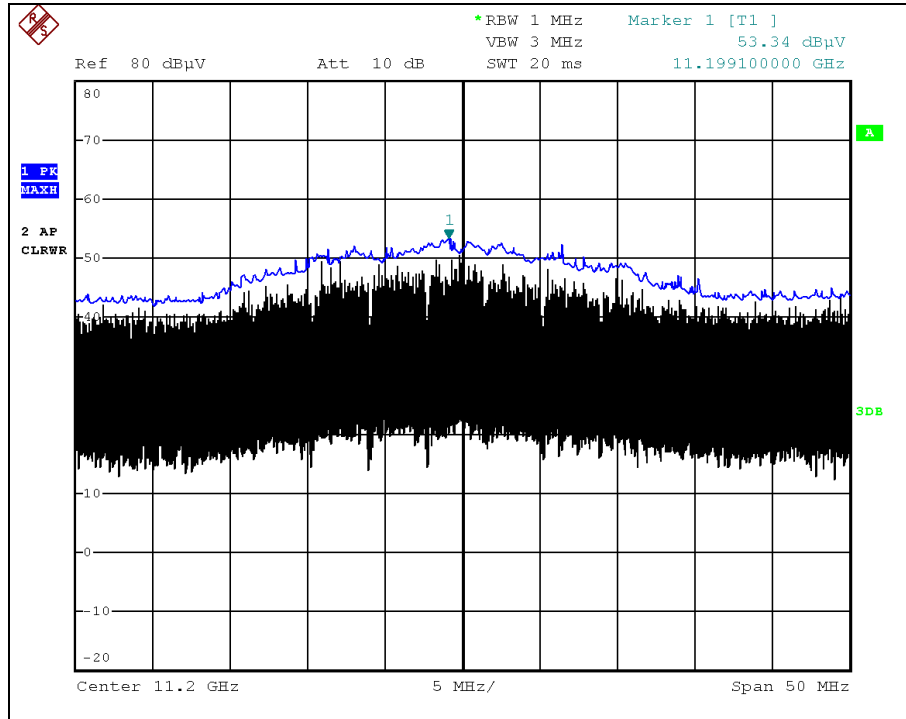

802.11ac_VHT20 _ CH 120

Spurious - Average

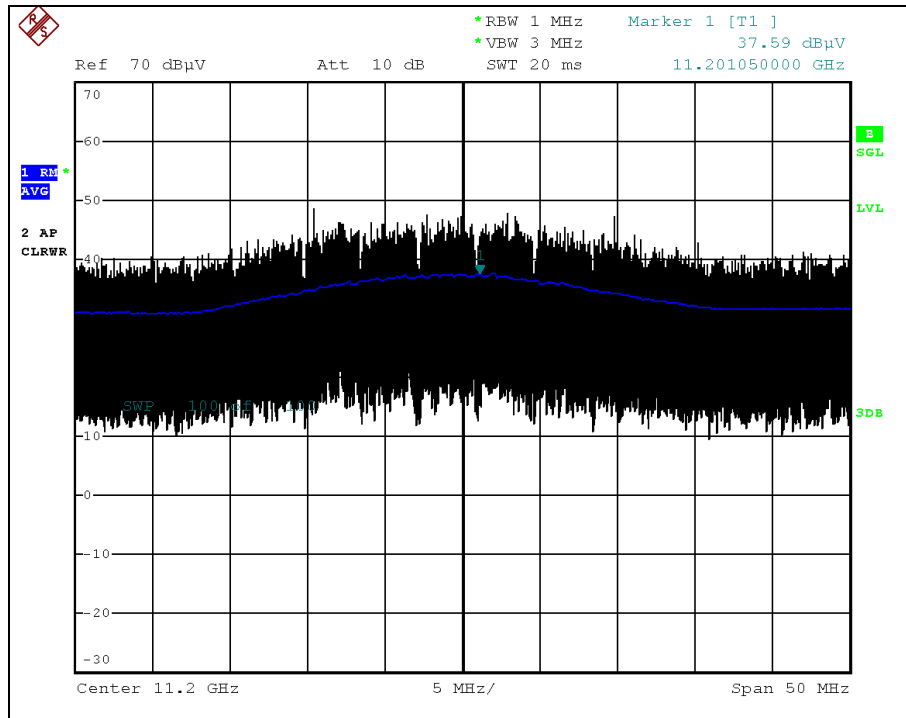


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 140

Spurious - Peak

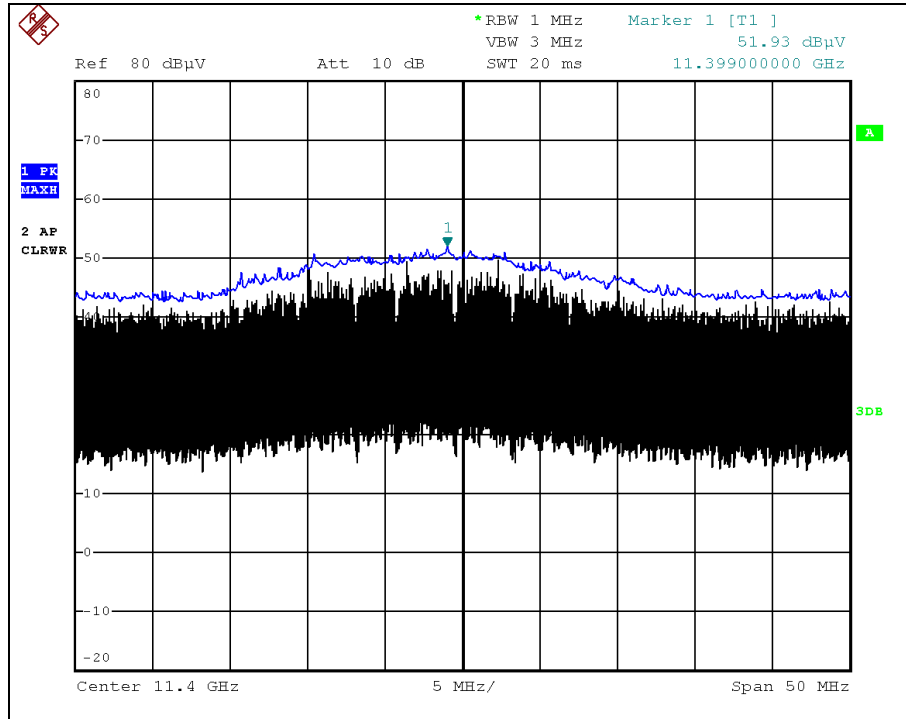

802.11ac_VHT20 _ CH 140

Spurious - Average

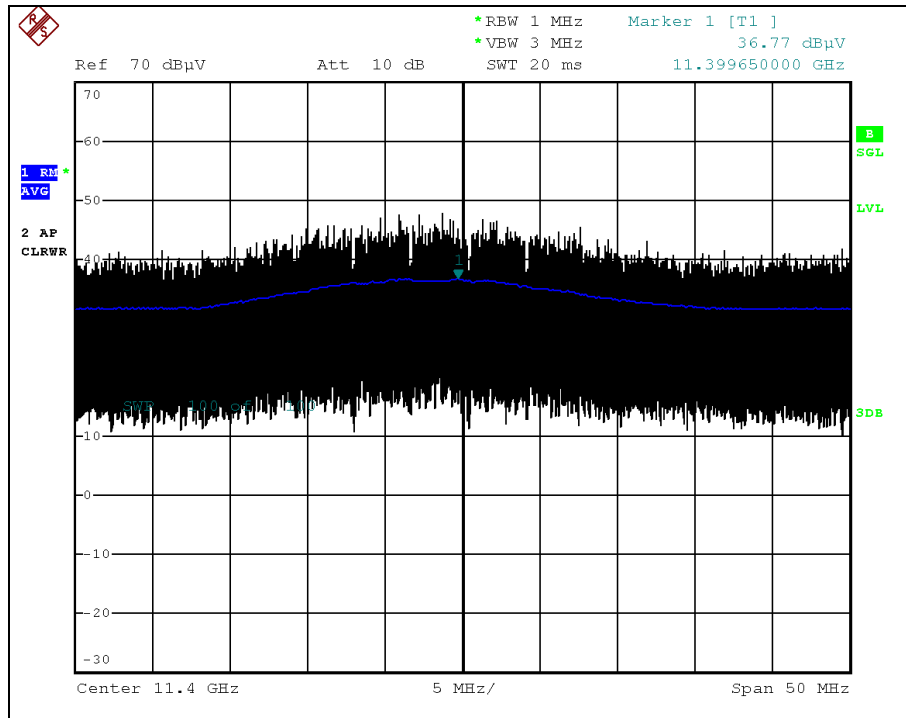


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 149

Spurious - Peak

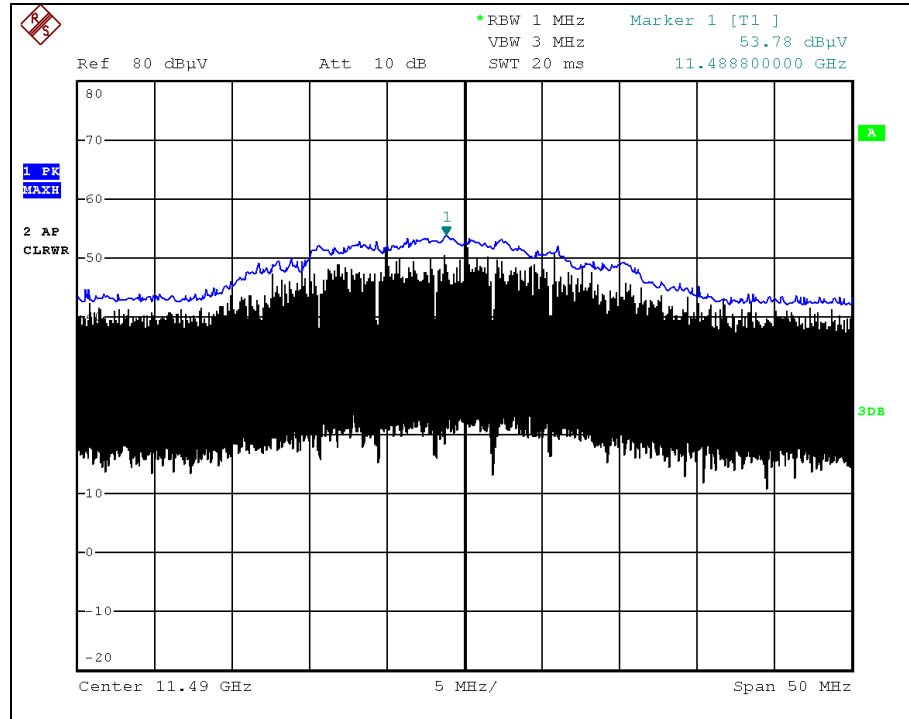

802.11ac_VHT20 _ CH 149

Spurious - Average

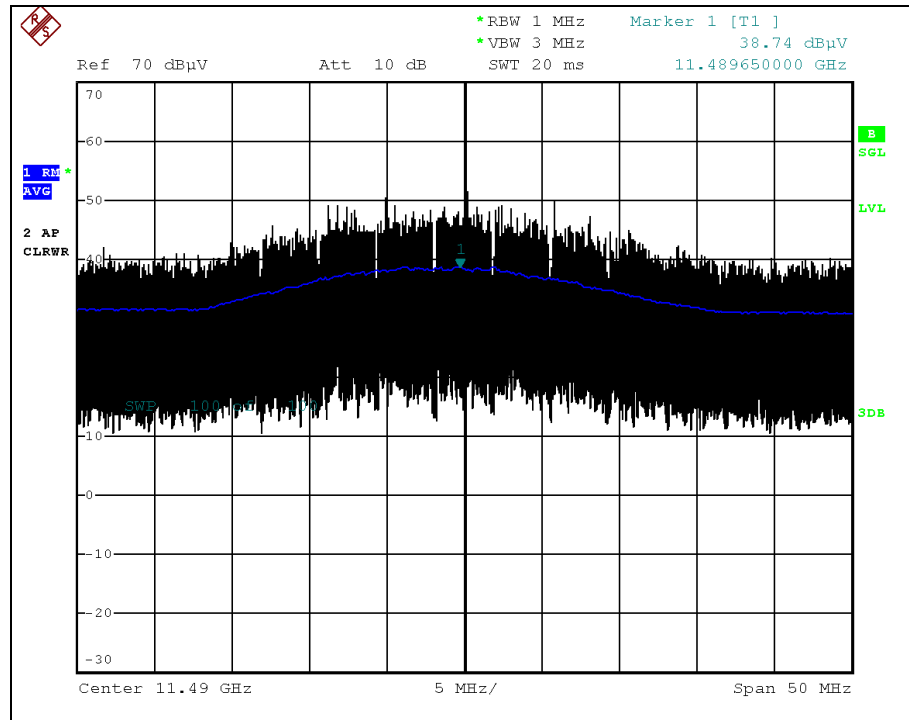


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 157

Spurious - Peak

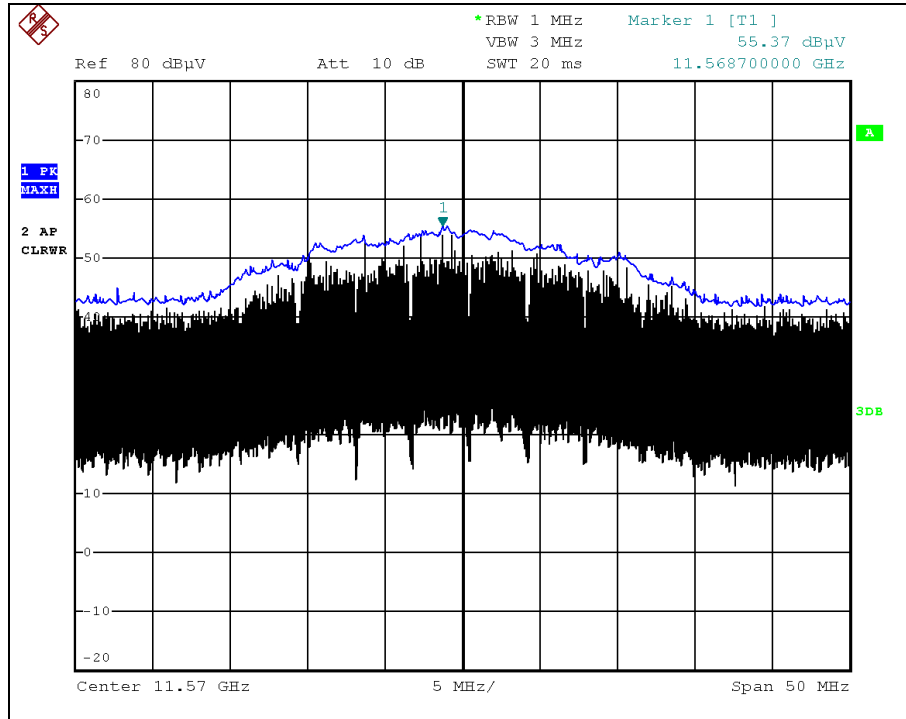

802.11ac_VHT20 _ CH 157

Spurious - Average

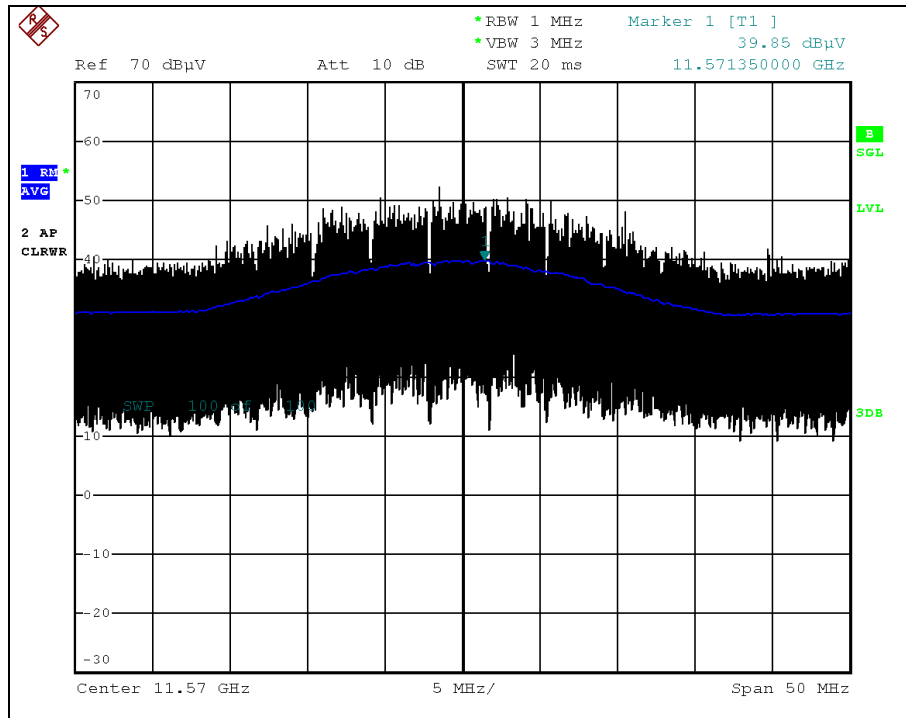


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT20 _ CH 165

Spurious - Peak

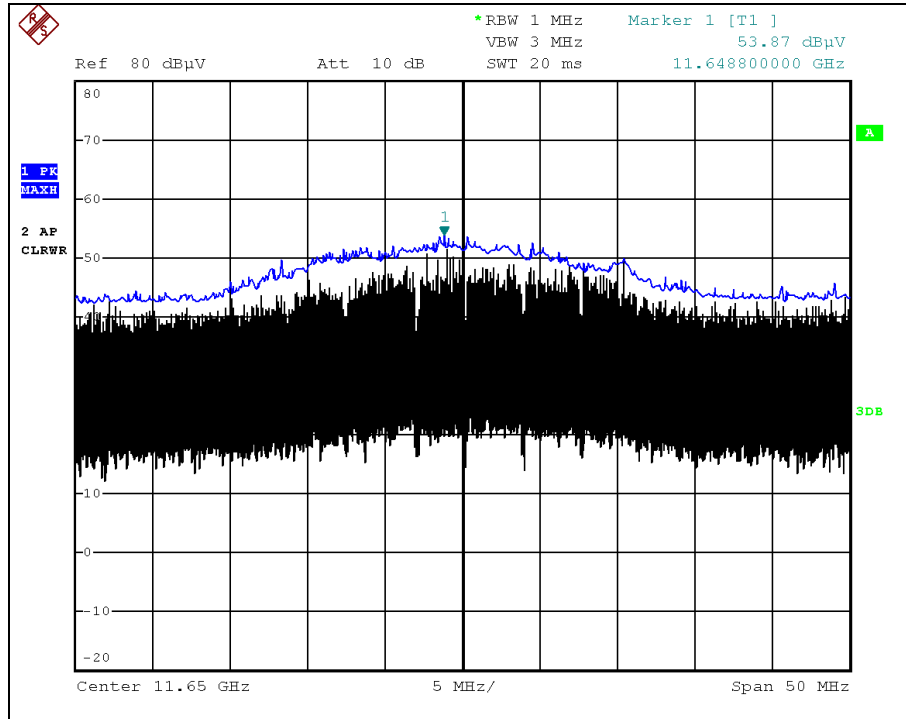

802.11ac_VHT20 _ CH 165

Spurious - Average

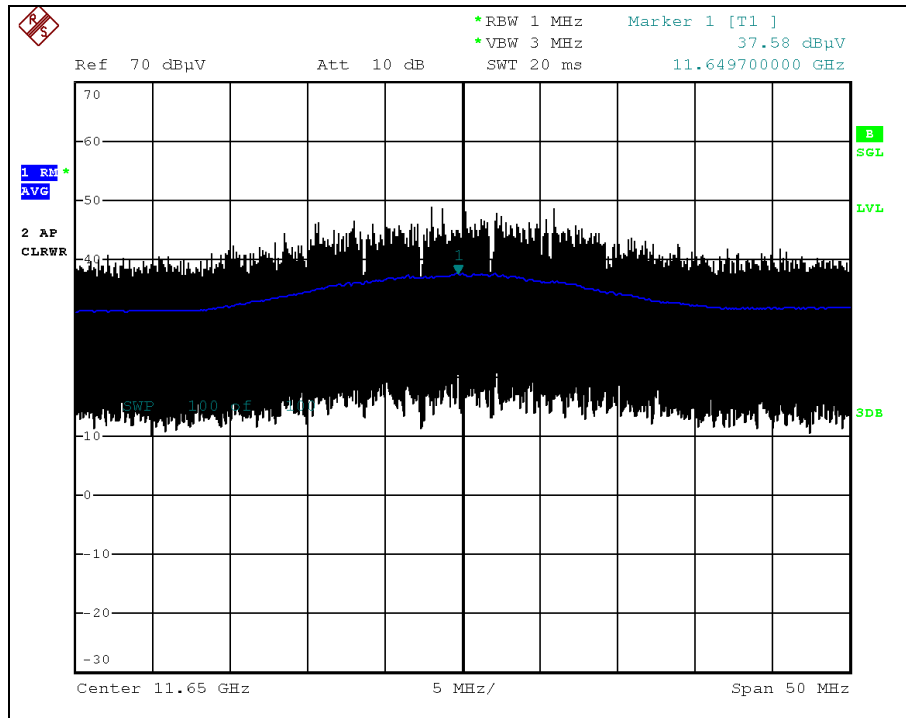


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 38

Spurious - Peak

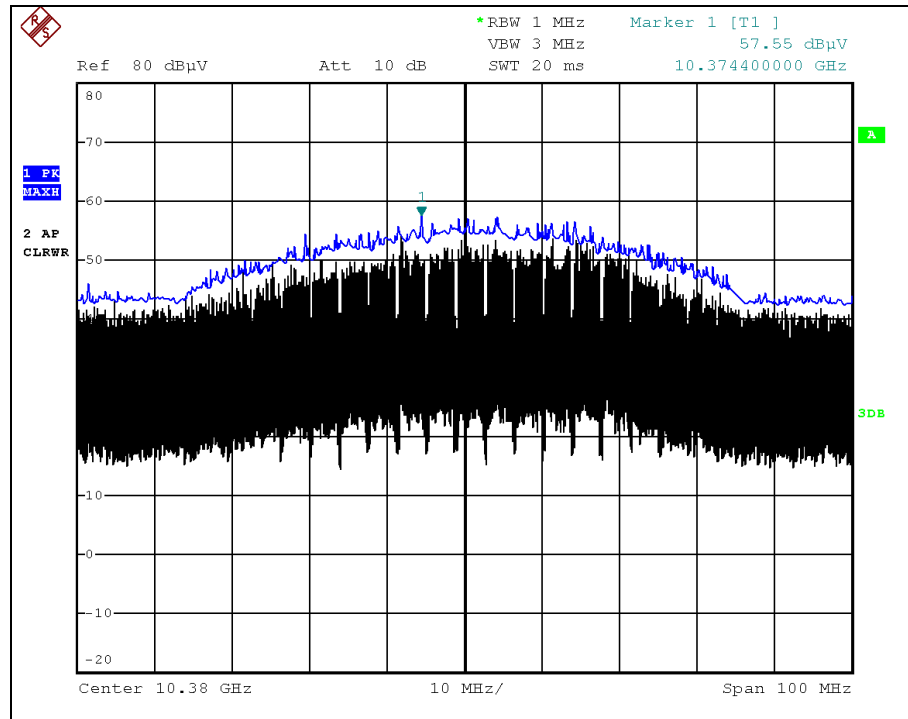

802.11ac_VHT40 _ CH 38

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 46

Spurious - Peak

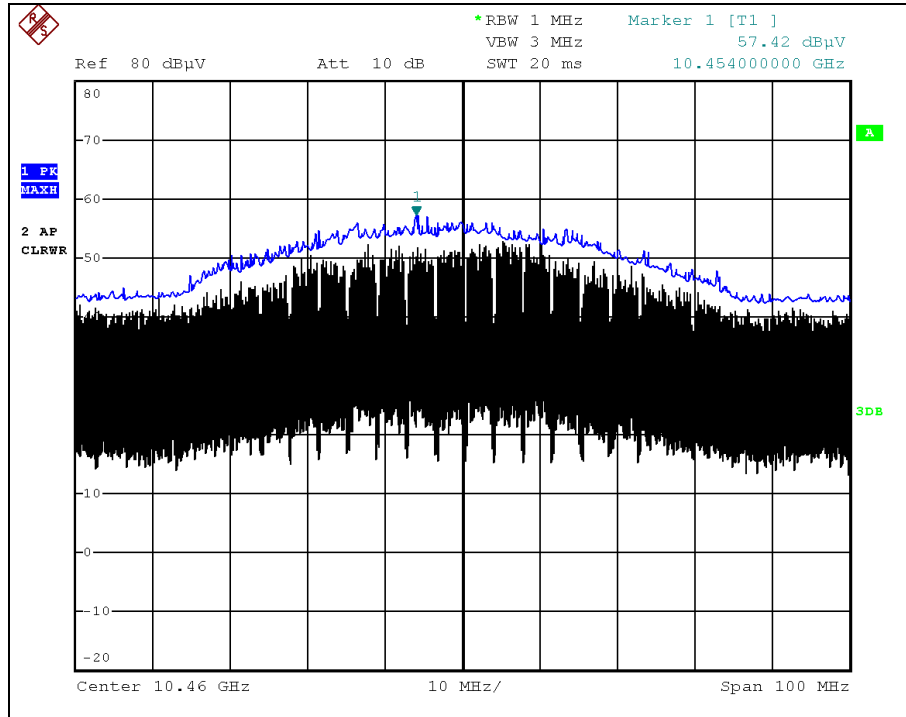

802.11ac_VHT40 _ CH 46

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 54

Spurious - Peak

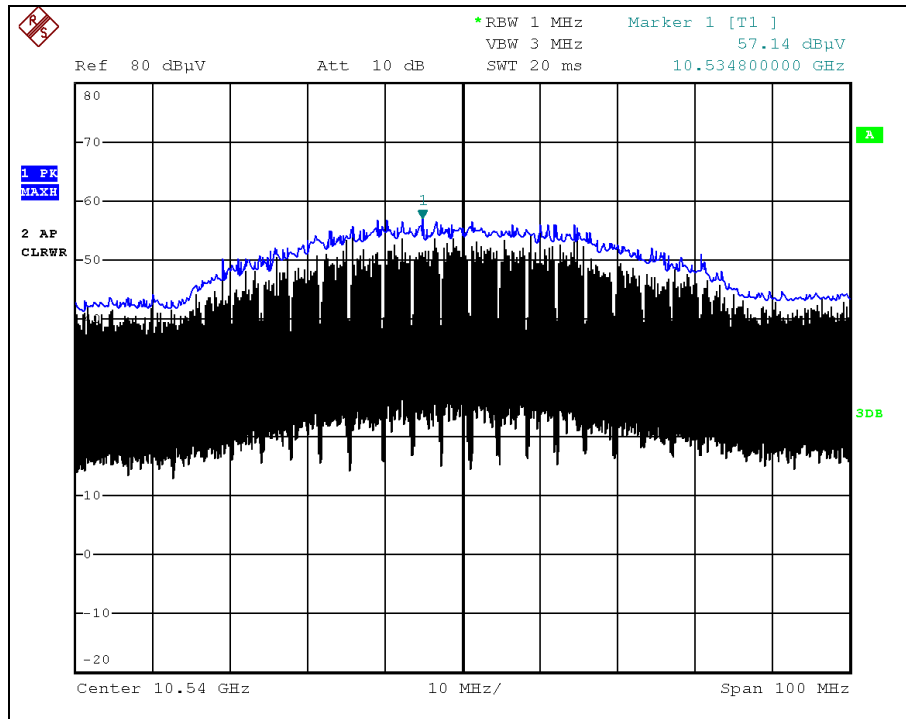

802.11ac_VHT40 _ CH 54

Spurious - Average




Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 62

Spurious - Peak

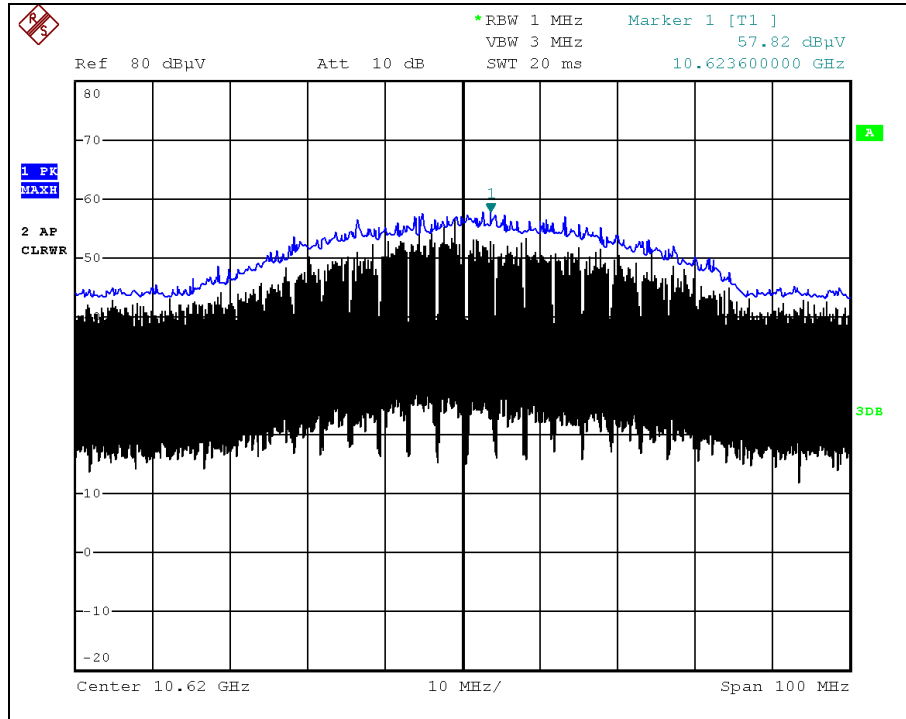

802.11ac_VHT40 _ CH 62

Spurious - Average

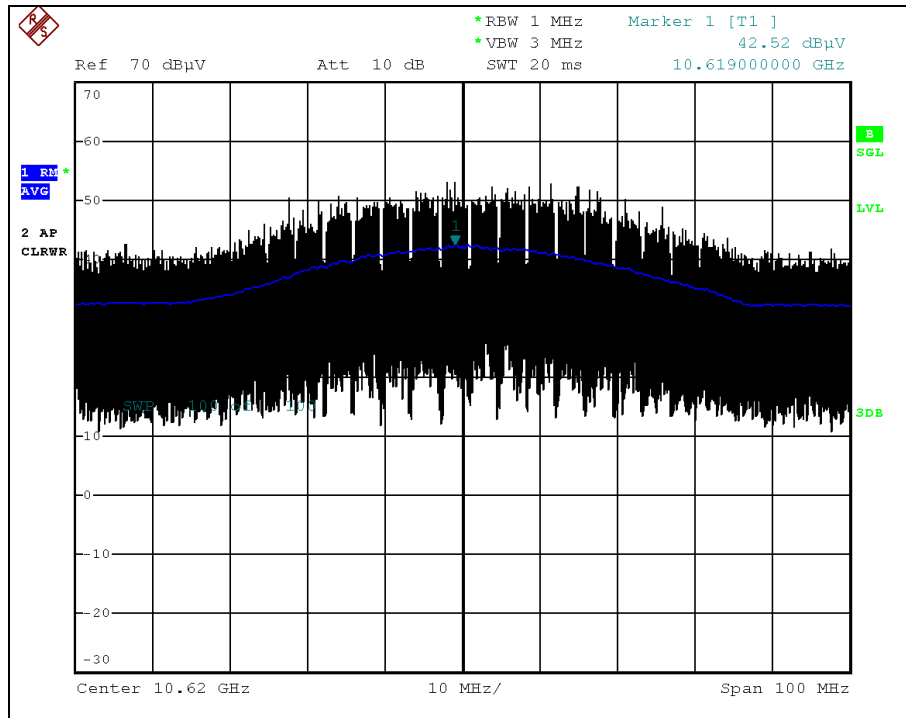


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 102

Spurious - Peak

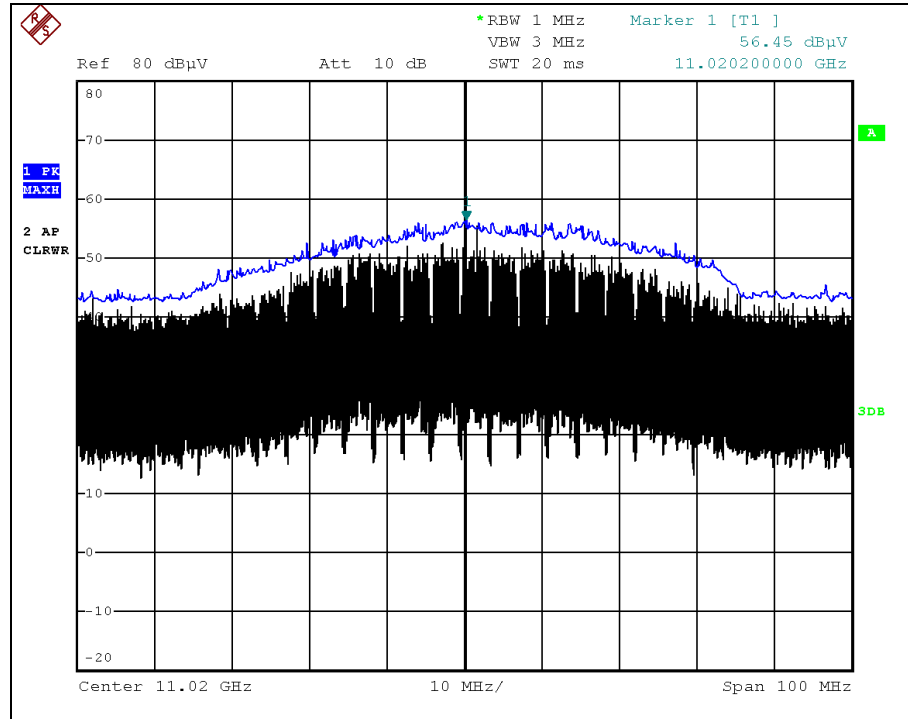

802.11ac_VHT40 _ CH 102

Spurious - Average

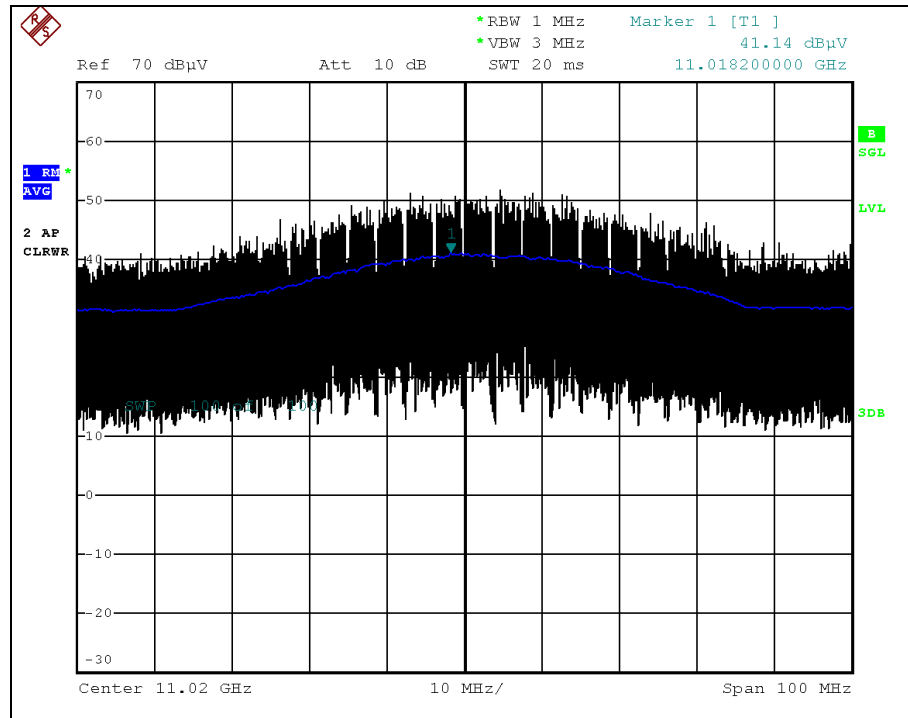


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 118

Spurious - Peak

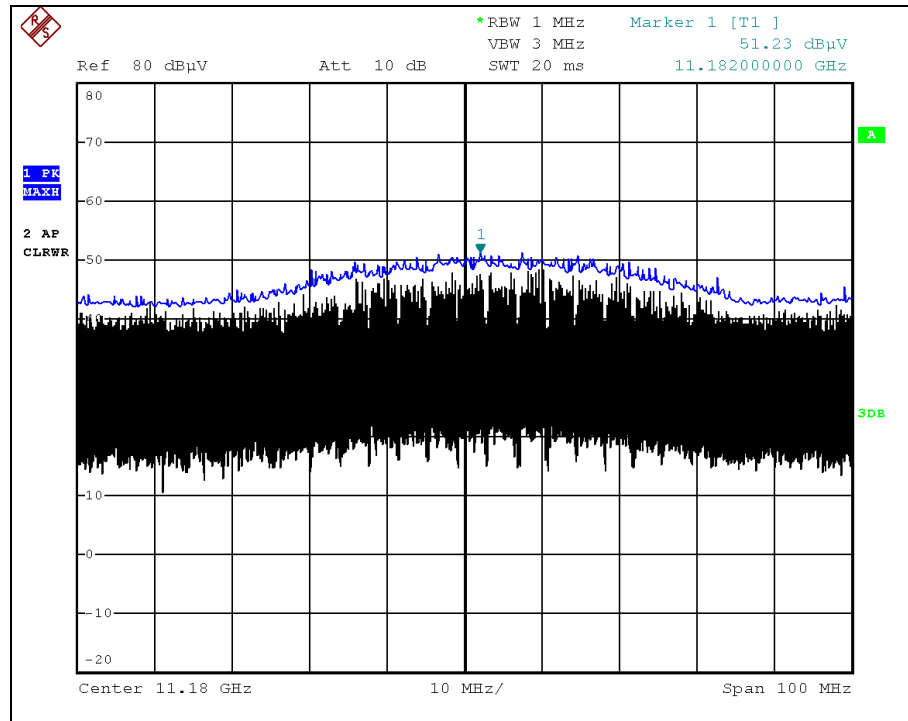

802.11ac_VHT40 _ CH 118

Spurious - Average

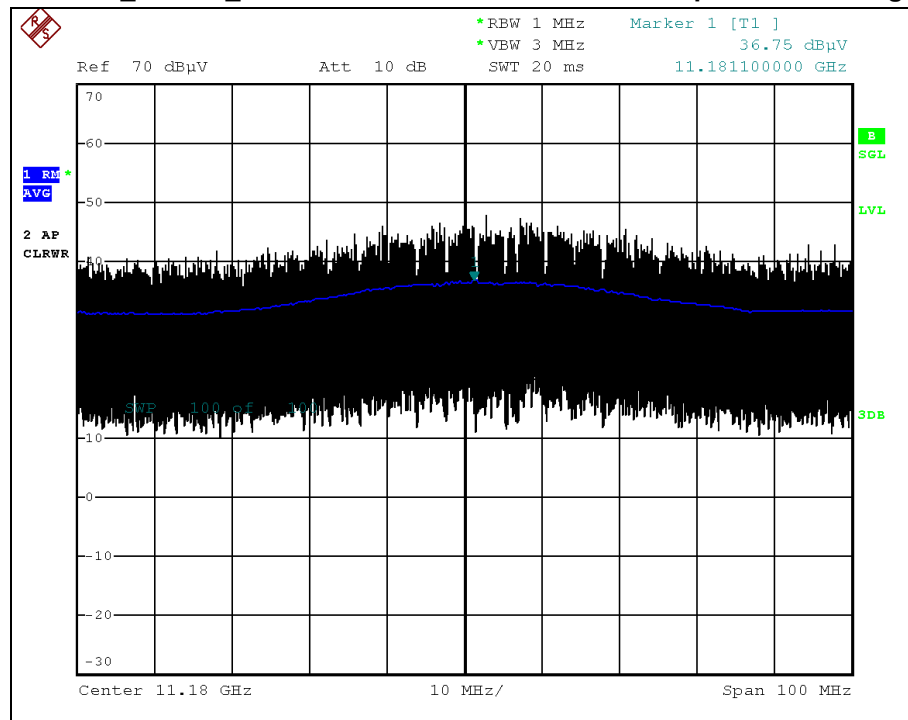


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 134

Spurious - Peak

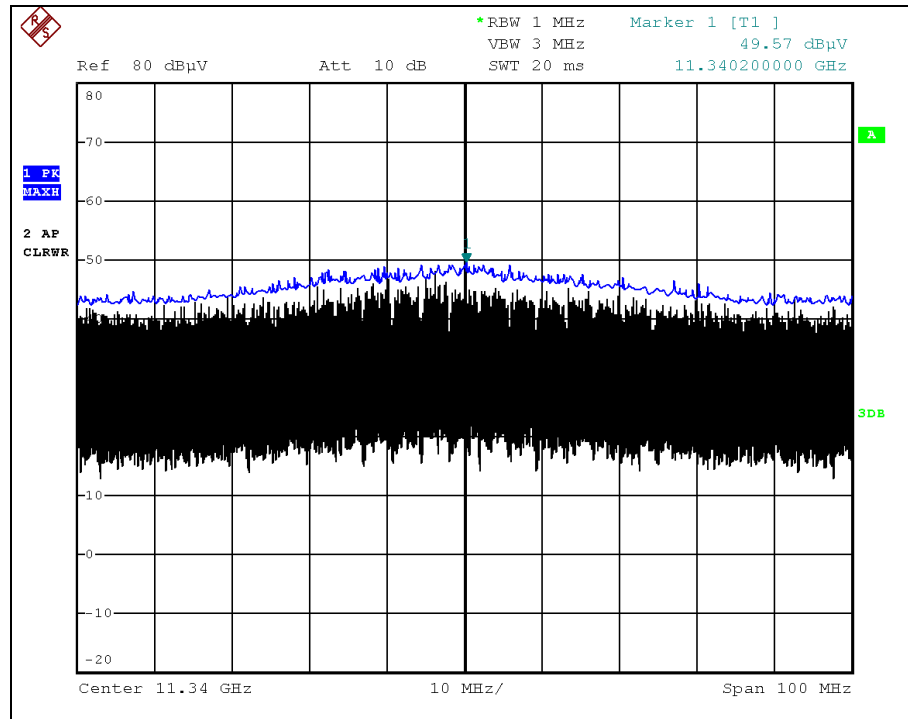

802.11ac_VHT40 _ CH 134

Spurious - Average

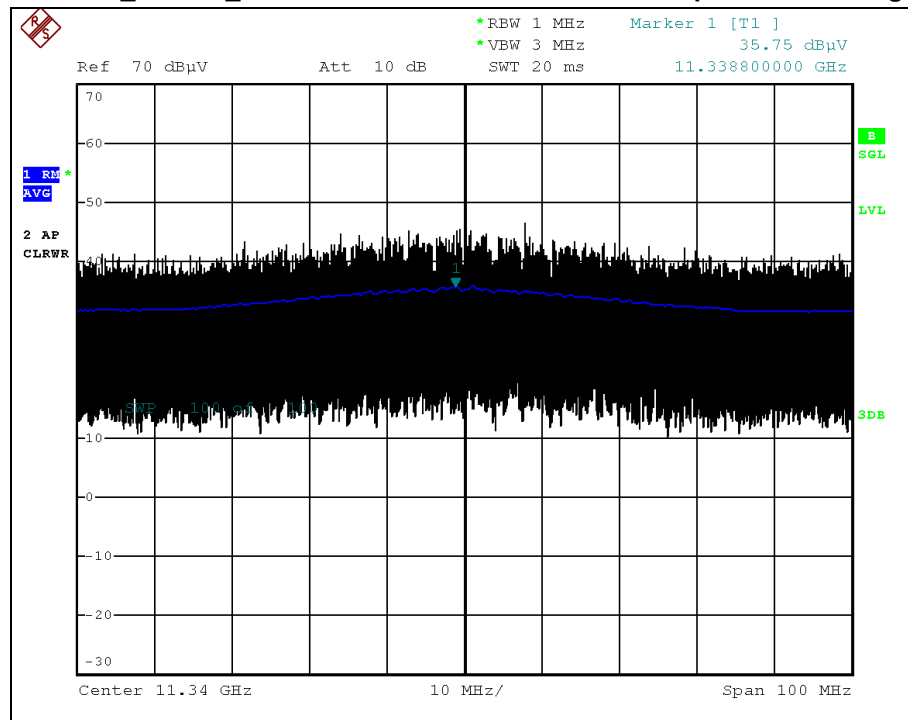


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 151

Spurious - Peak

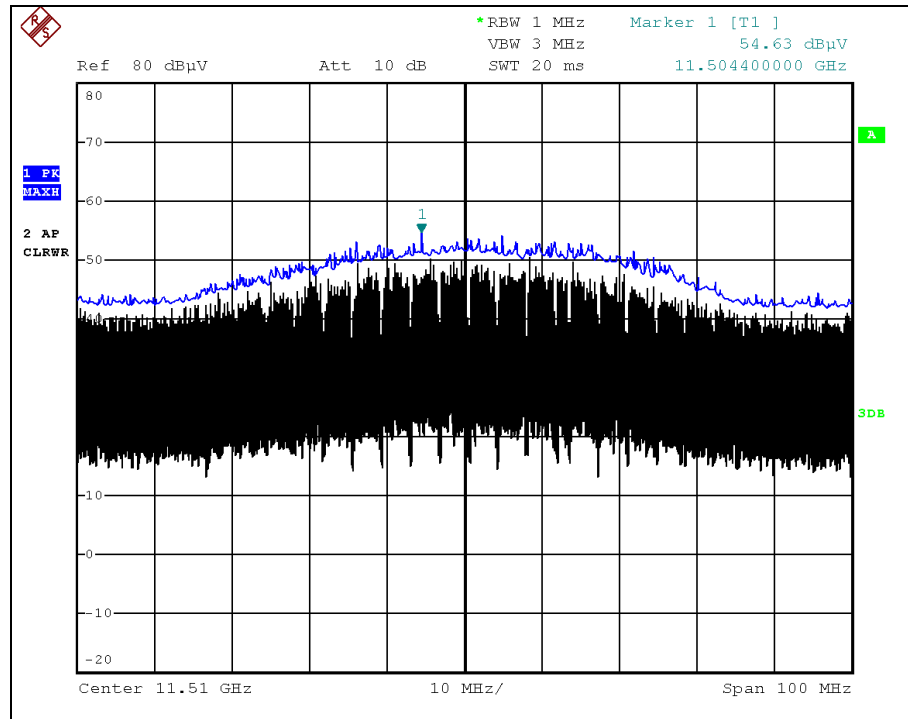

802.11ac_VHT40 _ CH 151

Spurious - Average

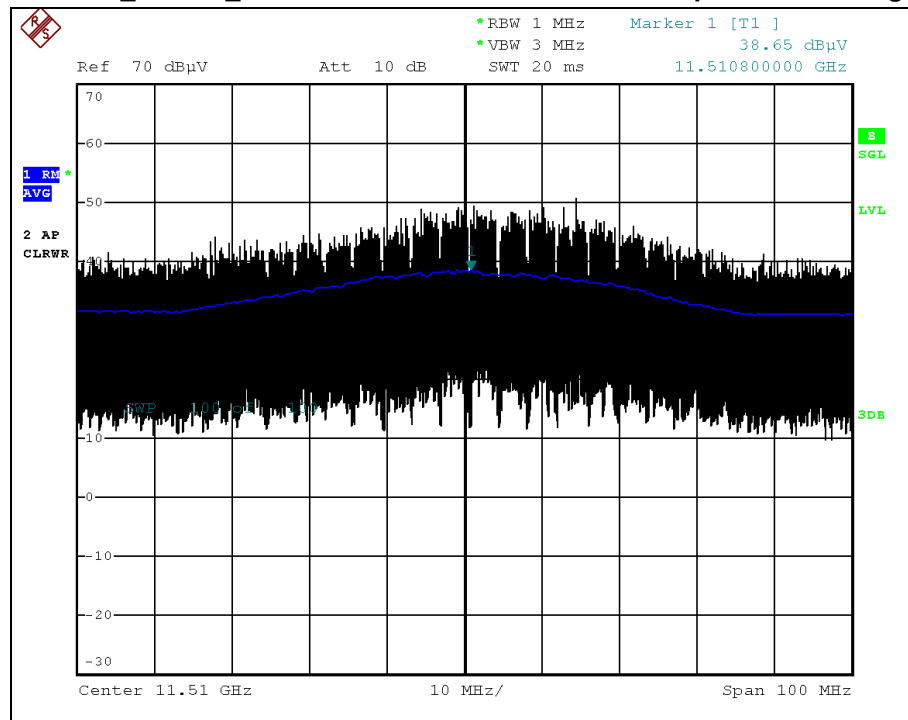


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11ac_VHT40 _ CH 159

Spurious - Peak

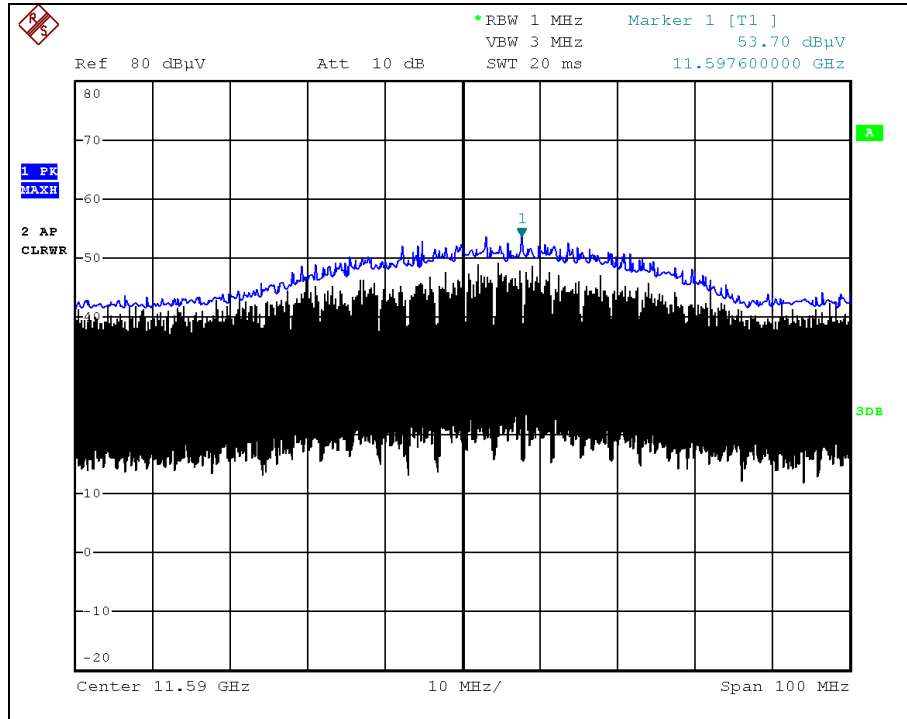

802.11ac_VHT40 _ CH 159

Spurious - Average

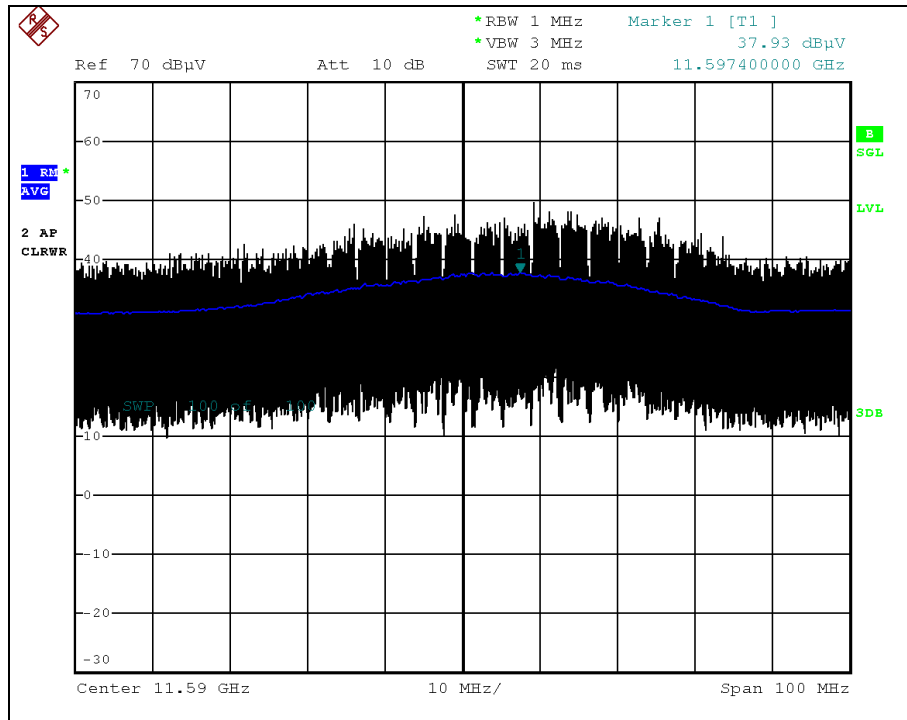

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

3.3.7 Conducted Emission

3.3.7.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

3.3.7.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

3.3.7.3 Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

3.3.7.4 Test Result

Not Applicable

(This product is only using DC power. So, AC conducted emission test has not been performed.)




APPENDIX I

TEST SETUP

Test Repot No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

- Radiated Measurement

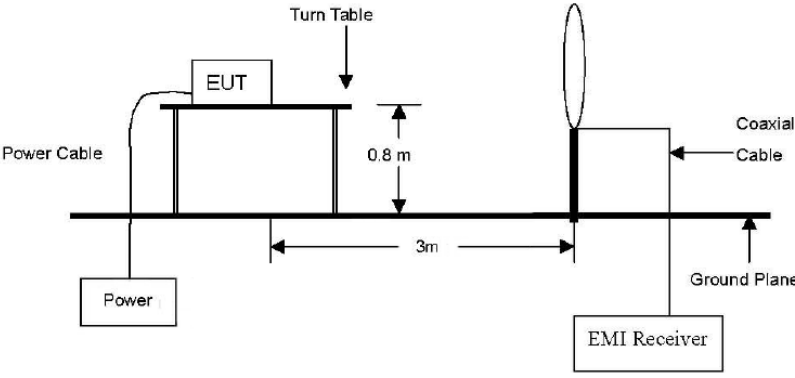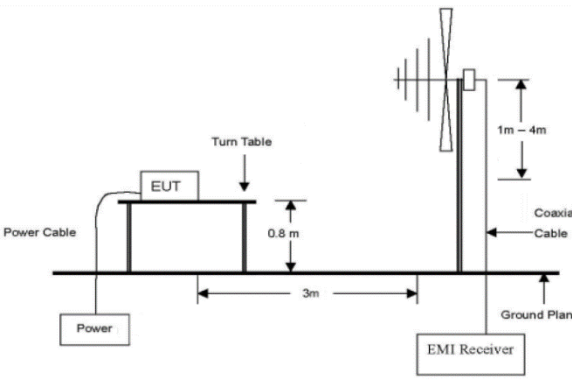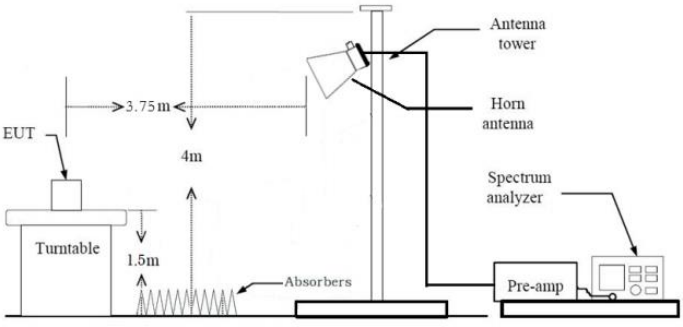below 30 MHz	
below 1 GHz	
above 1 GHz	Above 1 GHz 

- Conducted Measurement

Conducted	
-----------	--

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

APPENDIX II

TEST EQUIPMENT USED FOR TESTS

Test Repot No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

	Description	Manufacturer	Serial No.	Model No.	Cal. Date	Next Cal. Date
1	SPECTRUM ANALYZER	R&S	100250	FSU26	2019-09-23	2020-09-23
2	SPECTRUM ANALYZER	R&S	100617	FSP40	2020-03-10	2021-03-10
3	USB Power sensor	Agilent	MY52500002	U2021XA	2020-03-10	2021-03-10
4	Humi./Baro/Temp. data recorder	Lutron	38420	MHB-382SD	2019-11-18	2020-11-18
5	Temperature & humidity cabinet	TERCHY	1060906	MHCB-64AZDA	2019-12-09	2020-12-09
6	SIGNAL GENERATOR	HP	3614A00312	83640B	2019-11-22	2020-11-22
7	Vector SG	R&S	255563	SMBV100A	2020-03-10	2021-03-10
8	Power supply	GWInstsk	EH120798	PST-3202	2020-03-10	2021-03-10
9	Triple Output DC Power Supply	Agilent	MY40038816	E3631A	2020-03-10	2021-03-10
10	ATTENUATOR	Agilent	08259	8493C	2020-03-11	2021-03-11
11	ATTENUATOR	Weinschel	none	WA1444-14	2020-03-11	2021-03-11
12	ATTENUATOR	Weinschel	none	WA41/12-30-12	2020-03-10	2021-03-10
13	Attenuator	BRACKE	1	BM10060.6	2019-11-15	2020-11-15
14	POWER DIVIDER	Agilent	11664	11636B	2020-03-11	2021-03-11
15	POWER DIVIDER	Agilent	51623	11636B	2020-03-11	2021-03-11
16	STEP ATTENUATOR	HP	2852A00842	8495D	2020-03-11	2021-03-11
17	TRILOG BroadBand Antenna	Schwarzbeck	01027	VULB 9168	2019-06-17	2020-06-17
18	TRILOG BroadBand Antenna	Schwarzbeck	01029	VULB 9168	2019-06-20	2020-06-20
19	Double Ridged BroadBand Horn Antenna	Schwarzbeck	02087	BBHA 9120D	2019-07-26	2020-07-26
20	Double Ridged BroadBand Horn Antenna	Schwarzbeck	02086	BBHA 9120D	2019-07-26	2020-07-26
21	BroadBand Horn Antenna	Schwarzbeck	00938	BBHA 9170	2019-07-10	2020-07-10
22	BroadBand Horn Antenna	Schwarzbeck	00937	BBHA 9170	2019-07-10	2020-07-10
23	Amplifier	TESTEK	190007-L	TK-PA18H	2019-05-29	2020-05-29
24	Amplifier	TESTEK	190008-L	TK-PA1840H	2019-06-03	2020-06-03
25	LOOP-ANTENNA	Schwarzbeck	00124	FMZB1519 B	2019-06-27	2020-06-27
26	LISN	Schwarzbeck	00984	NSLK 8127	2019-06-20	2020-06-20
27	EMI Test Receiver	R&S	102116	ESRP3	2019-07-24	2020-07-24

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

APPENDIX III

DUTY CYCLE CORRECTION FACTOR

Test Procedure

Duty Cycle $[X = \text{On Time} / (\text{On} + \text{Off time})]$ is measured using Measurement Procedure of KDB789033 D02v02r01

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW $\geq$ RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)
 T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 (T = On time of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

Test Result

Test Mode	Data Rate	Test Channel	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor (dB)	50/T (kHz)
			On Time (ms)	(On+Off) Time (ms)	x		
802.11a	6 Mbps	36	1.378	1.508	0.914	0.39	36.28
802.11n _HT20	MCS 0	36	1.314	1.441	0.912	0.40	38.05
802.11n _HT40	MCS 0	38	1.314	1.442	0.911	0.40	38.05
802.11ac _VHT20	MCS 0	36	1.295	1.413	0.916	0.38	38.61
802.11ac _VHT40	MCS 0	38	1.295	1.421	0.911	0.41	38.61


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Test Plot


802.11a _ ch.36

Duty Cycle

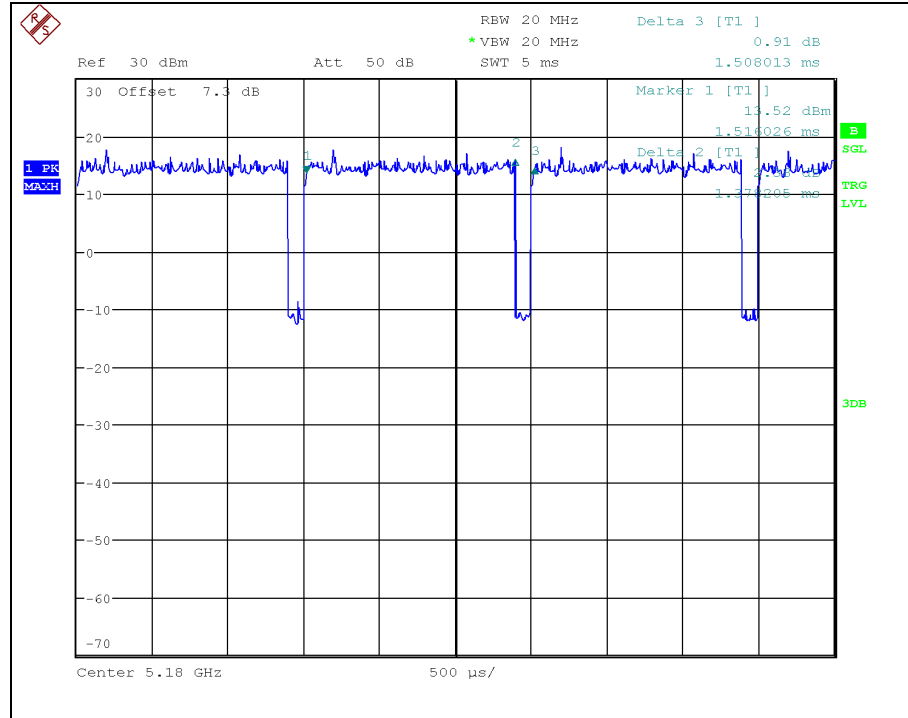

802.11n_HT20 _ ch.36

Duty Cycle

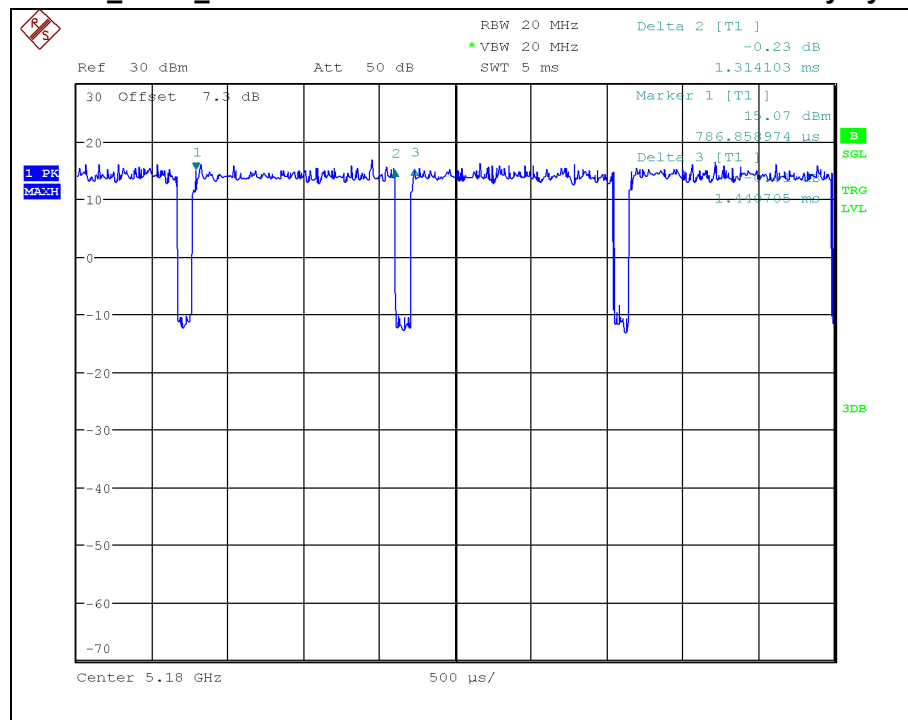


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071


802.11n_HT40_ch.38

Duty Cycle

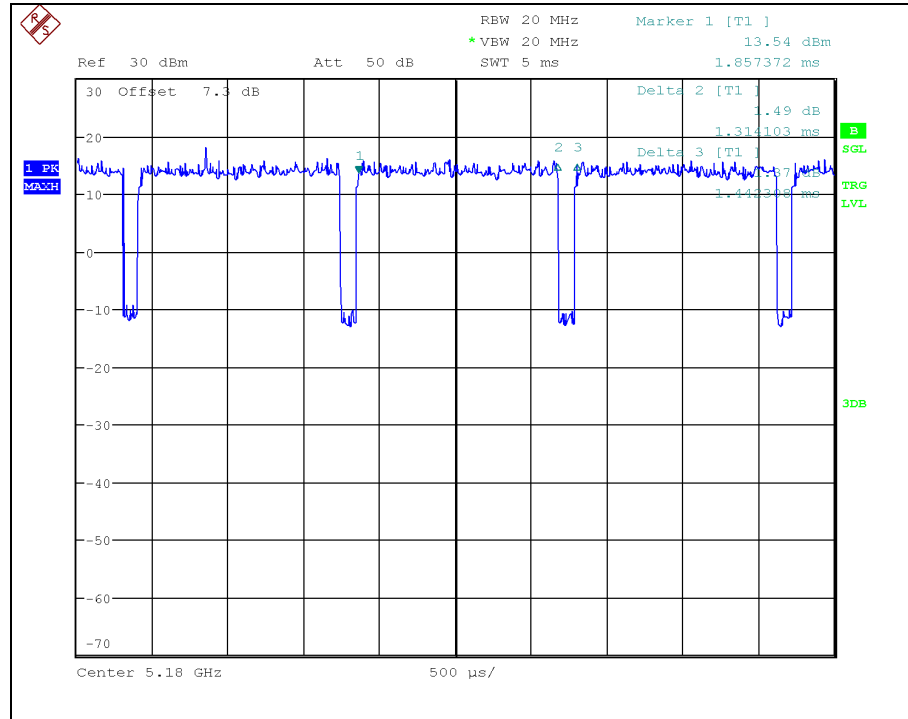

802.11ac_VHT20_ch.36

Duty Cycle

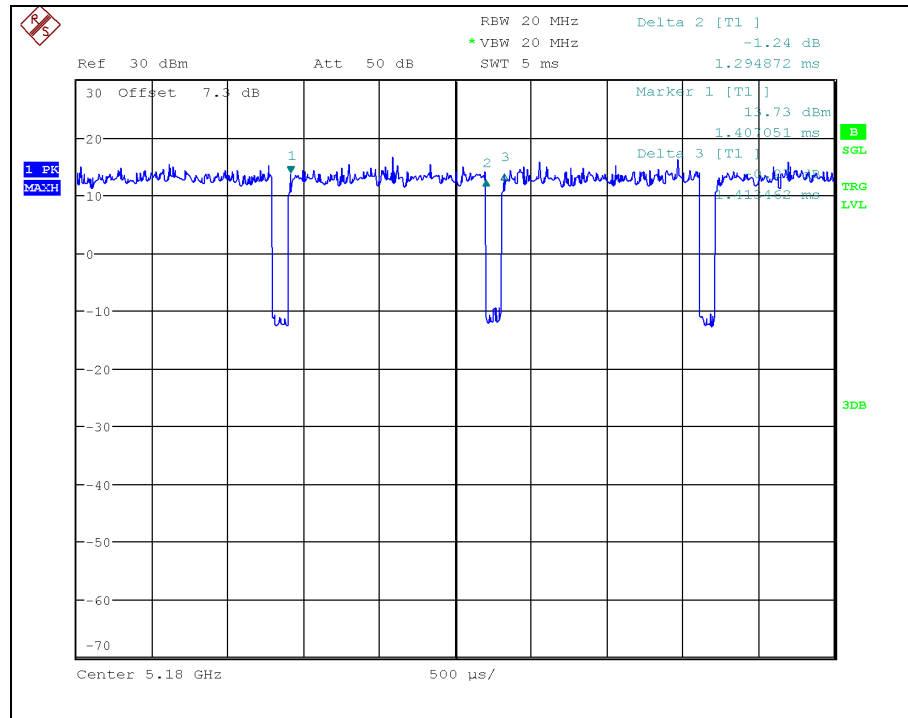


Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

802.11ac_VHT40_ch.38

Duty Cycle

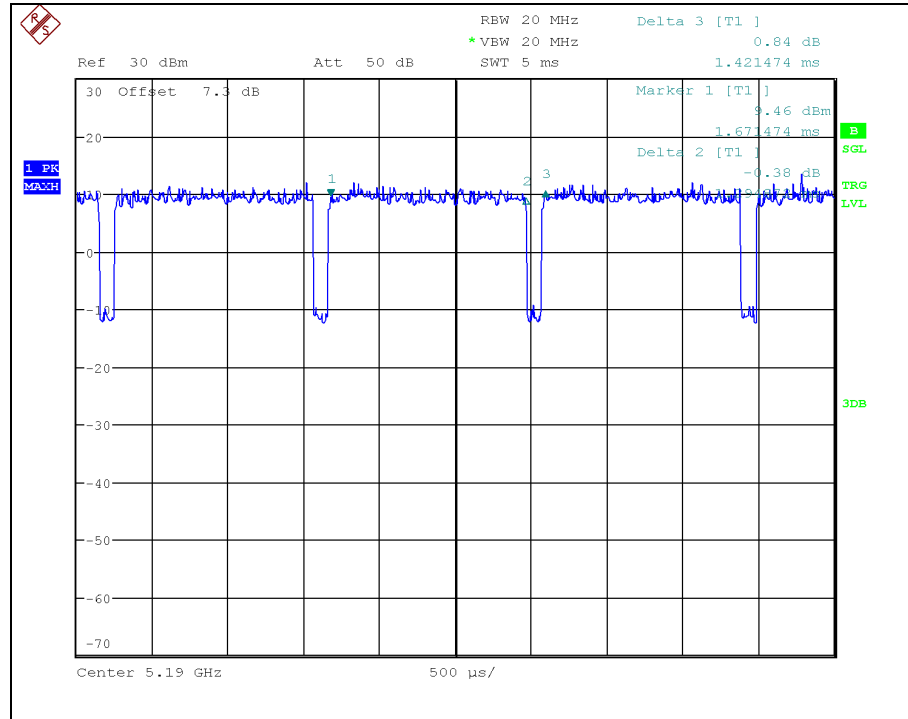

Test Report No.: NW2004-F003

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071