

TEST REPORT

Product : Vision Screener
Trade mark : CHAROPS
Model/Type reference : CVS-1
Serial Number : N/A
Report Number : EED32L00297001
FCC ID : 2AT8E-CVS1
Date of Issue : May 22, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

SHANGHAI HUVITZ Co., Ltd.

Building 1, No. 150, Renjie Road, Fengxian, Shanghai, China

Prepared by:

Centre Testing International Group Co., Ltd.

**Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Reviewed by:

Ware Xin

Sunlight Sun

Ware Xin

Approved by:

Sam Chuang

Date:

May 22, 2020

Sam Chuang

Check No.:3970383225



2 Version

Version No.	Date	Description
00	May 22, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Duty cycle	N/A	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	10
6.5 TEST LOCATION.....	10
6.6 DEVIATION FROM STANDARDS.....	10
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
7 EQUIPMENT LIST.....	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	14
Appendix A): 20dB Occupied Bandwidth.....	15
Appendix B): Carrier Frequency Separation.....	20
Appendix C): Dwell Time.....	25
Appendix D): Hopping Channel Number.....	30
Appendix E): Conducted Peak Output Power.....	33
Appendix F): Band-edge for RF Conducted Emissions.....	38
Appendix G): RF Conducted Spurious Emissions.....	44
Appendix H): Pseudorandom Frequency Hopping Sequence.....	55
Appendix I): Antenna Requirement.....	56
Appendix J): AC Power Line Conducted Emission.....	57
Appendix K): Restricted bands around fundamental frequency (Radiated).....	60
Appendix L): Radiated Spurious Emissions.....	77
PHOTOGRAPHS OF TEST SETUP.....	83
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	86

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

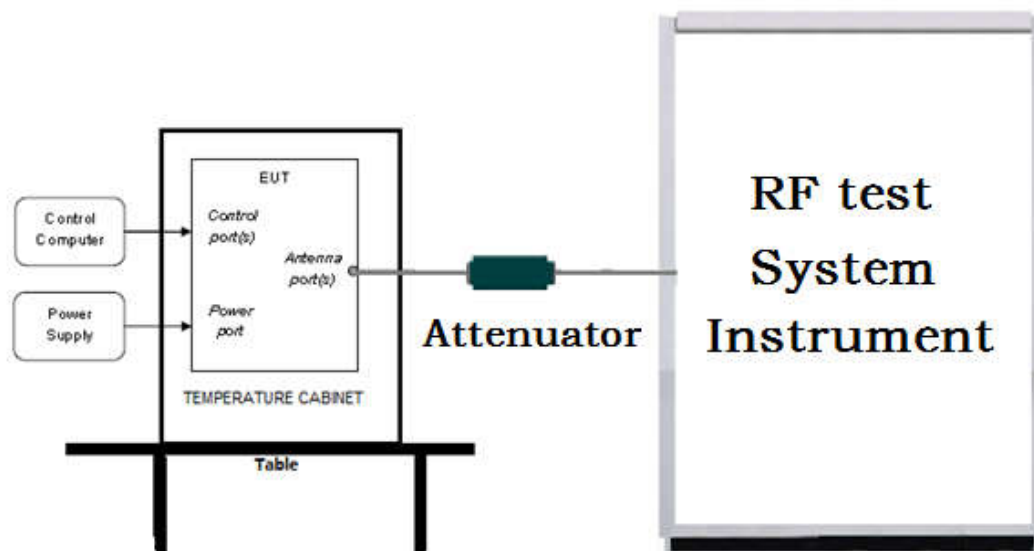

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

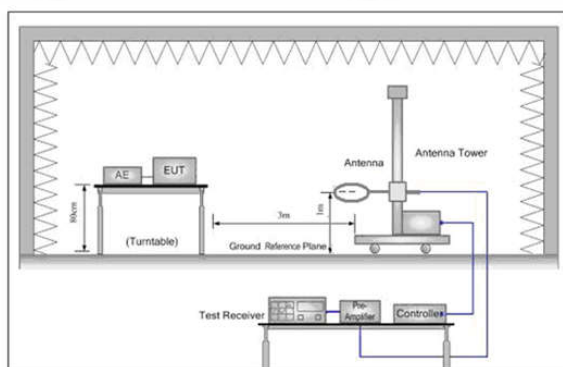


Figure 1. Below 30MHz

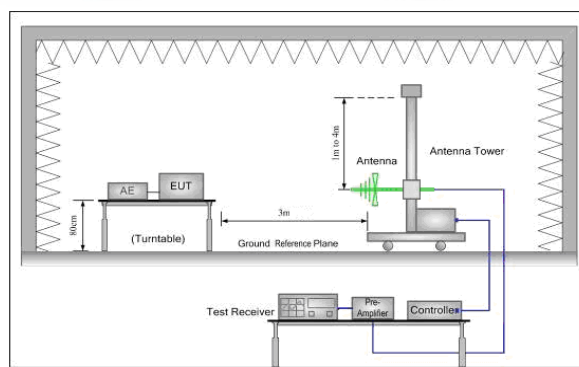


Figure 2. 30MHz to 1GHz


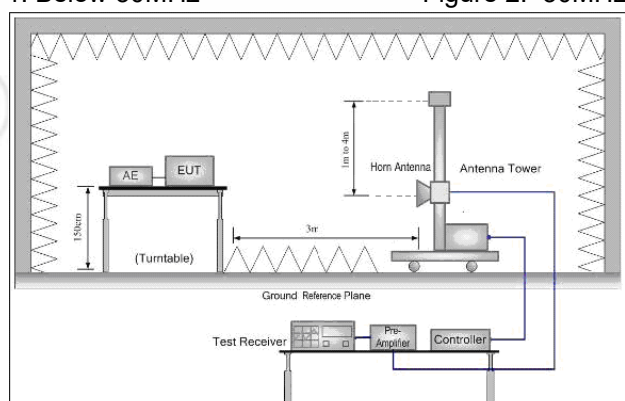


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

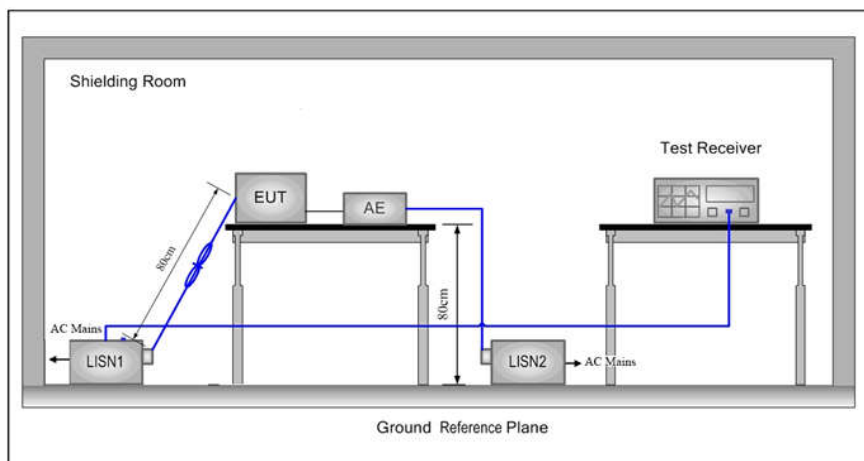

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 0	Channel 39	Channel 78
		2402MHz	2441MHz	2480MHz
TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).				

6 General Information

6.1 Client Information

Applicant:	SHANGHAI HUVITZ Co., Ltd.
Address of Applicant:	Building 1, No. 150, Renjie Road, Fengxian, Shanghai, China
Manufacturer:	SHANGHAI HUVITZ Co., Ltd.
Address of Manufacturer:	Building 1, No. 150, Renjie Road, Fengxian, Shanghai, China
Factory:	SHANGHAI HUVITZ Co., Ltd.
Address of Factory:	Building 1, No. 150, Renjie Road, Fengxian, Shanghai, China

6.2 General Description of EUT

Product Name:	Vision Screener	
Model No.(EUT):	CVS-1	
Trade mark:	CHAROPS	
EUT Supports Radios application:	BT 3.0 Single mode, 2402MHz to 2480MHz	
Power Supply:	AC Adapter	MODEL:MDS-030AAC15 INPUT:100-240V~0.8-0.6V 50-60Hz OUTPUT:15V---2A
Sample Received Date:	Oct. 17, 2019	
Sample tested Date:	Oct. 17, 2019 to Apr.24, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	2.1+EDR						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Hardware Version:	N/A						
Software Version:	N/A						
Test Power Grade:	Reference Tablel						
Test Software of EUT:	Default						
Antenna Type:	Omnidirectional Antenna						
Antenna Gain:	2 dBi						
Test Voltage:	AC220V/50Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Table:

Mode	Channel	Power Setting
DH5	LCH	6
	MCH	6
	HCH	6
2DH5	LCH	6
	MCH	6
	HCH	6
3DH5	LCH	6
	MCH	6
	HCH	6

6.4 Description of Support Units

The EUT has been tested with associated equipment below

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Notebook	DELL	DELL	CE&FCC	DELL

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019 02-17-2020	02-29-2020 02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019 02-17-2020	02-29-2020 02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	03-01-2019 02-17-2020	02-29-2020 02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019 02-17-2020	02-29-2020 02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019 02-17-2020	02-29-2020 02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019 03-05-2020	03-26-2020 03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019 03-05-2020	03-26-2020 03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019 03-05-2020	03-26-2020 03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-16-2019 01-09-2020	01-15-2020 01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A): 20dB Occupied Bandwidth

Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.
- 6.


Test Setup









Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.8573	0.84017	PASS
GFSK	MCH	0.8539	0.83888	PASS
GFSK	HCH	0.8566	0.84156	PASS
$\pi/4$ DQPSK	LCH	1.272	1.1723	PASS
$\pi/4$ DQPSK	MCH	1.276	1.1726	PASS
$\pi/4$ DQPSK	HCH	1.272	1.1740	PASS
8DPSK	LCH	1.287	1.1758	PASS
8DPSK	MCH	1.285	1.1776	PASS
8DPSK	HCH	1.287	1.1807	PASS

Test Graph

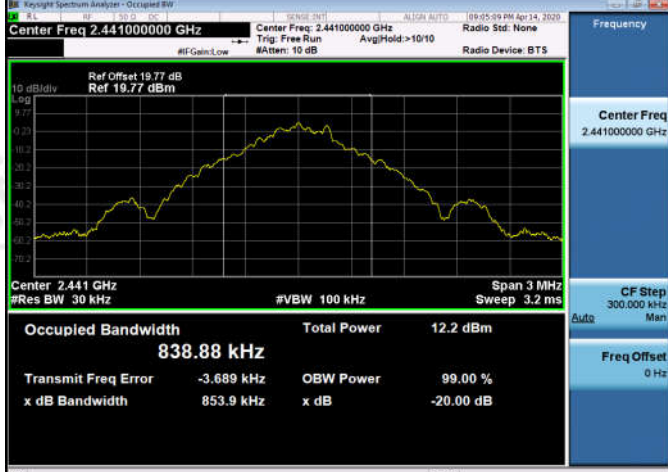Graphs	
GFSK/LCH	 Center Freq 2.40200000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402 GHz #Res BW 30 kHz Occupied Bandwidth 840.17 kHz Total Power 11.5 dBm Transmit Freq Error -4.936 kHz OBW Power 99.00 % x dB Bandwidth 857.3 kHz x dB -20.00 dB
GFSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz #Res BW 30 kHz Occupied Bandwidth 838.88 kHz Total Power 12.2 dBm Transmit Freq Error -3.689 kHz OBW Power 99.00 % x dB Bandwidth 853.9 kHz x dB -20.00 dB
GFSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.48 GHz #Res BW 30 kHz Occupied Bandwidth 841.56 kHz Total Power 12.3 dBm Transmit Freq Error -4.662 kHz OBW Power 99.00 % x dB Bandwidth 856.6 kHz x dB -20.00 dB

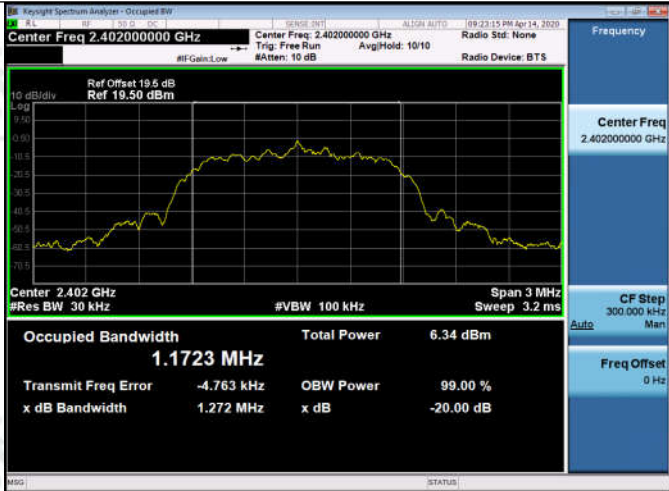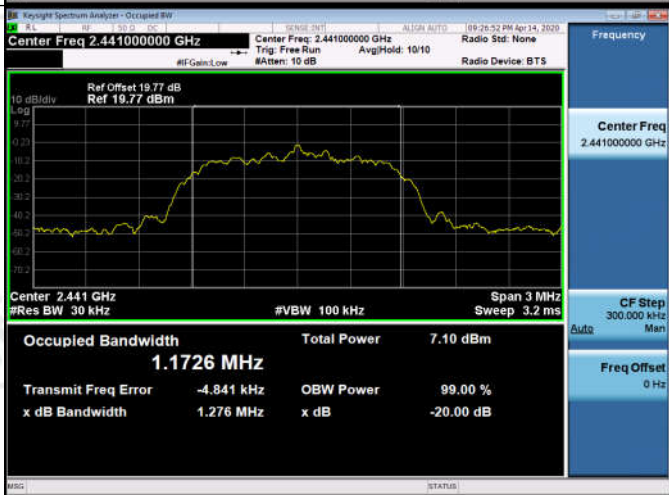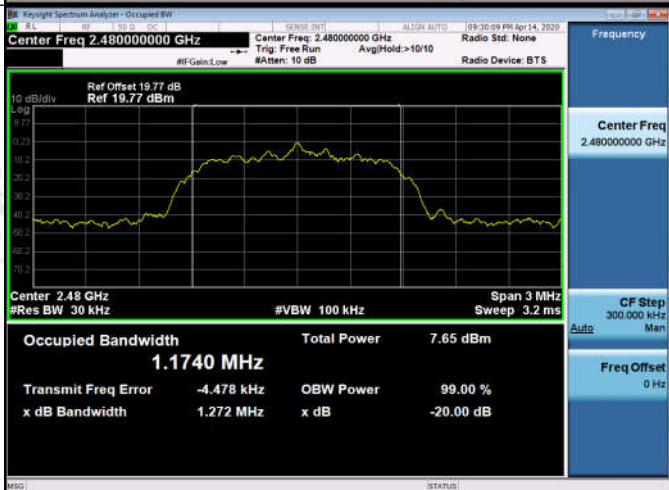$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

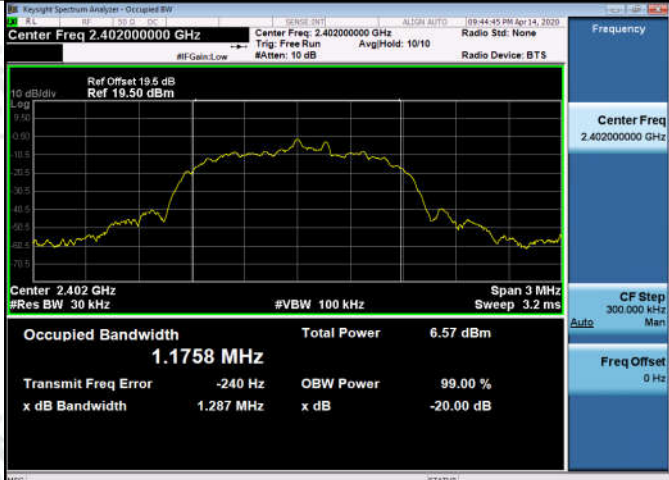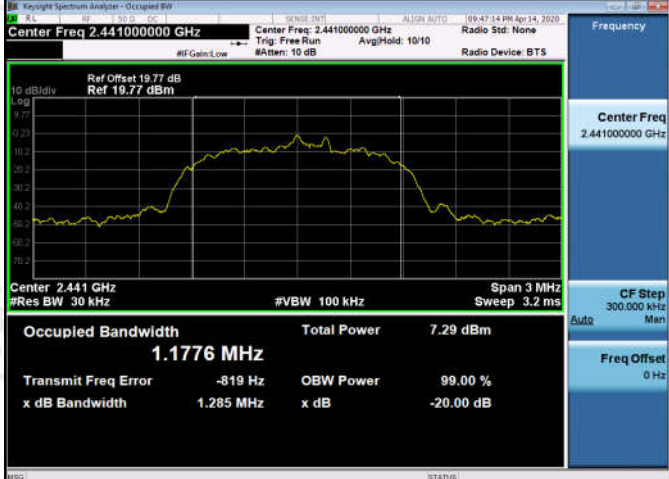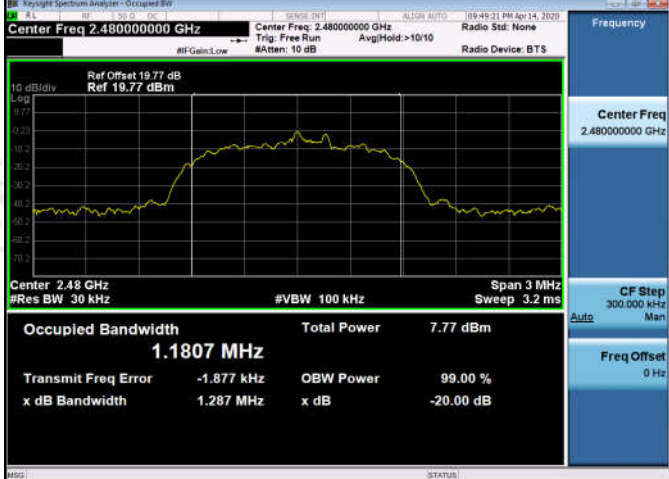8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

Appendix B): Carrier Frequency Separation

Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency


Test Setup



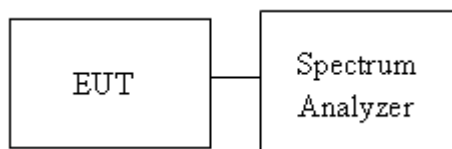



Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.136	PASS
GFSK	MCH	0.974	PASS
GFSK	HCH	1.154	PASS
$\pi/4$ DQPSK	LCH	1.224	PASS
$\pi/4$ DQPSK	MCH	1.184	PASS
$\pi/4$ DQPSK	HCH	1.136	PASS
8DPSK	LCH	0.980	PASS
8DPSK	MCH	1.046	PASS
8DPSK	HCH	1.022	PASS

Test Graph

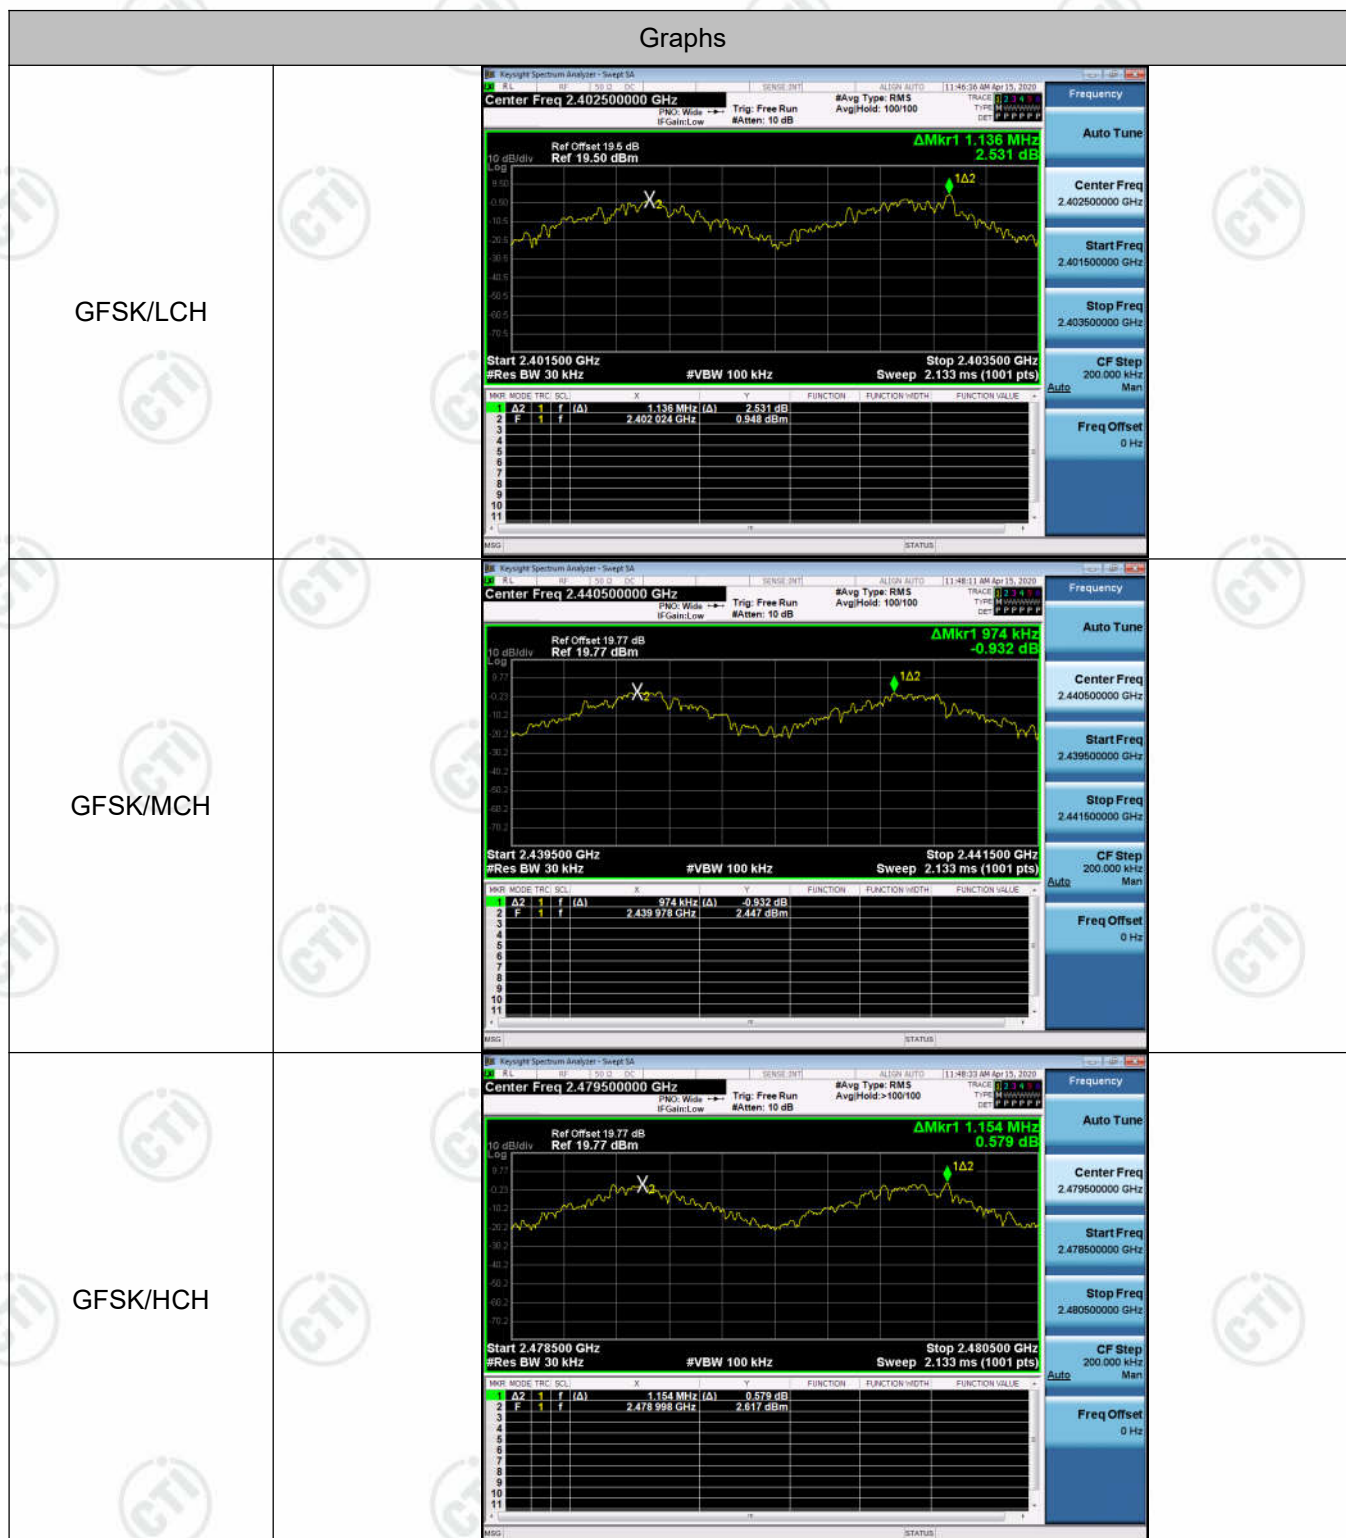

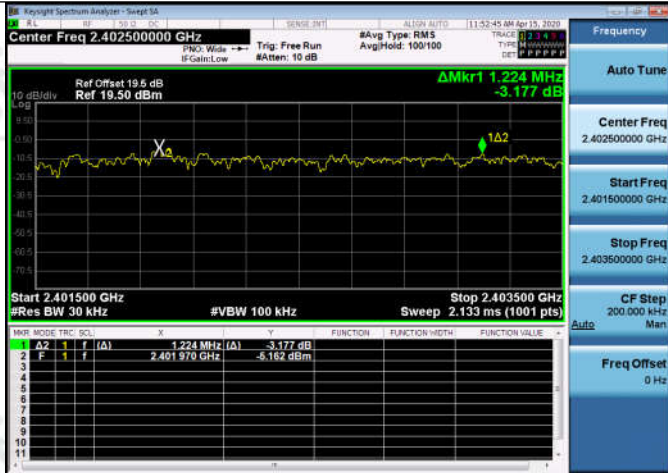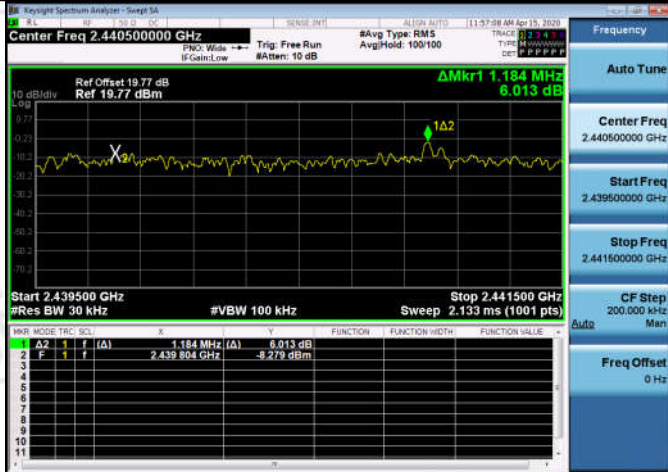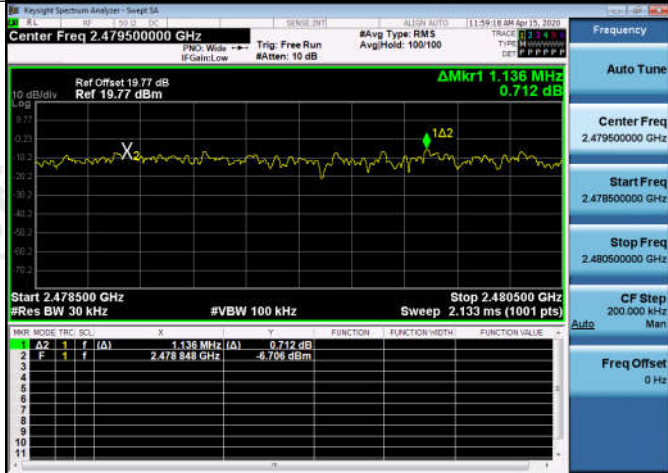$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

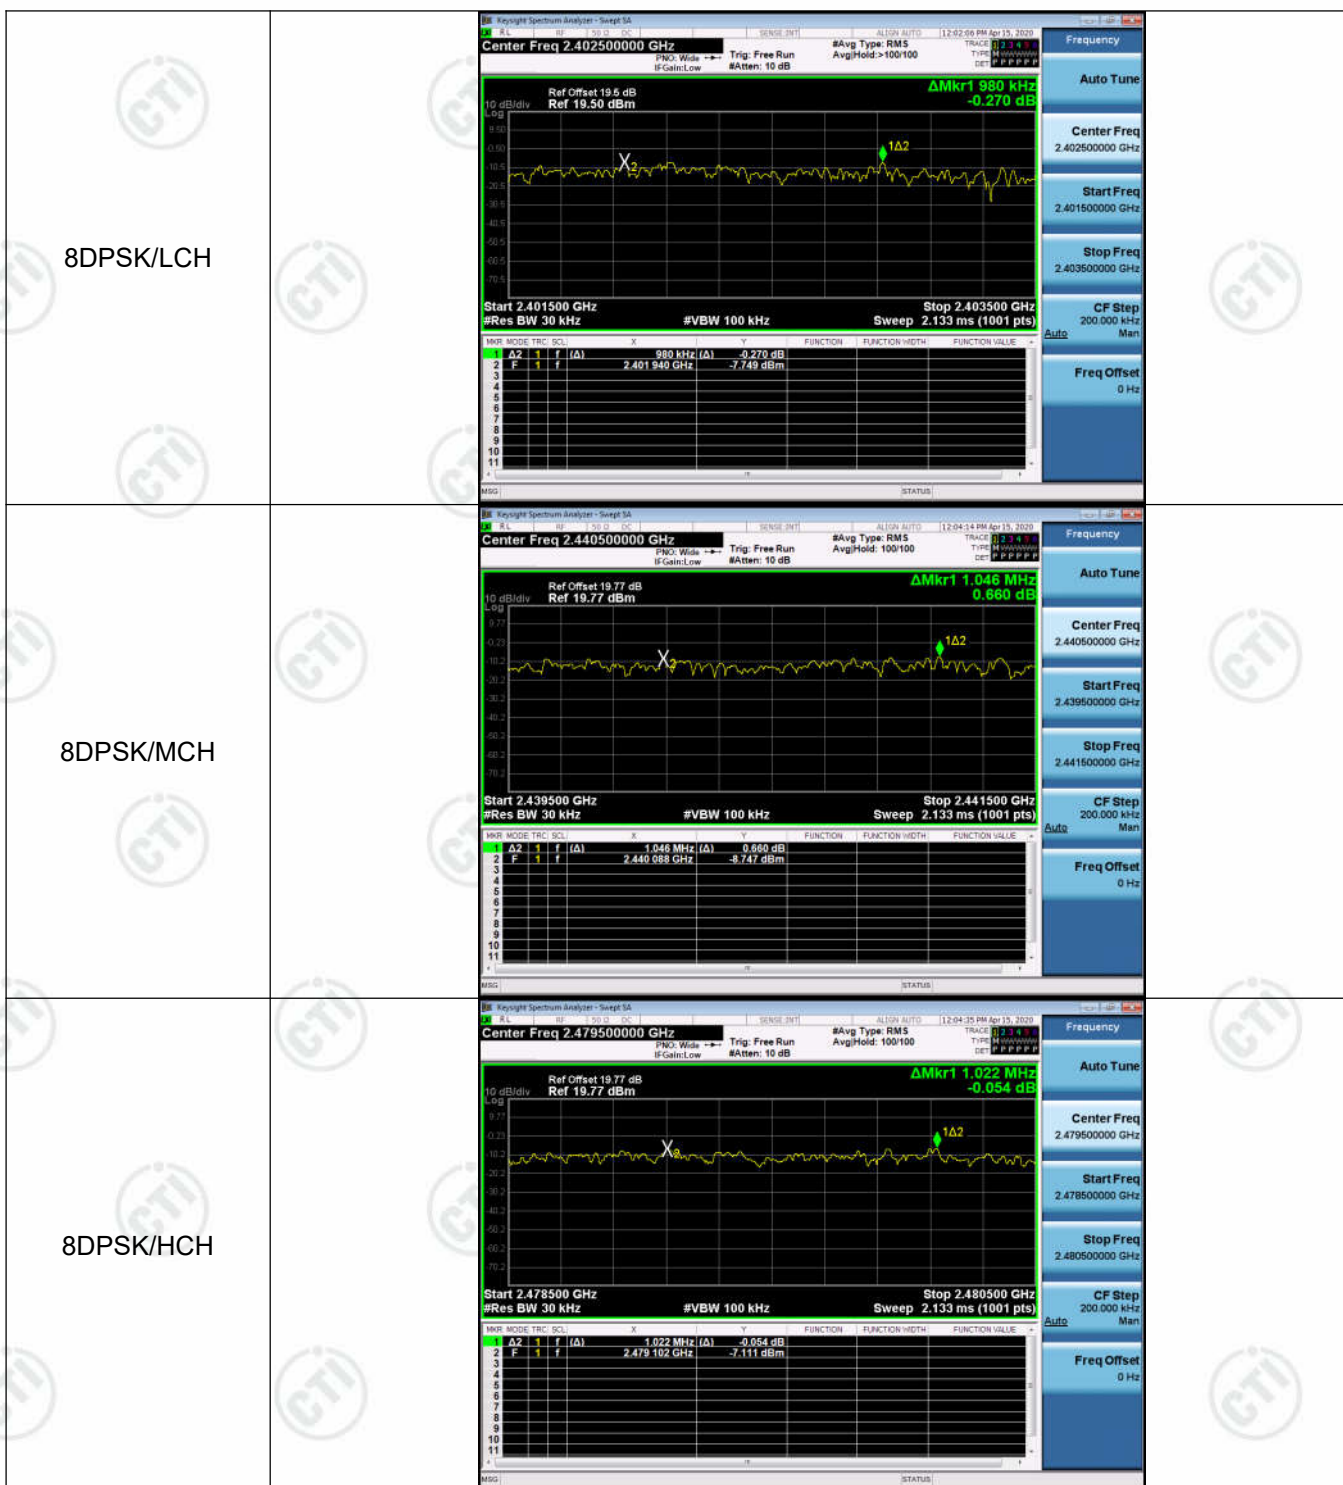

Appendix C): Dwell Time


Test Limit

According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure


1. EUT RF output port connected to the SA by RF cable.
 2. Set center frequency of spectrum analyzer = operating frequency.
 3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = auto
- Test Setup






Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.4015337	320	0.128	0.32	PASS
GFSK	DH1	MCH	0.401534	320	0.128	0.32	PASS
GFSK	DH1	HCH	0.40153	320	0.128	0.32	PASS
GFSK	DH3	LCH	1.658063	160	0.265	0.66	PASS
GFSK	DH3	MCH	1.65807	160	0.265	0.66	PASS
GFSK	DH3	HCH	1.65806	160	0.265	0.66	PASS
GFSK	DH5	LCH	2.8888	106.7	0.308	0.77	PASS
GFSK	DH5	MCH	2.8888	106.7	0.308	0.77	PASS
GFSK	DH5	HCH	2.898	106.7	0.309	0.77	PASS

Test Graph

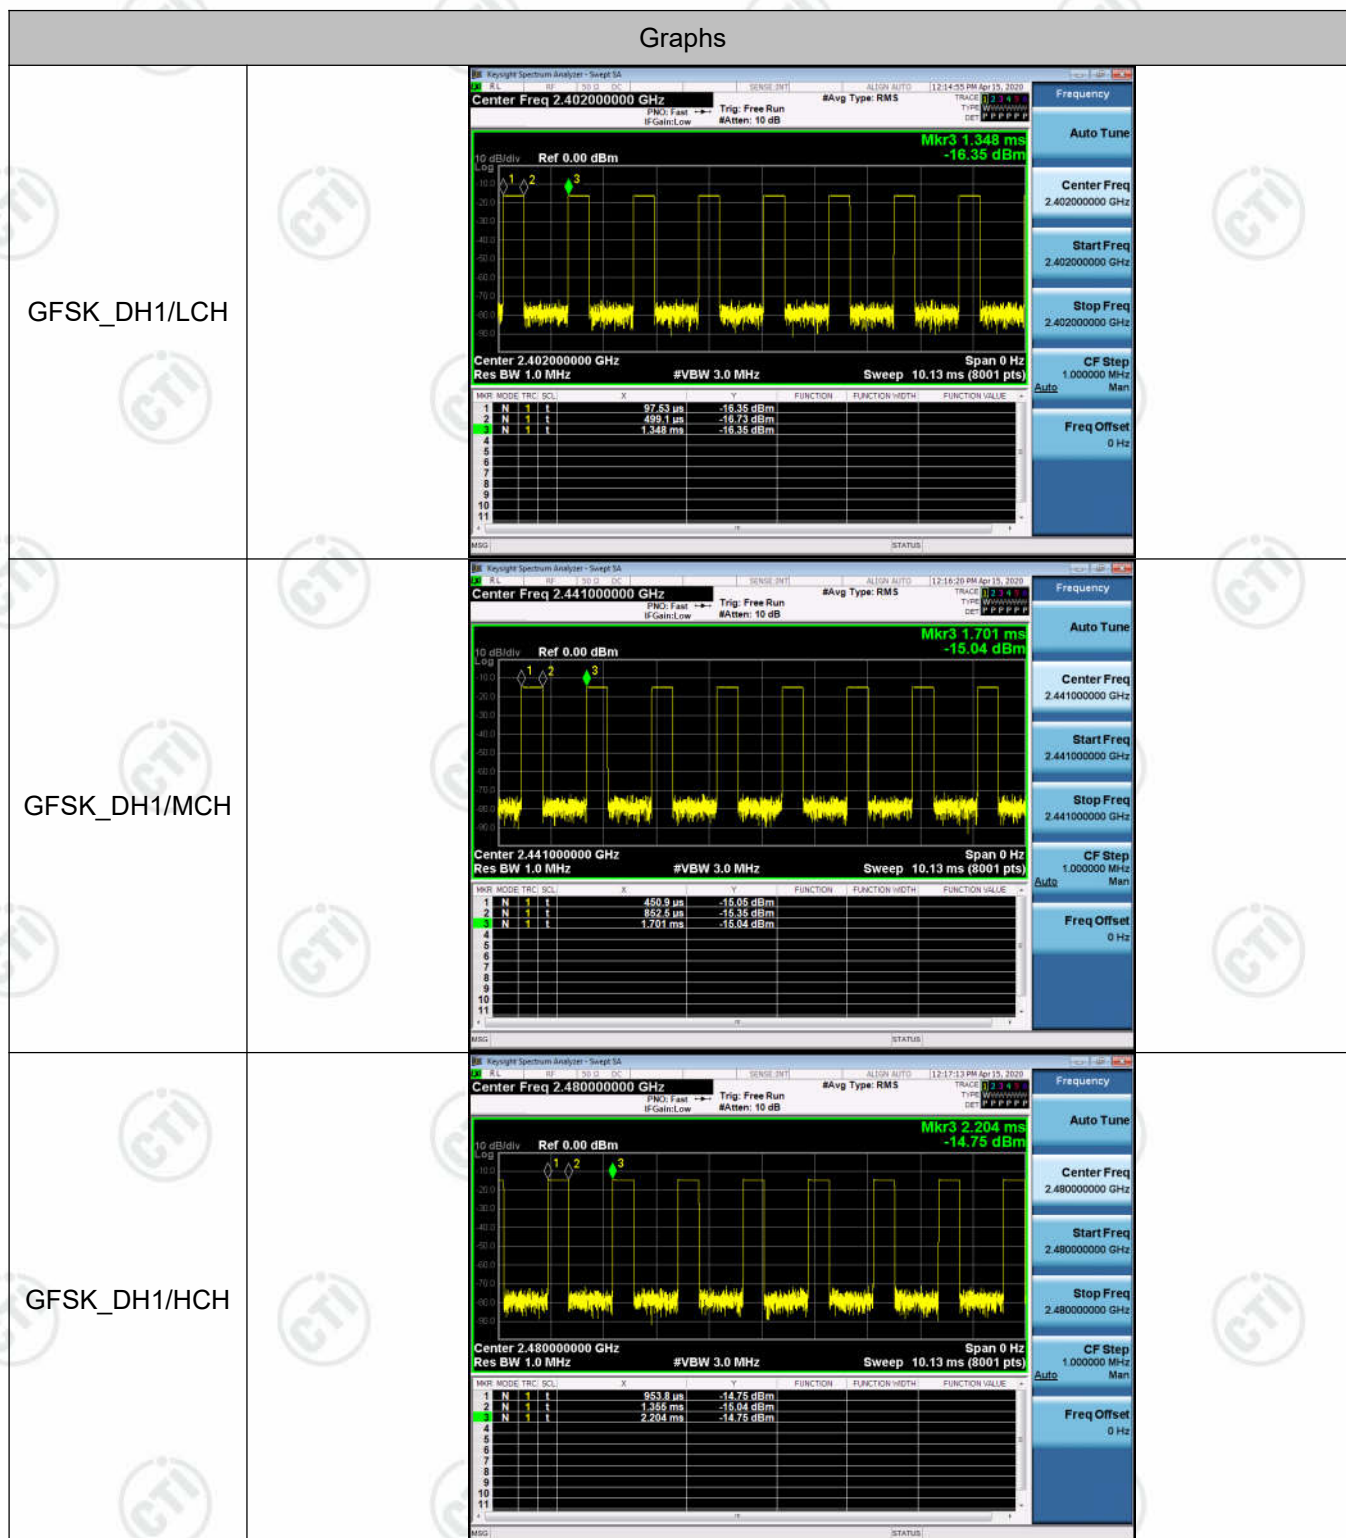

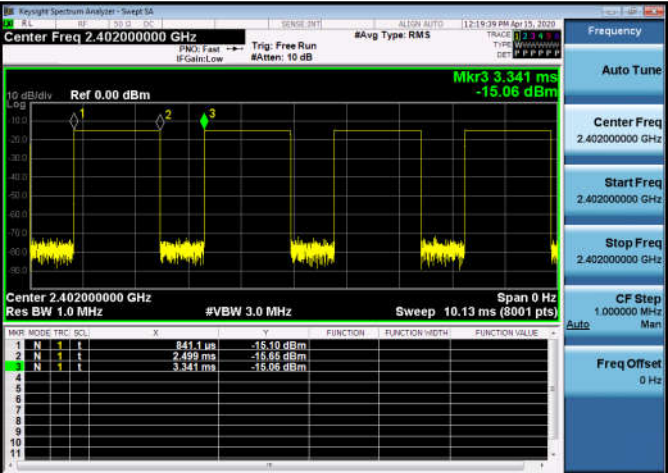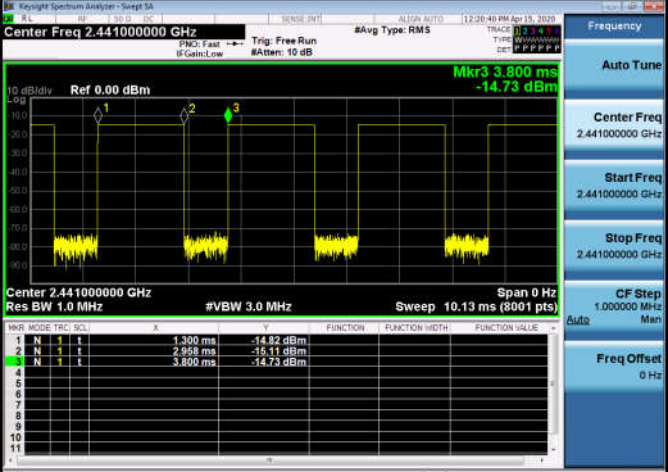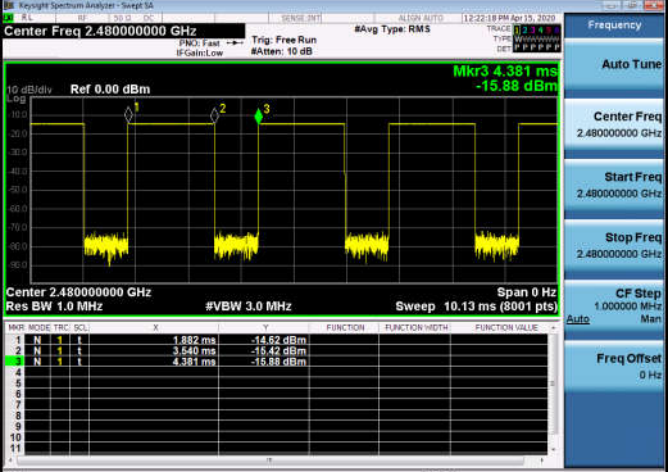GFSK_DH3/LCH	
GFSK_DH3/MCH	
GFSK_DH3/HCH	

GFSK_DH5/LCH	KeySight Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 4.554 ms -15.56 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) Span 0 Hz <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>809.6 μs</td><td>-15.56 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.698 ms</td><td>-15.63 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>4.554 ms</td><td>-15.56 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	809.6 μs	-15.56 dBm				2	N	1	1	3.698 ms	-15.63 dBm				3	N	1	1	4.554 ms	-15.56 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	809.6 μs	-15.56 dBm																																
2	N	1	1	3.698 ms	-15.63 dBm																																
3	N	1	1	4.554 ms	-15.56 dBm																																
GFSK_DH5/MCH	KeySight Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 6.504 ms -15.12 dBm Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) Span 0 Hz <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>2.760 ms</td><td>-15.12 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>6.649 ms</td><td>-15.25 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>6.504 ms</td><td>-15.12 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	2.760 ms	-15.12 dBm				2	N	1	1	6.649 ms	-15.25 dBm				3	N	1	1	6.504 ms	-15.12 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	2.760 ms	-15.12 dBm																																
2	N	1	1	6.649 ms	-15.25 dBm																																
3	N	1	1	6.504 ms	-15.12 dBm																																
GFSK_DH5/HCH	KeySight Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 4.845 ms -14.99 dBm Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) Span 0 Hz <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>781.2 μs</td><td>-14.99 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.609 ms</td><td>-15.26 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>4.845 ms</td><td>-14.99 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	781.2 μs	-14.99 dBm				2	N	1	1	3.609 ms	-15.26 dBm				3	N	1	1	4.845 ms	-14.99 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	781.2 μs	-14.99 dBm																																
2	N	1	1	3.609 ms	-15.26 dBm																																
3	N	1	1	4.845 ms	-14.99 dBm																																

Appendix D): Hopping Channel Number

Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


Test Setup

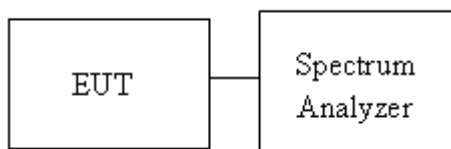

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

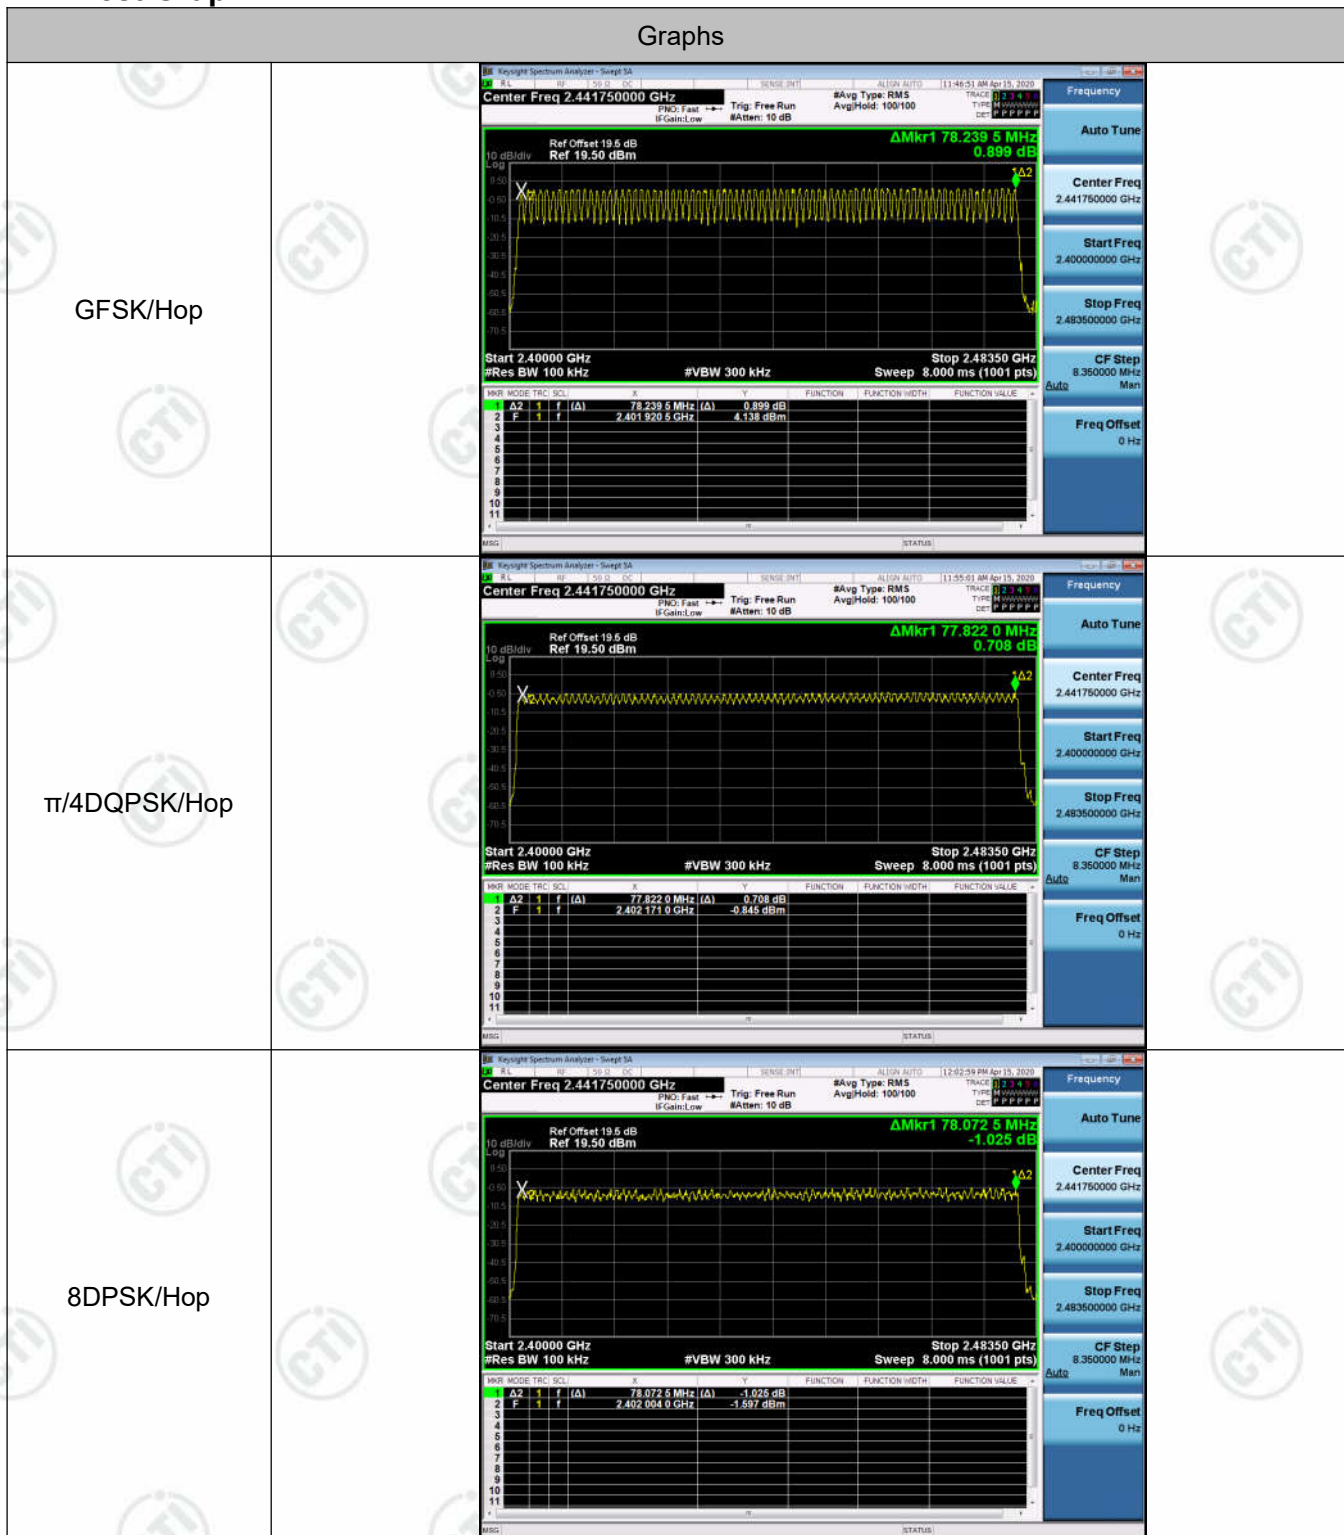

Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

Test Procedure

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows :
 - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - b) RBW > 20 dB bandwidth of the emission being measured.
 - c) VBW ≥ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow trace to stabilize.
 - h) Use the marker-to-peak function to set the marker to the peak of the emission
4. Measure and record the result in the test report.


Test Setup






Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	3.957	PASS
GFSK	MCH	4.656	PASS
GFSK	HCH	4.795	PASS
$\pi/4$ DQPSK	LCH	0.605	PASS
$\pi/4$ DQPSK	MCH	1.285	PASS
$\pi/4$ DQPSK	HCH	1.735	PASS
8DPSK	LCH	1.208	PASS
8DPSK	MCH	1.973	PASS
8DPSK	HCH	2.376	PASS

Test Graph

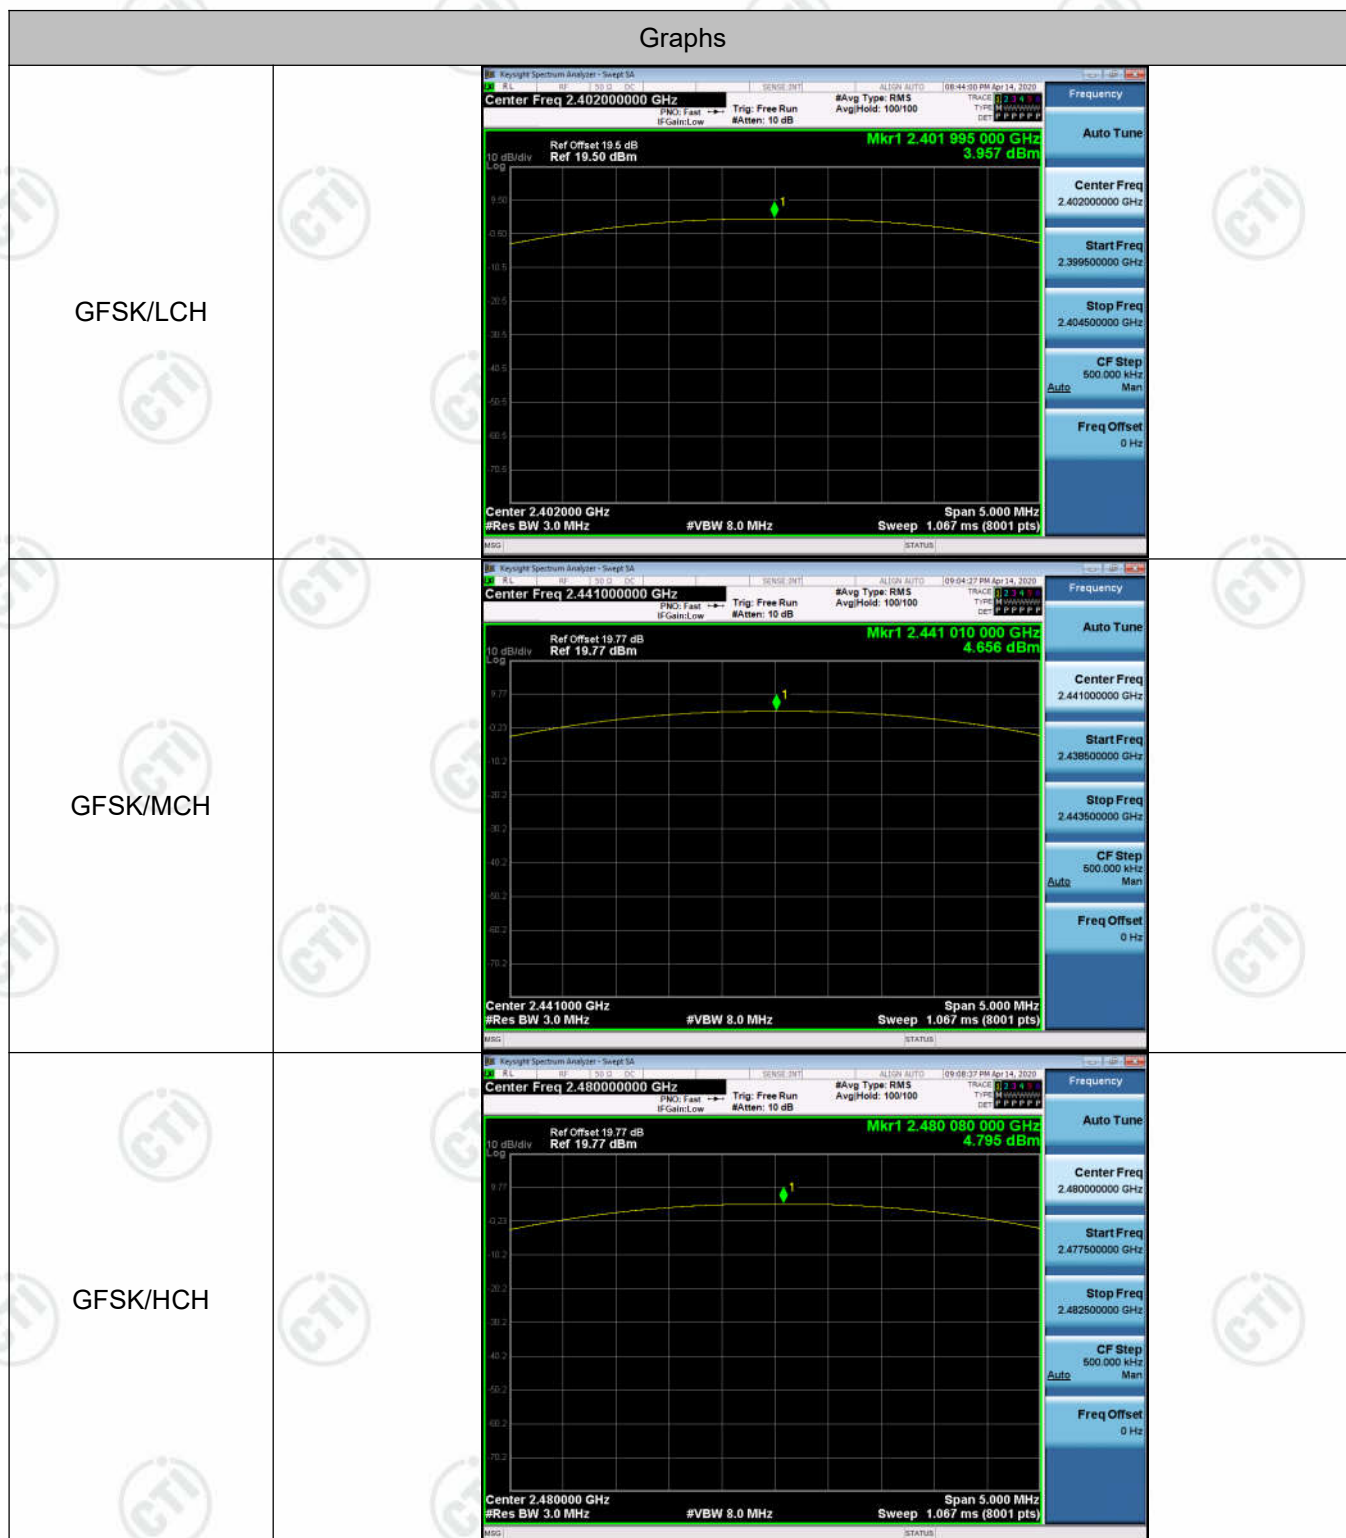

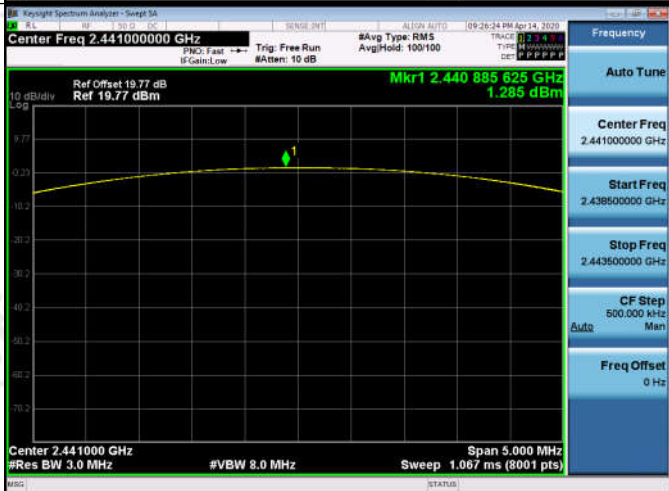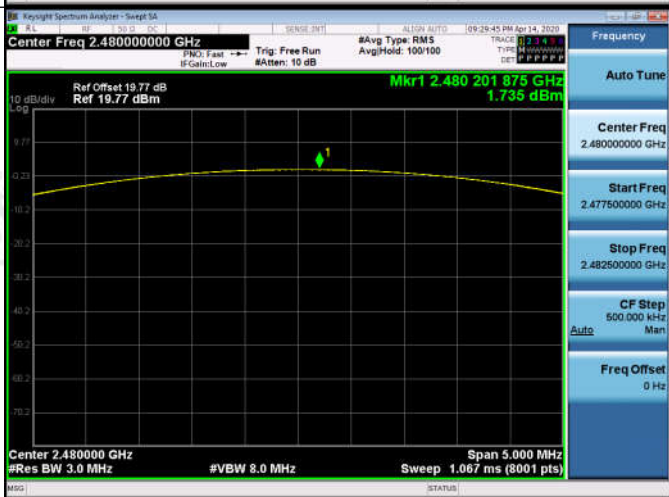$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

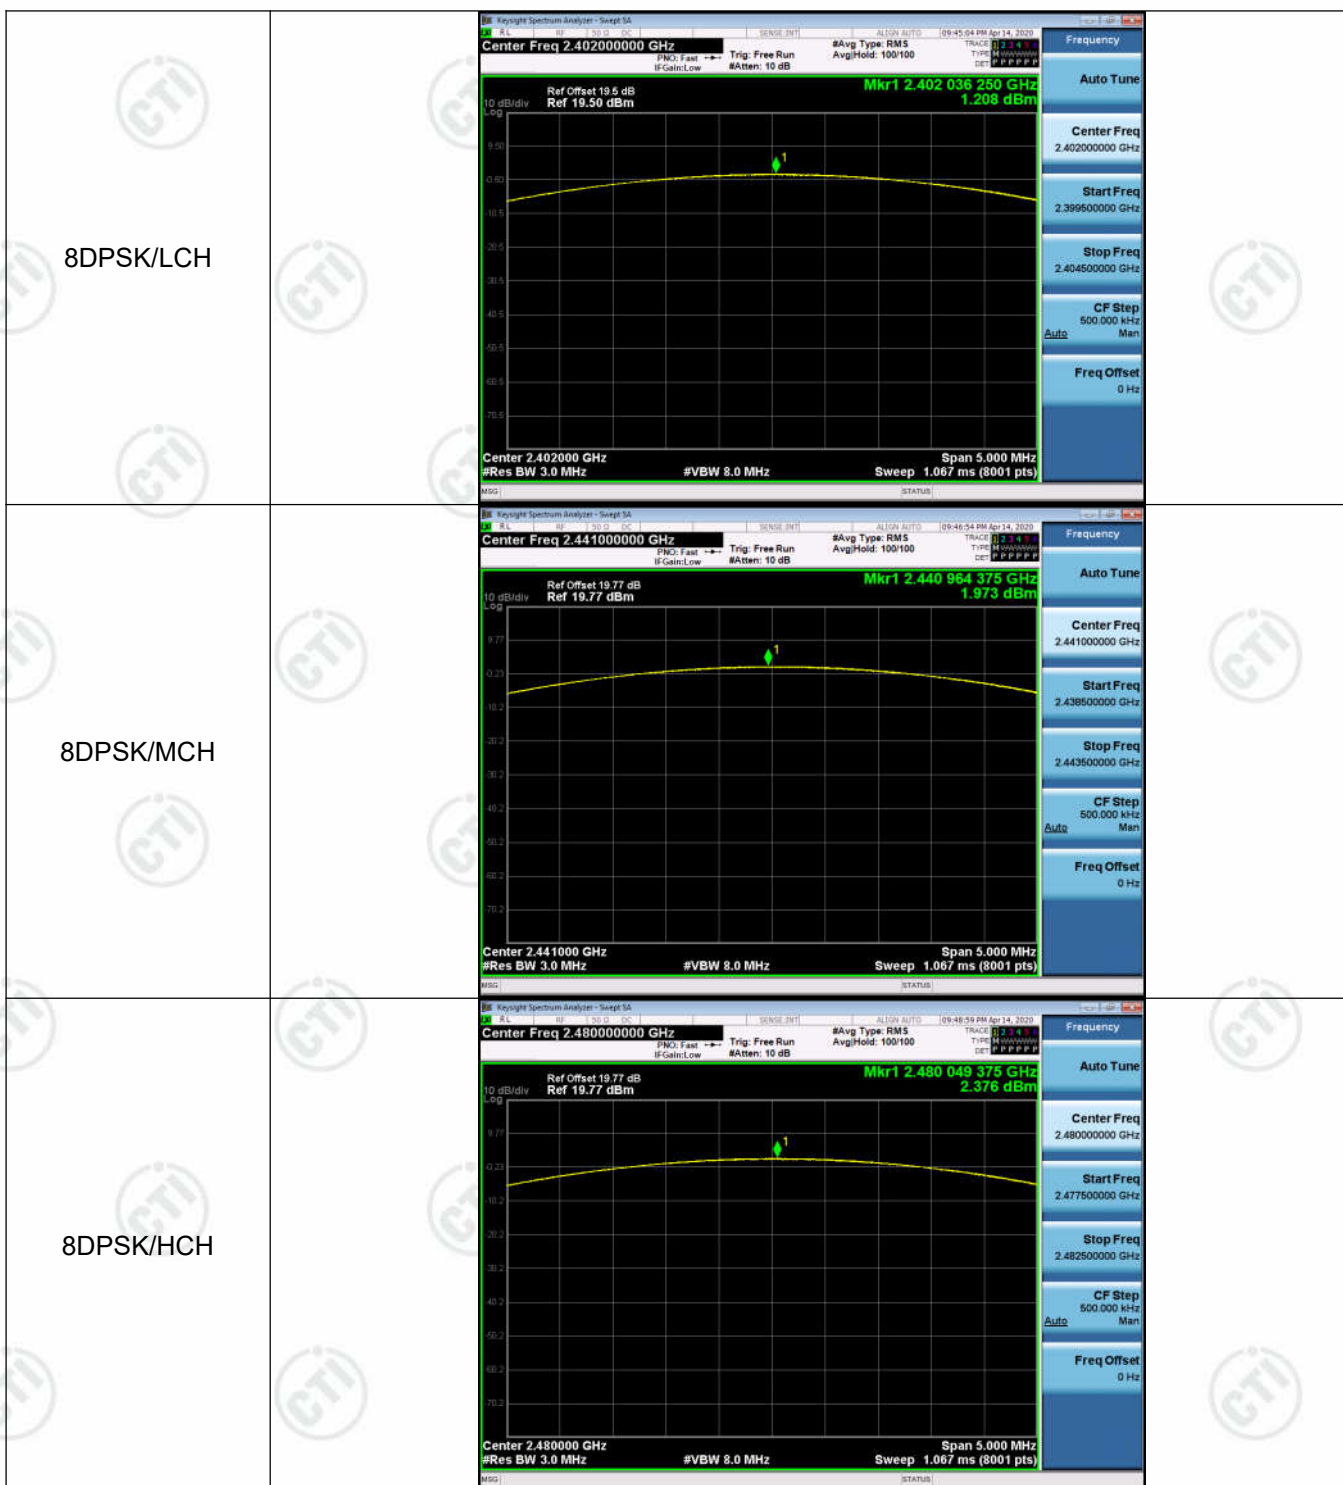

Appendix F): Band-edge for RF Conducted Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


Test Setup







Result Table


Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	3.992	Off	-56.726	-16.01	PASS
			5.192	On	-54.034	-14.81	PASS
GFSK	HCH	2480	4.828	Off	-50.128	-15.17	PASS
			5.659	On	-51.642	-14.34	PASS
$\pi/4$ DQPSK	LCH	2402	-1.639	Off	-59.903	-21.64	PASS
			-1.224	On	-60.069	-21.22	PASS
$\pi/4$ DQPSK	HCH	2480	-0.420	Off	-56.682	-20.42	PASS
			-0.221	On	-57.333	-20.22	PASS
8DPSK	LCH	2402	-1.682	Off	-59.766	-21.68	PASS
			-1.759	On	-59.557	-21.76	PASS
8DPSK	HCH	2480	-0.468	Off	-55.920	-20.47	PASS
			-1.055	On	-58.222	-21.06	PASS

Test Graph

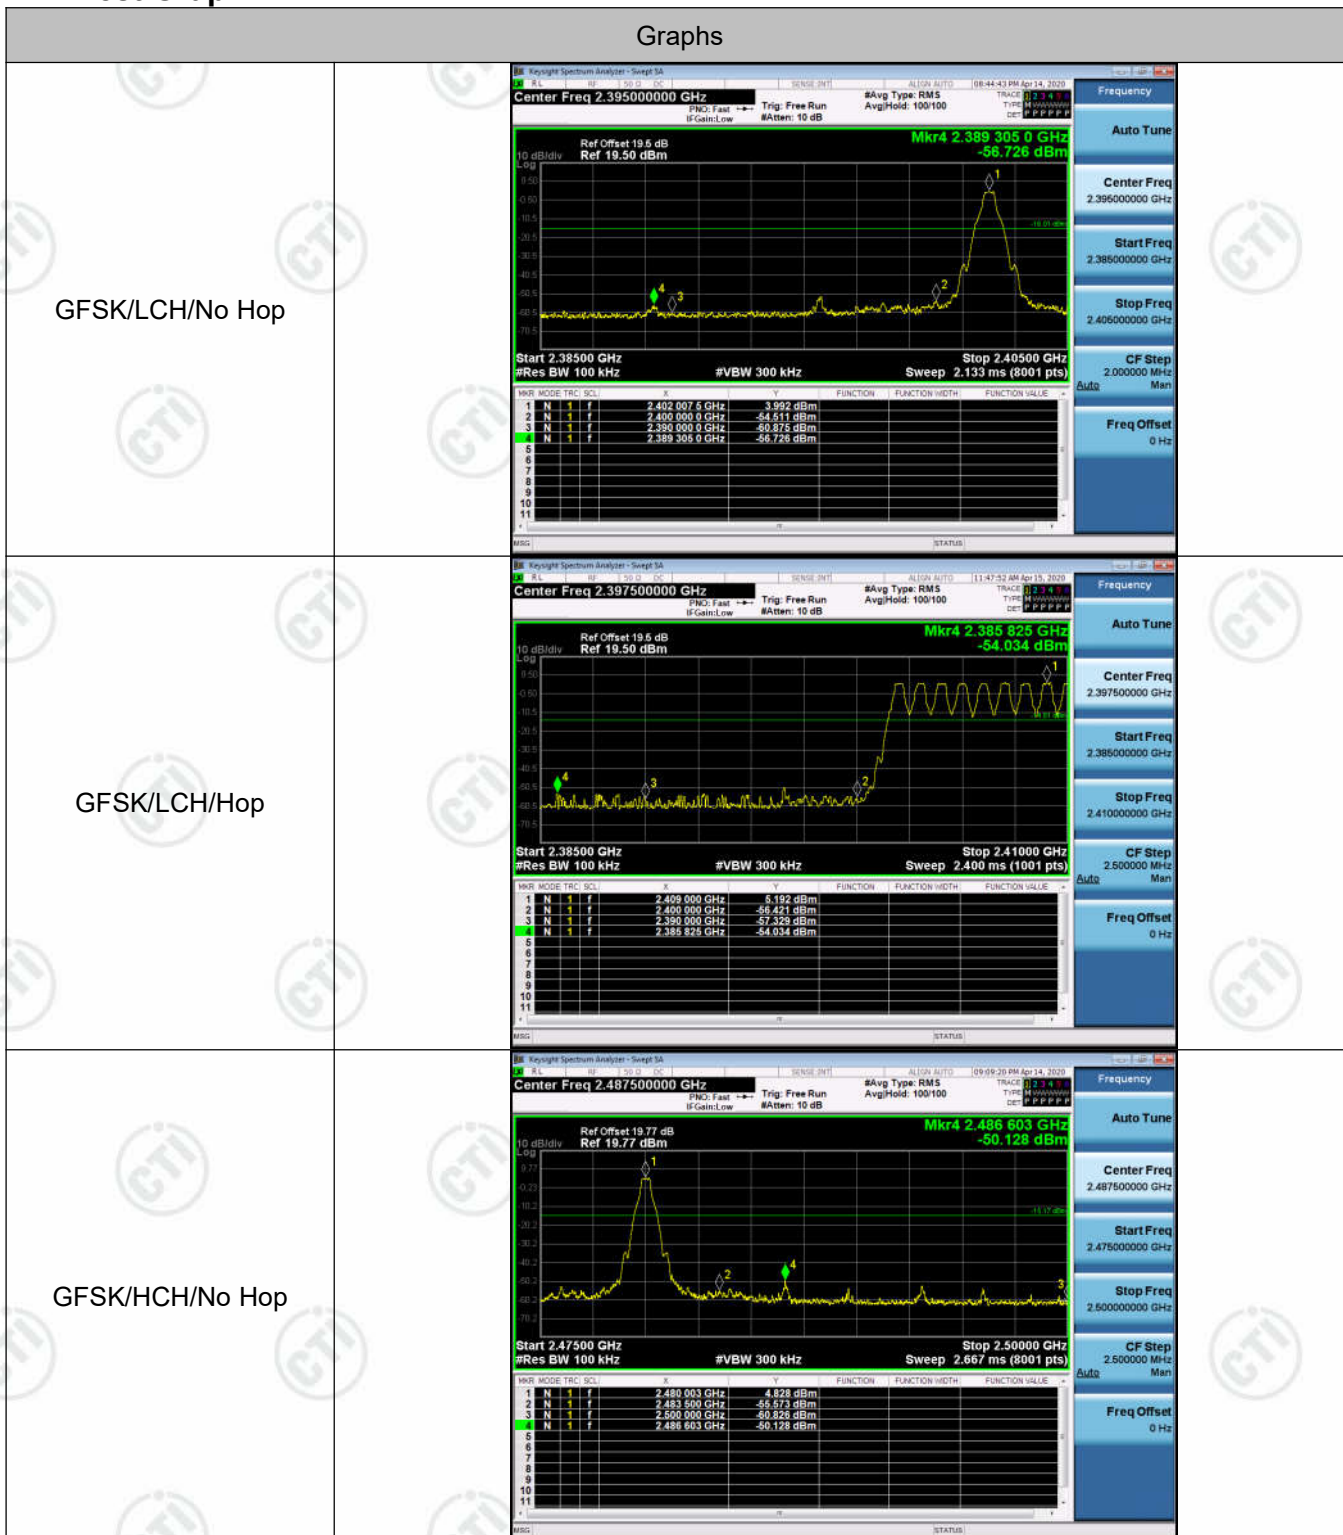

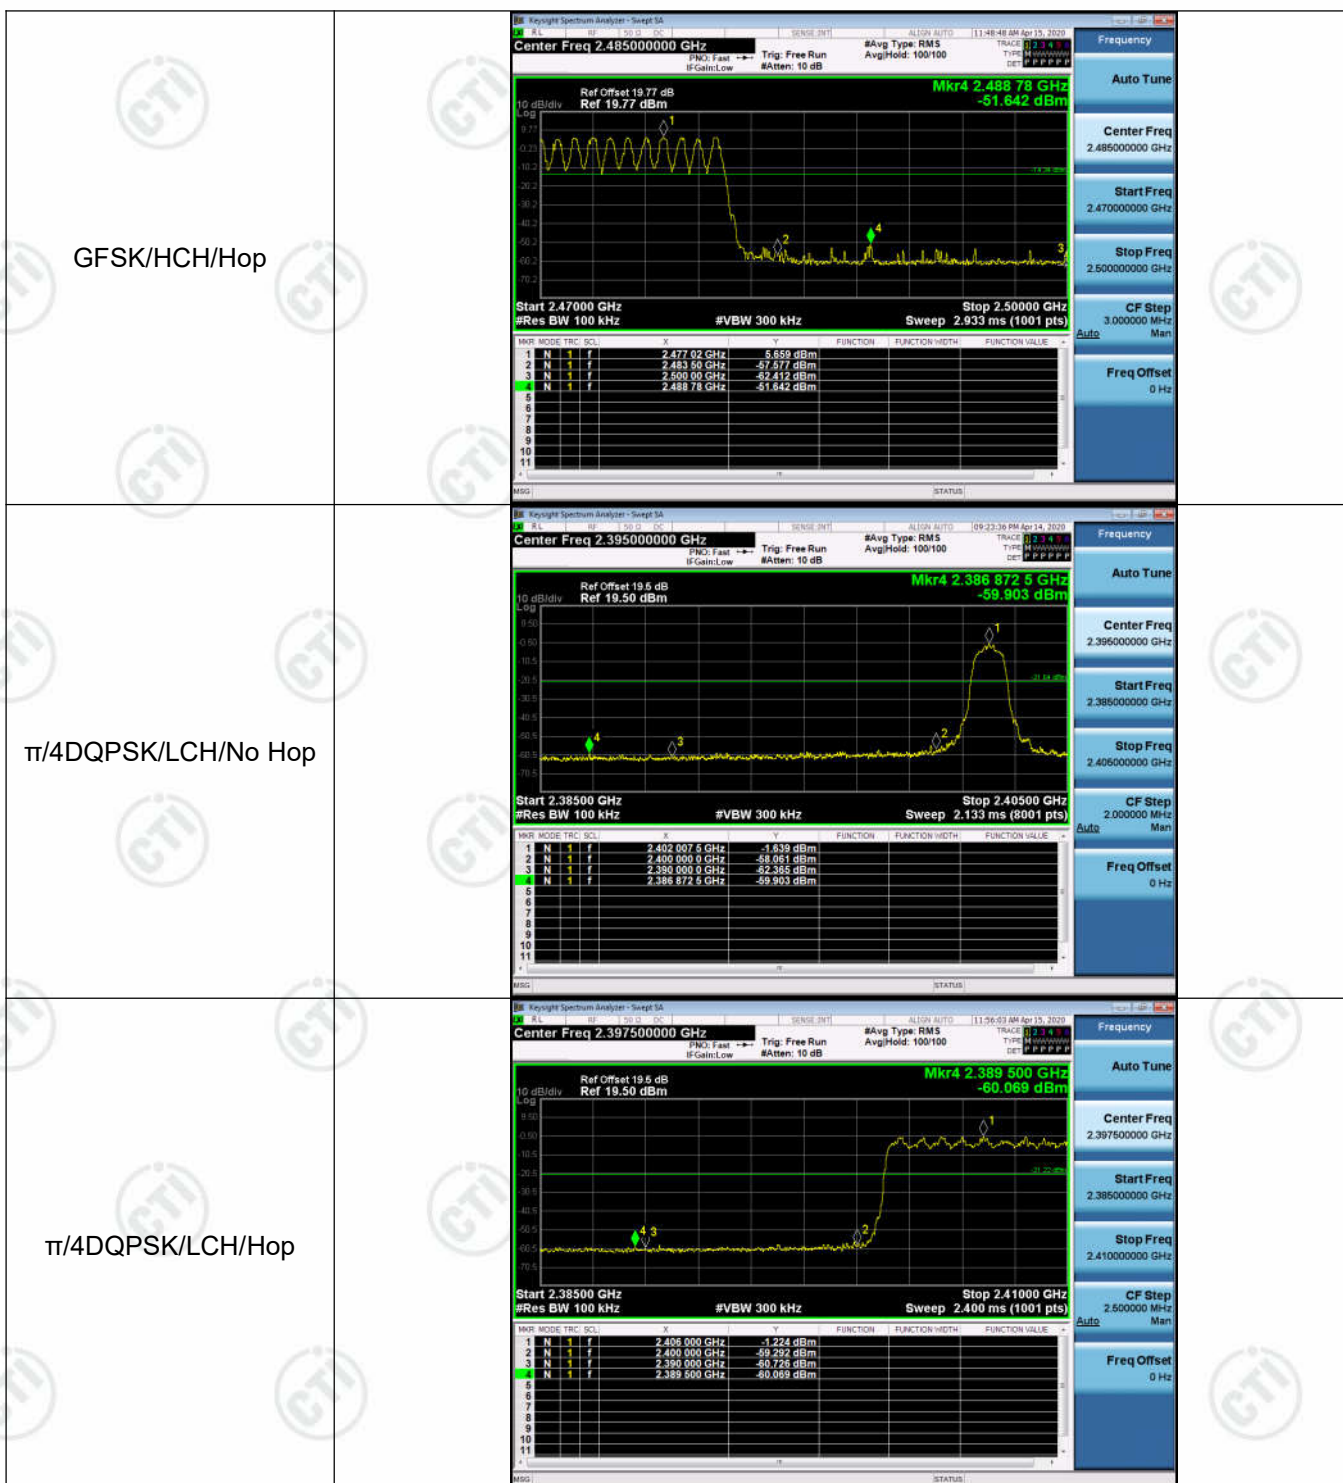

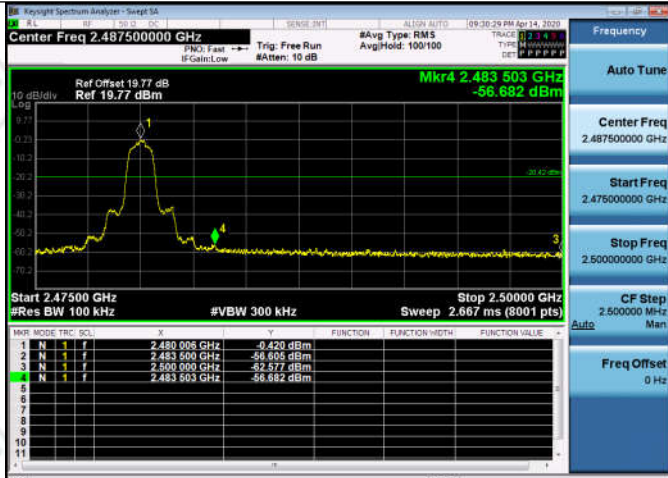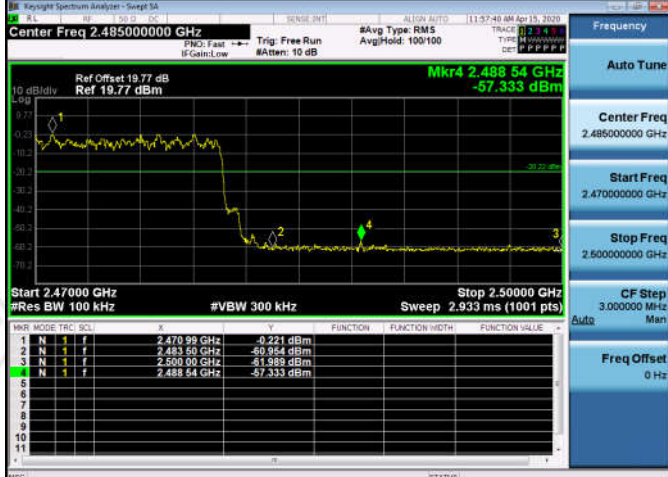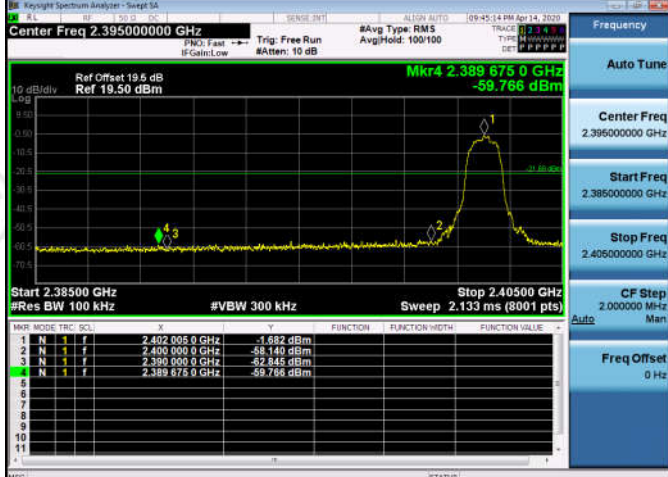$\pi/4$ DQPSK/HCH/No Hop	 Center Freq 2.487500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.483 503 GHz -56.682 dBm Start 2.47500 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION-WIDTH</th><th>FUNCTION-VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 006 GHz</td><td>-0.420 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-56.605 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-52.577 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483 503 GHz</td><td>-56.682 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-WIDTH	FUNCTION-VALUE	1	N	1	f	2.480 006 GHz	-0.420 dBm				2	N	1	f	2.483 500 GHz	-56.605 dBm				3	N	1	f	2.500 000 GHz	-52.577 dBm				4	N	1	f	2.483 503 GHz	-56.682 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-WIDTH	FUNCTION-VALUE																																						
1	N	1	f	2.480 006 GHz	-0.420 dBm																																									
2	N	1	f	2.483 500 GHz	-56.605 dBm																																									
3	N	1	f	2.500 000 GHz	-52.577 dBm																																									
4	N	1	f	2.483 503 GHz	-56.682 dBm																																									
$\pi/4$ DQPSK/HCH/Hop	 Center Freq 2.485000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.488 54 GHz -57.333 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.933 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION-WIDTH</th><th>FUNCTION-VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.470 99 GHz</td><td>-0.221 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.480 50 GHz</td><td>-50.854 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-51.889 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488 54 GHz</td><td>-57.333 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-WIDTH	FUNCTION-VALUE	1	N	1	f	2.470 99 GHz	-0.221 dBm				2	N	1	f	2.480 50 GHz	-50.854 dBm				3	N	1	f	2.500 00 GHz	-51.889 dBm				4	N	1	f	2.488 54 GHz	-57.333 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-WIDTH	FUNCTION-VALUE																																						
1	N	1	f	2.470 99 GHz	-0.221 dBm																																									
2	N	1	f	2.480 50 GHz	-50.854 dBm																																									
3	N	1	f	2.500 00 GHz	-51.889 dBm																																									
4	N	1	f	2.488 54 GHz	-57.333 dBm																																									
8DPSK/LCH/No Hop	 Center Freq 2.395000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr4 2.389 675 0 GHz -59.766 dBm Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40500 GHz Sweep 2.133 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION-WIDTH</th><th>FUNCTION-VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 005 0 GHz</td><td>-1.482 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-58.140 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td>-52.845 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 675 0 GHz</td><td>-59.766 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-WIDTH	FUNCTION-VALUE	1	N	1	f	2.402 005 0 GHz	-1.482 dBm				2	N	1	f	2.400 000 0 GHz	-58.140 dBm				3	N	1	f	2.390 000 0 GHz	-52.845 dBm				4	N	1	f	2.389 675 0 GHz	-59.766 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-WIDTH	FUNCTION-VALUE																																						
1	N	1	f	2.402 005 0 GHz	-1.482 dBm																																									
2	N	1	f	2.400 000 0 GHz	-58.140 dBm																																									
3	N	1	f	2.390 000 0 GHz	-52.845 dBm																																									
4	N	1	f	2.389 675 0 GHz	-59.766 dBm																																									

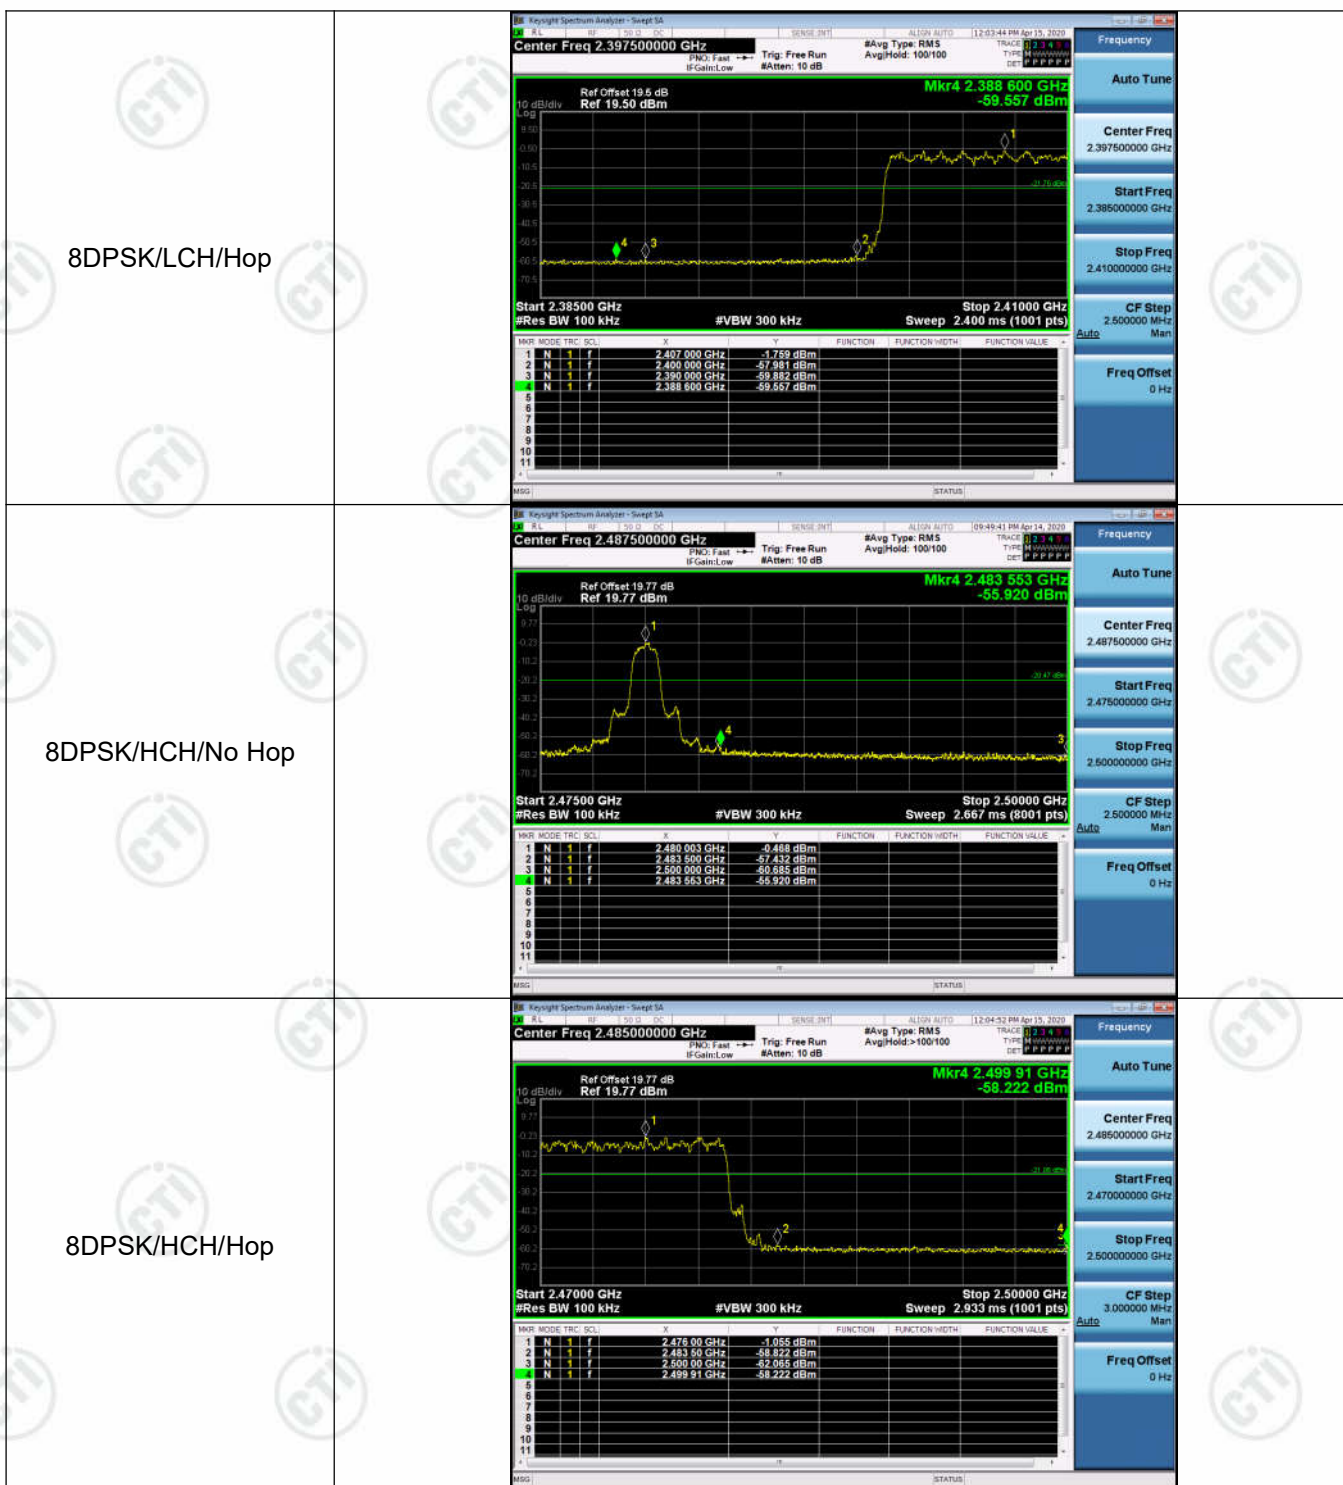

Appendix G): RF Conducted Spurious Emissions


Test Limit
According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.


Test Setup



Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	3.922	<Limit	PASS
GFSK	MCH	4.636	<Limit	PASS
GFSK	HCH	4.774	<Limit	PASS
$\pi/4$ DQPSK	LCH	-1.707	<Limit	PASS
$\pi/4$ DQPSK	MCH	-0.983	<Limit	PASS
$\pi/4$ DQPSK	HCH	-0.47	<Limit	PASS
8DPSK	LCH	-1.741	<Limit	PASS
8DPSK	MCH	-1.011	<Limit	PASS
8DPSK	HCH	-0.504	<Limit	PASS


Test Graph

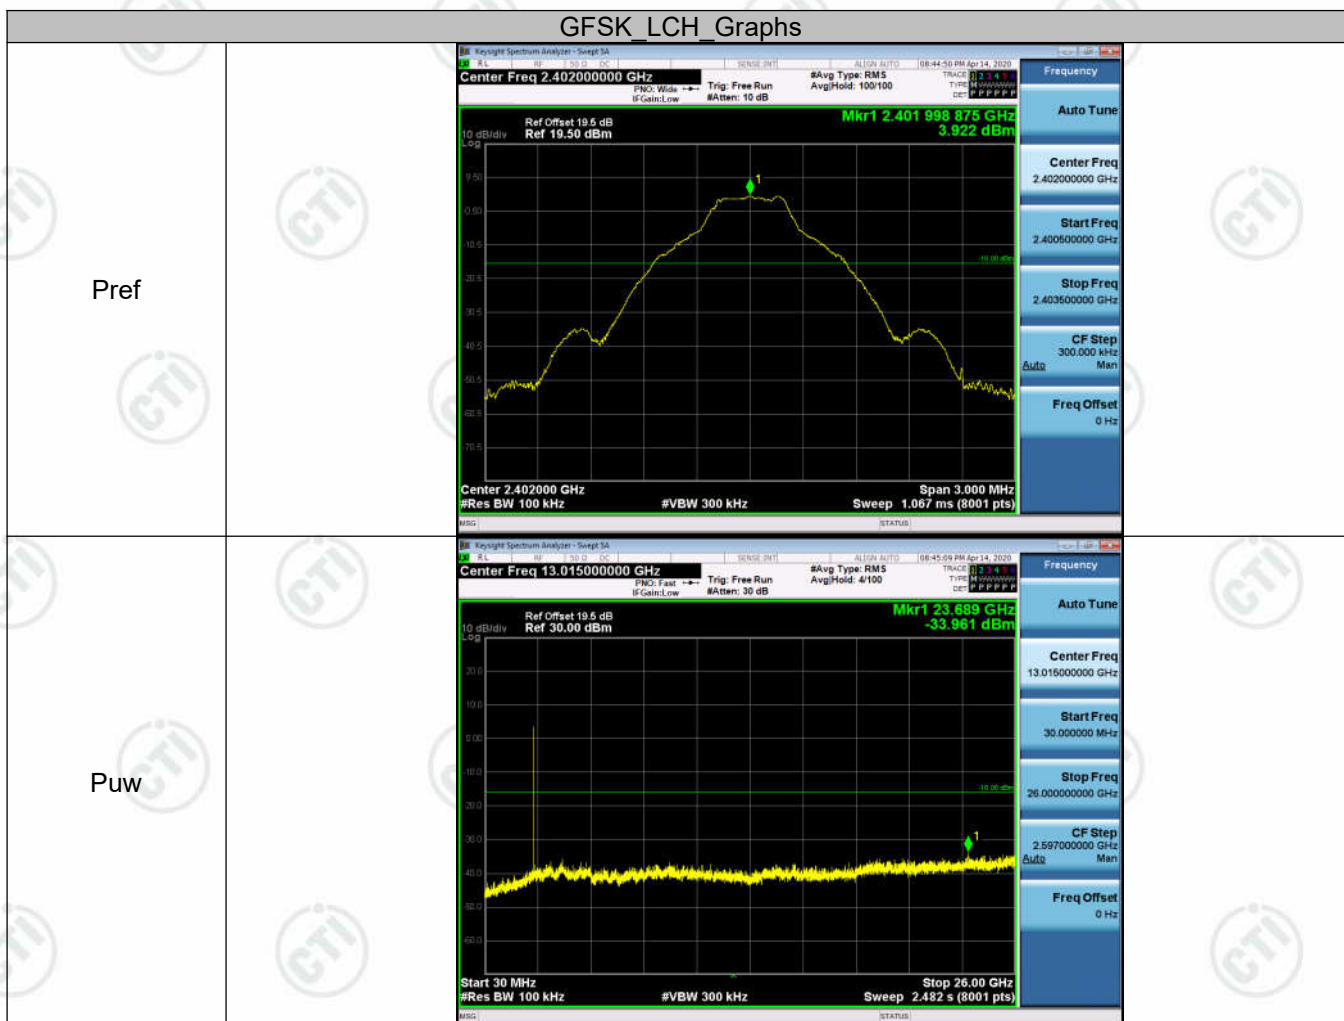






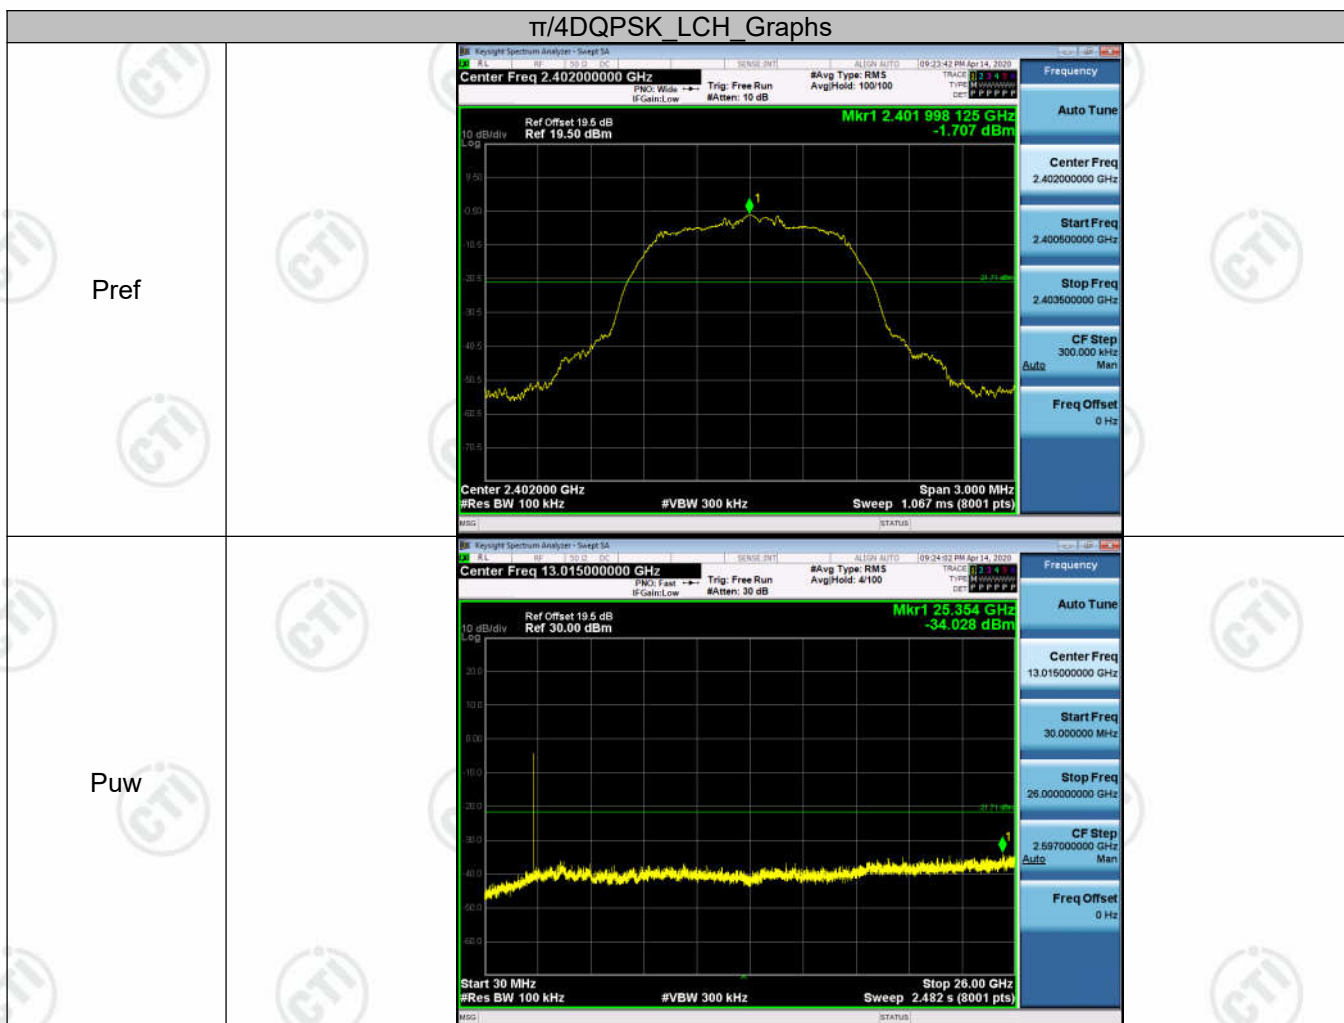


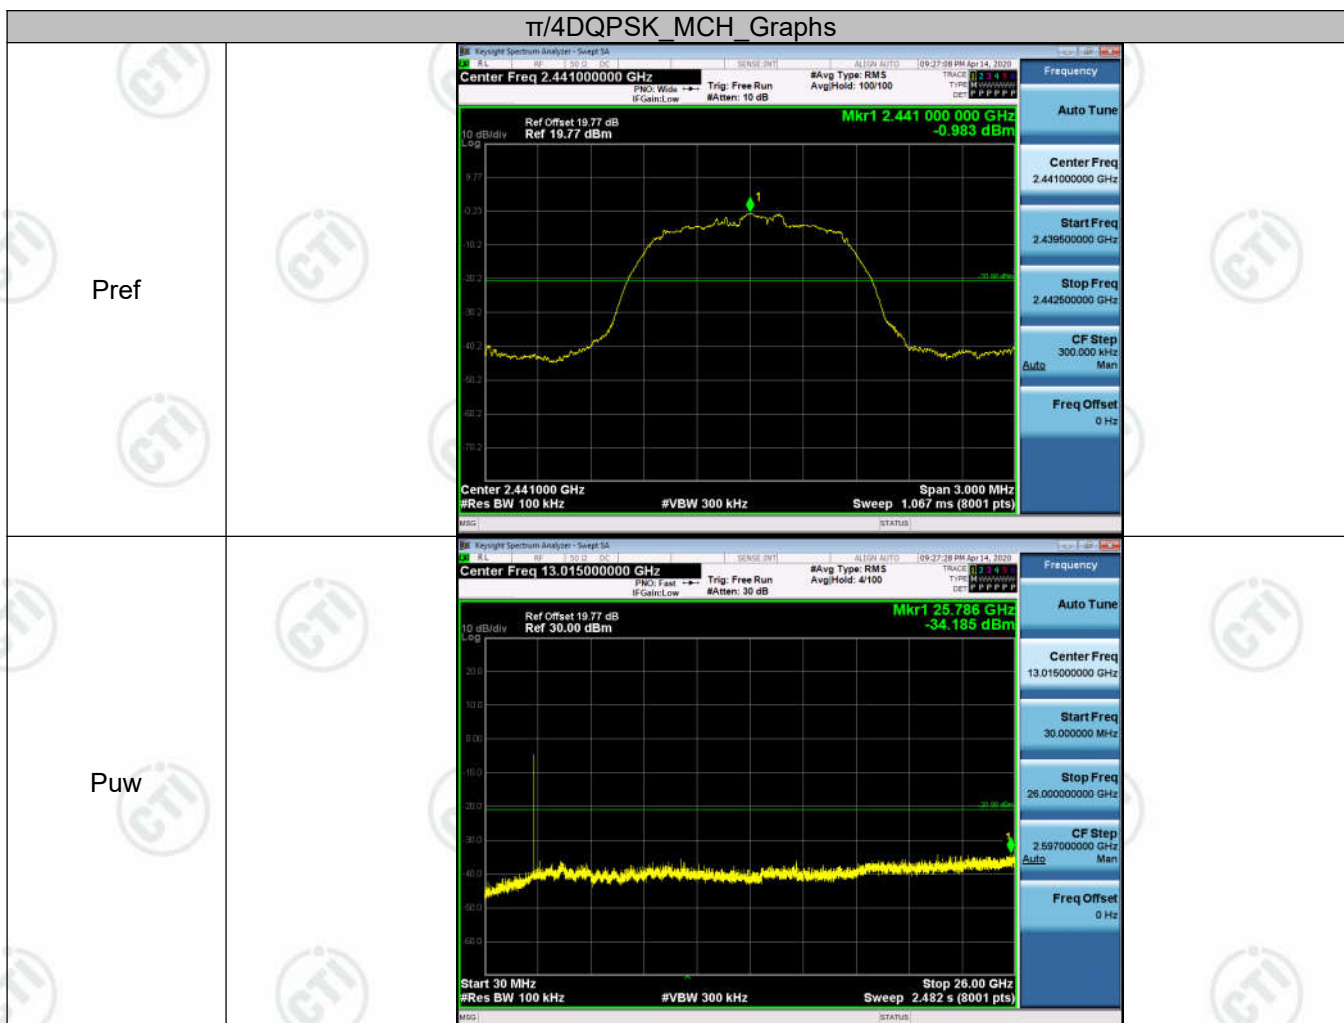

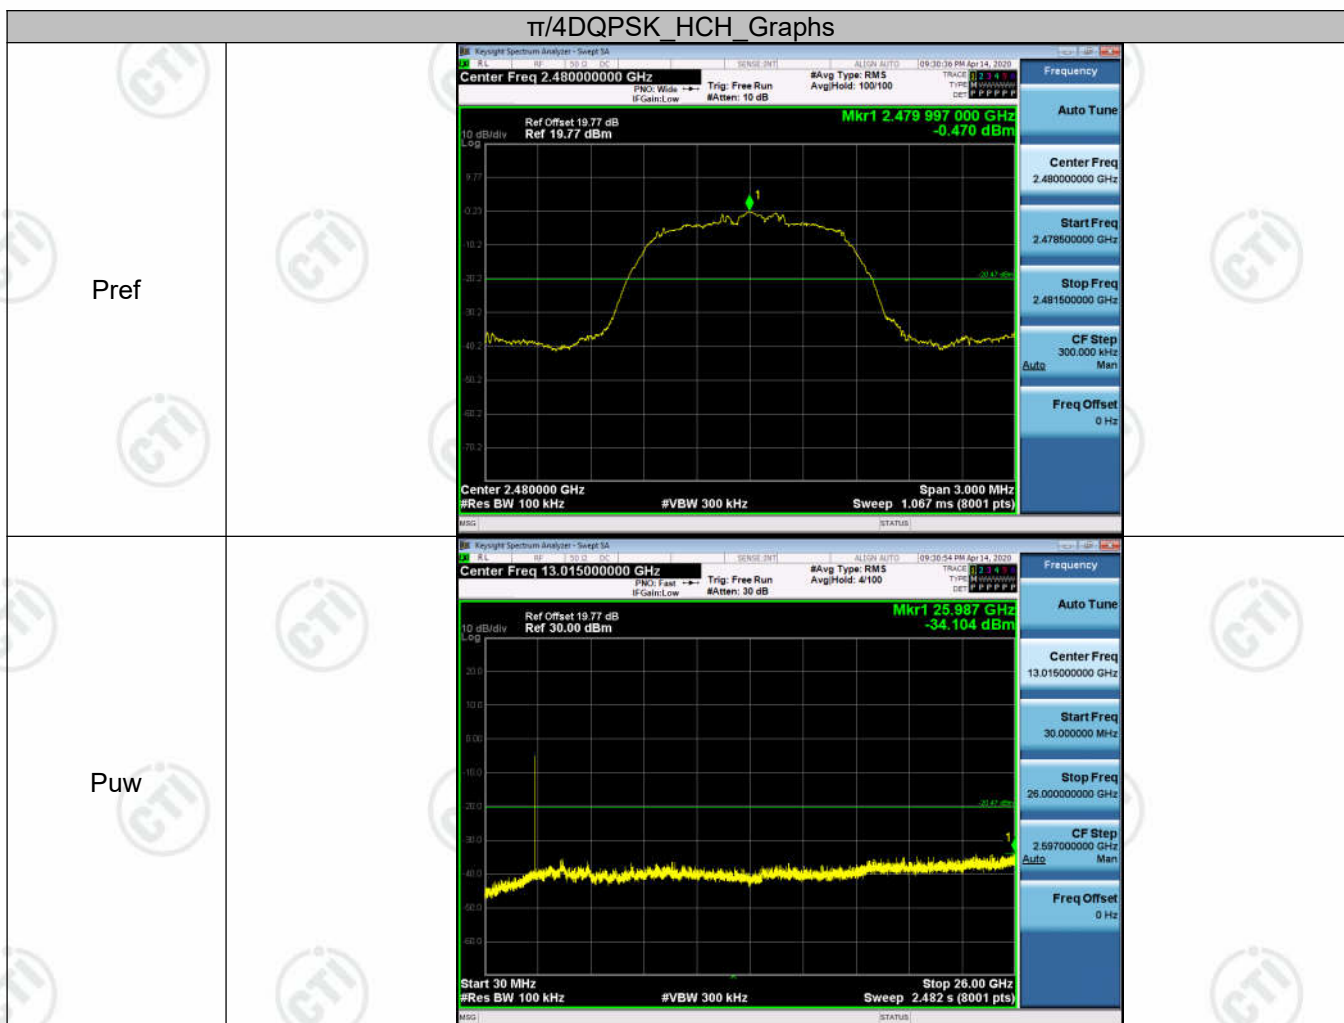





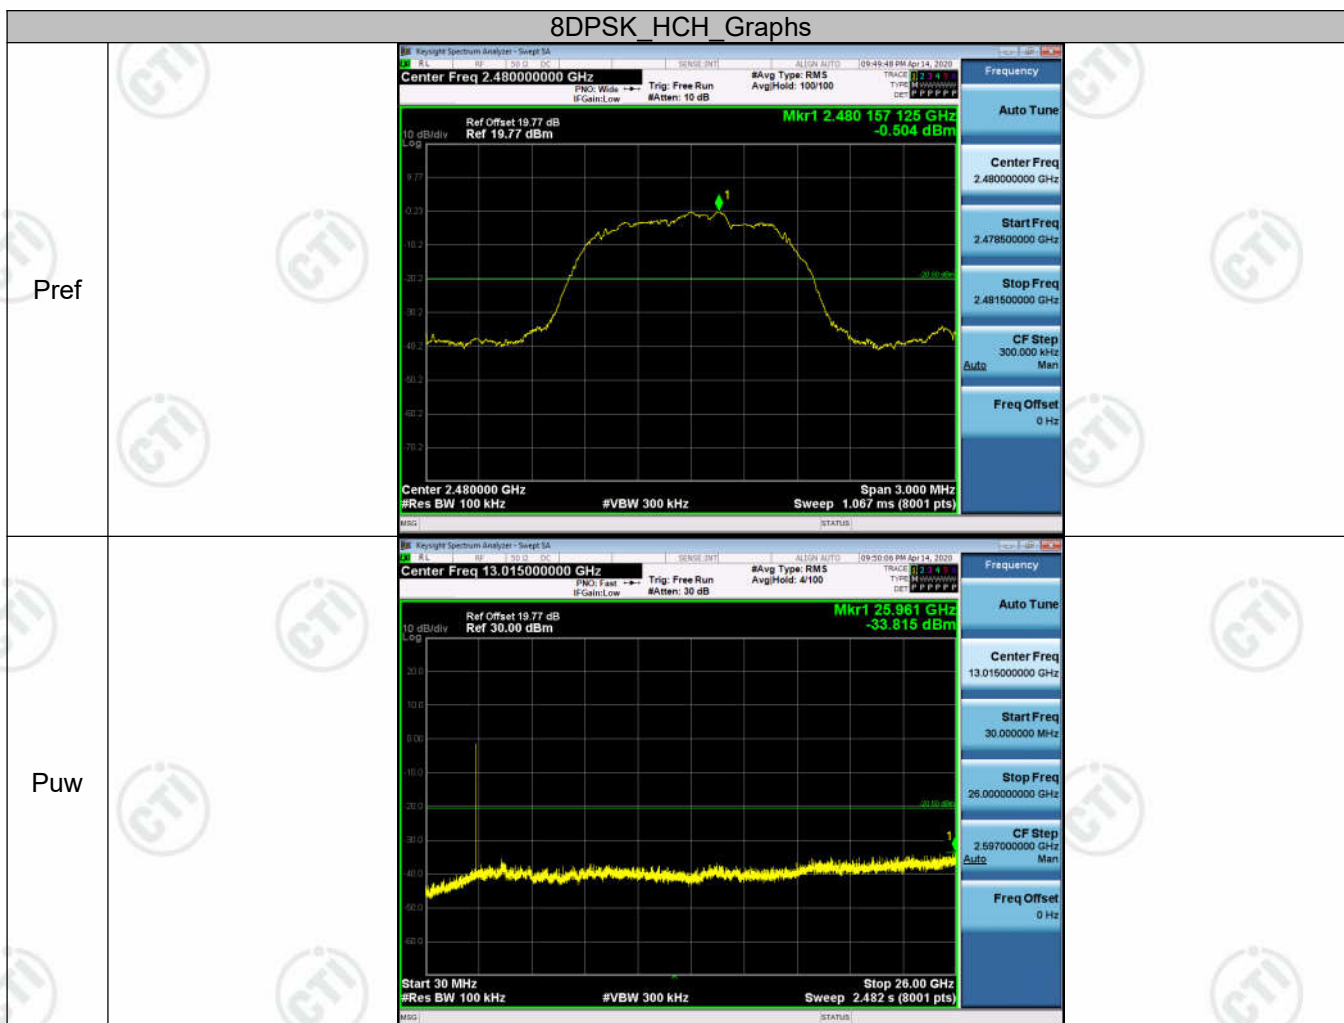

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

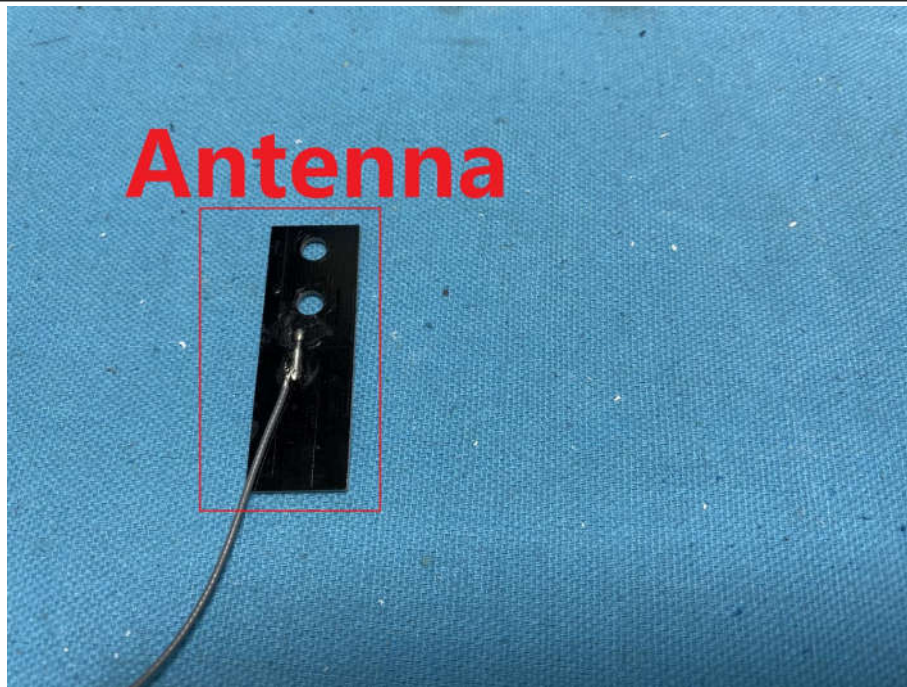

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2 dBi.

Appendix J): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Product : VisionScreener
Temperature : 24°C


Model/Type reference : CVS-1
Humidity : 52%

Live line:

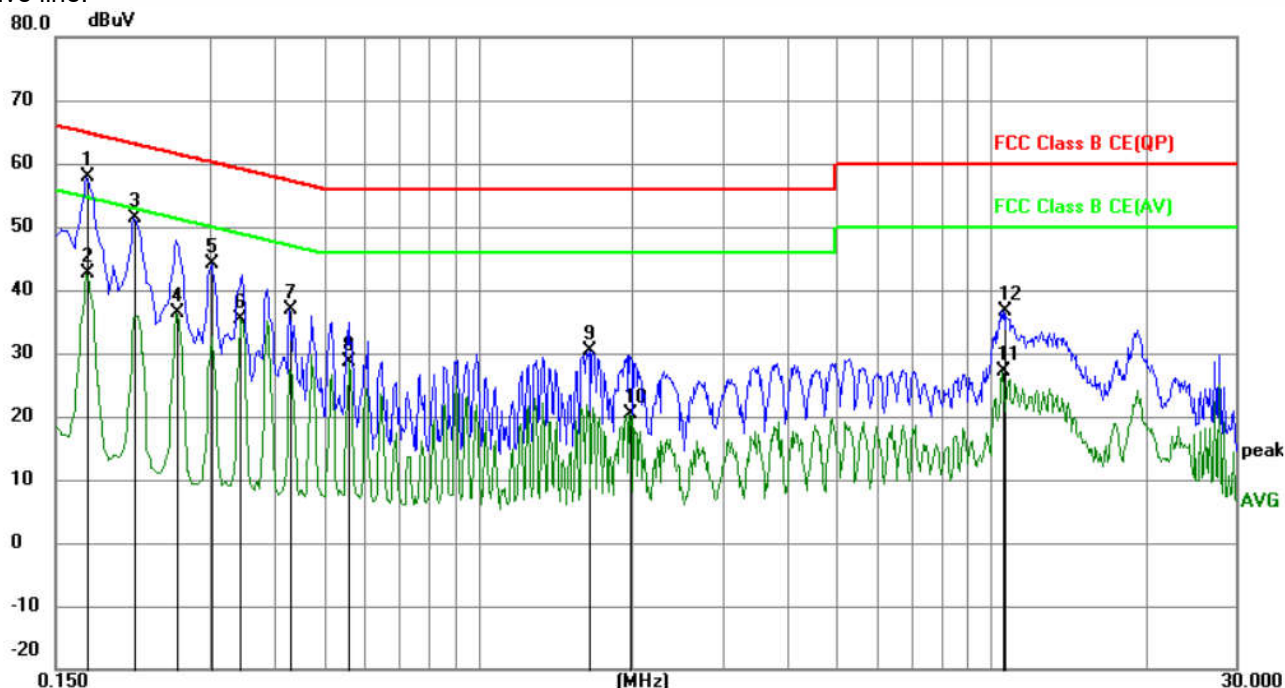

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1725	47.90	10.00	57.90	64.84	-6.94	QP	
2		0.1725	32.57	10.00	42.57	54.84	-12.27	AVG	
3		0.2130	41.38	10.03	51.41	63.09	-11.68	QP	
4		0.2580	26.35	10.07	36.42	51.50	-15.08	AVG	
5		0.3030	34.03	10.10	44.13	60.16	-16.03	QP	
6		0.3435	25.22	10.06	35.28	49.12	-13.84	AVG	
7		0.4290	26.76	10.00	36.76	57.27	-20.51	QP	
8		0.5595	18.62	10.07	28.69	46.00	-17.31	AVG	
9		1.6485	20.52	9.86	30.38	56.00	-25.62	QP	
10		1.9770	10.64	9.83	20.47	46.00	-25.53	AVG	
11		10.5090	17.11	9.96	27.07	50.00	-22.93	AVG	
12		10.5675	26.74	9.96	36.70	60.00	-23.30	QP	

Neutral line:

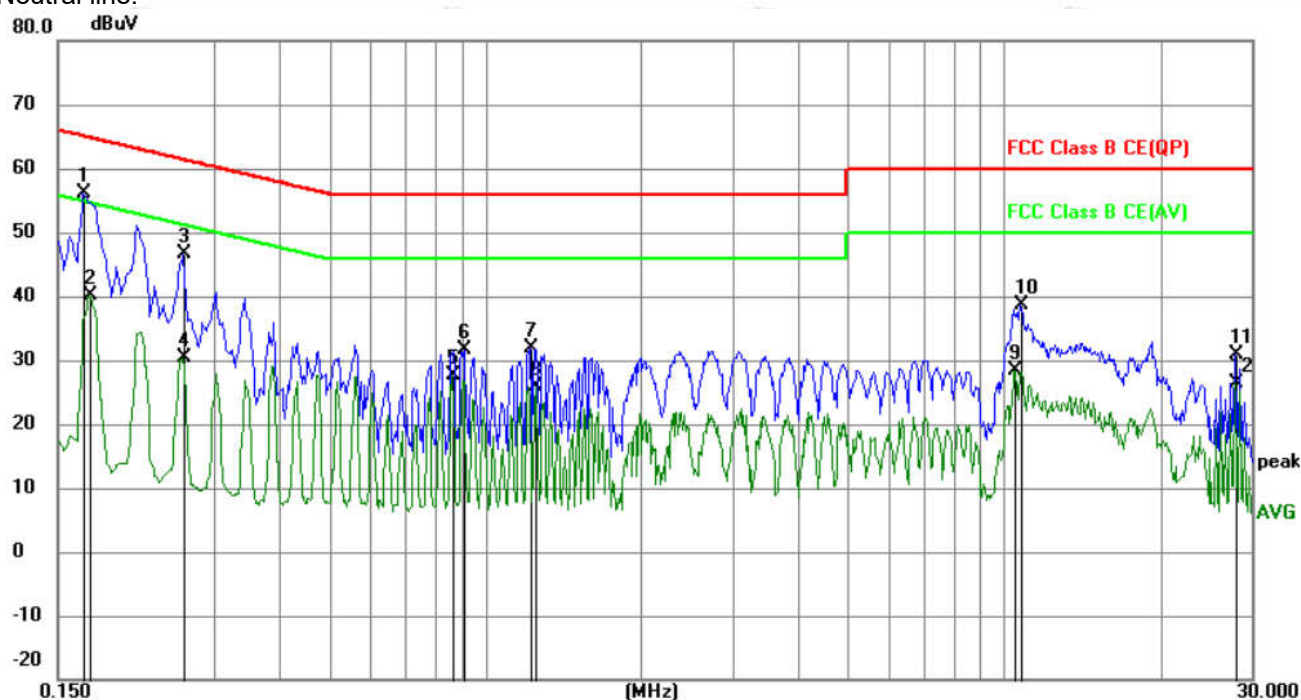

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1680	46.14	9.99	56.13	65.06	-8.93	QP	
2		0.1725	30.22	10.00	40.22	54.84	-14.62	AVG	
3		0.2625	36.58	10.07	46.65	61.35	-14.70	QP	
4		0.2625	20.22	10.07	30.29	51.35	-21.06	AVG	
5		0.8655	17.64	9.92	27.56	46.00	-18.44	AVG	
6		0.9105	21.72	9.92	31.64	56.00	-24.36	QP	
7		1.2164	21.87	9.89	31.76	56.00	-24.24	QP	
8		1.2525	16.00	9.89	25.89	46.00	-20.11	AVG	
9		10.4819	18.48	9.96	28.44	50.00	-21.56	AVG	
10		10.7745	28.62	9.96	38.58	60.00	-21.42	QP	
11		27.9870	20.94	9.97	30.91	60.00	-29.09	QP	
12		27.9870	16.51	9.97	26.48	50.00	-23.52	AVG	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

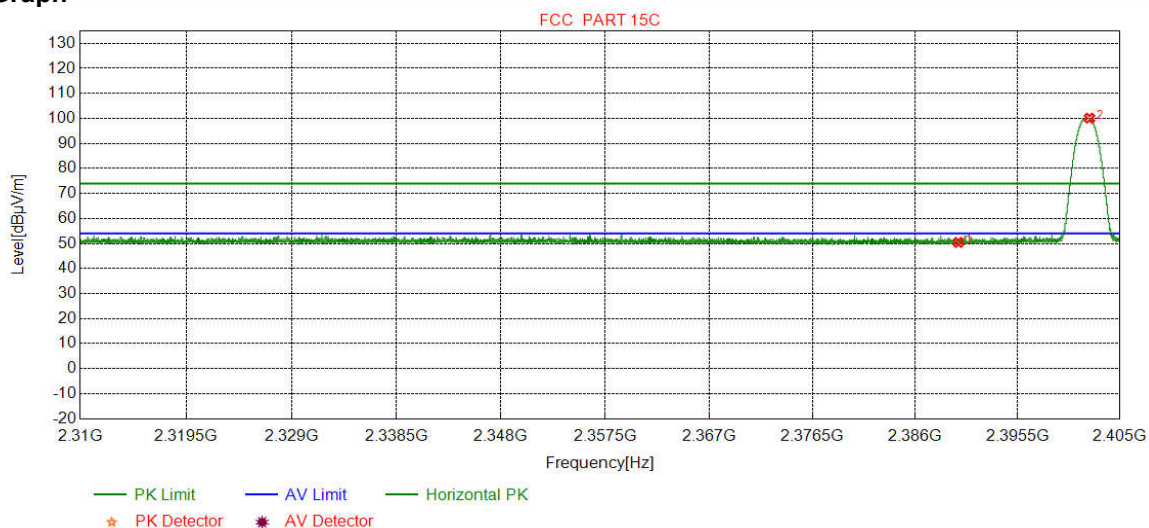

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.92	50.42	74.00	23.58	Pass	Horizontal
2	2402.1751	32.26	13.31	-43.12	97.64	100.09	74.00	-26.09	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

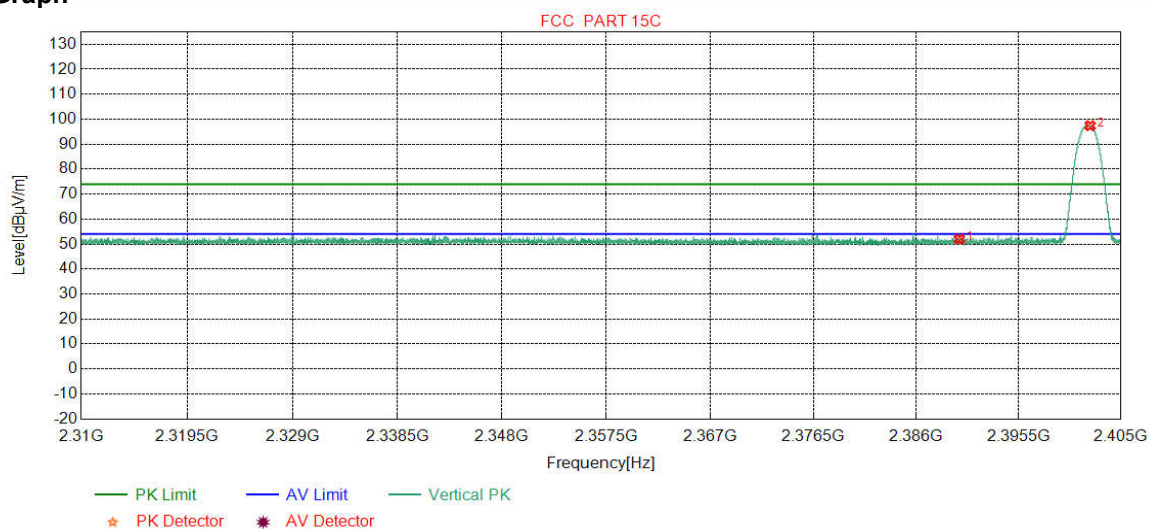

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.46	51.96	74.00	22.04	Pass	Vertical
2	2402.1498	32.26	13.31	-43.12	94.94	97.39	74.00	-23.39	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

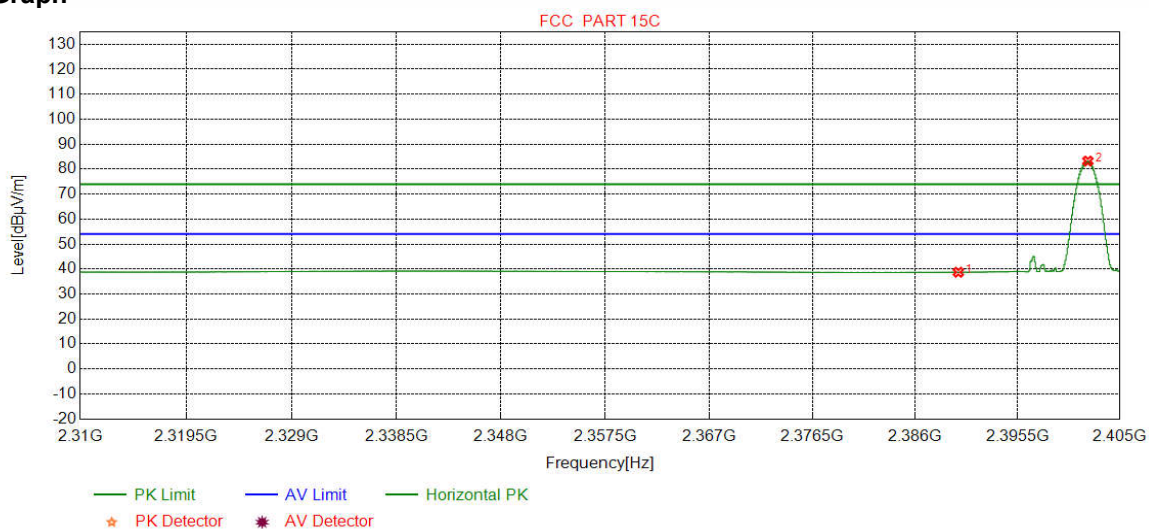

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.22	38.72	54.00	15.28	Pass	Horizontal
2	2402.0295	32.26	13.31	-43.12	80.79	83.24	54.00	-29.24	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

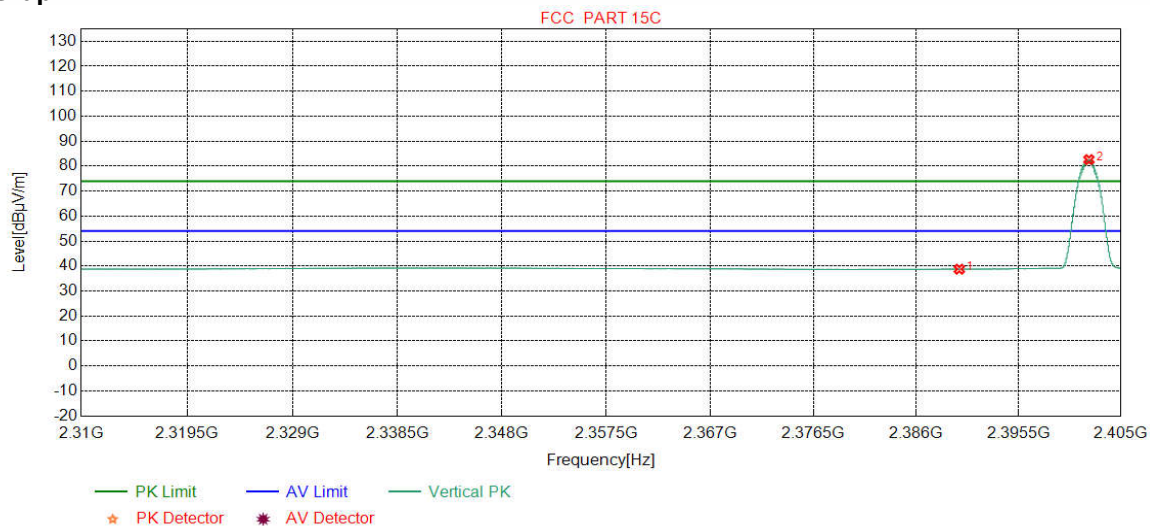

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.24	38.74	54.00	15.26	Pass	Vertical
2	2402.0358	32.26	13.31	-43.12	80.17	82.62	54.00	-28.62	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

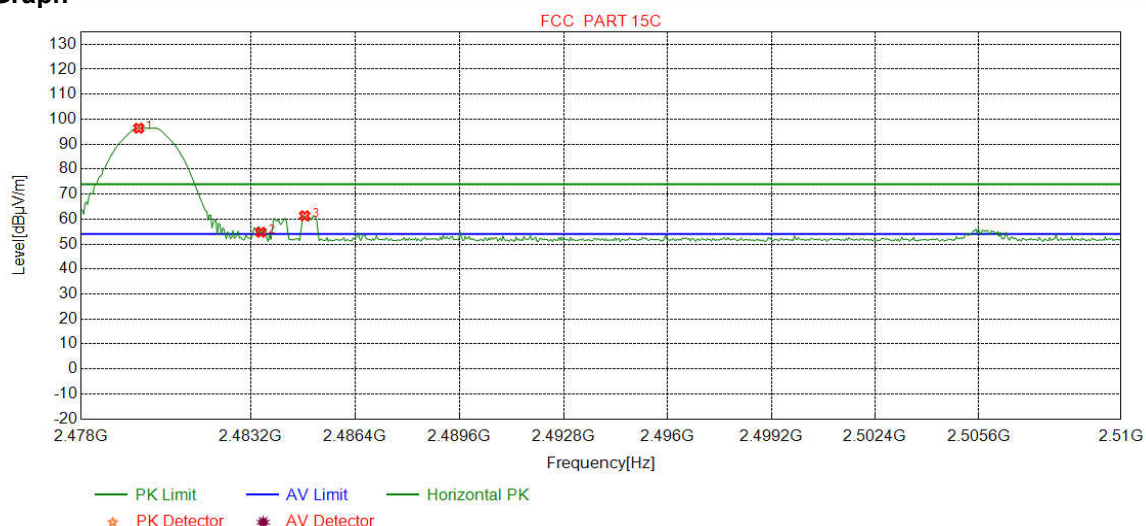

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7622	32.37	13.39	-43.10	93.72	96.38	74.00	-22.38	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	52.07	54.72	74.00	19.28	Pass	Horizontal
3	2484.8486	32.38	13.37	-43.10	58.67	61.32	74.00	12.68	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

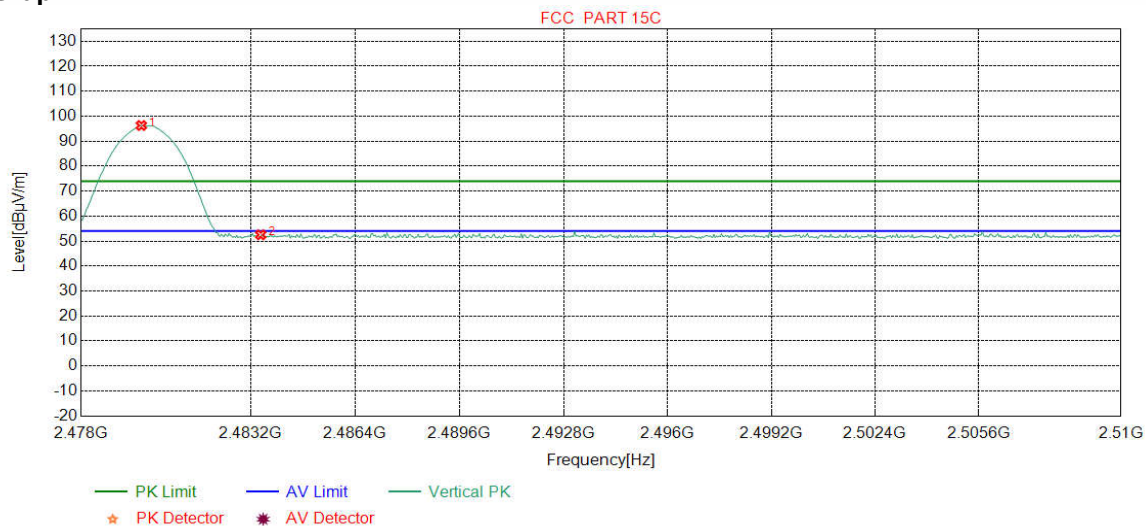

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8423	32.37	13.39	-43.10	93.61	96.27	74.00	-22.27	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.87	52.52	74.00	21.48	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

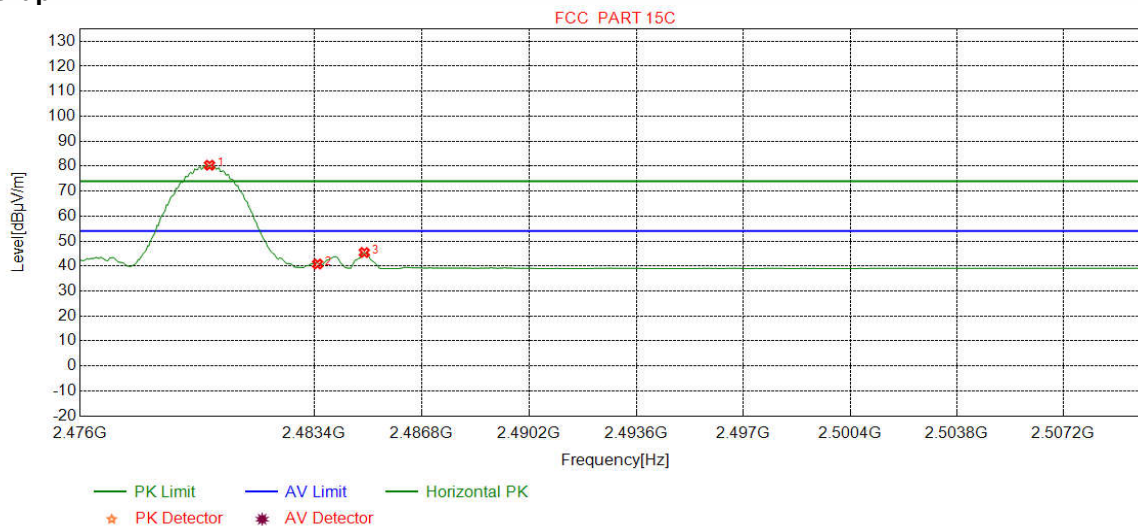

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0851	32.37	13.39	-43.10	77.70	80.36	54.00	-26.36	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	38.15	40.80	54.00	13.20	Pass	Horizontal
3	2484.9787	32.38	13.37	-43.10	42.76	45.41	54.00	8.59	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

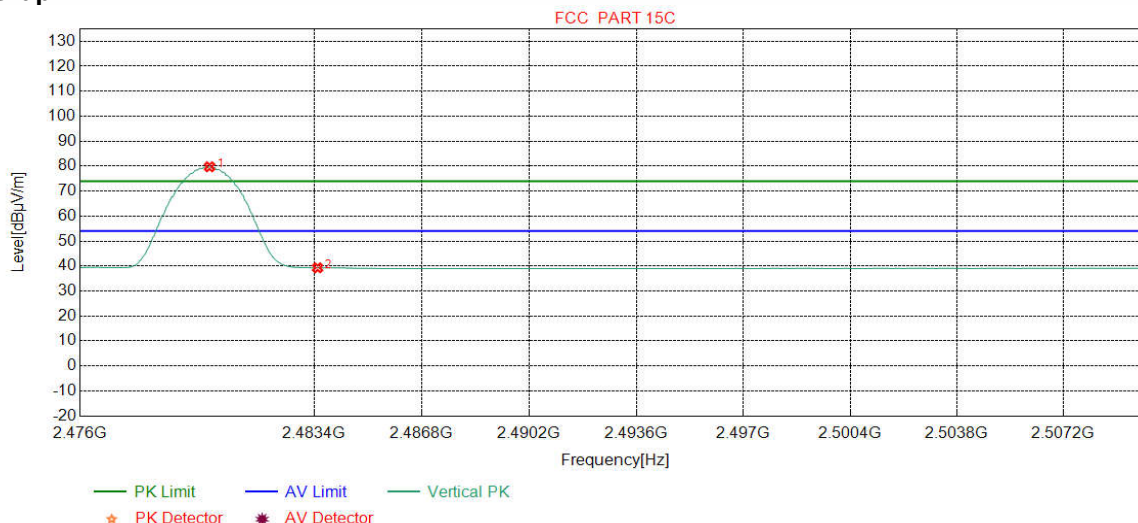

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0851	32.37	13.39	-43.10	77.07	79.73	54.00	-25.73	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	36.65	39.30	54.00	14.70	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

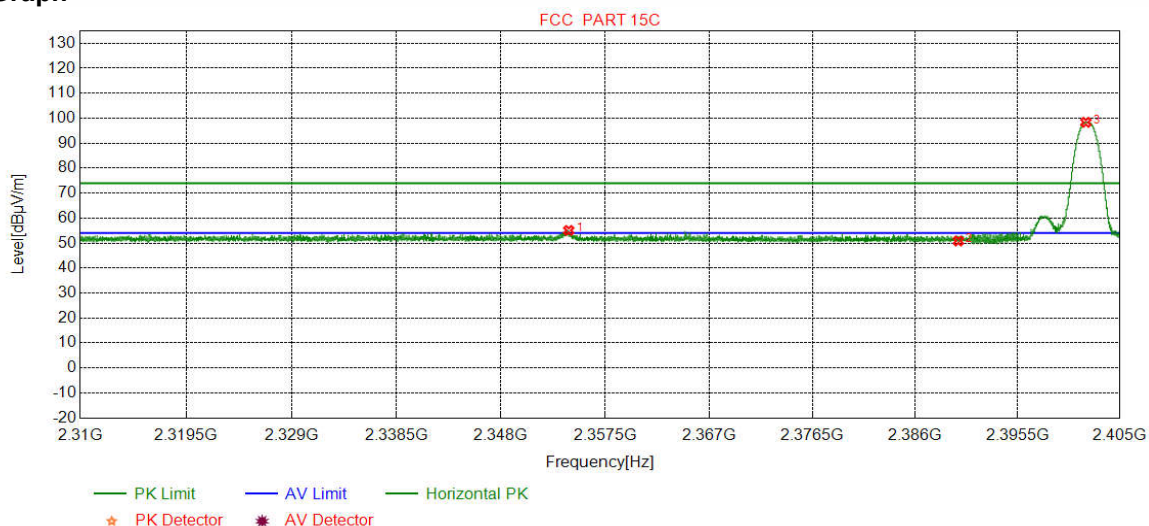

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2354.1716	32.20	13.64	-42.46	51.68	55.06	74.00	18.94	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	47.66	50.84	74.00	23.16	Pass	Horizontal
3	2401.8458	32.26	13.31	-42.43	95.21	98.35	74.00	-24.35	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

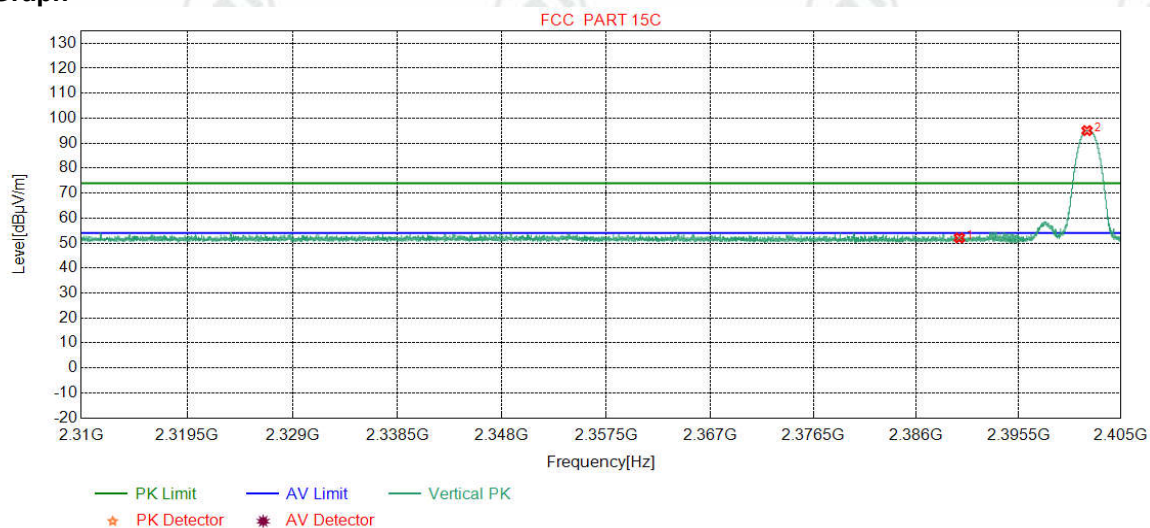

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.90	52.08	74.00	21.92	Pass	Vertical
2	2401.8585	32.26	13.31	-42.43	91.89	95.03	74.00	-21.03	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

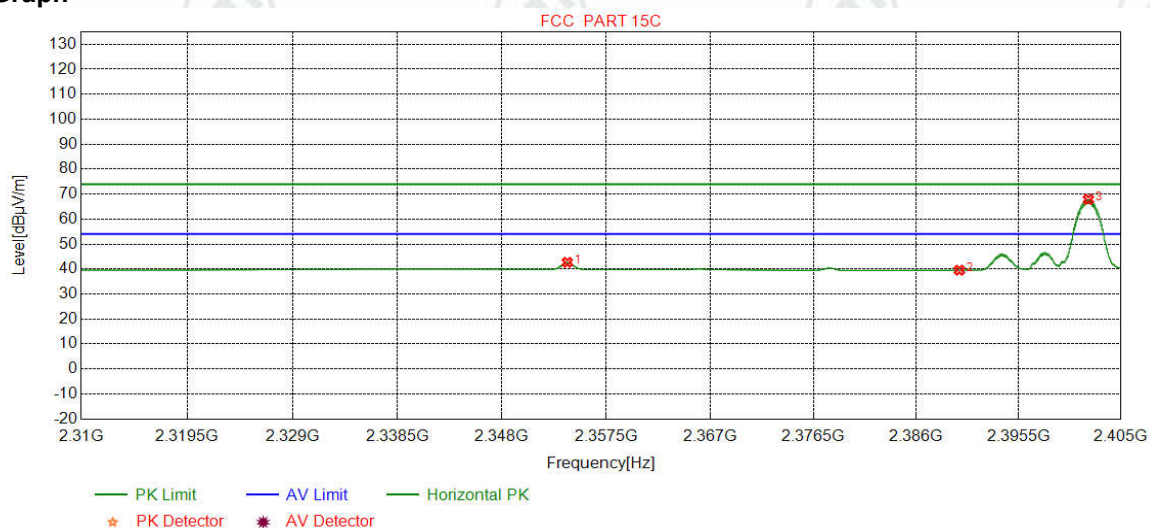

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2353.9499	32.20	13.64	-42.46	39.31	42.69	54.00	11.31	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	36.35	39.53	54.00	14.47	Pass	Horizontal
3	2401.9851	32.26	13.31	-42.43	64.76	67.90	54.00	-13.90	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

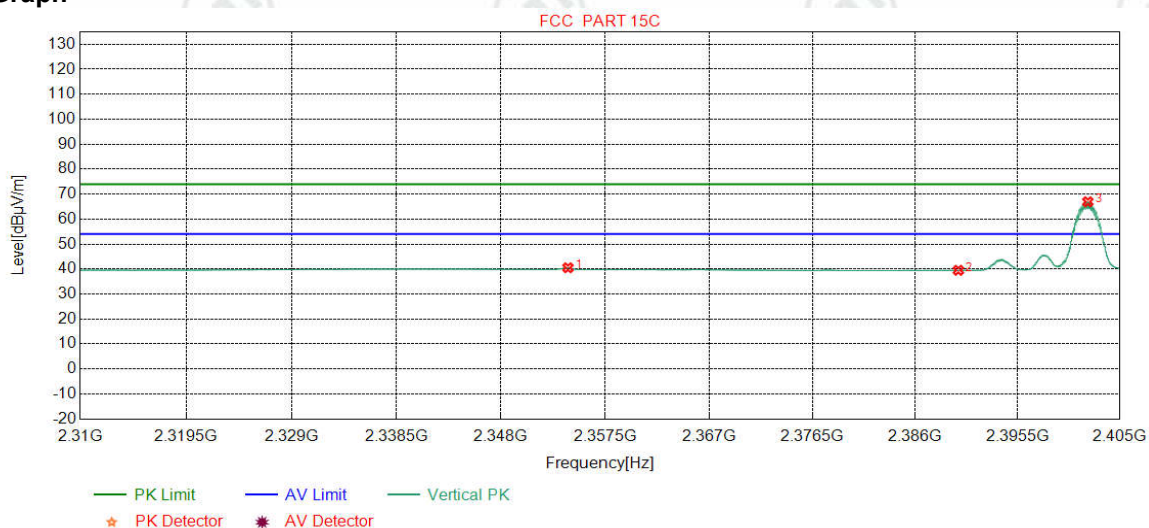

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2354.1019	32.20	13.64	-42.46	37.13	40.51	54.00	13.49	Pass	Vertical
2	2390.0000	32.25	13.37	-42.44	36.31	39.49	54.00	14.51	Pass	Vertical
3	2402.0295	32.26	13.31	-42.43	63.81	66.95	54.00	-12.95	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

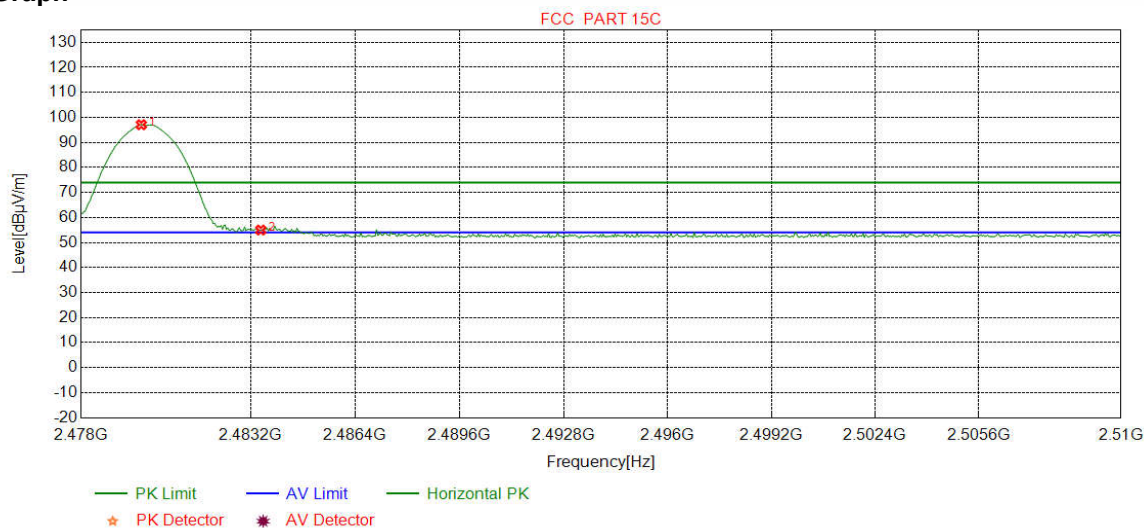

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8423	32.37	13.39	-42.39	93.70	97.07	74.00	-23.07	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	51.61	54.97	74.00	19.03	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

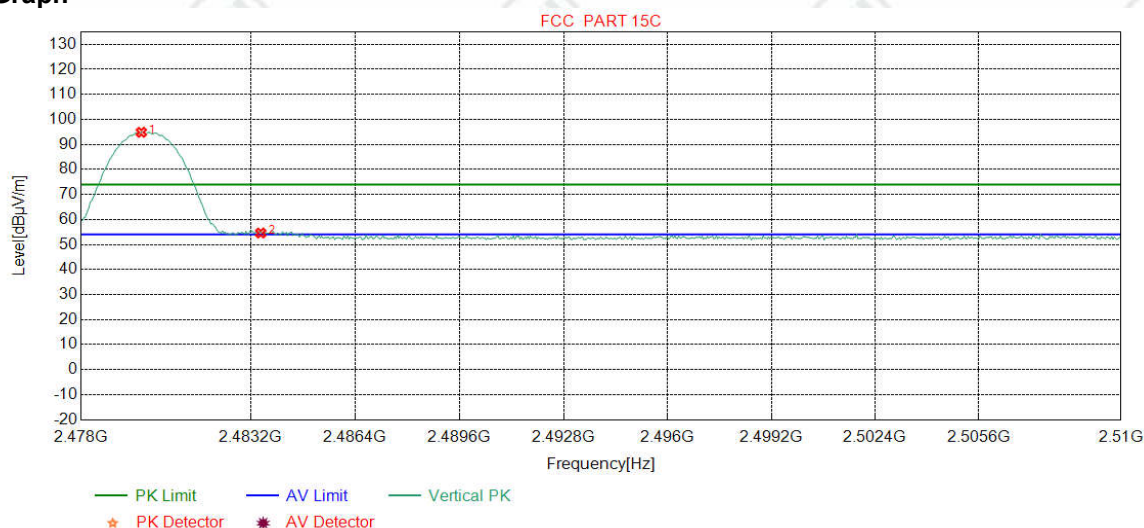

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8423	32.37	13.39	-42.39	91.48	94.85	74.00	-20.85	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	51.23	54.59	74.00	19.41	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

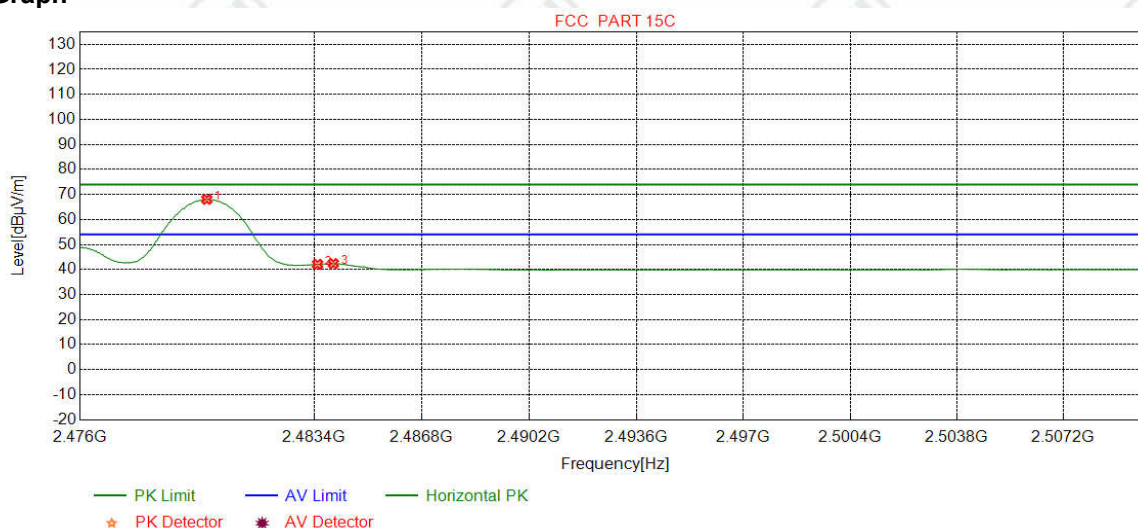

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-42.39	64.67	68.04	54.00	-14.04	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	38.74	42.10	54.00	11.90	Pass	Horizontal
3	2484.0000	32.38	13.37	-42.40	39.04	42.39	54.00	11.61	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

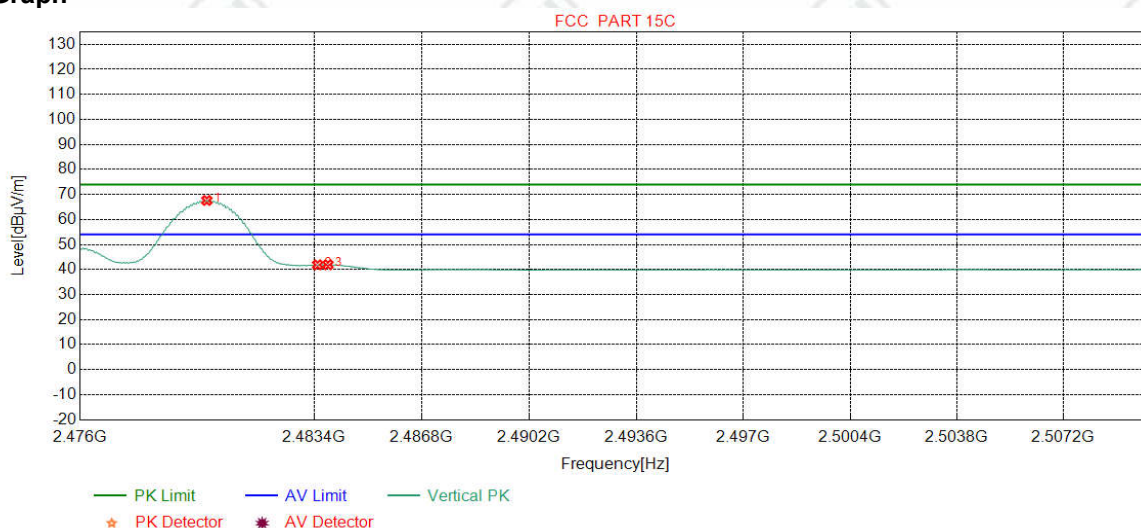

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-42.39	64.23	67.60	54.00	-13.60	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	38.52	41.88	54.00	12.12	Pass	Vertical
3	2483.8298	32.38	13.37	-42.40	38.58	41.93	54.00	12.07	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.0146	11.02	0.66	-31.39	46.77	27.06	40.00	12.94	Pass	H	PK
2	75.9826	7.86	1.02	-31.96	49.86	26.78	40.00	13.22	Pass	H	PK
3	120.0250	9.20	1.30	-32.07	58.36	36.79	43.50	6.71	Pass	H	PK
4	224.0194	11.52	1.78	-31.93	55.00	36.37	46.00	9.63	Pass	H	PK
5	416.0016	15.66	2.44	-31.85	44.48	30.73	46.00	15.27	Pass	H	PK
6	792.0112	20.81	3.37	-31.98	42.73	34.93	46.00	11.07	Pass	H	PK
7	36.0146	11.02	0.66	-31.39	47.25	27.54	40.00	12.46	Pass	V	PK
8	120.0250	9.20	1.30	-32.07	47.51	25.94	43.50	17.56	Pass	V	PK
9	224.0194	11.52	1.78	-31.93	48.33	29.70	46.00	16.30	Pass	V	PK
10	288.0458	12.96	2.02	-31.89	46.63	29.72	46.00	16.28	Pass	V	PK
11	600.0290	19.00	2.96	-31.50	37.69	28.15	46.00	17.85	Pass	V	PK
12	863.9924	21.67	3.53	-31.75	40.96	34.41	46.00	11.59	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1120.0120	28.02	2.61	-42.97	53.58	41.24	74.00	32.76	Pass	H	PK
2	1774.4774	30.21	3.27	-42.69	51.43	42.22	74.00	31.78	Pass	H	PK
3	4804.1203	34.50	4.55	-42.80	60.21	56.46	74.00	17.54	Pass	H	PK
4	7206.0000	36.31	5.81	-42.16	47.08	47.04	74.00	26.96	Pass	H	PK
5	9608.0000	37.64	6.63	-42.10	46.98	49.15	74.00	24.85	Pass	H	PK
6	12010.000	39.31	7.60	-41.90	46.42	51.43	74.00	22.57	Pass	H	PK
7	4804.1199	34.50	4.55	-42.80	52.98	49.23	54.00	4.77	Pass	H	AV
8	1119.8120	28.02	2.61	-42.97	52.92	40.58	74.00	33.42	Pass	V	PK
9	1642.4642	29.34	3.13	-42.80	51.89	41.56	74.00	32.44	Pass	V	PK
10	4803.1202	34.50	4.55	-42.80	56.49	52.74	74.00	21.26	Pass	V	PK
11	7206.0000	36.31	5.81	-42.16	46.05	46.01	74.00	27.99	Pass	V	PK
12	9608.0000	37.64	6.63	-42.10	46.93	49.10	74.00	24.90	Pass	V	PK
13	12010.000	39.31	7.60	-41.90	47.00	52.01	74.00	21.99	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1151.8152	28.05	2.69	-42.94	52.42	40.22	74.00	33.78	Pass	H	PK
2	1791.2791	30.32	3.30	-42.70	51.92	42.84	74.00	31.16	Pass	H	PK
3	4882.1255	34.50	4.81	-42.80	60.46	56.97	74.00	17.03	Pass	H	PK
4	7323.0000	36.42	5.85	-42.13	46.71	46.85	74.00	27.15	Pass	H	PK
5	9764.0000	37.71	6.71	-42.10	47.87	50.19	74.00	23.81	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	46.33	51.53	74.00	22.47	Pass	H	PK
7	4882.1251	34.50	4.81	-42.80	52.29	48.80	54.00	5.20	Pass	H	AV
8	1697.4697	29.70	3.20	-42.67	51.70	41.93	74.00	32.07	Pass	V	PK
9	3041.0027	33.22	4.85	-43.11	50.09	45.05	74.00	28.95	Pass	V	PK
10	4882.1255	34.50	4.81	-42.80	55.76	52.27	74.00	21.73	Pass	V	PK
11	7323.0000	36.42	5.85	-42.13	46.86	47.00	74.00	27.00	Pass	V	PK
12	9764.0000	37.71	6.71	-42.10	46.80	49.12	74.00	24.88	Pass	V	PK
13	12205.000	39.42	7.67	-41.89	45.58	50.78	74.00	23.22	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1599.8600	29.06	3.07	-42.90	51.58	40.81	74.00	33.19	Pass	H	PK
2	3077.0051	33.23	4.77	-43.10	50.80	45.70	74.00	28.30	Pass	H	PK
3	4960.1307	34.50	4.82	-42.80	59.31	55.83	74.00	18.17	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	46.86	47.14	74.00	26.86	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	46.21	48.67	74.00	25.33	Pass	H	PK
6	12400.000	39.54	7.86	-41.90	47.20	52.70	74.00	21.30	Pass	H	PK
7	4960.1297	34.50	4.82	-42.80	50.88	47.40	54.00	6.60	Pass	H	AV
8	1792.2792	30.33	3.31	-42.71	51.23	42.16	74.00	31.84	Pass	V	PK
9	3564.0376	33.45	4.41	-43.08	50.05	44.83	74.00	29.17	Pass	V	PK
10	4960.1307	34.50	4.82	-42.80	54.90	51.42	74.00	22.58	Pass	V	PK
11	7440.0000	36.54	5.85	-42.11	46.53	46.81	74.00	27.19	Pass	V	PK
12	9920.0000	37.77	6.79	-42.10	46.34	48.80	74.00	25.20	Pass	V	PK
13	12400.000	39.54	7.86	-41.90	46.28	51.78	74.00	22.22	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1997.8998	31.69	3.47	-42.62	55.38	47.92	74.00	26.08	Pass	H	PK
2	3003.0002	33.20	4.92	-42.11	51.46	47.47	74.00	26.53	Pass	H	PK
3	4804.1203	34.50	4.55	-40.66	61.50	59.89	74.00	14.11	Pass	H	PK
4	7205.2804	36.31	5.82	-41.03	50.05	51.15	74.00	22.85	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	47.84	51.35	74.00	22.65	Pass	H	PK
6	12010.000	39.31	7.60	-41.21	45.62	51.32	74.00	22.68	Pass	H	PK
7	4803.5903	34.50	4.55	-40.66	45.23	43.62	54.00	10.38	Pass	H	AV
8	2016.7017	31.72	3.50	-42.60	56.84	49.46	74.00	24.54	Pass	V	PK
9	3995.0663	33.80	4.33	-40.79	51.39	48.73	74.00	25.27	Pass	V	PK
10	4803.1202	34.50	4.55	-40.66	57.42	55.81	74.00	18.19	Pass	V	PK
11	7205.2804	36.31	5.82	-41.03	51.49	52.59	74.00	21.41	Pass	V	PK
12	9608.0000	37.64	6.63	-40.76	47.27	50.78	74.00	23.22	Pass	V	PK
13	12010.000	39.31	7.60	-41.21	47.37	53.07	74.00	20.93	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1333.0333	28.23	2.80	-42.75	55.79	44.07	74.00	29.93	Pass	H	PK
2	1997.2997	31.68	3.47	-42.61	55.14	47.68	74.00	26.32	Pass	H	PK
3	4882.1255	34.50	4.81	-40.60	61.41	60.12	74.00	13.88	Pass	H	PK
4	7322.2882	36.42	5.85	-40.92	51.09	52.44	74.00	21.56	Pass	H	PK
5	9764.0000	37.71	6.71	-40.62	47.36	51.16	74.00	22.84	Pass	H	PK
6	12205.000	39.42	7.67	-41.16	45.49	51.42	74.00	22.58	Pass	H	PK
7	4881.5455	34.50	4.81	-40.60	45.46	44.17	54.00	9.83	Pass	H	AV
8	1329.2329	28.23	2.79	-42.75	60.47	48.74	74.00	25.26	Pass	V	PK
9	3983.0655	33.79	4.33	-40.82	50.81	48.11	74.00	25.89	Pass	V	PK
10	4882.0000	34.50	4.81	-40.60	54.20	52.91	74.00	21.09	Pass	V	PK
11	7323.0000	36.42	5.85	-40.92	51.71	53.06	74.00	20.94	Pass	V	PK
12	9764.0000	37.71	6.71	-40.62	46.87	50.67	74.00	23.33	Pass	V	PK
13	12205.000	39.42	7.67	-41.16	44.83	50.76	74.00	23.24	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2480	
N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1332.2332	28.23	2.80	-42.75	58.54	46.82	74.00	27.18	Pass	H	PK
2	1997.6998	31.68	3.47	-42.61	54.04	46.58	74.00	27.42	Pass	H	PK
3	4960.1307	34.50	4.82	-40.53	62.25	61.04	74.00	12.96	Pass	H	PK
4	7439.2960	36.54	5.85	-40.82	49.10	50.67	74.00	23.33	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	45.04	49.12	74.00	24.88	Pass	H	PK
6	12400.0000	39.54	7.86	-41.12	46.02	52.30	74.00	21.70	Pass	H	PK
7	4959.6207	34.50	4.82	-40.53	45.64	44.43	54.00	9.57	Pass	H	AV
8	1331.8332	28.23	2.79	-42.75	62.67	50.94	74.00	23.06	Pass	V	PK
9	2150.9151	31.91	3.65	-42.54	55.69	48.71	74.00	25.29	Pass	V	PK
10	4960.0000	34.50	4.82	-40.53	54.42	53.21	74.00	20.79	Pass	V	PK
11	7440.0000	36.54	5.85	-40.82	51.47	53.04	74.00	20.96	Pass	V	PK
12	9920.0000	37.77	6.79	-40.48	46.27	50.35	74.00	23.65	Pass	V	PK
13	12400.0000	39.54	7.86	-41.12	46.90	53.18	74.00	20.82	Pass	V	PK

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.