

Bluetooth (GFSK,) mode have been tested:

Modulation Mode	Channel Number	Packet type	Pulse width (ms)	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	0	DH1	0.373	119.36	<400	PASS
	0	DH3	1.629	260.64	<400	PASS
	0	DH5	2.877	306.88	<400	PASS
Note: Dwell Time(DH1)=PW*(1600/2/79)*31.6 Dwell Time(DH3)=PW*(1600/4/79)*31.6 Dwell Time(DH5)=PW*(1600/6/79)*31.6						


Average Time Of Occupancy (Dwell Time)

Test Model

Bluetooth V4.0

CH 0: 2402MHz

GFSK DH1

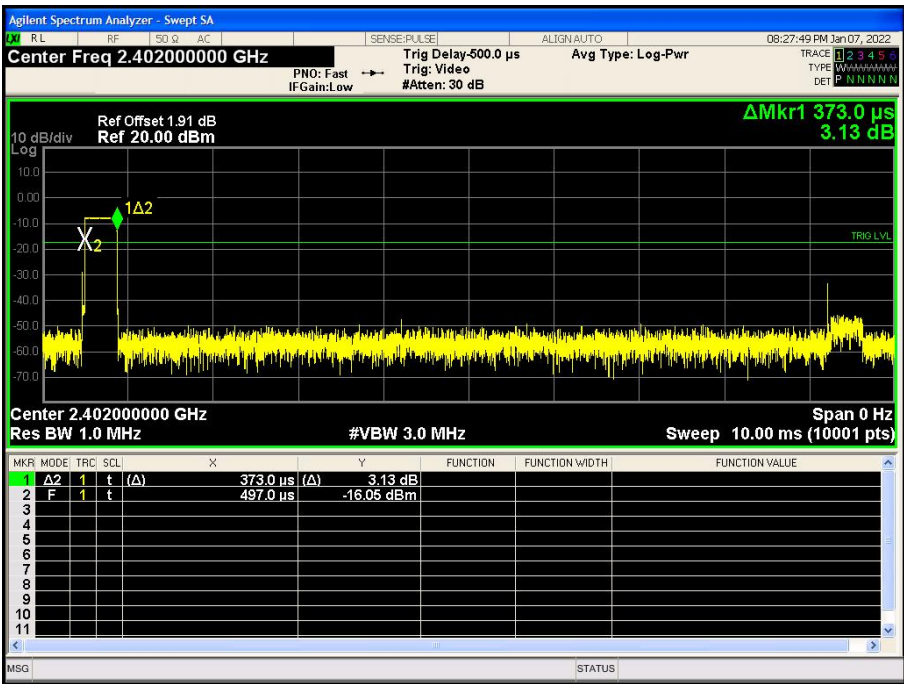


Average Time Of Occupancy (Dwell Time)

Test Model

Bluetooth V4.0


CH 0: 2402MHz

GFSK DH3

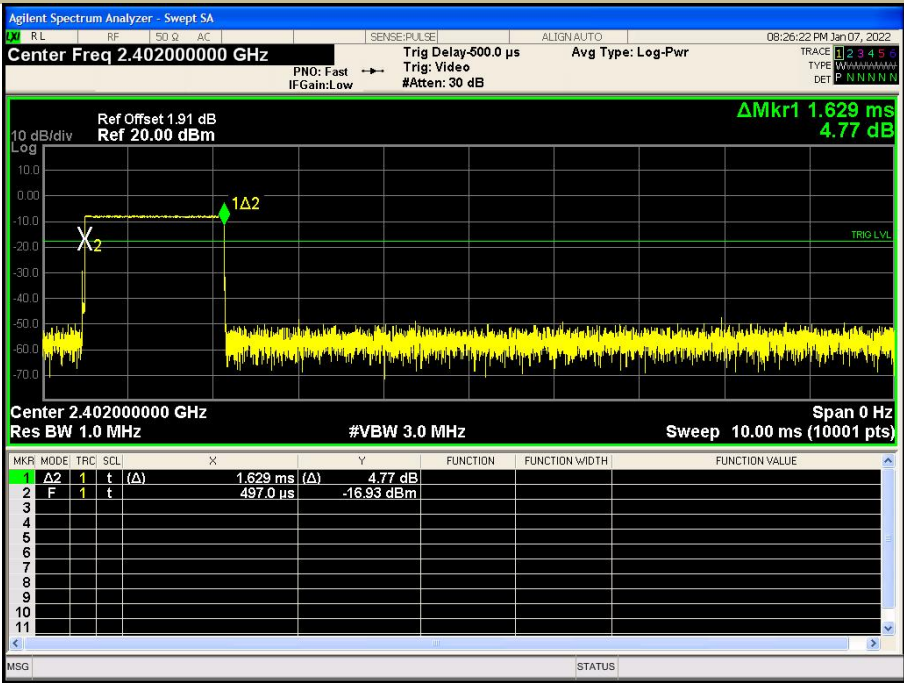

Test Model

Average Time Of Occupancy (Dwell Time)
Bluetooth V4.0
CH 0: 2402MHz
GFSK DH5

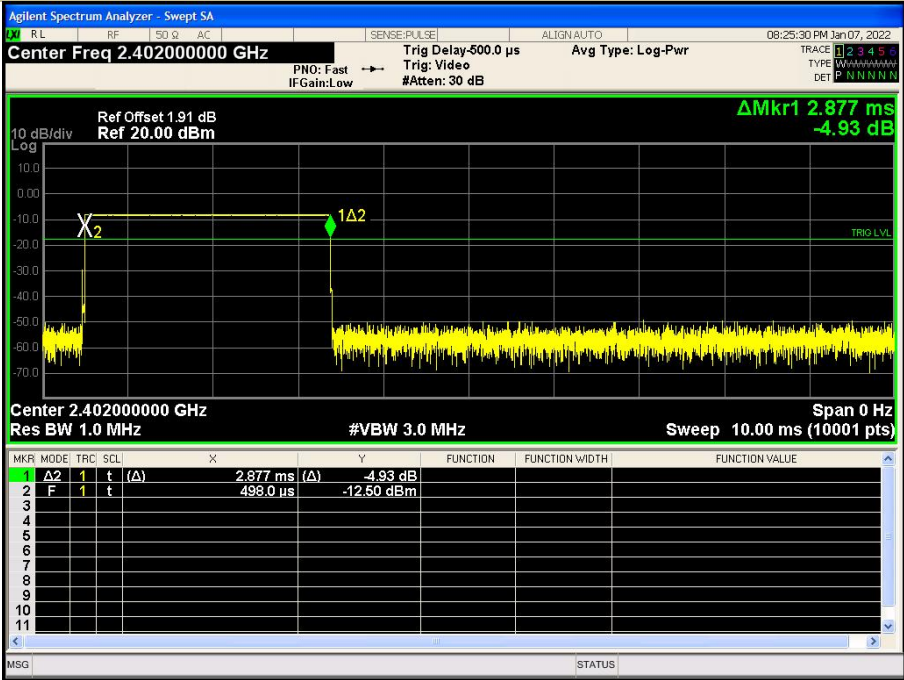

8.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

8.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

8.5.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

8.5.4 Test Procedure

n According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW ³ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold


Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	-5.82	30	PASS
	39	2441	-3.58	30	PASS
	78	2480	-2.25	30	PASS
pi/4-DQPSK	0	2402	-3.45	30	PASS
	39	2441	-1.03	30	PASS
	78	2480	0.45	30	PASS
8DPSK	0	2402	-2.74	30	PASS
	39	2441	-0.44	30	PASS
	78	2480	1.09	30	PASS
Note: N/A					


Test Model Maximum Peak Conducted Output Power
Bluetooth V4.0
Channel 0: 2402MHz GFSK

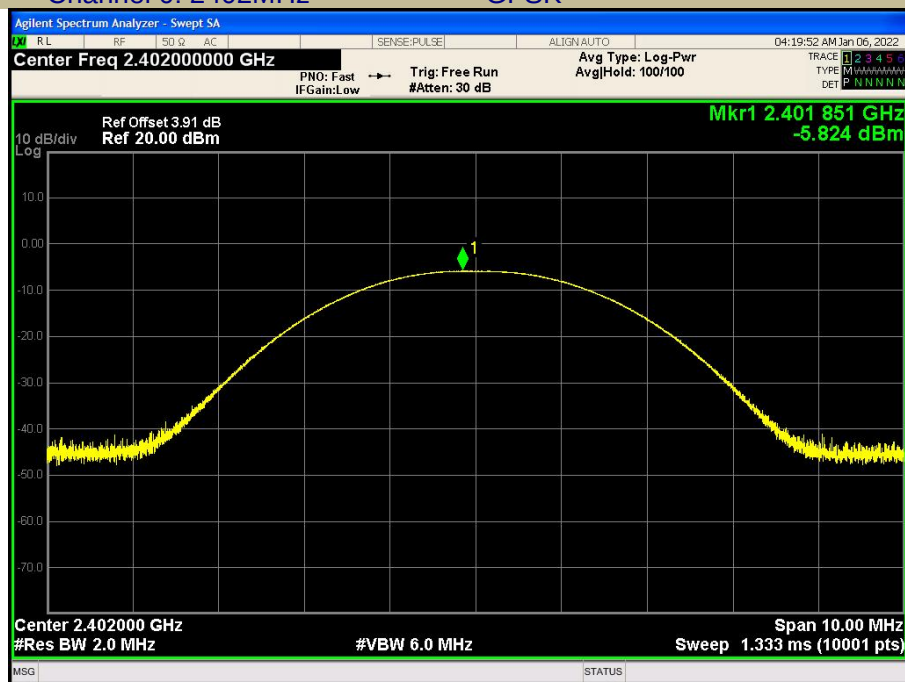


Test Model Maximum Peak Conducted Output Power
Bluetooth V4.0
Channel 39: 2441MHz GFSK

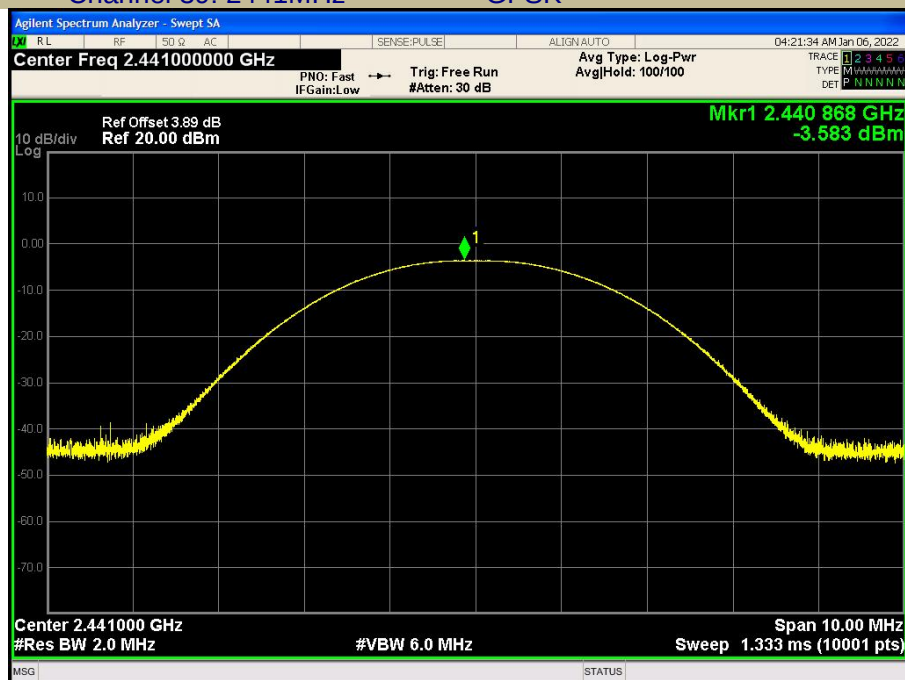

Test Model Maximum Peak Conducted Output Power
Bluetooth V4.0
Channel 78: 2480MHz GFSK

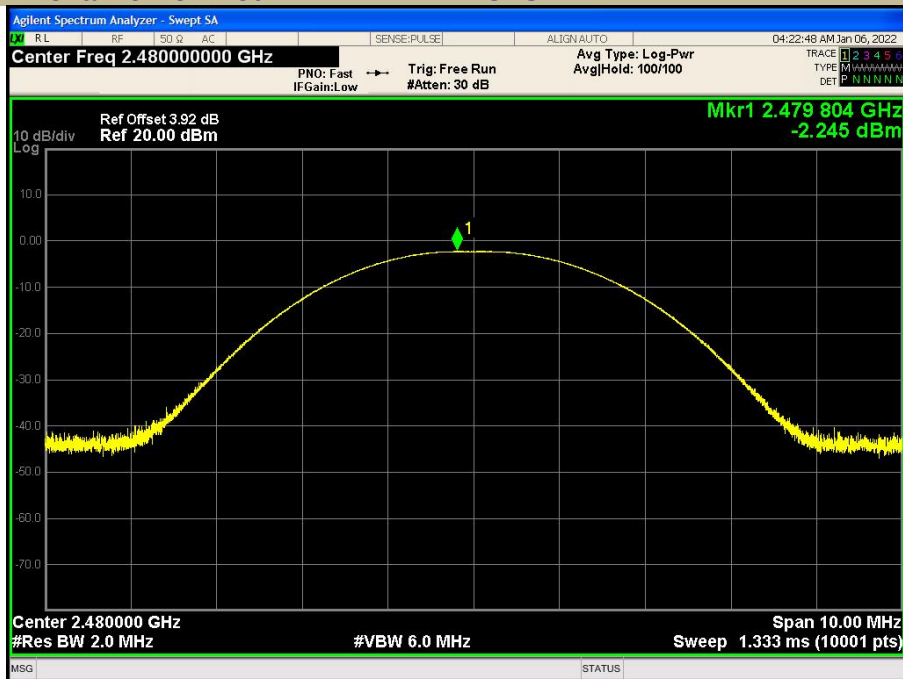

Test Model Maximum Peak Conducted Output Power
Bluetooth V4.0
Channel 0: 2402MHz pi/4-DQPSK

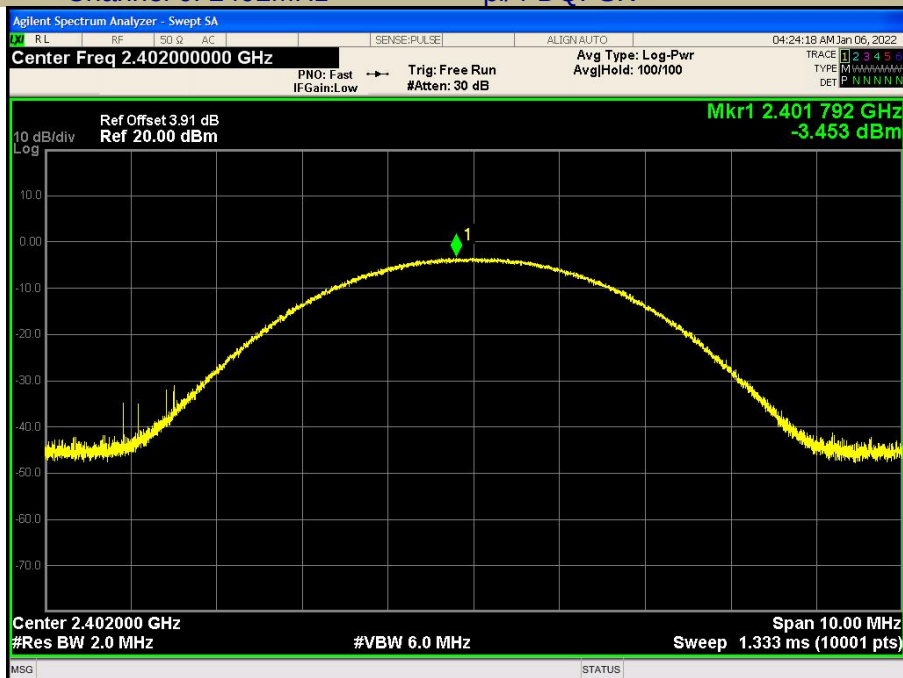


Test Model

Maximum Peak Conducted Output Power

Bluetooth V4.0

Channel 39: 2441MHz

pi/4-DQPSK

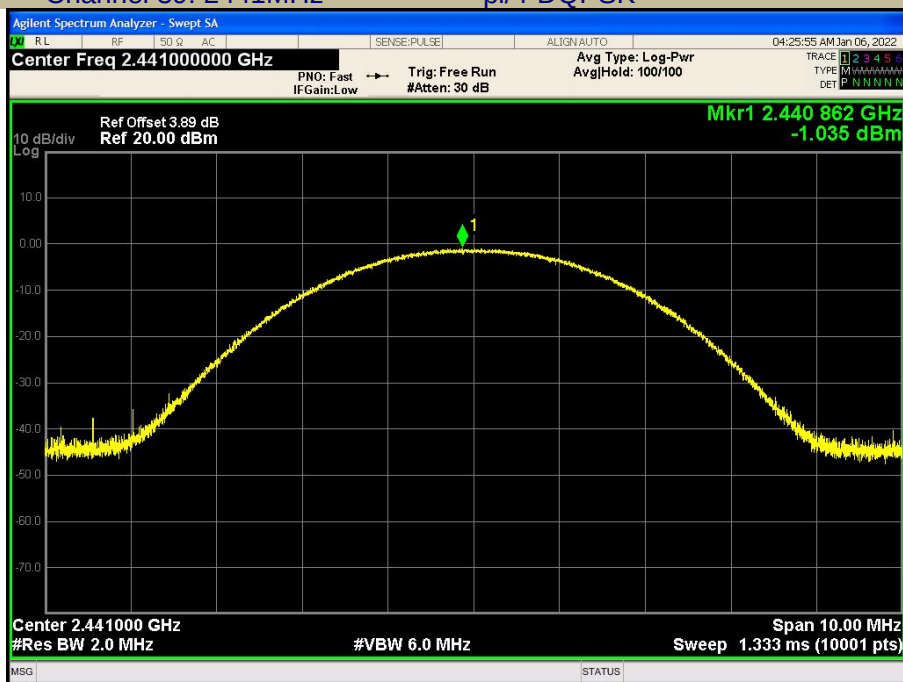


Test Model

Maximum Peak Conducted Output Power

Bluetooth V4.0


Channel 78: 2480MHz

pi/4-DQPSK

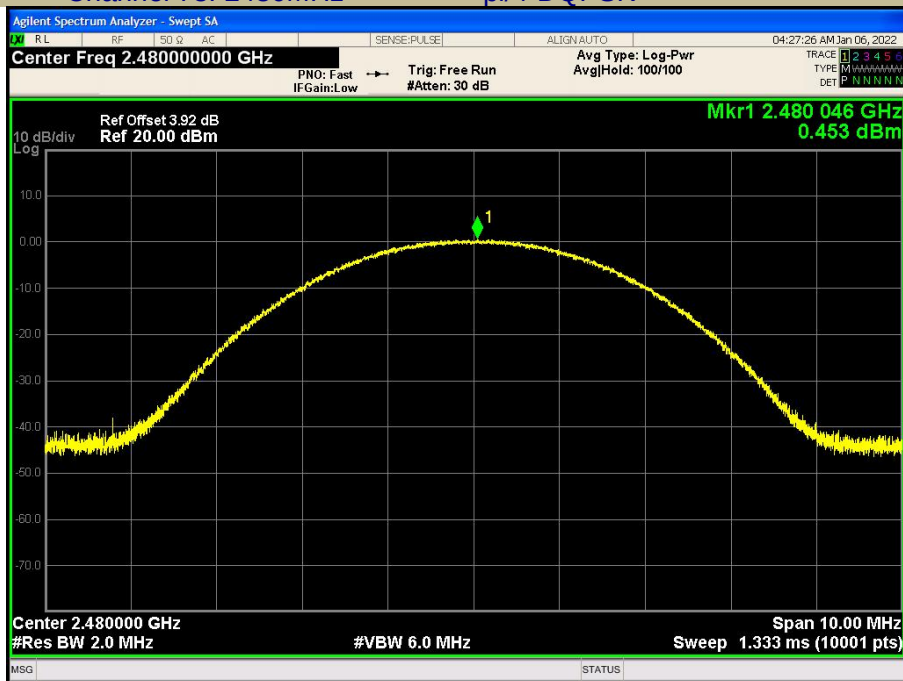


Test Model

Maximum Peak Conducted Output Power
Bluetooth V4.0
Channel 0: 2402MHz 8DPSK

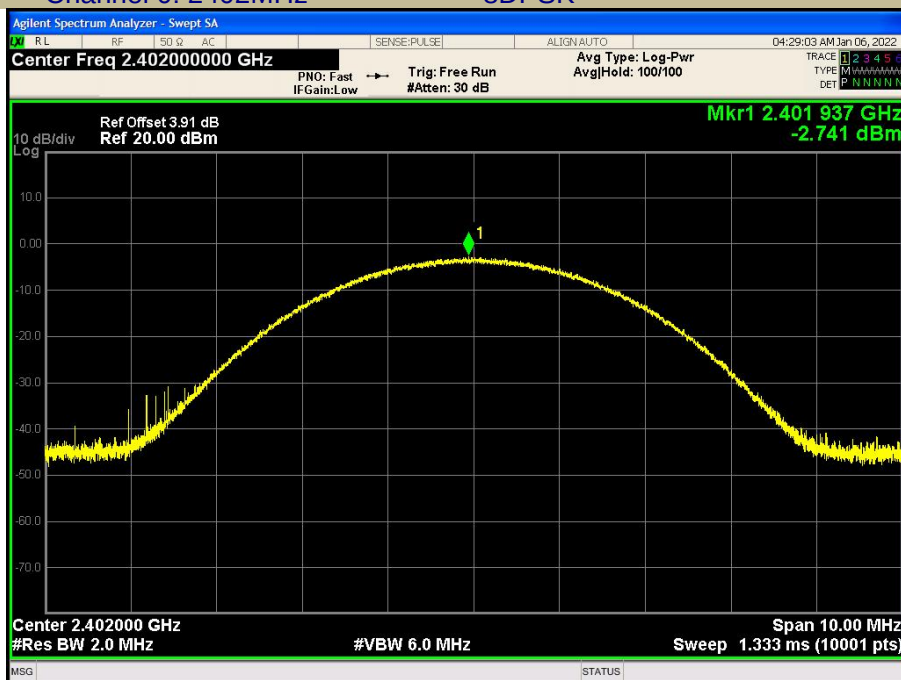


Test Model

Maximum Peak Conducted Output Power
Bluetooth V4.0
Channel 39: 2441MHz 8DPSK

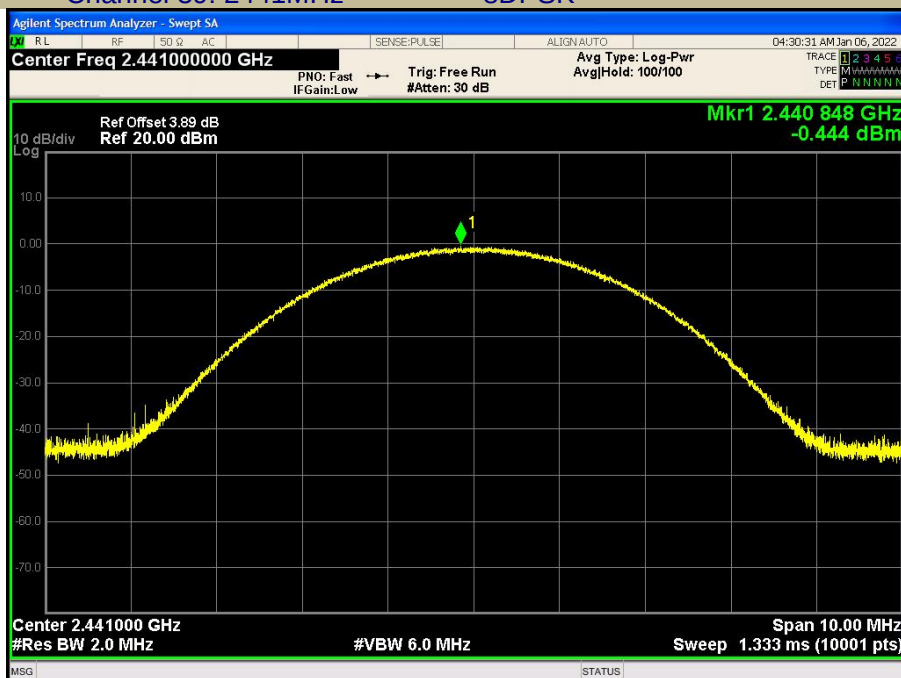

Test Model	Maximum Peak Conducted Output Power
	Bluetooth V4.0
	Channel 78: 2480MHz
	8DPSK

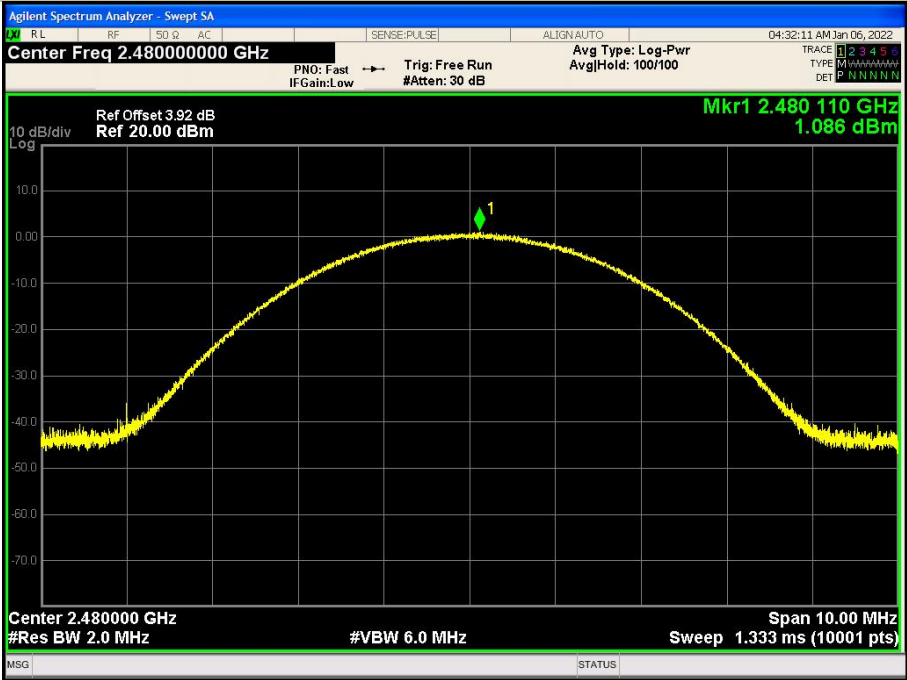

8.6 CONDUCTED SUPRIOUS EMISSION

8.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

8.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

8.6.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

8.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

n Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

n Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

n Conduceted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th

harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


8.6.5 Test Results

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Maximum Conduced Level RBW=100kHz
Test Model Bluetooth V4.0
Channel 0: 2402MHz GFSK



Conduced Spurious RF Conducted Emission
Test Model Bluetooth V4.0
Channel 0: 2402MHz GFSK

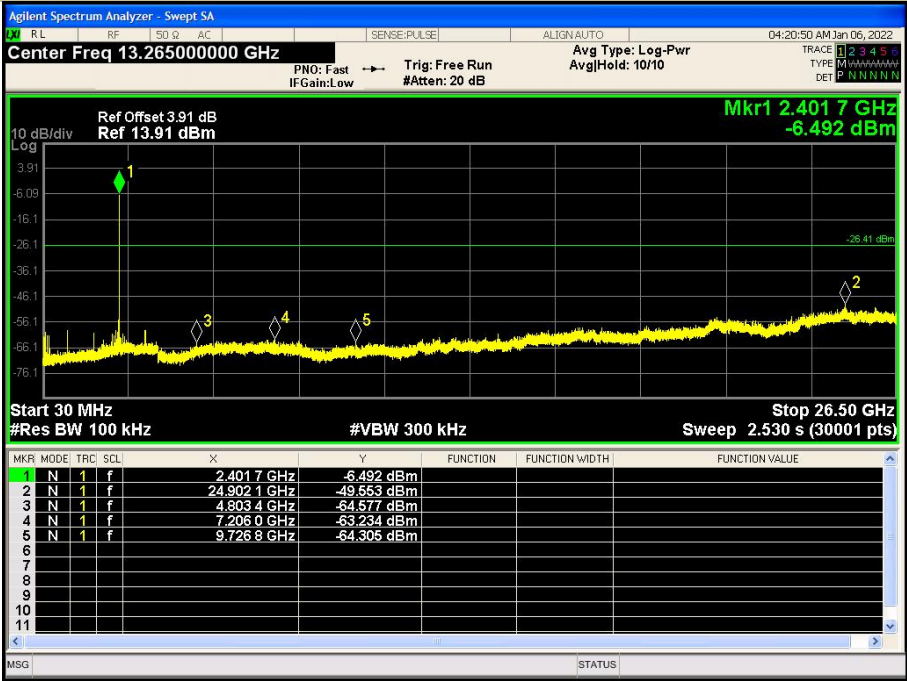


Test Model

Band-edge Conducted Emissions

Bluetooth V4.0

Channel 0: 2402MHz

GFSK

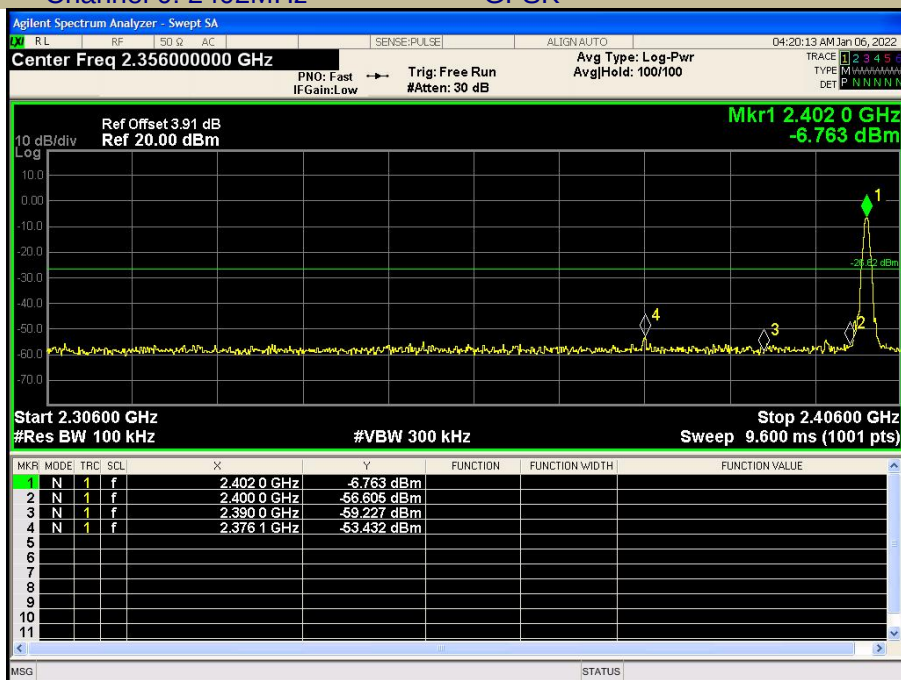

Test Model

Maximum Conducted Level RBW=100kHz

Bluetooth V4.0

Channel 39: 2441MHz


GFSK



Test Model

Conduceted Spurious RF Conducted Emission
Bluetooth V4.0
Channel 39: 2441MHz

GFSK

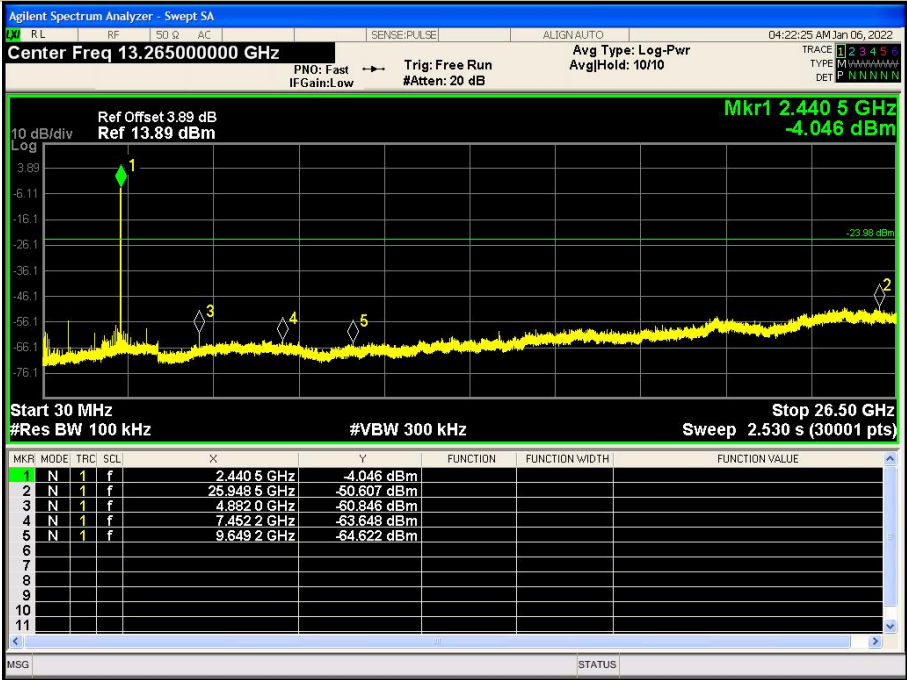

Test Model


Maximum Conduceted Level RBW=100kHz
Bluetooth V4.0
Channel 78: 2480MHz

GFSK




Test Model

Conducted Spurious RF Conducted Emission
Bluetooth V4.0
Channel 78: 2480MHz
GFSK

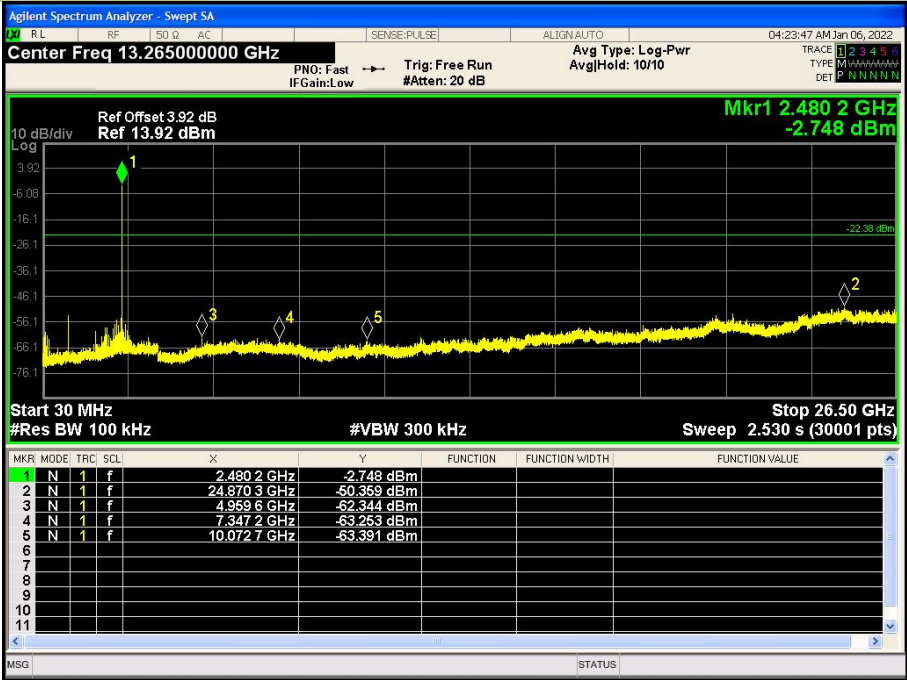

Test Model

Band-edge Conducted Emissions
Bluetooth V4.0
Channel 78: 2480MHz
GFSK

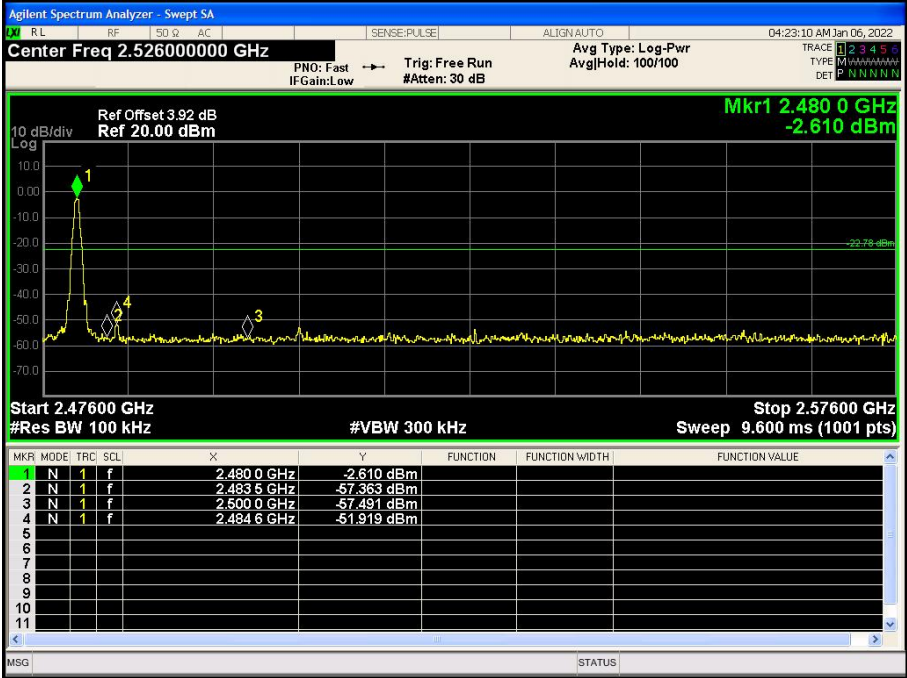


Test Model

Maximum Conducted Level RBW=100kHz
Bluetooth V4.0
Hopping
GFSK



Test Model

Conducted Spurious RF Conducted Emission
Bluetooth V4.0
Hopping
GFSK

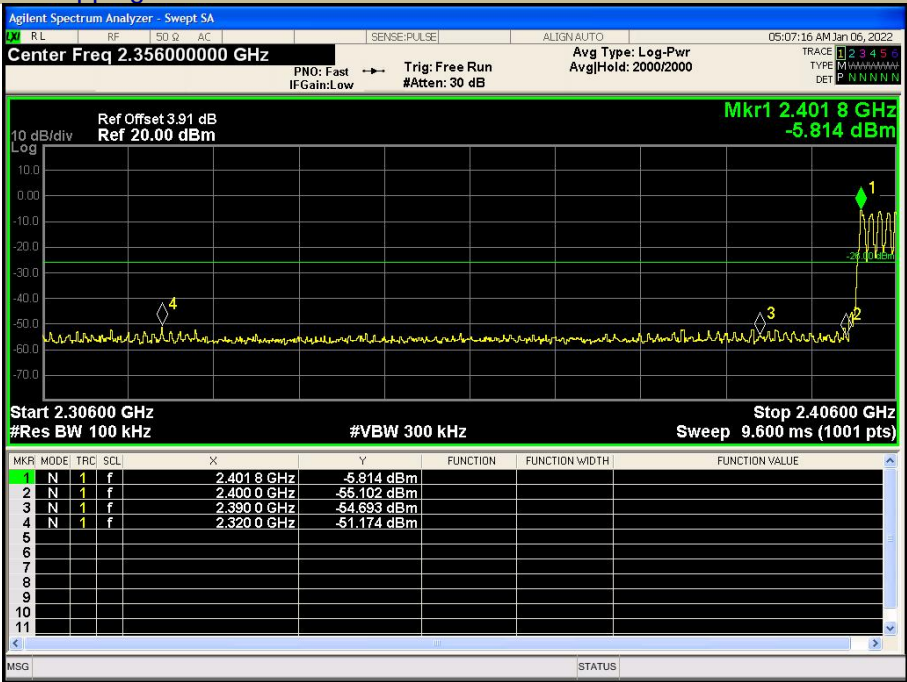

Test Model

Band-edge Conducted Emissions
Bluetooth V4.0
Hopping


GFSK



Test Model

Band-edge Conducted Emissions
Bluetooth V4.0
Hopping

GFSK

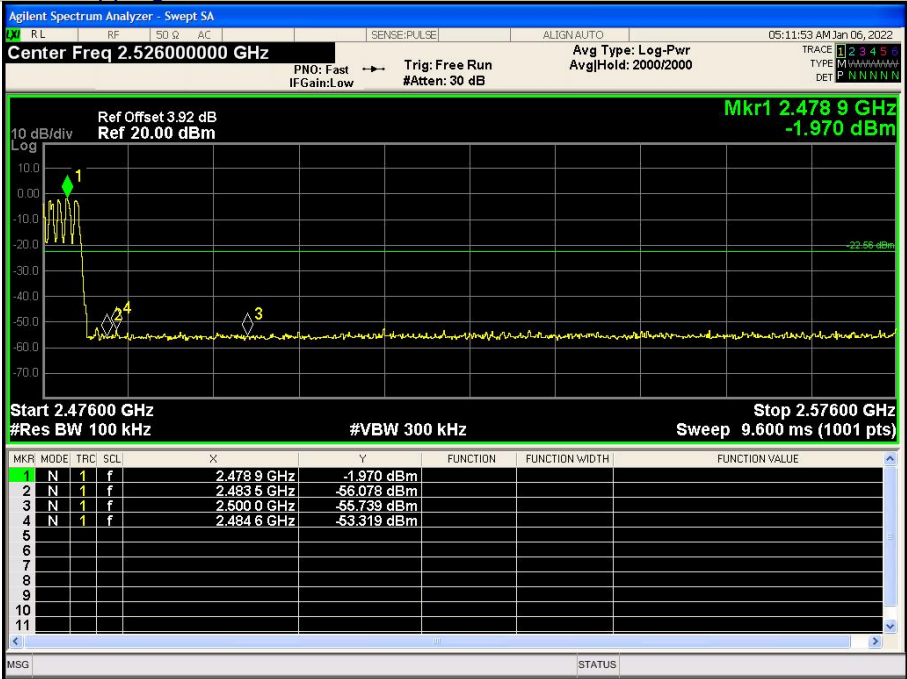

8.7 RADIATED SPURIOUS EMISSION

8.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

8.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.7.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2

8.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.7.5 Test Results

n Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible

limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

n Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804.00	V	44.27	30.59	74	54	-29.73	-23.41
7206.00	V	51.20	42.71	74	54	-22.8	-11.29
10374.20	V	57.62	46.19	74	54	-16.38	-7.81
4007.23	H	45.84	32.19	74	54	-28.16	-21.81
4804.00	H	46.03	35.21	74	54	-27.97	-18.79
7206.00	H	49.73	38.16	74	54	-24.27	-15.84

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882.00	V	46.68	35.62	74	54	-27.32	-18.38
7232.00	V	49.34	35.97	74	54	-24.66	-18.03
11987.21	V	58.95	45.89	74	54	-15.05	-8.11
4882.00	H	45.25	36.85	74	54	-28.75	-17.15
7323.25	H	51.07	41.93	74	54	-22.93	-12.07
11371.28	H	58.92	46.71	74	54	-15.08	-7.29

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960.74	V	50.12	41.05	74	54	-23.88	-12.95
10065.54	V	57.21	43.79	74	54	-16.79	-10.21
14498.24	V	59.85	46.82	74	54	-14.15	-7.18
4960.02	H	49.60	32.51	74	54	-24.4	-21.49
7982.96	H	53.09	42.19	74	54	-20.91	-11.81
11284.52	H	57.97	46.75	74	54	-16.03	-7.25

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

n Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2352.65	H	42.58	74	30.89	54
2351.92	V	43.87	74	36.29	54

Test mode: GFSK Frequency: Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2485.05	H	42.96	74	33.86	54
2484.98	V	43.67	74	33.75	54

Test mode: GFSK Frequency: Hopping


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2400.00	H	43.02	74	33.27	54
2483.50	H	40.37	74	30.19	54
2400.00	V	42.25	74	31.95	54
2483.50	V	40.63	74	30.87	54

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	Bluetooth V4.0		
	Channel 0: 2402MHz	GFSK	H
	Test By: King Kong		

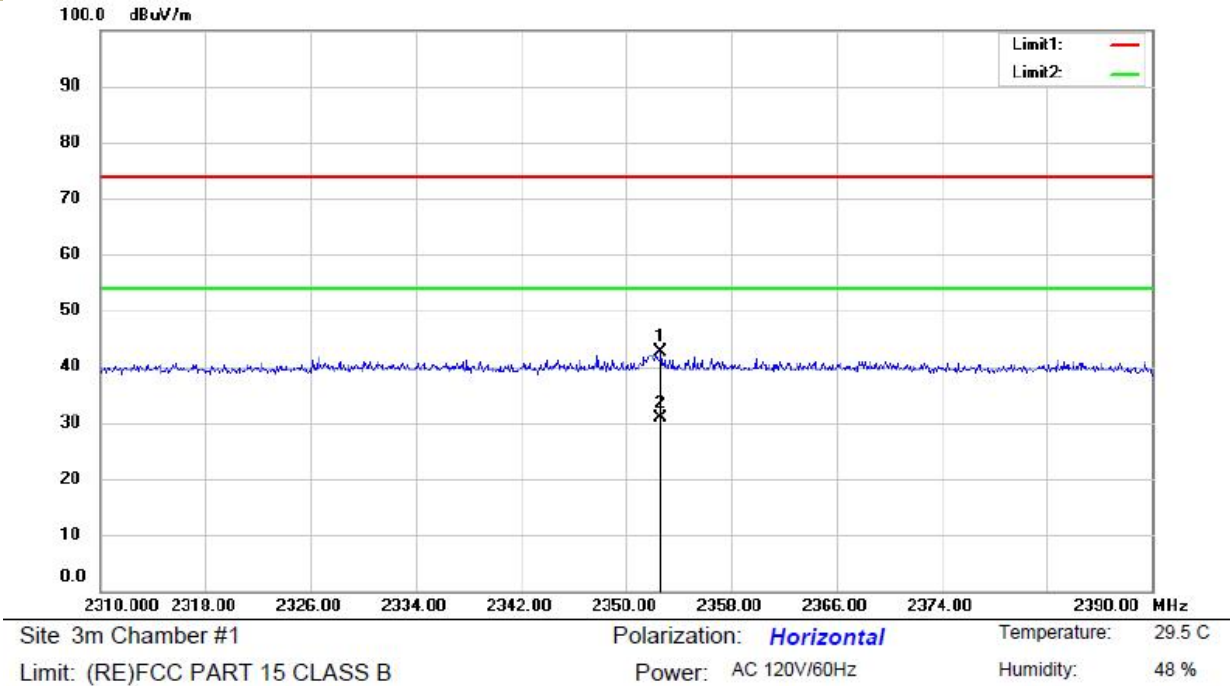


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	Bluetooth V4.0		
	Channel 0: 2402MHz	GFSK	V
	Test By: King Kong		

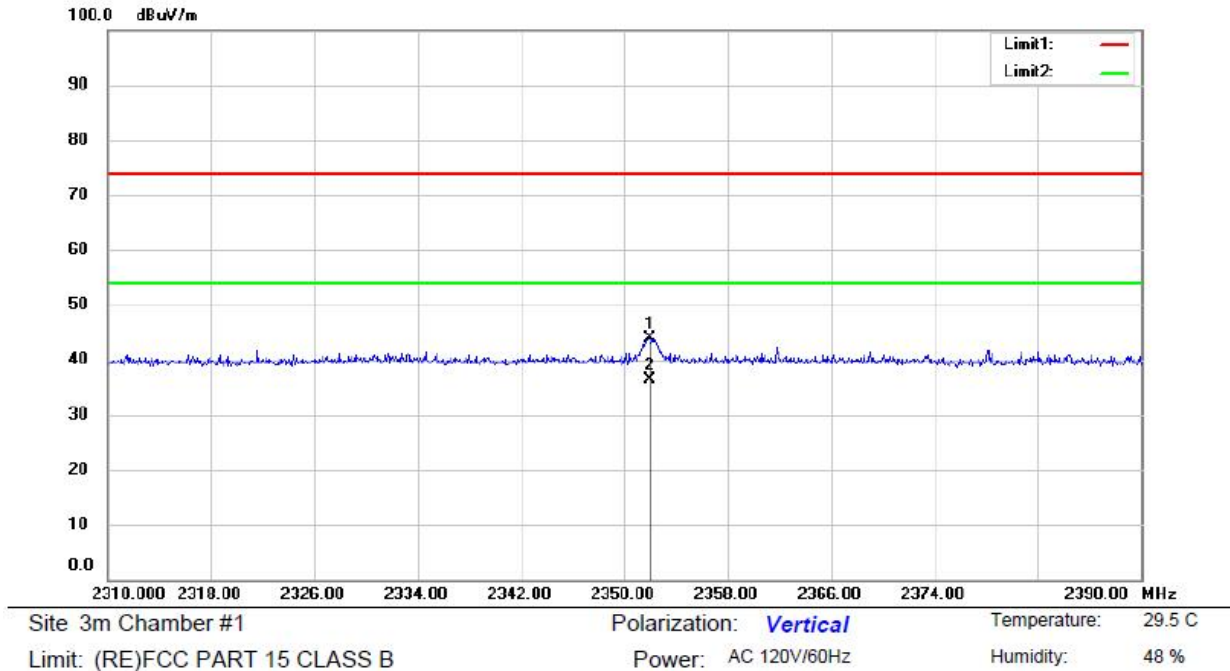


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	Bluetooth V4.0		
	Channel 78: 2480MHz	GFSK	H
Test By: King Kong			

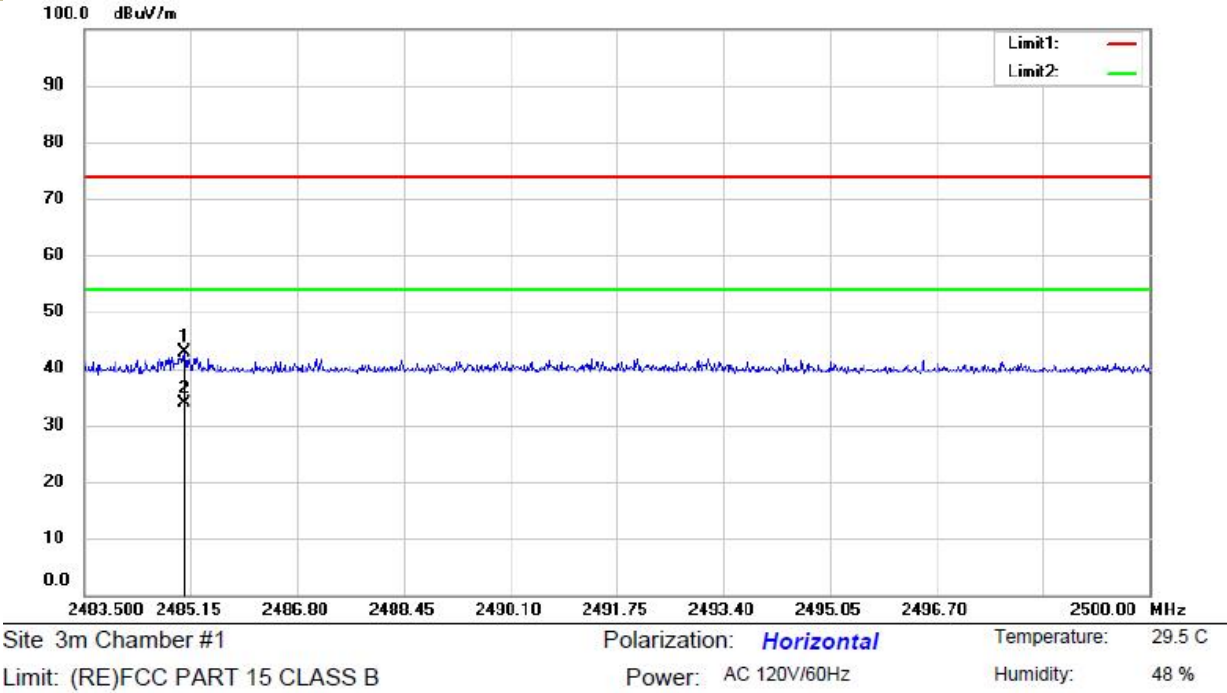


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	Bluetooth V4.0		
	Channel 78: 2480MHz	GFSK	V
Test By: King Kong			

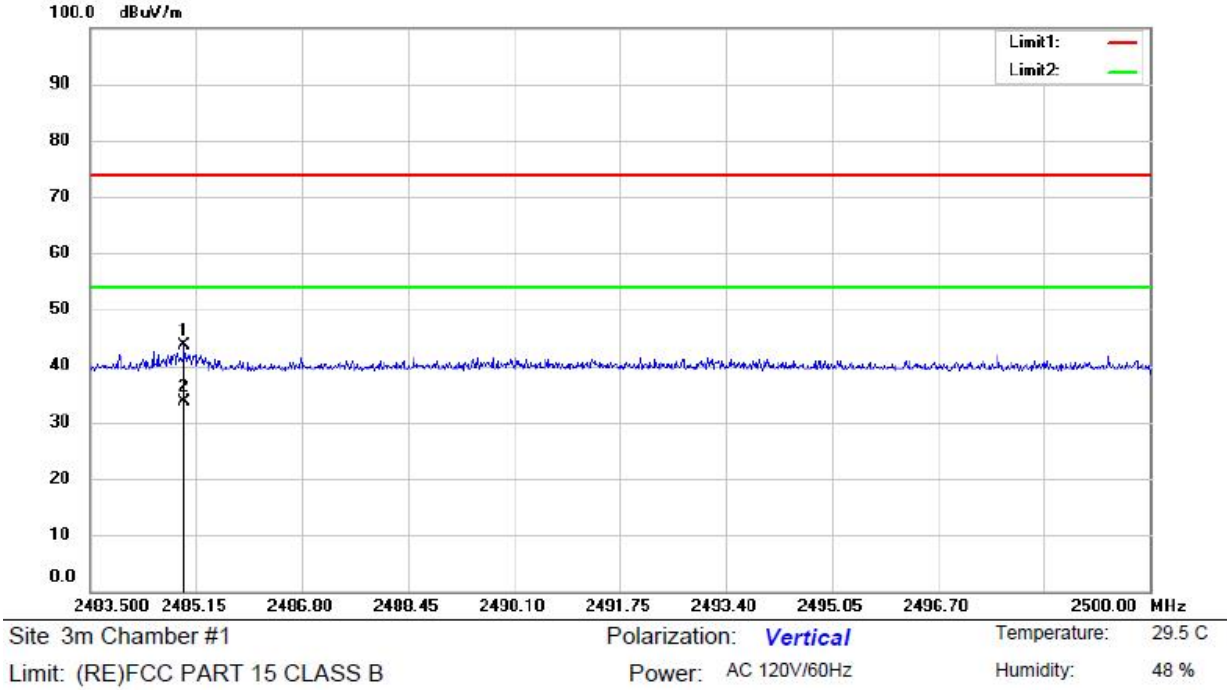

Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz	
	Bluetooth V4.0	
	Hopping	
	GFSK	H
	Test By: King Kong	

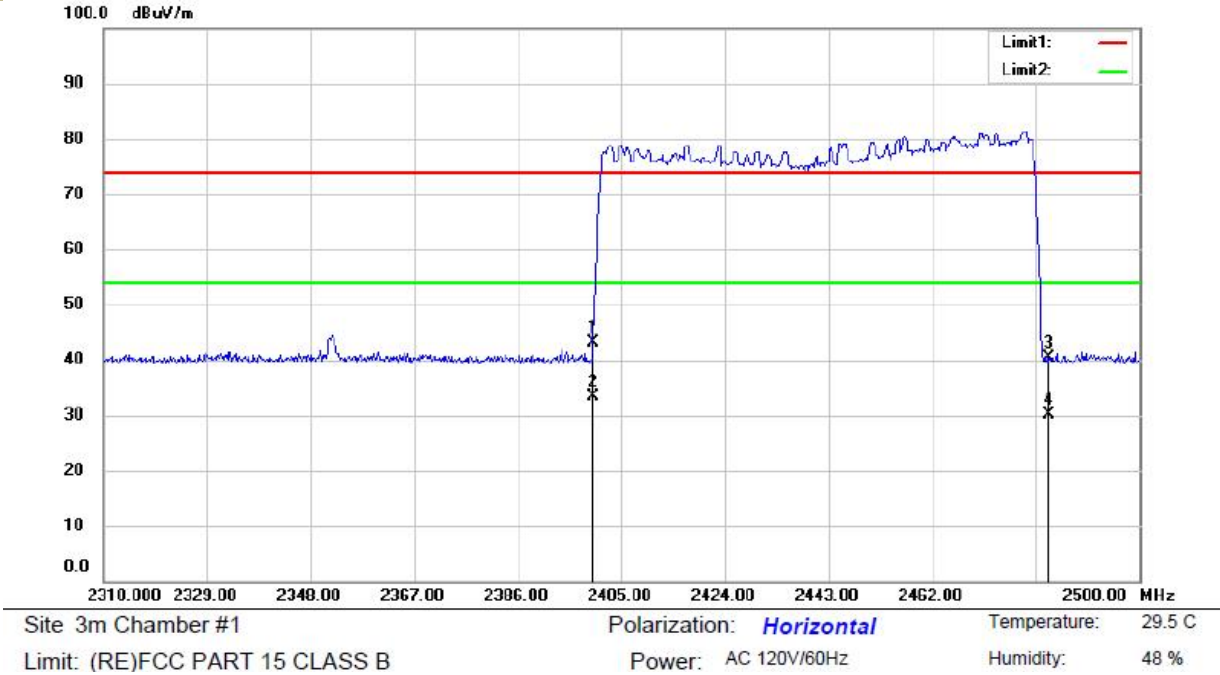

Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz	
	Bluetooth V4.0	
	Hopping	
	GFSK	V
	Test By: King Kong	

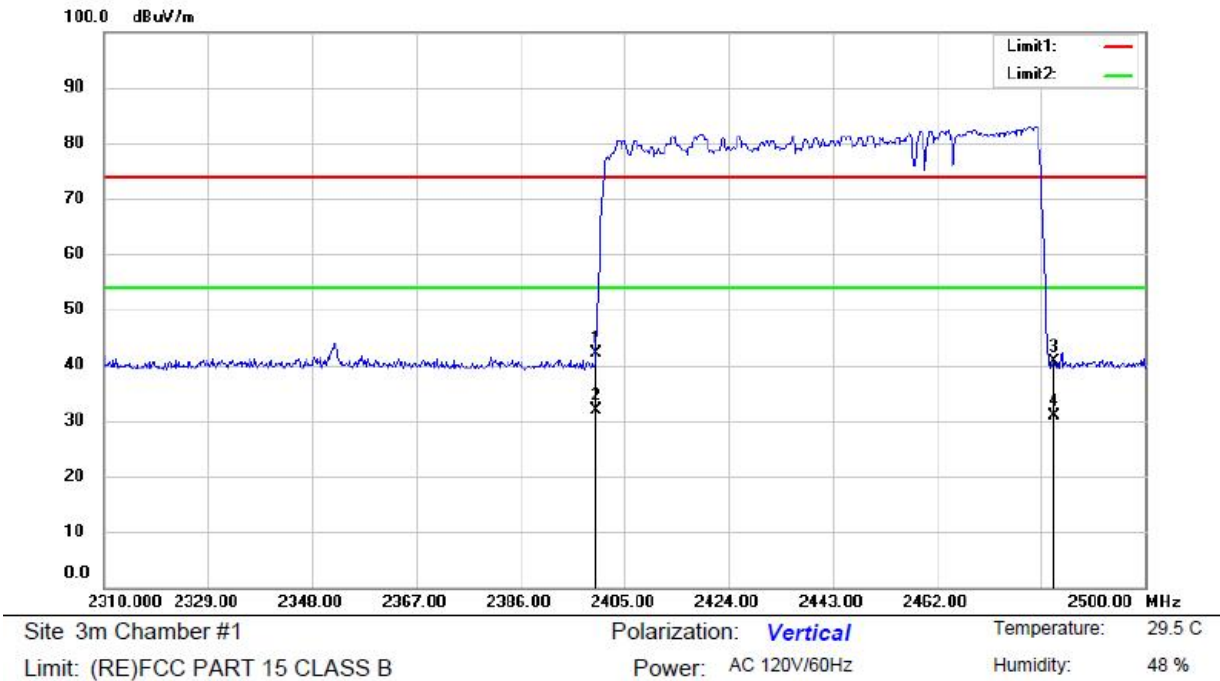

n Spurious Emission below 1GHz (30MHz to 1GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:



Site:..	Antenna::Vertical,	Temperature(C):24.5(C),
Limit:.. FCC Part 15 C 30-1Ghz,		Humidity(%):55%,
EUT:.. Bluetooth Speaker,	Test Time:..	2022/1/5,
M/N:.. PTUV-02,	Power Rating:..	AC 120V/60Hz,
Mode:.. BT 2402,	Test Engineer:..	Jack,
Note:..		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	30.1054	30.83	0.26	31.09	40.00	-8.91	QP			
2	45.8553	40.76	-7.46	33.30	40.00	-6.70	QP			
3	55.2207	46.18	-12.41	33.77	40.00	-6.23	QP			
4	60.0691	47.03	-14.77	32.26	40.00	-7.74	QP			
5 *	116.1321	42.57	-3.57	39.00	43.50	-4.50	QP			
6	163.1818	34.61	-4.72	29.89	43.50	-13.61	QP			

*:Maximum data x:Over limit !:over margin



Site:..	Antenna::Horizontal..	Temperature(C):24.5(C)...
Limit:..	FCC Part 15 C 30-1Ghz..	Humidity(%):55%..
EUT:..	Bluetooth Speaker..	Test Time:..
M/N:..	PTUV-02..	Power Rating:..
Mode:..	BT 2402..	Test Engineer:..
Note:..		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	51.6616	37.86	-10.66	27.20	40.00	-12.80	QP			
2 *	59.8588	50.99	-14.71	36.28	40.00	-3.72	QP			
3	82.6482	40.08	-10.35	29.73	40.00	-10.27	QP			
4	116.9495	36.05	-3.48	32.57	43.50	-10.93	QP			
5	137.9028	34.85	-2.72	32.13	43.50	-11.37	QP			
6	176.2686	41.44	-6.33	35.11	43.50	-8.39	QP			

*:Maximum data x:Over limit !:over margin



Site: .	Antenna::Vertical .	Temperature(C):24.5(C) .
Limit: . FCC Part 15 C 30-1Ghz .	Humidity(%):55% .	
EUT: . Bluetooth Speaker .	Test Time: . 2022/1/5 .	
M/N: . PTUV-02 .	Power Rating: . AC 120V/60Hz .	
Mode: . BT 2441 .	Test Engineer: . Jack .	
Note: .		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	30.4238	30.49	-0.08	30.41	40.00	-9.59	QP			
2	33.4449	32.17	-3.38	28.79	40.00	-11.21	QP			
3	44.1202	37.85	-6.63	31.22	40.00	-8.78	QP			
4	50.5860	43.40	-10.12	33.28	40.00	-6.72	QP			
5	55.2207	43.68	-12.41	31.27	40.00	-8.73	QP			
6 *	116.9495	40.86	-3.48	37.38	43.50	-6.12	QP			

*:Maximum data x:Over limit !:over margin



Site: ,	Antenna::Horizontal ,	Temperature(C):24.5(C) ,
Limit: ,	FCC Part 15 C 30-1Ghz ,	Humidity(%):55% ,
EUT: ,	Bluetooth Speaker ,	Test Time: ,
M/N: ,	PTUV-02 ,	Power Rating: ,
Mode: ,	BT 2441 ,	Test Engineer: ,
Note: ,		

No. ,	Frequency , (MHz) ,	Reading , (dBuV) ,	Factor , (dB/m) ,	Level , (dBuV/m) ,	Limit , (dBuV/m) ,	Margin , (dB) ,	Det. ,	,	,	,
1 ,	45.6948 ,	31.93 ,	-7.37 ,	24.56 ,	40.00 ,	-15.44 ,	QP ,	,	,	,
2 * ,	59.8588 ,	51.50 ,	-14.71 ,	36.79 ,	40.00 ,	-3.21 ,	QP ,	,	,	,
3 ,	81.2117 ,	39.24 ,	-10.63 ,	28.61 ,	40.00 ,	-11.39 ,	QP ,	,	,	,
4 ,	117.7725 ,	36.37 ,	-3.40 ,	32.97 ,	43.50 ,	-10.53 ,	QP ,	,	,	,
5 ,	136.9391 ,	34.02 ,	-2.78 ,	31.24 ,	43.50 ,	-12.26 ,	QP ,	,	,	,
6 ,	175.0368 ,	42.04 ,	-6.13 ,	35.91 ,	43.50 ,	-7.59 ,	QP ,	,	,	,

*:Maximum data x:Over limit !:over margin



Site: ,	Antenna::Vertical ,	Temperature(C):24.5(C) ,
Limit: ,	FCC Part 15 C 30-1Ghz ,	Humidity(%):55% ,
EUT: ,	Bluetooth Speaker ,	Test Time: ,
M/N: ,	PTUV-02 ,	Power Rating: ,
Mode: ,	BT 2480 ,	Test Engineer: ,
Note: ,		Jack ,

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	31.7313	35.30	-1.51	33.79	40.00	-6.21	QP			
2 !	40.2757	39.55	-5.14	34.41	40.00	-5.59	QP			
3	47.8260	41.64	-8.59	33.05	40.00	-6.95	QP			
4 *	56.0007	47.32	-12.80	34.52	40.00	-5.48	QP			
5	115.3205	41.06	-3.65	37.41	43.50	-6.09	QP			
6	197.2001	35.68	-7.06	28.62	43.50	-14.88	QP			

*:Maximum data x:Over limit !:over margin



Site: ,	Antenna: Horizontal ,	Temperature(C): 24.5(C) ,
Limit: ,	FCC Part 15 C 30-1Ghz ,	Humidity(%): 55% ,
EUT: ,	Bluetooth Speaker ,	Test Time: ,
M/N: ,	PTUV-02 ,	Power Rating: ,
Mode: ,	BT 2480 ,	Test Engineer: ,
Note: ,		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	39.8542	26.42	-5.03	21.39	40.00	-18.61	QP			
2	50.2324	40.02	-9.95	30.07	40.00	-9.93	QP			
3	57.5939	42.11	-13.59	28.52	40.00	-11.48	QP			
4	82.3588	38.60	-10.41	28.19	40.00	-11.81	QP			
5	117.3603	36.11	-3.44	32.67	43.50	-10.83	QP			
6 *	171.9946	42.86	-5.61	37.25	43.50	-6.25	QP			

*:Maximum data x:Over limit !:over margin

8.8 CONDUCTED EMISSION TEST

8.8.1 Applicable Standard

According to FCC Part 15.207(a)

8.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

8.8.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


8.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.8.5 Test Results

Pass


The 120V &240V voltage have been tested, and the worst result recorded was report as below:

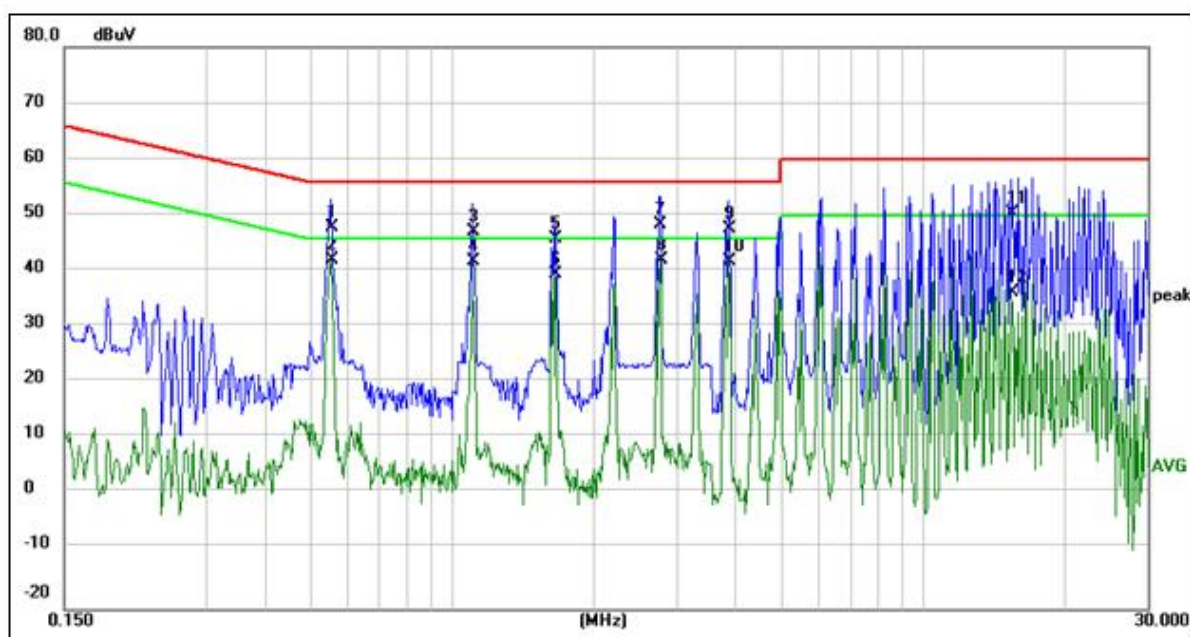

Site: .	Phase: N .	Temperature(C): 24.5(C) .
Limit: .	FCC Part 15C Conduction(QP) .	Humidity(%): 55% .
EUT: .	Bluetooth Speaker .	Test Time: .
M/N: .	PTUV-02 .	Power Rating: .
Mode: .	BT Mode .	Test Engineer: .
Note: .		Jack .

No. .	Frequency . (MHz) .	Reading . Level(dBuV) .	Factor . (dB) .	Measure- . ment(dBuV) .	Limit . (dBuV) .	Margin . (dB) .	Detector .	Comment .
1 .	0.5540 .	38.09 .	9.91 .	48.00 .	56.00 .	-8.00 .	QP .	. .
2 .	0.5540 .	32.23 .	9.91 .	42.14 .	46.00 .	-3.86 .	AVG .	. .
3 .	1.1100 .	37.11 .	10.07 .	47.18 .	56.00 .	-8.82 .	QP .	. .
4 .	1.1100 .	31.78 .	10.07 .	41.85 .	46.00 .	-4.15 .	AVG .	. .
5 .	1.6620 .	35.88 .	10.02 .	45.90 .	56.00 .	-10.10 .	QP .	. .
6 .	1.6620 .	29.69 .	10.02 .	39.71 .	46.00 .	-6.29 .	AVG .	. .
7 .	2.7620 .	38.39 .	10.01 .	48.40 .	56.00 .	-7.60 .	QP .	. .
8 * .	2.7659 .	32.21 .	10.01 .	42.22 .	46.00 .	-3.78 .	AVG .	. .
9 .	3.8660 .	37.78 .	10.01 .	47.79 .	56.00 .	-8.21 .	QP .	. .
10 .	3.8660 .	31.99 .	10.01 .	42.00 .	46.00 .	-4.00 .	AVG .	. .
11 .	15.4539 .	40.41 .	10.03 .	50.44 .	60.00 .	-9.56 .	QP .	. .
12 .	15.4539 .	26.43 .	10.03 .	36.46 .	50.00 .	-13.54 .	AVG .	. .

*:Maximum data x:Over limit !:over margin

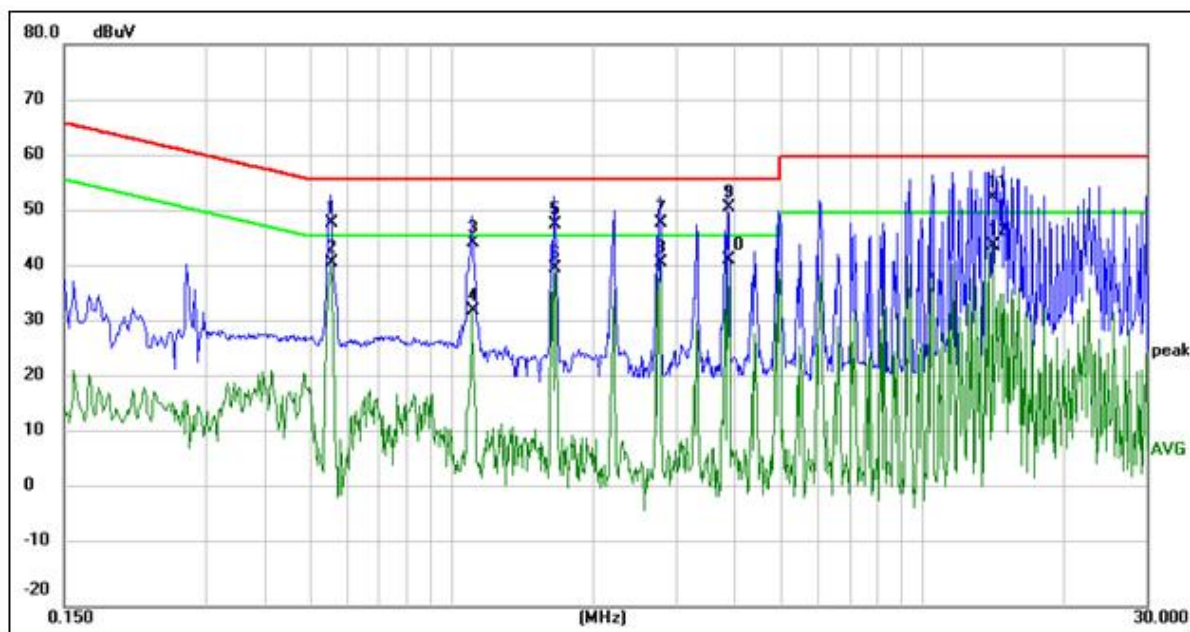

Site: .	Phase: L1 .	Temperature(C): 24.5(C) .
Limit: .	FCC Part 15C Conduction(QP) .	Humidity(%): 55% .
EUT: .	Bluetooth Speaker .	Test Time: .
M/N: .	PTUV-02 .	Power Rating: .
Mode: .	BT Mode .	Test Engineer: .
Note: .		Jack .

No. .	Frequency . (MHz) .	Reading . Level(dBuV) .	Factor . (dB) .	Measure- . ment(dBuV) .	Limit . (dBuV) .	Margin . (dB) .	Detector .	Comment .
1 .	0.5540 .	38.43 .	9.91 .	48.34 .	56.00 .	-7.66 .	QP .	. .
2 .	0.5540 .	31.34 .	9.91 .	41.25 .	46.00 .	-4.75 .	AVG .	. .
3 .	1.1060 .	34.53 .	10.07 .	44.60 .	56.00 .	-11.40 .	QP .	. .
4 .	1.1060 .	22.65 .	10.07 .	32.72 .	46.00 .	-13.28 .	AVG .	. .
5 .	1.6620 .	37.90 .	10.02 .	47.92 .	56.00 .	-8.08 .	QP .	. .
6 .	1.6620 .	30.17 .	10.02 .	40.19 .	46.00 .	-5.81 .	AVG .	. .
7 .	2.7659 .	38.10 .	10.01 .	48.11 .	56.00 .	-7.89 .	QP .	. .
8 .	2.7659 .	31.24 .	10.01 .	41.25 .	46.00 .	-4.75 .	AVG .	. .
9 .	3.8740 .	40.98 .	10.01 .	50.99 .	56.00 .	-5.01 .	QP .	. .
10 * .	3.8740 .	31.55 .	10.01 .	41.56 .	46.00 .	-4.44 .	AVG .	. .
11 .	14.1939 .	42.66 .	10.02 .	52.68 .	60.00 .	-7.32 .	QP .	. .
12 .	14.1939 .	34.29 .	10.02 .	44.31 .	50.00 .	-5.69 .	AVG .	. .

*:Maximum data x:Over limit !:over margin

8.9 ANTENNA APPLICATION

8.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.9.2 Result

PASS.

The EUT has 1 antenna: a Internal Antenna for BT V4.0 with classic model, the gain is 0 dBi;

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

----- END OF REPORT -----