

FCC PART 15.247 TEST REPORT

For

George Robotics Limited

Salisbury House, Station Road, Cambridge, United Kingdom

FCC ID: 2AT9I-PYBD

Report Type: Original Report	Product Type: PYBD-SF2W
Test Engineer: Jack Jiao <i>Jack Jiao</i>	
Report Number: RSHA190521001-00C	
Report Date: 2019-09-19	
Reviewed By:	Oscar Ye <i>Oscar Ye</i> RF Leader
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	14
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	48

APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST DATA	51
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	67
APPLICABLE STANDARD	67
TEST PROCEDURE	67
TEST DATA	67
FCC §15.247(d) - BAND EDGES TESTING	74
APPLICABLE STANDARD	74
TEST PROCEDURE	74
TEST DATA	74

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	George Robotics Limited
Tested Model	PYBD-SF2W
Series Model:	PYBD-SF3W, PYBD-SF6W, PYBD-SH3W, PYBD-SH0W
Model Difference:	Model type of the MCU mounted
Product Type	PYBD-SF2W
Dimension	33.5mm (L)* 23.8mm (W)* 7mm(H)
Power Supply	DC 5.0V

**All measurement and test data in this report was gathered from production sample serial number: 20190521001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-05-21)*

Objective

This test report is prepared on behalf of *George Robotics Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: 2AT9I-PYBD.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for BT3.0:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

Note: the difference of models cannot affect the radio parameters. we only tested SF2W mode. The difference test show in the part 15B SDoC report.

EUT Exercise Software

RF test software: cmd.ext

GFSK, $\pi/4$ -DQPSK , 8DPSK Power level: Default.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Dell	Notebook	E6410	3094742521
Logitech	Mouse	M-U0026	HS529HB
DELL	Adapter	LA65NS0-00	DF263

External I/O Cable


Cable Description	Length (m)	From Port	To
RF Cable	0.3	EUT	Notebook
USB Cable	0.8	Notebook	Mouse
Power Cable	1.0	Notebook	Adapter
Power Cable	1.0	Adapter	AC Source

Block Diagram of Test Setup


For Conducted Emissions:

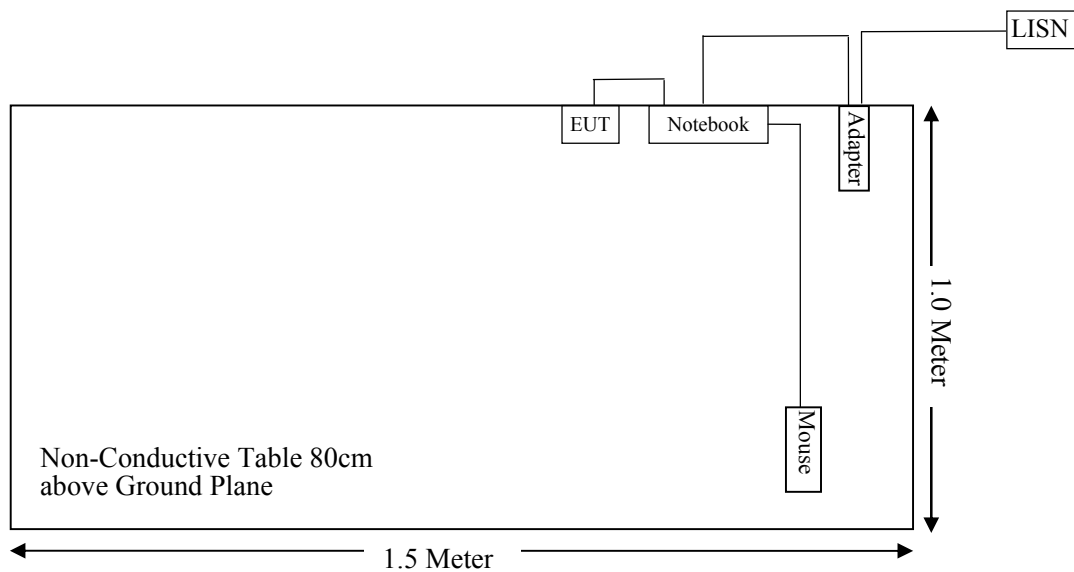

For Radiated Emissions(Below 1GHz):

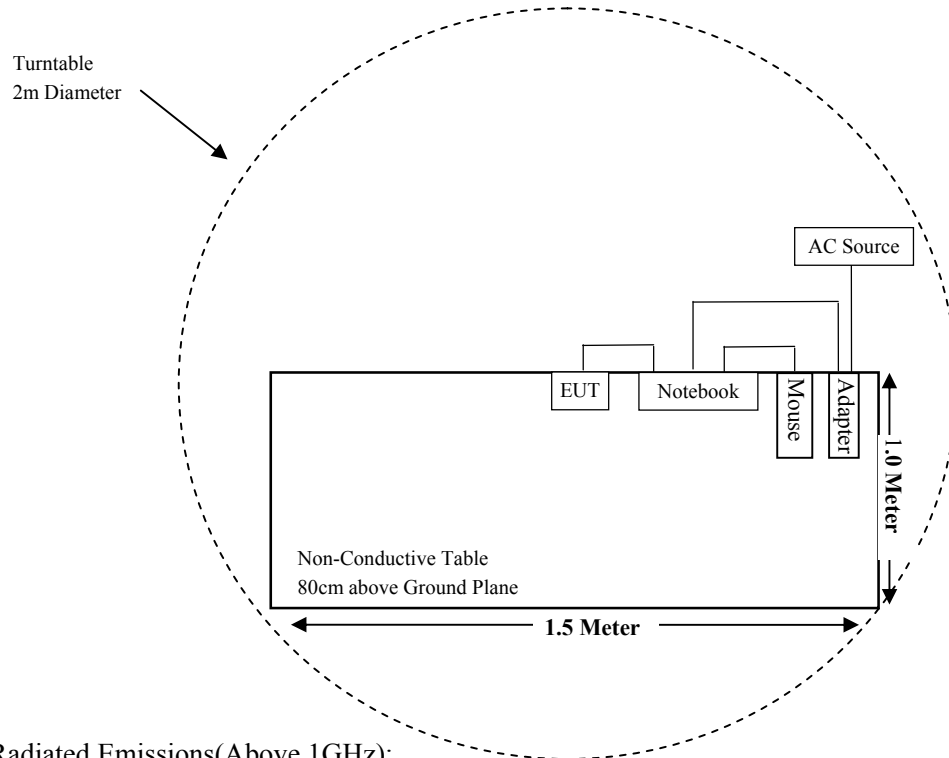

For Radiated Emissions(Above 1GHz):

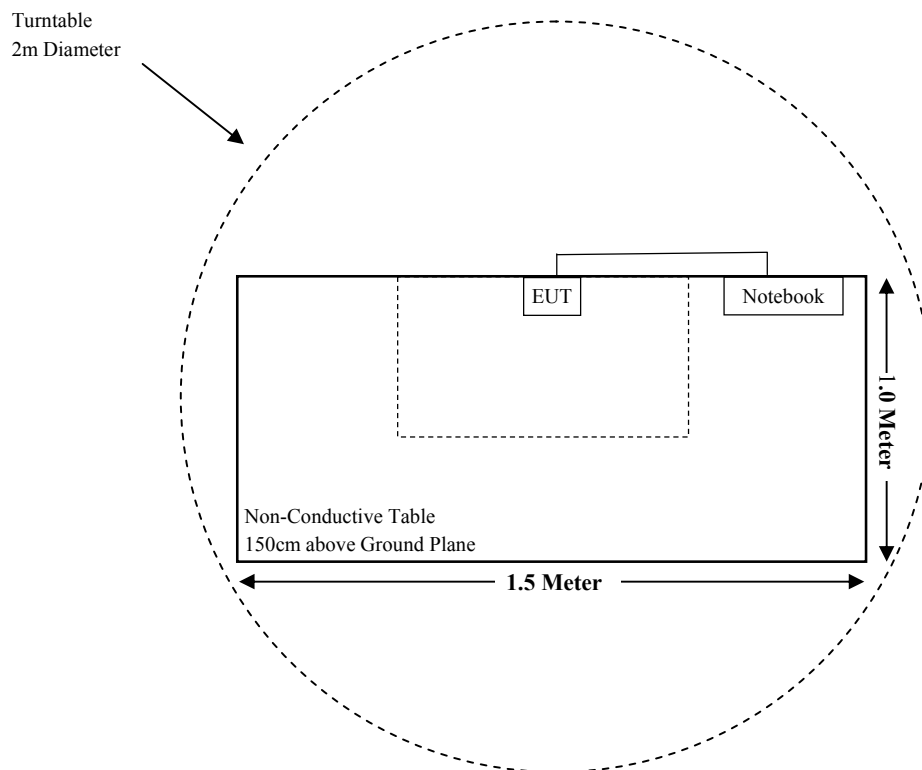

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-102454-Qd	2019-06-25	2020-06-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
George	RF Cable	George C01	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	--	--
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412~2462	2.2	1.66	11.00	12.59	20	0.0042	1.0
802.11g		2.2	1.66	11.00	12.59	20	0.0042	1.0
802.11n-HT20		2.2	1.66	10.00	10.00	20	0.0033	1.0
BLE	2402~2480	2.2	1.66	3.00	2.00	20	0.0007	1.0
BT3.0	2402~2480	2.2	1.66	0.00	1.00	20	0.0003	1.0

Note: (1) For the above Tune-up Conducted power were all declared by the manufacturer.

(2) Wi-Fi and BLE can't transmit simultaneously.

Conclusion: The EUT meets exemption requirement - RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


Antenna Connector Construction

The EUT has two antennas for Bluetooth, which was permanently attached; fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Antenna Type	Max. Antenna Gain
0	Dipole	2.2dBi
1	Ceramic	2.2dBi

Result: Compliant.

EUT Setup



The spacing between the peripherals was 10 cm.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over Limit of 7dB means the emission is 7 dB above the limit. The equation for over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	22°C
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Jack Jiao on 2019-08-03.


Test Result: Compliant.

EUT operation mode: Transmitting in low channel for ANT1 (worst case)

AC 120V/60 Hz, Line

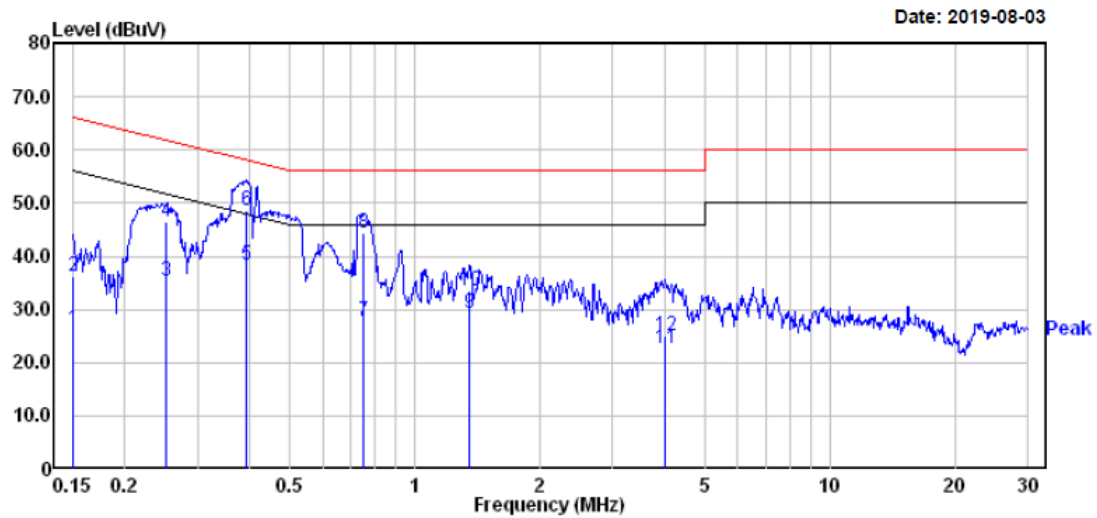

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	6.30	19.82	26.12	56.00	-29.88	Average
2	0.150	16.40	19.82	36.22	66.00	-29.78	QP
3	0.251	15.50	19.82	35.32	51.73	-16.41	Average
4	0.251	26.80	19.82	46.62	61.73	-15.11	QP
5	0.393	18.70	19.75	38.45	47.99	-9.54	Average
6	0.393	29.00	19.75	48.75	57.99	-9.24	QP
7	0.755	8.00	19.72	27.72	46.00	-18.28	Average
8	0.755	24.60	19.72	44.32	56.00	-11.68	QP
9	1.352	9.50	19.83	29.33	46.00	-16.67	Average
10	1.352	13.60	19.83	33.43	56.00	-22.57	QP
11	4.006	3.10	19.47	22.57	46.00	-23.43	Average
12	4.006	5.50	19.47	24.97	56.00	-31.03	QP

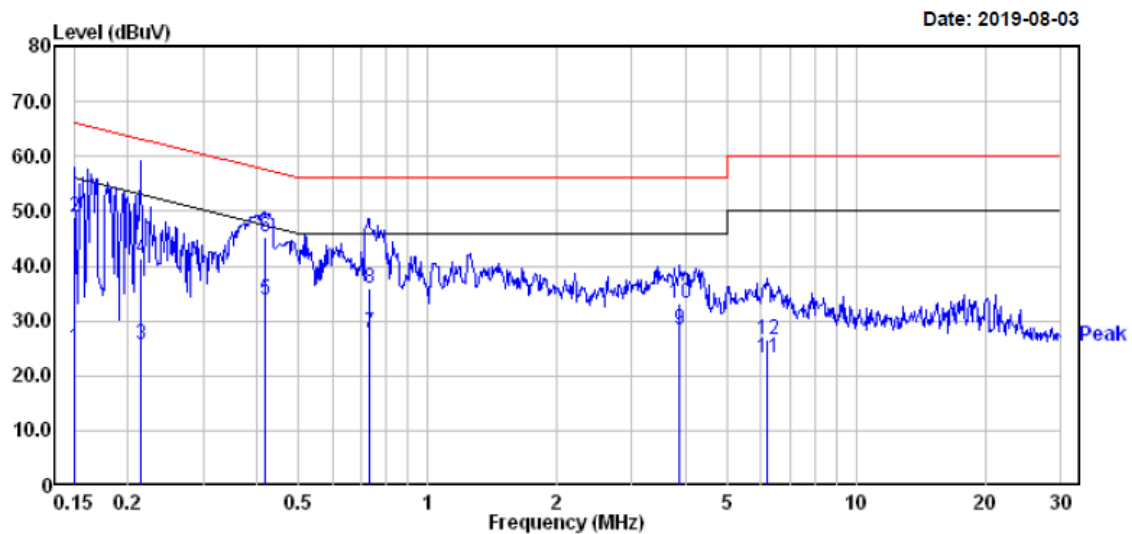AC 120V/60 Hz, Neutral

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	5.20	19.82	25.02	56.00	-30.98	Average
2	0.150	29.10	19.82	48.92	66.00	-17.08	QP
3	0.214	5.90	19.82	25.72	53.05	-27.33	Average
4	0.214	21.50	19.82	41.32	63.05	-21.73	QP
5	0.419	14.10	19.74	33.84	47.46	-13.62	Average
6	0.419	25.50	19.74	45.24	57.46	-12.22	QP
7	0.731	8.10	19.73	27.83	46.00	-18.17	Average
8	0.731	16.30	19.73	36.03	56.00	-19.97	QP
9	3.881	8.80	19.47	28.27	46.00	-17.73	Average
10	3.881	13.60	19.47	33.07	56.00	-22.93	QP
11	6.186	3.70	19.51	23.21	50.00	-26.79	Average
12	6.186	7.20	19.51	26.71	60.00	-33.29	QP



Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

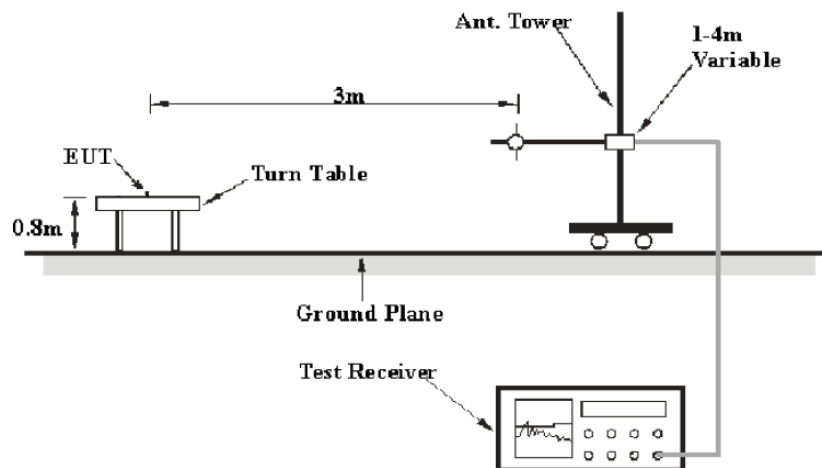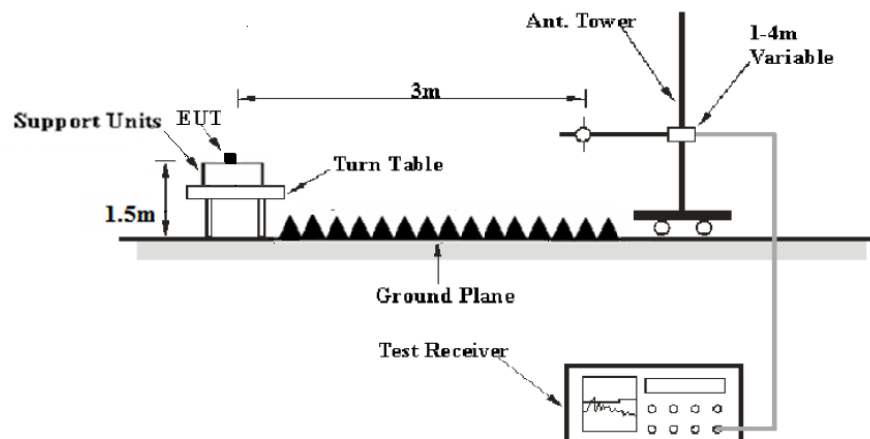EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	/	QP	120 kHz	QP
1GHz-18GHz	1MHz	3 MHz	PK	/	PK
	1MHz	10 Hz	PK	/	Ave.
18GHz-25GHz	1MHz	3 MHz	PK	/	PK
	1MHz	3 MHz	Ave.	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	24.8 °C
Relative Humidity:	48%
ATM Pressure:	101.2kPa

The testing was performed by Jack Jiao from 2019-07-03 to 2019-08-02.


EUT operation mode: Transmitting

Spurious Emission Test:

ANT1:

30MHz-1GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case low channel of GFSK Mode in Z-axis of orientation was recorded

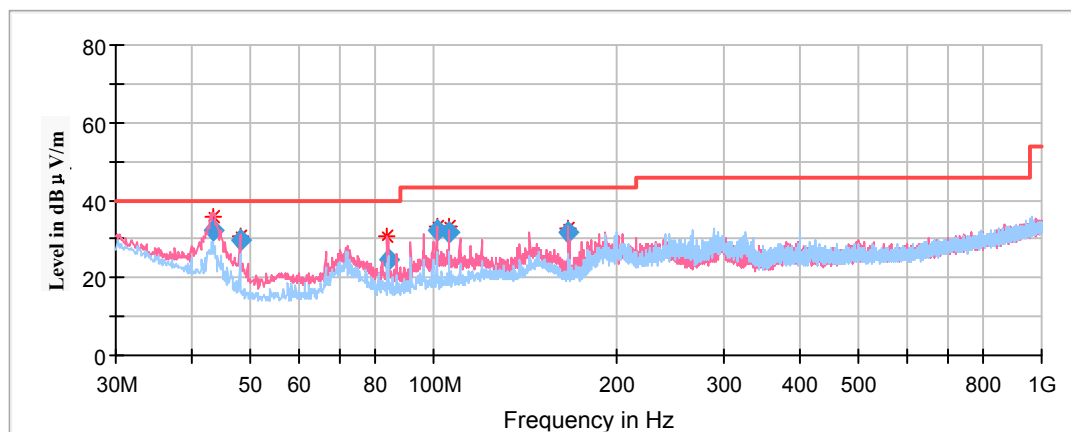

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
43.274950	32.14	101.0	V	324.0	-12.9	40.00	7.86
47.990900	29.61	101.0	V	177.0	-16.1	40.00	10.39
84.024350	24.61	101.0	V	353.0	-17.7	40.00	15.39
101.140700	32.18	101.0	V	256.0	-14.7	43.50	11.32
105.838850	31.52	101.0	V	272.0	-13.8	43.50	11.98
166.475000	31.53	101.0	V	0.0	-13.0	43.50	11.97

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in Z-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

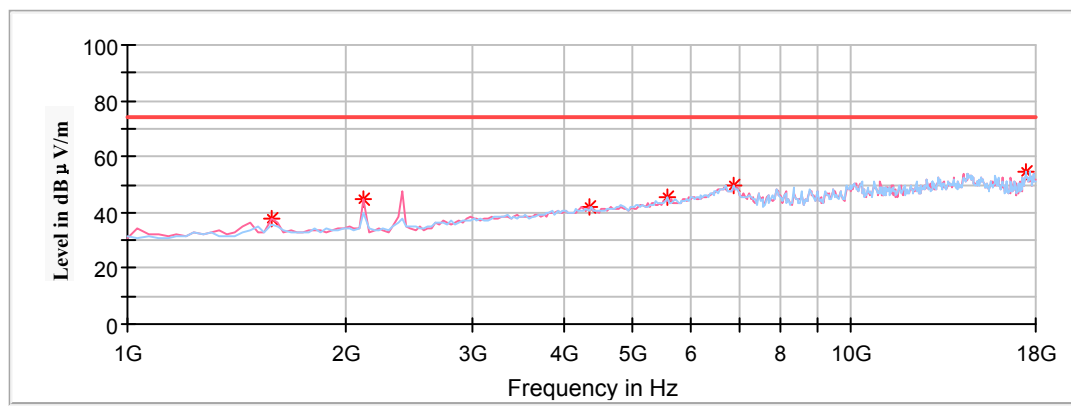

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1579.160000	---	26.36	250	V	340	-9.7	54.00	27.64
1579.160000	37.71	---	250	V	340	-9.7	74.00	36.29
2124.250000	---	33.64	250	V	292	-7.9	54.00	20.36
2124.250000	44.92	---	250	V	292	-7.9	74.00	29.08
4338.680000	---	31.26	200	V	112	-1.3	54.00	22.74
4338.680000	42.19	---	200	V	112	-1.3	74.00	31.81
5565.130000	---	34.25	100	H	115	1.5	54.00	19.75
5565.130000	45.76	---	100	H	115	1.5	74.00	28.24
6893.790000	---	39.15	200	V	343	5.1	54.00	14.85
6893.790000	49.71	---	200	V	343	5.1	74.00	24.29
17454.910000	---	43.69	100	H	241	14.0	54.00	10.31
17454.910000	54.64	---	100	H	241	14.0	74.00	19.36

Middle Channel: 2441MHz


Full Spectrum

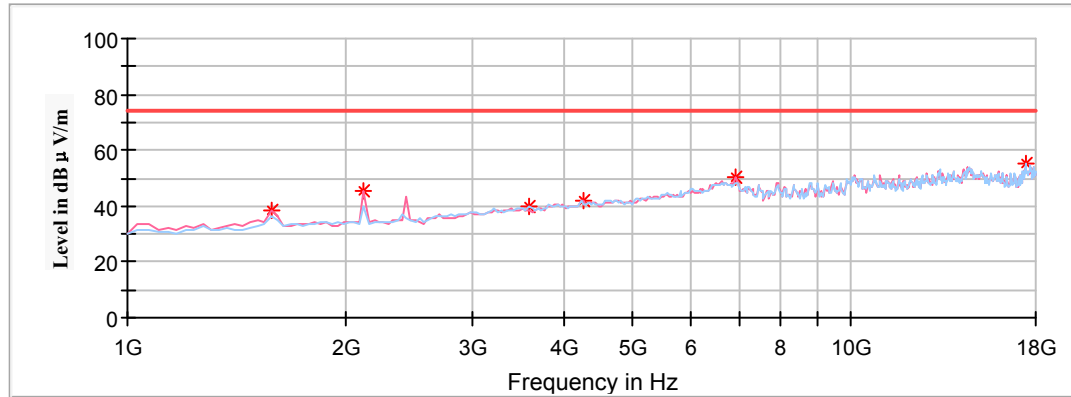

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1579.160000	---	27.26	250	V	0	-9.7	54.00	26.74
1579.160000	38.60	---	250	V	0	-9.7	74.00	35.40
2124.250000	---	34.25	250	V	14	-7.9	54.00	19.75
2124.250000	45.33	---	250	V	14	-7.9	74.00	28.67
3589.180000	---	28.25	200	V	30	-3.2	54.00	25.75
3589.180000	39.76	---	200	V	30	-3.2	74.00	34.24
4270.540000	---	31.43	100	H	324	-1.4	54.00	22.57
4270.540000	42.11	---	100	H	324	-1.4	74.00	31.89
6927.860000	---	40.32	200	V	87	5.2	54.00	13.68
6927.860000	50.10	---	200	V	87	5.2	74.00	23.90
17420.840000	---	44.36	100	H	226	13.9	54.00	9.64
17420.840000	55.02	---	100	H	226	13.9	74.00	18.98

High Channel: 2480MHz


Full Spectrum

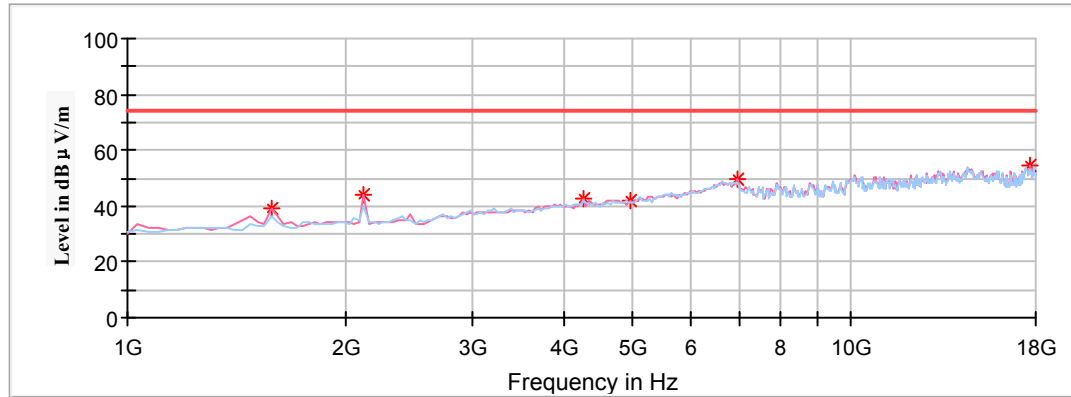


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1579.160000	---	28.36	250	V	234	-9.7	54.00	25.64
1579.160000	39.19	---	250	V	234	-9.7	74.00	34.81
2124.250000	---	34.25	250	V	341	-7.9	54.00	19.75
2124.250000	44.39	---	250	V	341	-7.9	74.00	29.61
4270.540000	---	31.29	200	V	354	-1.4	54.00	22.71
4270.540000	42.33	---	200	V	354	-1.4	74.00	31.67
4951.900000	---	31.05	100	H	295	-0.3	54.00	22.95
4951.900000	42.13	---	100	H	295	-0.3	74.00	31.87
6961.920000	---	38.64	200	V	23	5.3	54.00	15.36
6961.920000	49.35	---	200	V	23	5.3	74.00	24.65
17693.390000	---	43.69	100	H	135	14.0	54.00	10.31
17693.390000	54.29	---	100	H	135	14.0	74.00	19.71

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case low channel of GFSK Mode in Z-axis of orientation was recorded

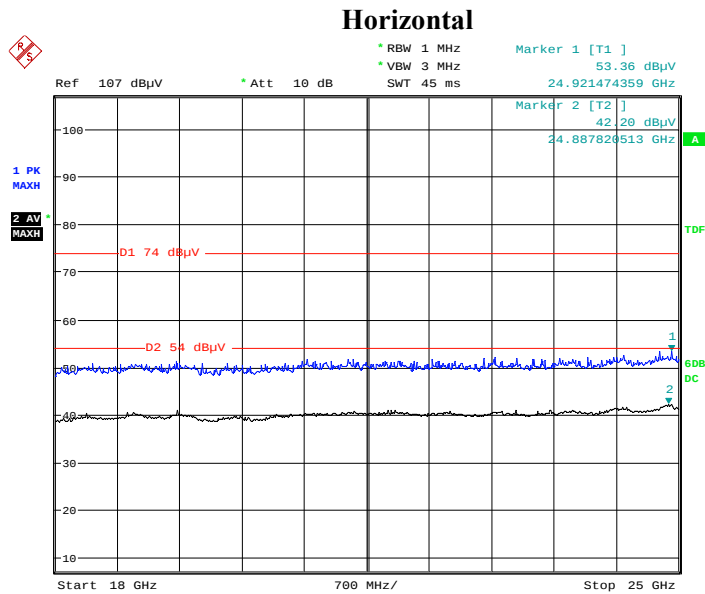

Date: 2.AUG.2019 10:49:21

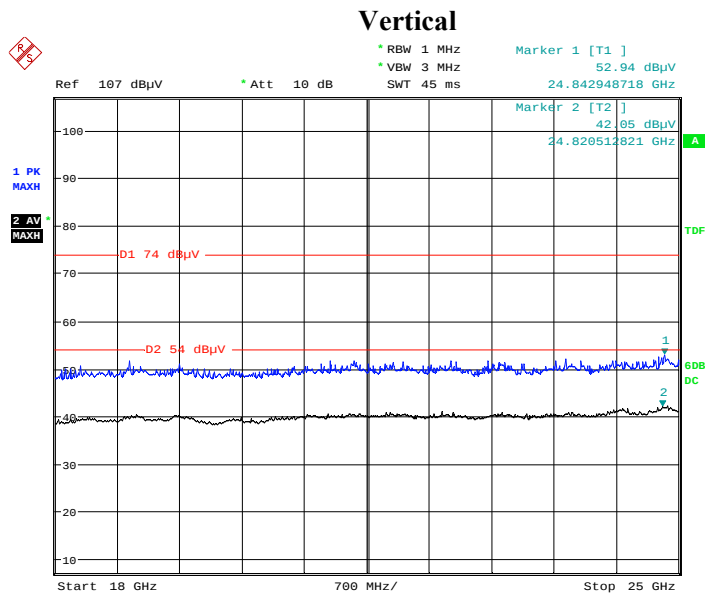

Date: 2.AUG.2019 08:24:15

Fundamental Test & Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in Z-axis of orientation was recorded

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	---	34.23	100	V	289	2.8	54.00	19.77
2390.000000	44.87	---	100	V	289	2.8	74.00	29.13
High Channel: 2480MHz								
2483.500000	---	35.98	100	V	204	3.0	54.00	18.02
2483.500000	46.36	---	100	V	204	3.0	74.00	27.64

ANT2:**30MHz-1GHz:**

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of GFSK Mode in Z-axis of orientation was recorded

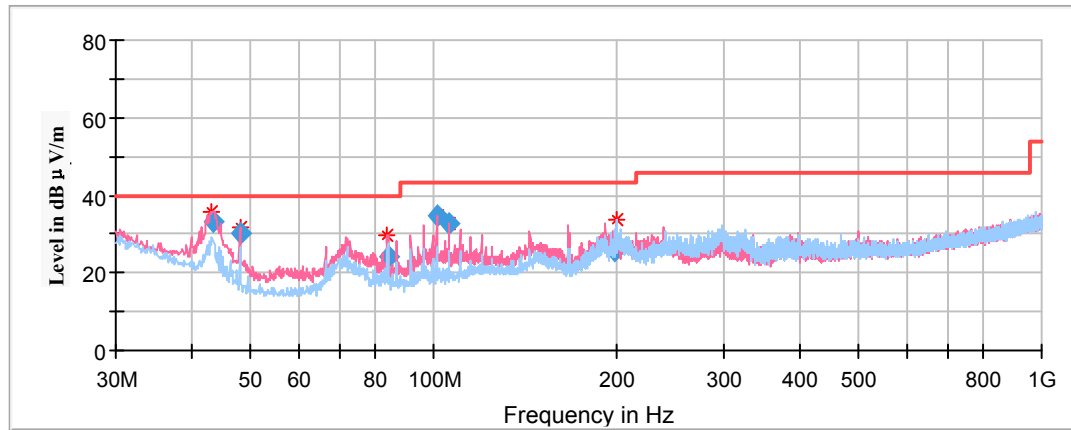

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
43.261650	33.27	101.0	V	221.0	-12.9	40.00	6.73
47.993600	30.15	101.0	V	61.0	-16.1	40.00	9.85
84.080500	24.23	101.0	V	8.0	-17.7	40.00	15.77
101.136200	34.52	101.0	V	311.0	-14.7	43.50	8.98
105.860150	32.93	101.0	V	263.0	-13.8	43.50	10.57
198.726050	25.78	101.0	H	325.0	-12.4	43.50	17.72

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in Z-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

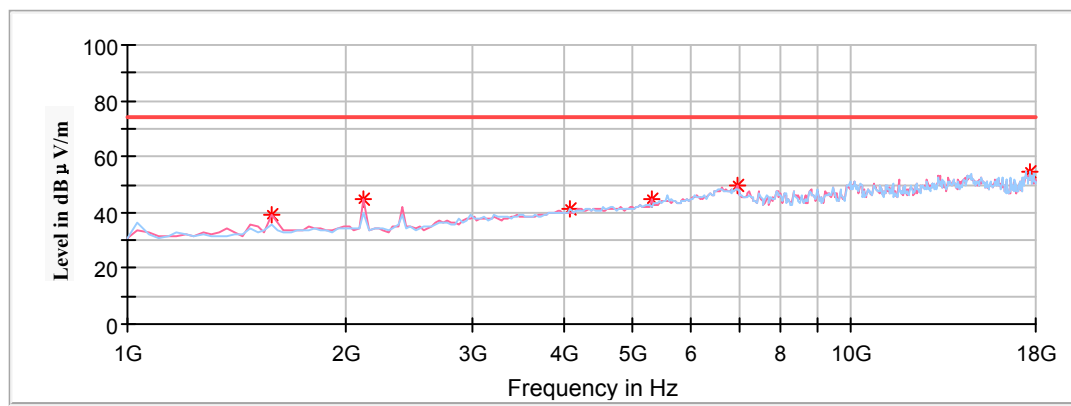

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1579.160000	---	37.26	250	V	327	-9.7	54.00	16.74
1579.160000	38.90	---	250	V	327	-9.7	74.00	35.10
2124.250000	---	34.36	250	V	317	-7.9	54.00	19.64
2124.250000	44.77	---	250	V	317	-7.9	74.00	29.23
4100.200000	---	30.12	200	V	126	-1.7	54.00	23.88
4100.200000	41.50	---	200	V	126	-1.7	74.00	32.50
5292.590000	---	32.68	100	H	315	0.7	54.00	21.32
5292.590000	44.42	---	100	H	315	0.7	74.00	29.58
6961.920000	---	38.88	200	V	11	5.3	54.00	15.12
6961.920000	49.40	---	200	V	11	5.3	74.00	24.60
17659.320000	---	43.69	100	H	185	14.0	54.00	10.31
17659.320000	54.84	---	100	H	185	14.0	74.00	19.16

Middle Channel: 2441MHz


Full Spectrum

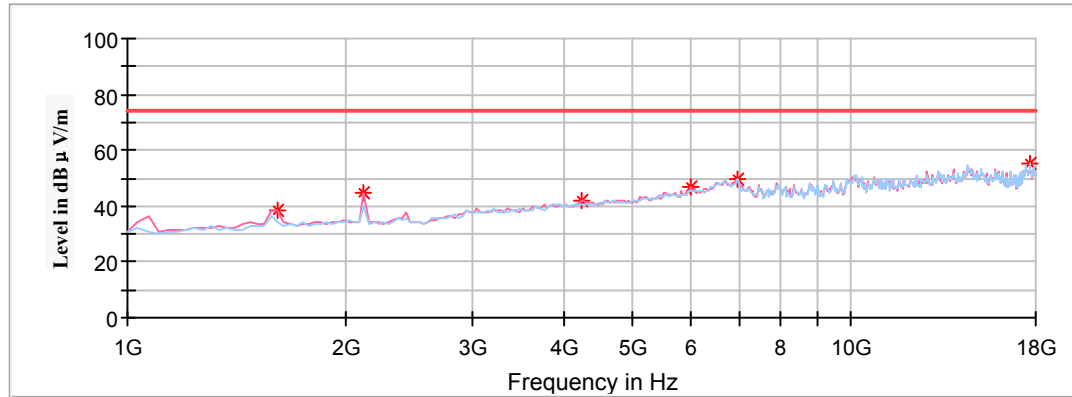

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1613.230000	---	27.36	250	V	296	-9.5	54.00	26.64
1613.230000	38.63	---	250	V	296	-9.5	74.00	35.37
2124.250000	---	34.65	250	V	141	-7.9	54.00	19.35
2124.250000	44.80	---	250	V	141	-7.9	74.00	29.20
4236.470000	---	30.16	200	V	257	-1.4	54.00	23.84
4236.470000	41.96	---	200	V	257	-1.4	74.00	32.04
6008.020000	---	36.48	100	H	108	2.3	54.00	17.52
6008.020000	47.04	---	100	H	108	2.3	74.00	26.96
6961.920000	---	38.26	200	V	193	5.3	54.00	15.74
6961.920000	49.64	---	200	V	193	5.3	74.00	24.36
17659.320000	---	43.69	100	H	62	14.0	54.00	10.31
17659.320000	55.03	---	100	H	62	14.0	74.00	18.97

High Channel: 2480MHz


Full Spectrum

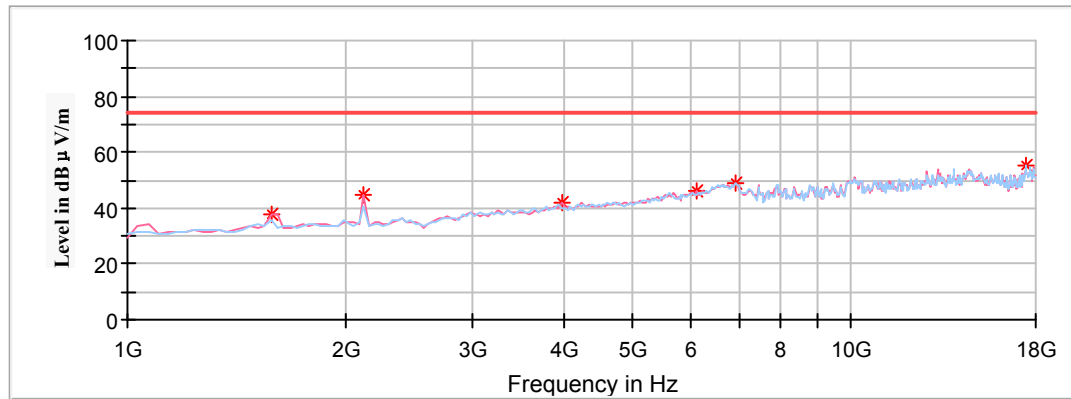


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1579.160000	---	27.36	250	V	258	-9.7	54.00	26.64
1579.160000	38.10	---	250	V	258	-9.7	74.00	35.90
2124.250000	---	33.42	250	V	169	-7.9	54.00	20.58
2124.250000	44.51	---	250	V	169	-7.9	74.00	29.49
3998.000000	---	31.33	200	V	99	-1.9	54.00	22.67
3998.000000	42.24	---	200	V	99	-1.9	74.00	31.76
6110.220000	---	35.21	100	H	237	2.8	54.00	18.79
6110.220000	46.47	---	100	H	237	2.8	74.00	27.53
6927.860000	---	37.15	200	V	287	5.2	54.00	16.85
6927.860000	48.90	---	200	V	287	5.2	74.00	25.10
17454.910000	---	45.36	100	H	102	14.0	54.00	8.64
17454.910000	55.04	---	100	H	102	14.0	74.00	18.96

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case low channel of GFSK Mode in Z-axis of orientation was recorded

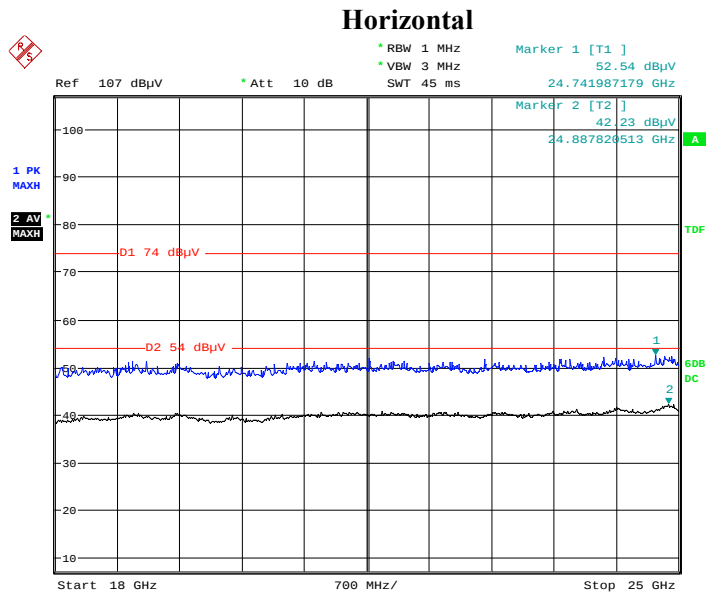

Date: 2.AUG.2019 08:42:05

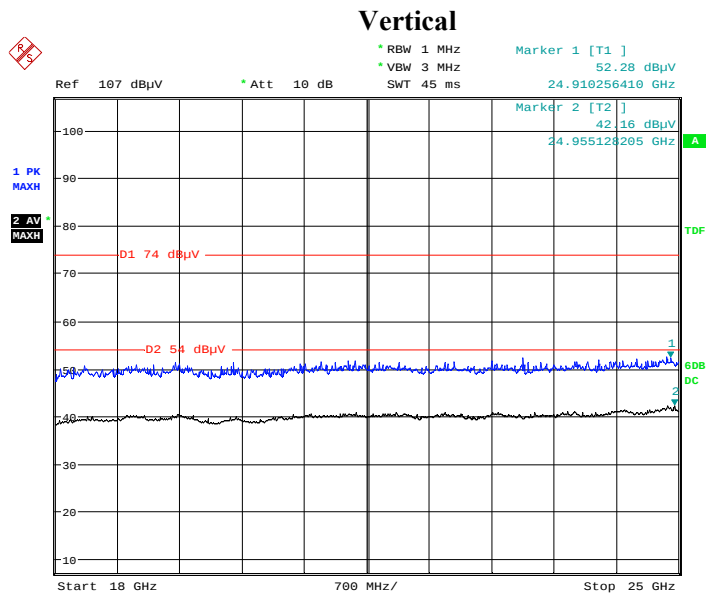

Date: 2.AUG.2019 09:03:47

Fundamental Test & Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in Z-axis of orientation was recorded



Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)



Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	---	33.26	100	V	250	2.8	54	20.74
2390.000000	44.44	---	100	V	250	2.8	74	29.56
High Channel: 2480MHz								
2483.500000	---	34.65	100	V	340	3.0	54	19.35
2483.500000	45.84	---	100	V	340	3.0	74	28.16

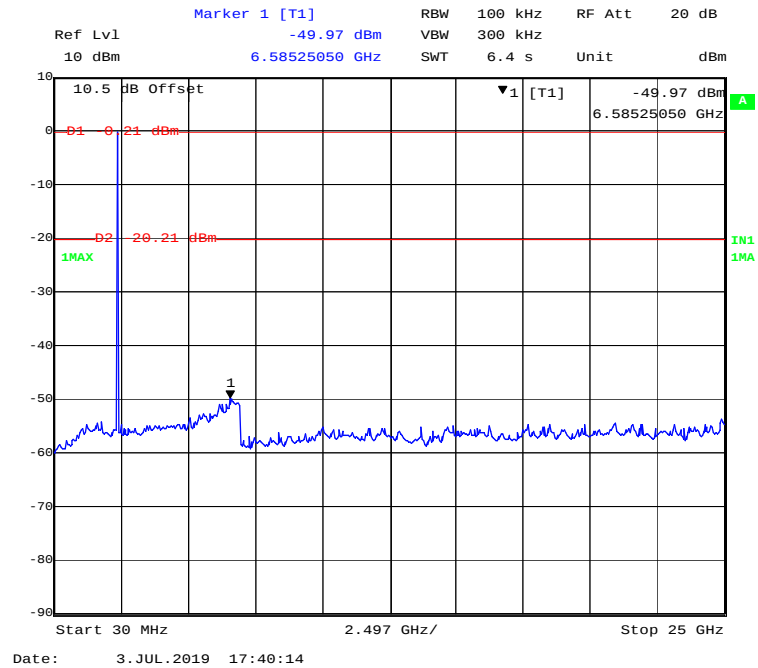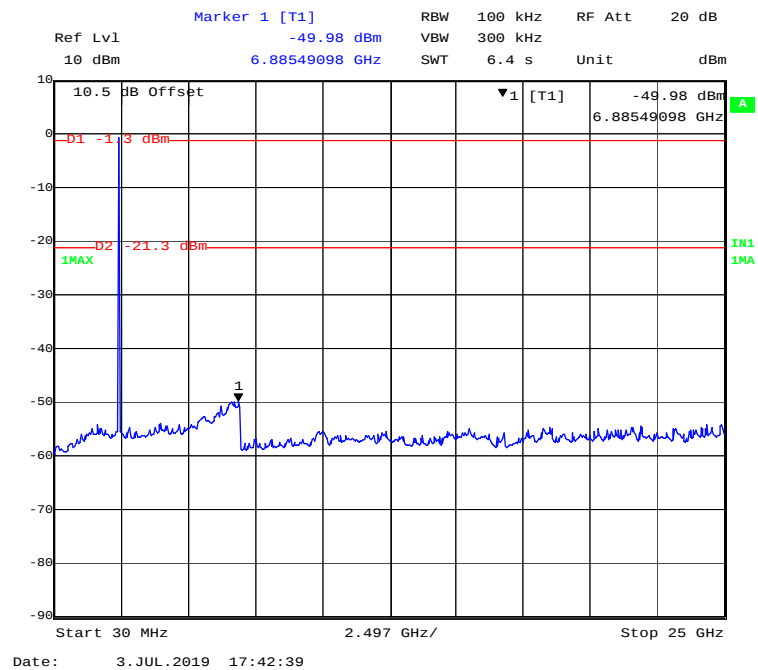Conducted Spurious Emissions at Antenna Port**BDR (GFSK): Low Channel****BDR (GFSK): Middle Channel**


Marker 1 [T1]



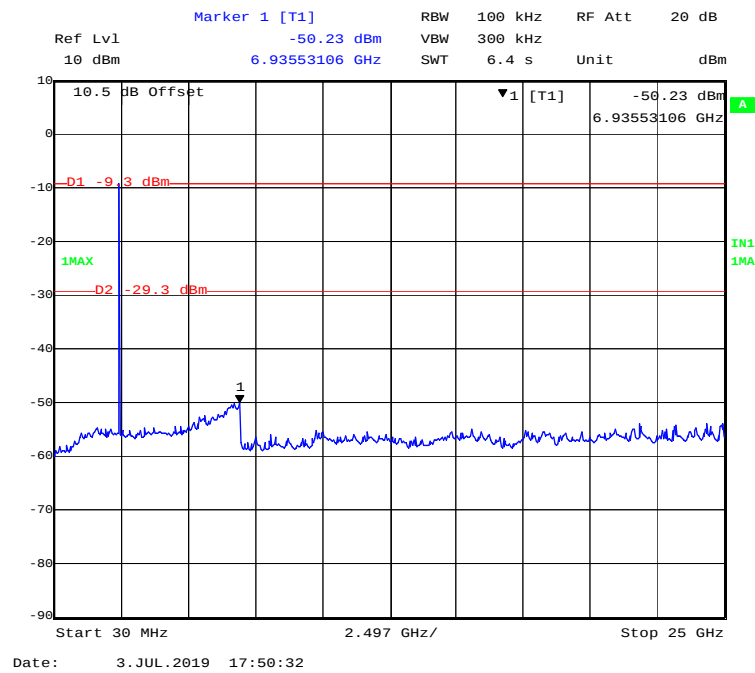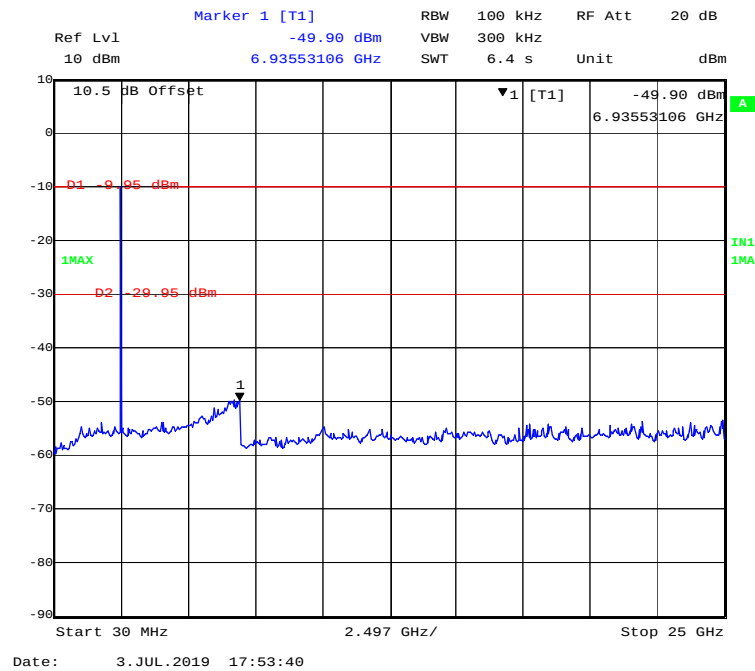EDR ($\pi/4$ -DQPSK): Middle Channel**EDR ($\pi/4$ -DQPSK): High Channel**

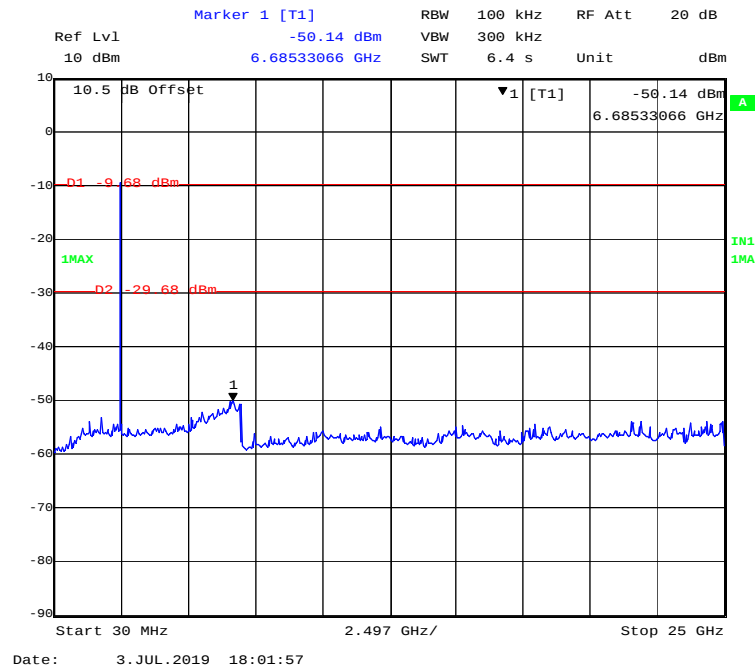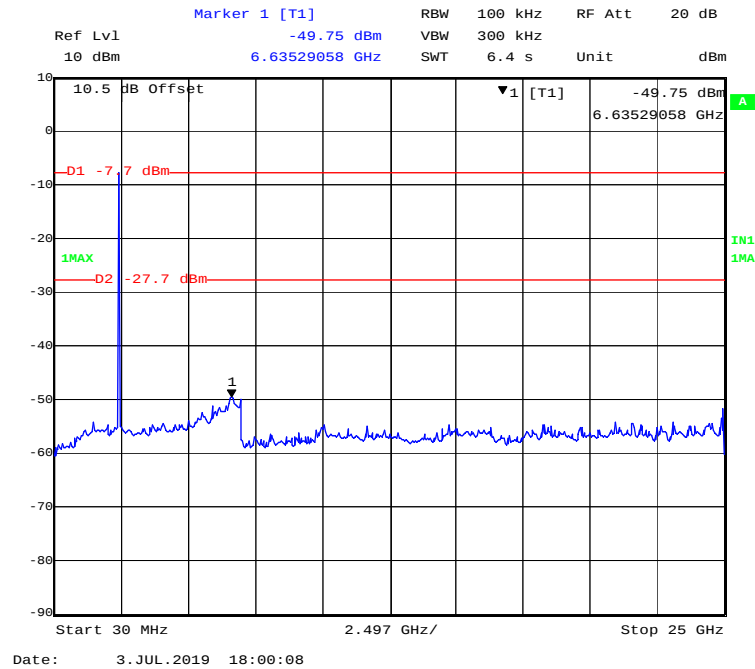EDR (8DPSK): Low Channel**EDR (8DPSK): Middle Channel**

EDR (8DPSK): High Channel

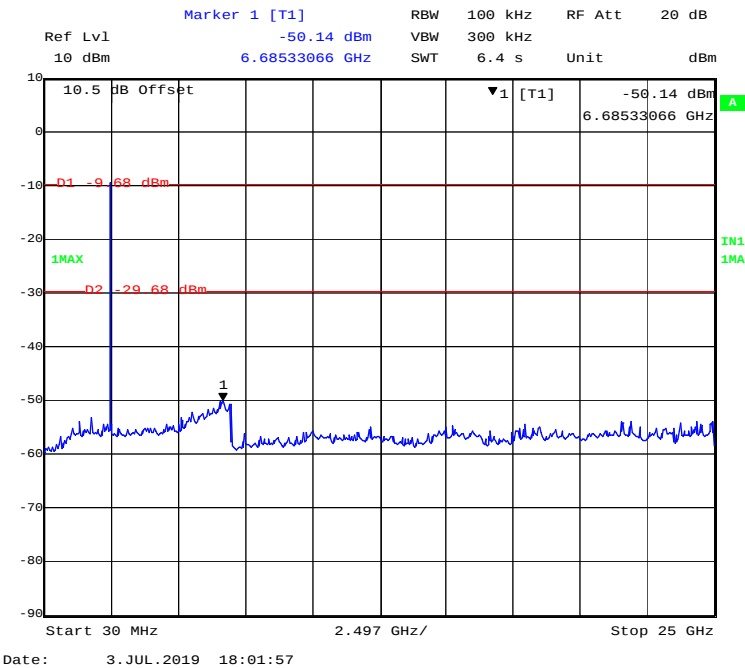

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2019-09-19.


EUT operation mode: Transmitting

Test Result: Compliant.


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	0.999	0.962	Pass
	Adjacent	2403			
	Middle	2441	0.999	0.974	Pass
	Adjacent	2442			
	High	2480	0.994	0.980	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.003	0.910	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.906	Pass
	Adjacent	2442			
	High	2480	1.003	0.906	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.003	0.878	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.882	Pass
	Adjacent	2442			
	High	2480	1.003	0.882	Pass
	Adjacent	2479			

Note: For BDR mode, Limit = 20 dB bandwidth; For EDR mode, Limit = 20 dB bandwidth*2/3

BDR (GFSK): Low Channel

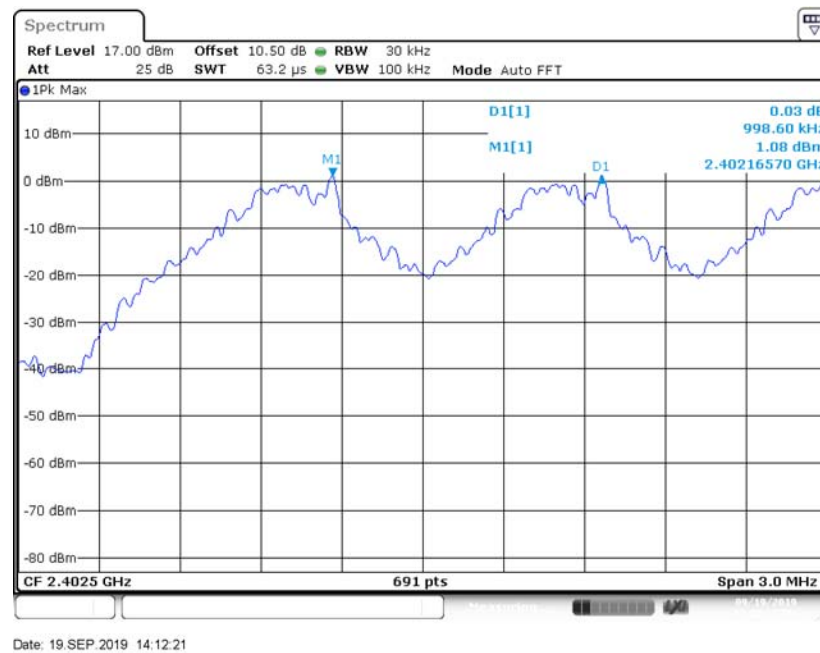


BDR (GFSK): Middle Channel


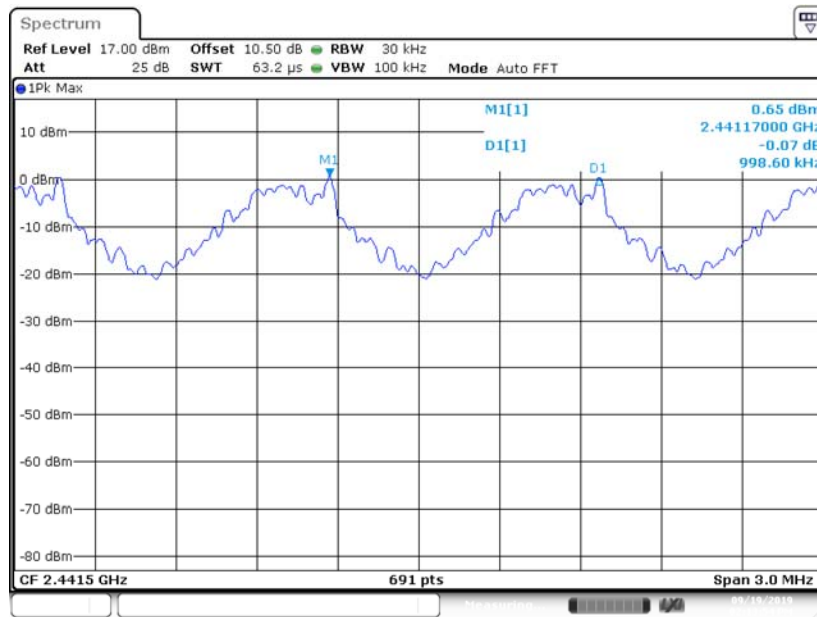


Date: 19.SEP.2019 14:13:55


BDR (GFSK): High Channel

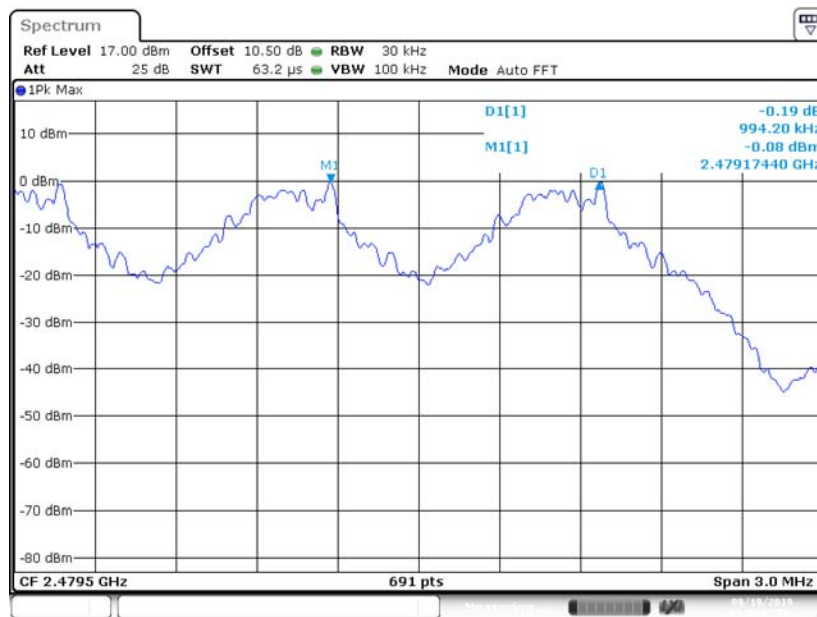


Date: 19.SEP.2019 14:14:52

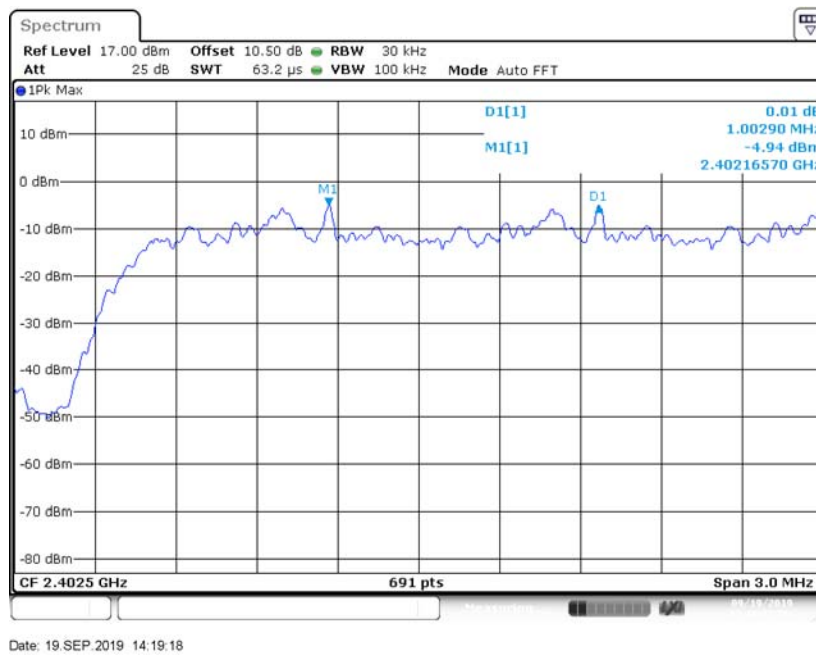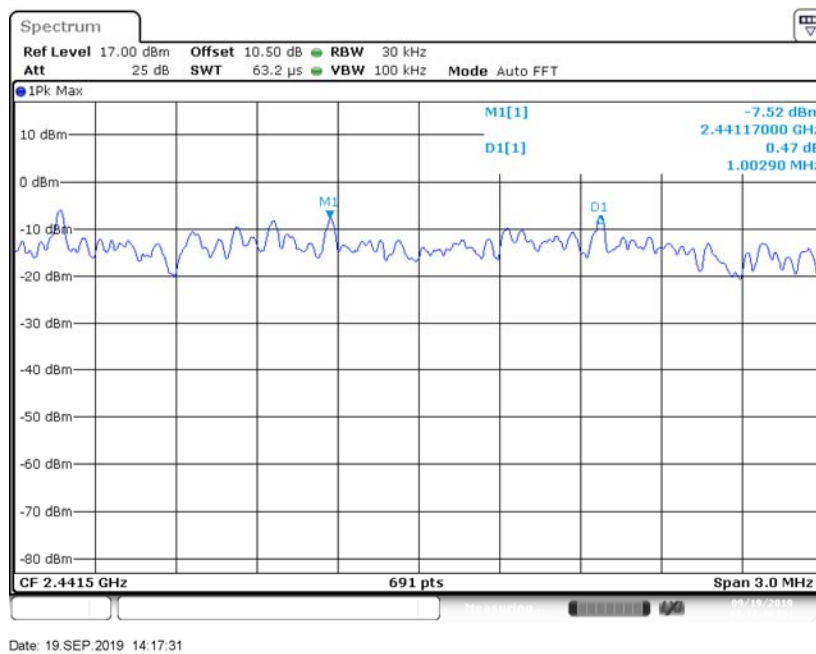EDR ($\pi/4$ -DQPSK): Low Channel**EDR ($\pi/4$ -DQPSK): Middle Channel**


EDR ($\pi/4$ -DQPSK): High Channel

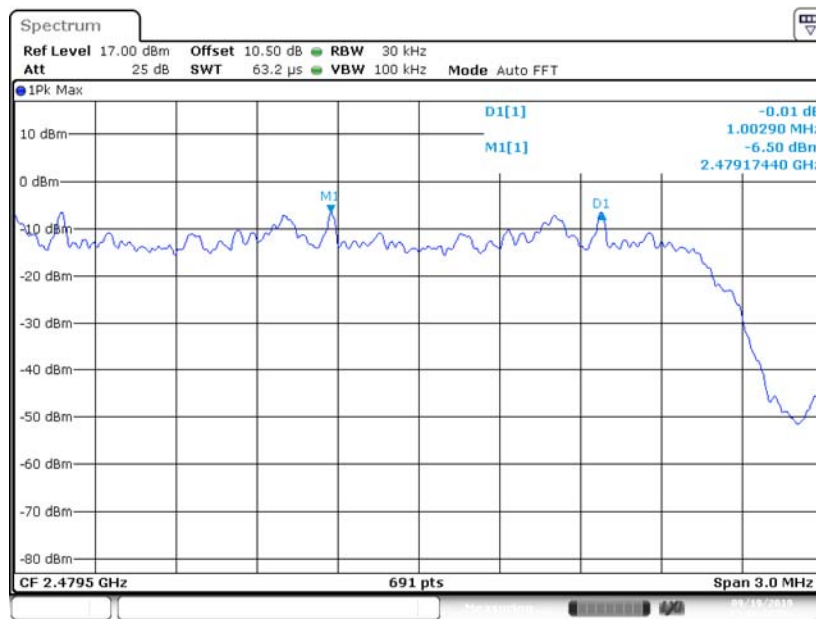

EDR (8DPSK): Low Channel

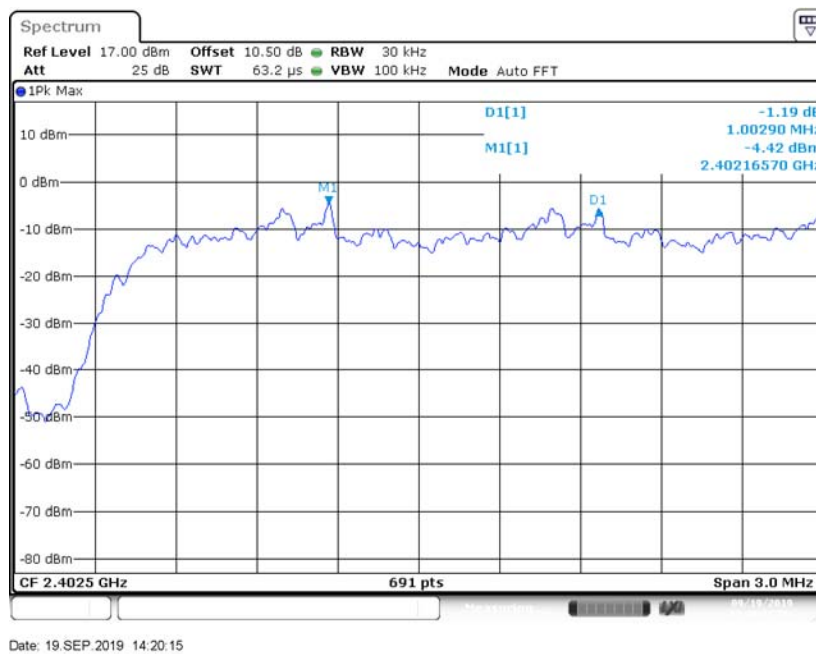


EDR (8DPSK): Middle Channel

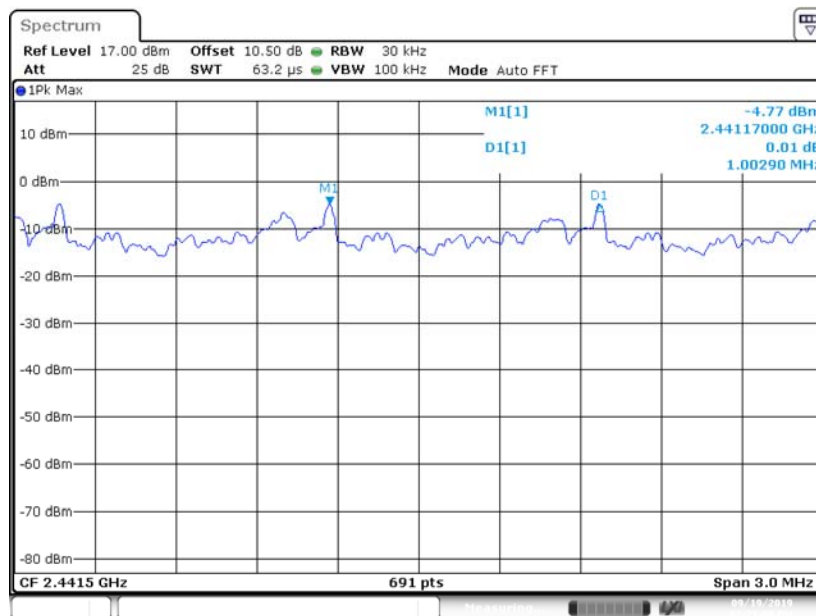

Date: 19.SEP.2019 14:21:01

EDR (8DPSK): High Channel

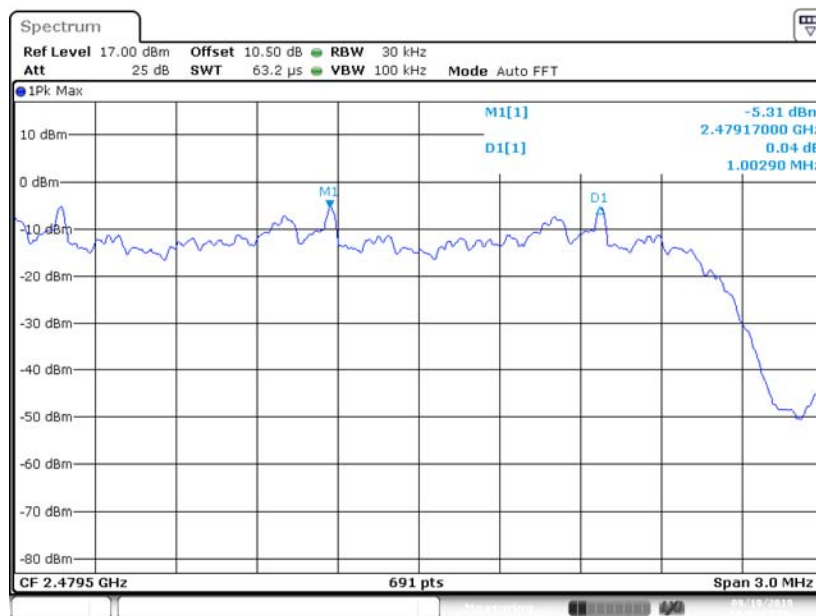

Date: 19.SEP.2019 14:22:12

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2019-07-03.


EUT operation mode: Transmitting

Test Result: Compliant.


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.962
	Middle	2441	0.974
	High	2480	0.980
EDR ($\pi/4$-DQPSK)	Low	2402	1.365
	Middle	2441	1.359
	High	2480	1.359
EDR (8DPSK)	Low	2402	1.317
	Middle	2441	1.323
	High	2480	1.323


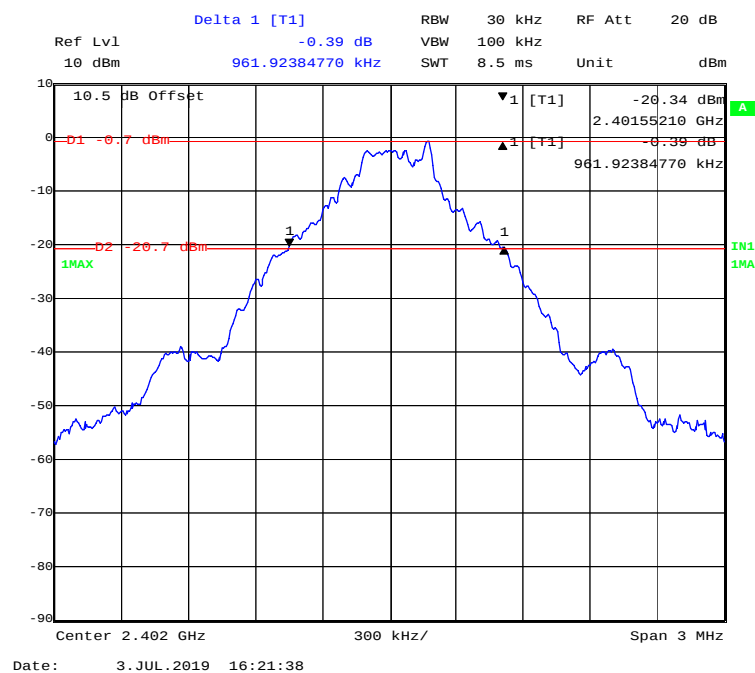
BDR (GFSK): Low Channel



BDR (GFSK): Middle Channel

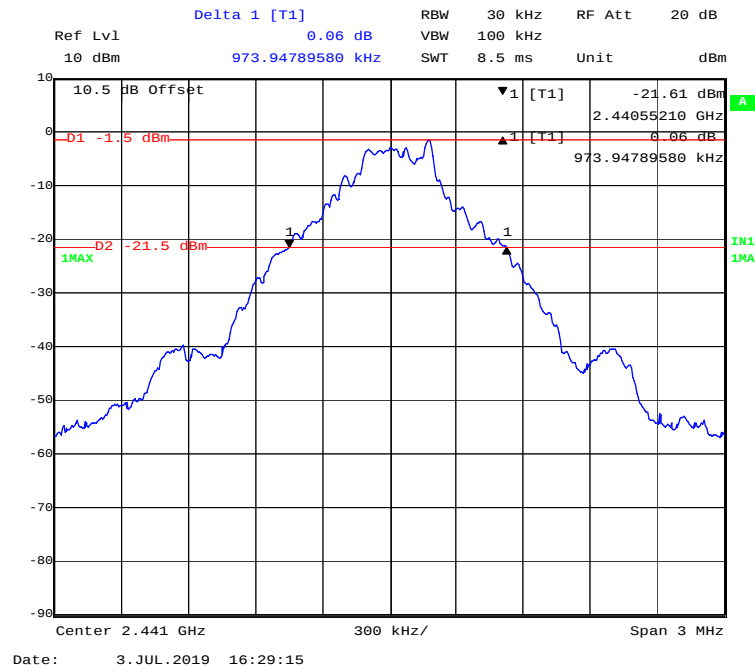


BDR (GFSK): High Channel

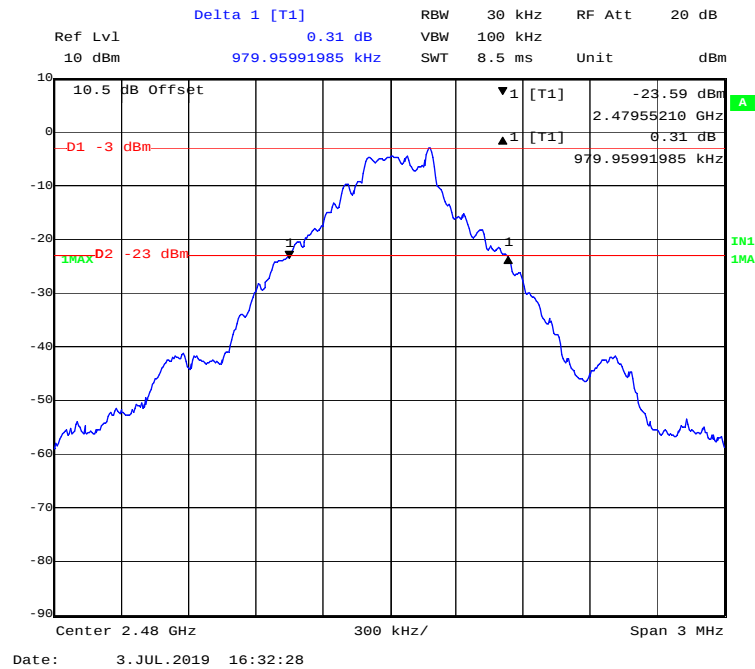

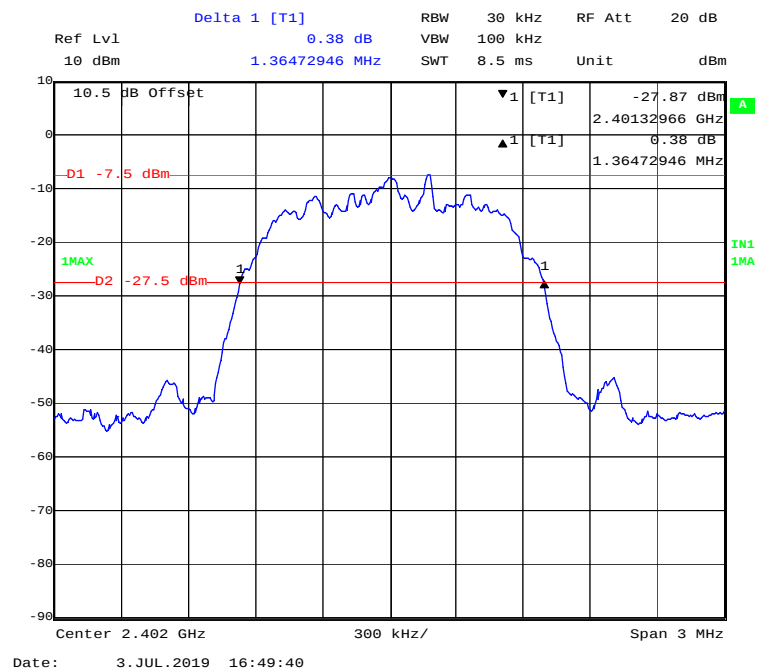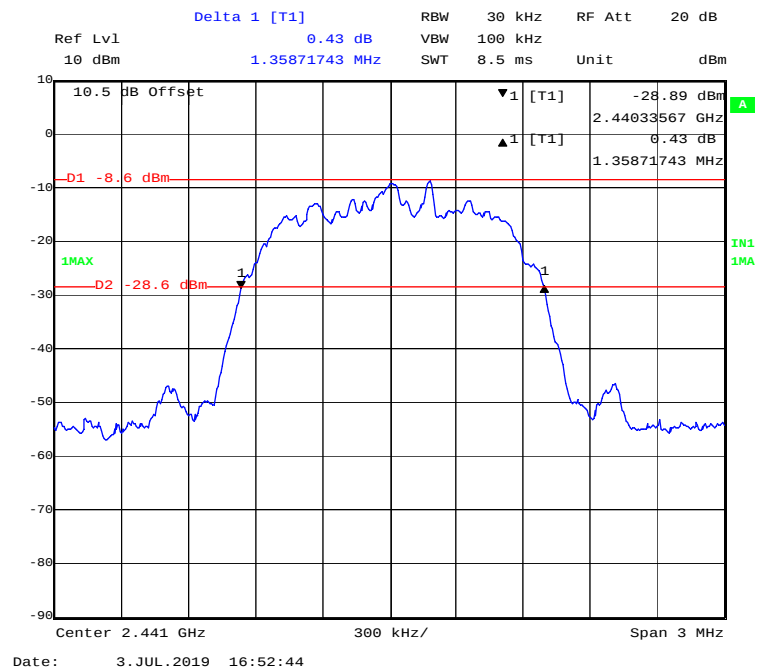
EDR ($\pi/4$ -DQPSK): Low Channel**EDR($\pi/4$ -DQPSK): Middle Channel**

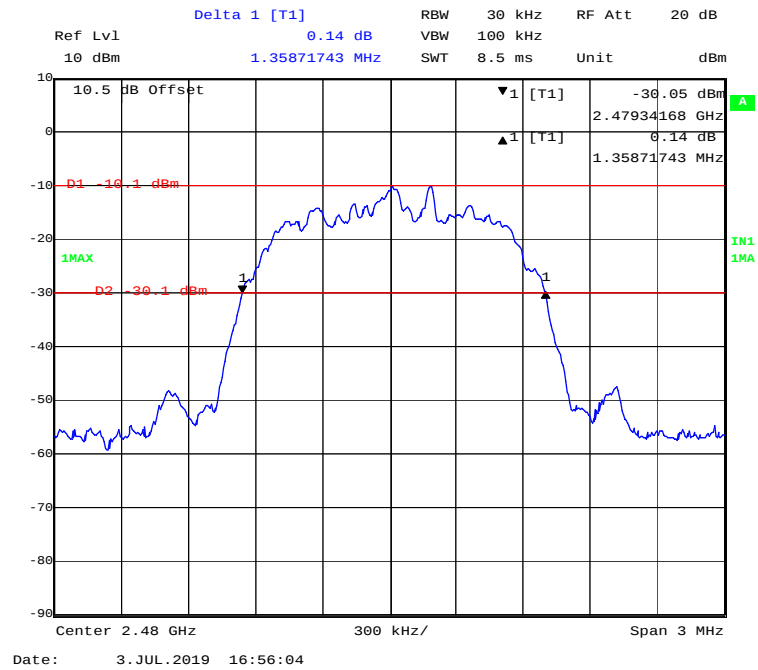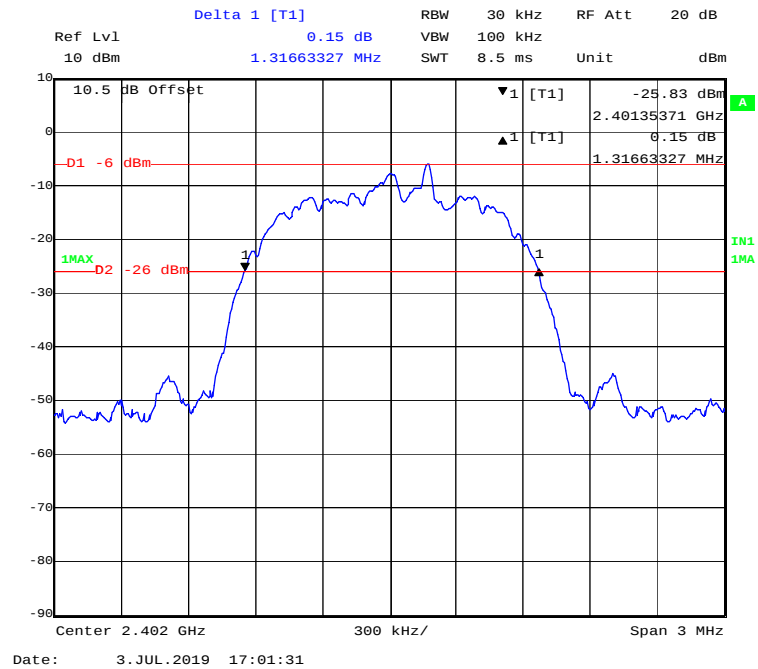EDR ($\pi/4$ -DQPSK): High Channel**EDR (8DPSK): Low Channel**

EDR (8DPSK): Middle Channel

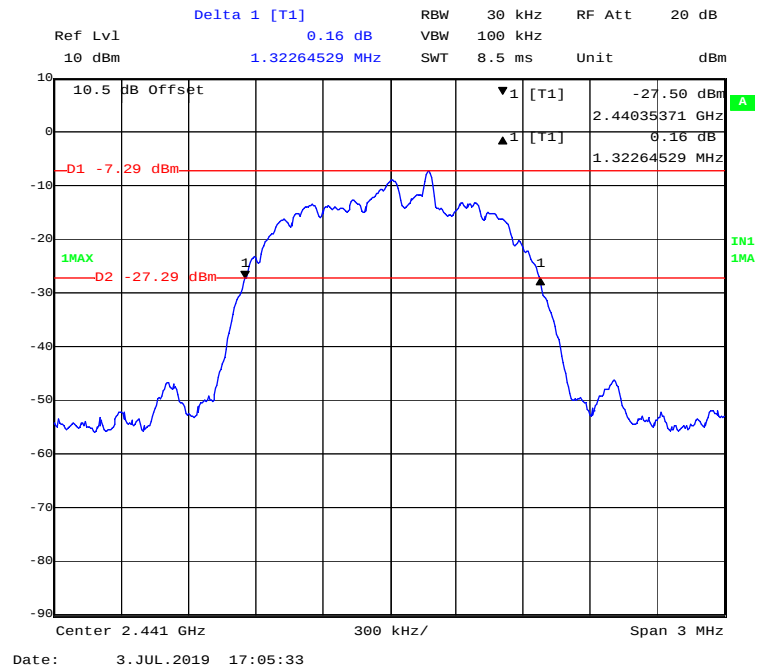

EDR (8DPSK): High Channel

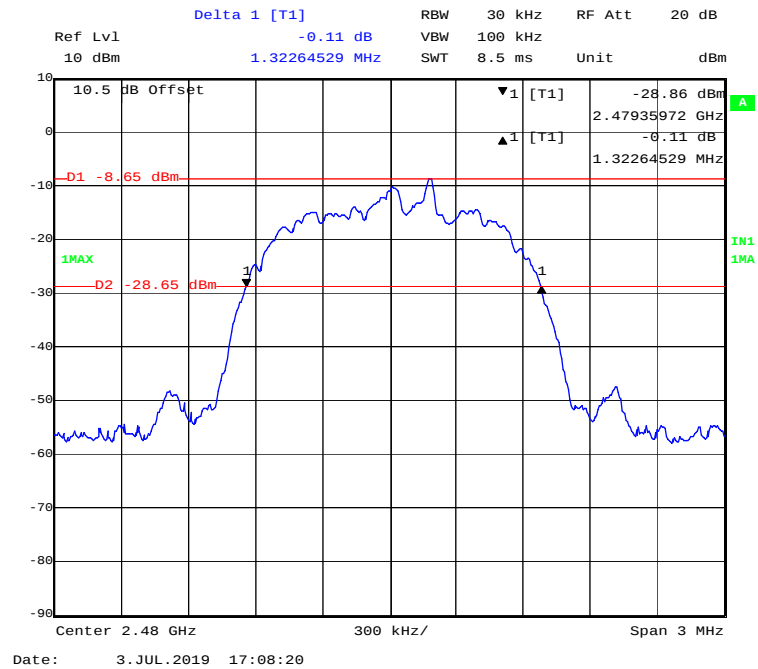

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Jack Jiao on 2019-09-19.


EUT operation mode: Hopping

Test Result: Compliant.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

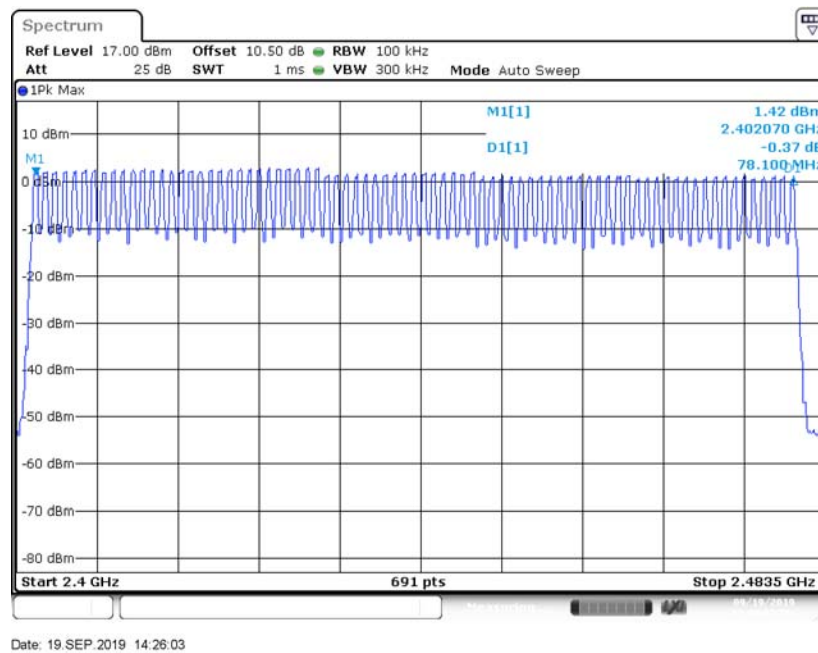

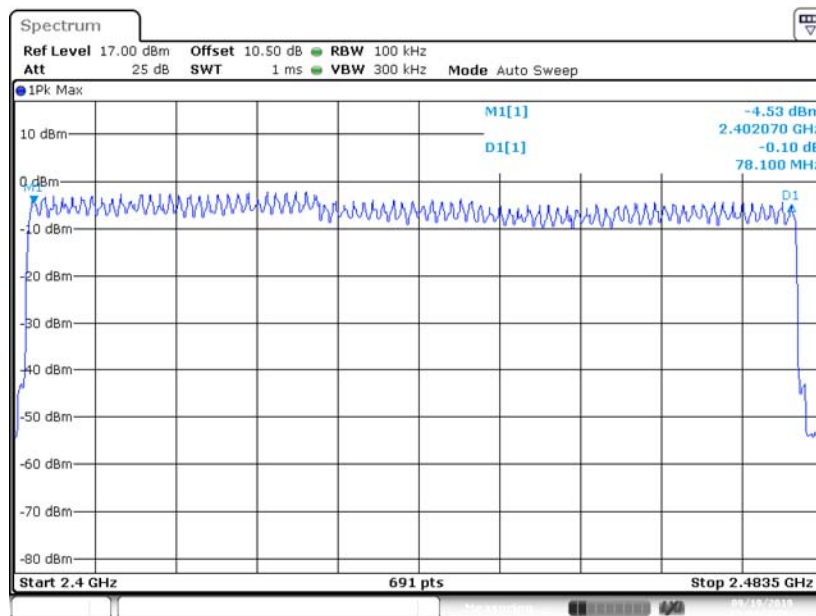EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Date: 19.SEP.2019 14:24:50

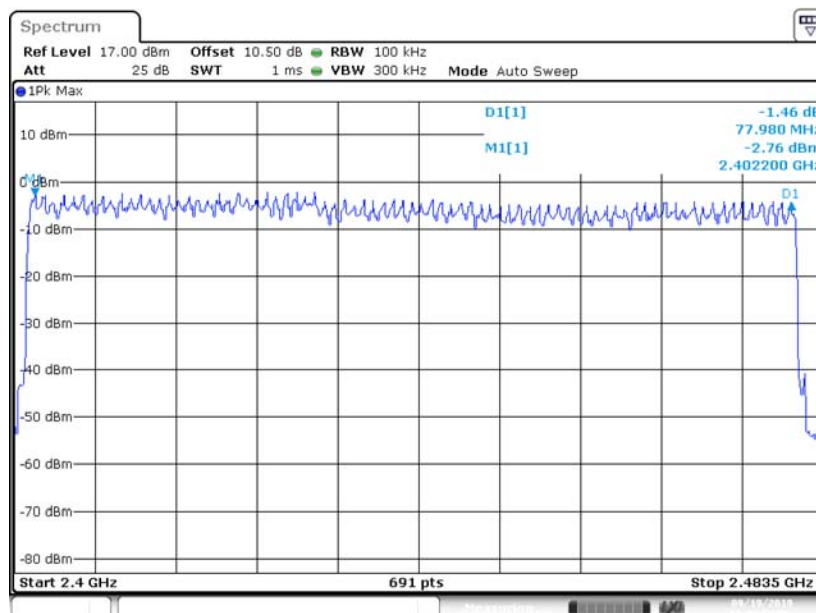EDR (8DPSK): Number of Hopping Channels

Date: 19.SEP.2019 14:23:51

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data**Environmental Conditions**

Temperature:	25.3°C
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Jack Jiao on 2019-07-04.


EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.427	0.137	0.4	Pass
		Middle	0.432	0.138	0.4	Pass
		High	0.429	0.137	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.697	0.272	0.4	Pass
		Middle	1.697	0.272	0.4	Pass
		High	1.714	0.274	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	2.960	0.316	0.4	Pass
		Middle	2.960	0.316	0.4	Pass
		High	2.960	0.316	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.435	0.139	0.4	Pass
		Middle	0.434	0.139	0.4	Pass
		High	0.432	0.138	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.697	0.272	0.4	Pass
		Middle	1.697	0.272	0.4	Pass
		High	1.697	0.272	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.975	0.317	0.4	Pass
		Middle	2.982	0.318	0.4	Pass
		High	2.953	0.315	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.434	0.139	0.4	Pass
		Middle	0.441	0.141	0.4	Pass
		High	0.432	0.138	0.4	Pass
		Note: 3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.692	0.271	0.4	Pass
		Middle	1.701	0.272	0.4	Pass
		High	1.697	0.272	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.982	0.318	0.4	Pass
		Middle	2.953	0.315	0.4	Pass
		High	2.953	0.315	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1




BDR (GFSK): Pulse time, Middle Channel, DH1

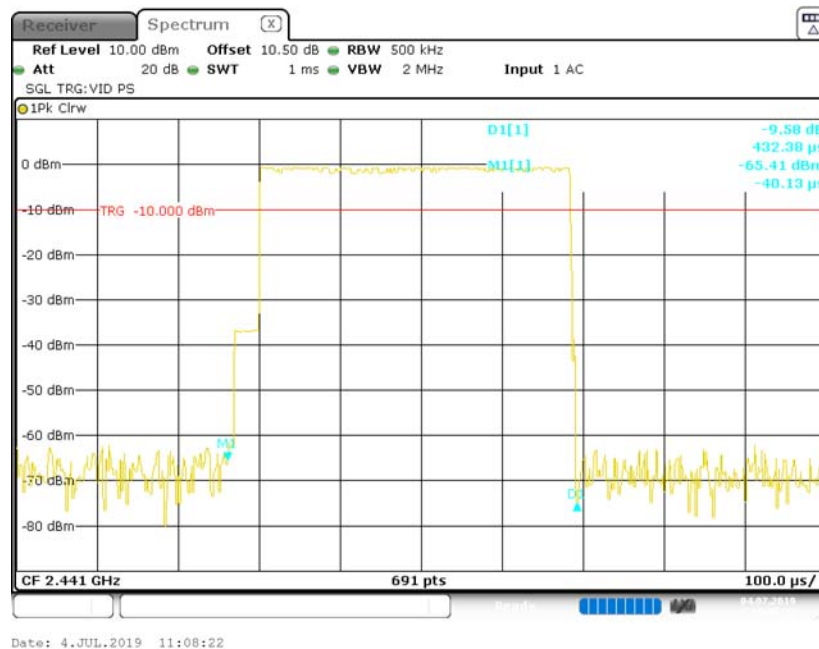


BDR (GFSK): Pulse time, High Channel, DH1

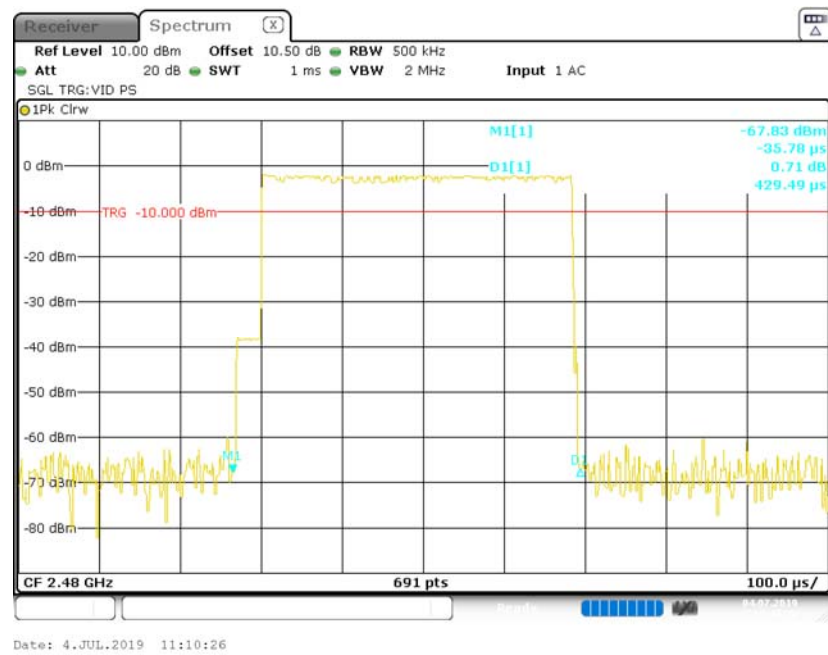


BDR (GFSK): Pulse time, Low Channel, DH3

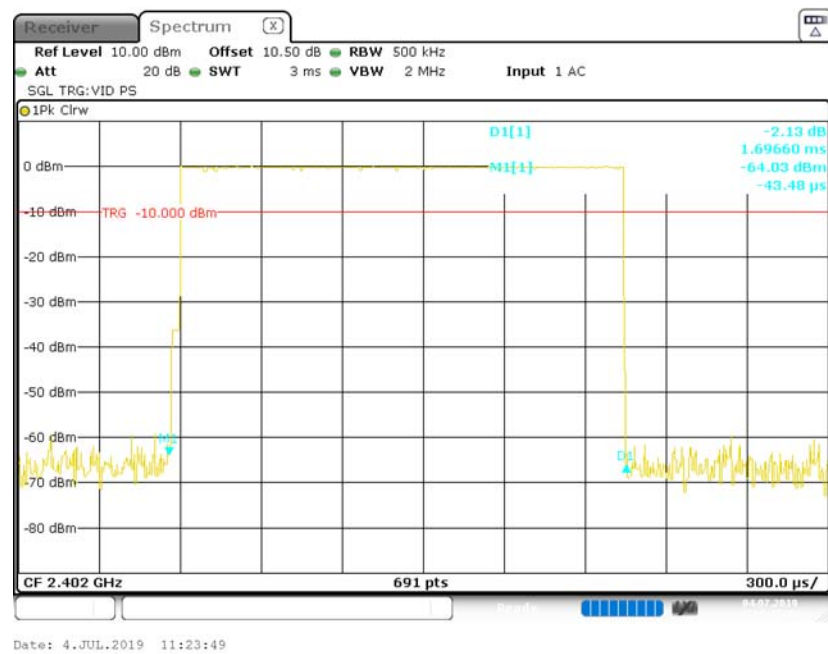



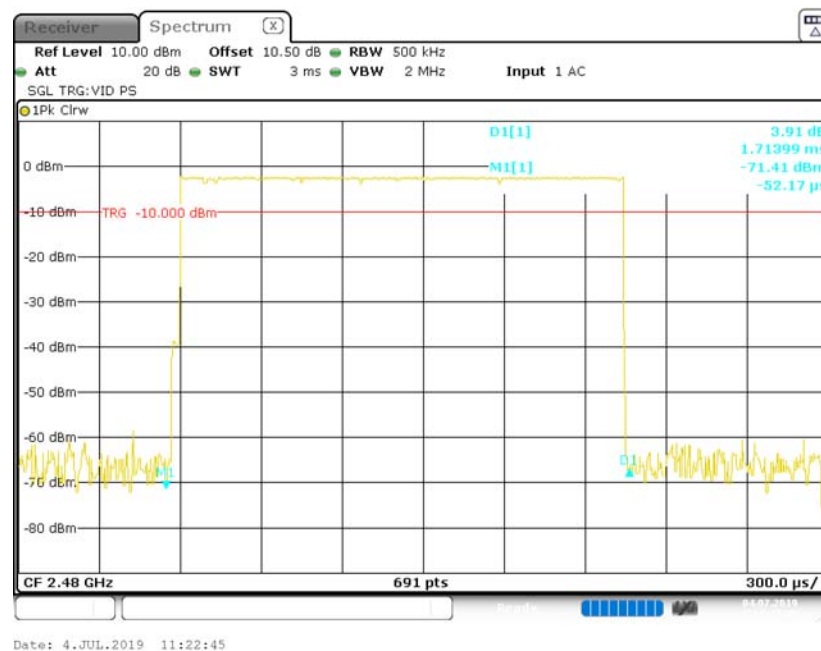
BDR (GFSK): Pulse time, Middle Channel, DH3**BDR (GFSK): Pulse time, High Channel, DH3**

BDR (GFSK): Pulse time, Low Channel, DH5

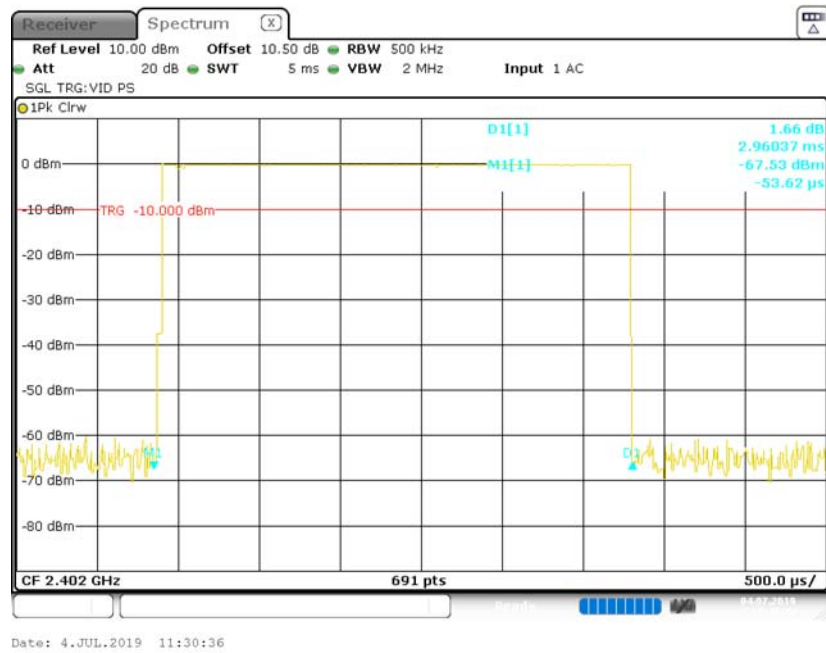


BDR (GFSK): Pulse time, Middle Channel, DH5

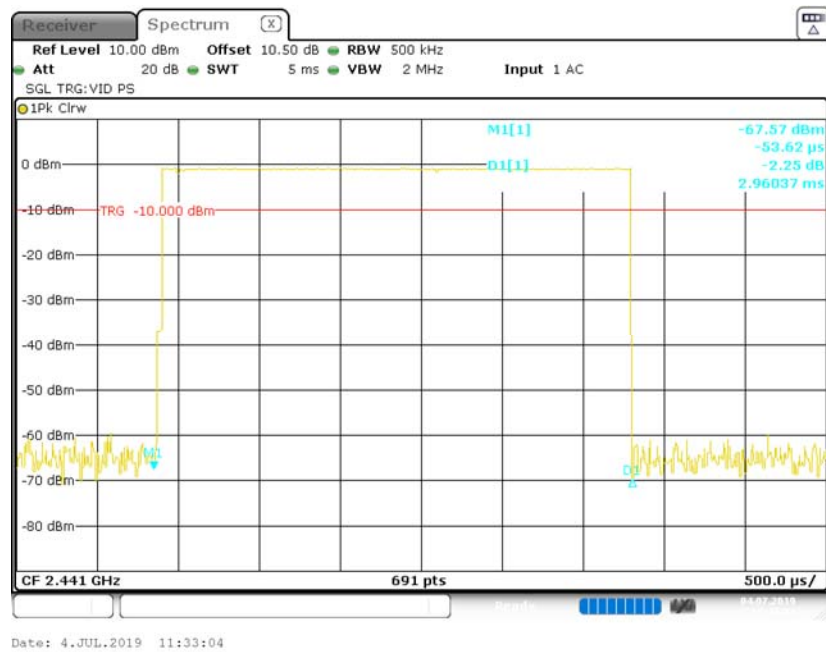


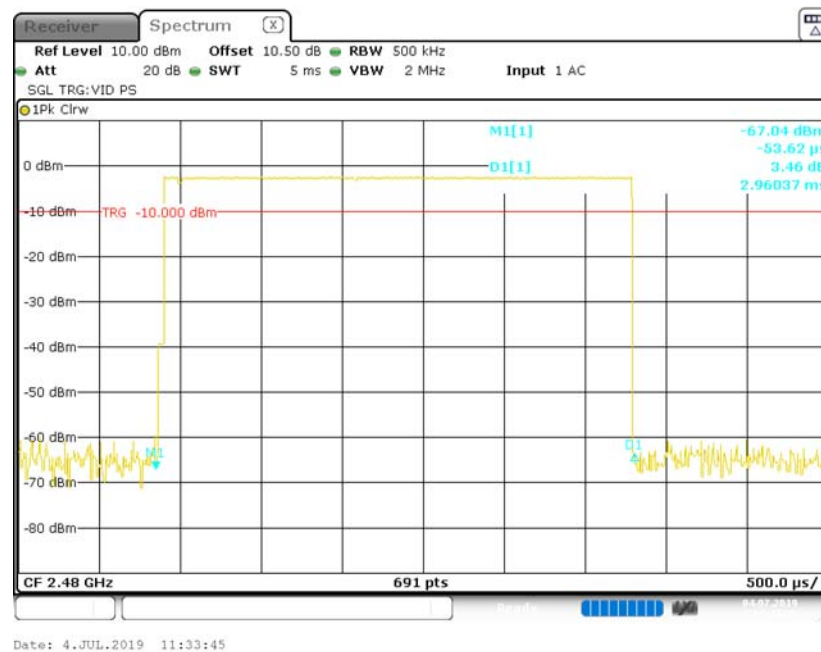
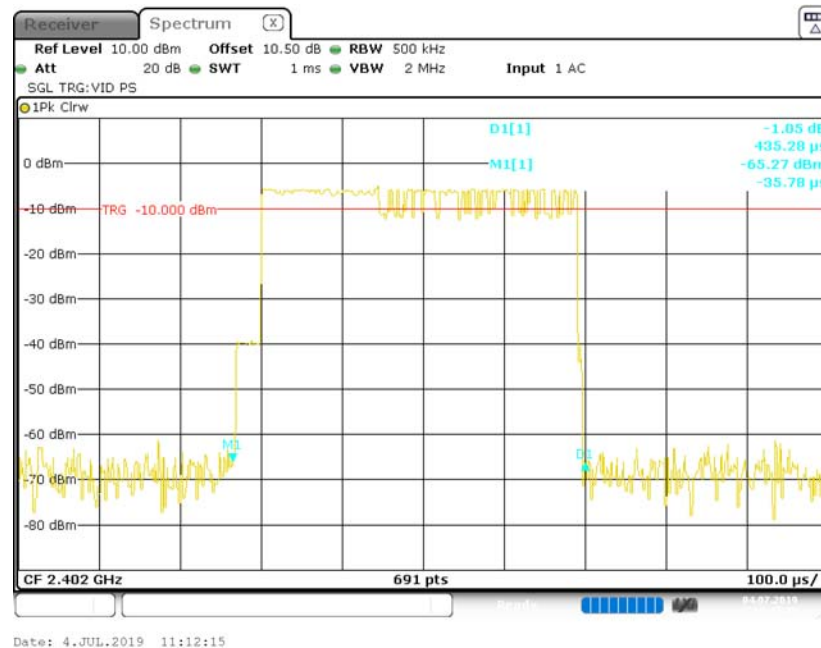
BDR (GFSK): Pulse time, High Channel, DH5**EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**

EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH1

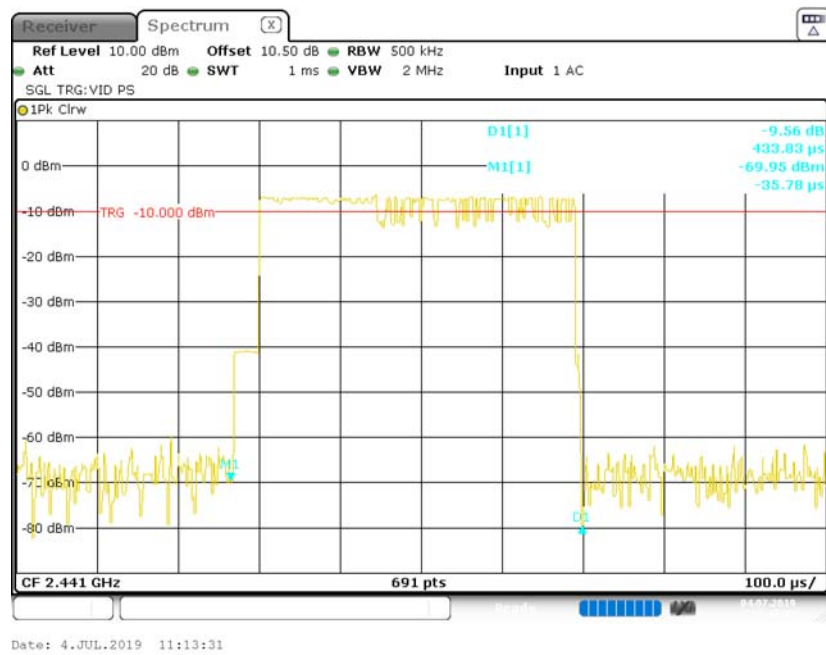

EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH1

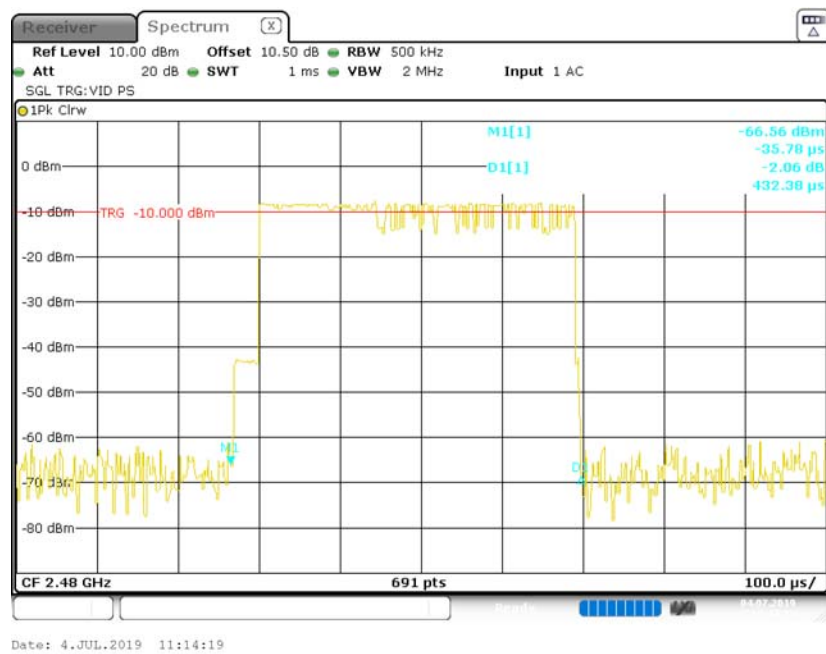

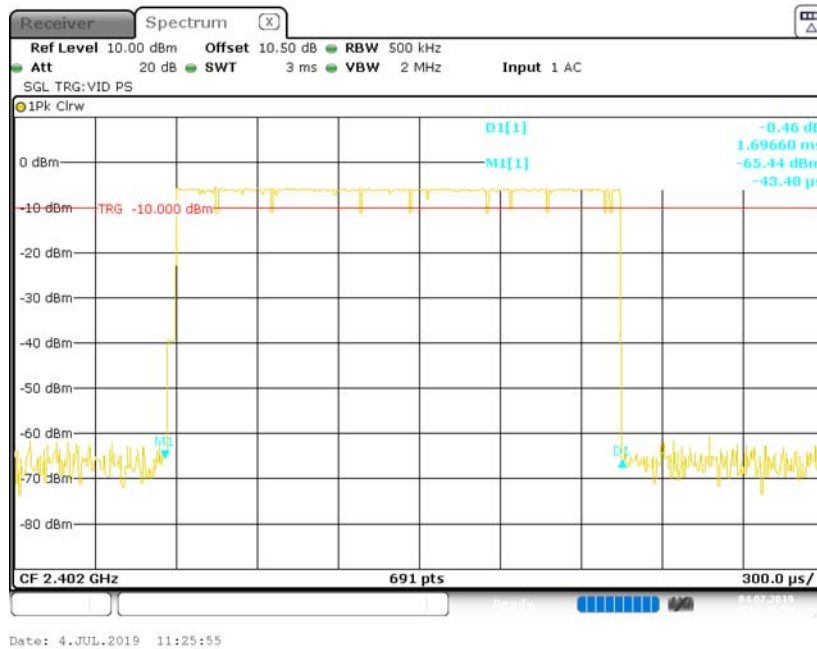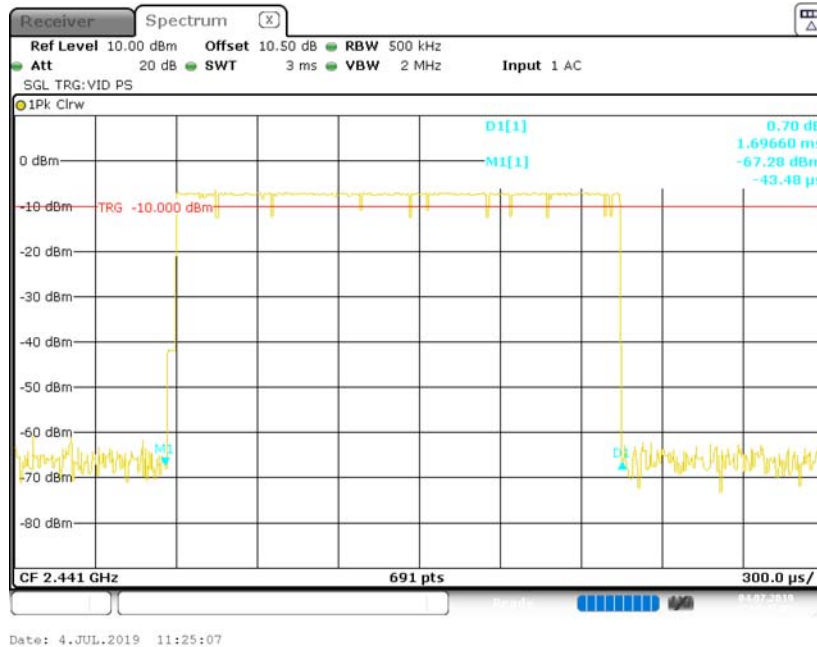EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3

Receiver Spectrum

Ref Level 10.00 dBm Att 20 dB Offset 10.50 dB RBW 500 kHz 3 ms VBW 2 MHz Input 1 AC

SGL TRG: VID PS

1Pk Clrw

0 dBm

-10 dBm TRG -10.000 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

-70 dBm

-80 dBm

D1[1]

M1[1]

-0.69 dB

1.69660 ms

-65.34 dBm

-43.48 μs

CF 2.48 GHz 691 pts 300.0 μs

Receiver Spectrum X

Ref Level 10.00 dBm Offset 10.50 dB RBW 500 kHz
 Att 20 dB SWT 5 ms VBW 2 MHz Input 1 AC

SGL TRG: VID PS

1Pk Clrw



0 dBm
 -10 dBm TRG -10.000 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm
 -80 dBm

D1[1]
 M1[1]


-2.44 dB
 2.97486 ms
 -66.06 dBm
 -53.62 μ s

CF 2.402 GHz 691 pts 500.0 ps/


Date: 4.JUL.2019 11:34:43

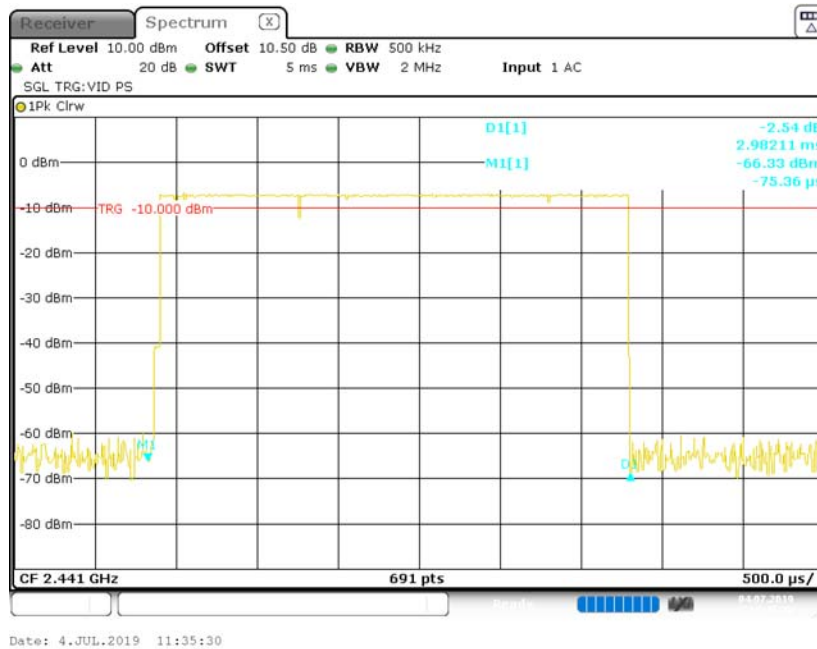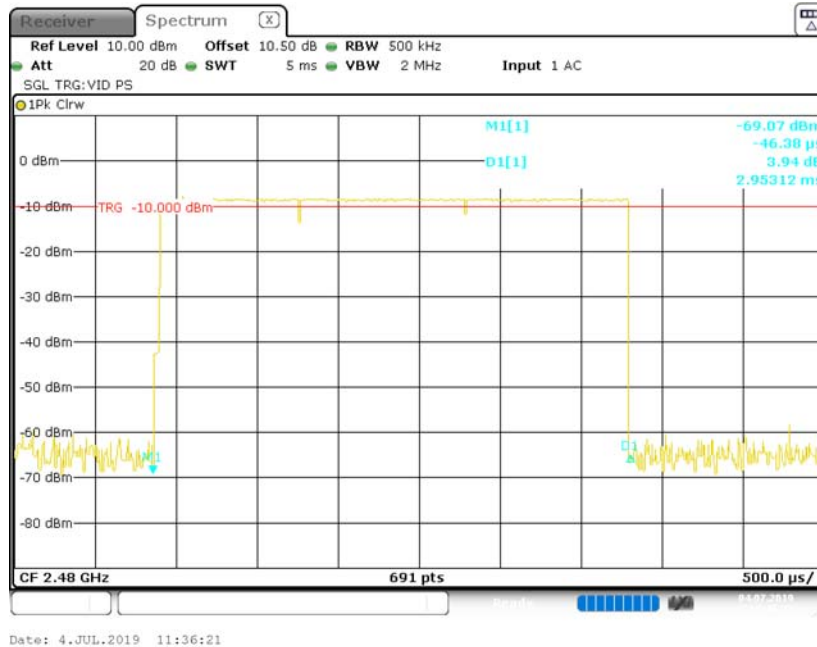EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5**EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5**


EDR (8DPSK): Pulse time, Low Channel, 3DH1

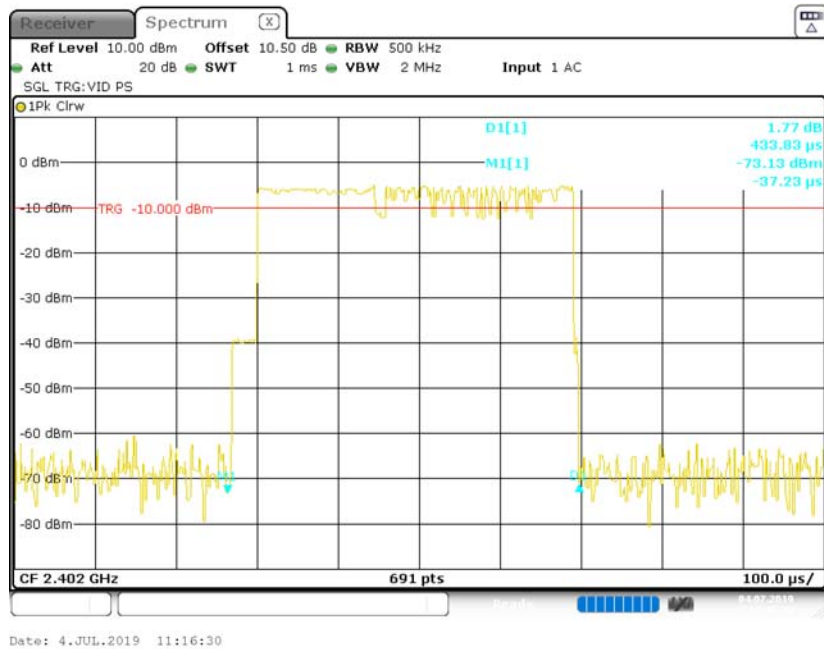


EDR (8DPSK): Pulse time, Middle Channel, 3DH1

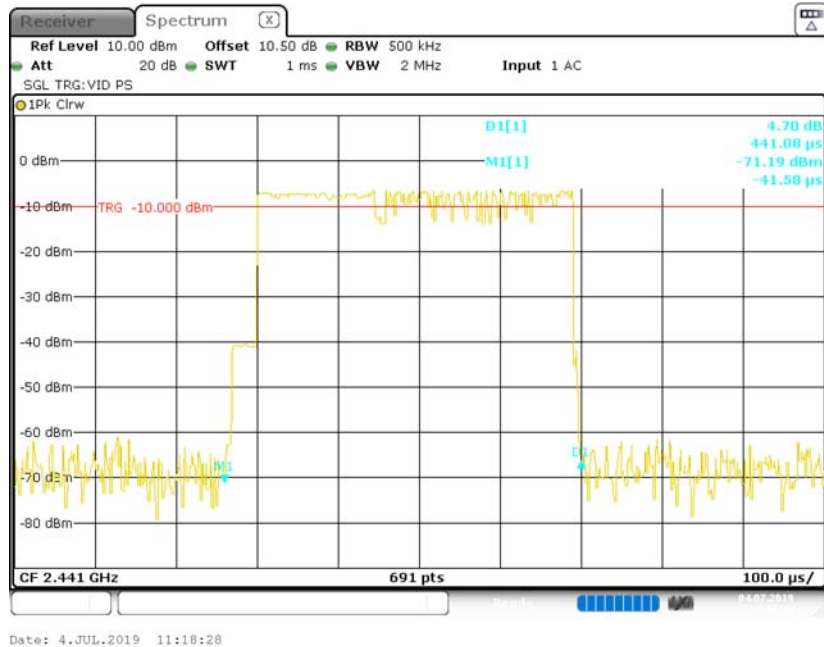

EDR (8DPSK): Pulse time, High Channel, 3DH1

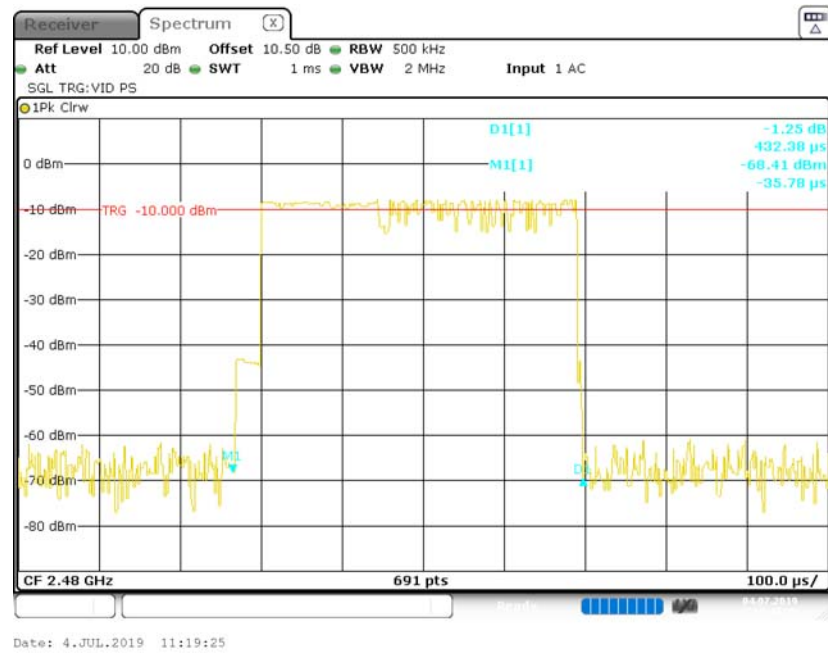


EDR (8DPSK): Pulse time, Low Channel, 3DH3

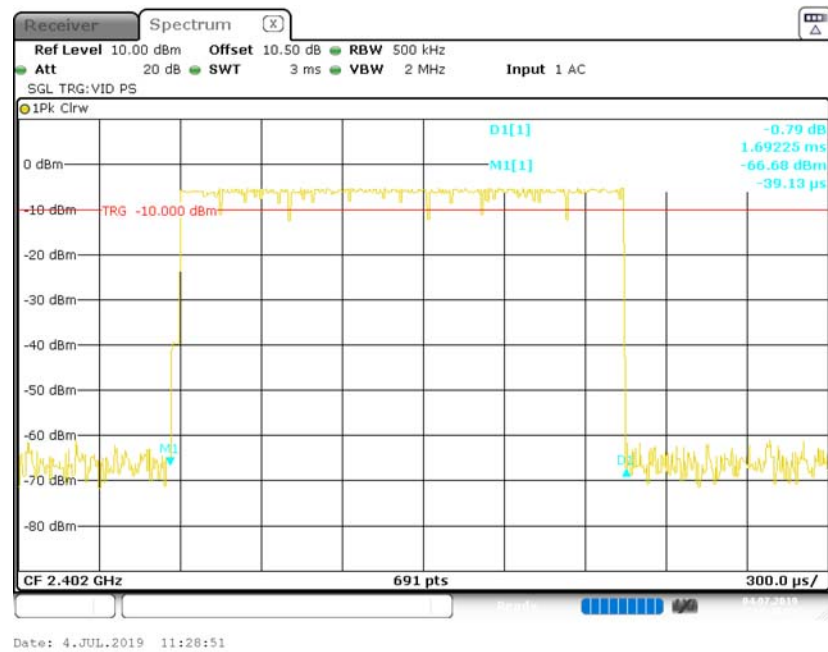


EDR (8DPSK): Pulse time, Middle Channel, 3DH3




EDR (8DPSK): Pulse time, High Channel, 3DH3

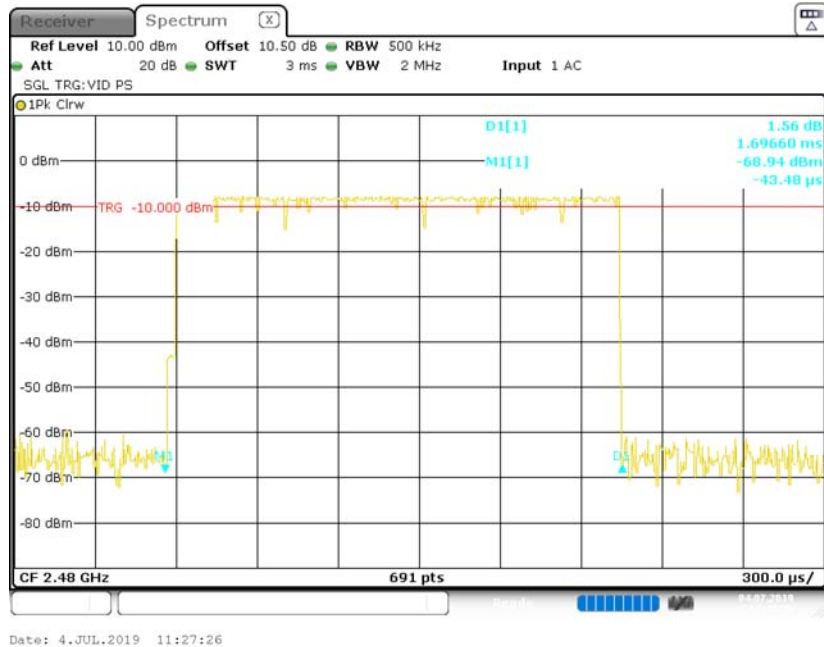

EDR (8DPSK): Pulse time, Low Channel, 3DH5

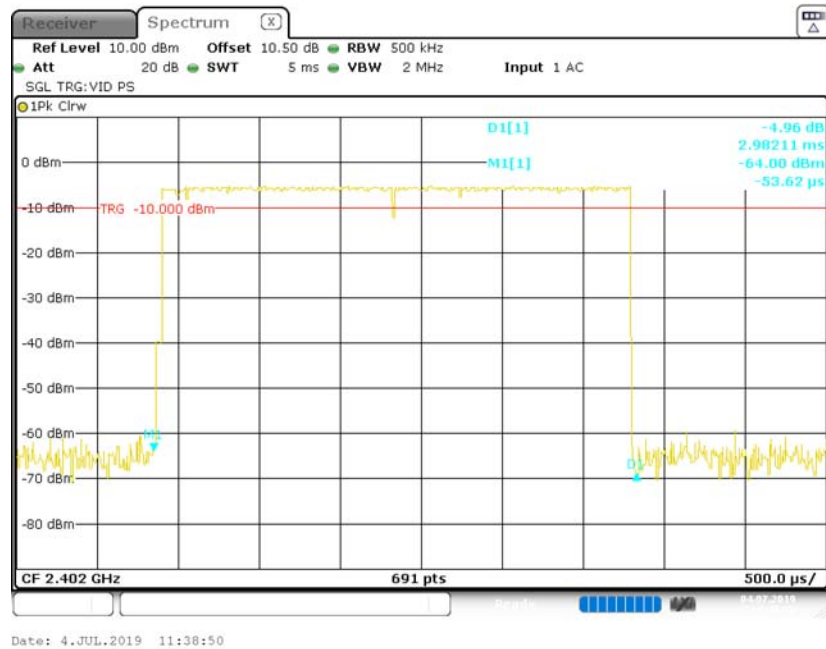

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

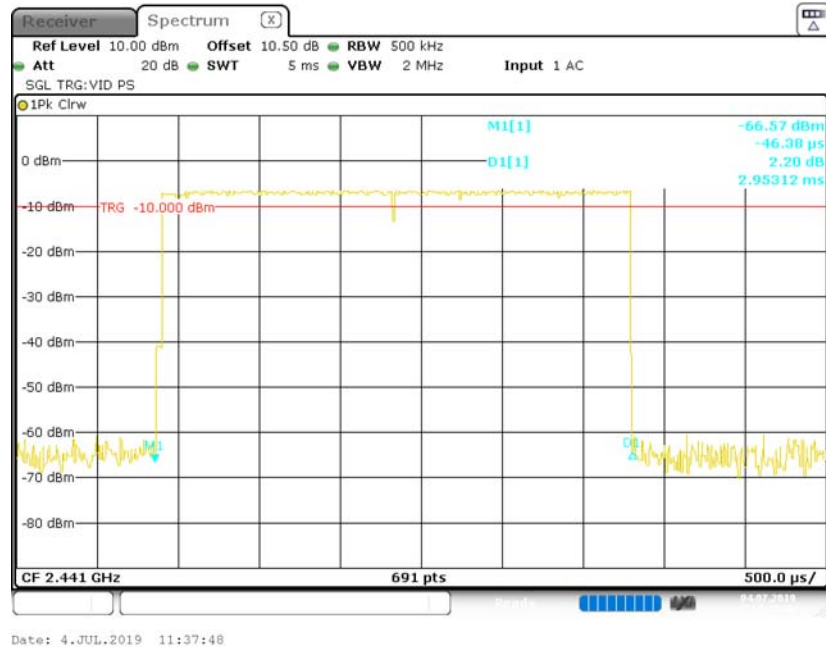

Receiver Spectrum

Ref Level 10.00 dBm Att 20 dB Offset 10.50 dB RBW 500 kHz SGL TRG: VID PS

Input 1 AC

1Pk Clrw

0 dBm

-10 dBm TRG -10.000 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

-70 dBm

-80 dBm

M1[1]

D1[1]

-66.84 dBm

-46.38 μs

4.36 dB

2.95312 ms

CF 2.48 GHz

691 pts

500.0 μs

Date: 4.JUL.2019 11:36:57

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data

Environmental Conditions

Temperature:	22~24℃
Relative Humidity:	48~50%
ATM Pressure:	101.2~101.3 kPa


The testing was performed by Jack Jiao from 2019-07-03 to 2019-08-03.

EUT operation mode: Transmitting


Test Result: Compliant.

Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	-0.20	0.95	125
	2441	-0.62	0.87	125
	2480	-1.94	0.64	125
EDR ($\pi/4$-DQPSK)	2402	-3.82	0.41	125
	2441	-4.08	0.39	125
	2480	-5.25	0.30	125
EDR (8DPSK)	2402	-3.69	0.43	125
	2441	-3.69	0.43	125
	2480	-4.86	0.33	125


BDR (GFSK): 2402MHz

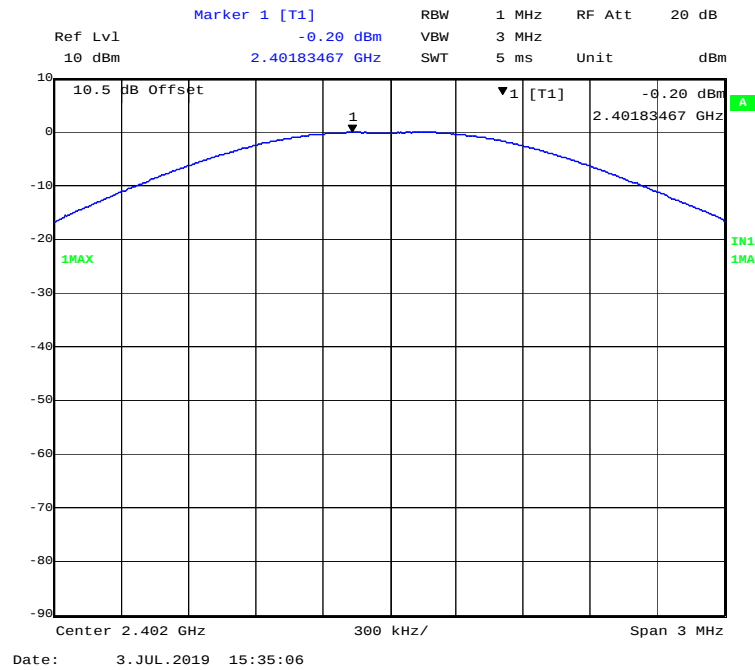


BDR (GFSK): 2441MHz

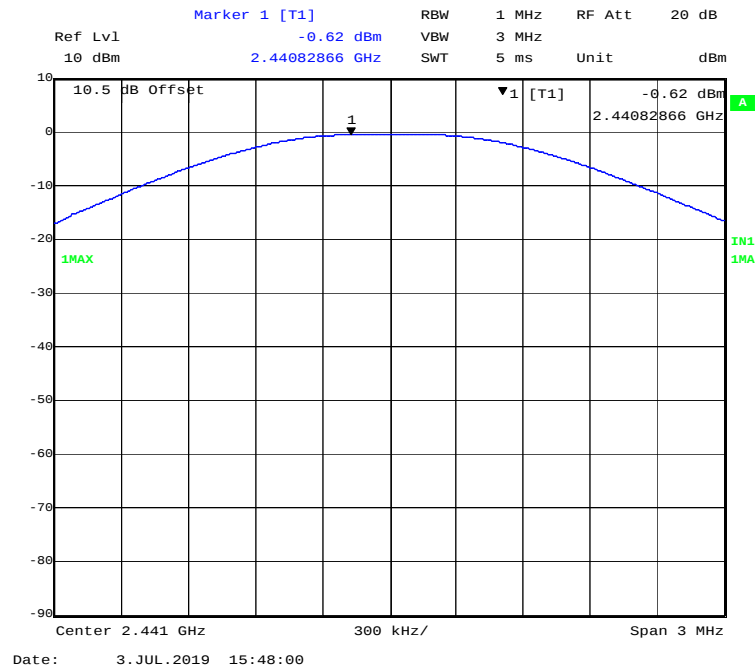


BDR (GFSK): 2480MHz

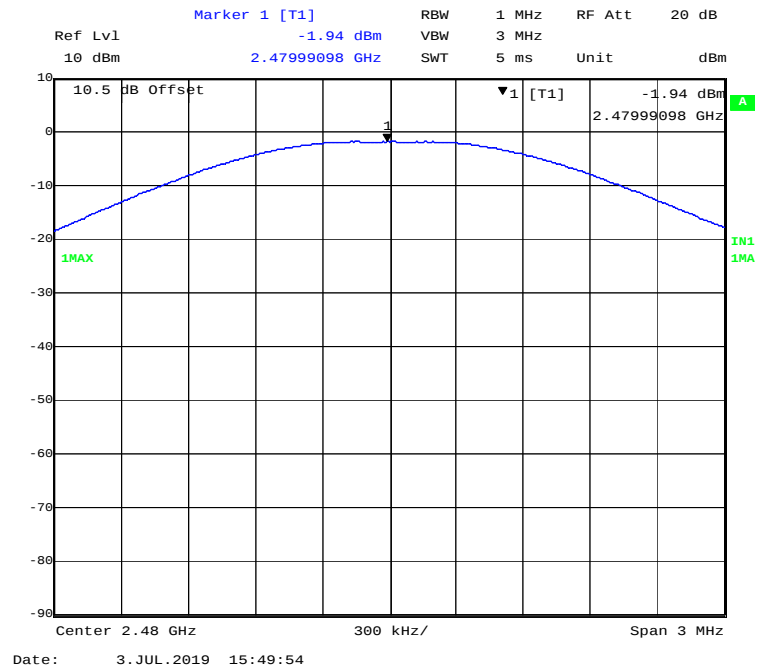


EDR($\pi/4$ -DQPSK): 2402MHz

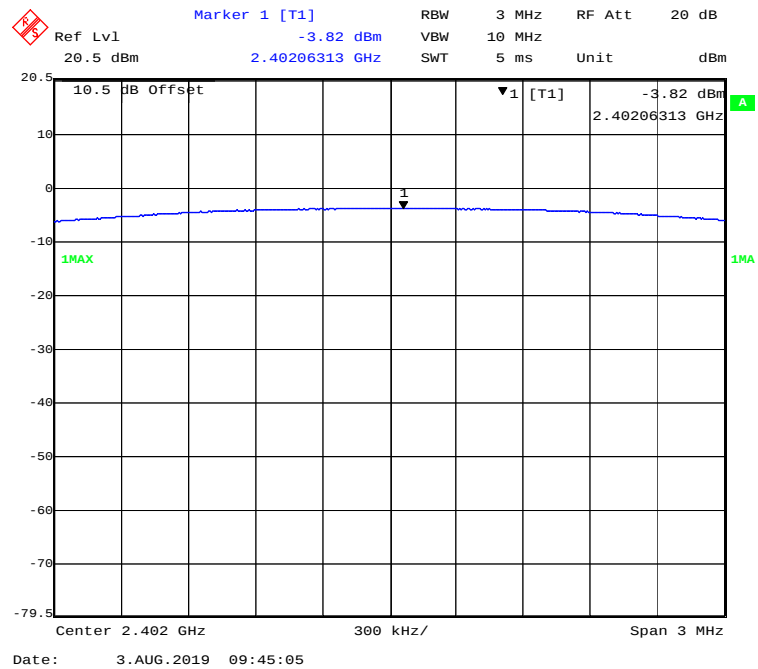


EDR($\pi/4$ -DQPSK): 2441MHz

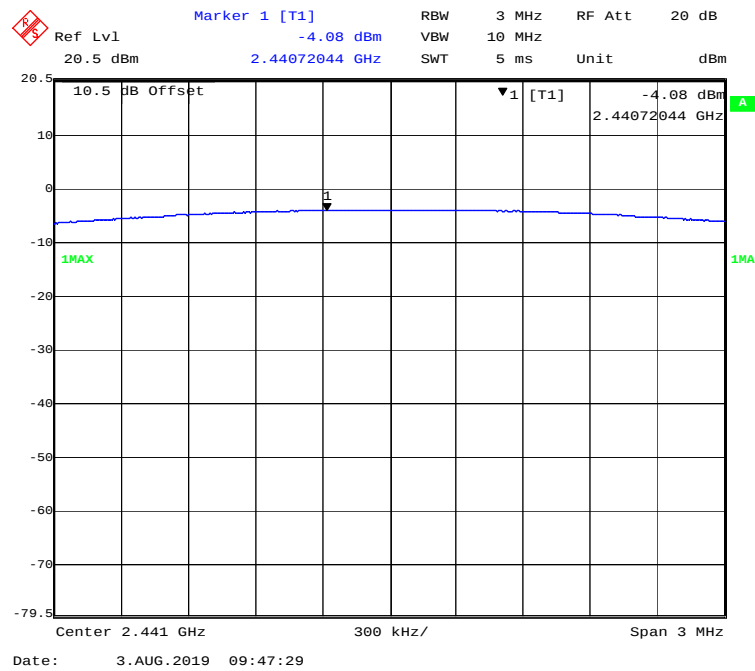


EDR($\pi/4$ -DQPSK): 2480MHz

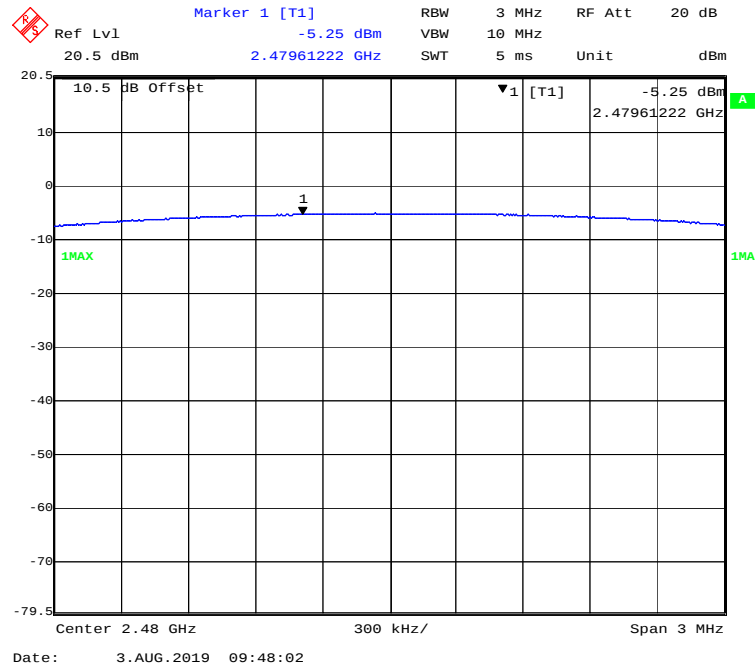


EDR(8DPSK): 2402MHz

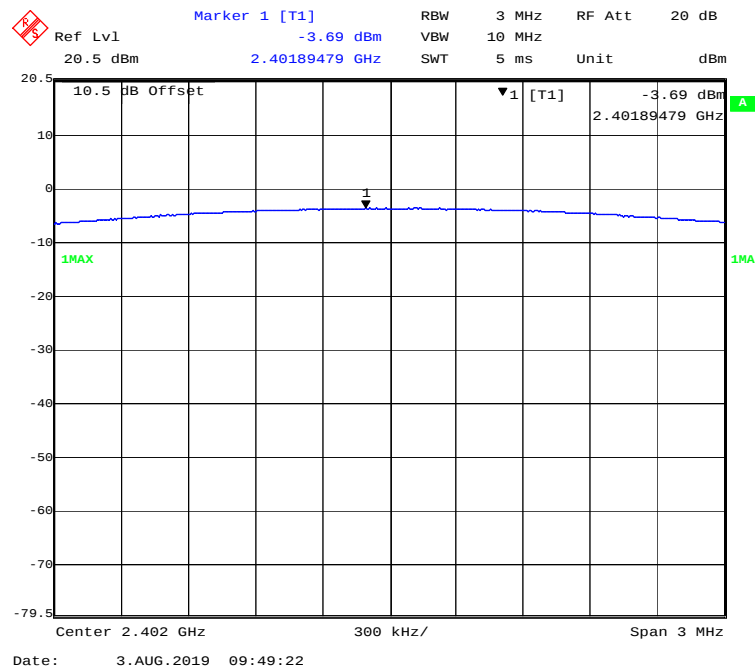

EDR(8DPSK): 2441MHz

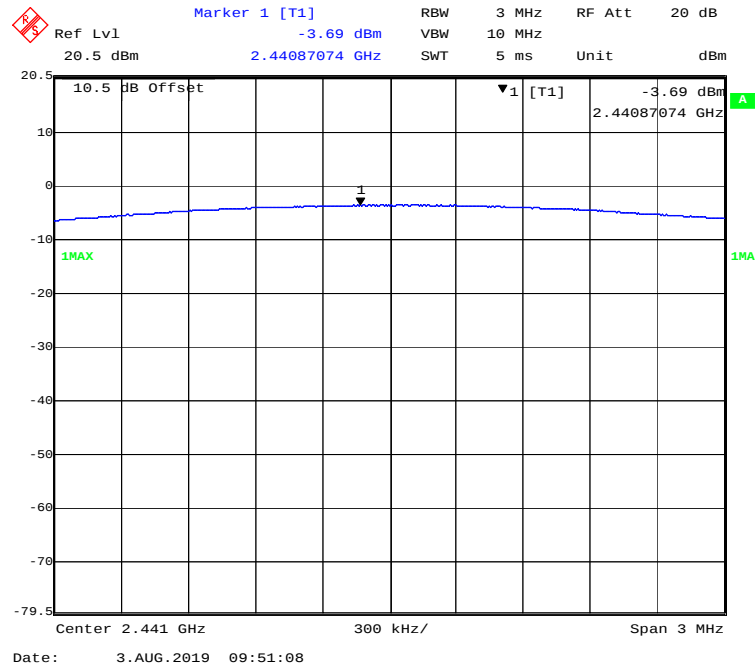

EDR(8DPSK): 2480MHz

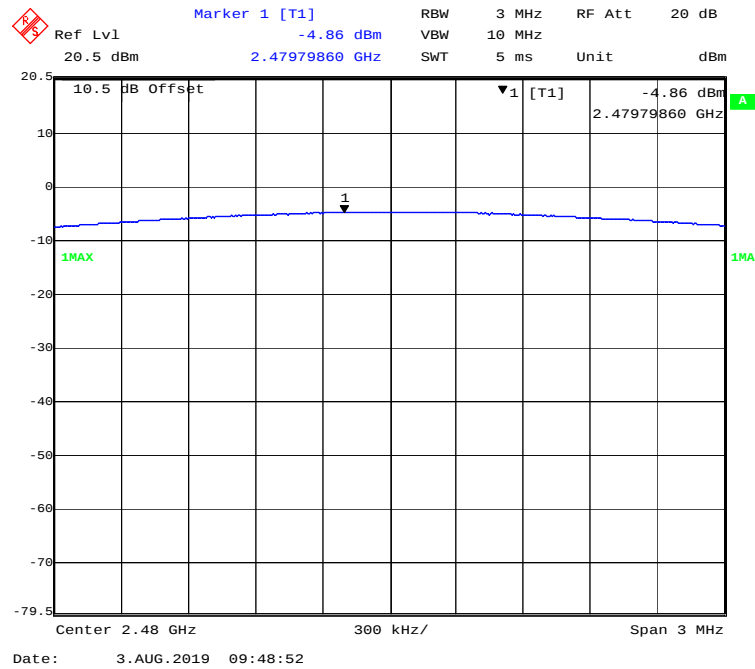

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data



Environmental Conditions

Temperature:	23.2~25.2℃
Relative Humidity:	48~50 %
ATM Pressure:	101.1~101.3 kPa


The testing was performed by Jack Jiao from 2019-07-03 to 2019-09-19.

EUT operation mode: Transmitting & Hopping.


Test Result: Compliant.

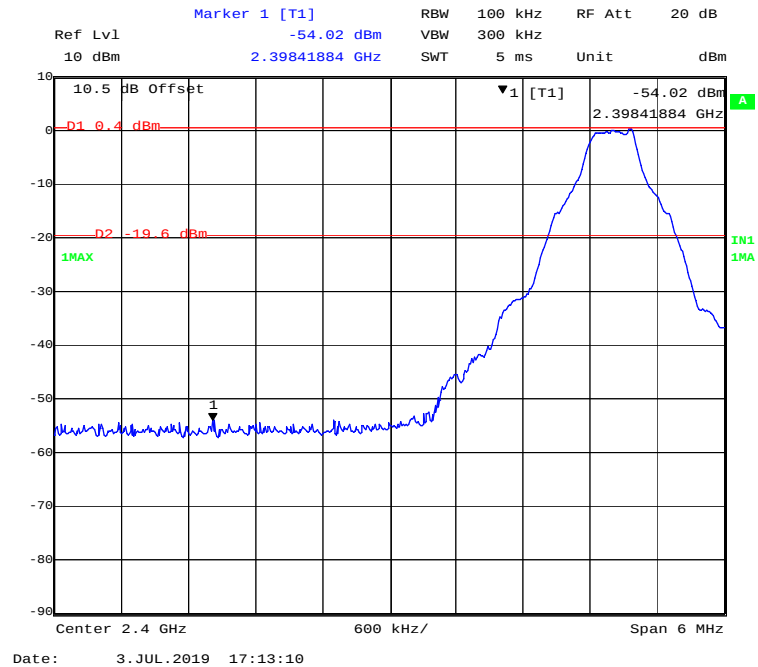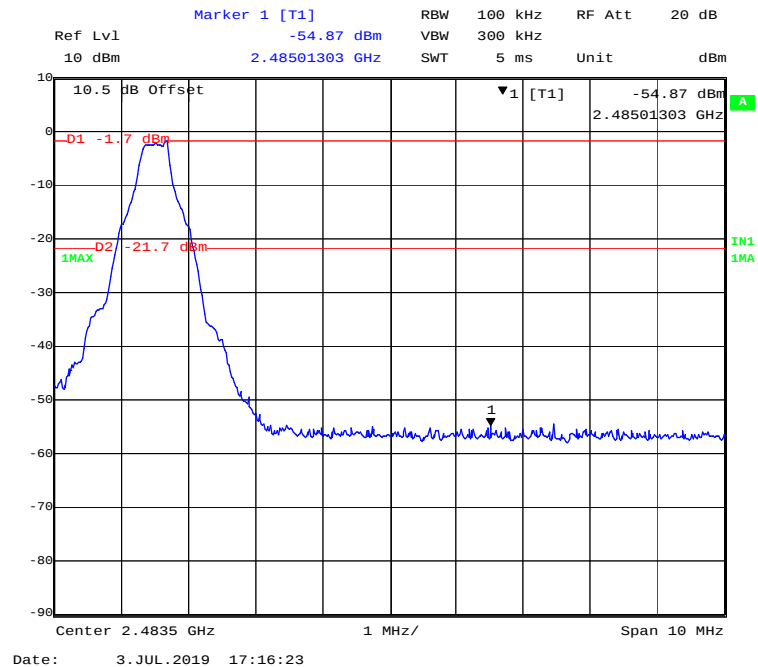Band Edge**BDR (GFSK): Left Side - Transmitting****BDR (GFSK): Right Side - Transmitting**


EDR ($\pi/4$ -DQPSK): Left Side - Transmitting

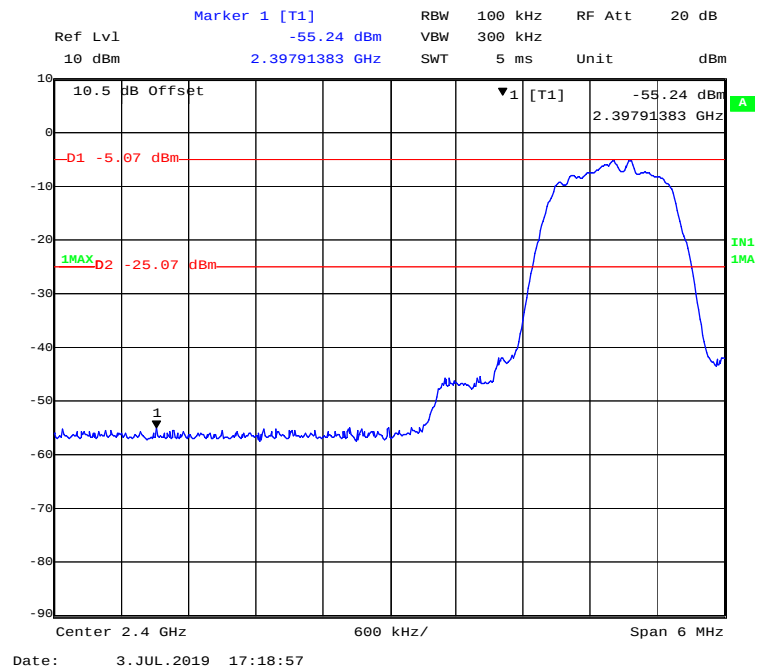


EDR ($\pi/4$ -DQPSK): Right Side - Transmitting


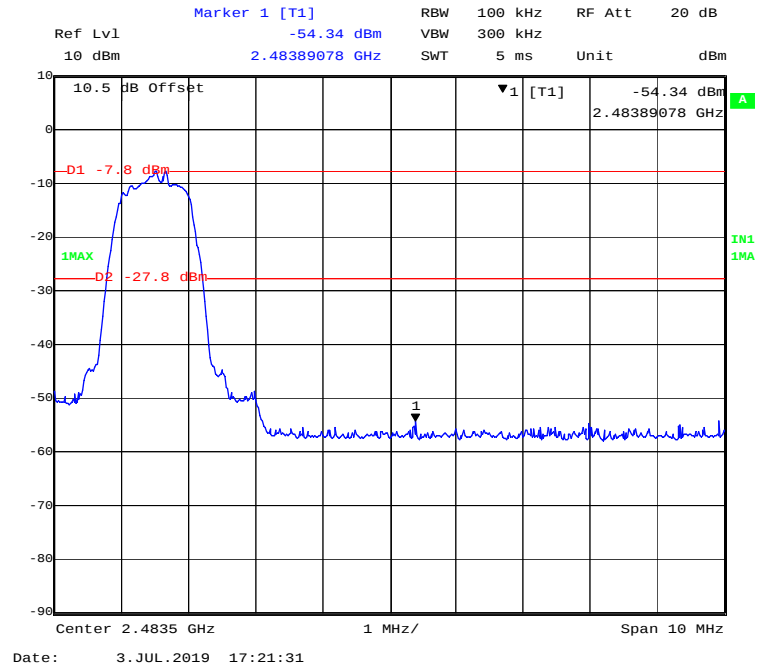



EDR (8DPSK): Left Side - Transmitting

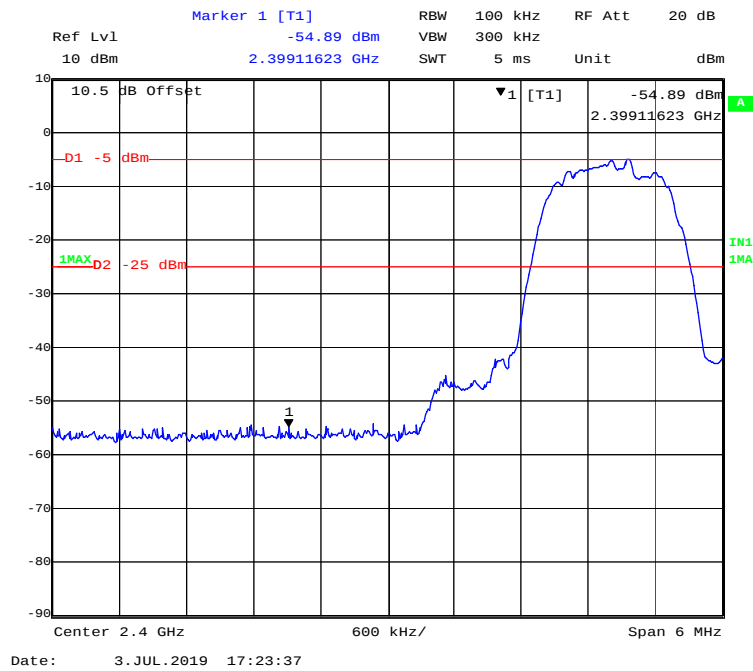

EDR (8DPSK): Right Side - Transmitting

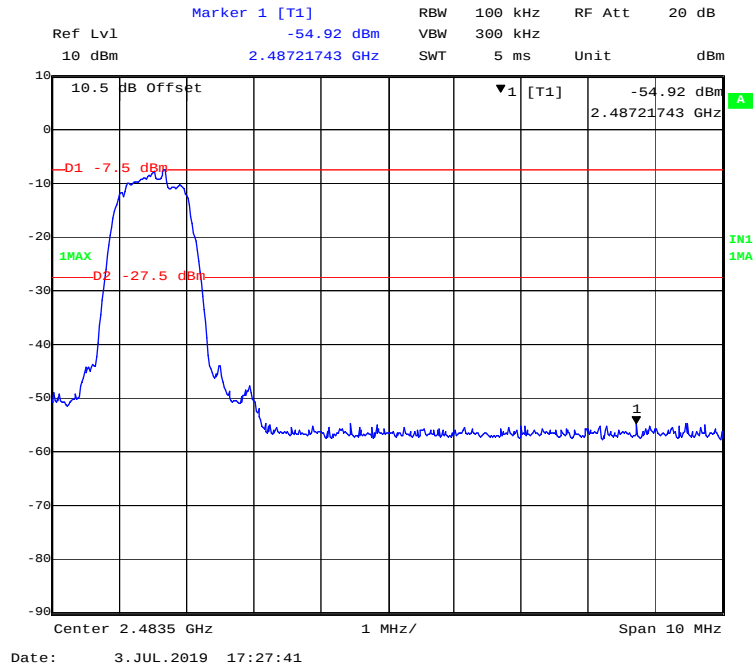

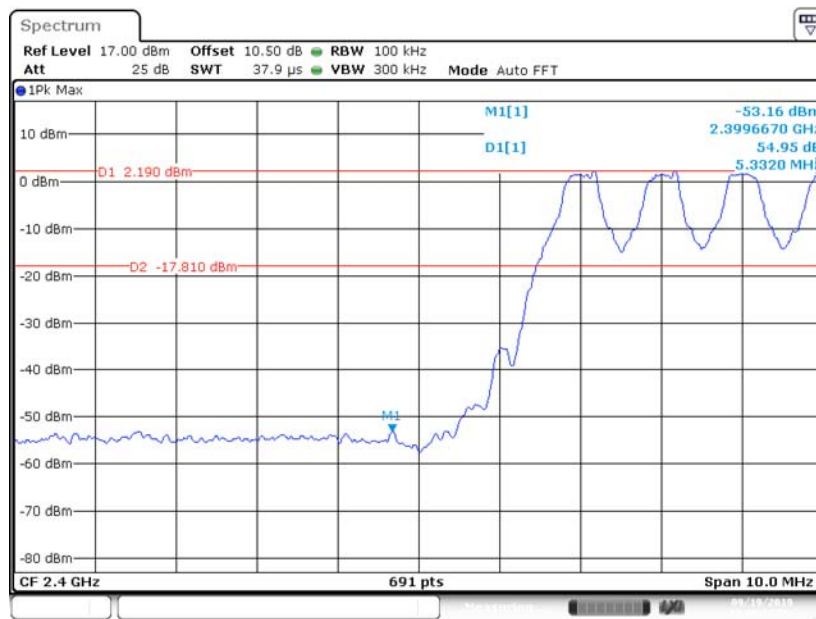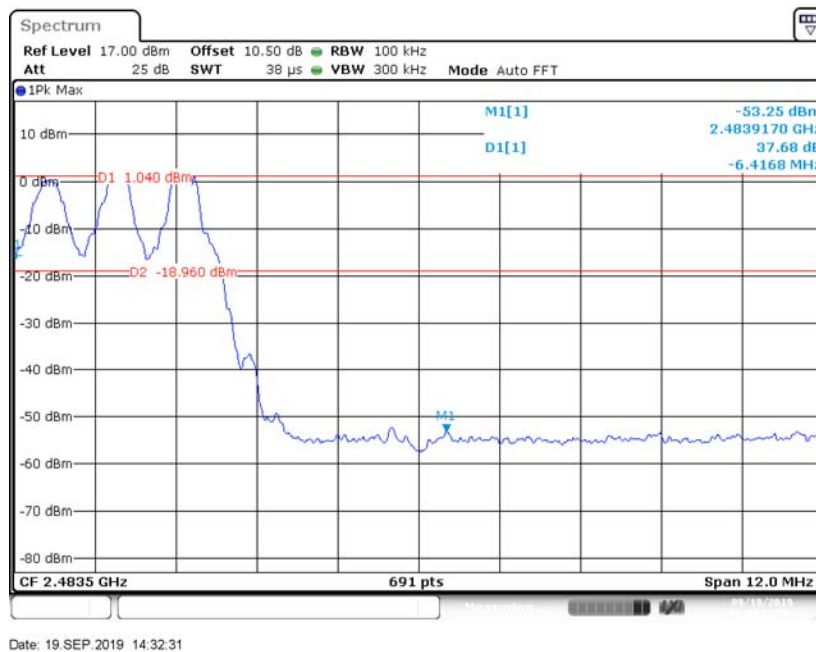
BDR (GFSK): Left Side - Hopping**BDR (GFSK): Right Side- Hopping**

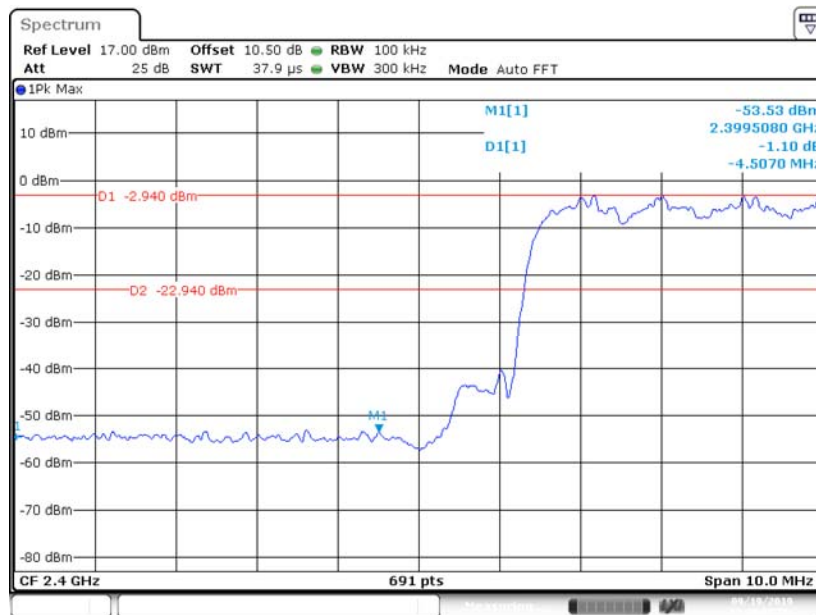EDR ($\pi/4$ -DQPSK): Left Side- Hopping


Date: 19 SEP. 2019 14:38:08

EDR ($\pi/4$ -DQPSK): Right Side- Hopping

Date: 19 SEP. 2019 14:33:36

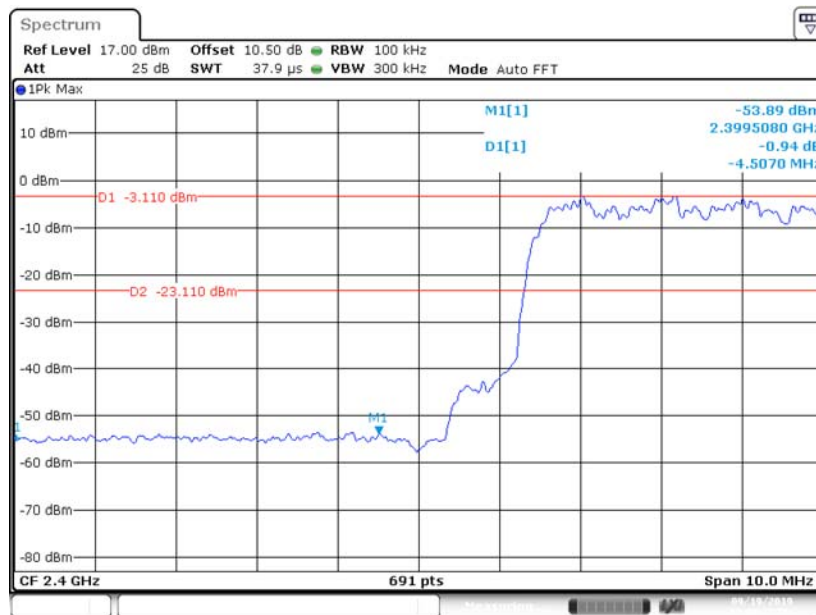EDR (8DPSK): Left Side- Hopping

Date: 19 SEP.2019 14:36:41

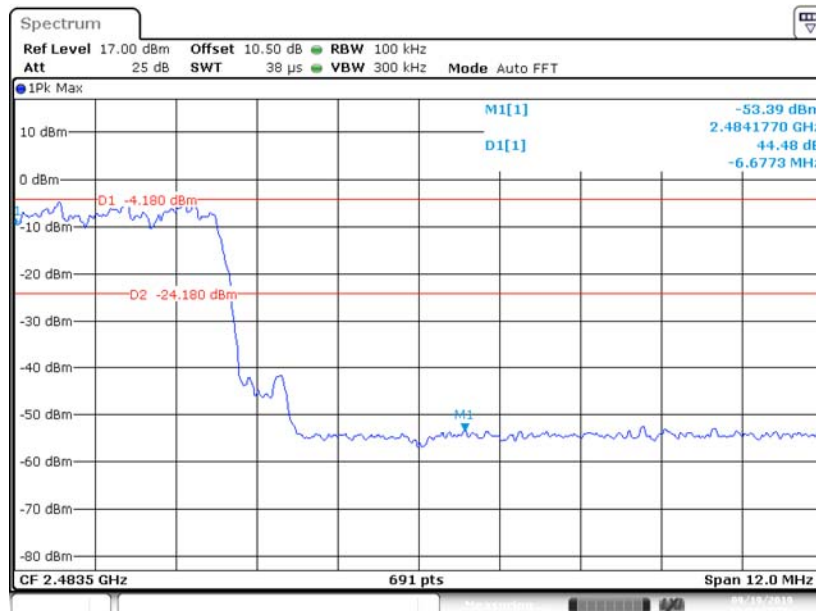EDR (8DPSK): Right Side- Hopping

Date: 19 SEP.2019 14:34:55

******* END OF REPORT *******