

DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

TEST REPORT

SCOPE OF WORK

FCC TESTING—ECH-REFL03-SPT, ECH-REFL03, ECH-REFL02-5G

REPORT NUMBER

210623023SZN-003

ISSUE DATE

07 February 2022

[REVISED DATE]

[-----]

PAGES

28

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Application
For
Certification

FCC ID: 2ATAP-ECHELONFIT**REFLECT MIRROR, REFLECT TOUCH SPORT****Model: ECH-REFL03-SPT, ECH-REFL03, ECH-REFL02-5G****2.4GHz Transceiver**

Report No.: 210623023SZN-003

We hereby certify that the sample of the above item is considered to comply with the requirements
of FCC Part 15, Subpart C for Intentional Radiator,
mention 47 CFR [10-1-20]

Prepared and Checked by:

Ryan Chen
Project Engineer

Approved by:

Peter Kang
Sr. Technical Supervisor
Date: 07 February 2022

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

TEST REPORT

Intertek Report No.: 210623023SZN-003

MEASUREMENT/TECHNICAL REPORTThis report concerns (check one): Original Grant Class II Change Equipment Type: DXX - Part 15 Low Power Communication Device TransmitterDeferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No If yes, defer until: _____
dateCompany Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-20 Edition] provision.

Report prepared by:

Ryan Chen
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict,
LongHua District, Shenzhen, P.R. China
Tel / Fax: 86-755-8614 0684/86-755-8601 6751

Table of Contents

1.0 Summary of Test Result	4
2.0 General Description	5
2.1 Product Description.....	5
2.2 Related Submittal(s) Grants.....	5
2.3 Test Methodology.....	5
2.4 Test Facility	6
3.0 System Test Configuration.....	7
3.1 Justification.....	7
3.2 EUT Exercising Software.....	7
3.3 Special Accessories.....	7
3.4 Equipment Modification	7
3.5 Measurement Uncertainty	8
3.6 Support Equipment List and Description.....	8
4.0 Emission Results.....	9
4.1 Radiated Test Results	9
4.1.1 Field Strength Calculation.....	9
4.1.2 Radiated Emission Configuration Photograph.....	10
4.1.3 Radiated Emissions.....	10
4.1.4 Transmitter Spurious Emissions.....	13
4.2 Conducted Emission Configuration Photograph.....	17
4.2.1 Conducted Emission	17
5.0 Equipment Photographs	20
6.0 Product Labelling.....	20
7.0 Technical Specifications	20
8.0 Instruction Manual.....	20
9.0 Miscellaneous Information.....	21
9.1 Bandedge Plot	21
9.2 20dB Bandwidth	24
9.3 Discussion of Pulse Desensitization.....	25
9.4 Calculation of Average Factor	25
9.5 Emissions Test Procedures	26
10.0 Test Equipment List	28

TEST REPORT

Intertek Report No.: 210623023SZN-003

1.0 Summary of Test Result**Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD****Applicant Address: Room 201, Building 3rd, No. 43 of Gangjian RD. Changping town, Dongguan City, Guangdong Province, China****Manufacturer: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD****Manufacturer Address: Room 201, Building 3rd, No. 43 of Gangjian RD. Changping town, Dongguan City, Guangdong Province, China****Model: ECH-REFL03-SPT, ECH-REFL03, ECH-REFL02-5G****FCC ID: 2ATAP-ECHELONFIT**

Test Specification	Reference	Results
Transmitter Radiated Emission	15.249 &15.209 &15.205	Pass
Conducted Emission	15.207	Pass
Bandedge	15.249 &15.209 &15.205	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

TEST REPORT

Intertek Report No.: 210623023SZN-003

2.0 General Description**2.1 Product Description**

The Equipment Under Test (EUT) is an Echelon Reflect with BT5.0 (dual-mode) operating in 2402-2480MHz, 2.4G Wi-Fi function operating in 2412-2462MHz and 5G Wi-Fi function operating in 5150-5250&5725-5850MHz. The EUT is powered by A.C. 120V, 60Hz. User cannot access USB/SD card ports in normal use. For more detailed features description, please refer to the user's manual.

Antenna Type: Internal Antenna

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

Antenna Gain: 3dBi

Bluetooth Version: 5.0 EDR

The Model: ECH-REFL03, ECH-REFL02-5G are the same as the Model: ECH-REFL03-SPT in hardware aspect. Their difference in product name, model number and with/without support touch screen function for marketing purpose. Details as below:

Product name	Model Number	Description
REFLECT MIRROR	ECH-REFL03	Not support touch screen function
REFLECT TOUCH SPORT	ECH-REFL03-SPT	Support touch screen function
REFLECT MIRROR	ECH-REFL02-5G	Not support touch screen function

Both design (not support touch screen function and support touch screen function) were tested, but only the worst-case testing data were recorded in this report.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the Echelon Reflect which has Bluetooth function.

Remaining functions are subjected to the following documents:

For the 2.4G Wi-Fi function was tested and demonstrated in report 210623023SZN-001.

For the 5G Wi-Fi function was tested and demonstrated in report 210623023SZN-002.

For the BT 5.0 BLE function was tested and demonstrated in report 210623023SZN-004.

For other functions were reported in the SDoC report: 210526036SZN-005.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

TEST REPORT

Intertek Report No.: 210623023SZN-003

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

TEST REPORT

Intertek Report No.: 210623023SZN-003

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by A.C. 120V, 60Hz during the test. Both designing schemes have been considered, only the worst data was reported in this report.

All packets DH1, DH3 & DH5 mode in modulation type GFSK, $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The EUT and transmitting antenna was centered on the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the Engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

Test software: Ampak RFTestTool, VER: 5.6

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

TEST REPORT

Intertek Report No.: 210623023SZN-003

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Portable computer (Provided by Intertek)	DELL	Latitude 3480

TEST REPORT

Intertek Report No.: 210623023SZN-003

4.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

 RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

 CF = Cable Attenuation Factor in dB

 AF = Antenna Factor in dB

 AG = Amplifier Gain in dB

 PD = Pulse Desensitization in dB

 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V}/\text{m})/20] = 125.9 \mu\text{V}/\text{m}$$

TEST REPORT

Intertek Report No.: 210623023SZN-003

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Simultaneous transmission was considered during the test.

Worst Case Radiated Emission
at
50.370000 MHz

Judgement: Passed by 5.7 dB

TEST PERSONNEL:

Sign on file

Ryan Chen, Project Engineer
Typed/Printed Name

23 October 2021

Date

TEST REPORT

Intertek Report No.: 210623023SZN-003

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

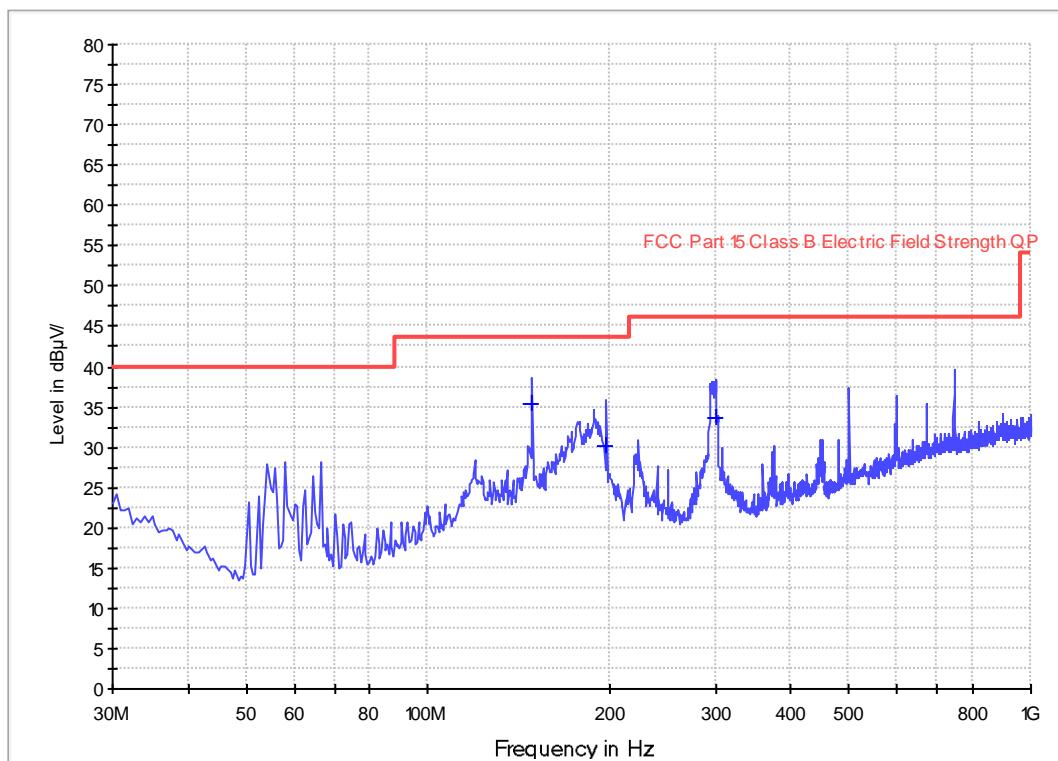
Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Simultaneous transmission

ANT Polarity: Horizontal

FCC Part 15



Frequency (MHz)	Quasi Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
148.825000	35.5	1000.0	120.000	H	10.5	8.0	43.5
197.810000	30.3	1000.0	120.000	H	12.3	13.2	43.5
300.145000	33.5	1000.0	120.000	H	16.2	12.5	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Limit Line(dB μ V/m) – Level (dB μ V/m)

TEST REPORT

Intertek Report No.: 210623023SZN-003

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

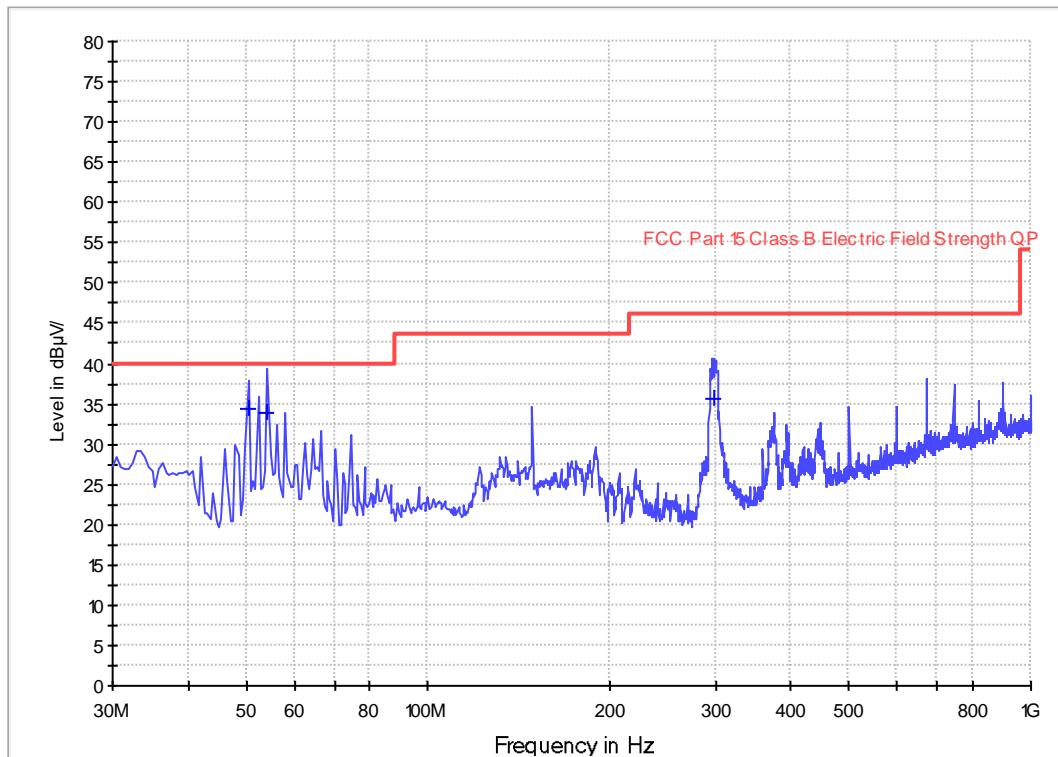
Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Simultaneous transmission

ANT Polarity: Vertical

FCC Part 15



Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
50.370000	34.3	1000.0	120.000	V	7.9	5.7	40.0
54.250000	33.9	1000.0	120.000	V	7.9	6.1	40.0
298.205000	35.7	1000.0	120.000	V	16.2	10.3	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line(dB μ V/m) – Level (dB μ V/m)

TEST REPORT

Intertek Report No.: 210623023SZN-003

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
4804.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.5 dB

TEST PERSONNEL:*Sign on file*

Ryan Chen, Project Engineer
Typed/Printed Name

23 October 2021

Date

TEST REPORT

Intertek Report No.: 210623023SZN-003

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Transmitting

Table 1

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2402.000	102.1	36.7	28.1	93.5	114.0	-20.5
Horizontal	4804.000	65.7	36.7	35.5	64.5	74.0	-9.5
Horizontal	7206.000	53.8	36.1	36.5	54.2	74.0	-19.8
Horizontal	9608.000	55.7	36.3	38.0	57.4	74.0	-16.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2402.000	102.1	36.7	28.1	22.5	71.0	94.0	-23.0
Horizontal	4804.000	65.7	36.7	35.5	22.5	42.0	54.0	-12.0
Horizontal	7206.000	53.8	36.1	36.5	22.5	31.7	54.0	-22.3
Horizontal	9608.000	55.7	36.3	38.0	22.5	34.9	54.0	-19.1

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Ryan Chen

TEST REPORT

Intertek Report No.: 210623023SZN-003

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Transmitting

Table 2

Radiated Emissions

(2441MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2441.000	100.7	36.7	28.1	92.1	114.0	-21.9
Horizontal	4882.000	50.6	36.7	35.5	49.4	74.0	-24.6
Horizontal	7323.000	53.4	36.1	37.2	54.5	74.0	-19.5
Horizontal	9764.000	56.4	36.2	37.0	57.2	74.0	-16.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2441.000	100.7	36.7	28.1	22.5	69.6	94.0	-24.4
Horizontal	4882.000	50.6	36.7	35.5	22.5	26.9	54.0	-27.1
Horizontal	7323.000	53.4	36.1	37.2	22.5	32.0	54.0	-22.0
Horizontal	9764.000	56.4	36.2	37.0	22.5	34.7	54.0	-19.3

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Ryan Chen

TEST REPORT

Intertek Report No.: 210623023SZN-003

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Transmitting

Table 3

Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2480.000	99.7	36.7	28.1	91.1	114.0	-22.9
Horizontal	4960.000	51.4	36.7	35.5	50.2	74.0	-23.8
Horizontal	7440.000	56.3	36.1	37.2	57.4	74.0	-16.6
Horizontal	9920.000	55.9	36.3	38.9	58.5	74.0	-15.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2480.000	99.7	36.7	28.1	22.5	68.6	94.0	-25.4
Horizontal	4960.000	51.4	36.7	35.5	22.5	27.7	54.0	-26.3
Horizontal	7440.000	56.3	36.1	37.2	22.5	34.9	54.0	-19.1
Horizontal	9920.000	55.9	36.3	38.9	22.5	36.0	54.0	-18.0

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Ryan Chen

TEST REPORT

Intertek Report No.: 210623023SZN-003

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

4.2.1 Conducted Emission

Worst Case Conducted Configuration
at
0.886000MHz

Judgement: Passed by 5.7dB margin

TEST PERSONNEL:

Sign on file

Ryan Chen, Project Engineer
Typed/Printed Name

23 October 2021

Date

TEST REPORT

Intertek Report No.: 210623023SZN-003

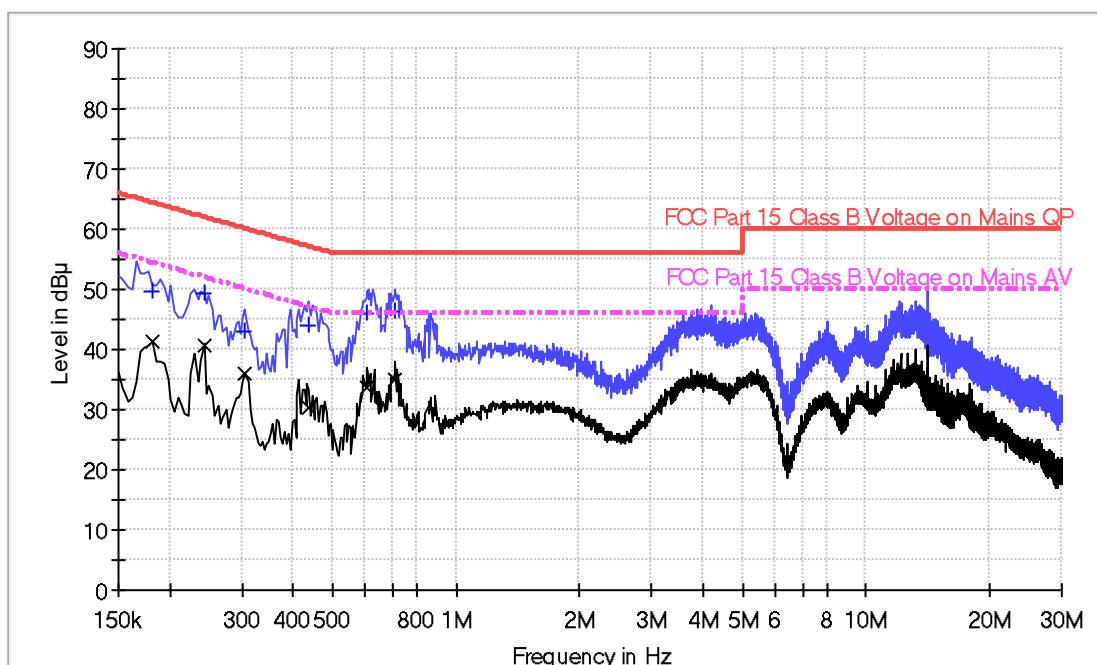
Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode: Simultaneous transmission

Phase: Live

Graphic / Data Table**Conducted Emissions
Pursuant to FCC 15.207: Emissions Requirement****Result Table QP**

Frequency (MHz)	Quasi Peak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.181500	49.7	L1	9.6	14.7	64.4
0.242000	49.4	L1	9.6	12.6	62.0
0.306000	42.8	L1	9.6	17.3	60.1
0.438000	44.1	L1	9.6	13.0	57.1
0.606000	46.0	L1	9.6	10.0	56.0
0.710000	46.4	L1	9.6	9.6	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.181500	41.3	L1	9.6	13.1	54.4
0.242000	40.7	L1	9.6	11.4	52.0
0.306000	35.9	L1	9.6	14.2	50.1
0.438000	30.3	L1	9.6	16.8	47.1
0.606000	33.8	L1	9.6	12.2	46.0
0.710000	35.1	L1	9.6	10.9	46.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = Limit (dB μ V) – Level (dB μ V)

TEST REPORT

Intertek Report No.: 210623023SZN-003

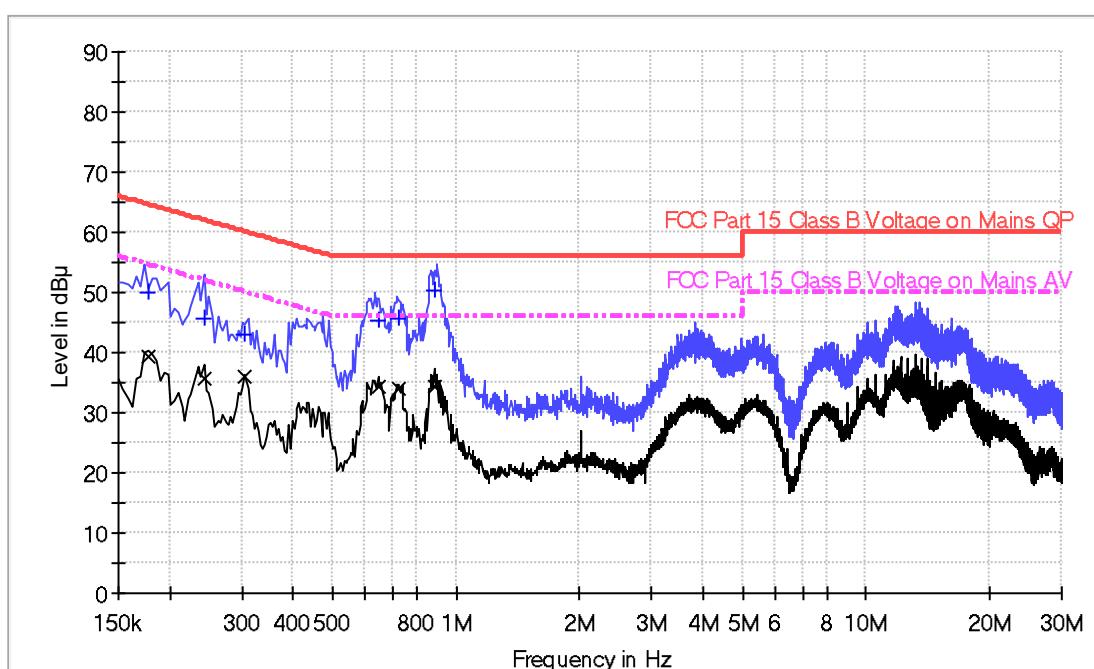
Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode: Simultaneous transmission

Phase: Neutral

Graphic / Data Table**Conducted Emissions
Pursuant to FCC 15.207: Emissions Requirement****Result Table QP**

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.177000	50.1	N	9.5	14.5	64.6
0.242000	45.7	N	9.5	16.3	62.0
0.306000	42.9	N	9.5	17.2	60.1
0.646000	45.4	N	9.5	10.6	56.0
0.722000	45.8	N	9.5	10.2	56.0
0.886000	50.3	N	9.5	5.7	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.177000	39.5	N	9.5	15.1	54.6
0.242000	35.5	N	9.5	16.5	52.0
0.306000	36.2	N	9.5	13.9	50.1
0.646000	34.5	N	9.5	11.5	46.0
0.722000	33.9	N	9.5	12.1	46.0
0.886000	34.2	N	9.5	11.8	46.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = Limit (dB μ V) – Level (dB μ V)

TEST REPORT

Intertek Report No.: 210623023SZN-003

5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Bandedge Plot

The test plots are attached as below. From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lowest frequency channel (2402MHz):

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 93.5 \text{ dB}\mu\text{V/m} - 48.61 \text{ dB} \\ &= 44.89 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 71.0 \text{ dB}\mu\text{V/m} - 48.61 \text{ dB} \\ &= 22.39 \text{ dB}\mu\text{V/m} \end{aligned}$$

(ii) Highest frequency channel (2480MHz):

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 91.1 \text{ dB}\mu\text{V/m} - 50.21 \text{ dB} \\ &= 40.89 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 68.6 \text{ dB}\mu\text{V/m} - 50.21 \text{ dB} \\ &= 18.39 \text{ dB}\mu\text{V/m} \end{aligned}$$

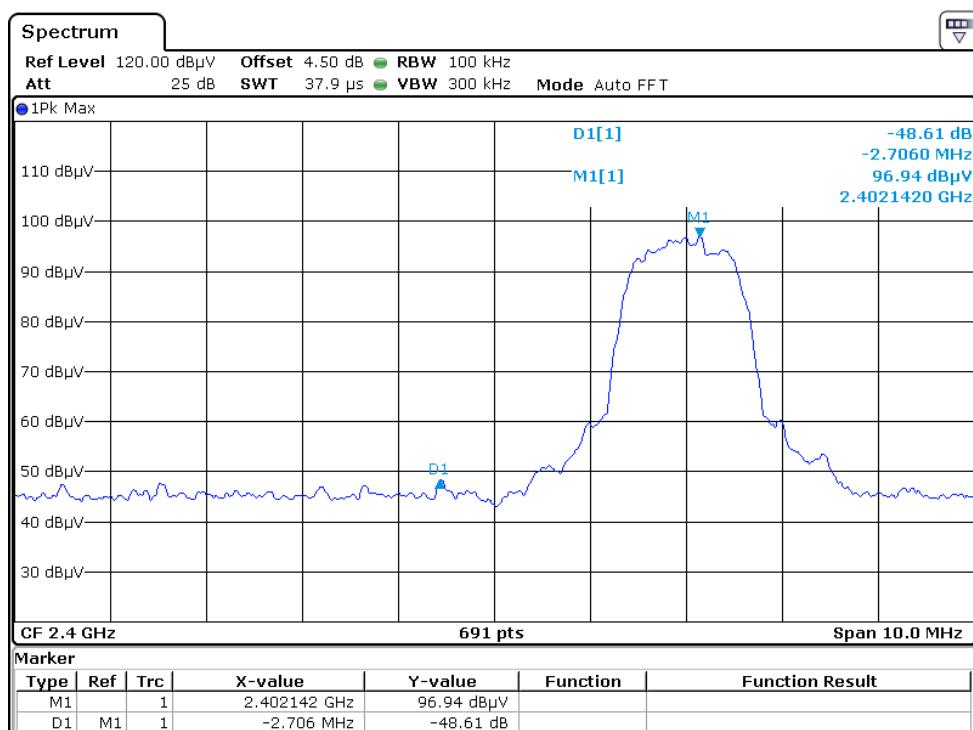
The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ V/m (Peak Limit) and 54dB μ V/m (Average Limit).

TEST REPORT

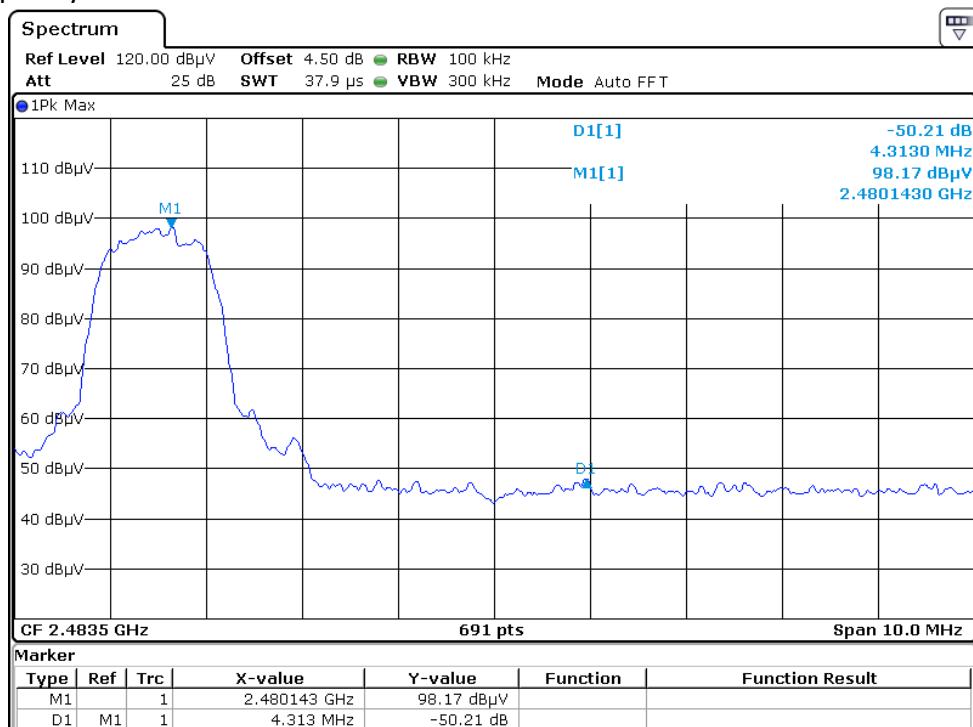
Intertek Report No.: 210623023SZN-003

Hopping function off

Lowest frequency Channel

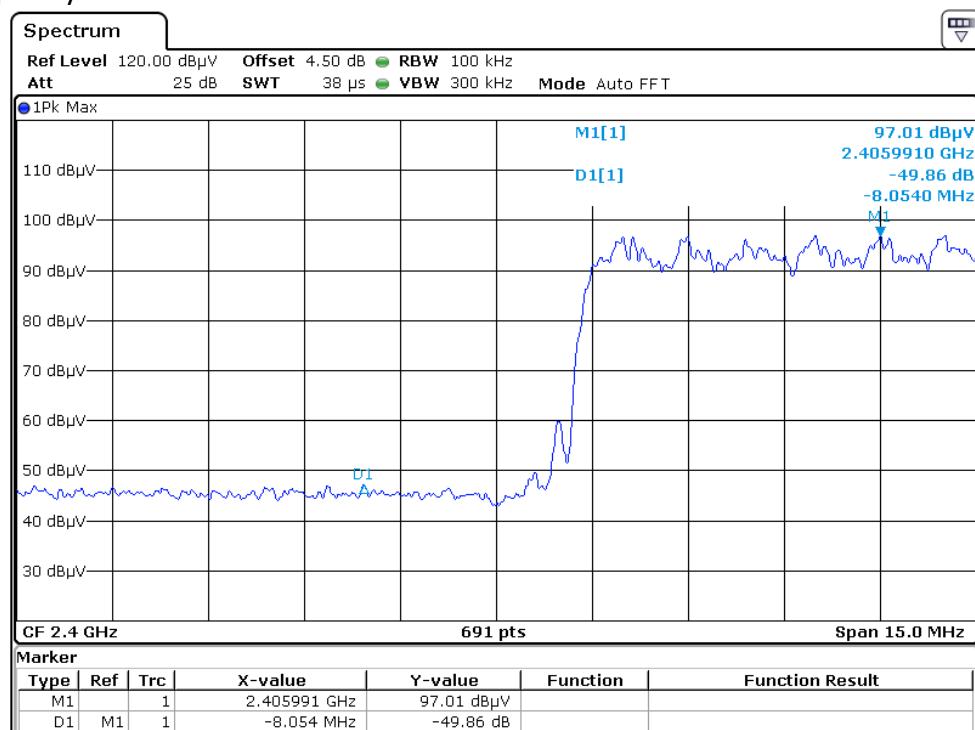
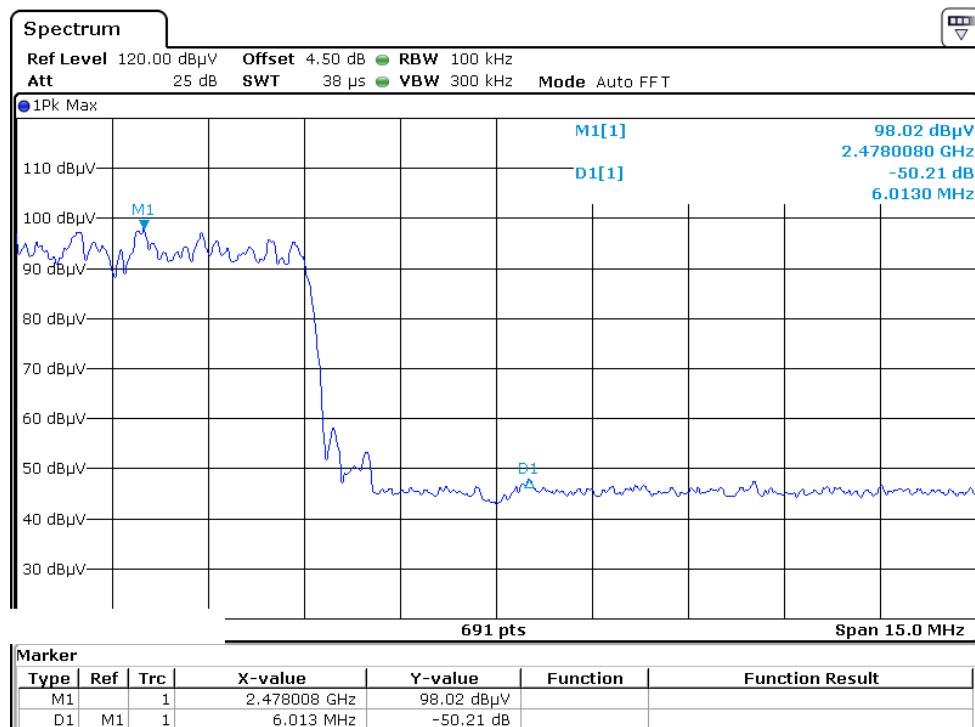


Highest frequency Channel



TEST REPORT

Intertek Report No.: 210623023SZN-003

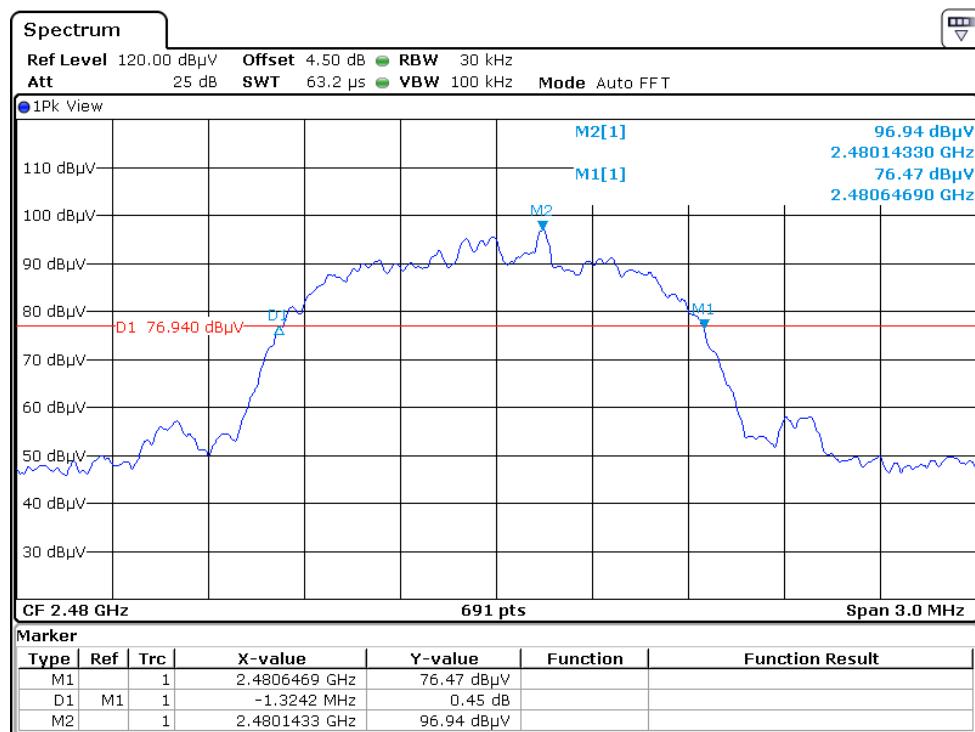
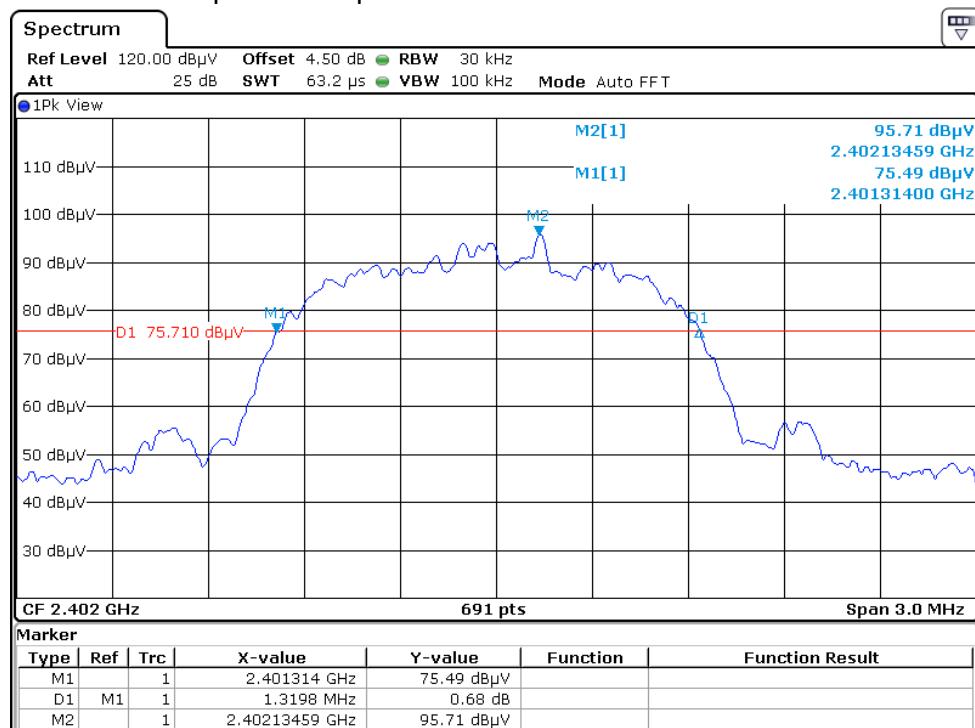
**Hopping function on
Lowest frequency Channel**

Highest frequency Channel


TEST REPORT

Intertek Report No.: 210623023SZN-003

9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered. The test plots are reported as below.



TEST REPORT

Intertek Report No.: 210623023SZN-003

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 625 μ s for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

9.4 Calculation of Average Factor

Based on the Bluetooth Specification Version 5.0 (EDR mode) and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop = 1 / 133.33 hops/second = 7.5 ms

Time to cycle through all channels = 7.5 x 20 channels = 150 ms

Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)

Worst case dwell time = 7.5 ms

Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

TEST REPORT

Intertek Report No.: 210623023SZN-003

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

TEST REPORT

Intertek Report No.: 210623023SZN-003

9.5 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

TEST REPORT

Intertek Report No.: 210623023SZN-003

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-13	Biconilog Antenna	ETS	3142E	00217919	2019-06-10	2022-06-10
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2023-05-18
SZ061-08	Horn Antenna	ETS	3115	00092346	2021-09-07	2022-09-07
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	2019-08-13	2022-08-13
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	2021-05-10	2022-05-10
SZ185-01	EMI Receiver	R & S	ESCI	100547	2020-12-22	2021-12-22
SZ181-04	Preamplifier	Agilent	8449B	3008A024 74	2021-05-10	2022-05-10
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	2018-12-15	2021-12-15
SZ062-02	RF Cable	RADIALL	RG 213U	--	2021-06-01	2021-12-01
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	2021-06-01	2021-12-01
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	2021-06-01	2021-12-01
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	2021-05-11	2022-05-11
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2021-10-15	2022-10-15
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	2021-05-11	2022-05-11
SZ188-03	Shielding Room	ETS	RFD-100	4100	2018-12-15	2021-12-15
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	2021-10-15	2022-10-15
SZ016-12	Programmable Temperature & Humidity Chamber	Taili	MHK-120NK	AB0105	2021-01-12	2022-01-12
SZ006-30	DC Power Supply	Guwei	SPS-3610	GEQ920 551	2021-01-05	2022-01-05

***** End of Report *****