

# RF

## TEST REPORT

**Report No.:** **210623023SZN-002**

**Model No.:** **ECH-REFL03-SPT, ECH-REFL03,  
ECH-REFL02-5G**

**FCC ID:** **2ATAP-ECHELONFIT**

**Issued Date:** **07 February 2022**

**Applicant:** **DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD  
Room 201, Building 3rd, No. 43 of Gangjian RD. Changping town, Dongguan  
City, Guangdong Province, China**

**Test Method/  
Standard:** **FCC Part 15 Subpart E;  
KDB 789033 D02 v02r01;  
KDB 662911 D01 v02r01;  
ANSI C63.10-2013**

**Test By:** **Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community,  
GuanHu Subdistrict, LongHua District, ShenZhen.**

**The test report was prepared by:**

Ryan Chen / Project Engineer

**The test report was reviewed by:**

Peter Kang / Senior Technical Supervisor

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

## Table of Contents

Summary of Tests .....	3
1. General information .....	4
1.1 Identification of the EUT .....	4
1.2 Additional information about the EUT .....	5
1.3 Antenna description (15.203) .....	5
1.4 Peripherals equipment .....	5
2. Test specifications.....	6
2.1 Test standard.....	6
2.2 Operation mode.....	6
3. Maximum Output Power test (FCC 15.407).....	7
3.1 Operating environment .....	7
3.2 Test setup & procedure.....	7
3.3 Limit .....	7
3.4 Measured data of Maximum Output Power test results.....	8
4. Power Spectrum Density test (FCC 15.407).....	9
4.1 Operating environment .....	9
4.2 Test setup & procedure.....	9
4.3 Limit .....	9
4.4 Measured data of Power Spectrum Density test results .....	10
5. Minimum 6 dB RF Bandwidth (FCC 15.407) .....	11
5.1 Operating environment .....	11
5.2 Test setup & procedure.....	11
5.3 Limit .....	11
5.4 Measured data of 6dB down Emission Bandwidth test results.....	12
6. Radiated Emission test (FCC 15.205 & 15.209 & 15.407).....	13
6.1 Operating environment .....	13
6.2 Test setup & procedure.....	13
6.3 Limit .....	15
6.4 Radiated spurious emission test data .....	17
6.4.1 Measurement results: frequencies equal to or less than 1 GHz .....	17
6.4.2 Measurement results: frequency above 1GHz .....	19
7. Power Line Conducted Emission test .....	21
7.1 Operating environment .....	21
7.2 Test setup & procedure.....	21
7.3 Limit .....	21
7.4 Power Line Conducted Emission test data.....	22
8. Frequency Stability Test.....	24
8.1 Test setup & procedure.....	24
8.2 Frequency Stability Test Data.....	24

**Summary of Tests**

FCC Parts	Test	Section	Results
15.203	Antenna Requirement	1.3	Pass
15.407 a (1)/(3)	Maximum output power test	3	Pass
15.407 a (1)/(3)	Power Spectrum Density test	4	Pass
15.407 e	6dB Bandwidth	5	Pass
15.407 b, 15.205, 15.209	Radiated spurious emission test	6	Pass
15.207	AC line conducted emission test	7	Pass
15.407 g	Frequency Stability	8	Pass

## 1. General information

### 1.1 Identification of the EUT

Product: REFLECT MIRROR, REFLECT TOUCH SPORT  
Model No.: ECH-REFL03-SPT, ECH-REFL03, ECH-REFL02-5G  
Type of Device: Slave device  
Nominal Channel Bandwidth: 802.11a/n-HT20 (20 MHz), 802.11n-HT40 (40MHz), 802.11ac (20/40/80MHz)  
Operating Frequency: 5150 MHz ~ 5250 MHz, 5725~5850MHz  
Channel Number: 4 channels for 5180 MHz ~ 5240 MHz (802.11a/n/ac-HT20);  
2 channels for 5190 MHz ~ 5230 MHz (802.11n/ac-HT40);  
1 channel for 5210 MHz (802.11ac-HT80);  
5 channels for 5745 MHz ~ 5825 MHz (802.11a/n/ac-HT20);  
2 channels for 5755 MHz ~ 5795 MHz (802.11n/ac-HT40);  
1 channel for 5775 MHz (802.11ac-HT80);  
Rated Power: AC 100-240V, 50/60Hz  
Test Date(s): 23 June 2021 to 25 October 2021  
Note 1: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.  
Note 2: When determining the test conclusion, the Measurement Uncertainty of test has been considered.

## 1.2 Additional information about the EUT

The Equipment Under Test (EUT) is an Echelon Reflect with BT5.0 (dual-mode) operating in 2402-2480MHz, 2.4G Wi-Fi function operating in 2412-2462MHz and 5G Wi-Fi function operating in 5150-5250&5725-5850MHz. The EUT is powered by A.C. 100-240V, 50/60Hz. User cannot access USB/SD card ports in normal use. For more detailed features description, please refer to the user's manual.

### Related Submittal(s) Grants

This is an application for certification of U-NII device (5GHz Wi-Fi transmitter portion).

Remaining functions are subjected to the following documents:

For the 2.4G Wi-Fi function was tested and demonstrated in report 210623023SZN-001.

For the BT 5.0 EDR function was tested and demonstrated in report 210623023SZN-003.

For the BT 5.0 BLE function was tested and demonstrated in report 210623023SZN-004.

For other functions were reported in the SDOC report: 210526036SZN-005.

The Model: ECH-REFL03, ECH-REFL02-5G are the same as the Model: ECH-REFL03-SPT in hardware aspect. Their difference in product name, model number and with/without support touch screen function for marketing purpose. Details as below:

Product name	Model Number	Description
REFLECT MIRROR	ECH-REFL03	Not support touch screen function
REFLECT TOUCH SPORT	ECH-REFL03-SPT	Support touch screen function
REFLECT MIRROR	ECH-REFL02-5G	Not support touch screen function

Both design (not support touch screen function and support touch screen function) were tested, but only the worst-case testing data were recorded in this report.

Partial tests are required to both designing schemes after evaluation, but only worst-case is reflected in the report.

## 1.3 Antenna description (15.203)

The EUT uses Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

Antenna Gain: 2dBi Max for 5G WIFI

## 1.4 Peripherals equipment

Description	Manufacturer	Model No.
Portable computer (Provided by Intertek)	DELL	Latitude 3480

## 2. Test specifications

### 2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 E, Section 15.203, 15.207, 15.209, 15.407 and ANSI C63.10/2013, method of measurement: KDB 789033 D02.

The test of radiated measurements according to FCC Part 15 Section 15.33(a) had been conducted and the field strength of this frequency band was all meet limit requirement, thus we evaluate the EUT pass the specified test.

The AC power conducted emissions was invested over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz (15.207 paragraph).

Radiated emissions were invested cover the frequency range from 9KHz to 30MHz using a receiver RBW of 9kHz, from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz, VBW of 3MHz, Detector=Peak record for Peak reading, RBW of 1 MHz, VBW of 3MHz, Detector=RMS record for Average reading recorded on the report.

The EUT setup configurations please refer to the photo of radiated photos.pdf & conducted photos.pdf.

### 2.2 Operation mode

The EUT was supplied by AC 120V, 60Hz and it was run in TX mode that was controlled by client provided RF testing program.

The EUT was transmitted continuously during the test. The worst-case test result was showed in the report.

With individual verifying, the maximum output power was found at 6 Mbps data rate for 802.11a mode, 6.5 Mbps data rate for 802.11n-HT20 mode, 13.5 Mbps data rate for 802.11n-HT40 mode, 29.3Mbps data rate for 802.11ac. The final tests were executed under these conditions and recorded in this report individually.

### Table for Parameters of Test Software Setting

Test Software: Ampak RFTestTool, VER: 5.6

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

### 3. Maximum Output Power test (FCC 15.407)

#### 3.1 Operating environment

Temperature: 24 °C  
Relative Humidity: 53 %  
Atmospheric Pressure: 1001 hPa

#### 3.2 Test setup & procedure

The power output per FCC §15.407(a) was measured on the EUT using a 50ohm SMA cable connected to spectrum analyzer and the measurement method refer to 789033 D02. Power was read directly and cable loss correction (1.0dB) was added to the reading to obtain power at the EUT antenna terminals.

#### 3.3 Limit

Operating Frequency (MHz)	Max Conducted TX Power	Max EIRP
5150~5250	30dBm (1W) for master device	* <sub>2</sub> 4W (36dBm) with 6dBi antenna
	* <sub>1</sub> 24dBm (250mW) for client device	
5725~5850	30dBm (1W)	* <sub>2</sub> 4W (36dBm) with 6dBi antenna

Remark: \*<sub>1</sub> The device declared as slave device.

\*<sub>2</sub> Tx Power Reduction (dBm-by-dBi) required when antenna exceeds 6dBi.

- 1). 5.2G band Antenna gain: 2dBi, so the Power limit is 30dBm for conducted TX power and 36dBm for EIRP.
- 2). 5.8G band Antenna gain: 2dBi, so the Power limit is 30dBm for conducted TX power and 36dBm for EIRP.

**3.4 Measured data of Maximum Output Power test results****Max Conducted TX Power**

The more detail please refer to "Appendix of 210623023SZN-002" Appendix B1.

**Max EIRP**

The more detail please refer to "Appendix of 210623023SZN-002" Appendix B2.

## 4. Power Spectrum Density test (FCC 15.407)

### 4.1 Operating environment

Temperature: 23 °C  
Relative Humidity: 53 %  
Atmospheric Pressure: 1003 hPa

### 4.2 Test setup & procedure

#### Method of Measurement:

The power spectrum density per FCC §15.407(a) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 1MHz/500KHz, the video bandwidth set at 3 MHz/2MHz (measurement method refers to KDB 789033 D02). Power spectrum density was read directly and cable loss (1.0 dB) reading to obtain power at the EUT antenna terminals.

### 4.3 Limit

Operating Frequency (MHz)	Max Conducted Power Spectral Density
5150~5250	* <sub>1</sub> 17dBm/MHz for master device
	11dBm/MHz for mobile/portable client device
5725~5850	30dBm/500KHz

Remark: \*<sub>1</sub> The device declared as slave device.

\*<sub>2</sub> Tx Power Reduction (dBm-by-dBi) required when antenna exceeds 6dBi.

- 1). 5.2G band Antenna Gain: 2dBi, so the PSD limit is 11dBm/MHz for Conducted Power Spectral Density.
- 2). 5.8G band Antenna Gain: 2dBi, so the PSD limit is 30dBm/500KHz for Conducted Power Spectral Density.

**4.4 Measured data of Power Spectrum Density test results**

The more detail please refer to “Appendix of 210623023SZN-002” Appendix C.

## 5. Minimum 6 dB RF Bandwidth (FCC 15.407)

### 5.1 Operating environment

Temperature: 25 °C  
Relative Humidity: 49 %  
Atmospheric Pressure: 1001 hPa

### 5.2 Test setup & procedure

The Minimum 6 dB RF Bandwidth per 789033 D02 was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 100KHz, and set the video bandwidth (VBW)  $\geq 3 \times$  RBW. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

#### For 26dB down Emission Bandwidth

The 26dB down Emission Bandwidth per 789033 D02 was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW, Detector = Peak, Trace mode = max hold (Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%).

#### For 99% Occupied Bandwidth

The 99% Occupied Bandwidth per 789033 D02 was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set center frequency to the nominal EUT channel center frequency, set span = 1.5 times to 5.0 times the OBW, set RBW = 1 % to 5 % of the OBW, set VBW  $\geq 3 \times$  RBW, The 99% occupied bandwidth was determined from where the channel output spectrum intersected the display line.

### 5.3 Limit

Operating Frequency (MHz)	Minimum 6 dB RF Bandwidth Limit
5150~5250	N/A
5725~ 5850	$\geq 500\text{KHz}$

**5.4 Measured data of 6dB down Emission Bandwidth test results**

The more detail please refer to “Appendix of 210623023SZN-002” Appendix A3.

Note: 99% Occupied Bandwidth within the U-NII-1 band and 26dB Emission Bandwidth for reference. The more detail please refer to “Appendix of 210623023SZN-002” Appendix A2 and Appendix A1.


## 6. Radiated Emission test (FCC 15.205 & 15.209 & 15.407)

### 6.1 Operating environment

Temperature:	24	°C
Relative Humidity:	55	%
Atmospheric Pressure	1007	hPa

### 6.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

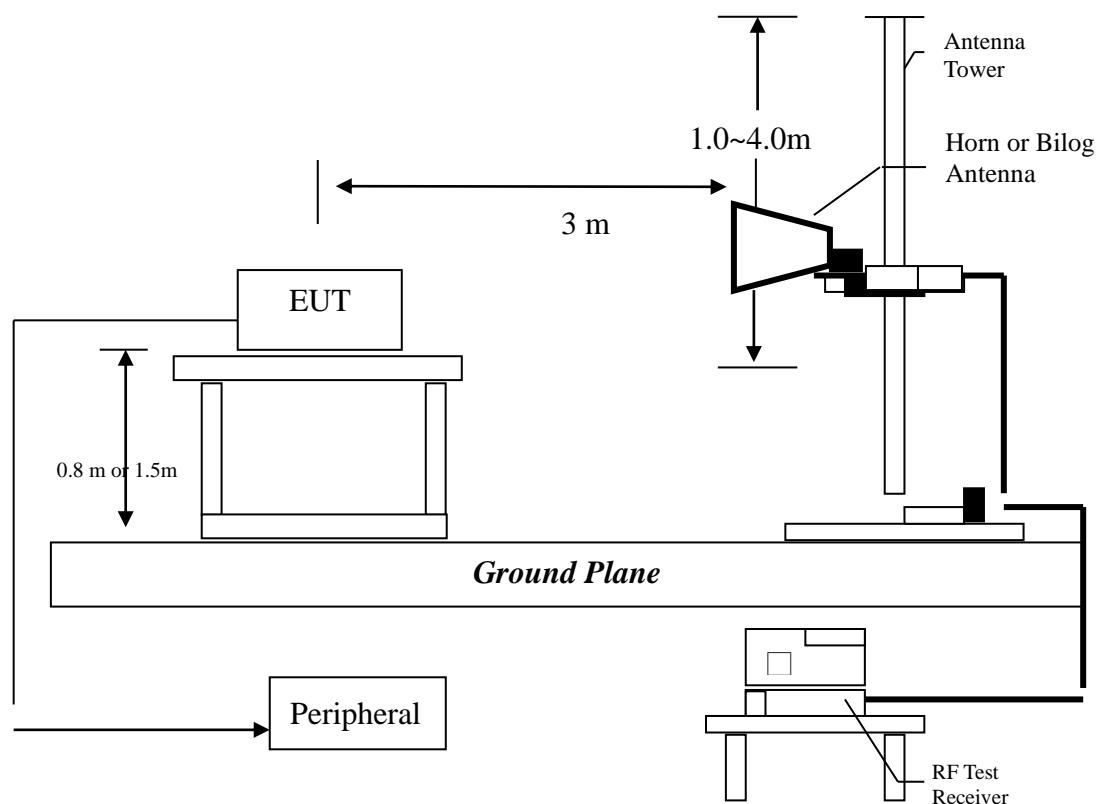

Radiated emission measurements were performed from 9KHz to tenth harmonic or 40GHz. The EUT for testing is arranged on a styrene turntable with the height of 0.8m up to 1GHz and 1.5m above 1GHz. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meters reading using inverse scaling with distance.

Testing settings (refer to KDB 789033 D02)

Peak Measurements below 1GHz

- 1, Analyzer center frequency was set to the frequency of the radiated spurious emission.
- 2, Span=encompass the entire emission
- 3, RBW=120KHz
- 4, Detector=Quasi-Peak
- 5, Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1, Analyzer center frequency was set to the frequency of the radiated spurious emission.
- 2, Span=encompass the entire emission
- 3, RBW=1MHz
- 4, VBW=3MHz
- 4, Detector= Peak (Max-hold)
- 5, Trace was allowed to stabilize

Average Measurements above 1GHz

- 1, Analyzer center frequency was set to the frequency of the radiated spurious emission.
- 2, Span=encompass the entire emission
- 3, RBW=1MHz
- 4, VBW=3MHz
- 4, Detector= RMS (Max-hold)
- 5, Trace was allowed to stabilize

### 6.3 Limit

The spurious Emission shall test through the 10th harmonic or 40GHz (whichever is lower). In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Notes:

- 1, All emission out-side of the 5.15-5.35GHz & 5.47-5.725GHz band shall not exceed an EIRP of -27dBm/MHz (68.2dBuV/m, test distance: 3 meter); for band 5.725-5.85GHz, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- 2, The spectrum is measured from 9KHz to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter using QP detector below 1GHz, above 1GHz, average & peak measurements were taken using for test. The worst-case emission is reported however emission whose levels were not within 20dB of the respective limited were not reported.
- 3, The test was performed on EUT under 802.11a/n-HT20/40/ac-HT20/40/80 continuously transmitting mode. All mode had been tested, but only the worst-case is recorded in the following graph and table. Simultaneous transmission was considered during the testing.

## Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

### Example

Assume a receiver reading of 62.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 32  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

RA = 62.0  $\text{dB}\mu\text{V}$

AF = 7.4 dB/m

CF = 1.6 dB

AG = 29.0 dB

PD = 0 dB

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V}/\text{m})/20] = 125.9 \mu\text{V}/\text{m}$$

## 6.4 Radiated spurious emission test data

### 6.4.1 Measurement results: frequencies equal to or less than 1 GHz

Applicant: **DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD**

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT


Worst Case Operating Mode:

Simultaneous transmission

### Radiated Emissions

ANT Polarity: Horizontal

FCC Part 15

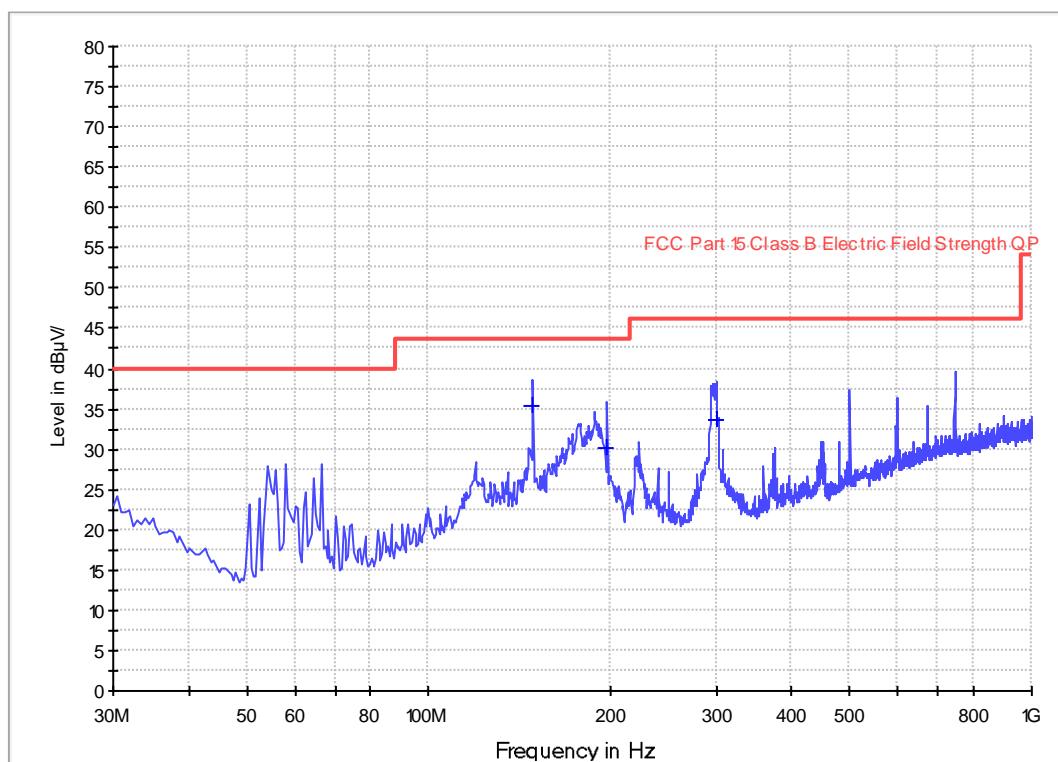

Frequency (MHz)	Quasi Peak (dB <sub>UV</sub> /m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB <sub>UV</sub> /m)
148.825000	35.5	1000.0	120.000	H	10.5	8.0	43.5
197.810000	30.3	1000.0	120.000	H	12.3	13.2	43.5
300.145000	33.5	1000.0	120.000	H	16.2	12.5	46.0

#### NOTES:

1. Quasi-Peak detector is used for frequency below 1GHz.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: 23 October 2021

Model: ECH-REFL03-SPT


Worst Case Operating Mode:

Simultaneous transmission

**Radiated Emissions**

ANT Polarity: Vertical

FCC Part 15

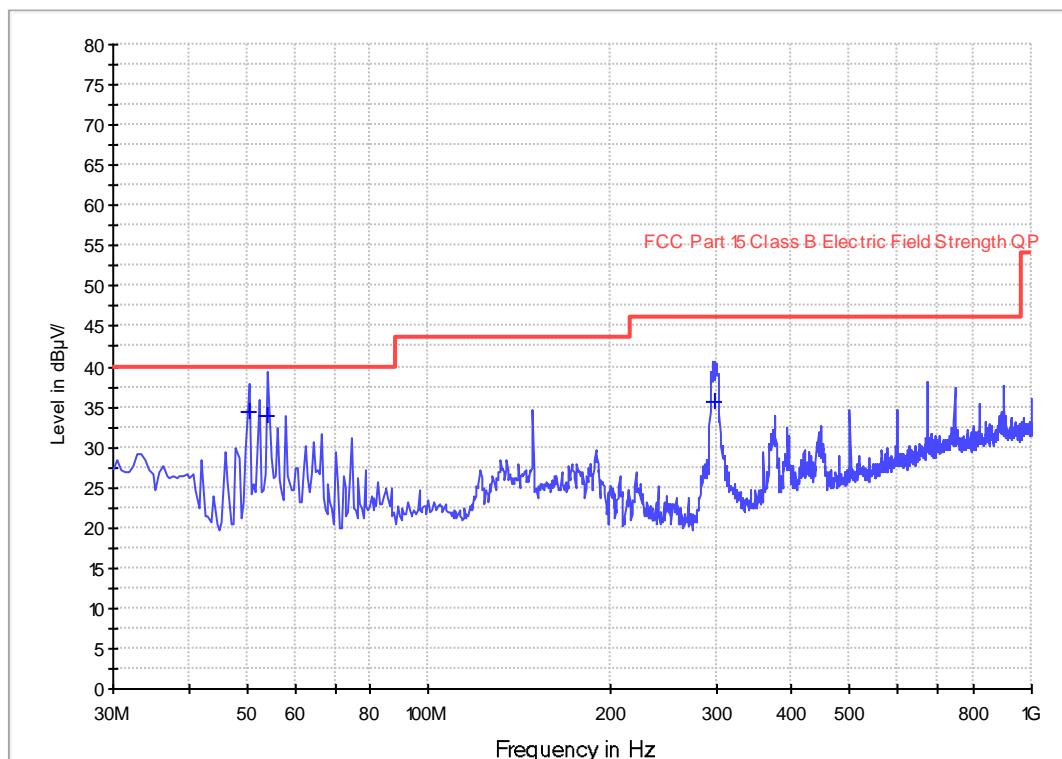

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
50.370000	34.3	1000.0	120.000	V	7.9	5.7	40.0
54.250000	33.9	1000.0	120.000	V	7.9	6.1	40.0
298.205000	35.7	1000.0	120.000	V	16.2	10.3	46.0

## NOTES:

1. Quasi-Peak detector is used for frequency below 1GHz.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

#### 6.4.2 Measurement results: frequency above 1GHz

Model: ECH-REFL03-SPT

Worst case operating: 802.11n-HT20

##### Channel 36/6.5Mbps

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	10360.000	53.8	36.3	38.9	56.4	68.2	-11.8
Horizontal	15540.000	55.3	34.7	41.0	61.6	68.2	-6.6

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	10360.000	43.3	36.3	38.9	45.9	54.0	-8.1
Horizontal	15540.000	43.2	34.7	41.0	49.5	54.0	-4.5

##### Channel 48/6.5Mbps

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	10480.000	50.9	36.3	38.9	53.5	68.2	-14.7
Horizontal	15720.000	51.3	34.7	41.0	57.6	68.2	-10.6

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	10480.000	42.1	36.3	38.9	44.7	54.0	-9.3
Horizontal	15720.000	41.2	34.7	41.0	47.5	54.0	-6.5

##### Channel 149/6.5Mbps

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	11490.000	53.0	36.3	38.9	55.6	68.2	-12.6
Horizontal	17235.000	51.4	34.7	41.0	57.7	68.2	-10.5

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	11490.000	42.6	36.3	38.9	45.2	54.0	-8.8
Horizontal	17235.000	42.0	34.7	41.0	48.3	54.0	-5.7

## Channel 165/6.5Mbps

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	11650.000	54.8	36.3	38.9	57.4	68.2	-10.8
Horizontal	17475.000	49.5	34.7	41.0	55.8	68.2	-12.4

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
Horizontal	11650.000	42.3	36.3	38.9	44.9	54.0	-9.1
Horizontal	17475.000	41.2	34.7	41.0	47.5	54.0	-6.5

## Note:


- 1) Emission within the restricted band meets the requirement of RSS-Gen, Issue 5 Section 8.9. The corresponding limit is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- 2) All unwanted emissions out-side of the 5150-5350MHz &5725-5850 MHz band are complied with the limit.

## 7. Power Line Conducted Emission test

### 7.1 Operating environment

Temperature: 24 °C  
 Relative Humidity: 54 %  
 Atmospheric Pressure 1005 hPa

### 7.2 Test setup & procedure

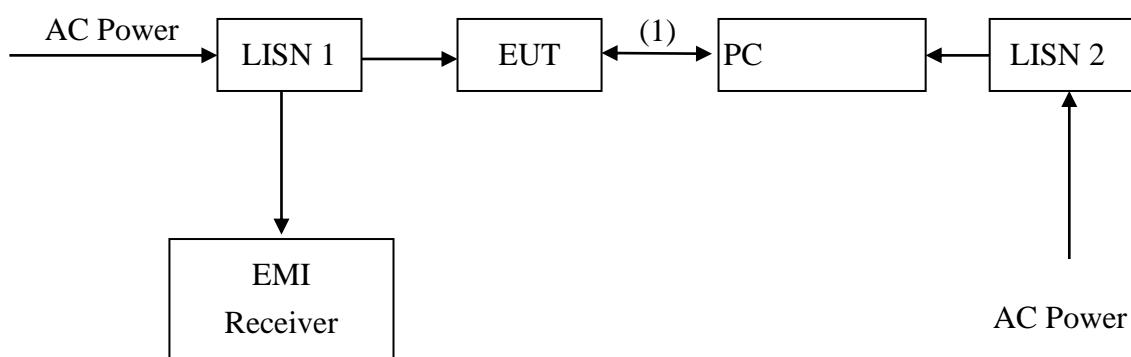

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm/50 uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10/2013 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCI 30) is set at 9 kHz.

### 7.3 Limit

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50


\*Decreases with the logarithm of the frequency.

## 7.4 Power Line Conducted Emission test data

Model: ECH-REFL03-SPT

Worst operating Mode: Simultaneous transmission

Phase: Live

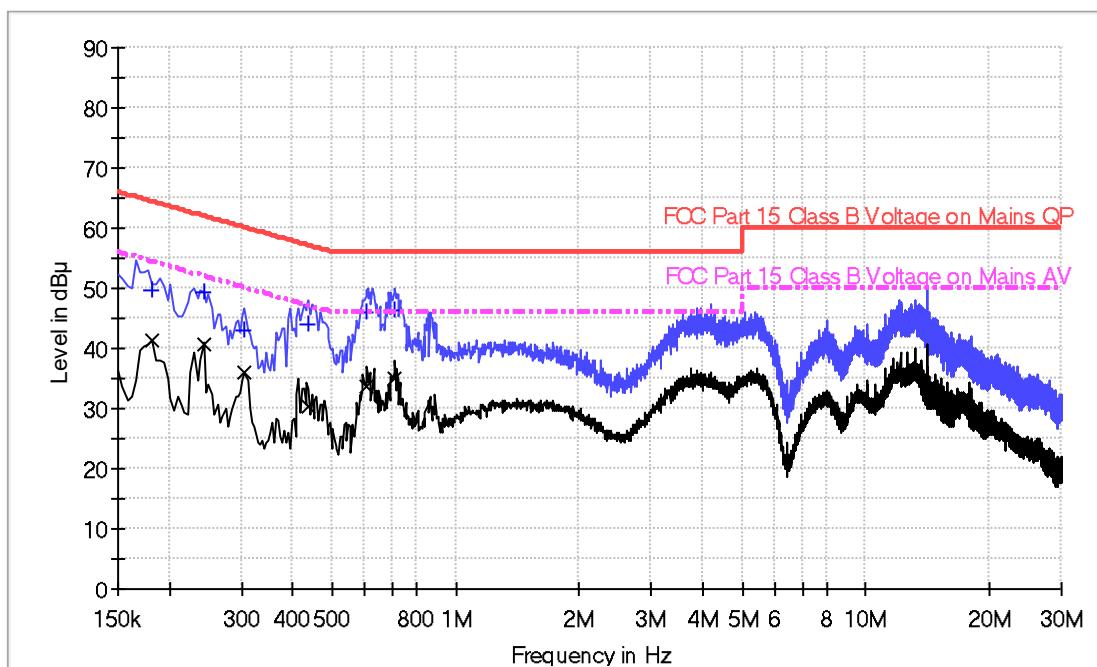

Result Table QP

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.181500	49.7	L1	9.6	14.7	64.4
0.242000	49.4	L1	9.6	12.6	62.0
0.306000	42.8	L1	9.6	17.3	60.1
0.438000	44.1	L1	9.6	13.0	57.1
0.606000	46.0	L1	9.6	10.0	56.0
0.710000	46.4	L1	9.6	9.6	56.0

Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.181500	41.3	L1	9.6	13.1	54.4
0.242000	40.7	L1	9.6	11.4	52.0
0.306000	35.9	L1	9.6	14.2	50.1
0.438000	30.3	L1	9.6	16.8	47.1
0.606000	33.8	L1	9.6	12.2	46.0
0.710000	35.1	L1	9.6	10.9	46.0

Remark:


1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = Limit (dB $\mu$ V) – Level (dB $\mu$ V)

Model: ECH-REFL03-SPT

Worst operating Mode: Simultaneous transmission

Phase: Neutral

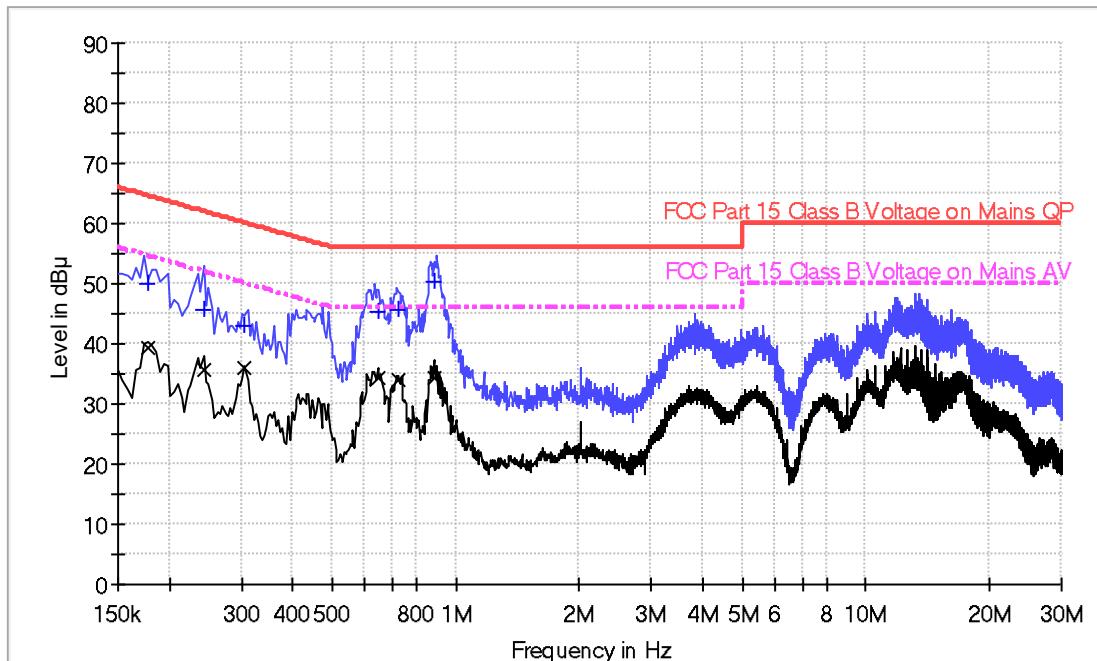

Result Table QP

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	50.1	N	9.5	14.5	64.6
0.242000	45.7	N	9.5	16.3	62.0
0.306000	42.9	N	9.5	17.2	60.1
0.646000	45.4	N	9.5	10.6	56.0
0.722000	45.8	N	9.5	10.2	56.0
0.886000	50.3	N	9.5	5.7	56.0

Result Table AV


Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	39.5	N	9.5	15.1	54.6
0.242000	35.5	N	9.5	16.5	52.0
0.306000	36.2	N	9.5	13.9	50.1
0.646000	34.5	N	9.5	11.5	46.0
0.722000	33.9	N	9.5	12.1	46.0
0.886000	34.2	N	9.5	11.8	46.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – Level (dBuV)

## 8. Frequency Stability Test

### 8.1 Test setup & procedure

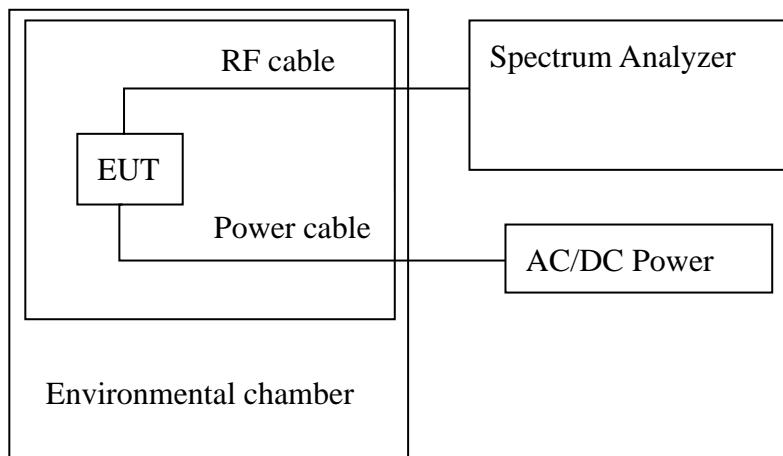

Note1: The frequency stability is measured with the temperature variation range of 0°C to +40°C (5°C increment), and voltage supply variation range of 85% to 115% of nominal DC supply voltage.

2: To ensure emission at the band-edge is maintained within the authorized band, the frequency 802.11a/n-HT20/40/ac-HT20/40/80 channel 36, 48, 38, 46, 42, 149, 165, 151, 159, 155 are selected to test and the worst case was reported.

### 8.2 Frequency Stability Test Data

20°C is taken as temperature in normal condition (NT).

120VAC is normal voltage (NV)

102VAC is low voltage (LV)

138VAC is high voltage (HV)

The more detail please refer to "Appendix of 210623023SZN-004" Appendix D.

Note: All emissions are maintained within the band of operation under all conditions of normal operation as specified in the user manual. It fulfills the requirement of 15.407(g).

## Appendix A: Test equipment list

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-13	Biconilog Antenna	ETS	3142E	00217919	2019-06-10	2022-06-10
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2023-05-18
SZ061-08	Horn Antenna	ETS	3115	00092346	2021-09-07	2022-09-07
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	2019-08-13	2022-08-13
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	2021-05-10	2022-05-10
SZ185-01	EMI Receiver	R & S	ESCI	100547	2020-12-22	2021-12-22
SZ181-04	Preamplifier	Agilent	8449B	3008A024 74	2021-05-10	2022-05-10
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-1 00	4102	2018-12-15	2021-12-15
SZ062-02	RF Cable	RADIALL	RG 213U	--	2021-06-01	2021-12-01
SZ062-05	RF Cable	RADIALL	0.04-26.5G Hz	--	2021-06-01	2021-12-01
SZ062-12	RF Cable	RADIALL	0.04-26.5G Hz	--	2021-06-01	2021-12-01
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	2021-05-11	2022-05-11
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2021-10-15	2022-10-15
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	2021-05-11	2022-05-11
SZ188-03	Shielding Room	ETS	RFD-100	4100	2018-12-15	2021-12-15
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1 m	110127-2 231000	2021-10-15	2022-10-15
SZ016-12	Programmable Temperature & Humidity Chamber	Taili	MHK-120 NK	AB0105	2021-01-12	2022-01-12
SZ006-30	DC Power Supply	Guwei	SPS-3610	GEQ920 551	2021-01-05	2022-01-05

Expanded uncertainty of radiated emission measurement is  $\pm 4.9$  dB.Expanded uncertainty of conducted emission measurement is  $\pm 3.6$  dB.

\*\*\*\*\* End of Report\*\*\*\*\*