



FCC TEST REPORT

Report No:STS1905167W04

Issued for

DMX,LLC

2100 South Interstate Highway 35,Suite 200,Austin,TX
78704 U.S.A.

Product Name:	MAVPSG1
Brand Name:	N/A
Model Name:	K140A1
Series Model:	K140A2, K140L1, K140L2
FCC ID:	2ATBXK140
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's Name..... : DMX,LLC
Address : 2100 South Interstate Highway 35,Suite 200,Austin,TX 78704
U.S.A.

Manufacture's Name..... : DMX,LLC
Address : 2100 South Interstate Highway 35,Suite 200,Austin,TX 78704
U.S.A.

Product Description

Product Name..... : MAVPSG1
Brand Name : N/A
Model Name : K140A1
Series Model..... : K140A2, K140L1, K140L2

Test Standards..... : FCC Part15.407

Test Procedure..... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests : 10 May 2019 ~ 01 June 2019

Date of Issue..... : 01 June 2019

Test Result..... : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	11
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
2.5 EQUIPMENTS LIST	14
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	19
4. CONDUCTED SPURIOUS EMISSIONS AND BANDEGE	33
4.1 LIMIT	33
4.2 TEST PROCEDURE	33
4.3 DEVIATION FROM STANDARD	33
4.4 TEST SETUP	34
4.5 EUT OPERATION CONDITIONS	34
4.6 TEST RESULTS	34
5. POWER SPECTRAL DENSITY TEST	35
5.1 LIMIT	35
5.2 TEST PROCEDURE	35
5.3 DEVIATION FROM STANDARD	36
5.4 TEST SETUP	36
5.5 EUT OPERATION CONDITIONS	36
5.6 TEST RESULTS	36
6. BANDWIDTH MEASUREMENT	37
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	37
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	38
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	39
7. MAXIMUM CONDUCTED OUTPUT POWER	40
7.1 LIMIT	40
7.2 TEST PROCEDURE	40
7.3 DEVIATION FROM STANDARD	40



Table of Contents	Page
7.4 TEST SETUP	40
7.5 TEST RESULTS	41
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	45
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	45
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	45
9. ANTENNA REQUIREMENT	46
9.1 STANDARD REQUIREMENT	46
9.2 EUT ANTENNA	46
APPENDIX - PHOTOS OF TEST SETUP	47



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	01 June 2019	STS1905167W04	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
§ 15.407 (2) (26 dB) / § 15.407 (e) (6 dB) / § 15.407 (a) (99%)	26dB/6dB & 99% Bandwidth	PASS
15.407(a) (1).(2).(3).(4).(5)	Maximum Conducted Output Power	PASS
15.407(b)	Peak Excursion Ratio	PASS
15.407(b) & 15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(b)7	Conducted Emission And (bandedge Emissions) Measurement	PASS
15.407(a) (1).(2).(3).(4).(5)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) all tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

FCC test Firm Registration Number: 625569

A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions, conducted	$\pm 0.63\text{dB}$
3	All emissions, radiated 30-200MHz	$\pm 3.43\text{dB}$
4	All emissions, radiated 200MHz-1GHz	$\pm 3.57\text{dB}$
5	All emissions, radiated >1G	$\pm 4.13\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.18\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.70\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	MAVPSG1												
Trade Name	N/A												
Model Name	K140A1												
Series Model	K140A2, K140L1, K140L2												
Model Difference	Sales of different customers, different models named.												
Product Description	The EUT is a MAVPSG1 <table><tr><td>Operation Frequency:</td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz</td></tr><tr><td></td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz</td></tr><tr><td>Modulation Type:</td><td>802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM</td></tr><tr><td>Antenna Designation:</td><td>See Note 3</td></tr><tr><td>Max.Output Power(Conducted):</td><td>9.205 dBm</td></tr><tr><td>Duty Cycle:</td><td>>98%</td></tr></table> More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM	Antenna Designation:	See Note 3	Max.Output Power(Conducted):	9.205 dBm	Duty Cycle:	>98%
Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz												
	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz												
Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM												
Antenna Designation:	See Note 3												
Max.Output Power(Conducted):	9.205 dBm												
Duty Cycle:	>98%												
Test Channel	Please refer to the Note 1.												
Adapter	Input: AC 100-240V, 0.5A max, 50/60Hz Output: DC 12V, 1A												
Hardware version number	MK01												
Software version number	8.1.0												
Connecting I/O Port(s)	Please refer to the User's Manual												

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	157	5785
44	5220	159	5795
46	5230	161	5805
48	5240	165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775



2. KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

$$\text{Directional gain} = G_{ANT} + 10 \log(NANT) \text{ dBi}$$

(ii) If all transmit signals are completely uncorrelated with each other,

$$\text{Directional gain} = G_{ANT}$$

$$ANT A = 2.97 \text{ dBi}$$

$$ANT B = 2.97 \text{ dBi}$$

$$G_{ANT} + 10 \log(NANT) \text{ dBi}$$

$$\text{Directional gain} = 2.97 + 10 \log 2 = 5.98 \text{ dBi}$$

Ant.	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
A.B	N/A	K140A1	PIFA	N/A	Antenna A gain : 2.97dBi Antenna B gain : 2.97dBi MIMO technology Directional gain=5.98dBi	WLAN Ant.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac HT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 8	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 10	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 11	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 12	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0


- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

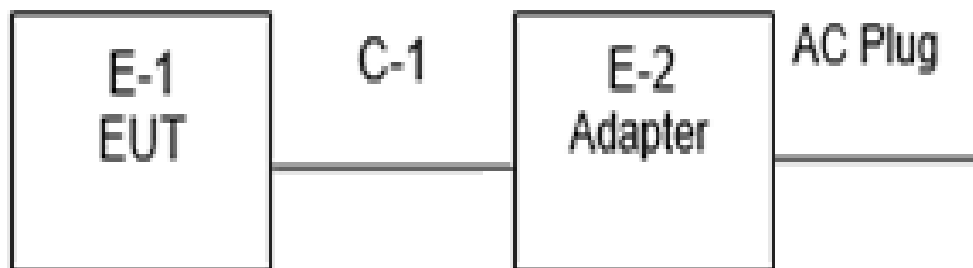

conduction Test Set

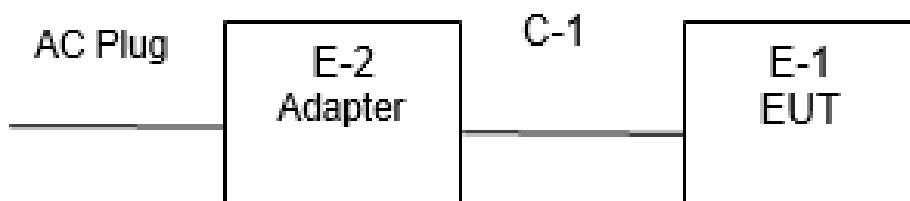



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Adapter	GSP	GSCU1000S012V18Y	N/A	N/A
C-1	DC Cable	N/A	100cm	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.5 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2018.10.13	2019.10.12
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-4 5	SK2018080901	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
LISN	R&S	ENV216	101242	2018.10.11	2019.10.10
LISN	EMCO	3810/2NM	23625	2018.10.11	2019.10.10
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

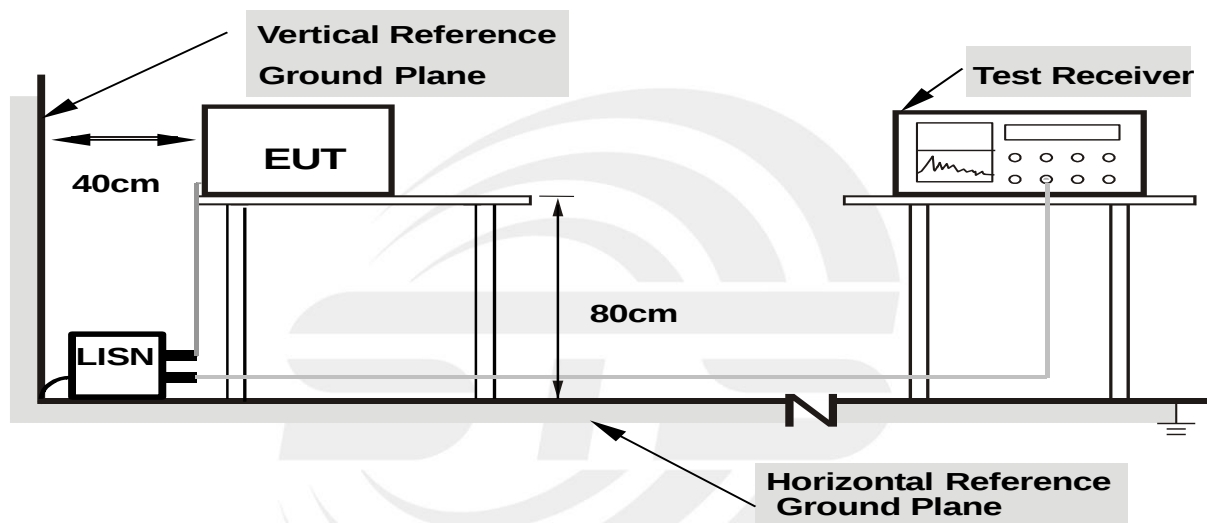

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	25.2℃	Relative Humidity:	65%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 13		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.2460	21.99	20.46	42.45	61.89	-19.44	QP
0.2460	7.97	20.46	28.43	51.89	-23.46	AVG
0.5940	24.80	20.37	45.17	56.00	-10.83	QP
0.5940	12.16	20.37	32.53	46.00	-13.47	AVG
1.7420	27.84	20.09	47.93	56.00	-8.07	QP
1.7420	12.22	20.09	32.31	46.00	-13.69	AVG
3.9740	22.07	19.95	42.02	56.00	-13.98	QP
3.9740	15.21	19.95	35.16	46.00	-10.84	AVG
12.7940	29.12	20.04	49.16	60.00	-10.84	QP
12.7940	2.52	20.04	22.56	50.00	-27.44	AVG
19.9300	18.34	19.94	38.28	60.00	-21.72	QP
19.9300	-0.52	19.94	19.42	50.00	-30.58	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

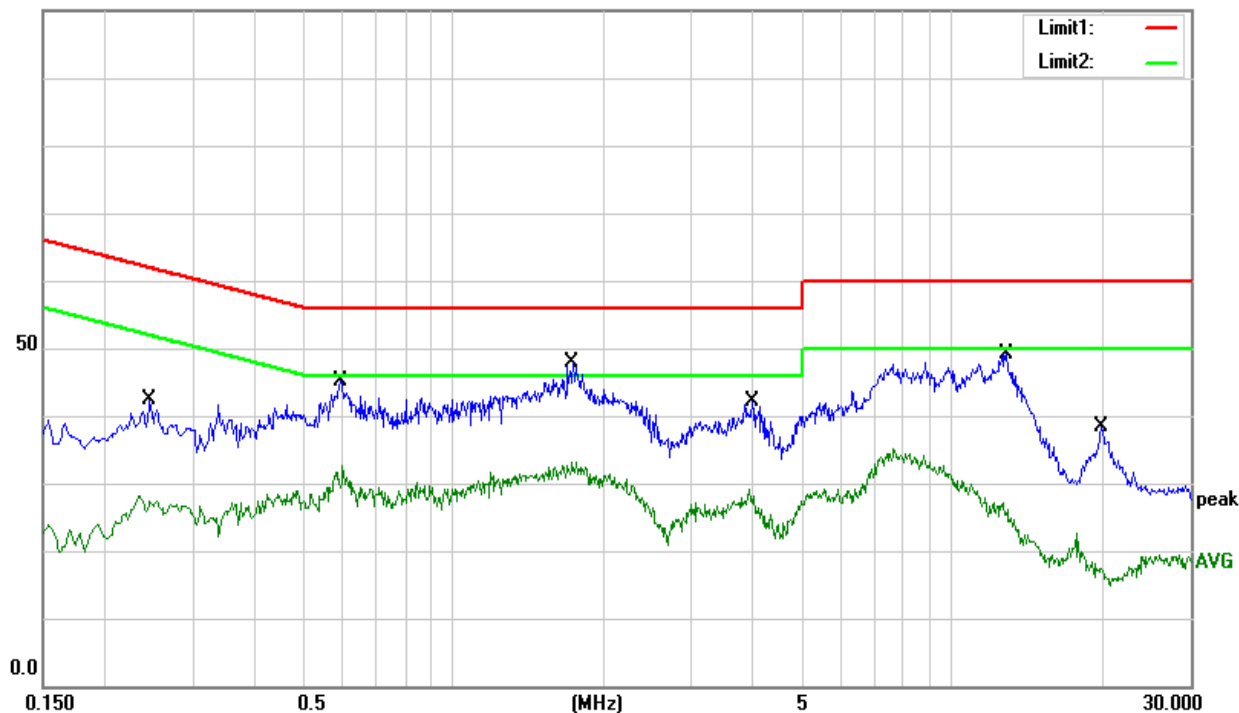




Temperature:	25.2℃	Relative Humidity:	65%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode	Mode 13		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.2340	18.67	20.40	39.07	62.31	-23.24	QP
0.2340	9.16	20.40	29.56	52.31	-22.75	AVG
0.6100	21.96	20.36	42.32	56.00	-13.68	QP
0.6100	14.37	20.36	34.73	46.00	-11.27	AVG
1.6660	24.04	20.10	44.14	56.00	-11.86	QP
1.6660	8.78	20.10	28.88	46.00	-17.12	AVG
7.2860	26.91	19.93	46.84	60.00	-13.16	QP
7.2860	13.53	19.93	33.46	50.00	-16.54	AVG
12.6340	27.52	20.05	47.57	60.00	-12.43	QP
12.6340	2.53	20.05	22.58	50.00	-27.42	AVG
20.4260	14.72	19.89	34.61	60.00	-25.39	QP
20.4260	0.29	19.89	20.18	50.00	-29.82	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBUV

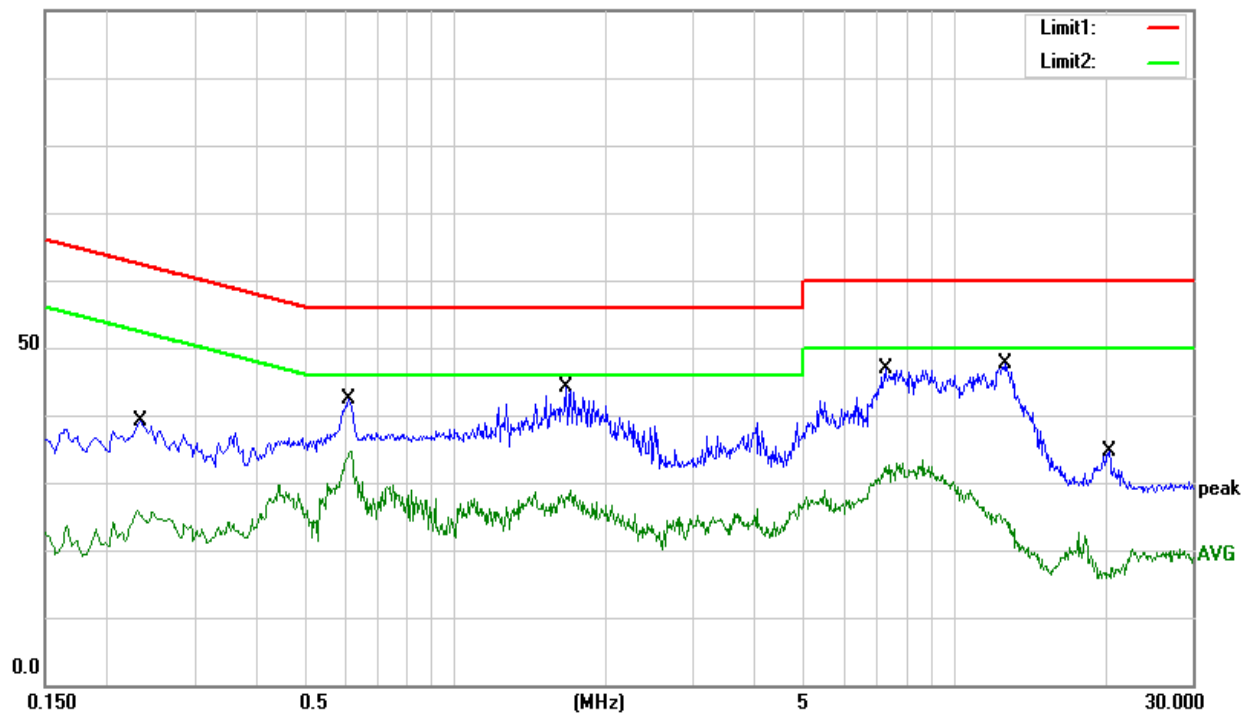



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7& 15.205/209(a), then the (a); limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

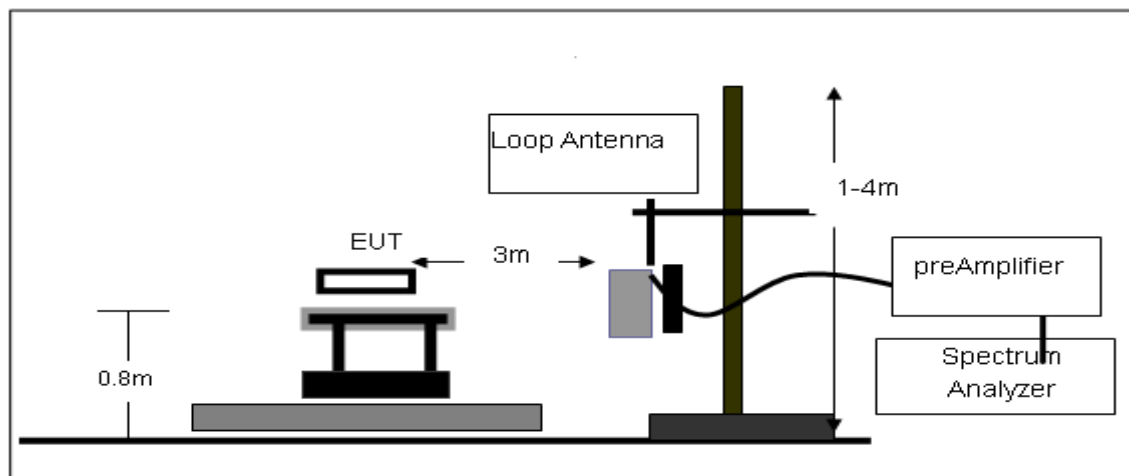

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

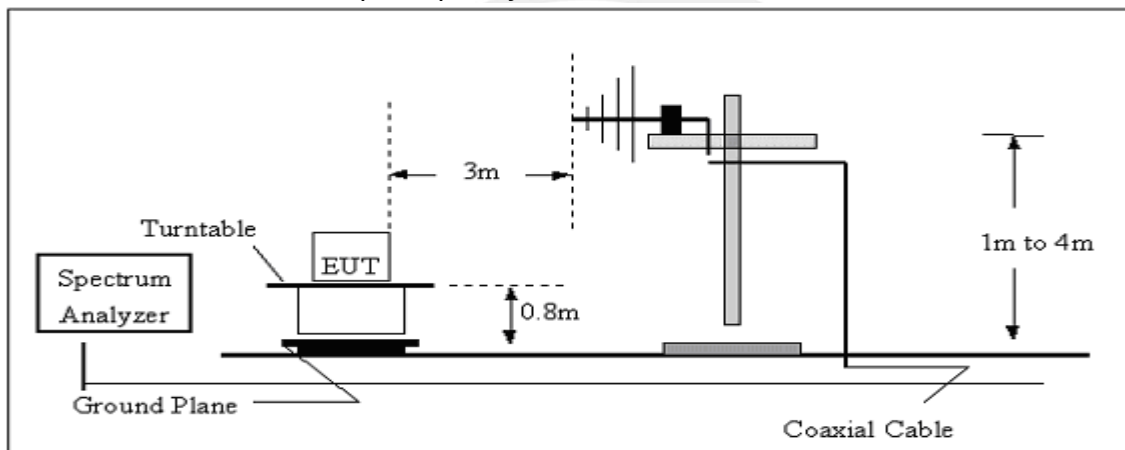

(C) Radiated Emission Test-Up Frequency Above 1GHz

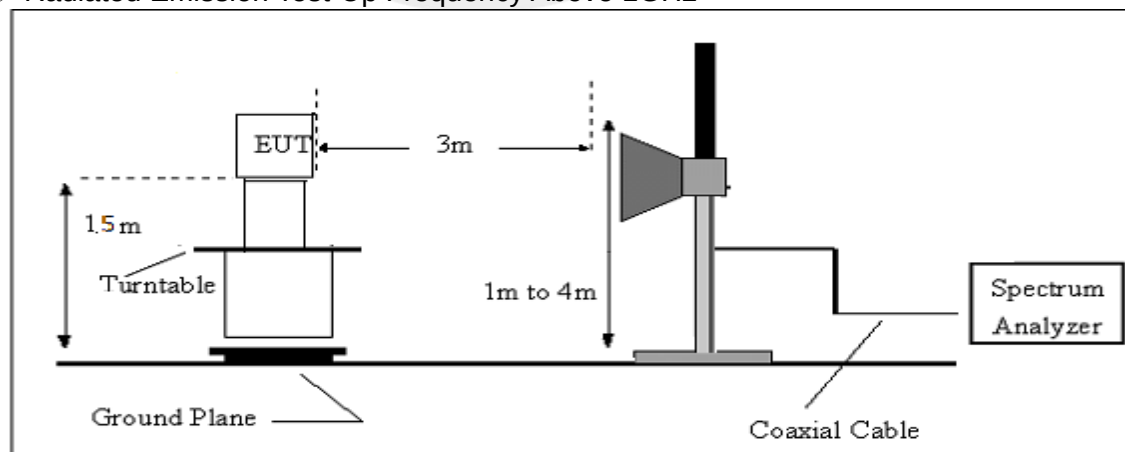

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.7 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	24.5 °C	Relative Humidity:	54%
Test Voltage :	AC 120V/60Hz	Polarization :	--
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.8 TEST RESULTS (Between 30MHz – 1GHz)**


Temperature	24.5 °C	Relative Humidity:	54%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 1-12(Mode6 worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
31.3992	42.64	-11.91	30.73	40.00	-9.27	QP
68.8721	54.30	-24.13	30.17	40.00	-9.83	QP
123.2655	50.97	-17.65	33.32	43.50	-10.18	QP
245.9507	45.29	-16.91	28.38	46.00	-17.62	QP
397.6333	42.86	-11.39	31.47	46.00	-14.53	QP
793.3960	44.29	-3.34	40.95	46.00	-5.05	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

80.0 dBuV/m

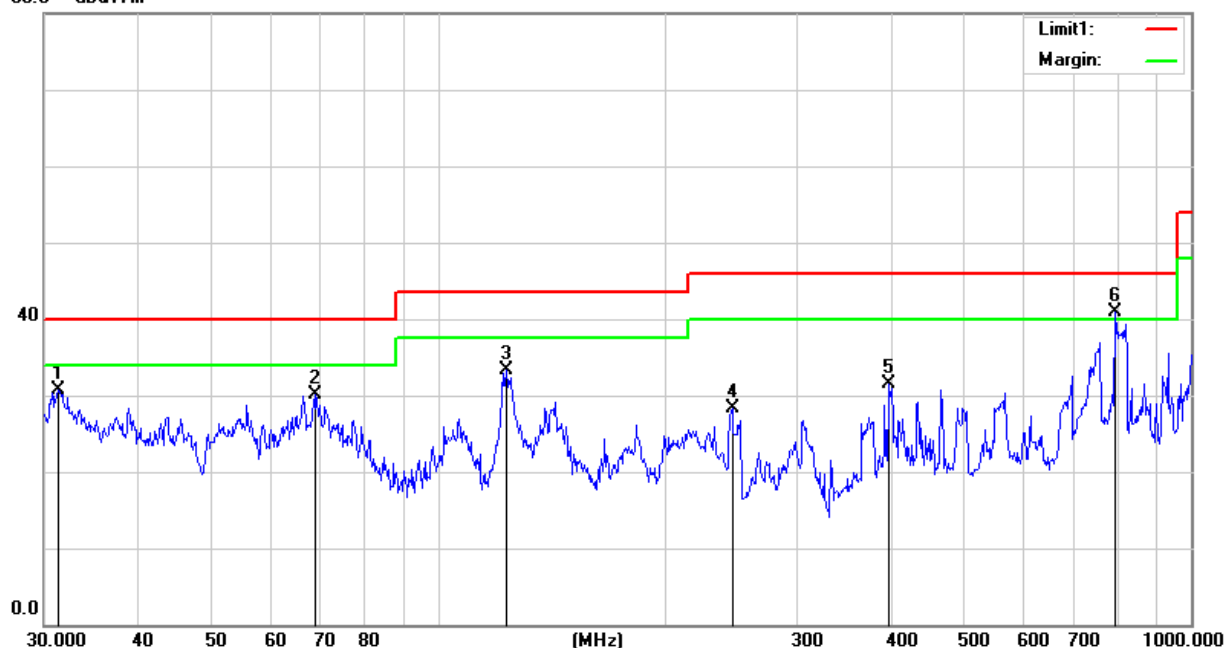




Temperature	24.5 °C	Relative Humidity:	54%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 1-12(Mode 6 worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.6371	45.82	-11.52	34.30	40.00	-5.70	QP
52.2080	57.57	-22.11	35.46	40.00	-4.54	QP
68.3906	58.23	-24.14	34.09	40.00	-5.91	QP
143.3260	53.47	-17.67	35.80	43.50	-7.70	QP
487.3150	44.28	-9.21	35.07	46.00	-10.93	QP
818.8341	39.61	-3.51	36.10	46.00	-9.90	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit

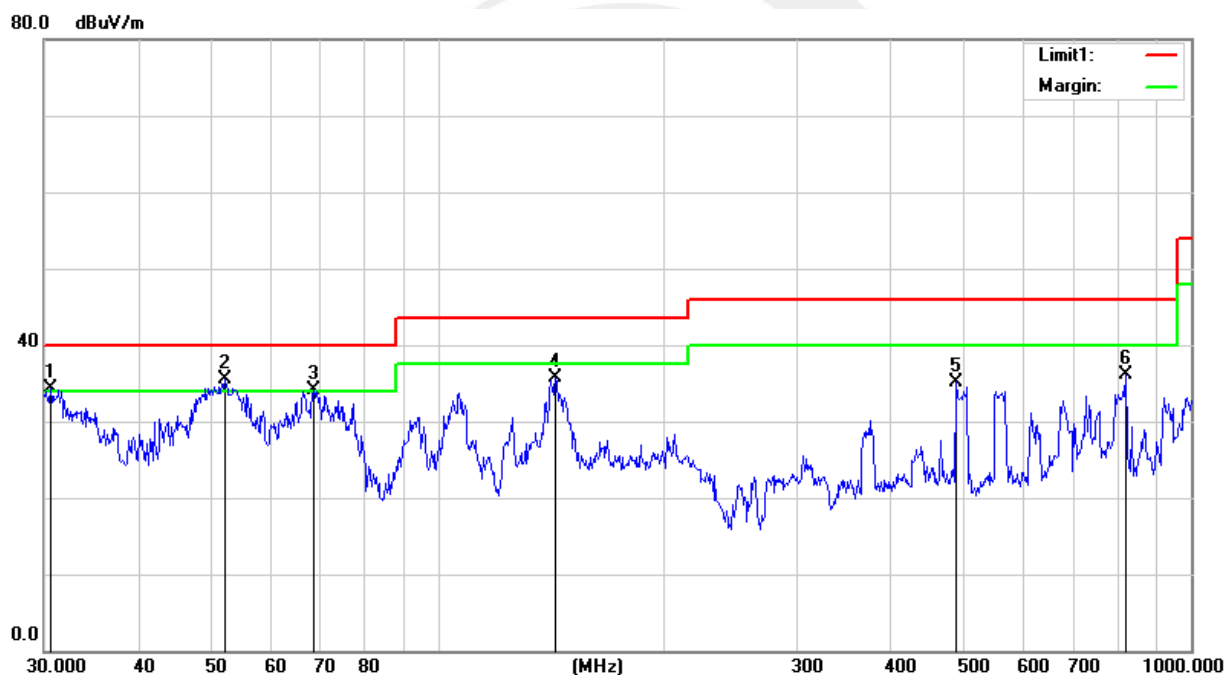

**3.2.9 TEST RESULTS (Above 1000 MHz)****Band I 5150-5250MHz**

Band I(5.15-5.25) GHz										
Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limit (dBuV/m)	Margin	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)		(dB)		
Low Channel (802.11 n(HT20)/ 5180 MHz)										
3249.26	44.64	44.70	6.70	28.20	-9.80	34.84	68.20	-33.36	PK	Vertical
3249.26	41.35	44.70	6.70	28.20	-9.80	31.55	54.00	-22.45	AV	Vertical
3259.57	45.02	44.70	6.70	28.20	-9.80	35.22	68.20	-32.98	PK	Horizontal
3259.57	41.61	44.70	6.70	28.20	-9.80	31.81	54.00	-22.19	AV	Horizontal
3988.17	38.95	44.20	7.90	29.70	-6.60	32.35	68.20	-35.85	PK	Vertical
3988.17	36.12	44.20	7.90	29.70	-6.60	29.52	54.00	-24.48	AV	Vertical
3984.16	39.66	44.20	7.90	29.70	-6.60	33.06	68.20	-35.14	PK	Horizontal
3984.16	36.17	44.20	7.90	29.70	-6.60	29.57	54.00	-24.43	AV	Horizontal
7236.13	37.17	43.50	11.40	35.50	3.40	40.57	68.20	-27.63	PK	Vertical
7236.13	33.74	43.50	11.40	35.50	3.40	37.14	54.00	-16.86	AV	Vertical
7231.47	36.66	43.50	11.40	35.50	3.40	40.06	68.20	-28.14	PK	Horizontal
7231.47	34.93	43.50	11.40	35.50	3.40	38.33	54.00	-15.67	AV	Horizontal
10360.43	38.78	44.50	13.80	38.80	8.10	46.88	68.20	-21.32	PK	Vertical
10360.43	35.69	44.50	13.80	38.80	8.10	43.79	54.00	-10.21	AV	Vertical
10360.34	39.71	44.50	13.80	38.80	8.10	47.81	68.20	-20.39	PK	Horizontal
10360.34	36.90	44.50	13.80	38.80	8.10	45.00	54.00	-9.00	AV	Horizontal
11025.44	33.09	43.60	14.30	39.50	10.20	43.29	68.20	-24.91	PK	Vertical
11025.44	30.58	43.60	14.30	39.50	10.20	40.78	54.00	-13.22	AV	Vertical
11032.30	33.21	43.60	14.30	39.50	10.20	43.41	68.20	-24.79	PK	Horizontal
11032.30	29.75	43.60	14.30	39.50	10.20	39.95	54.00	-14.05	AV	Horizontal
13280.50	32.65	42.60	15.90	38.90	12.20	44.85	68.20	-23.35	PK	Vertical
13280.50	29.12	42.60	15.90	38.90	12.20	41.32	54.00	-12.68	AV	Vertical
13298.55	32.51	42.60	15.90	38.90	12.20	44.71	68.20	-23.49	PK	Horizontal
13298.55	28.72	42.60	15.90	38.90	12.20	40.92	54.00	-13.08	AV	Horizontal



Mid Channel (802.11 n(HT20)/ 5200 MHz)										
3248.76	44.88	44.70	6.70	28.20	-9.80	35.08	68.20	-33.12	PK	Vertical
3248.76	40.75	44.70	6.70	28.20	-9.80	30.95	54.00	-23.05	AV	Vertical
3251.47	44.34	44.70	6.70	28.20	-9.80	34.54	68.20	-33.66	PK	Horizontal
3251.47	41.43	44.70	6.70	28.20	-9.80	31.63	54.00	-22.37	AV	Horizontal
3998.35	39.13	44.20	7.90	29.70	-6.60	32.53	68.20	-35.67	PK	Vertical
3998.35	35.81	44.20	7.90	29.70	-6.60	29.21	54.00	-24.79	AV	Vertical
3982.21	39.48	44.20	7.90	29.70	-6.60	32.88	68.20	-35.32	PK	Horizontal
3982.21	36.04	44.20	7.90	29.70	-6.60	29.44	54.00	-24.56	AV	Horizontal
7232.49	37.65	43.50	11.40	35.50	3.40	41.05	68.20	-27.15	PK	Vertical
7232.49	34.90	43.50	11.40	35.50	3.40	38.30	54.00	-15.70	AV	Vertical
7225.00	37.39	43.50	11.40	35.50	3.40	40.79	68.20	-27.41	PK	Horizontal
7225.00	34.61	43.50	11.40	35.50	3.40	38.01	54.00	-15.99	AV	Horizontal
10399.94	38.81	44.50	13.80	38.80	8.10	46.91	68.20	-21.29	PK	Vertical
10399.94	35.78	44.50	13.80	38.80	8.10	43.88	54.00	-10.12	AV	Vertical
10400.23	39.08	44.50	13.80	38.80	8.10	47.18	68.20	-21.02	PK	Horizontal
10400.23	36.87	44.50	13.80	38.80	8.10	44.97	54.00	-9.03	AV	Horizontal
11030.64	33.97	43.60	14.30	39.50	10.20	44.17	68.20	-24.03	PK	Vertical
11030.64	30.96	43.60	14.30	39.50	10.20	41.16	54.00	-12.84	AV	Vertical
11031.21	33.72	43.60	14.30	39.50	10.20	43.92	68.20	-24.28	PK	Horizontal
11031.21	29.88	43.60	14.30	39.50	10.20	40.08	54.00	-13.92	AV	Horizontal
13291.99	32.98	42.60	15.90	38.90	12.20	45.18	68.20	-23.02	PK	Vertical
13291.99	28.85	42.60	15.90	38.90	12.20	41.05	54.00	-12.95	AV	Vertical
13296.50	32.57	42.60	15.90	38.90	12.20	44.77	68.20	-23.43	PK	Horizontal
13296.50	28.68	42.60	15.90	38.90	12.20	40.88	54.00	-13.12	AV	Horizontal



High Channel (802.11 n(HT20)/ 5240 MHz)										
3259.40	45.02	44.70	6.70	28.20	-9.80	35.22	68.20	-32.98	PK	Vertical
3259.40	41.09	44.70	6.70	28.20	-9.80	31.29	54.00	-22.71	AV	Vertical
3251.77	43.83	44.70	6.70	28.20	-9.80	34.03	68.20	-34.17	PK	Horizontal
3251.77	42.22	44.70	6.70	28.20	-9.80	32.42	54.00	-21.58	AV	Horizontal
3988.32	39.65	44.20	7.90	29.70	-6.60	33.05	68.20	-35.15	PK	Vertical
3988.32	35.69	44.20	7.90	29.70	-6.60	29.09	54.00	-24.91	AV	Vertical
3987.26	39.95	44.20	7.90	29.70	-6.60	33.35	68.20	-34.85	PK	Horizontal
3987.26	36.42	44.20	7.90	29.70	-6.60	29.82	54.00	-24.18	AV	Horizontal
7222.70	37.16	43.50	11.40	35.50	3.40	40.56	68.20	-27.64	PK	Vertical
7222.70	34.40	43.50	11.40	35.50	3.40	37.80	54.00	-16.20	AV	Vertical
7221.40	36.66	43.50	11.40	35.50	3.40	40.06	68.20	-28.14	PK	Horizontal
7221.40	34.88	43.50	11.40	35.50	3.40	38.28	54.00	-15.72	AV	Horizontal
10480.32	39.56	44.50	13.80	38.80	8.10	47.66	68.20	-20.54	PK	Vertical
10480.32	36.08	44.50	13.80	38.80	8.10	44.18	54.00	-9.82	AV	Vertical
10480.01	39.65	44.50	13.80	38.80	8.10	47.75	68.20	-20.45	PK	Horizontal
10480.01	37.11	44.50	13.80	38.80	8.10	45.21	54.00	-8.79	AV	Horizontal
11034.54	33.26	43.60	14.30	39.50	10.20	43.46	68.20	-24.74	PK	Vertical
11034.54	31.13	43.60	14.30	39.50	10.20	41.33	54.00	-12.67	AV	Vertical
11024.34	33.04	43.60	14.30	39.50	10.20	43.24	68.20	-24.96	PK	Horizontal
11024.34	30.49	43.60	14.30	39.50	10.20	40.69	54.00	-13.31	AV	Horizontal
13298.01	31.66	42.60	15.90	38.90	12.20	43.86	68.20	-24.34	PK	Vertical
13298.01	28.96	42.60	15.90	38.90	12.20	41.16	54.00	-12.84	AV	Vertical
13295.32	32.32	42.60	15.90	38.90	12.20	44.52	68.20	-23.68	PK	Horizontal
13295.32	28.75	42.60	15.90	38.90	12.20	40.95	54.00	-13.05	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11 n(HT20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported



Band IV(5.725-5.85) GHz

Band IV(5.725-5.85) GHz										
Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11 ac(HT20)/ 5745 MHz)										
3262.04	44.58	44.70	6.70	28.20	-9.80	34.78	68.20	-33.42	PK	Vertical
3262.04	41.51	44.70	6.70	28.20	-9.80	31.71	54.00	-22.29	AV	Vertical
3249.97	43.93	44.70	6.70	28.20	-9.80	34.13	68.20	-34.07	PK	Horizontal
3249.97	41.85	44.70	6.70	28.20	-9.80	32.05	54.00	-21.95	AV	Horizontal
3998.66	38.71	44.20	7.90	29.70	-6.60	32.11	68.20	-36.09	PK	Vertical
3998.66	36.46	44.20	7.90	29.70	-6.60	29.86	54.00	-24.14	AV	Vertical
3988.15	39.84	44.20	7.90	29.70	-6.60	33.24	68.20	-34.96	PK	Horizontal
3988.15	36.15	44.20	7.90	29.70	-6.60	29.55	54.00	-24.45	AV	Horizontal
7219.59	37.23	43.50	11.40	35.50	3.40	40.63	68.20	-27.57	PK	Vertical
7219.59	34.55	43.50	11.40	35.50	3.40	37.95	54.00	-16.05	AV	Vertical
7216.95	36.60	43.50	11.40	35.50	3.40	40.00	68.20	-28.20	PK	Horizontal
7216.95	34.62	43.50	11.40	35.50	3.40	38.02	54.00	-15.98	AV	Horizontal
10360.18	39.34	44.50	13.80	38.80	8.10	47.44	68.20	-20.76	PK	Vertical
10360.18	35.93	44.50	13.80	38.80	8.10	44.03	54.00	-9.97	AV	Vertical
10360.27	38.95	44.50	13.80	38.80	8.10	47.05	68.20	-21.15	PK	Horizontal
10360.27	35.86	44.50	13.80	38.80	8.10	43.96	54.00	-10.04	AV	Horizontal
11035.76	32.85	43.60	14.30	39.50	10.20	43.05	68.20	-25.15	PK	Vertical
11035.76	30.09	43.60	14.30	39.50	10.20	40.29	54.00	-13.71	AV	Vertical
11025.58	33.15	43.60	14.30	39.50	10.20	43.35	68.20	-24.85	PK	Horizontal
11025.58	29.79	43.60	14.30	39.50	10.20	39.99	54.00	-14.01	AV	Horizontal
13299.75	32.26	42.60	15.90	38.90	12.20	44.46	68.20	-23.74	PK	Vertical
13299.75	29.41	42.60	15.90	38.90	12.20	41.61	54.00	-12.39	AV	Vertical
13297.76	32.78	42.60	15.90	38.90	12.20	44.98	68.20	-23.22	PK	Horizontal
13297.76	29.43	42.60	15.90	38.90	12.20	41.63	54.00	-12.37	AV	Horizontal



Mid Channel (802.11 ac(HT20)/ 5785 MHz)										
3249.23	44.73	44.70	6.70	28.20	-9.80	34.93	68.20	-33.27	PK	Vertical
3249.23	42.14	44.70	6.70	28.20	-9.80	32.34	54.00	-21.66	AV	Vertical
3261.68	44.70	44.70	6.70	28.20	-9.80	34.90	68.20	-33.30	PK	Horizontal
3261.68	41.64	44.70	6.70	28.20	-9.80	31.84	54.00	-22.16	AV	Horizontal
3990.46	39.58	44.20	7.90	29.70	-6.60	32.98	68.20	-35.22	PK	Vertical
3990.46	36.37	44.20	7.90	29.70	-6.60	29.77	54.00	-24.23	AV	Vertical
3982.75	39.18	44.20	7.90	29.70	-6.60	32.58	68.20	-35.62	PK	Horizontal
3982.75	36.44	44.20	7.90	29.70	-6.60	29.84	54.00	-24.16	AV	Horizontal
7235.68	36.47	43.50	11.40	35.50	3.40	39.87	68.20	-28.33	PK	Vertical
7235.68	33.48	43.50	11.40	35.50	3.40	36.88	54.00	-17.12	AV	Vertical
7225.47	36.86	43.50	11.40	35.50	3.40	40.26	68.20	-27.94	PK	Horizontal
7225.47	33.76	43.50	11.40	35.50	3.40	37.16	54.00	-16.84	AV	Horizontal
10400.03	39.54	44.50	13.80	38.80	8.10	47.64	68.20	-20.56	PK	Vertical
10400.03	36.38	44.50	13.80	38.80	8.10	44.48	54.00	-9.52	AV	Vertical
10400.11	39.25	44.50	13.80	38.80	8.10	47.35	68.20	-20.85	PK	Horizontal
10400.11	36.36	44.50	13.80	38.80	8.10	44.46	54.00	-9.54	AV	Horizontal
11019.31	33.25	43.60	14.30	39.50	10.20	43.45	68.20	-24.75	PK	Vertical
11019.31	30.61	43.60	14.30	39.50	10.20	40.81	54.00	-13.19	AV	Vertical
11030.68	33.33	43.60	14.30	39.50	10.20	43.53	68.20	-24.67	PK	Horizontal
11030.68	30.14	43.60	14.30	39.50	10.20	40.34	54.00	-13.66	AV	Horizontal
13298.63	31.83	42.60	15.90	38.90	12.20	44.03	68.20	-24.17	PK	Vertical
13298.63	29.83	42.60	15.90	38.90	12.20	42.03	54.00	-11.97	AV	Vertical
13291.09	31.59	42.60	15.90	38.90	12.20	43.79	68.20	-24.41	PK	Horizontal
13291.09	29.00	42.60	15.90	38.90	12.20	41.20	54.00	-12.80	AV	Horizontal



Mid Channel (802.11 ac(HT20)/ 5825 MHz)										
3247.86	43.82	44.70	6.70	28.20	-9.80	34.02	68.20	-34.18	PK	Vertical
3247.86	40.96	44.70	6.70	28.20	-9.80	31.16	54.00	-22.84	AV	Vertical
3255.63	44.87	44.70	6.70	28.20	-9.80	35.07	68.20	-33.13	PK	Horizontal
3255.63	41.08	44.70	6.70	28.20	-9.80	31.28	54.00	-22.72	AV	Horizontal
4000.06	39.89	44.20	7.90	29.70	-6.60	33.29	68.20	-34.91	PK	Vertical
4000.06	36.08	44.20	7.90	29.70	-6.60	29.48	54.00	-24.52	AV	Vertical
3983.20	39.98	44.20	7.90	29.70	-6.60	33.38	68.20	-34.82	PK	Horizontal
3983.20	36.73	44.20	7.90	29.70	-6.60	30.13	54.00	-23.87	AV	Horizontal
7221.28	36.89	43.50	11.40	35.50	3.40	40.29	68.20	-27.91	PK	Vertical
7221.28	34.56	43.50	11.40	35.50	3.40	37.96	54.00	-16.04	AV	Vertical
7217.01	37.61	43.50	11.40	35.50	3.40	41.01	68.20	-27.19	PK	Horizontal
7217.01	34.40	43.50	11.40	35.50	3.40	37.80	54.00	-16.20	AV	Horizontal
10480.29	39.42	44.50	13.80	38.80	8.10	47.52	68.20	-20.68	PK	Vertical
10480.29	36.74	44.50	13.80	38.80	8.10	44.84	54.00	-9.16	AV	Vertical
10480.21	39.44	44.50	13.80	38.80	8.10	47.54	68.20	-20.66	PK	Horizontal
10480.21	36.32	44.50	13.80	38.80	8.10	44.42	54.00	-9.58	AV	Horizontal
11025.51	34.10	43.60	14.30	39.50	10.20	44.30	68.20	-23.90	PK	Vertical
11025.51	30.61	43.60	14.30	39.50	10.20	40.81	54.00	-13.19	AV	Vertical
11023.12	32.82	43.60	14.30	39.50	10.20	43.02	68.20	-25.18	PK	Horizontal
11023.12	30.89	43.60	14.30	39.50	10.20	41.09	54.00	-12.91	AV	Horizontal
13283.73	32.33	42.60	15.90	38.90	12.20	44.53	68.20	-23.67	PK	Vertical
13283.73	29.75	42.60	15.90	38.90	12.20	41.95	54.00	-12.05	AV	Vertical
13285.11	32.56	42.60	15.90	38.90	12.20	44.76	68.20	-23.44	PK	Horizontal
13285.11	29.64	42.60	15.90	38.90	12.20	41.84	54.00	-12.16	AV	Horizontal


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11ac (VHT 20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported




3.2.10 Band Edge Band I 5150-5250MHz

802.11a-Low Horizontal

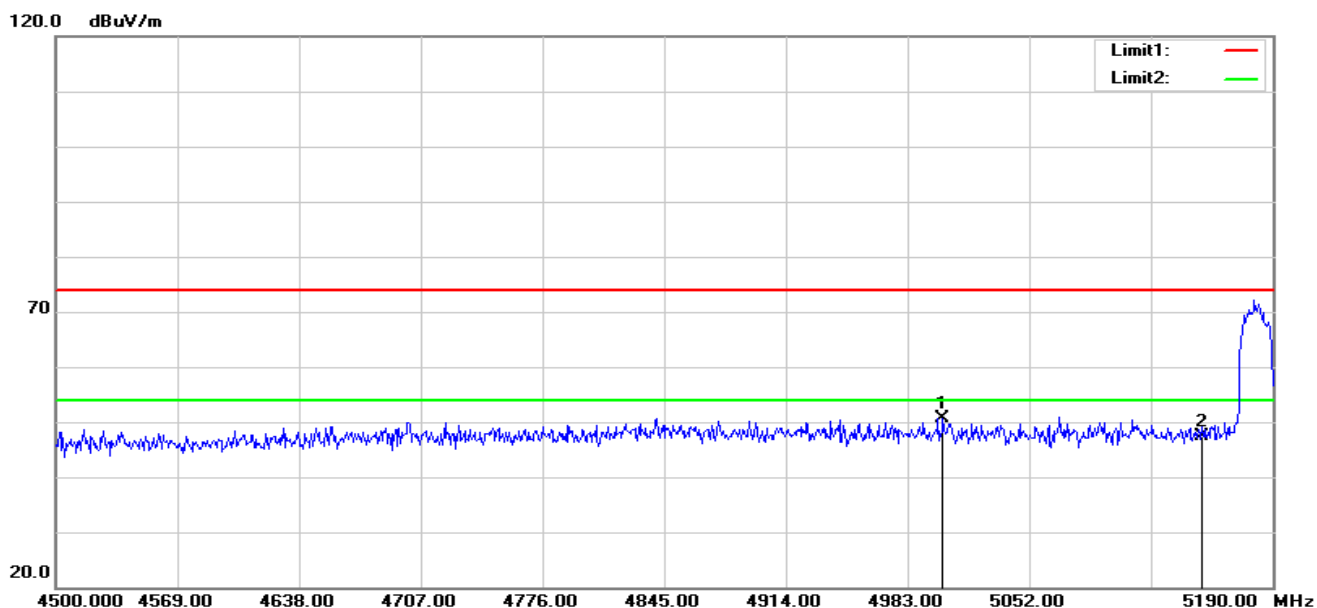


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5003.010	53.44	-2.76	50.68	74.00	-23.32	peak
2	5150.000	49.57	-2.22	47.35	74.00	-26.65	peak

Vertical

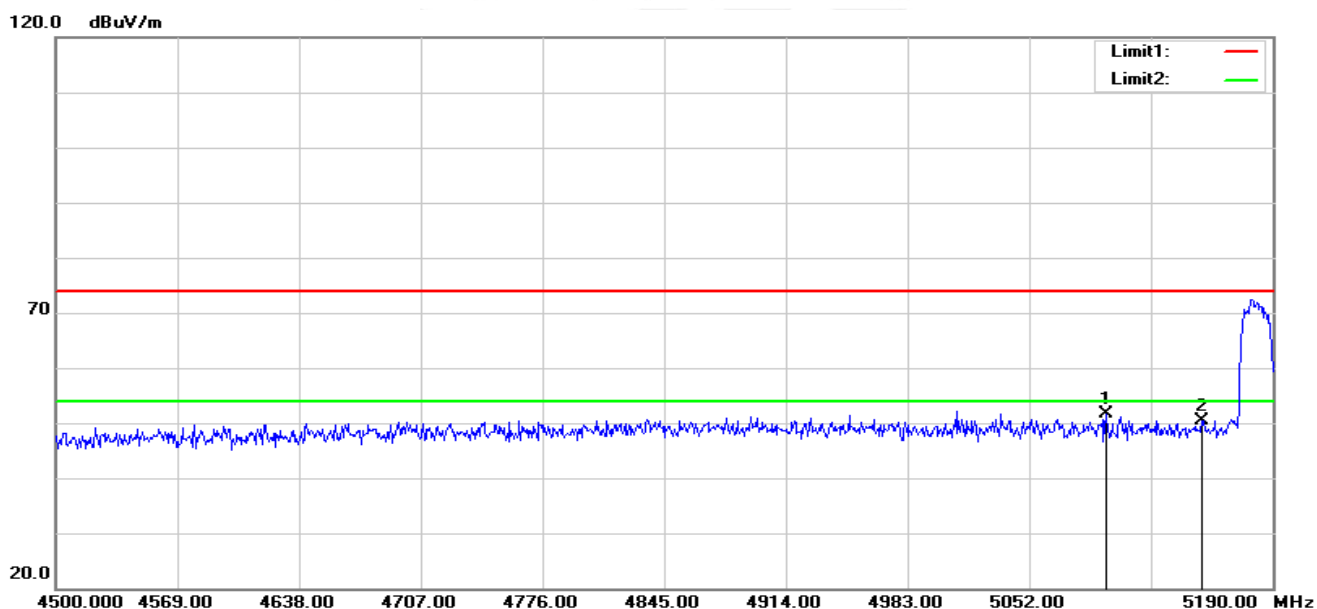


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5095.470	54.07	-2.41	51.66	74.00	-22.34	peak
2	5150.000	52.50	-2.22	50.28	74.00	-23.72	peak

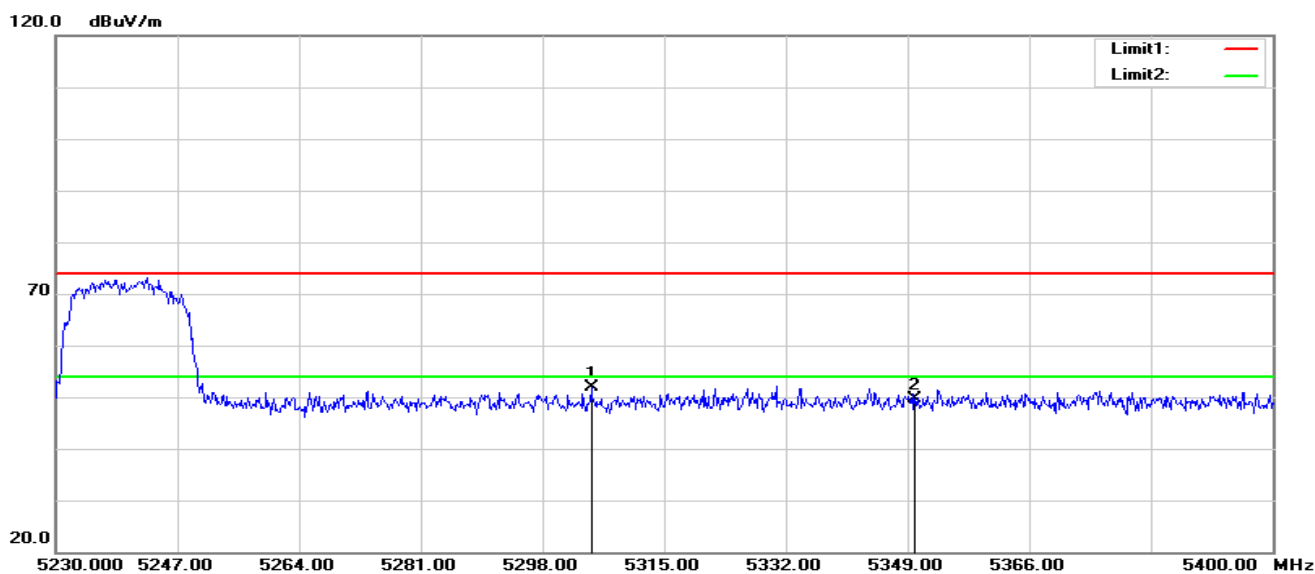**802.11a-High**
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5304.800	53.81	-1.91	51.90	74.00	-22.10	peak
2	5350.000	51.54	-1.84	49.70	74.00	-24.30	peak

Vertical

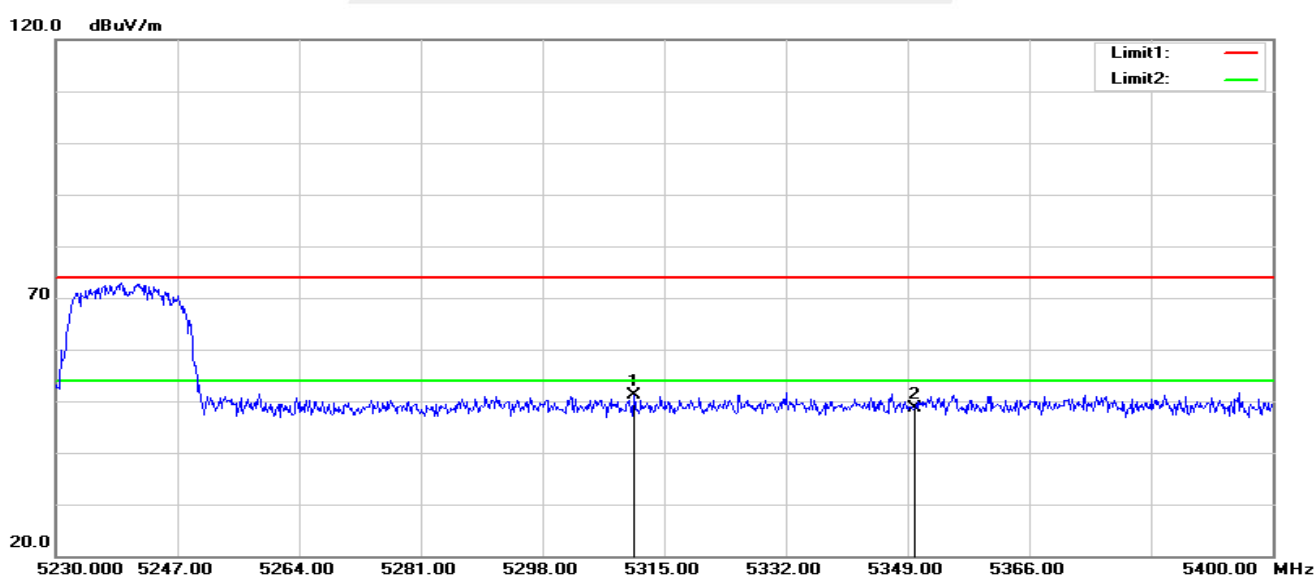

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5310.750	53.03	-1.89	51.14	74.00	-22.86	peak
2	5350.000	50.45	-1.84	48.61	74.00	-25.39	peak

Note:1. 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11a, only shown the worst case.

2. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported

Band IV 5725-5850 MHz

Note: The main frequency is too far away from the restrict band and does not require testing.



4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE

4.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT which is powered by the PC, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1000 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Data See Attachment A.

Note:

1. The test results contain power + antenna Gain
2. Only floor noise for frequency above 26.5GHz.

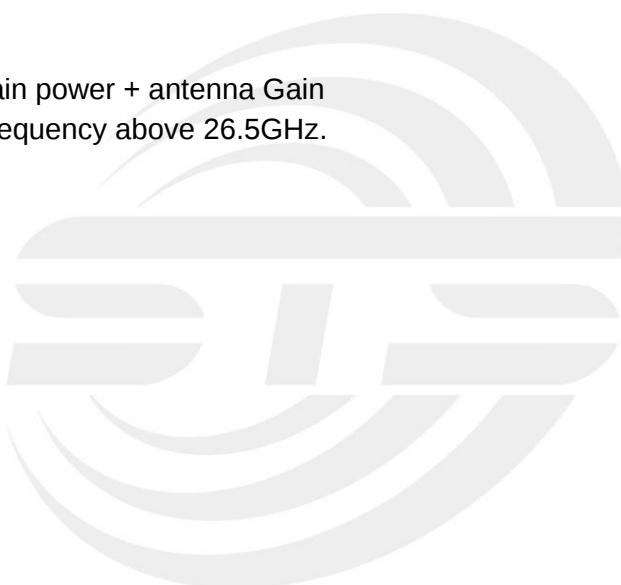



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.



5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Data see Attachment B





6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

See list of measuring instruments of this test report.

6.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Data see Attachment C



6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth:

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP

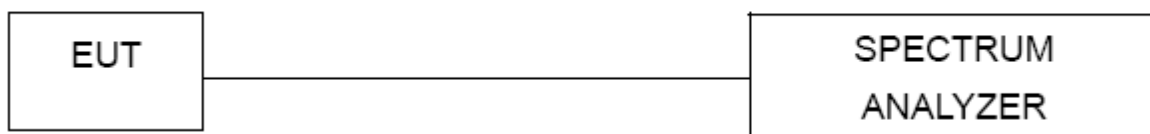

6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2.5 TEST RESULTS

Data See Attachment C



6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:


6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP

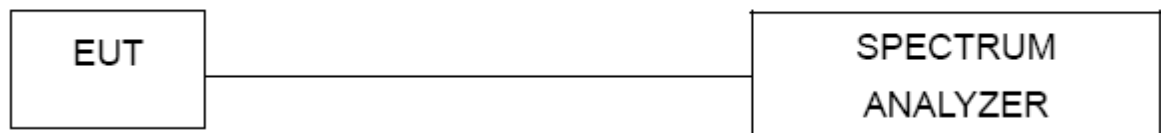

6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.3.5 TEST RESULTS

Data See Attachment D

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


7.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

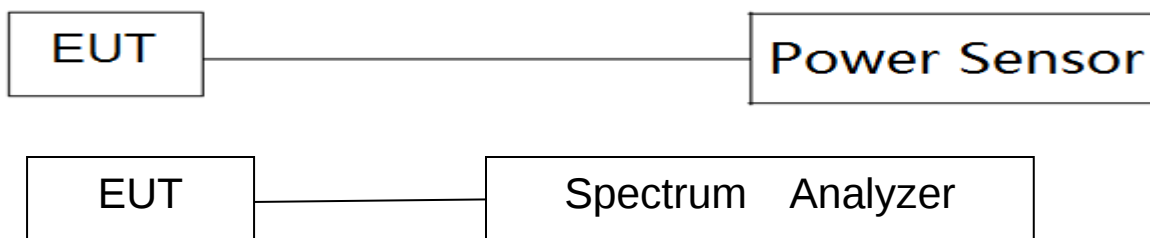

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



7.5 TEST RESULTS

Band I (5.15-5.25GHz)


Band I (5.15-5.25GHz)					
Test Channel	Frequency (MHz)	AV Power Ant. A (dBm)	AV Power Ant. B(dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11a					
36	5180	4.42	5.46	--	23.98
40	5200	4.76	5.74	--	23.98
48	5240	4.97	6.48	--	23.98
802.11n(HT20)					
36	5180	4.20	5.17	7.72	23.98
40	5200	4.36	5.64	8.06	23.98
48	5240	4.93	6.21	8.63	23.98
802.11n(HT40)					
38	5190	3.95	5.63	7.88	23.98
46	5230	4.69	6.20	8.52	23.98
802.11ac(HT20)					
36	5180	3.88	5.26	7.63	23.98
40	5200	4.32	5.56	7.99	23.98
48	5240	4.79	6.35	8.65	23.98
802.11ac(HT40)					
38	5190	4.17	5.61	7.96	23.98
46	5230	4.71	6.31	8.59	23.98
802.11ac(HT80)					
42	5210	4.35	5.86	8.18	23.98

Note:

1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W (23.98dBm) .



802.11ac VHT80(5210MHz)

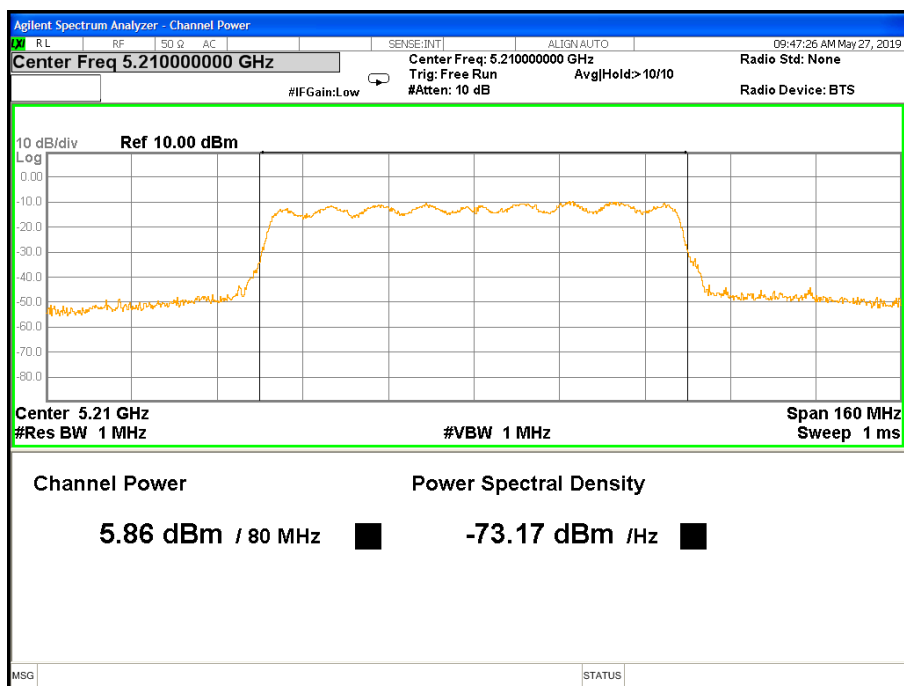

**Band IV (5.725-5.85GHz)**


Band IV (5.725-5.85GHz)					
Test Channel	Frequency (MHz)	AV Power Ant. A (dBm)	AV Power Ant. B(dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11a					
149	5745	3.44	7.39	--	30
157	5785	3.71	7.41	--	30
165	5825	4.02	7.59	--	30
802.11n(HT20)					
149	5745	4.18	7.31	9.031	30
157	5785	3.81	7.34	8.934	30
165	5825	3.48	7.51	8.957	30
802.11n(HT40)					
151	5755	4.02	7.20	8.905	30
159	5795	4.12	7.42	9.086	30
802.11ac(HT20)					
149	5745	3.66	7.28	8.847	30
157	5785	3.89	7.44	9.028	30
165	5825	4.17	7.57	9.205	30
802.11ac(HT40)					
151	5755	3.79	7.38	8.956	30
159	5795	4.26	7.46	9.159	30
802.11ac(HT80)					
155	5775	4.05	7.51	9.126	30

Note:

1. For mobile and portable client devices in the 5.725-5.85 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W(30dBm).



802.11ac VHT80(5775MHz)

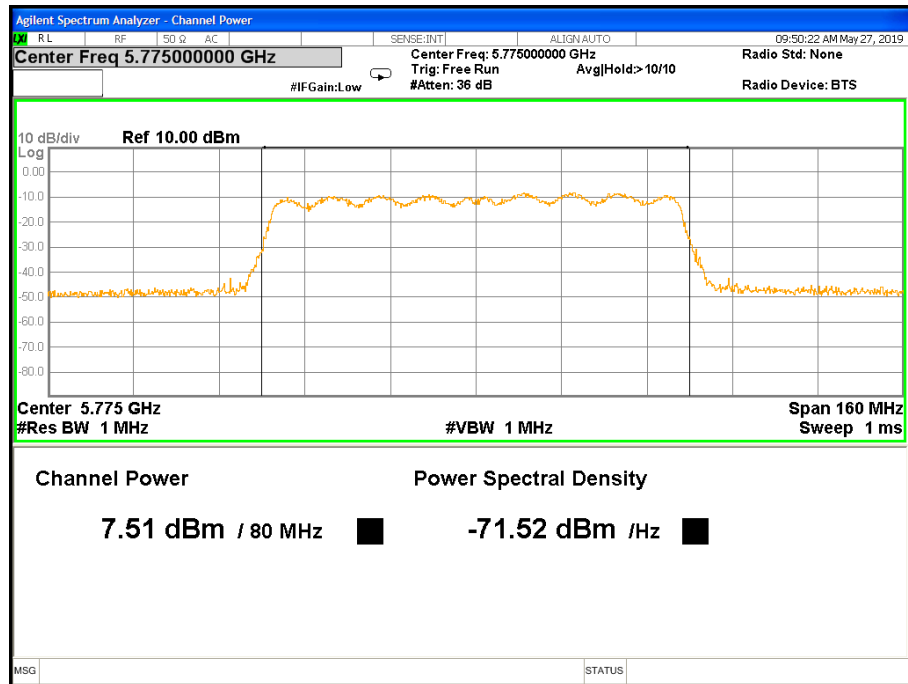




8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission

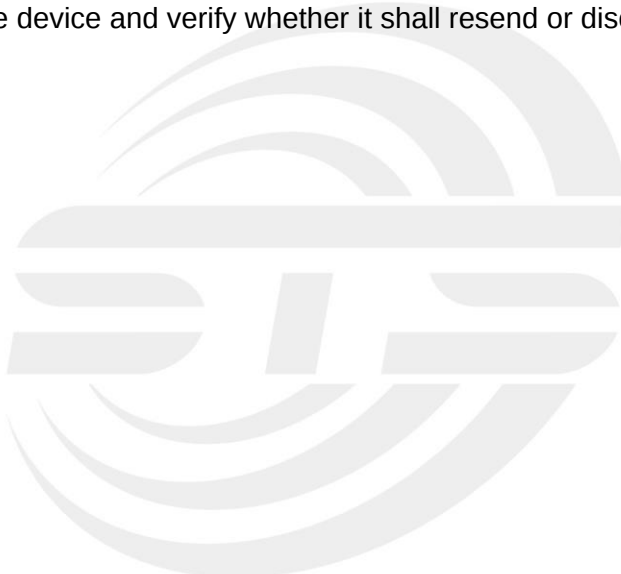



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.



**APPENDIX - PHOTOS OF TEST SETUP**

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

