

Test Report

Report No. : MTi250331029-0106E2

Date of Issue : 2025-07-09

Applicant : ALOGIC Corporation Pty Ltd.

Product : SWIV ULTRA 3-IN-1 WIRELESS CHARGING
STATION




Model(s) : JWCP31WHV2, JWCP31XXV2 (XX represents
color)

FCC ID : 2ATCA-JWCP31V2

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	7
2	Measurement uncertainty	7
3	Test facilities and accreditations	8
3.1	Test laboratory	8
4	List of test equipment	9
5	Test result	10
5.2	Test setup	11
5.3	Test Procedures	11
5.4	Information of test equipment	12
5.5	Test results	13
	Photographs of the Test Setup	16
	Photographs of the EUT	17

Test Result Certification		
Applicant	ALOGIC Corporation Pty Ltd.	
Applicant Address	Level 40, 140 William Street, Melbourne VIC, 3000 Australia	
Manufacturer	ALOGIC Corporation Pty Ltd.	
Manufacturer Address	Level 40, 140 William Street, Melbourne VIC, 3000 Australia	
Product description		
Product name	SWIV ULTRA 3-IN-1 WIRELESS CHARGING STATION	
Trademark	JOURNEY, JR-NY, JRNY	
Model name	JWCP31WHV2	
Series Model(s)	JWCP31XXV2 (XX represents color)	
Standards	47 CFR PART 1, § 1.1310 47 CFR PART 2.1091	
Test Method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2025-05-14 to 2025-07-04	
Test result	Pass	
Prepared by:	Yanice.Xie	
Reviewed by:	David Lee	
Approved by:	Lewis Lian	

1 General Description

1.1 Description of the EUT

Product name:	SWIV ULTRA 3-IN-1 WIRELESS CHARGING STATION
Model name:	JWCP31WHV2
Series Model(s):	JWCP31XXV2 (XX represents color)
Model difference:	All the models are the same circuit and module, except the model name and color.
Electrical rating:	Input:DC 5V/3A, 9V/3A Phone Wireless Charging:15W Max Earbuds/Airpods Wireless Charging:5W Max iWatch Wireless Charging:5W Max
Accessories:	N/A
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) number:	MTi250331029-01-R001
RF specification:	
Operating frequency range:	Coil 1(Phone 5W-EPP15W/ EPP12W): 111-205kHz Coil 1(Phone MPP15W/ MPP12W):360kHz Coil 2(Earbuds 5W/3.5W): 111-205kHz Coil 3(Watch 2.5W): 326.5 kHz Coil 3(Watch 5W/3W):1.778 MHz
Modulation type:	ASK
Antenna type:	Coil

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Wireless Output: Phone(5W)+Earbuds(3.5W)+Watch(3W)
Mode2	Wireless output Phone(7.5W)+Earbuds(3.5W)+Watch(3W)
Mode3	Wireless output(Phone(10W)+Earbuds(3.5W)+Watch(3W))
Mode4	Wireless Output: Phone(EPP12W)+Earbuds(3.5W)+Watch(3W)
Mode5	Wireless Output: Phone(MPP12W)+Earbuds(3.5W)+Watch(3W)
Mode6	Wireless Output: Phone(5W)+Earbuds(3.5W)+Watch(2.5W)
Mode7	Wireless Output: Phone(7.5W)+Earbuds(3.5W)+Watch(2.5W)
Mode8	Wireless Output: Phone(10W)+Earbuds(3.5W)+Watch(2.5W)
Mode9	Wireless Output: Phone(EPP12W)+Earbuds(3.5W)+Watch(2.5W)
Mode10	Wireless Output: Phone(MPP12W)+Earbuds(3.5W)+Watch(2.5W)
Mode11	Wireless output(Phone(5W)+Earbuds(3.5W))
Mode12	Wireless output(Phone(7.5W)+Earbuds(3.5W))
Mode13	Wireless output(Phone(10W)+Earbuds(3.5W))
Mode14	Wireless Output: Phone(EPP12W)+Earbuds(3.5W)
Mode15	Wireless Output: Phone(MPP12W)+Earbuds(3.5W)
Mode16	Wireless output(Phone(5W)+Watch(2.5W))
Mode17	Wireless output(Phone(7.5W)+Watch(2.5W))
Mode18	Wireless output(Phone(10W)+Watch(2.5W))
Mode19	Wireless output(Phone(EPP15W)+Watch(2.5W))
Mode20	Wireless output(Phone(MPP15W)+Watch(2.5W))
Mode20	Wireless output(Phone(5W)+Watch(5W))
Mode21	Wireless output(Phone(7.5W)+Watch(5W))
Mode22	Wireless output(Phone(10W)+Watch(5W))
Mode23	Wireless Output: Phone(EPP15W)+Watch(3W)
Mode24	Wireless Output: Phone(MPP15W)+Watch(3W)
Mode25	Wireless Output Earbuds(5W)+Watch(2.5W)
Mode26	Wireless Output Earbuds(5W)+Watch(5W)
Mode27	Wireless output Phone(5W)
Mode28	Wireless output Phone(7.5W)
Mode29	Wireless output Phone(10W)
Mode30	Wireless Output: Phone(EPP15W)
Mode31	Wireless Output: Phone(MPP15W)

TEST REPORT

Report No.: MTi250331029-0106E2

Mode32	Wireless output Earbuds(5W)
Mode33	Wireless output Watch(2.5W)
Mode34	Wireless output Watch(5W)
Mode35	Standby

Note: In the combined mode, only the Earbuds device and watch device can output max power, other combination of device cannot work max power. In the case of the 2-in-1 combination (phone + watch), the maximum output power is only 15W + 3W. In the 3-in-1 combination (phone + Earbuds + watch), the maximum output power of the phone is only 12W, the maximum output of the Earbuds is only 3.5W, and the maximum output of the watch is only 3W.

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Moible Phone	iPhone 8	DX3ZV2DQHG72	Apple
Moible Phone	iPhone 13	KXPWNQFK90	Apple
TWS	AirPods	MJHFCQP1QM	Apple
Watch	Apple Watch SE	FH7PP6BAG91J6	Apple
Watch	Apple Watch S7	M0JVGQG1VP	Apple
HUAWEI QUICK CHARGE(65W)	HW-200325CP1	FL8606P8500764	HUAWEI
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Test facilities and accreditations**3.1 Test laboratory**

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

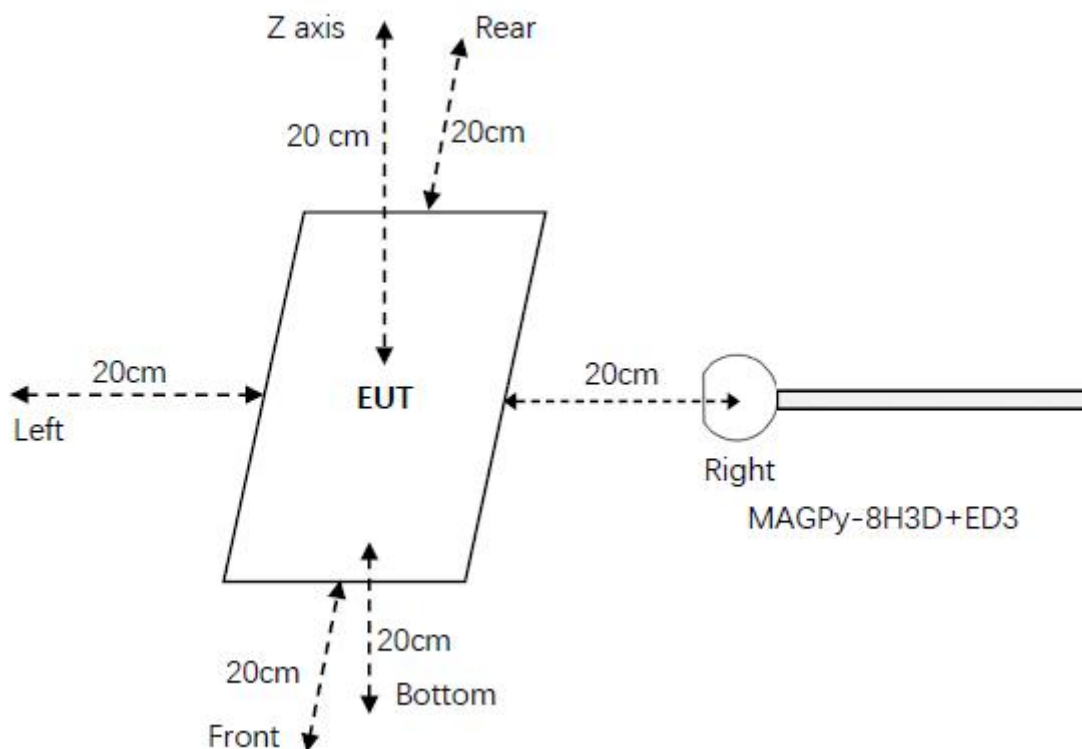
Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup**5.3 Test Procedures**

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

5.5 Test results

Test condition 1: Mode 2 operating mode with client device (1 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	2.14	614	0.35%	0.13	1.63	7.98%
Left	1.97			0.05		
Right	1.94			0.04		
Front	1.58			0.08		
Rear	1.37			0.07		
Bottom	2.06			0.06		

Test condition 2: Mode 2 operating mode with client device (50 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.71	614	0.28%	0.10	1.63	6.38%
Left	1.58			0.04		
Right	1.55			0.03		
Front	1.26			0.06		
Rear	1.10			0.06		
Bottom	1.65			0.05		

Test condition 3: Mode 2 operating mode with client device (99 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.39	614	0.23%	0.08	1.63	5.18%
Left	1.28			0.03		
Right	1.26			0.03		
Front	1.03			0.05		
Rear	0.89			0.05		
Bottom	1.34			0.04		

Test condition 1: Mode 9 operating mode with client device (1 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	2.15	614	0.35%	0.09	1.63	5.52%
Left	1.84			0.05		
Right	1.67			0.07		
Front	1.59			0.03		
Rear	1.47			0.04		
Bottom	1.98			0.06		

Test condition 2: Mode 9 operating mode with client device (50 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.72	614	0.28%	0.07	1.63	4.42%
Left	1.47			0.04		
Right	1.34			0.06		
Front	1.27			0.02		
Rear	1.18			0.03		
Bottom	1.58			0.05		

Test condition 3: Mode 9 operating mode with client device (99 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.40	614	0.23%	0.06	1.63	3.59%
Left	1.20			0.03		
Right	1.09			0.05		
Front	1.03			0.02		
Rear	0.96			0.03		
Bottom	1.29			0.04		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****