

RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1904-8185-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	Medela AG
Address	Lättichstr. 4b 6340 Baar SWITZERLAND
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, 2018-04
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	freestyle
Model(s)	101035796
Additional Model(s)	None
Brand Name(s)	Medela
Hardware Version(s)	101032361-6
Software Version(s)	Kolibri_DTM.hex, Rev.15
FCC-ID	2ATCR648386
IC	25040-648386
Test Result	PASSED

Possible test case verdicts:			
required by standard but not tested		N/T	
not required by standard		N/R	
not applicable to EUT		N/A	
test object does meet the requirement		P(PASS)	
test object does not meet the requirement		F(FAIL)	
Testing:			
Test Lab Temperature		15 - 35 °C	
Test Lab Humidity		32 – 38 %	
Date of receipt of test item		2019-04-12	
Report:			
Compiled by		Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)		Wilfried Treffke	
Approved by (+ signature) (Deputy Head of Lab)		Toralf Jahn	
Date of Issue		2019-05-23	
Total number of pages		95	
General Remarks:			
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.			
Additional Comments:			
The manufacturer declares several variants of the adapters:			
Mains adapter series	Variant (plug)	Mains adapter type	Article number
1 S010BL ¹⁾	EU ²⁾	S010BLV0500200	101039085
	UK	S010BLB0500200	101039087
	AUS/NZ	S010BLS0500200	101039088
	CN	S010BLC0500200	101039089
2 S010W ¹⁾	EU ²⁾	S010WV0500200	101036685
	CN	S010WC0500200	101036689
¹⁾ All variants of the S010BL resp. the S010W series have identical electronics (PCB, layout, assy) ²⁾ tested version			

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-05-23	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage


REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment Internal	12
1.3	Photos – Test Setup.....	14
1.4	Support Equipment.....	15
1.5	Test Modes	16
1.6	Test Frequencies.....	17
1.7	Sample emission level calculation.....	18
2	Result Summary.....	19
3	Test Conditions and Results.....	20
3.1	Test Conditions and Results - Occupied bandwidth.....	20
3.2	Test Conditions and Results - 6 dB bandwidth.....	25
3.3	Test Conditions and Results - Maximum peak conducted output power	30
3.4	Test Conditions and Results - Power spectral density	32
3.5	Test Conditions and Results - AC powerline conducted emissions.....	37
3.6	Test Conditions and Results - Band-edge compliance.....	42
3.7	Test Conditions and Results - Conducted spurious emissions.....	46
3.8	Test Conditions and Results - Transmitter radiated emissions	51
3.9	Test Conditions and Results - Receiver radiated emissions	54
ANNEX A	Transmitter spurious emissions	57
ANNEX B	Receiver spurious emissions	86

1 Equipment (Test Item) Under Test

Description	freestyle	
Model	101035796	
Additional Model(s)	None	
Brand Name(s)	Medela	
Serial Number(s)	K20185100031 (radiated test sample) K20185100083 (conducted test sample)	
Hardware Version(s)	101032361-6	
Software Version(s)	Kolibri_DTM.hex, Rev.15	
PMN	freestyle	
HVIN	101036867	
FVIN	-/-	
HMN	-/-	
FCC-ID	2ATCR648386	
IC	25040-648386	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	Integrated
	Model	PCB-antenna
	Manufacturer	Medela AG
	Gain	-4 dBi (manufacturer declaration)
Supply Voltage	V _{NOM}	5 VDC
Operating Temperature	T _{NOM}	20 °C
AC/DC-Adaptor I (USB Adapter, non-medical)	Model	S010BLV0500200
	Vendor	TenPao
	Input	100 – 240 VAC; 50/60 Hz 0.4A
	Output	5.0 VDC 2A
AC/DC-Adaptor II (USB Adapter, medical)	Model	S010WV0500200
	Vendor	TenPao
	Input	100 – 240 VAC; 50/60 Hz 0.4A
	Output	5.0 VDC 2A
Manufacturer	Medela AG Lättichstr. 4b 6340 Baar SWITZERLAND	

1.1 Photos – Equipment External

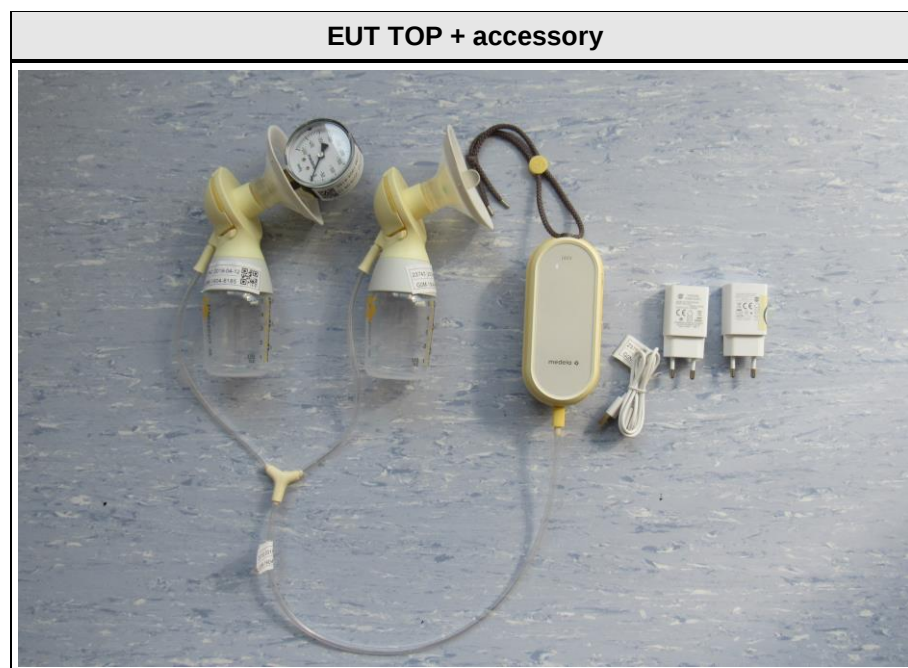

EUT BOTTOM



EUT FRONT



EUT BACK



EUT AC/DC adaptor II



EUT AC/DC adaptor II




EUT AC/DC adaptor I




EUT AC/DC adaptor I




1.2 Photos – Equipment Internal

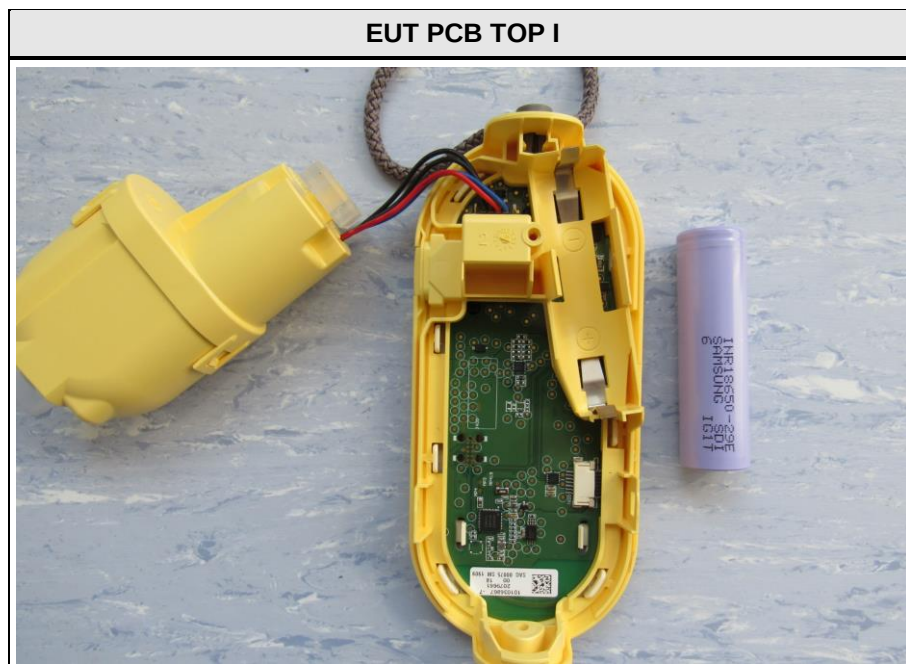



EUT PCB TOP II

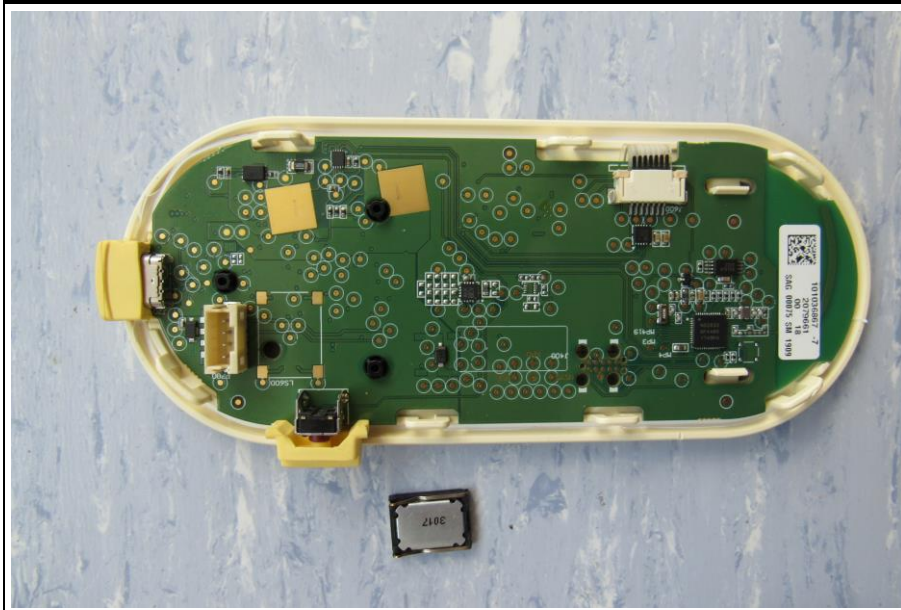

EUT PCB BOTTOM

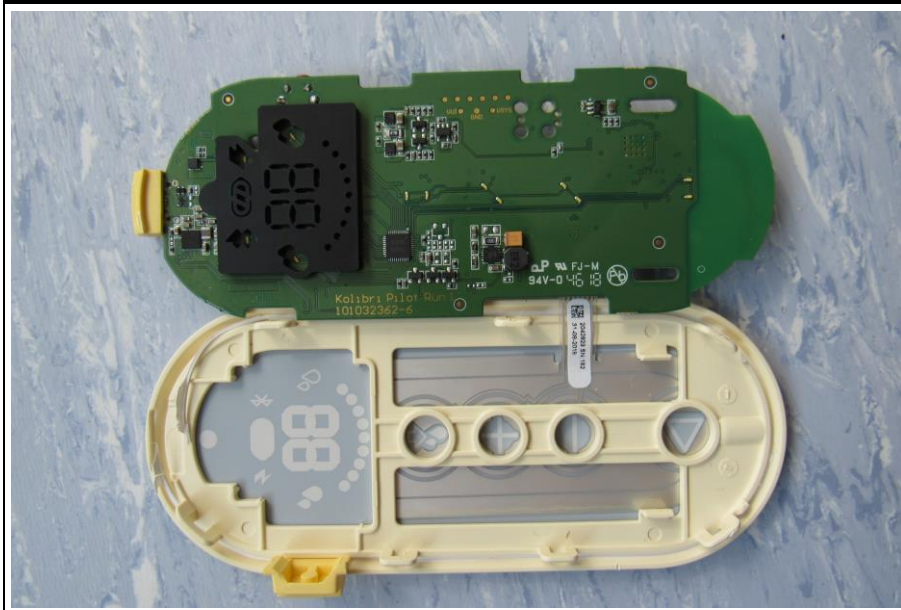

1.3 Photos – Test Setup

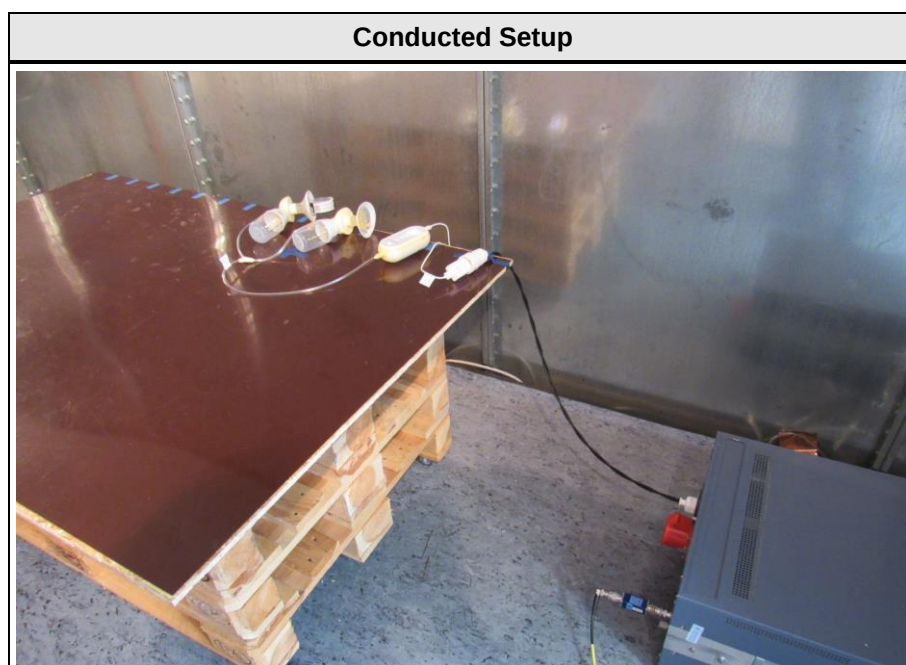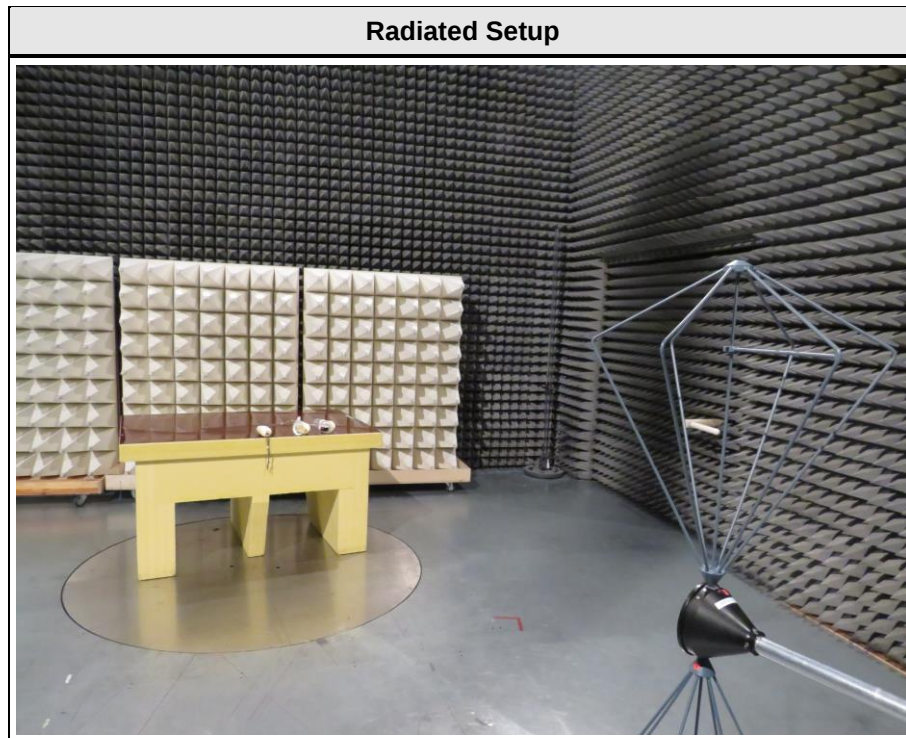

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Laptop	Dell	Latitude E6420	S/N HPJ4R1
AE	Power Supply	Dell	FA65NE0-00	S/N RX929
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.5 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 64%
Receive	Mode = Receive
Comment:	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBμV + 26 dB/m	= 47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 (section 6.6)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	N/T	
FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen, Issue 5 (section 6.6)
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2019-04-23

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

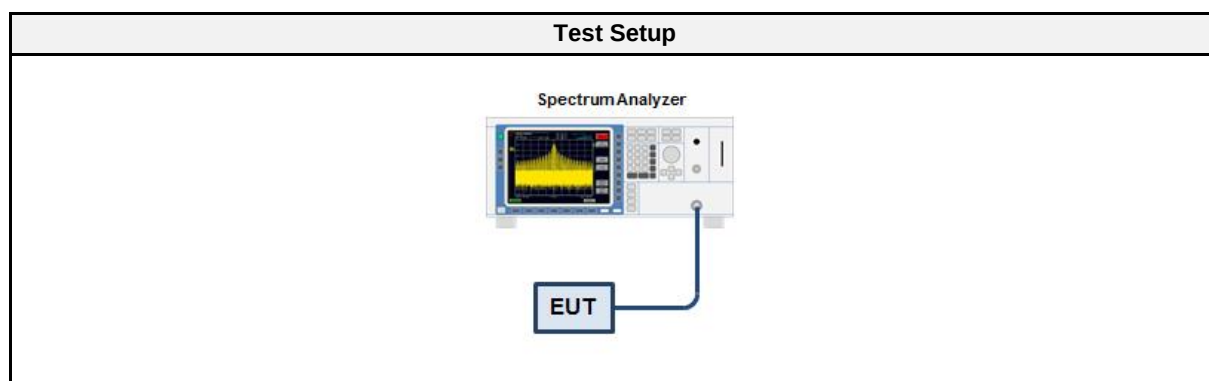

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.050
GFSK	2440	1.050
GFSK	2480	1.050

Occupied Bandwidth


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Occupied Bandwidth [MHz]: 1.050

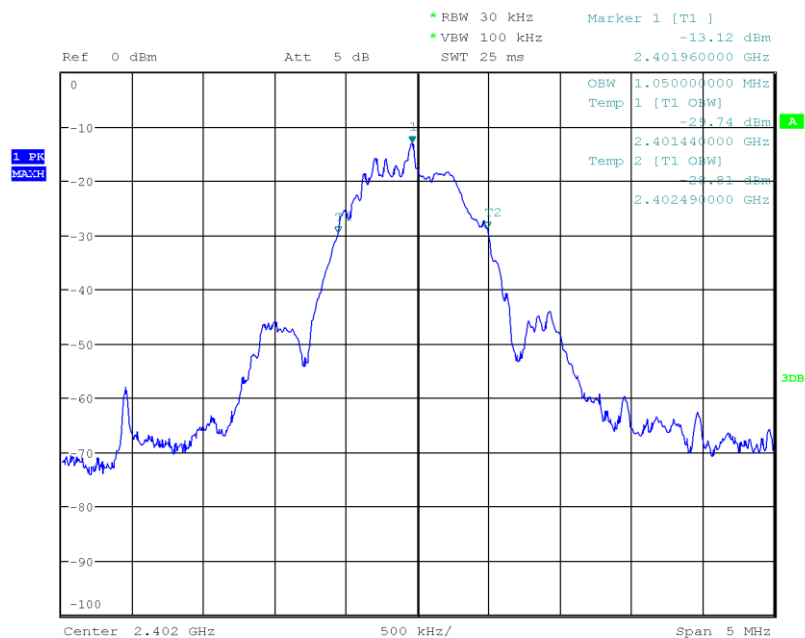

Date: 23.APR.2019 03:49:06

Occupied Bandwidth


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Occupied Bandwidth [MHz]: 1.050

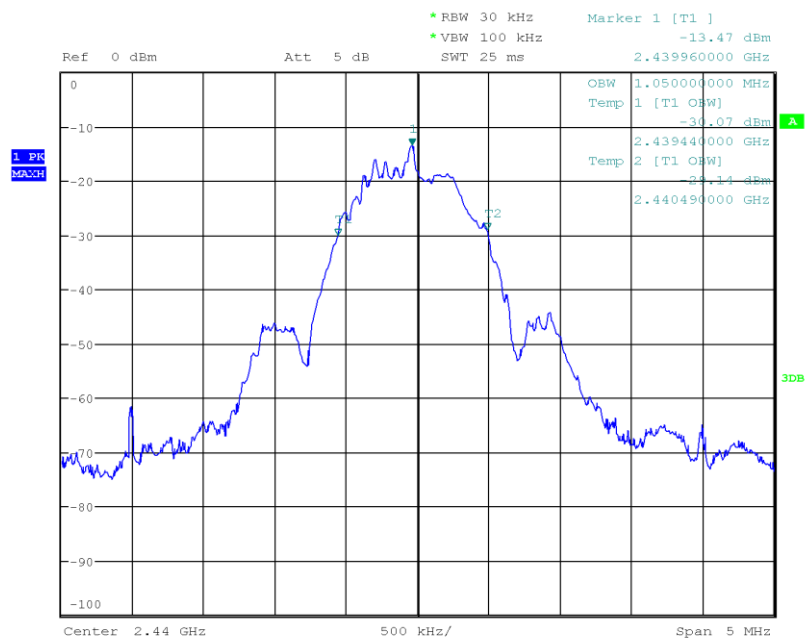

Date: 23.APR.2019 03:55:05

Occupied Bandwidth

Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Occupied Bandwidth [MHz]: 1.050

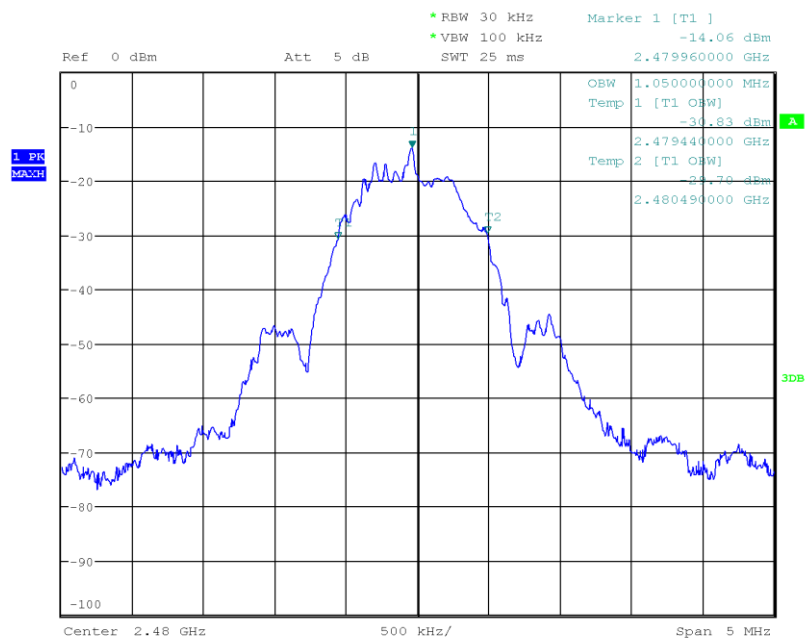

Date: 23.APR.2019 03:58:19

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC § 15.247(a)(2); ISED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.8
Operator	Wilfried Treffke
Date	2019-04-23

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

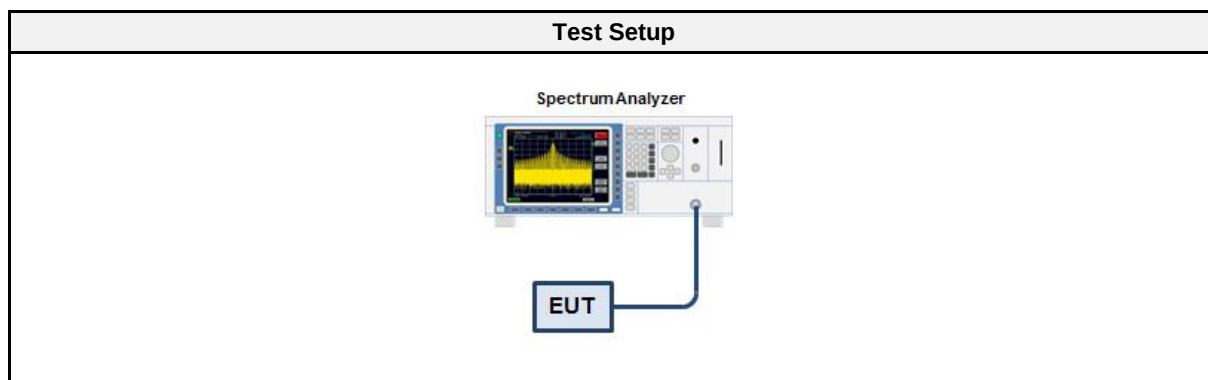

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.2.5 Procedure


Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	705	500	PASS
GFSK	2440	695	500	PASS
GFSK	2480	700	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Lower Frequency [MHz]: 2401.600
 Upper Frequency [MHz]: 2402.305
 6 dB Bandwidth [kHz]: 705

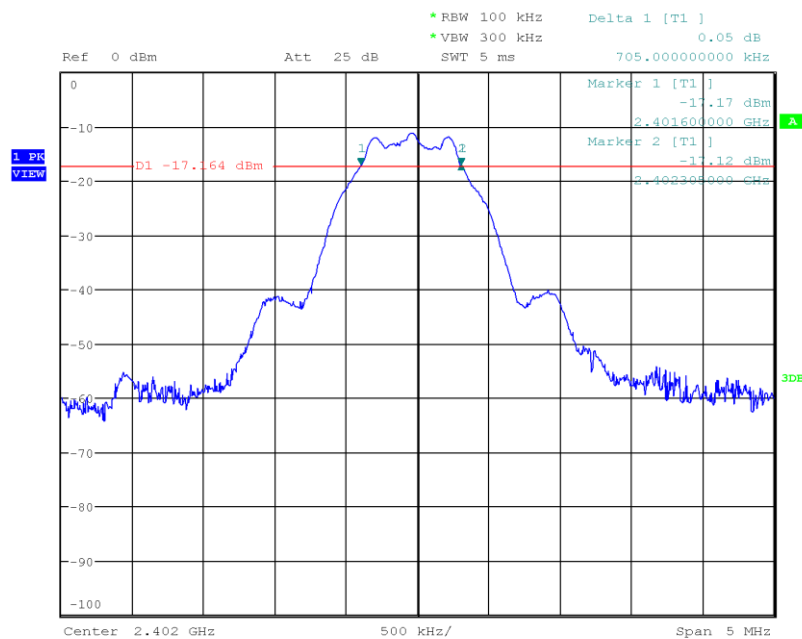

Date: 23.APR.2019 04:03:39

DTS (6 dB) Bandwidth


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Lower Frequency [MHz]: 2439.605
 Upper Frequency [MHz]: 2440.300
 6 dB Bandwidth [kHz]: 695

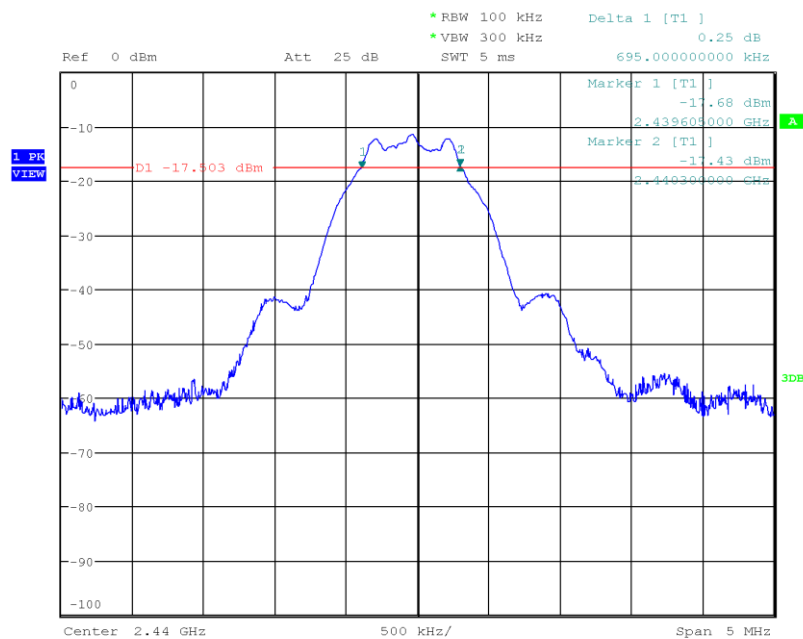

Date: 23.APR.2019 04:06:28

DTS (6 dB) Bandwidth

Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Lower Frequency [MHz]: 2479.605
 Upper Frequency [MHz]: 2480.305
 6 dB Bandwidth [kHz]: 700

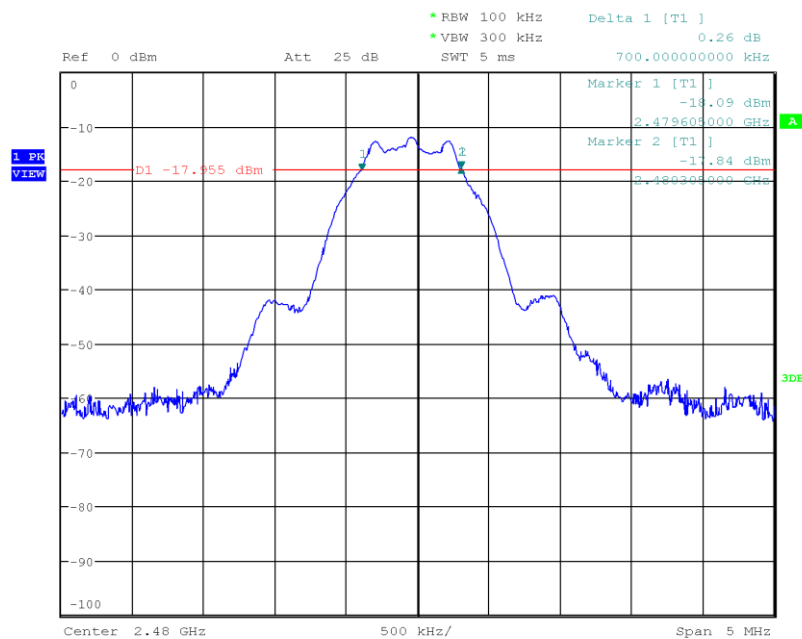

Date: 23.APR.2019 04:07:57

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC § 15.247(b)(1); ISED RSS-247, Issue 2 (section 5.4)
Measurement Method	ANSI C63.10 11.9.1
Operator	Wilfried Treffke
Date	2019-04-23

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

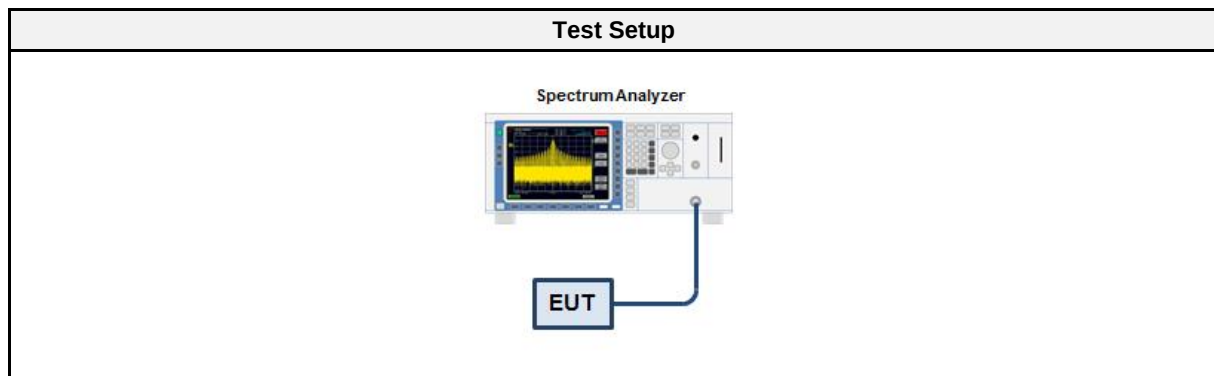

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.3.5 Procedure

Test Procedure
1. EUT set to test hopping mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set $\geq$ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	-10.032	0.0001	1.0	PASS
2440	-9.959	0.0001	1.0	PASS
2480	-10.493	0.0001	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC § 15.247(e); ISSED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Wilfried Treffke
Date	2019-04-23

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

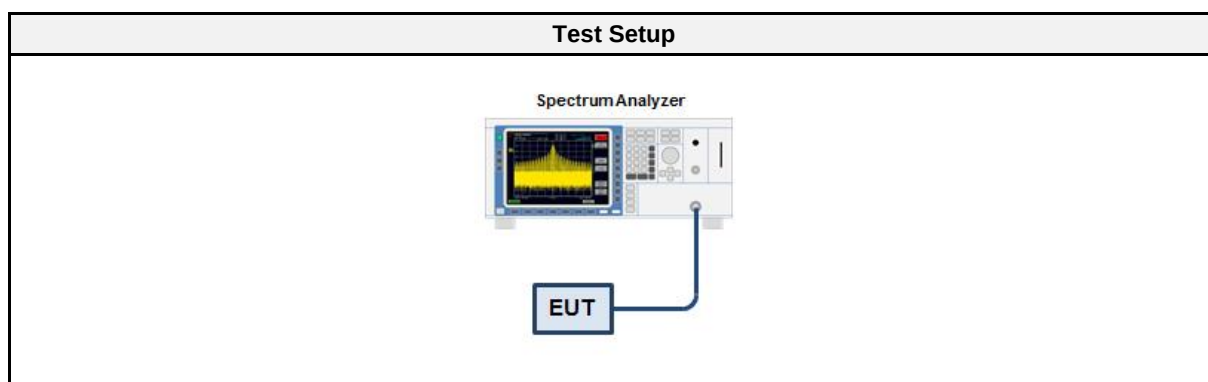

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.4.5 Procedure


Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW $\geq$ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	-10.524	8.0	PASS
2440	-10.507	8.0	PASS
2480	-11.161	8.0	PASS
RBW = 100 kHz			

Peak Power Spectral Density


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Peak Frequency [MHz]: 2401.961
 Spectral Density [dBm/RBW]: -10.524
 Resolution Bandwidth [kHz]: 100 kHz

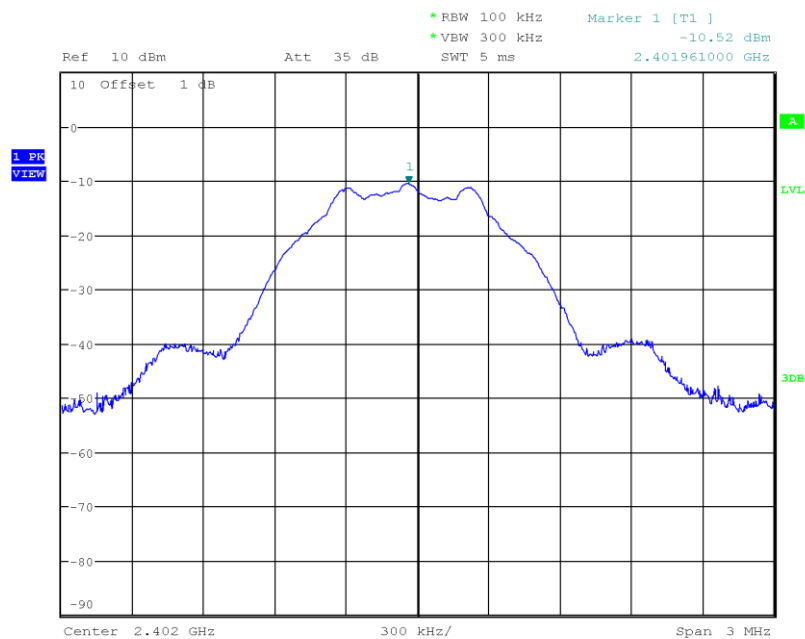

Date: 23.APR.2019 04:27:41

Peak Power Spectral Density


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Peak Frequency [MHz]: 2439.955
 Spectral Density [dBm/RBW]: -10.507
 Resolution Bandwidth [kHz]: 100 kHz

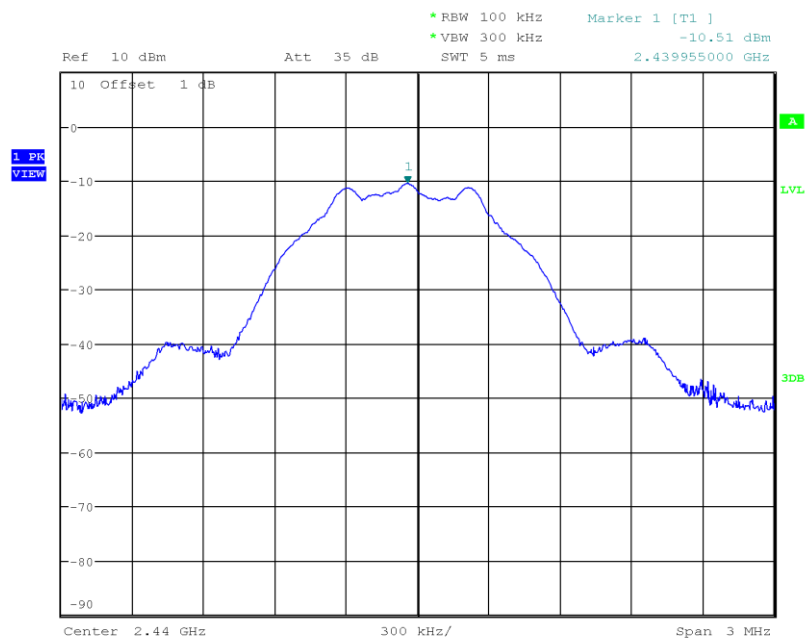

Date: 23.APR.2019 04:33:42

Peak Power Spectral Density

Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Peak Frequency [MHz]: 2479.949
 Spectral Density [dBm/RBW]: -11.161
 Resolution Bandwidth [kHz]: 100 kHz

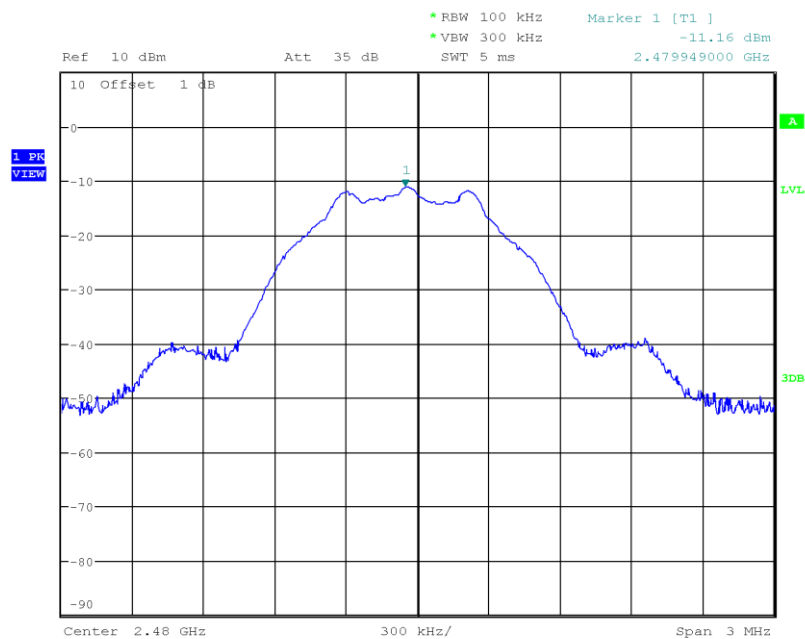

Date: 23.APR.2019 04:35:03

3.5 Test Conditions and Results - AC powerline conducted emissions

3.5.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Operator	Matthias Handrik
Date	2019-04-16

3.5.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBμV]	Average [dBμV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.5.3 Setup

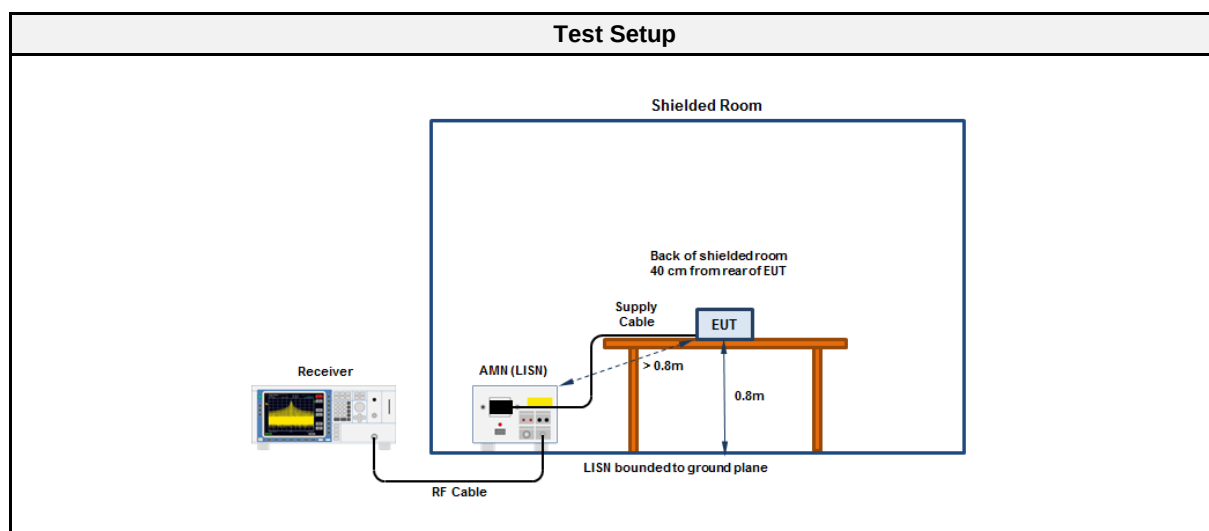

3.5.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Receiver	R&S	ESU 26	EF00241	2017-07	2019-07
LISN	R&S	ESH2-Z5	EF00182	2019-02	2021-02

EMI voltage test in the ac-mains according to FCC Part 15 C

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 26°C, Unom: 120V AC (AC/DC adaptor)
 LISN: ESH2-Z5 L
 Mode: Tx 2440 MHz; AC/DC adaptor I
 Test Date: 2019-04-16
 Note:

Index 2

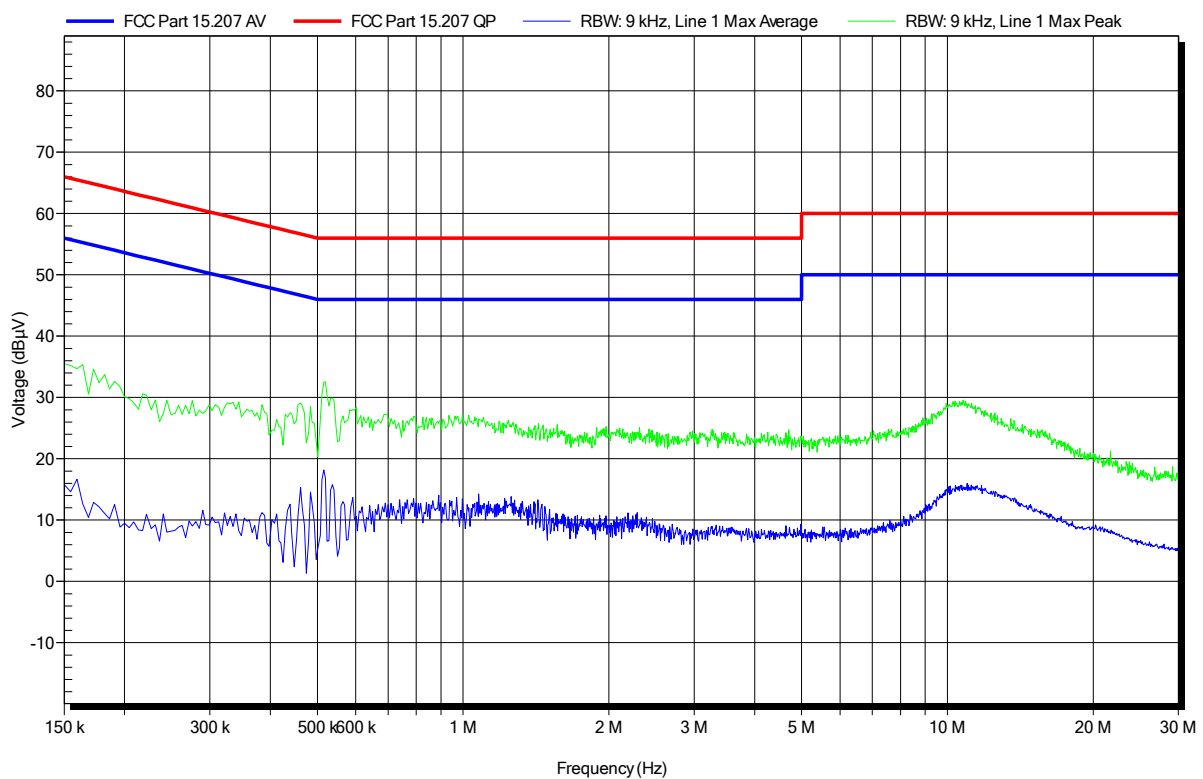


EMI voltage test in the ac-mains according to FCC Part 15 C

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 26°C, Unom: 120V AC (AC/DC adaptor)
LISN: ESH2-Z5 N
Mode: Tx 2440 MHz; AC/DC adaptor I
Test Date: 2019-04-16
Note:

Index 1

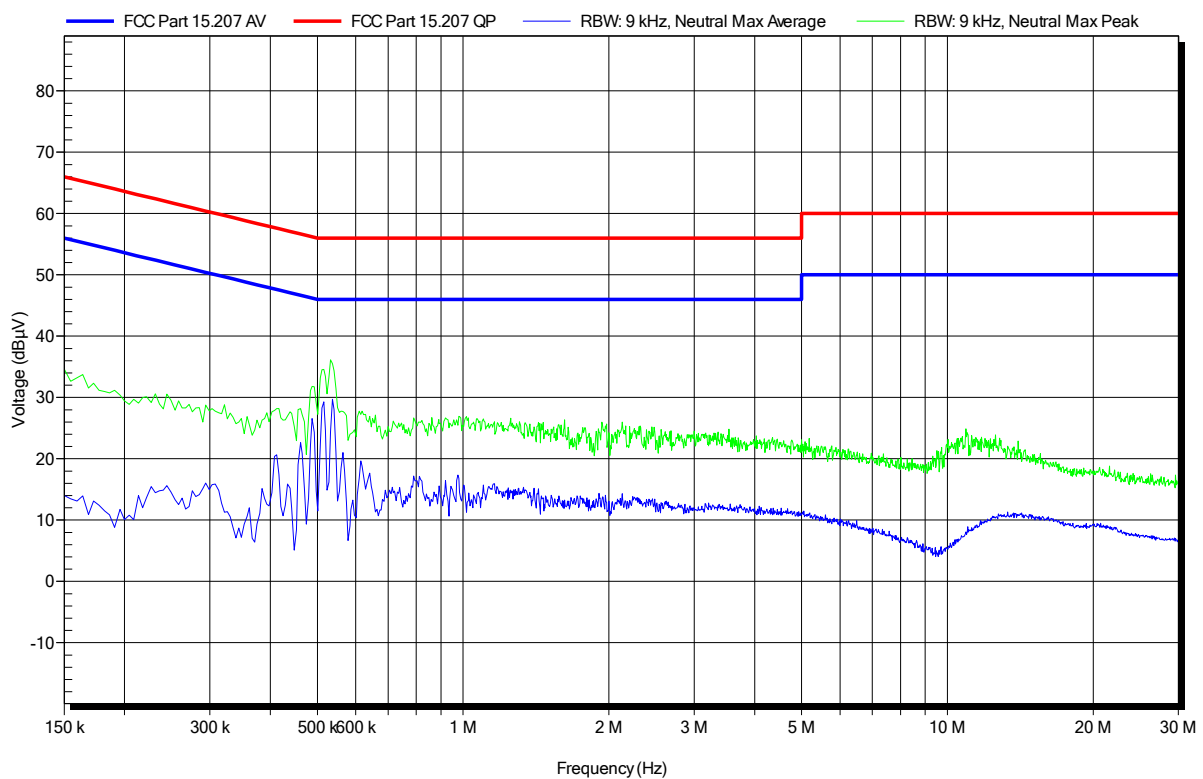


EMI voltage test in the ac-mains according to FCC Part 15 C

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 26°C, Unom: 120V AC (AC/DC adaptor)
 LISN: ESH2-Z5 L
 Mode: Tx 2440 MHz; AC/DC adaptor II
 Test Date: 2019-04-16
 Note:

Index 3

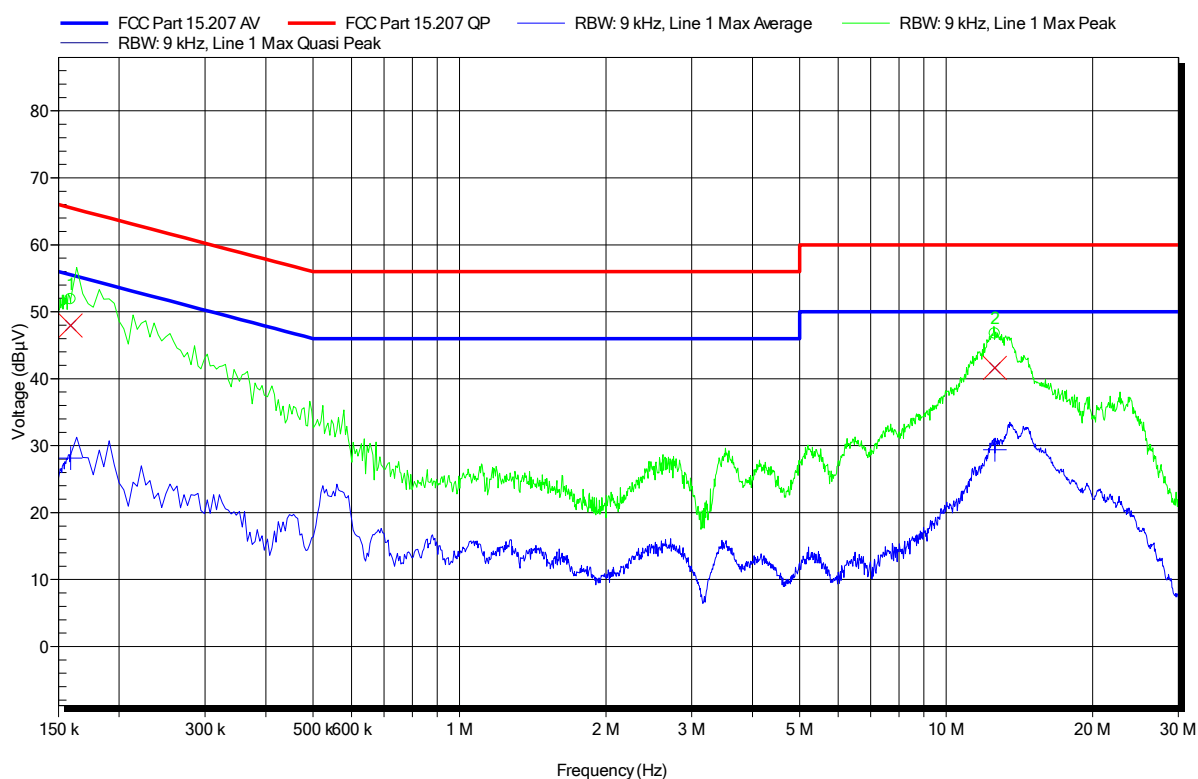

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	159 kHz	47.96 dBμV	65.52 dBμV	-17.56 dB	Pass
2	12.584 MHz	41.61 dBμV	60 dBμV	-18.39 dB	Pass


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	159 kHz	28.13 dBμV	55.52 dBμV	-27.38 dB	Pass
2	12.584 MHz	29.4 dBμV	50 dBμV	-20.6 dB	Pass

EMI voltage test in the ac-mains according to FCC Part 15 C

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 26°C, Unom: 120V AC (AC/DC adaptor)
LISN: ESH2-Z5 N
Mode: Tx 2440 MHz; AC/DC adaptor II
Test Date: 2019-04-16
Note:

Index 4

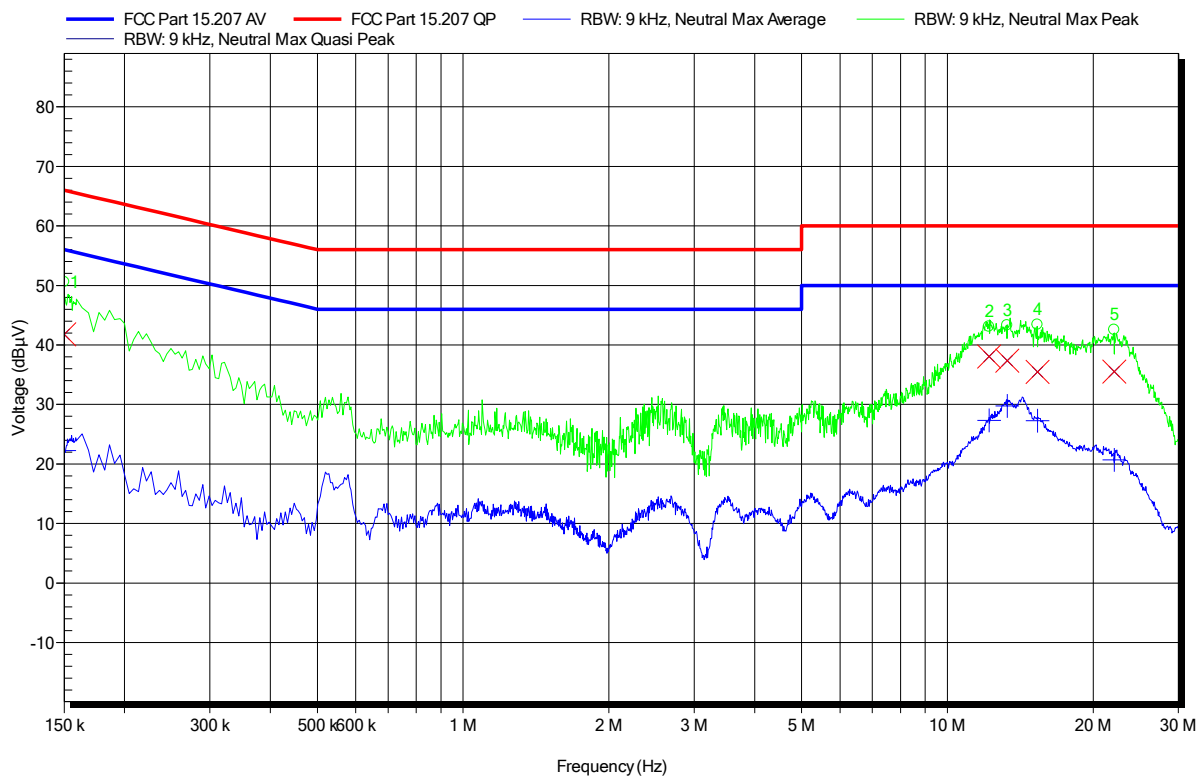

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	150 kHz	41.8 dBμV	66 dBμV	-24.2 dB	Pass
2	12.201 MHz	38.07 dBμV	60 dBμV	-21.93 dB	Pass
3	13.286 MHz	37.38 dBμV	60 dBμV	-22.62 dB	Pass
4	15.347 MHz	35.49 dBμV	60 dBμV	-24.51 dB	Pass
5	22.11 MHz	35.51 dBμV	60 dBμV	-24.49 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	150 kHz	22.26 dBμV	56 dBμV	-33.74 dB	Pass
2	12.201 MHz	27.31 dBμV	50 dBμV	-22.69 dB	Pass
3	13.286 MHz	29.74 dBμV	50 dBμV	-20.26 dB	Pass
4	15.347 MHz	27.27 dBμV	50 dBμV	-22.73 dB	Pass
5	22.11 MHz	20.68 dBμV	50 dBμV	-29.32 dB	Pass

3.6 Test Conditions and Results - Band-edge compliance


3.6.1 Information

Test Information	
Reference	FCC § 15.247(d); ISSED RSS-247, Issue 2 (section 5.5)
Measurement Method	ANSI C63.10 11.13
Operator	Wilfried Treffke
Date	2019-04-23

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

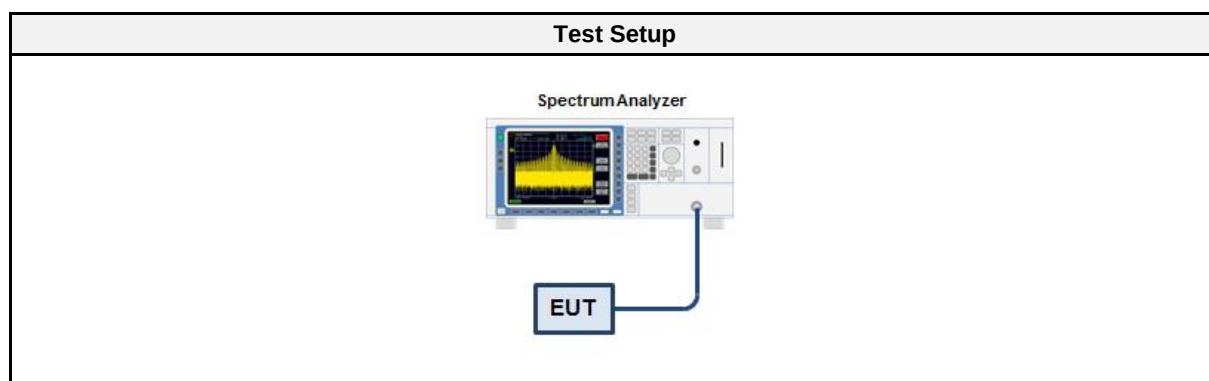

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.6.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-37.96	-20	PASS
GFSK	2480	-38.26	-20	PASS

Band-edge Compliance


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Band-edge: Lower
 In-band Frequency [MHz]: 2401.952
 Max. in-band Level [dBm/100 kHz]: -10.552
 Out-of-band Frequency [MHz]: 2399.936
 Max. out-of-band Level [dBm/100 kHz]: -48.511
 Attenuation [dB]: -37.96

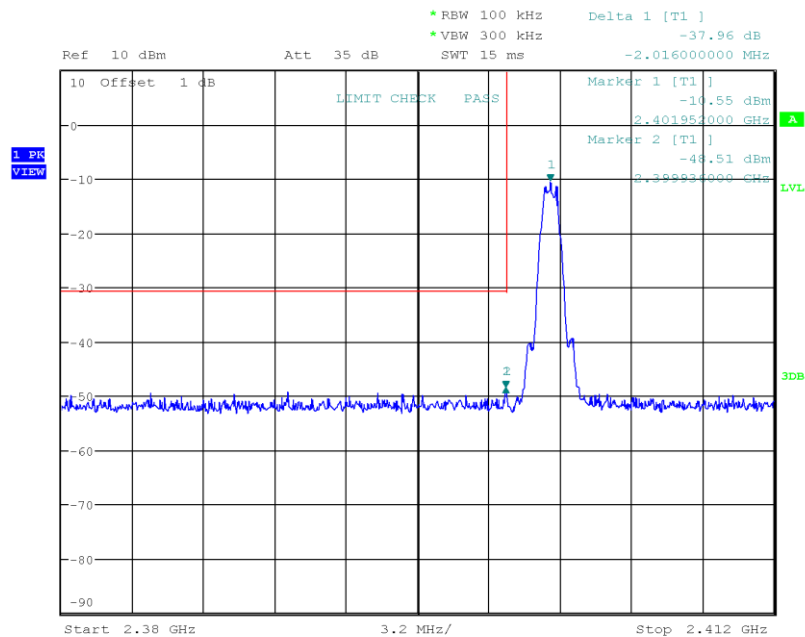

Date: 23.APR.2019 04:44:01

Band-edge Compliance

Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Band-edge: Upper
 In-band Frequency [MHz]: 2479.94
 Max. in-band Level [dBm/100 kHz]: -11.209
 Out-of-band Frequency [MHz]: 2493.52
 Max. out-of-band Level [dBm/100 kHz]: -49.465
 Attenuation [dB]: -38.26

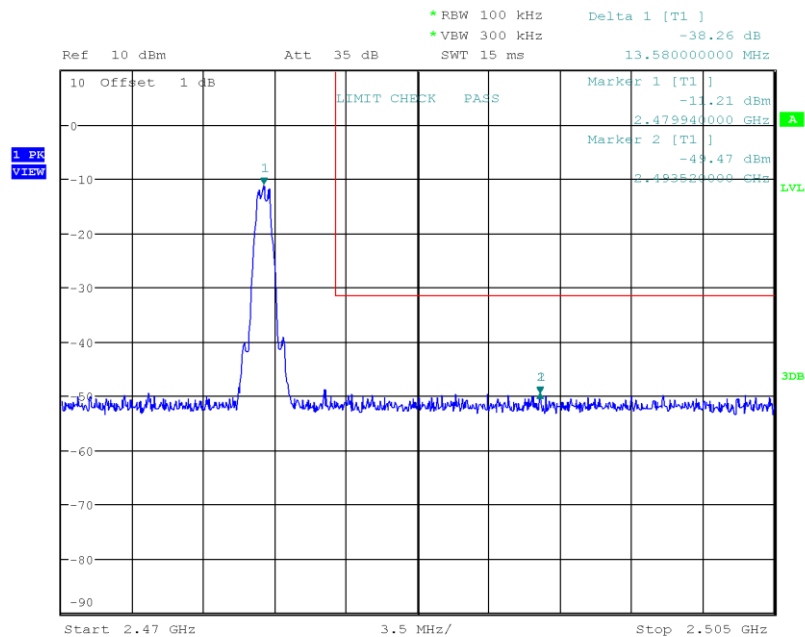

Date: 23.APR.2019 04:47:41

3.7 Test Conditions and Results - Conducted spurious emissions


3.7.1 Information

Test Information	
Reference	FCC § 15.247(d); ISED RSS-247, Issue 2 (section 5.5)
Measurement Method	ANSI C63.10 11.11
Operator	Wilfried Treffke
Date	2019-04-23

3.7.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.7.3 Setup

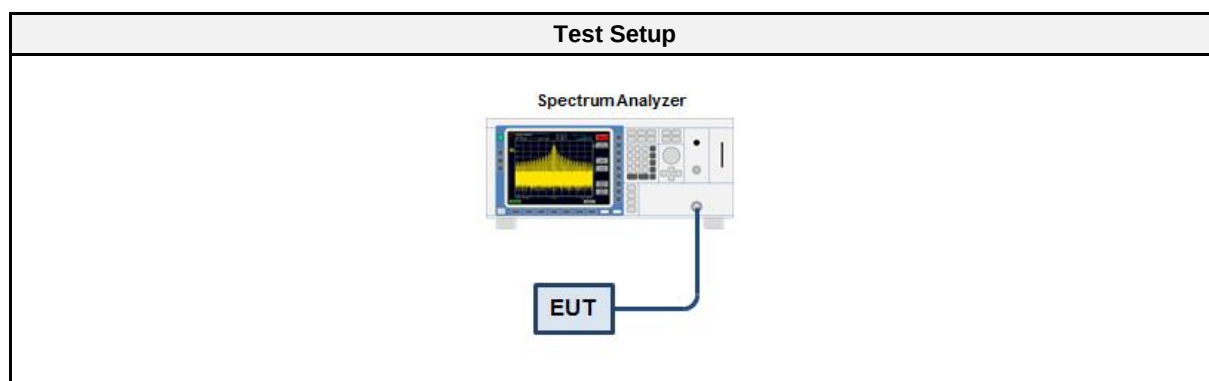

3.7.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.7.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.7.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

Conducted Spurious Emissions


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Max. in-band Frequency [MHz]: 2401.9
 Max. in-band Level [dBm/100 kHz]: -10.8
 Out-of-band Limit [dBm/100 kHz]: -30.8

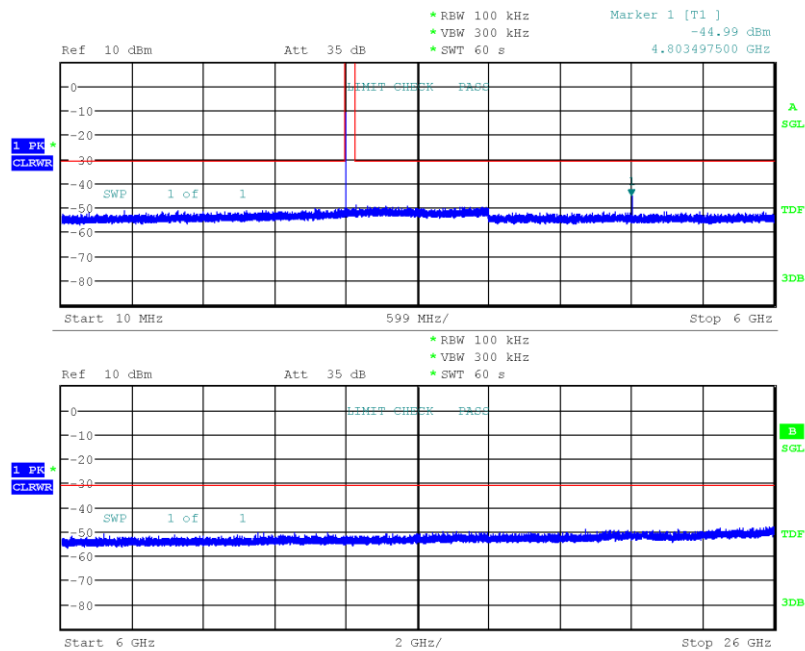

Date: 23.APR.2019 04:58:01

Conducted Spurious Emissions


Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Max. in-band Frequency [MHz]: 2440.0
 Max. in-band Level [dBm/100 kHz]: -10.7
 Out-of-band Limit [dBm/100 kHz]: -30.7

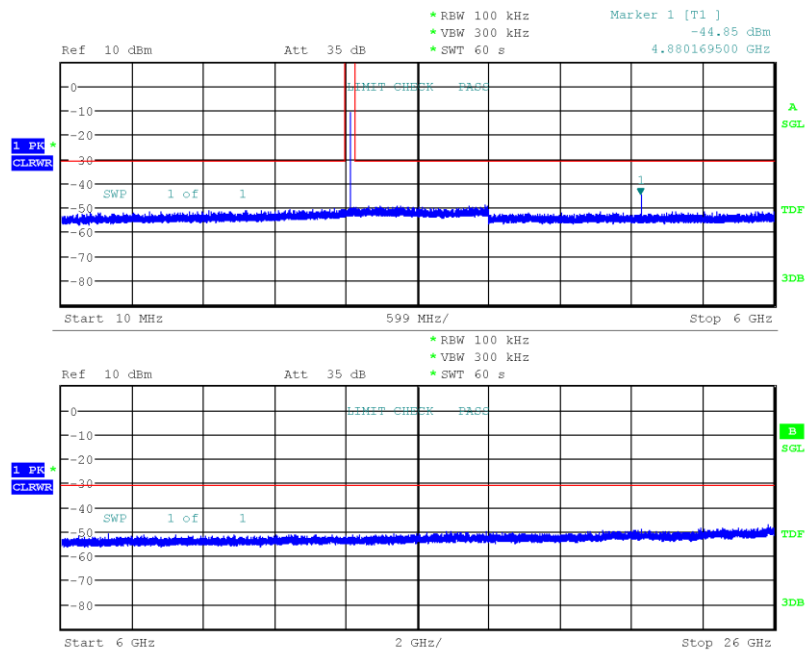

Date: 23.APR.2019 05:02:06

Conducted Spurious Emissions

Project Number: G0M-1904-8185
 Applicant: Medela AG
 Model Description: freestyle
 Model: 101035796
 Test Sample ID: 23738
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-04-23
 Max. in-band Frequency [MHz]: 2480.0
 Max. in-band Level [dBm/100 kHz]: -11.3
 Out-of-band Limit [dBm/100 kHz]: -31.3

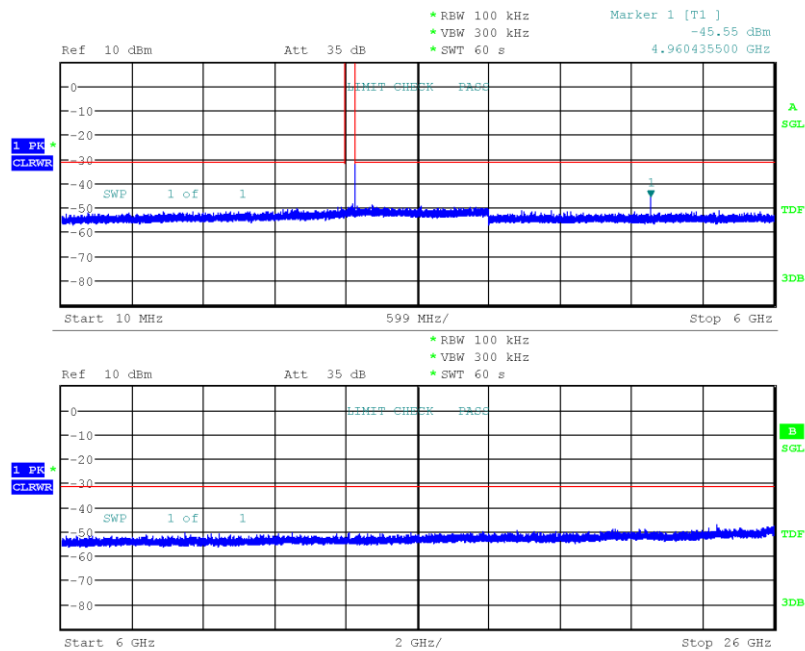

Date: 23.APR.2019 05:08:04

3.8 Test Conditions and Results - Transmitter radiated emissions


3.8.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 (section 6.13)
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2019-04-17

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
0.009 - 0.09	Average	$2400/F[\text{kHz}]$	300
0.09 - 0.110	Quasi-Peak	$2400/F[\text{kHz}]$	300
0.110 - 0.490	Average	$2400/F[\text{kHz}]$	300
0.490 - 1.705	Quasi-Peak	$24000/F[\text{kHz}]$	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

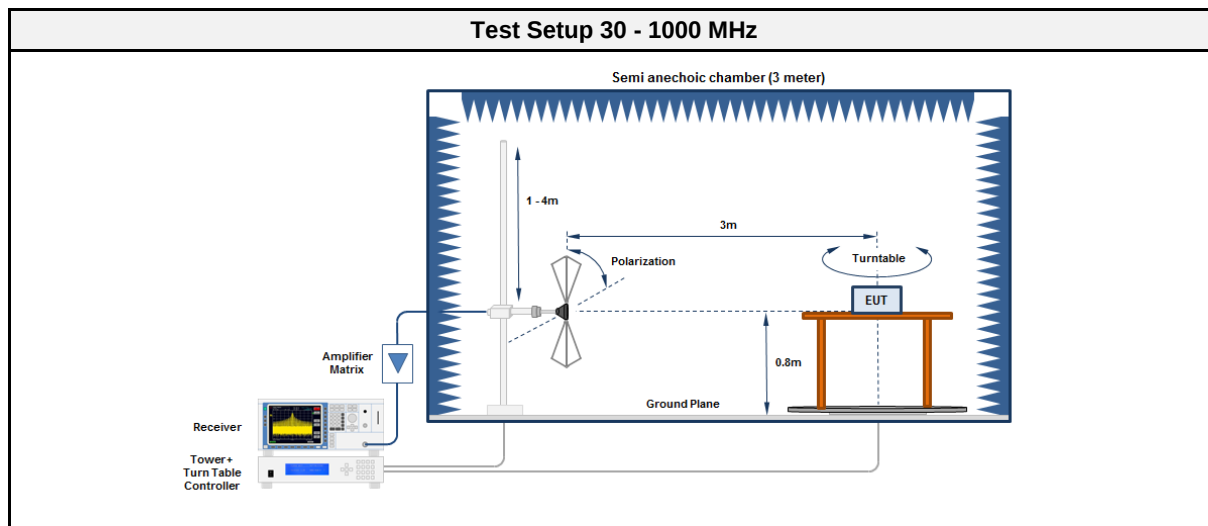

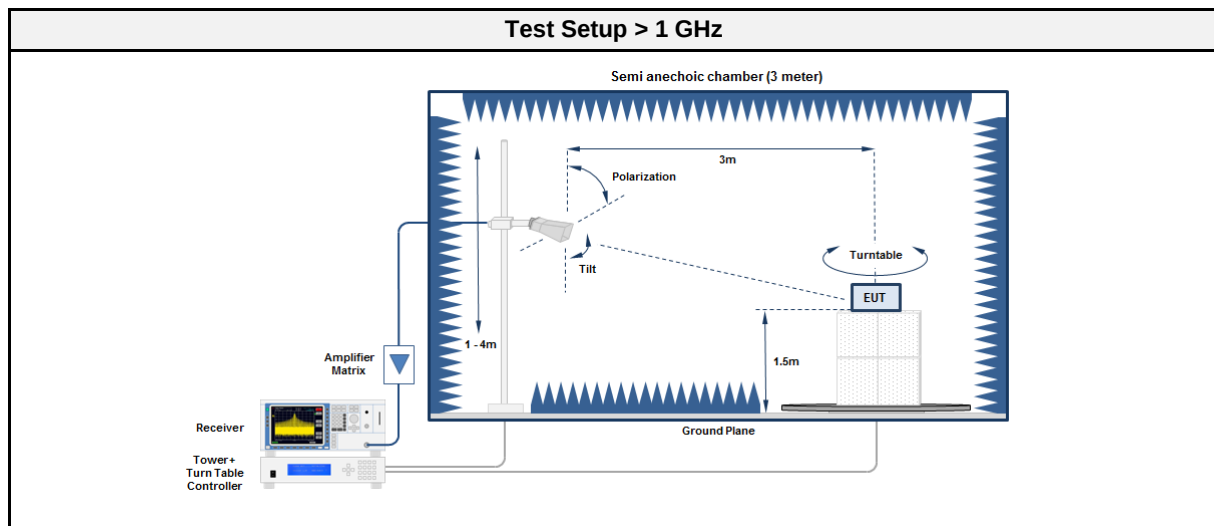

3.8.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00212	2016-04	2019-04

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF01153	2018-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2018-10	2019-10

3.8.5 Procedure

Test Procedure < 30 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The EUT is rotated through 360° 4. The emissions are measured with peak detector and max hold 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	1535.4	39.33	pk	hor	74.00	-34.67
2402	1535.4	36.89	pk	ver	74.00	-37.11
2402	4801	40.37	pk	hor	74.00	-33.63
2402	4801	41.18	pk	ver	74.00	-32.82
2440	1535.1	39.23	pk	hor	74.00	-34.77
2440	1536.2	35.95	pk	ver	74.00	-38.05
2480	1536	37.88	pk	hor	74.00	-36.12
2480	2483.5	52.64	pk	hor	74.00	-21.36
2480	2483.5	39.62	RMS	hor	54.00	-14.38
2480	2483.7	50.95	pk	ver	74.00	-23.05
2480	2483.7	39.28	RMS	ver	54.00	-14.72
2480	4962	43.25	pk	hor	74.00	-30.75
Comment	Only plots containing spurious emission are shown in this annex. All missing plots only contain noise. Test mode selection is based on pre-compliance measurements, all measurements are performed with AC/DC-Adaptor II.					

3.9 Test Conditions and Results - Receiver radiated emissions


3.9.1 Information


Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2019-04-18

3.9.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.9.3 Setup

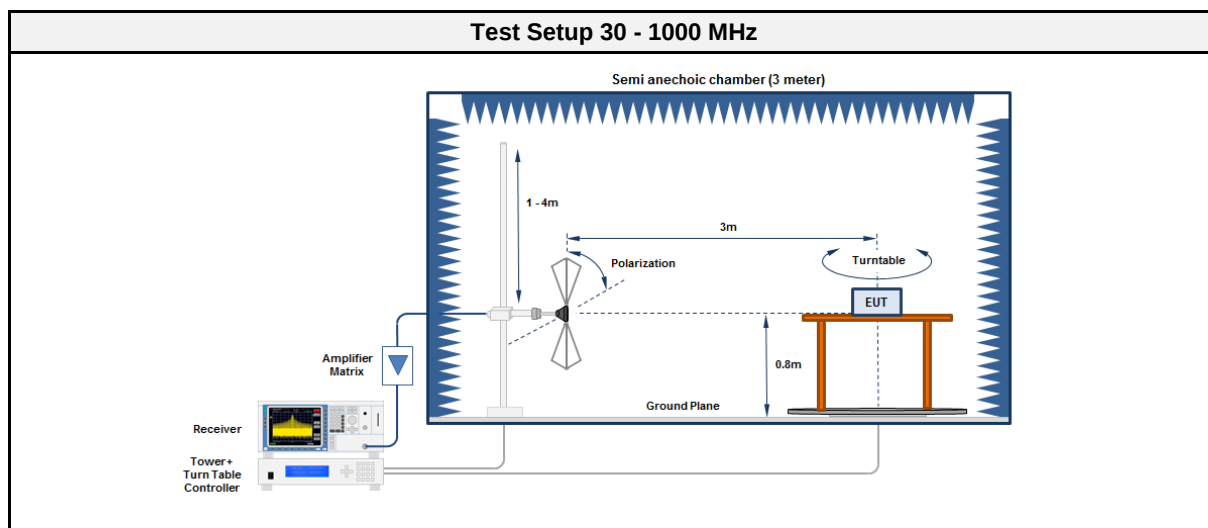

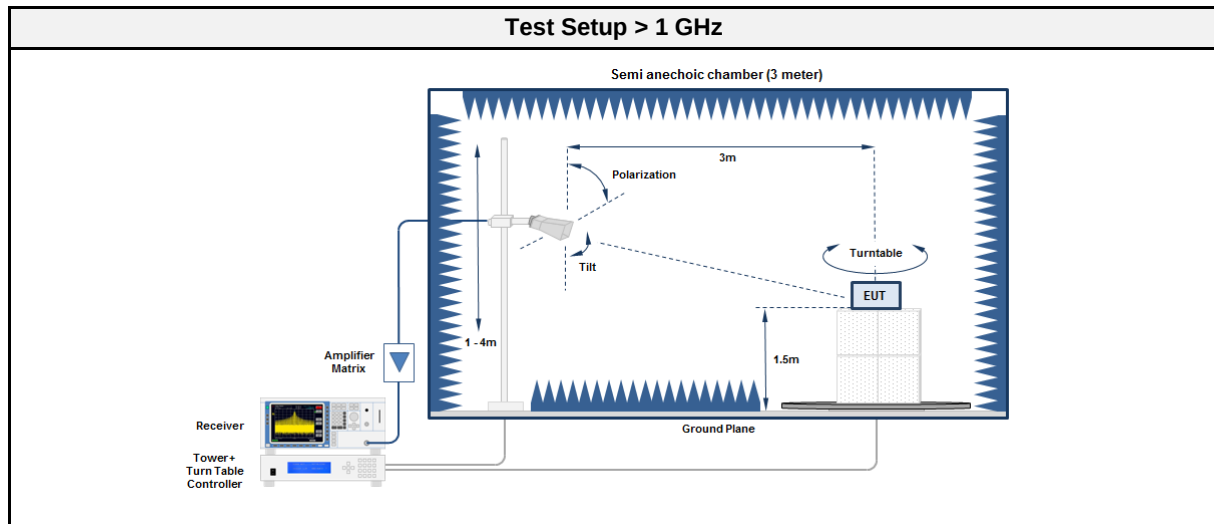

3.9.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMaton	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00212	2016-04	2019-04

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF01153	2018-09	2019-09

3.9.5 Procedure

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

3.9.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2440	129.167	35.69	pk	ver	43.50	-07.81
2440	129.439	37.34	pk	hor	43.50	-06.16
2440	172.212	35.35	pk	ver	43.50	-08.15
2440	214.103	22.44	pk	ver	43.50	-21.06
2440	288.462	24.86	pk	ver	46.00	-21.14
2440	305.128	30.13	pk	hor	46.00	-15.87
2440	319.231	25.60	pk	ver	46.00	-20.40
2440	357.692	29.92	pk	hor	46.00	-16.08
2440	1534	40.35	pk	hor	53.98	-13.63
2440	1534	37.52	pk	ver	53.98	-16.46
2440	3072	35.59	pk	hor	53.98	-18.39
2440	3072	34.06	pk	ver	53.98	-19.92
2440	4878	37.10	pk	ver	53.98	-16.88
Comment	Test mode selection is based on pre-compliance measurements, all measurements are performed with AC/DC-Adaptor II.					


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 53

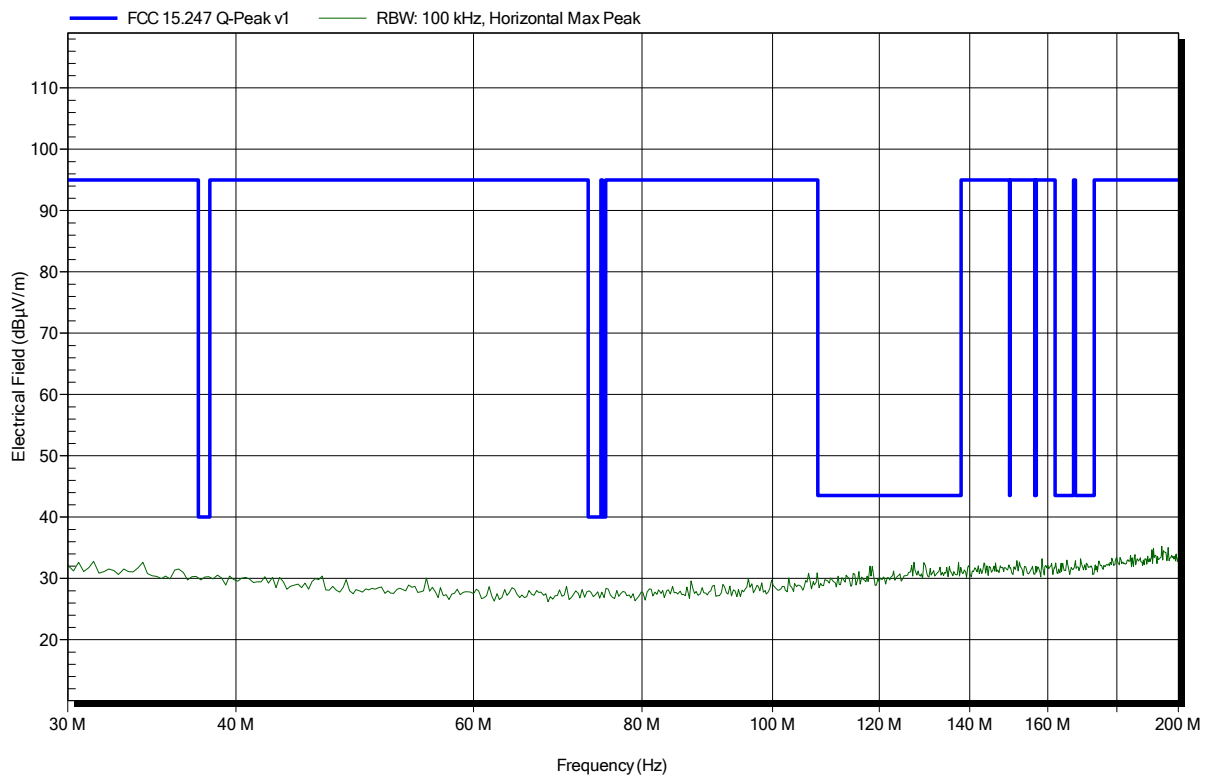


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 54

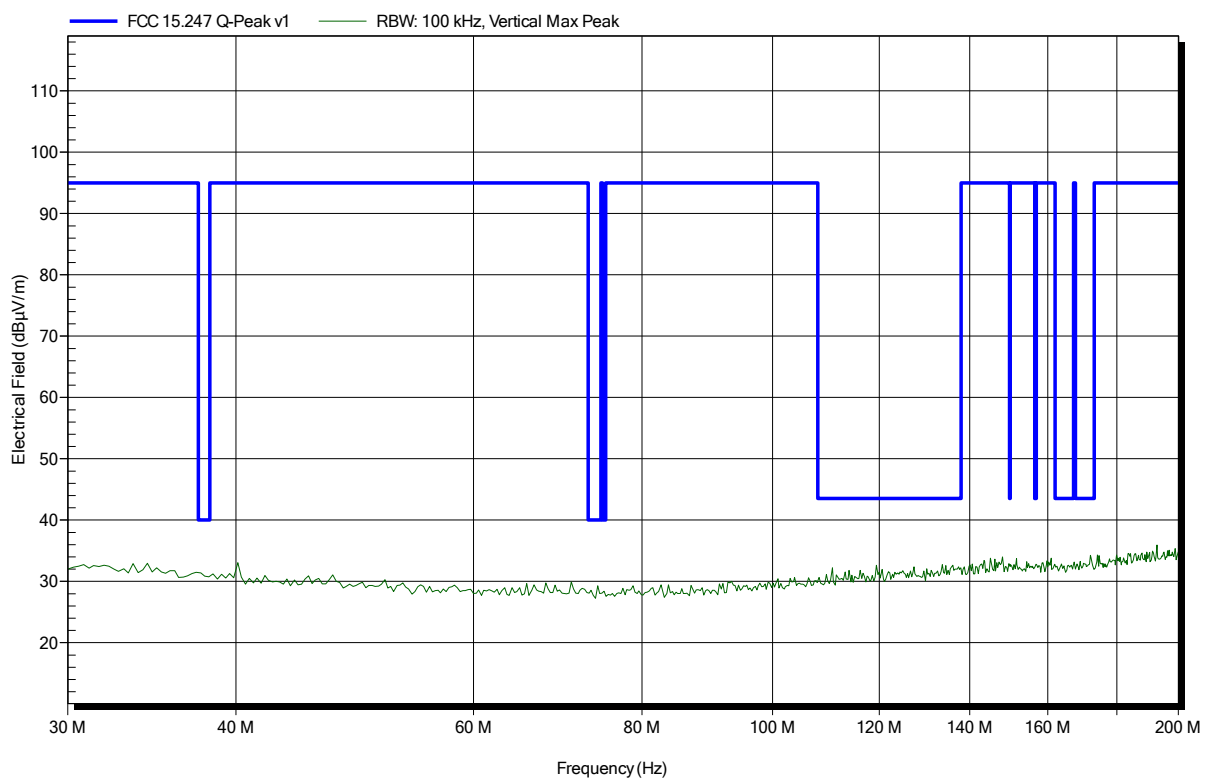


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 52

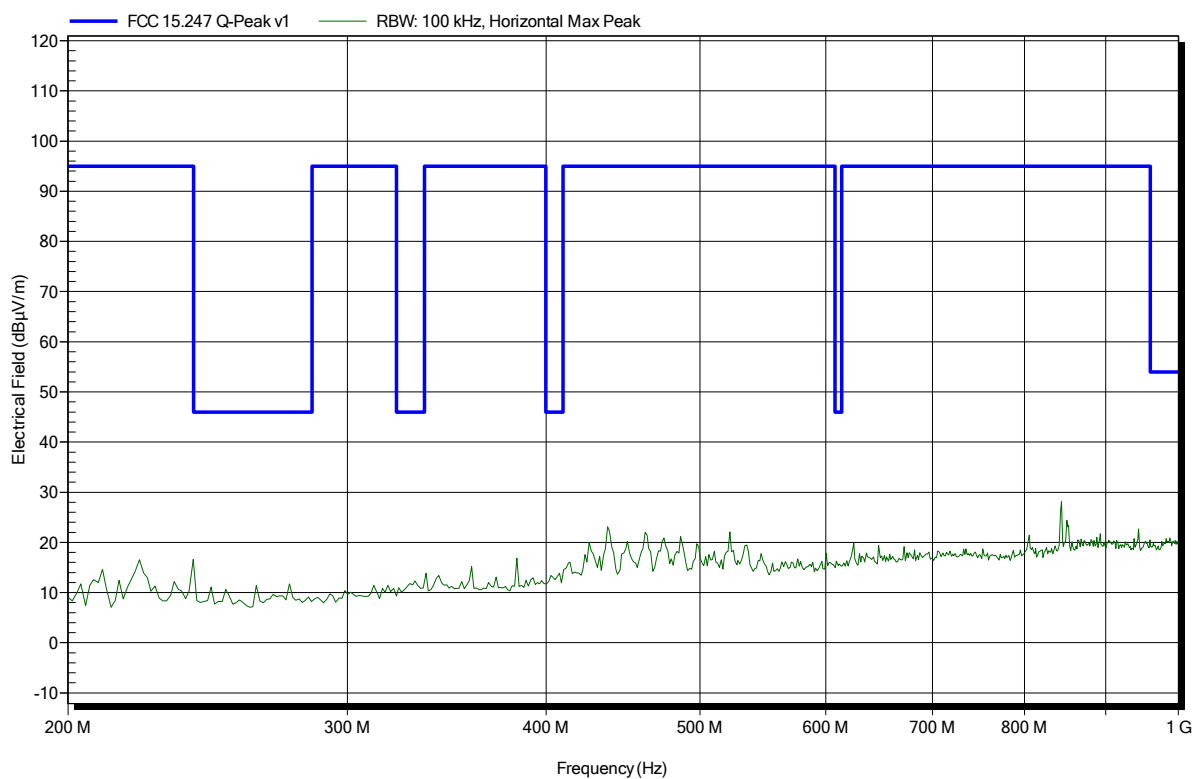


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 55

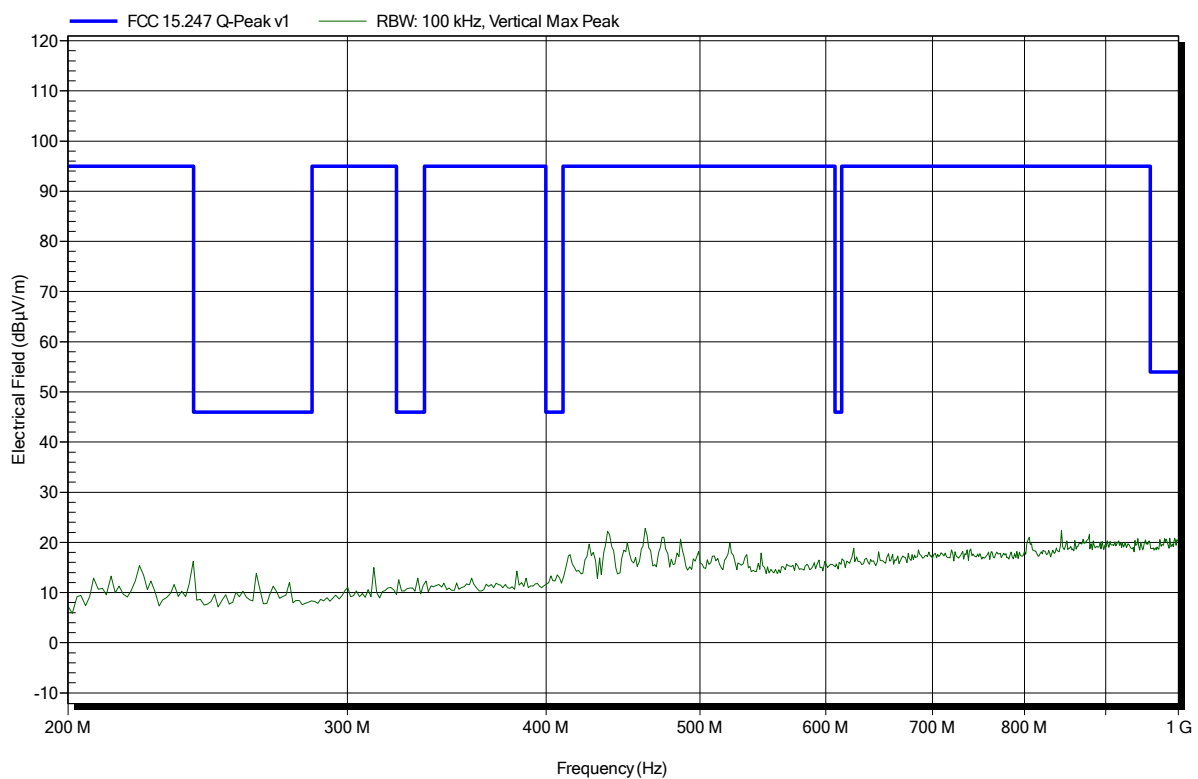

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG

EUT Name: freestyle

Model: 101035796

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; 2402 MHz

Test Date: 2019-04-18

Note:

Index 24

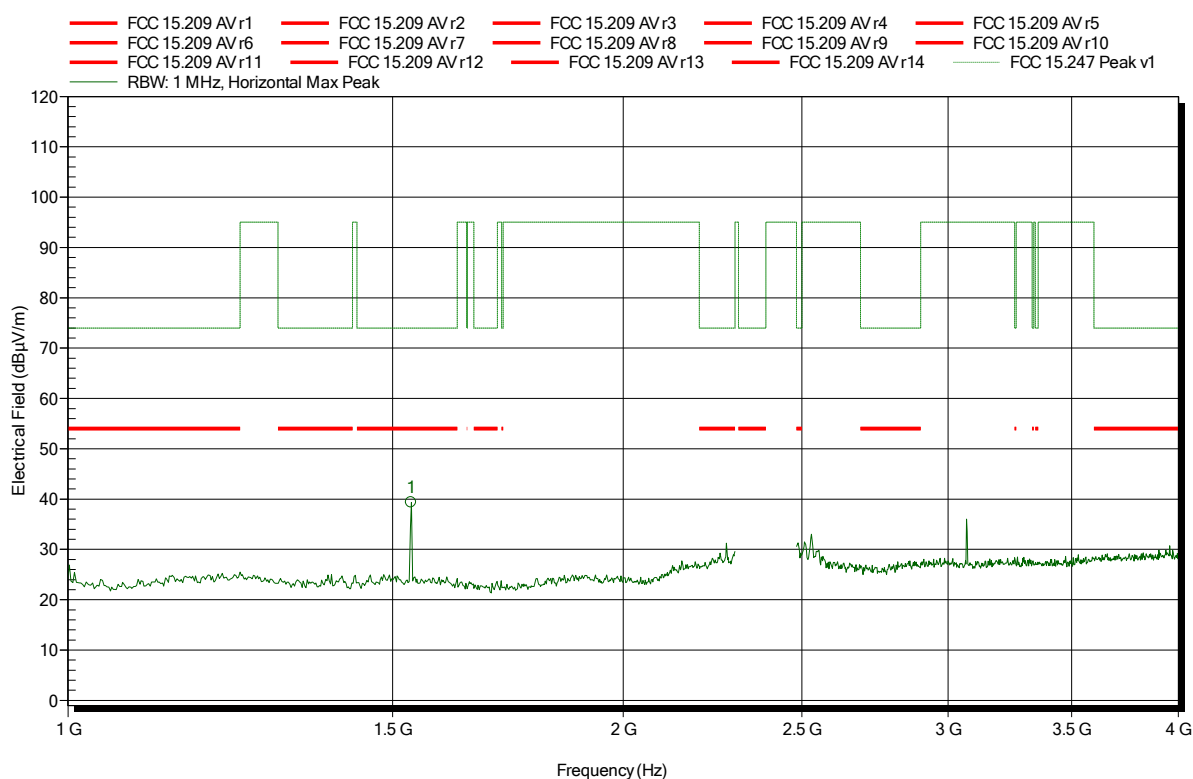

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.5354 GHz	39.33 dBµV/m	74 dBµV/m	-34.67 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG

EUT Name: freestyle

Model: 101035796

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; 2402 MHz

Test Date: 2019-04-18

Note:

Index 29

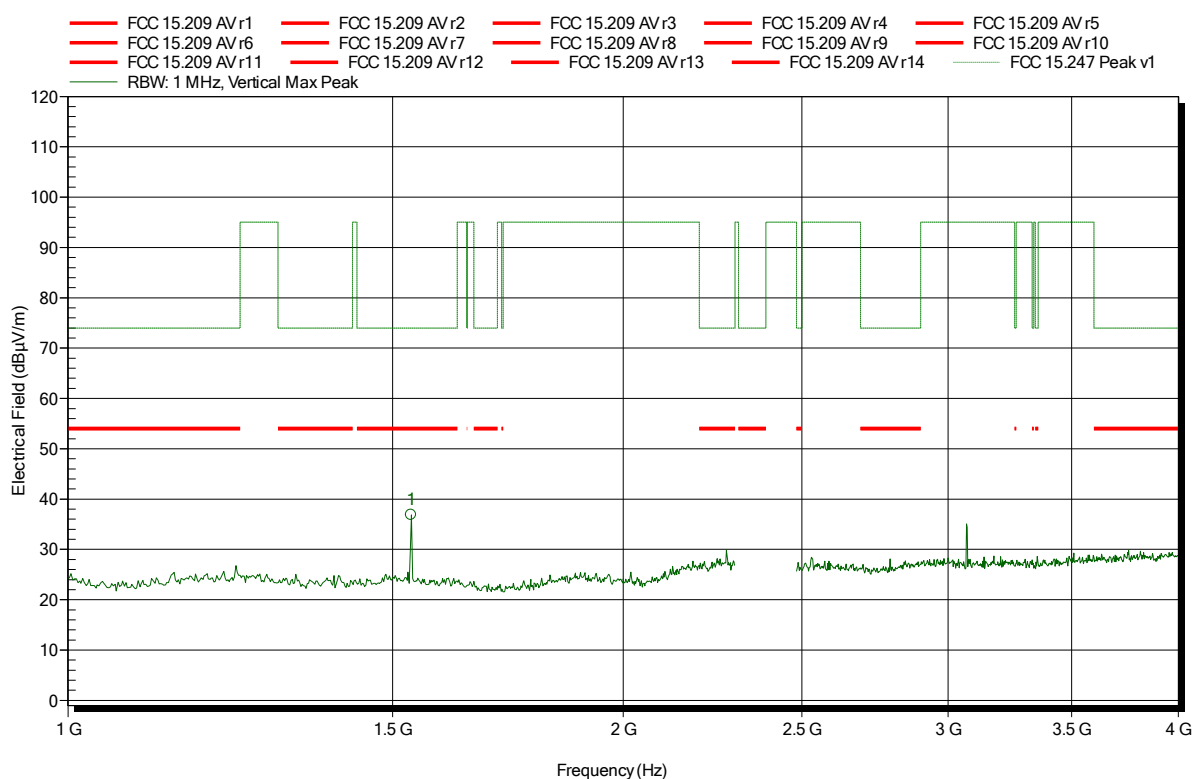


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.5354 GHz	36.89 dBµV/m	74 dBµV/m	-37.11 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note: lower bandedge

Index 25

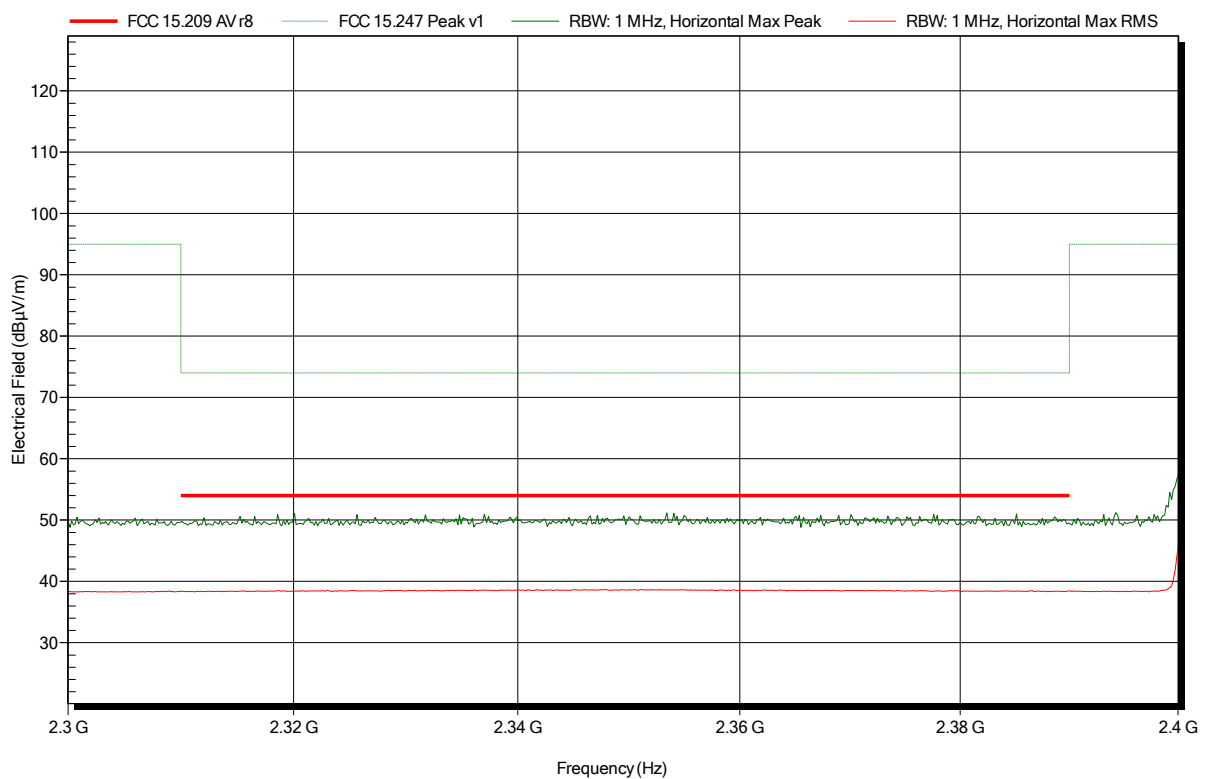


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note: lower bandedge

Index 30

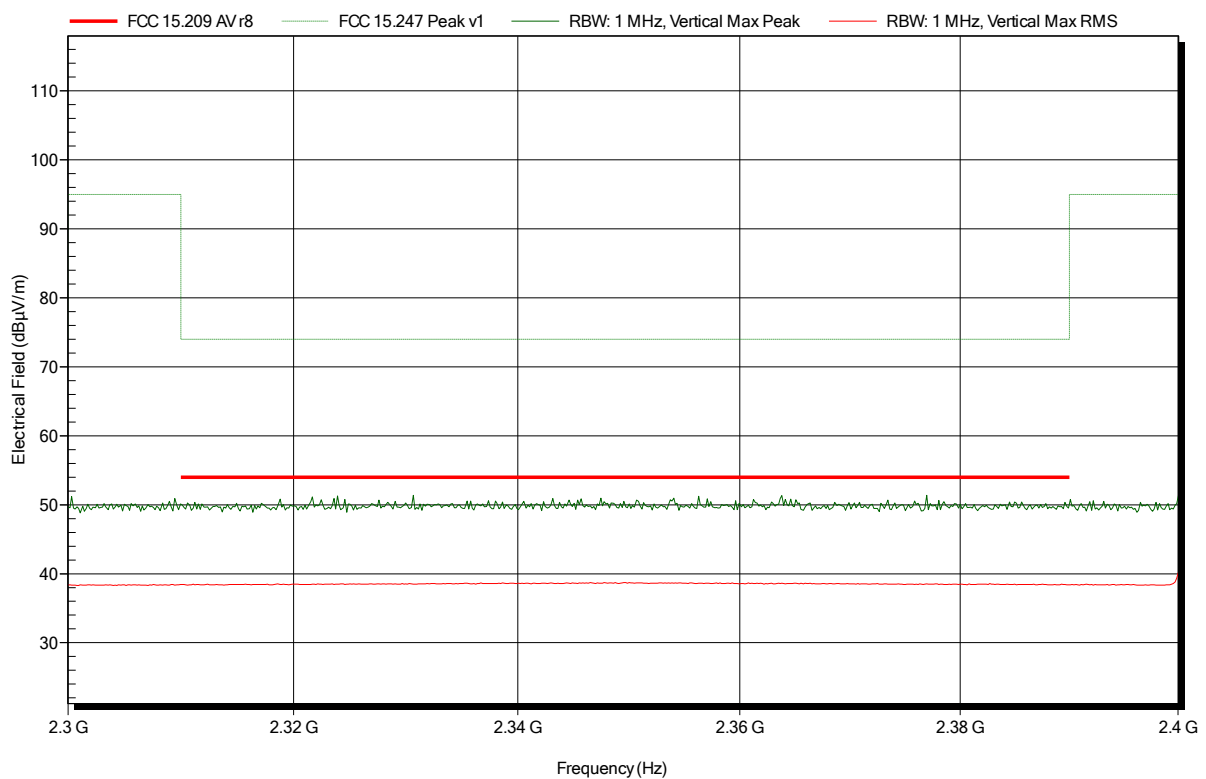


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2019-04-18
 Note:

Index 26

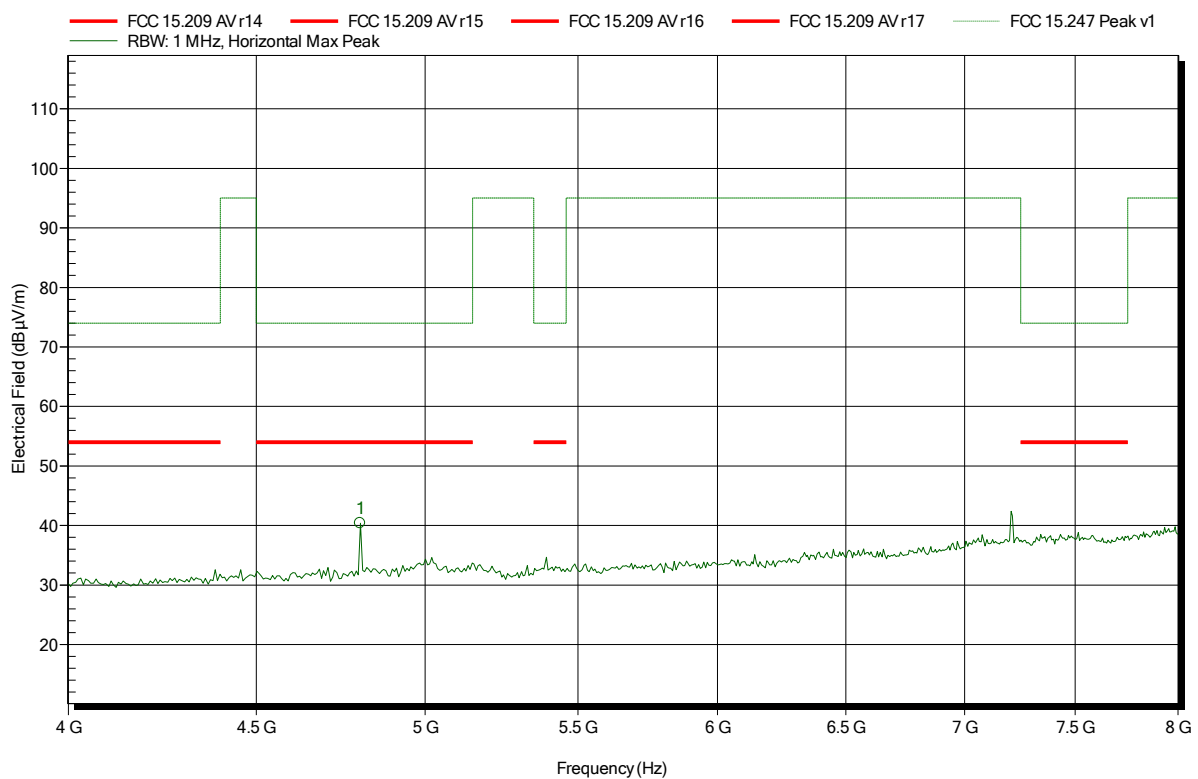


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.801 GHz	40.37 dBµV/m	74 dBµV/m	-33.63 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2019-04-18
 Note:

Index 31

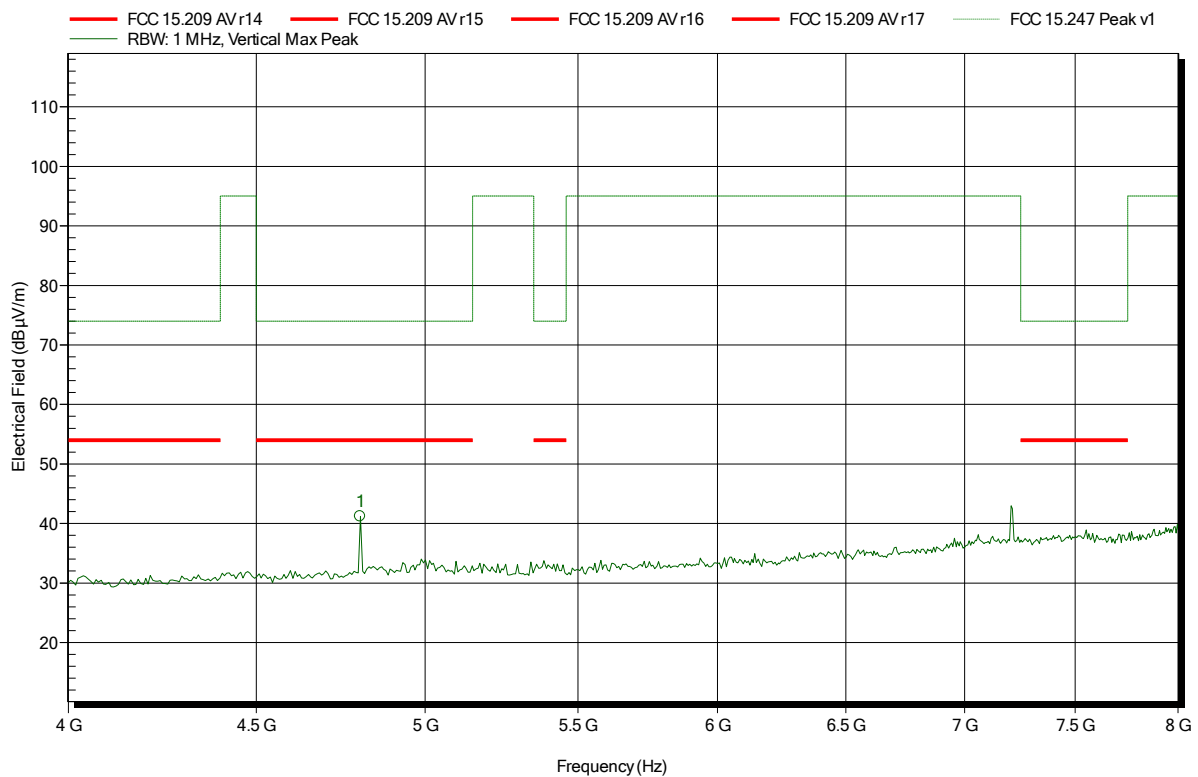


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.801 GHz	41.18 dBµV/m	74 dBµV/m	-32.82 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 27

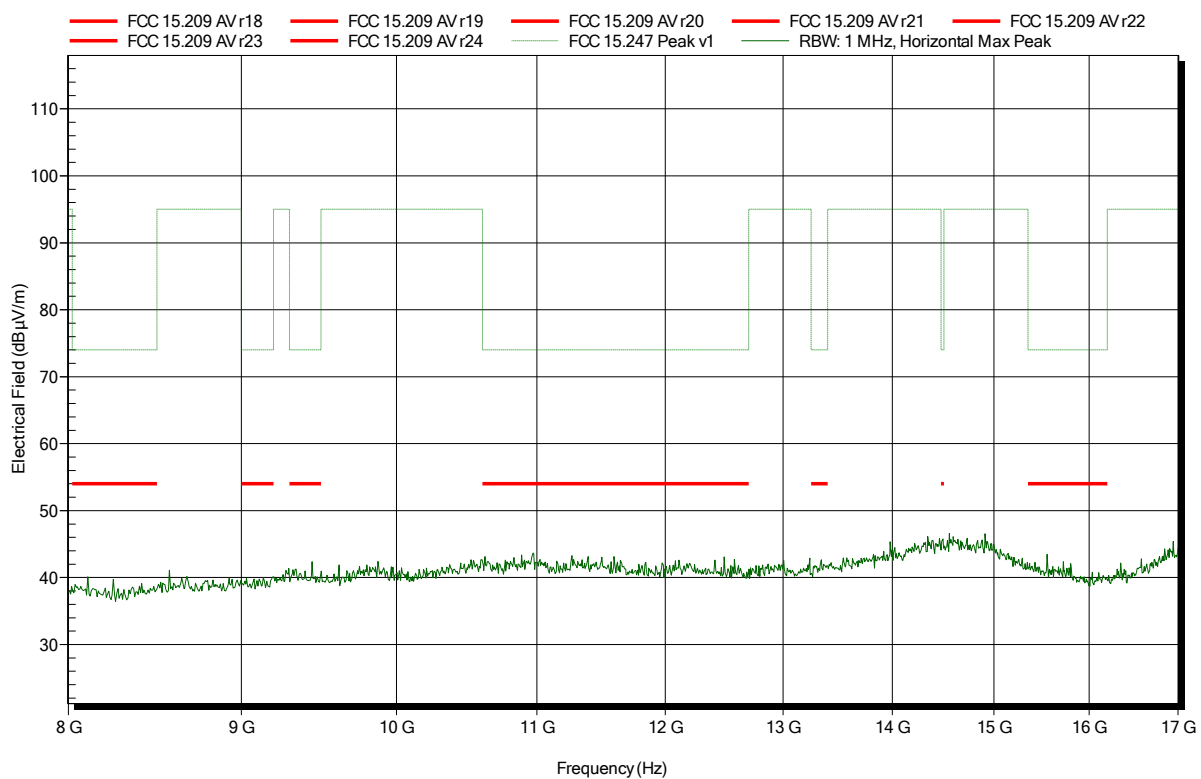


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 32

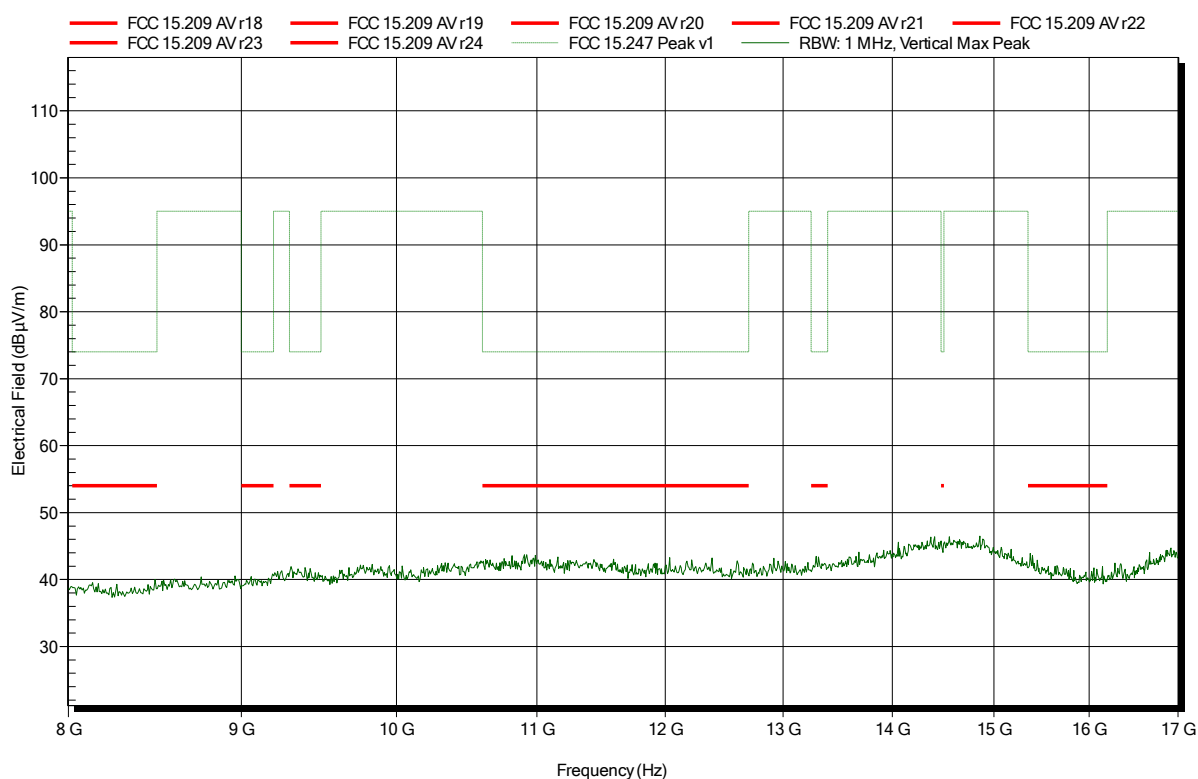


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2019-04-18
 Note:

Index 28

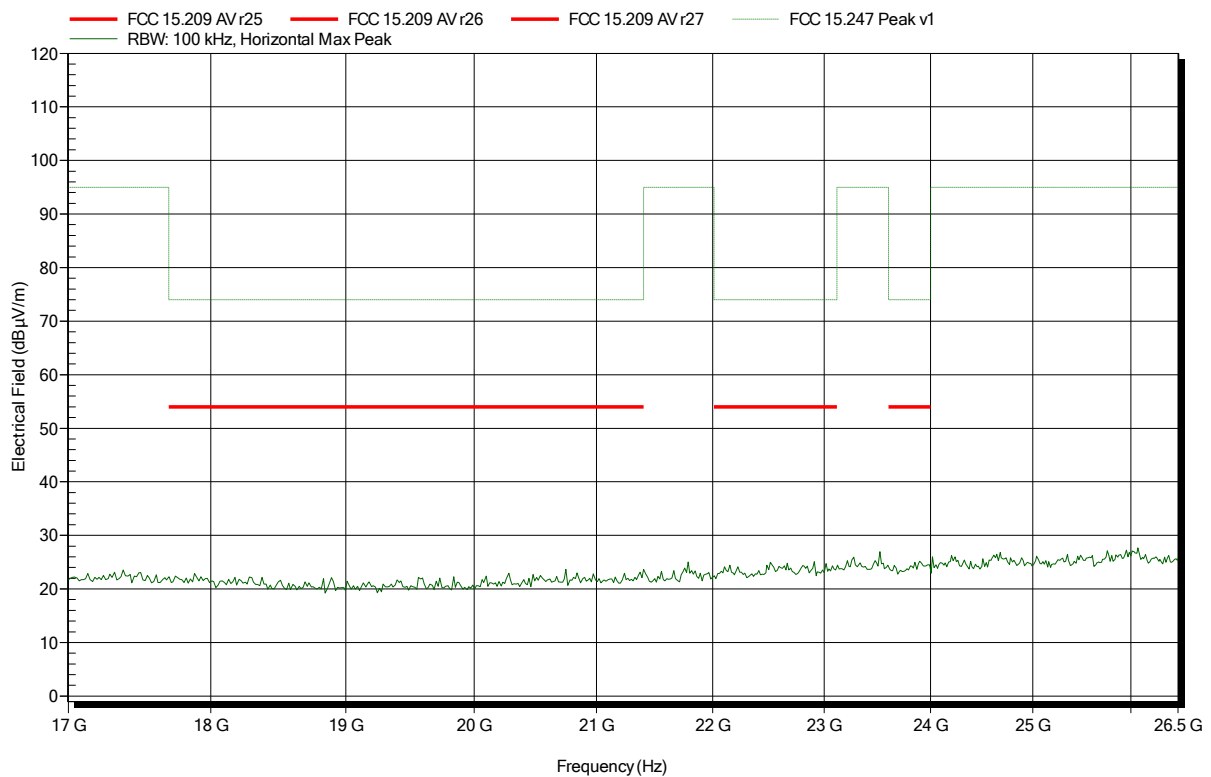


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Amplifier Research AT4560, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2019-04-18
Note:

Index 33

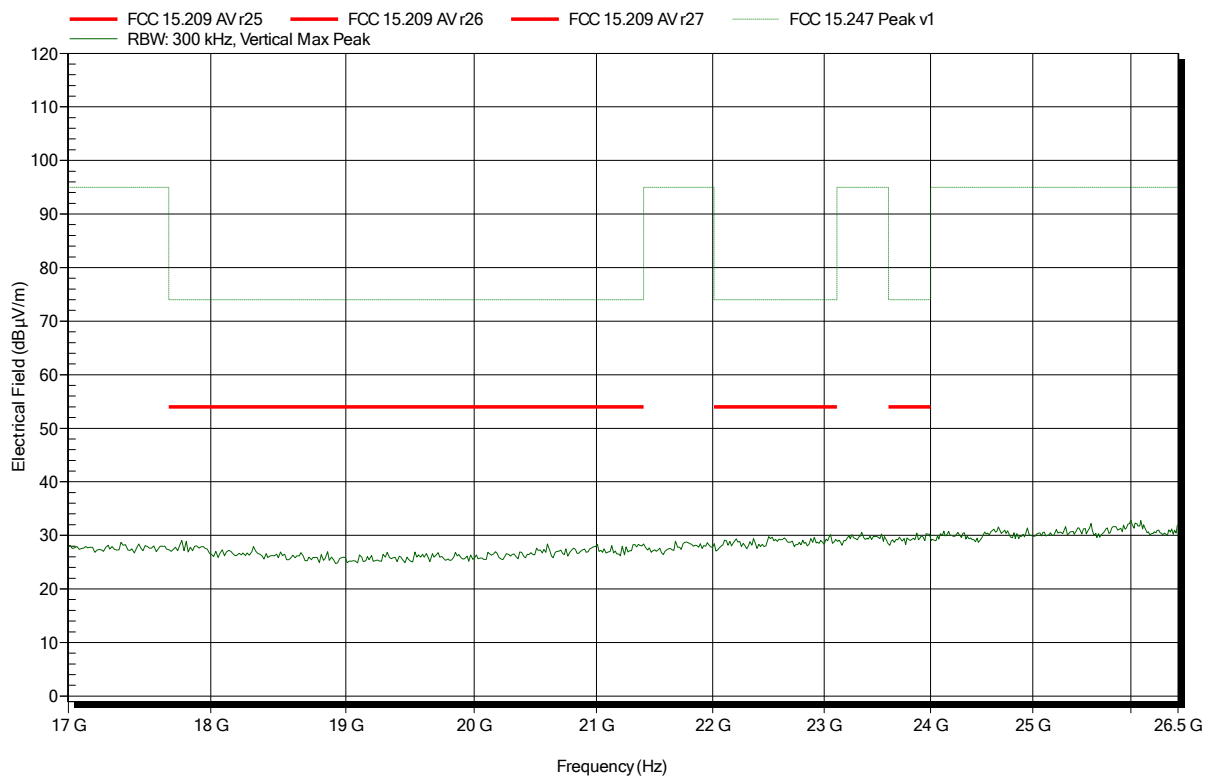

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG

EUT Name: freestyle

Model: 101035796

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; 2440 MHz

Test Date: 2019-04-18

Note:

Index 34

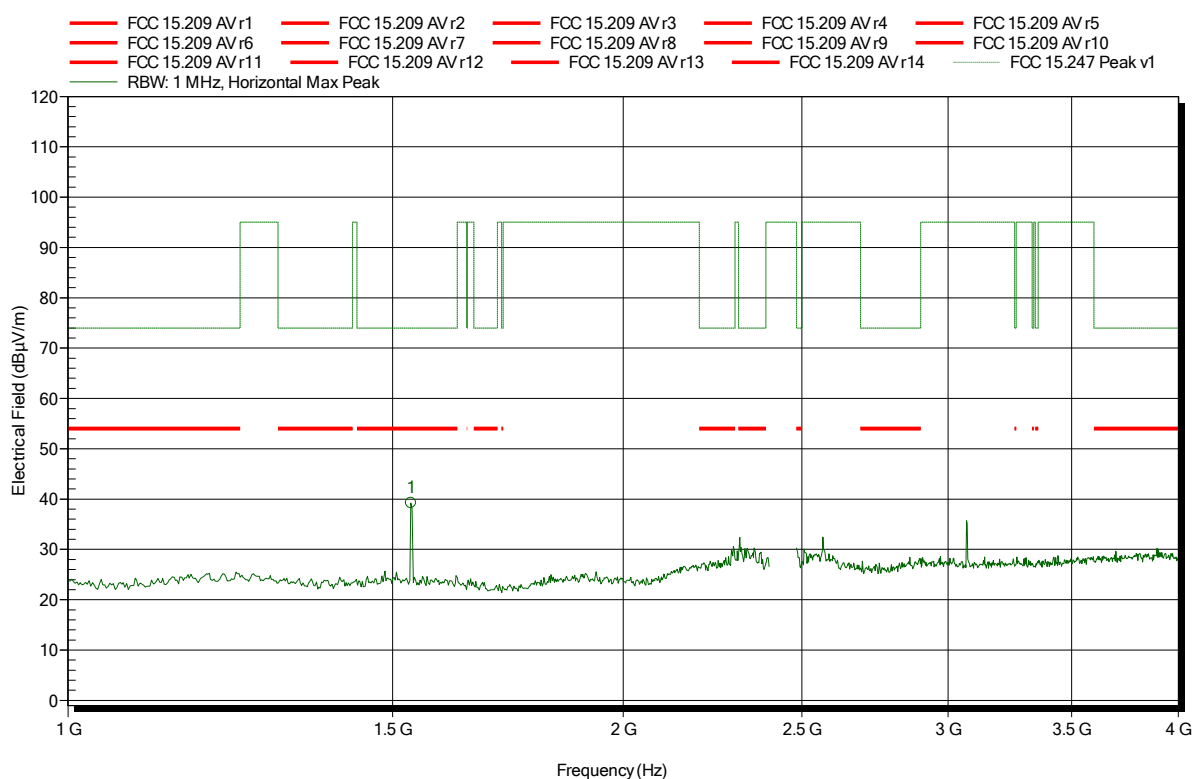

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.5351 GHz	39.23 dBµV/m	74 dBµV/m	-34.77 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG

EUT Name: freestyle

Model: 101035796

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; 2440 MHz

Test Date: 2019-04-18

Note:

Index 38

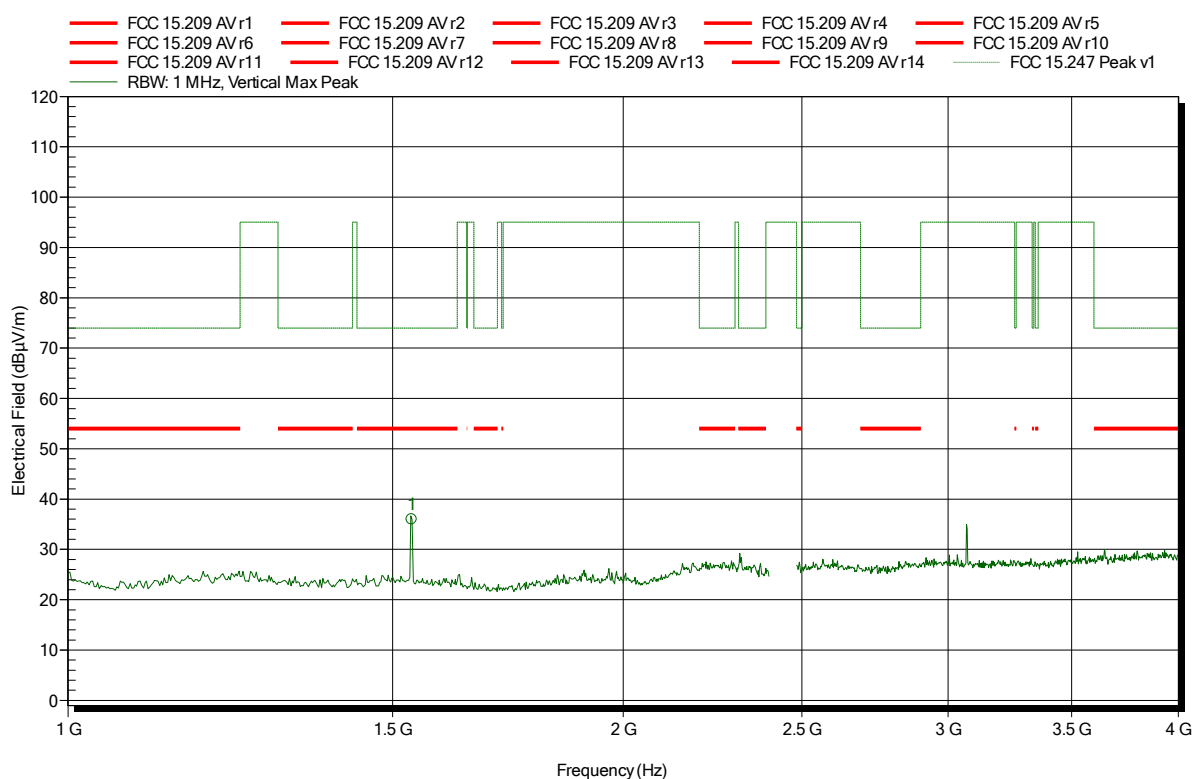


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.5362 GHz	35.95 dBµV/m	74 dBµV/m	-38.05 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2440 MHz
 Test Date: 2019-04-18
 Note:

Index 35

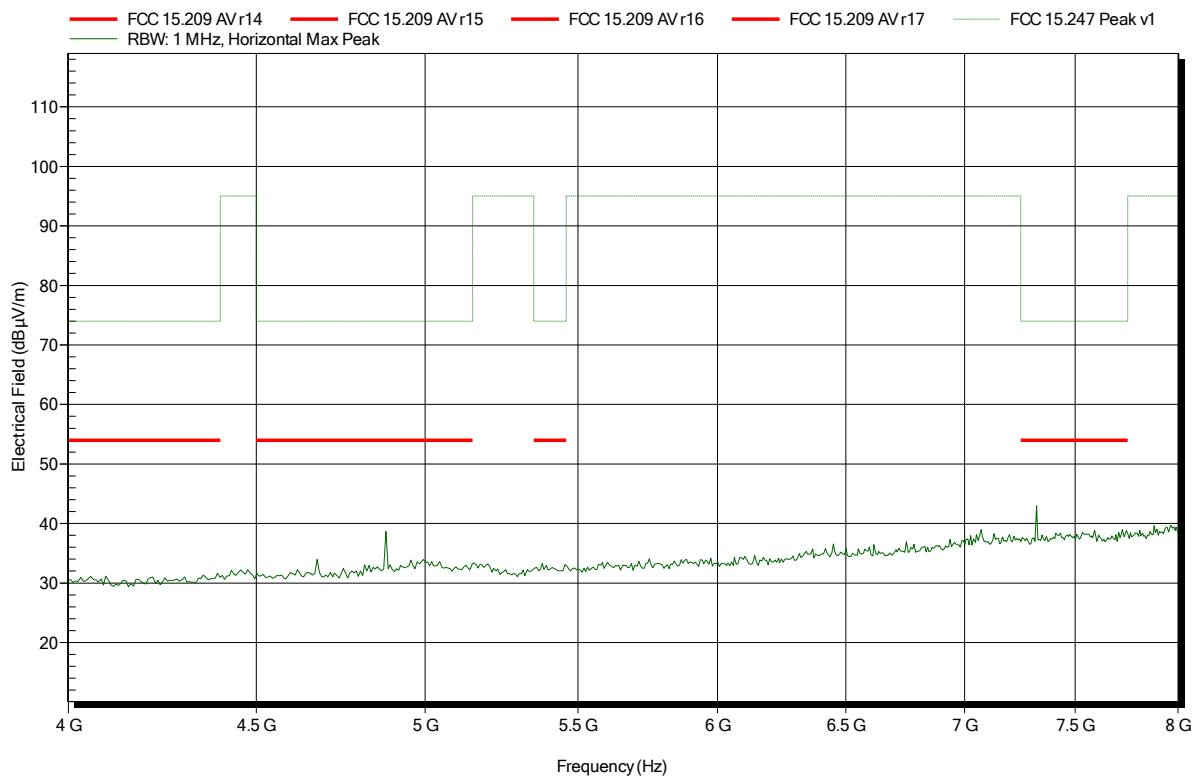


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2440 MHz
 Test Date: 2019-04-18
 Note:

Index 39

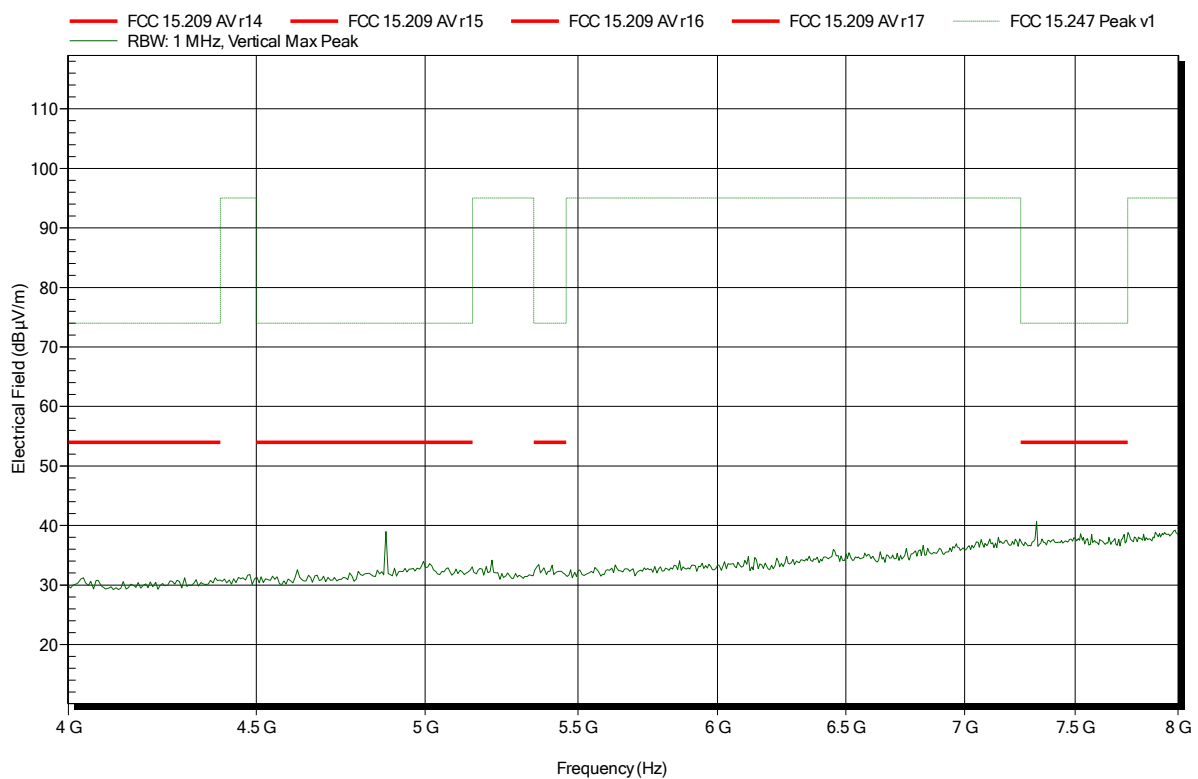


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2440 MHz
Test Date: 2019-04-18
Note:

Index 36

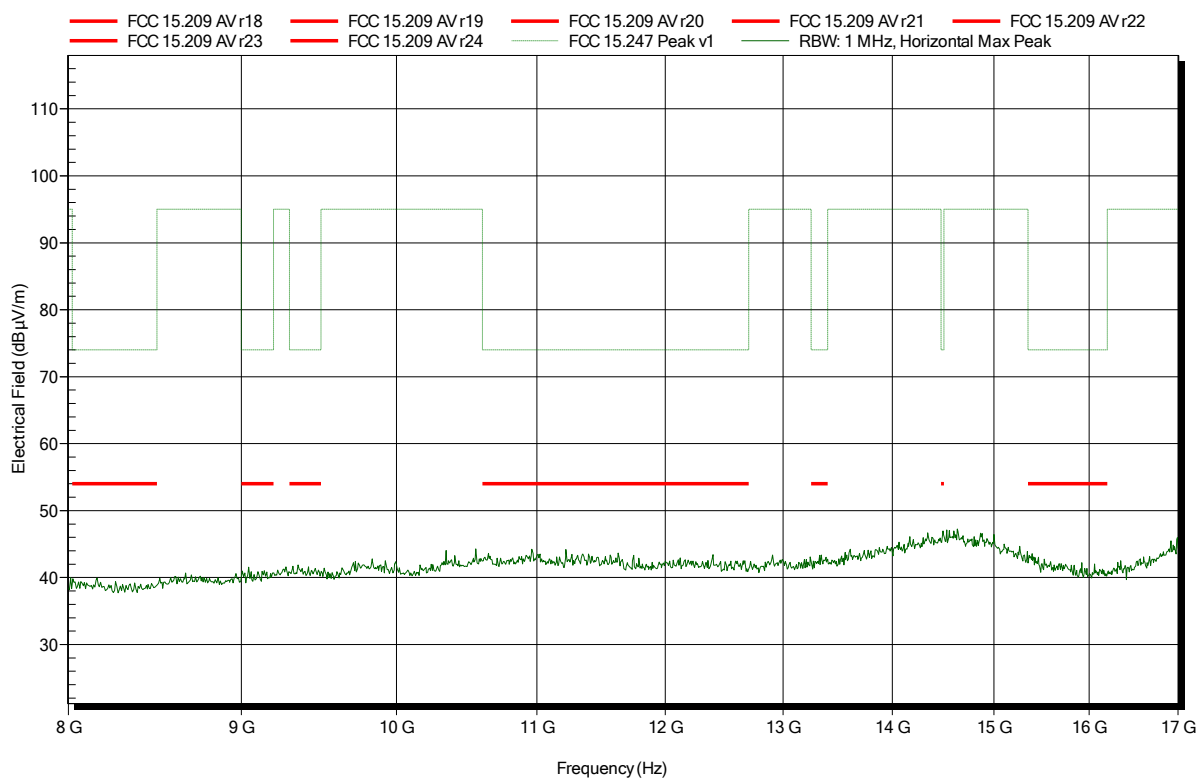


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2440 MHz
 Test Date: 2019-04-18
 Note:

Index 40

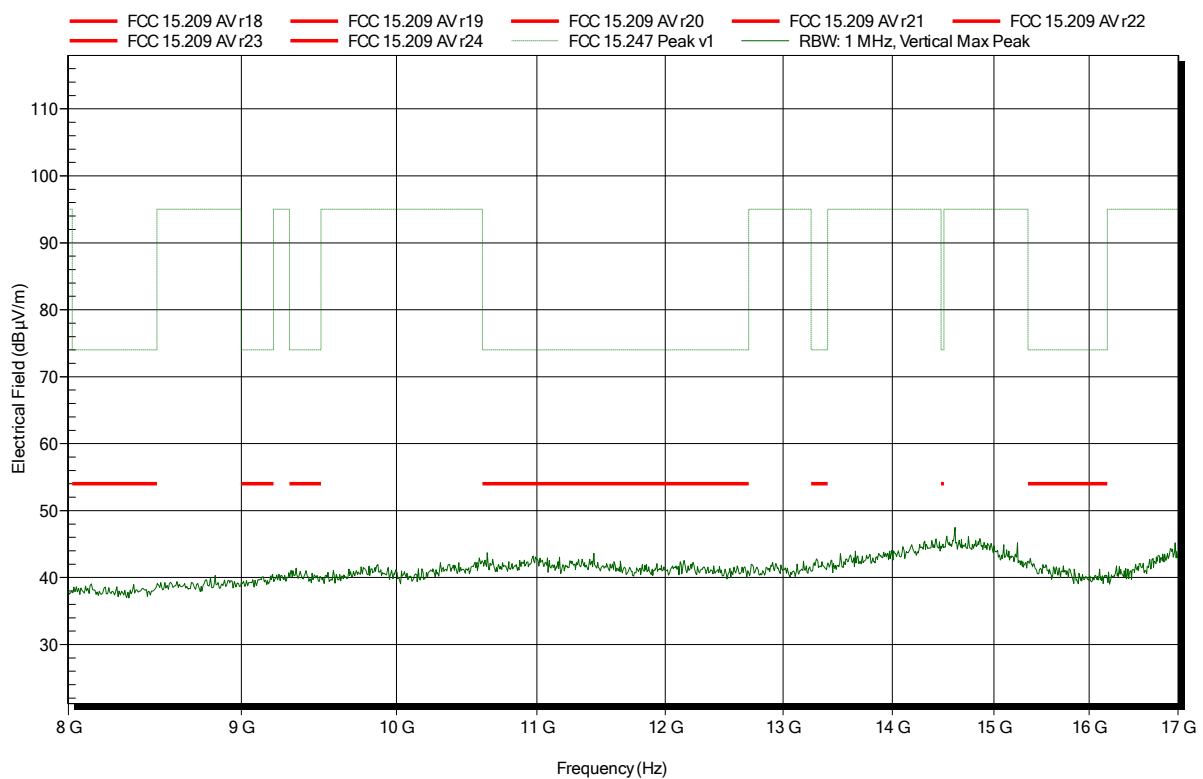


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2440 MHz
 Test Date: 2019-04-18
 Note:

Index 37

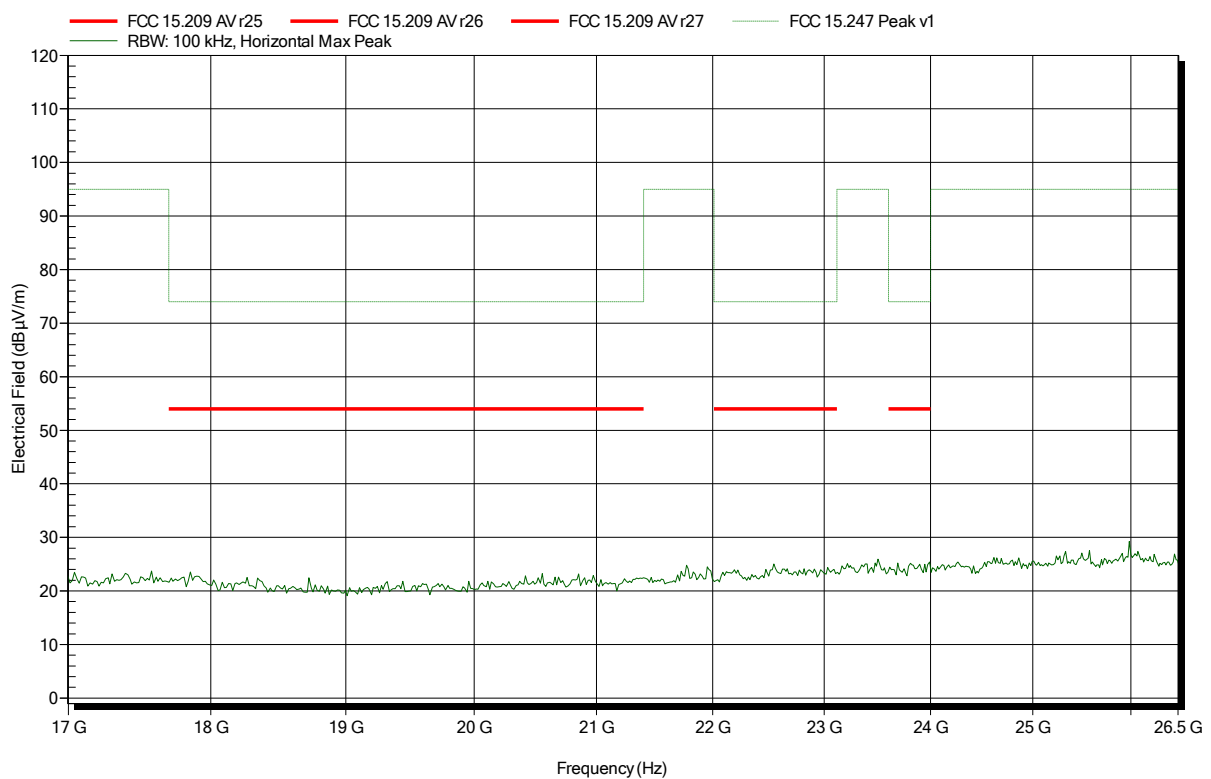


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Amplifier Research AT4560, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2440 MHz
Test Date: 2019-04-18
Note:

Index 41

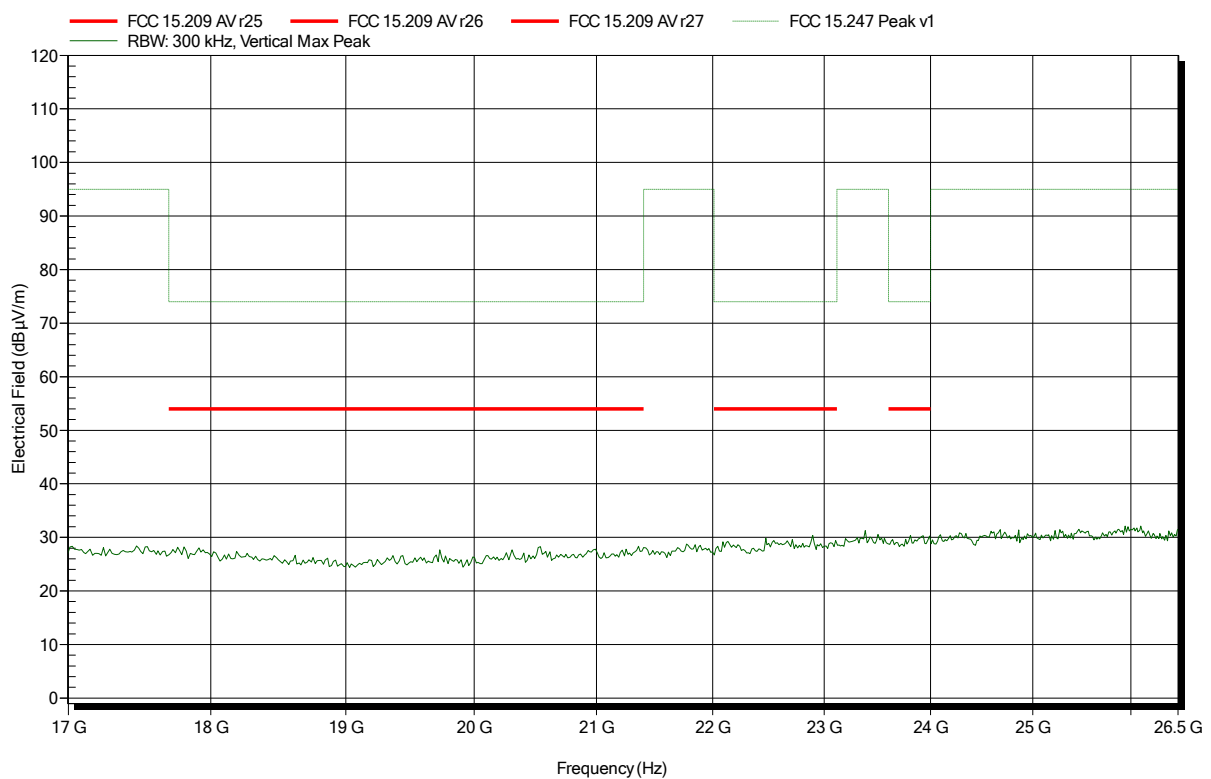

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG

EUT Name: freestyle

Model: 101035796

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; 2480 MHz

Test Date: 2019-04-18

Note:

Index 42

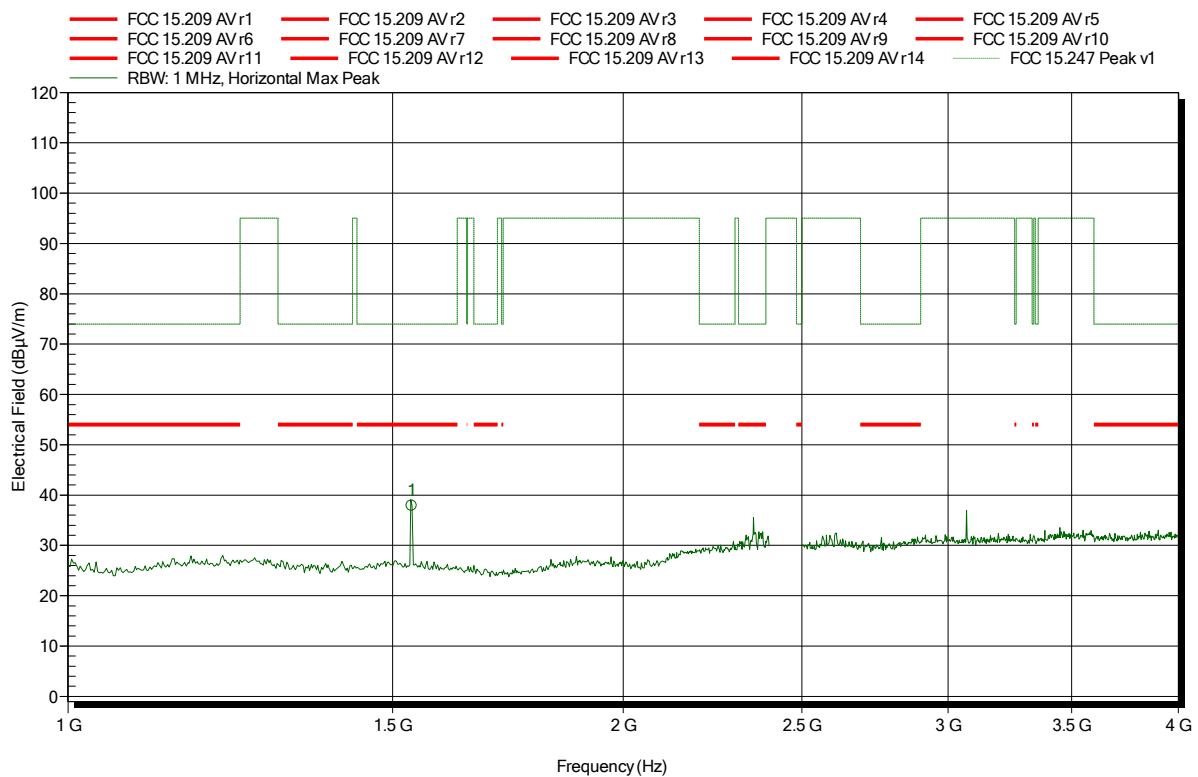

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.536 GHz	37.88 dBµV/m	74 dBµV/m	-36.12 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG

EUT Name: freestyle

Model: 101035796

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; BLE; 2480 MHz

Test Date: 2019-04-18

Note:

Index 47

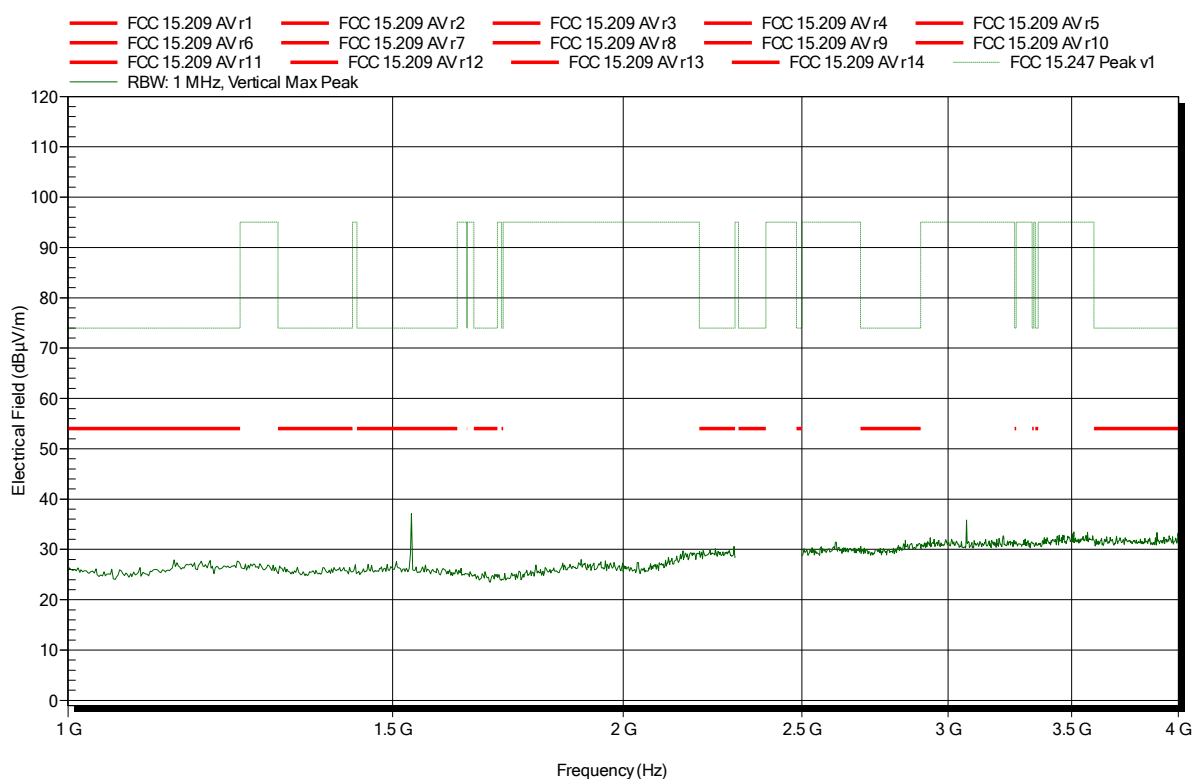


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2019-04-18
Note: upper bandedge

Index 43

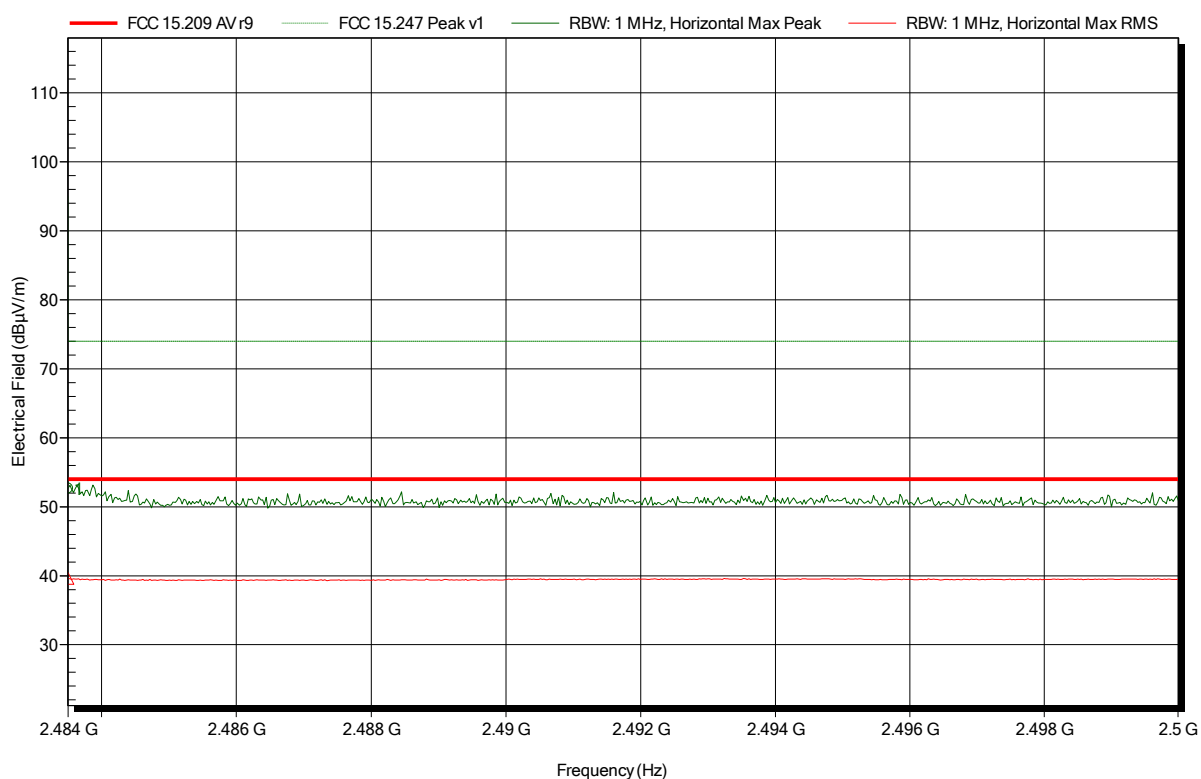

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	52.64 dBµV/m	74 dBµV/m	-21.36 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	39.62 dBµV/m	54 dBµV/m	-14.38 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2019-04-18
Note: upper bandedge

Index 48




Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4837 GHz	50.95 dBµV/m	74 dBµV/m	-23.05 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4837 GHz	39.28 dBµV/m	54 dBµV/m	-14.72 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2019-04-18
Note:

Index 44

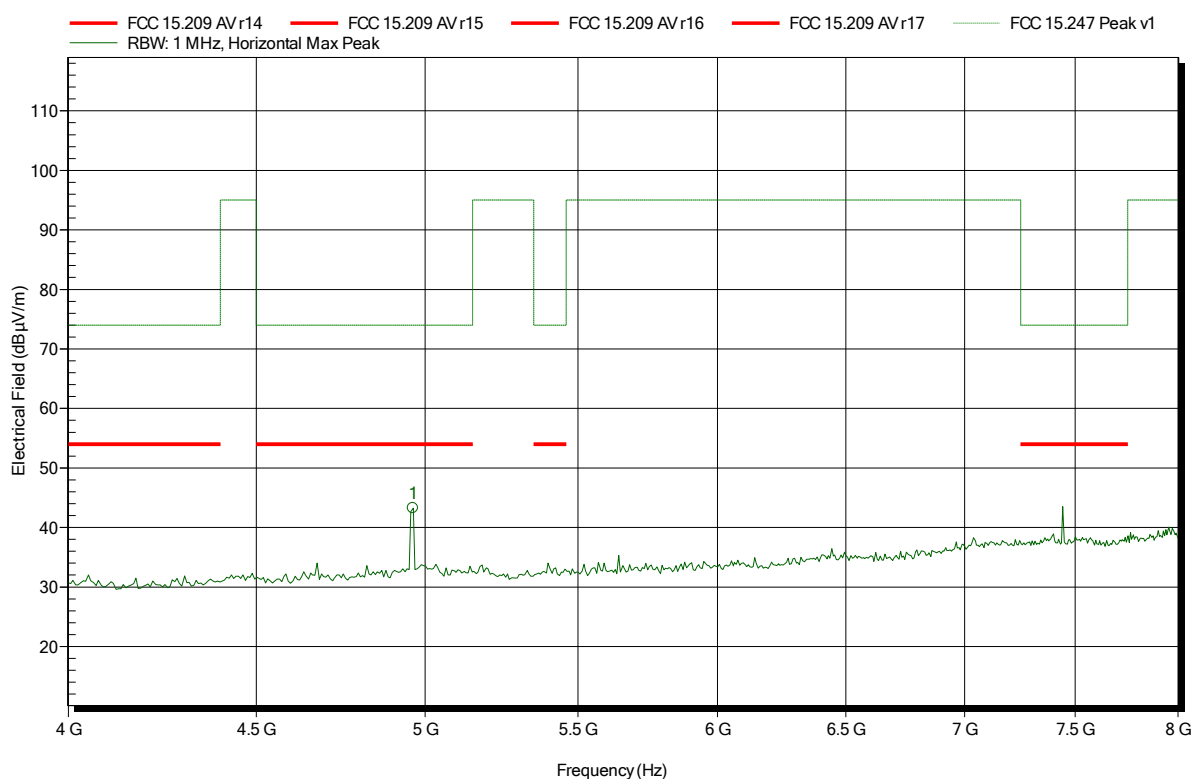


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.962 GHz	43.25 dBµV/m	74 dBµV/m	-30.75 dB	Pass

Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2019-04-18
Note:

Index 49

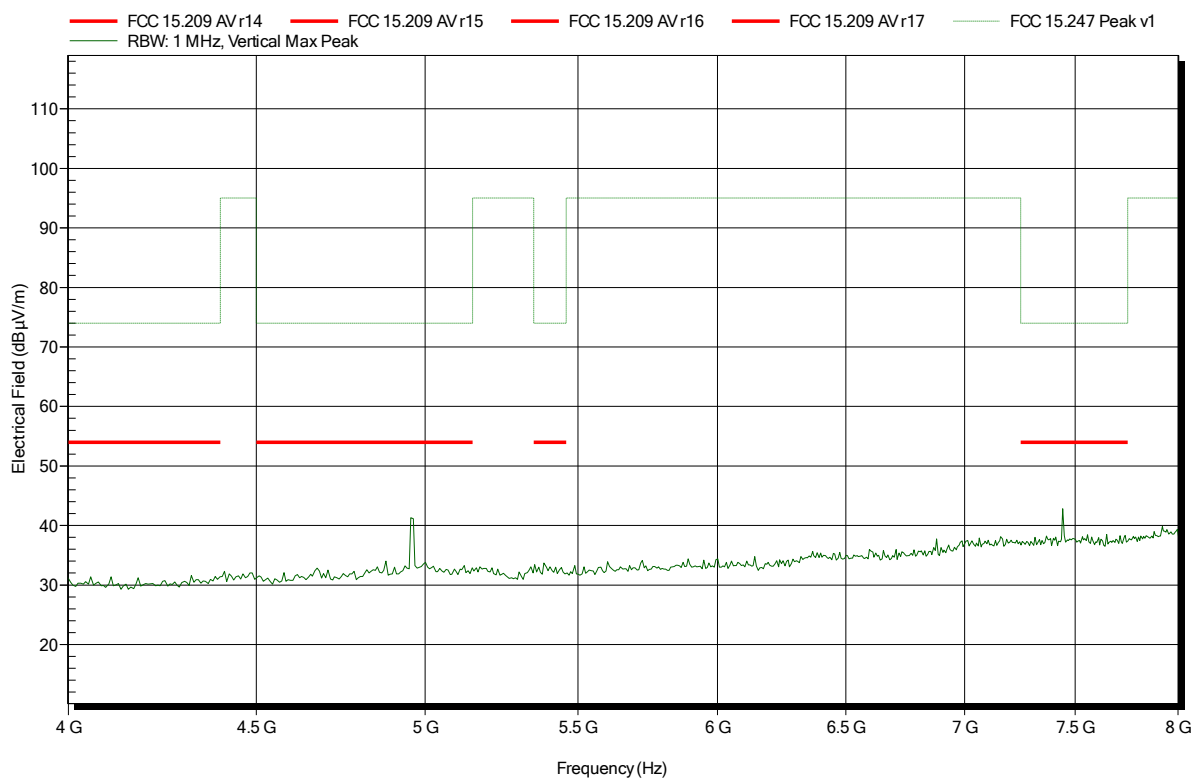


Spurious emissions according to FCC 47 e-CFR §15.247

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2480 MHz
 Test Date: 2019-04-18
 Note:

Index 45

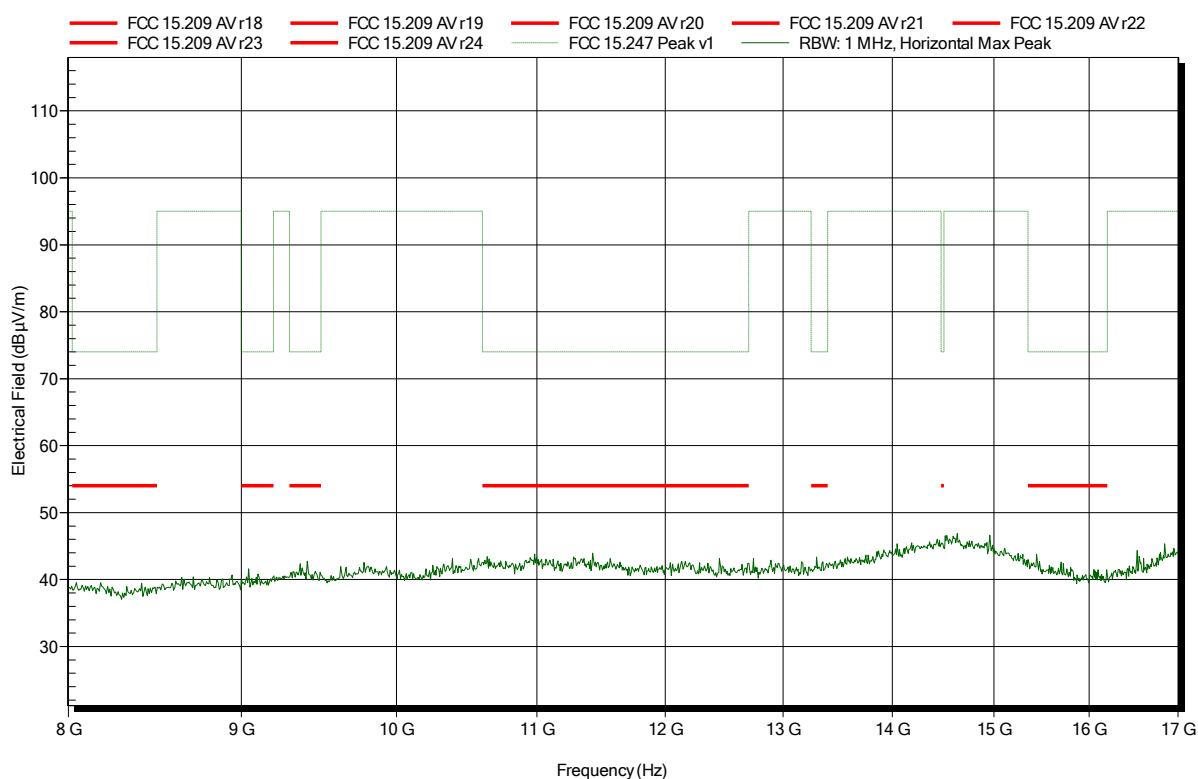


ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-18
 Note:

Index 58

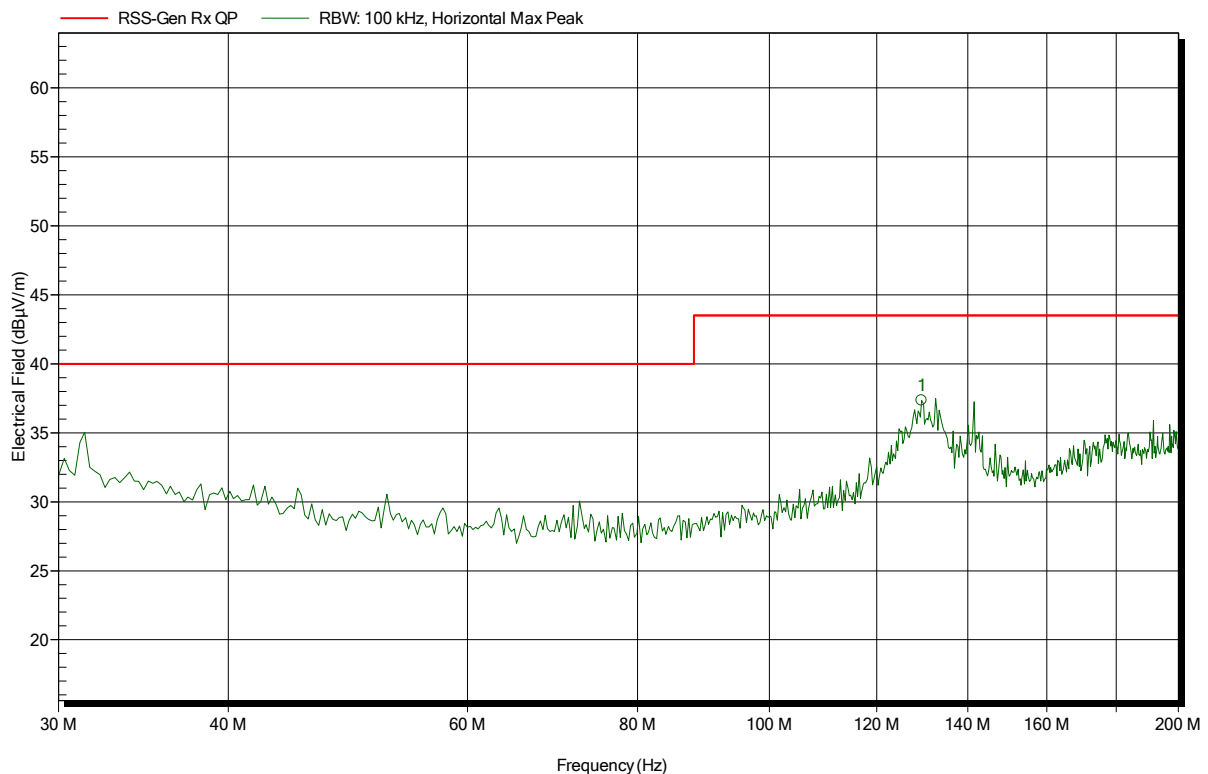


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
129.439 MHz	37.34 dBµV/m	43.5 dBµV/m	-6.16 dB	Pass	47 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-18
 Note:

Index 59

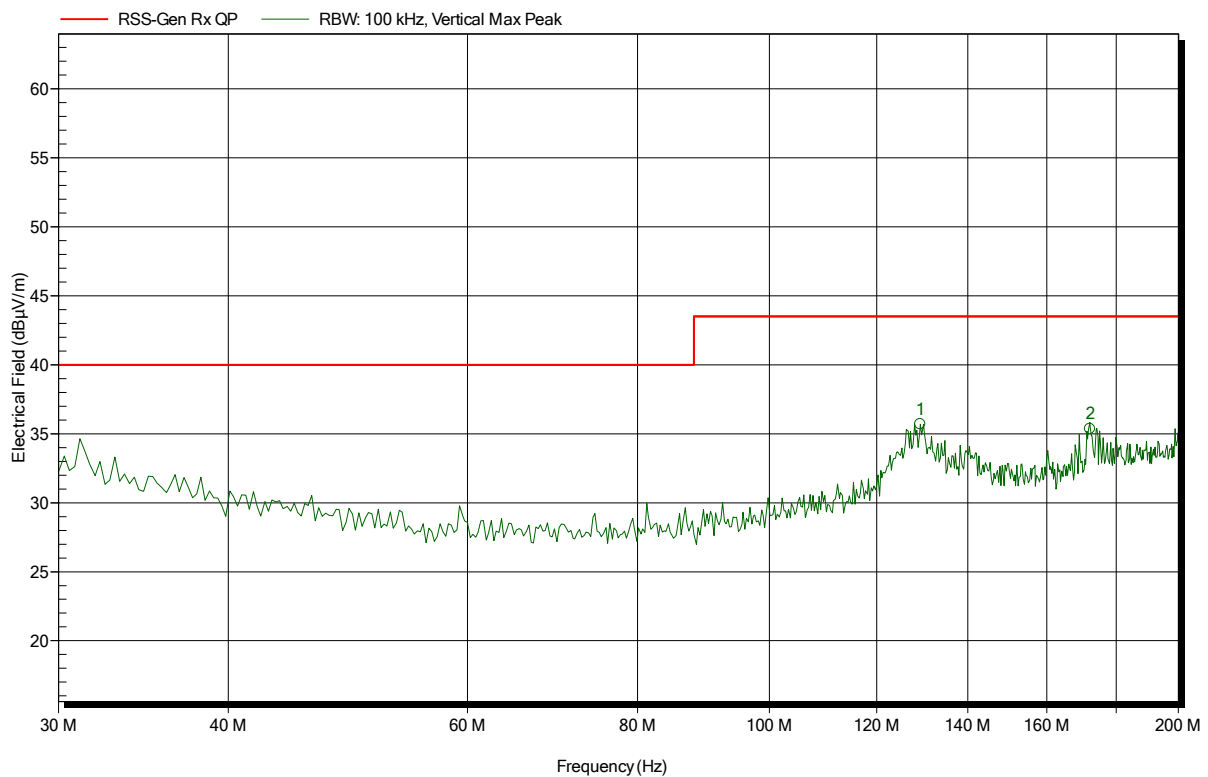


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
129.167 MHz	35.69 dBµV/m	43.5 dBµV/m	-7.81 dB	Pass	47 Degree	1.2 m
172.212 MHz	35.35 dBµV/m	43.5 dBµV/m	-8.15 dB	Pass	180 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-18
 Note:

Index 56

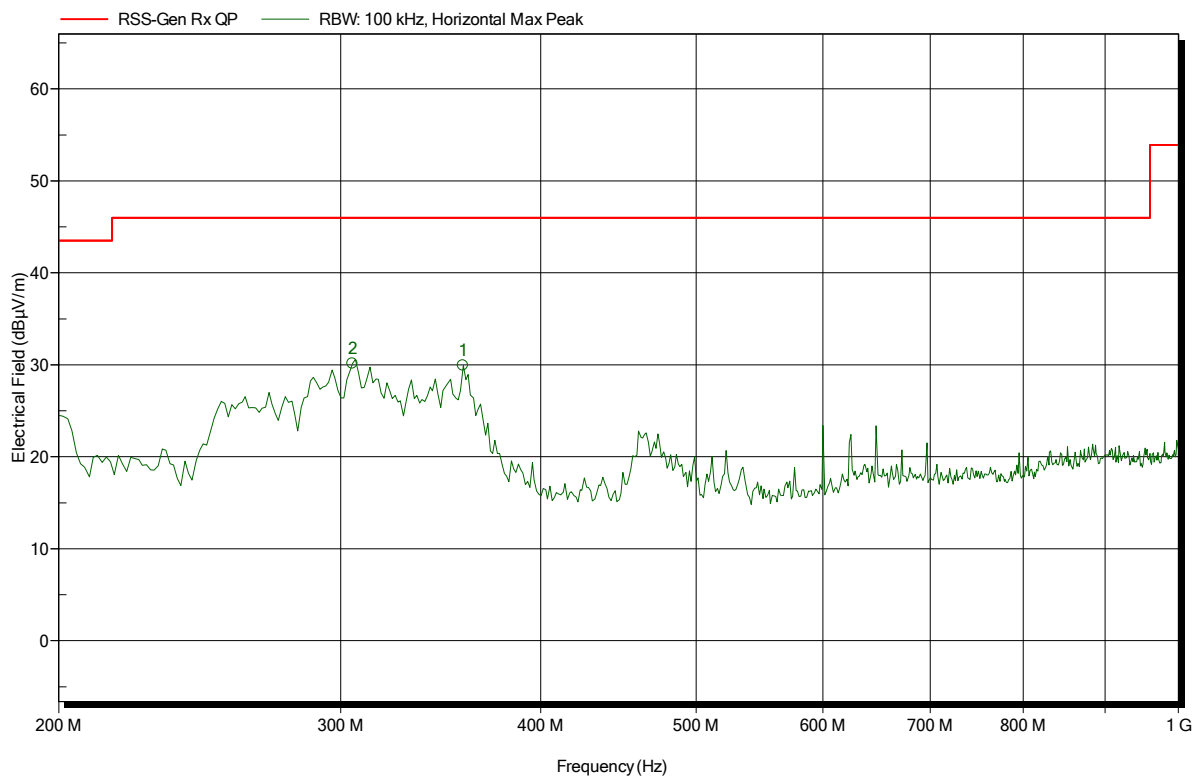


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
305.128 MHz	30.13 dBµV/m	46 dBµV/m	-15.87 dB	Pass	202 Degree	1.2 m
357.692 MHz	29.92 dBµV/m	46 dBµV/m	-16.08 dB	Pass	180 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-18
 Note:

Index 57

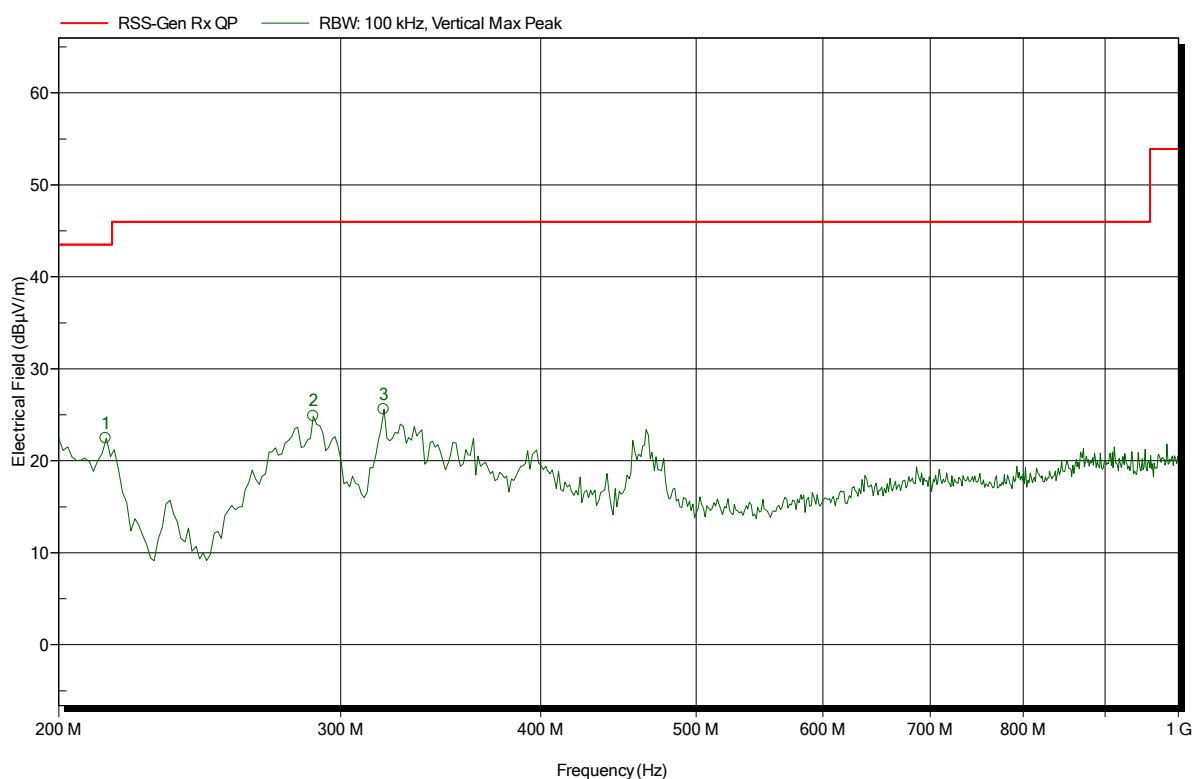


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
214.103 MHz	22.44 dBμV/m	43.5 dBμV/m	-21.06 dB	Pass	157 Degree	1.2 m
288.462 MHz	24.86 dBμV/m	46 dBμV/m	-21.14 dB	Pass	67 Degree	1.2 m
319.231 MHz	25.6 dBμV/m	46 dBμV/m	-20.4 dB	Pass	90 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-23
 Note:

Index 60

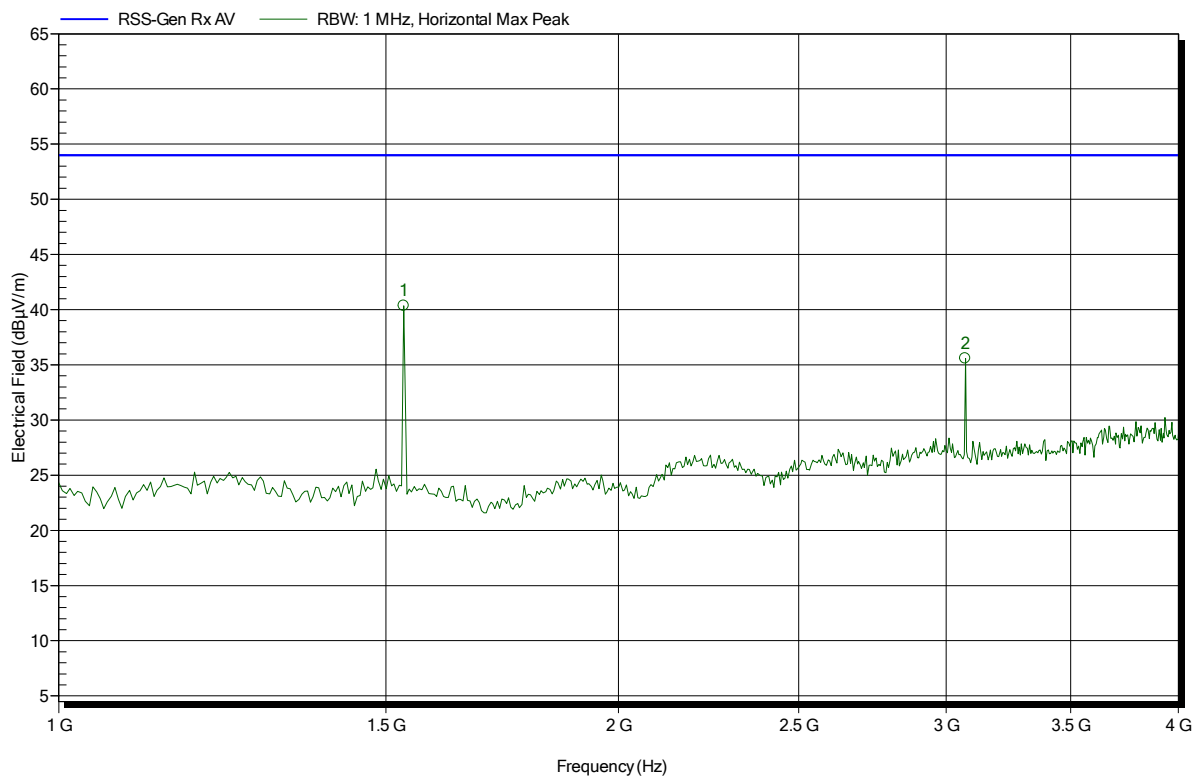


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.534 GHz	40.35 dBµV/m	53.98 dBµV/m	-13.63 dB	Pass
3.072 GHz	35.59 dBµV/m	53.98 dBµV/m	-18.39 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m
Mode: RX; BLE; 2440 MHz; Charging
Test Date: 2019-04-23
Note:

Index 63

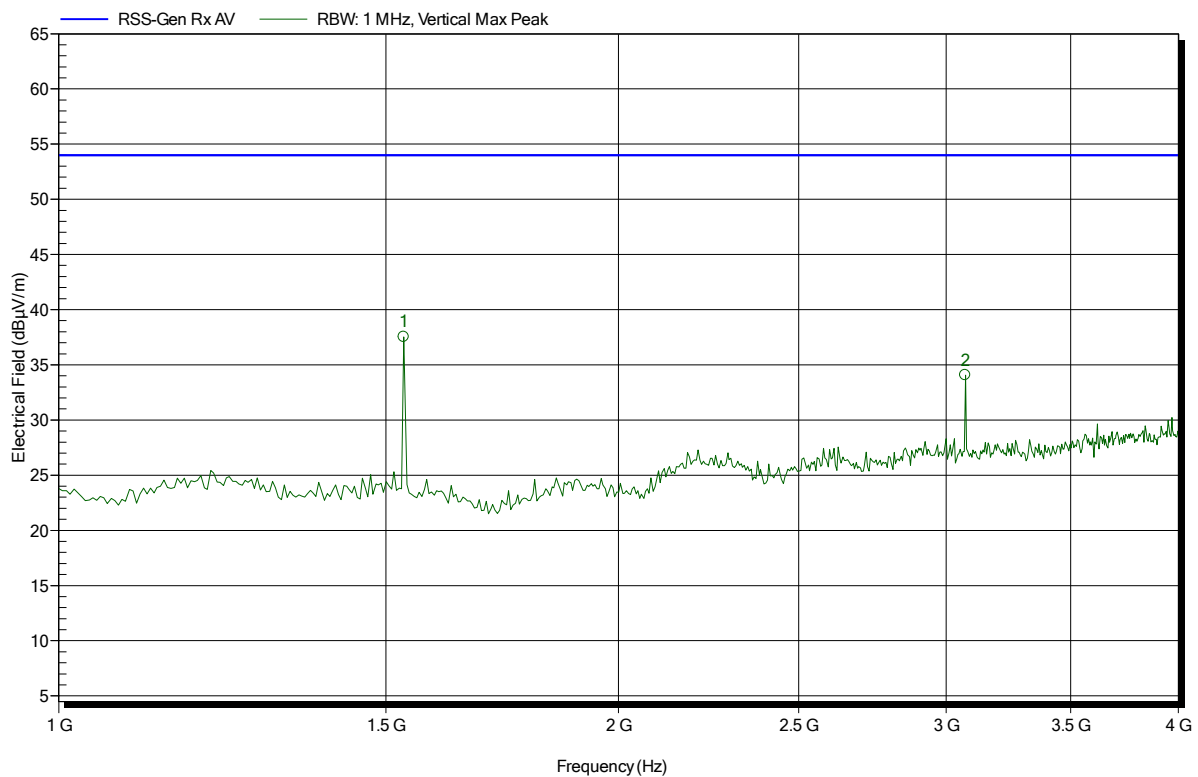


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.534 GHz	37.52 dBµV/m	53.98 dBµV/m	-16.46 dB	Pass
3.072 GHz	34.06 dBµV/m	53.98 dBµV/m	-19.92 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-23
 Note:

Index 61

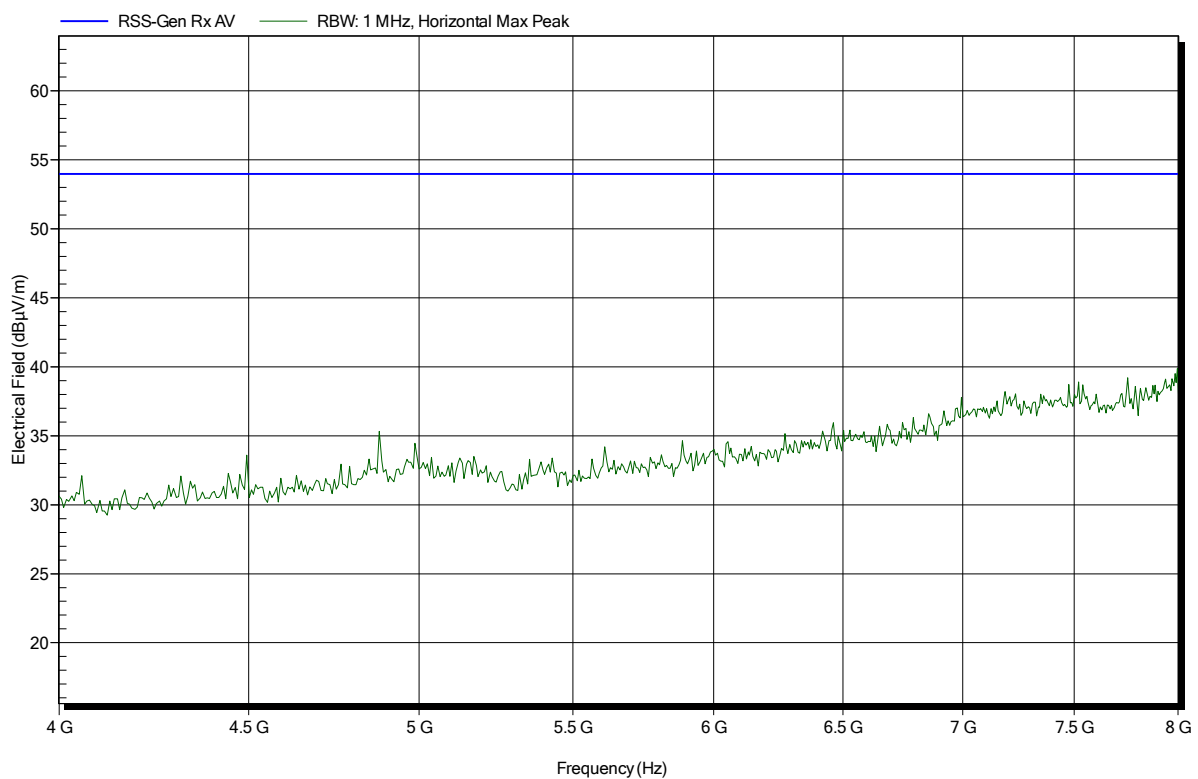


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-23
 Note:

Index 64

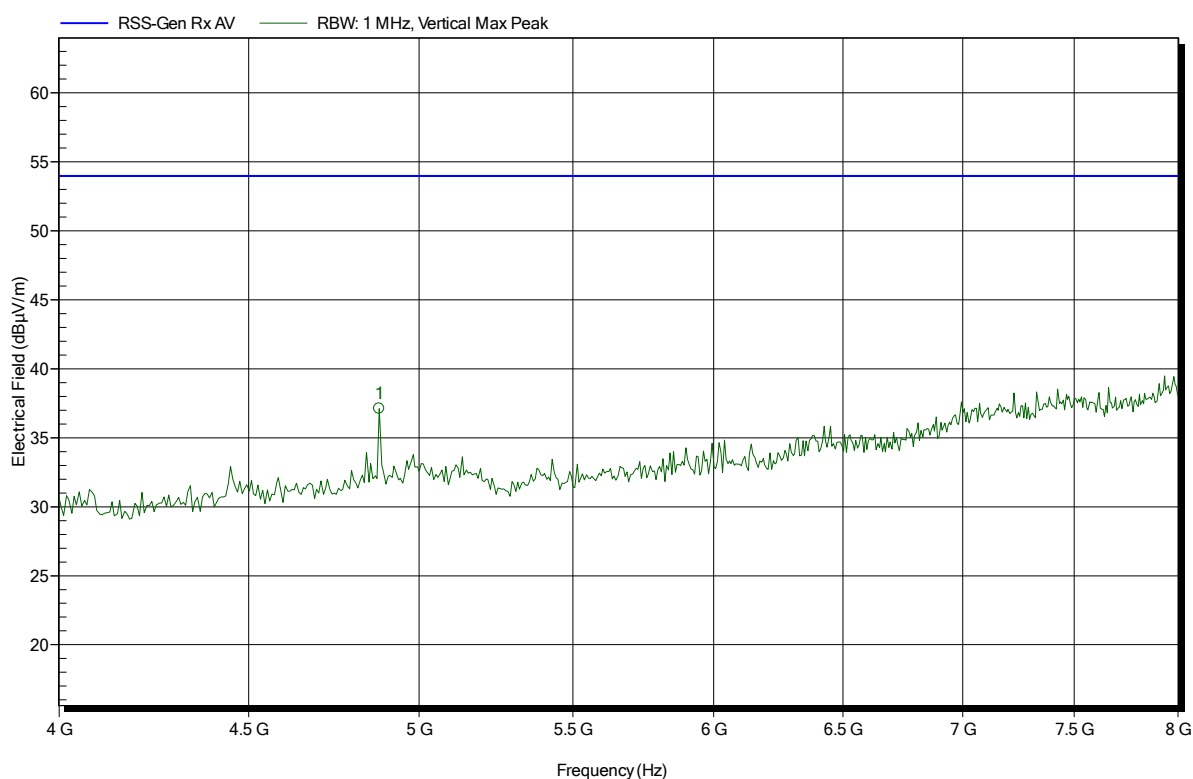


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.878 GHz	37.1 dBµV/m	53.98 dBµV/m	-16.88 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185
 Applicant: Medela AG
 EUT Name: freestyle
 Model: 101035796
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; BLE; 2440 MHz; Charging
 Test Date: 2019-04-23
 Note:

Index 62

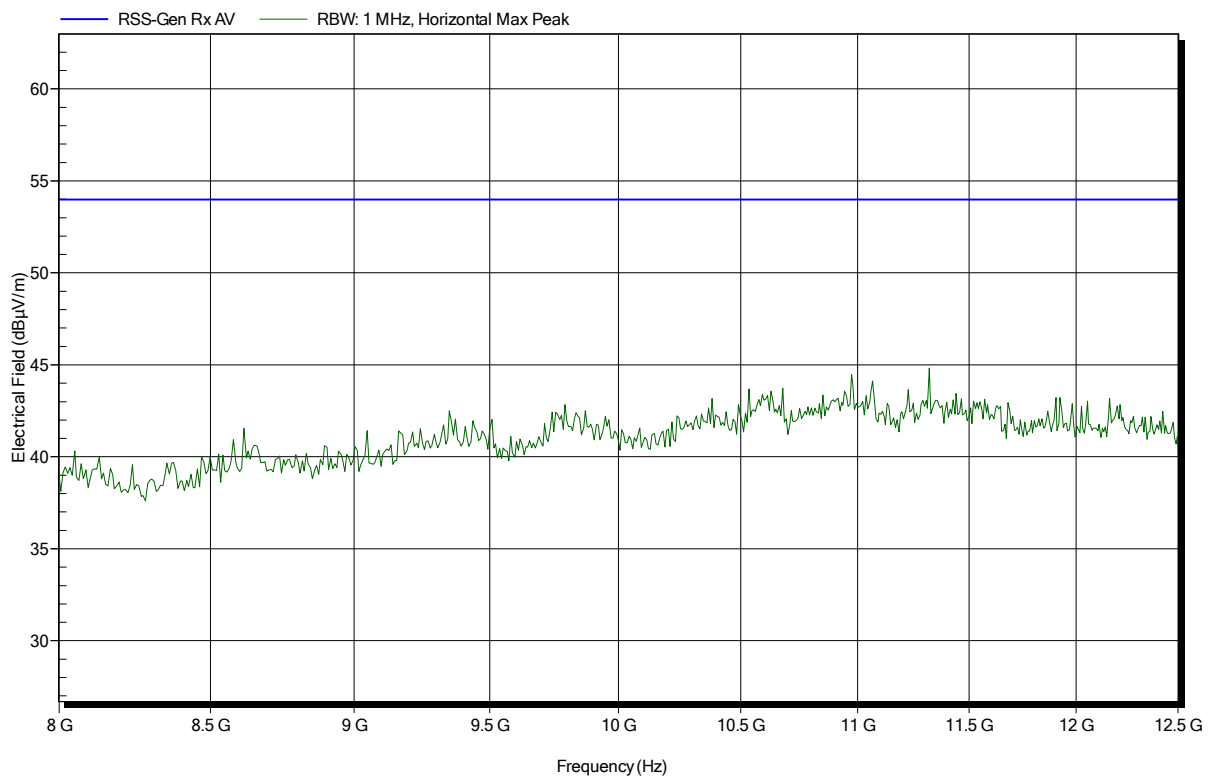

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1904-8185

Applicant: Medela AG
EUT Name: freestyle
Model: 101035796
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (AC/DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: RX; BLE; 2440 MHz; Charging
Test Date: 2019-04-23
Note:

Index 65

