



EMC TEST REPORT

Applicant Huawei Device Co.,Ltd.

FCC ID 2ATEYPPA-LX3

Product Smart Phone

Model PPA-LX3

Report No. R2101A0041-E1

Issue Date January 8, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2019)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Prepared by: Wei Liu

Guangchang Fan

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Testing Location.....	4
2	General Description of Equipment under Test.....	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
2.3	Applied Standards	7
2.4	Test Mode.....	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	15
4	Main Test Instruments	18



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: September 9, 2020 ~ September 17, 2020			
Date of Sample Receiving: September 7, 2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

This report is only added FCC ID, there is no test in this report and the original report number is R2009H0244-E1.



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Fan Guangchang

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: fanguangchang@ta-shanghai.com



2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Huawei Device Co.,Ltd.
Applicant address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China
Manufacturer	Huawei Device Co.,Ltd.
Manufacturer address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

2.2 General information

EUT Description			
Device Type:	Portable Device		
Model:	PPA-LX3		
SN:	2KTNU20811100857		
HW Version:	HL1PPAM		
SW Version:	10.1.1.100(C900E25R1P2)		
Antenna Type:	Internal Antenna		
Frequency:	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 66	1710 ~ 1780	2110 ~ 2200
	Bluetooth:	2400 ~ 2483.5	2400 ~ 2483.5
	WIFI 2.4G:	2400 ~ 2483.5	2400 ~ 2483.5
EUT Accessory			
Accessory	Model	Manufacture	No.
Adapter	HW-100225E00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)	1



		Huawei Device Co.,Ltd. (Manufacturer: DONGGUAN PHITEK ELECTRONICS CO.,LTD)	2
		Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd.)	3
	HW-100225U00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)	4
		Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd)	5
	HW-100225A00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)	6
		Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd)	7
	HW-100225B00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)	8
		H Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd)	9
	Battery	Huawei Device Co.,Ltd. (Manufacturer: Dongguan NVT Technology Co., Ltd)	1
		Huawei Device Co.,Ltd. (Manufacturer: Huizhou Desay Battery Co., Ltd.)	2
		Huawei Device Co.,Ltd. (Manufacturer: Sunwoda Electronic Co., Ltd.)	3
USB Cable	WA0020	NingBo Broad Telecommunication Co.,Ltd.	1
	L99UC131-CS-H	LUXSHARE Precision Industry Co., Ltd.	2
	CUDU01B-HC295-EH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	3
	18-93C2CHO-001HF	Freeport Resources Enterprises (Jiangxi) Co.,Ltd	4
	203-1572-0	Dongguan Mingji Electronics Technology Group Co.,Ltd	5
Earphone	MEND1532B528A11	Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD	1
	1293-3283-3.5MM-339	Boluo County Quancheng Electronic Co.,ltd	2
	EPAB542-2WH05-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	3
Auxiliary test equipment			
PC	PC Manufacturer: Microsoft Corporation Model: L20170076		
<p>Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.</p> <p>2. There are more than one Adapter, Battery, Earphone and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter1, Battery2, Earphone2 and USB Cable1) will be recorded in this report.</p>			



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2019)

ANSI C63.4 (2014)

2.4 Test Mode

Test Mode for RE	
Mode 1:	USB Copy(EUT with PC) + USB cable + earphone + rear camera On + MP3
Mode 2:	USB Copy(EUT with PC) + USB cable + earphone +front camera On + MP3
Mode 3:	Adapter +USB cable+ earphone + front camera On +Receiver
Mode 4:	Adapter +USB cable + earphone + rear camera On +Receiver
Mode 5:	Adapter + USB cable+ earphone + Mp3
Mode 6:	Adapter + USB cable+ earphone +play video
Mode 7:	Front camera On +earphone + Receiver
Mode 8:	Rear camera On + earphone + Receiver
Mode 9:	Earphone+MP3
Mode 10:	Earphone +Play video

During the test, the preliminary test was performed in all modes with all adapters, USB and batteries, mode 1 with Battery 2 and USB cable 1 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Test Mode for CE	
Mode 1:	USB Copy(EUT with PC) + USB cable + earphone + rear camera On + MP3
Mode 2:	USB Copy(EUT with PC) + USB cable + earphone +front camera On + MP3
Mode 3:	Adapter +USB cable+ earphone + front camera On +Receiver
Mode 4:	Adapter +USB cable + earphone + rear camera On +Receiver
Mode 5:	Adapter + USB cable+ earphone + Mp3
Mode 6:	Adapter + USB cable+ earphone +play video

During the test, the preliminary test was performed in all modes with all adapters, USB and batteries, mode 1 with Battery 2 and USB cable 1 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.



3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


- (a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO
- (b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC;

Test Setup

Below 1GHz

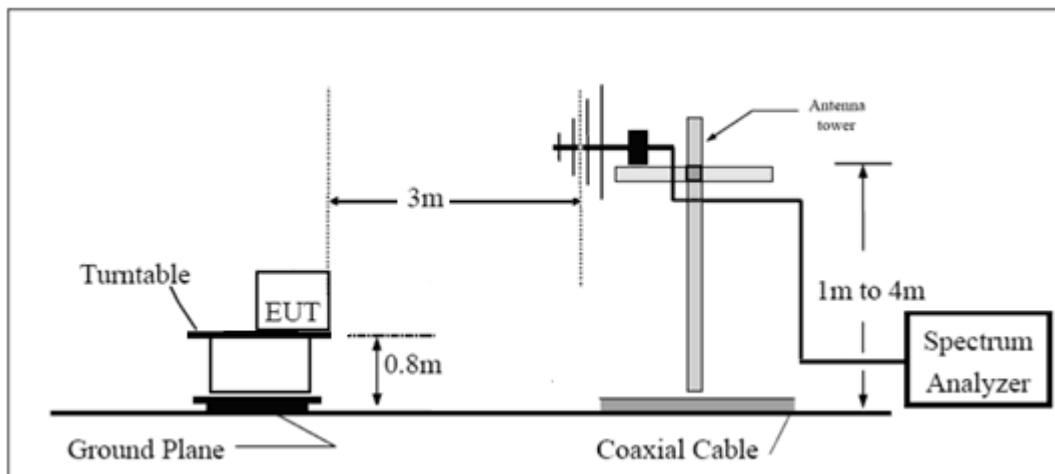

Above 1GHz

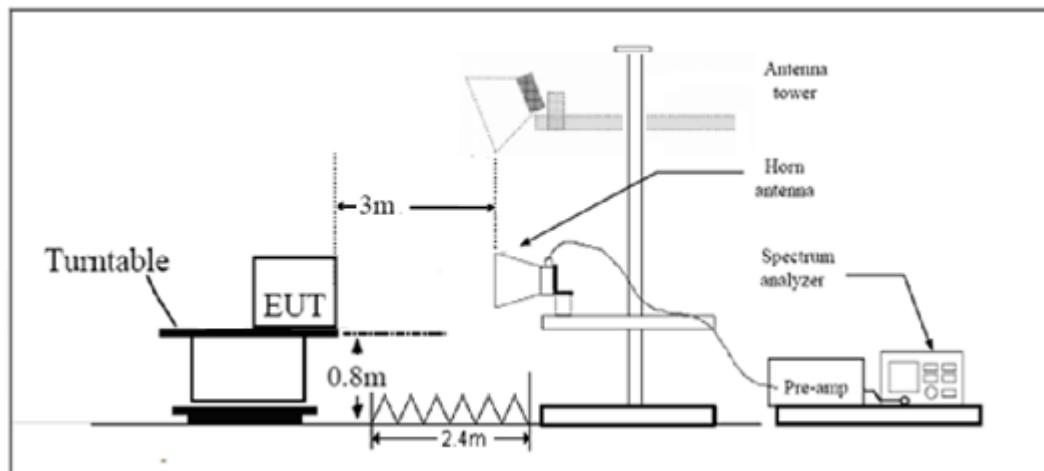

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.



Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz,which is lower	54 74	Average Peak

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
30MHz~200MHz	4.17 dB
200MHz~1000MHz	4.84 dB
1GHz~18GHz	4.35 dB
18GHz~26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz- 40GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

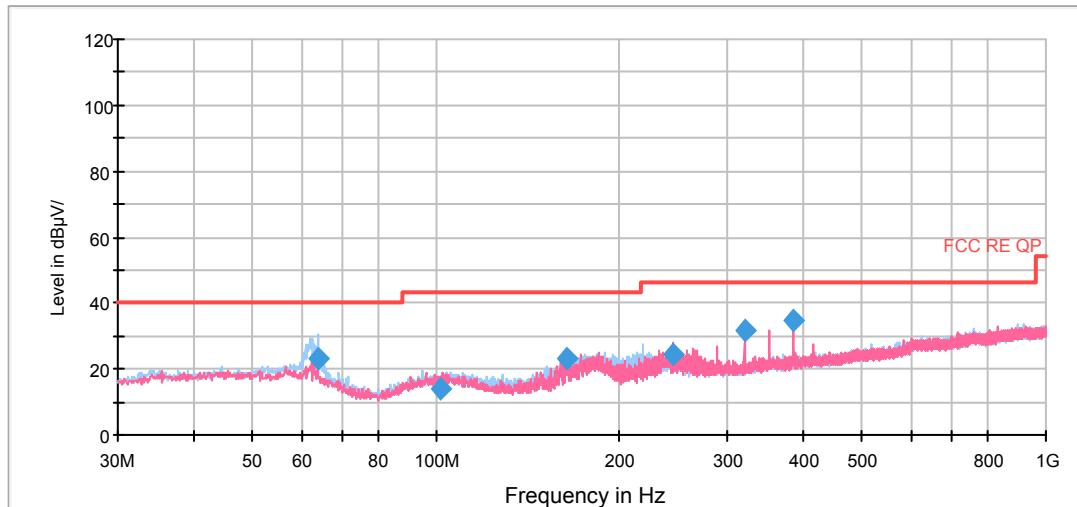


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
63.990000	23.3	114.0	H	296.0	12.9	16.7	40.0
101.623750	13.9	125.0	H	133.0	13.6	29.6	43.5
163.780000	23.1	189.0	V	66.0	10.6	20.4	43.5
245.220000	24.2	114.0	V	107.0	14.7	21.8	46.0
319.990000	31.4	100.0	V	355.0	16.2	14.6	46.0
384.008750	34.8	100.0	V	0.0	18.1	11.2	46.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


2. Margin = Limit – Quasi-Peak

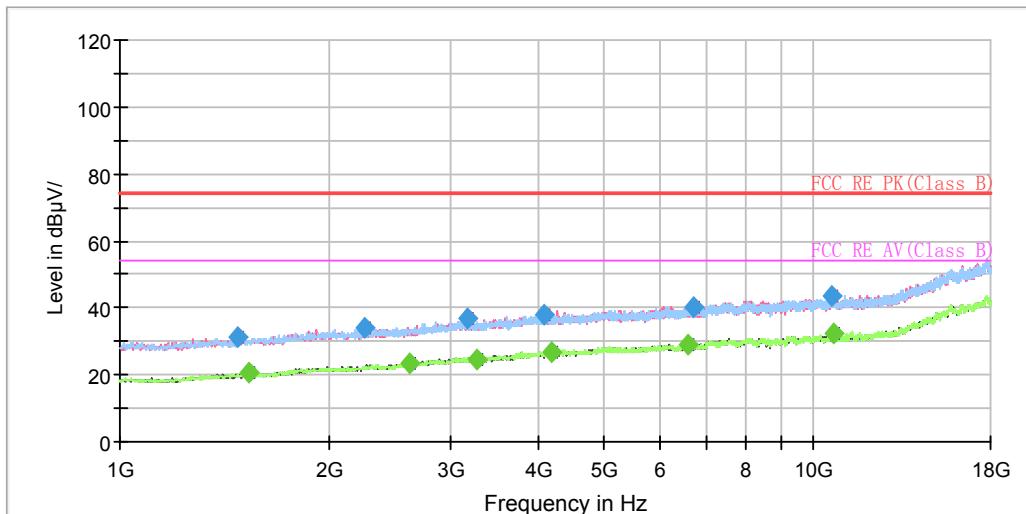

Radiated Emission from 1GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1476.000000	31.01	---	200.0	H	247.0	-16.3	42.99	74.00
1537.625000	---	20.46	200.0	H	107.0	-16.0	33.54	54.00
2249.500000	34.07	---	100.0	H	305.0	-12.4	39.93	74.00
2610.750000	---	23.29	100.0	H	70.0	-10.9	30.71	54.00
3165.375000	37.02	---	200.0	V	337.0	-8.4	36.98	74.00
3263.125000	---	24.49	200.0	V	144.0	-8.4	29.51	54.00
4079.125000	37.85	---	200.0	H	198.0	-5.8	36.15	74.00
4191.750000	---	26.68	100.0	V	50.0	-5.6	27.32	54.00
6605.750000	---	29.25	200.0	V	350.0	-1.3	24.75	54.00
6718.375000	40.30	---	100.0	H	334.0	-1.2	33.70	74.00
10656.000000	43.31	---	100.0	H	173.0	2.4	30.69	74.00
10679.375000	---	32.34	200.0	V	125.0	2.4	21.66	54.00

RE 18-26.5GHz PK+AV

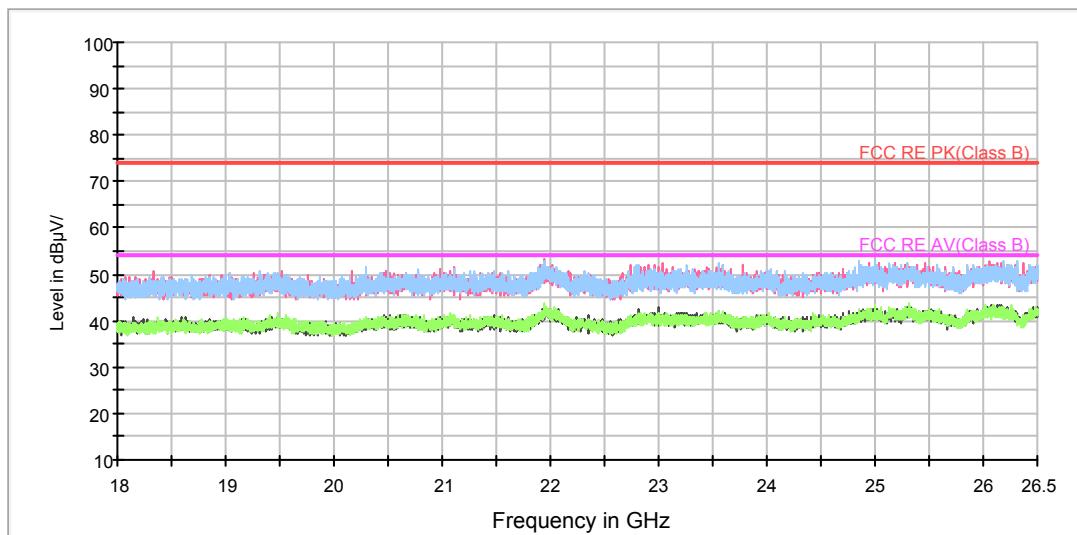

Radiated Emission from 18GHz to 26.5GHz

RE 26.5-40GHz PK+AV

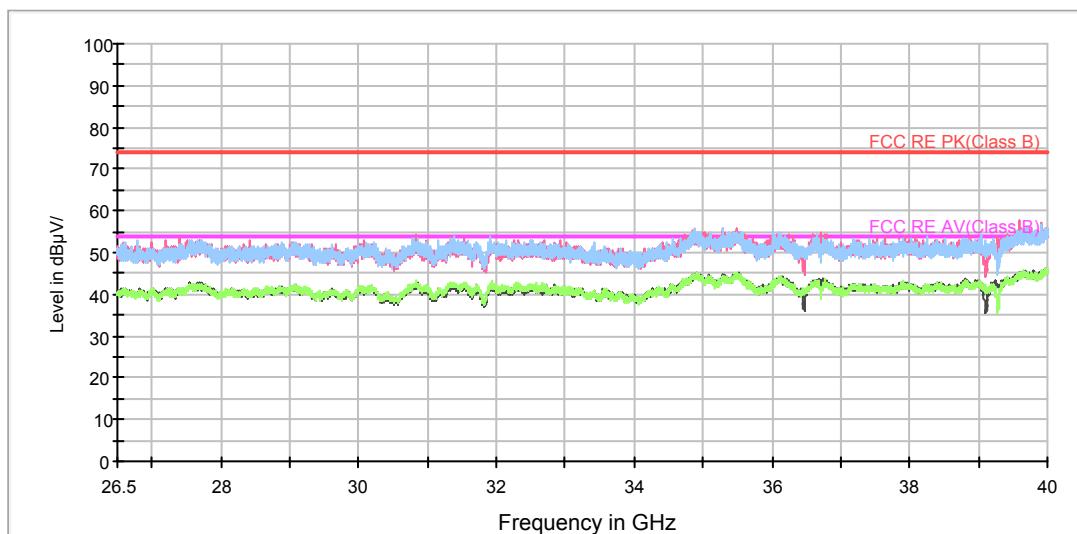

Radiated Emission from 26.5GHz to 40GHz

3.2 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC;

Test Setup

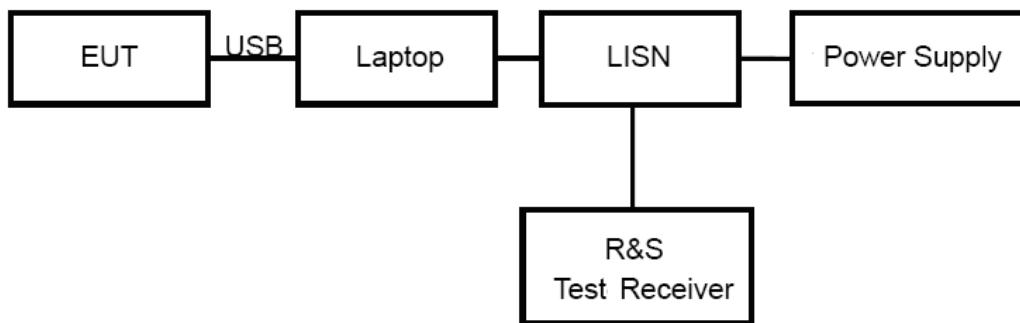

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 [*]	56 to 46 [*]
0.5 - 5	56	46
5 - 30	60	50


^{*}: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.57$ dB.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

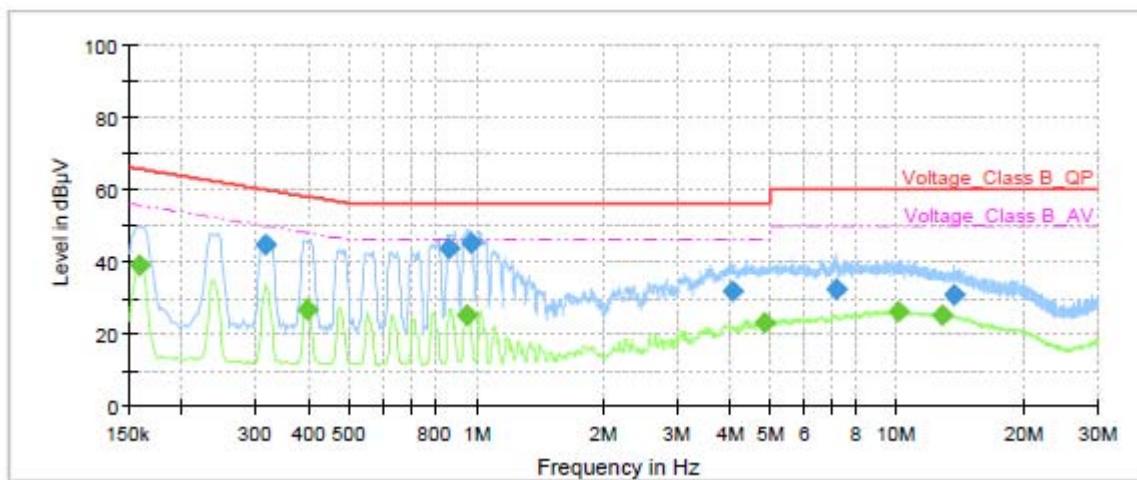


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	---	38.96	55.52	16.56	1000.0	9.000	L1	ON	19
0.31	44.36	---	59.86	15.50	1000.0	9.000	L1	ON	19
0.40	---	26.44	47.95	21.51	1000.0	9.000	L1	ON	19
0.86	43.76	---	56.00	12.24	1000.0	9.000	L1	ON	19
0.95	---	25.07	46.00	20.93	1000.0	9.000	L1	ON	19
0.97	45.18	---	56.00	10.82	1000.0	9.000	L1	ON	19
4.08	31.59	---	56.00	24.41	1000.0	9.000	L1	ON	19
4.85	---	23.07	46.00	22.93	1000.0	9.000	L1	ON	19
7.14	32.48	---	60.00	27.52	1000.0	9.000	L1	ON	19
10.11	---	25.96	50.00	24.04	1000.0	9.000	L1	ON	19
12.86	---	25.02	50.00	24.98	1000.0	9.000	L1	ON	19
13.62	30.91	---	60.00	29.09	1000.0	9.000	L1	ON	19

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

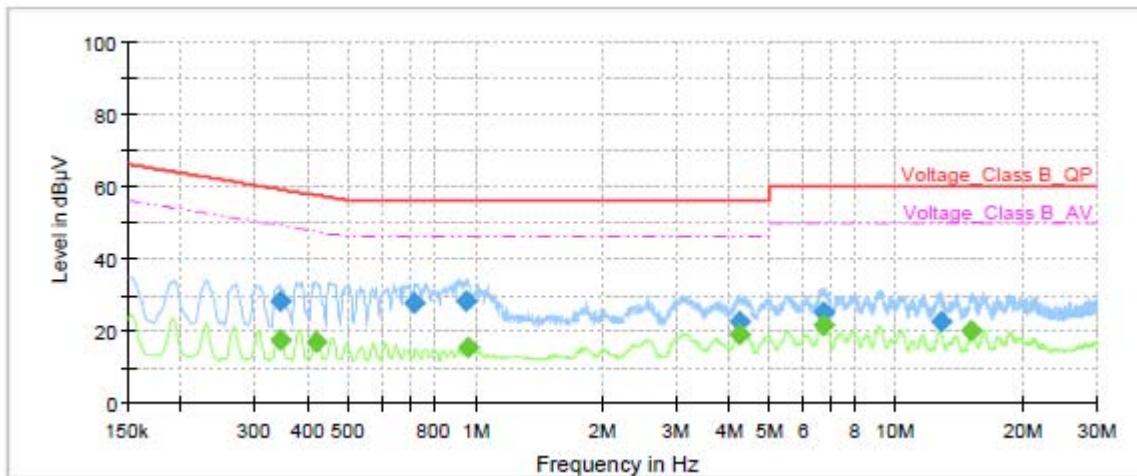

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.34	---	17.61	49.12	31.51	1000.0	9.000	N	ON	19
0.35	28.07	---	59.06	30.99	1000.0	9.000	N	ON	19
0.42	---	16.96	47.45	30.49	1000.0	9.000	N	ON	19
0.72	27.52	---	56.00	28.48	1000.0	9.000	N	ON	19
0.95	28.45	---	56.00	27.55	1000.0	9.000	N	ON	19
0.96	---	15.14	46.00	30.86	1000.0	9.000	N	ON	19
4.24	22.35	---	56.00	33.65	1000.0	9.000	N	ON	19
4.25	---	19.22	46.00	26.78	1000.0	9.000	N	ON	19
6.70	25.05	---	60.00	34.95	1000.0	9.000	N	ON	19
6.70	---	21.52	50.00	28.48	1000.0	9.000	N	ON	19
12.84	22.36	---	60.00	37.64	1000.0	9.000	N	ON	19
15.16	---	19.97	50.00	30.03	1000.0	9.000	N	ON	19

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz



4 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	R&S	FSV40	15195-01-00	2020-05-17	2021-05-16
EMI Test Receiver	R&S	ESCI	100948	2020-05-17	2021-05-16
Trilog Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Standard Gain Horn	STEATITE	QSH-SL-26-40-K-15	16779	2019-12-24	2022-12-23
EMI Test Receiver	R&S	ESR	101667	2020-05-17	2021-05-16
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/

*****END OF REPORT*****