

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25VCXE 001	Auftrags-Nr.: <i>Order no.:</i>	169841434	Seite 1 von 17 Page 1 of 17
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-06-20	
Auftraggeber: <i>Client:</i>	SRP Companies 85 Rio Grande Drive, Second Floor, Castle Rock, CO 80104, USA			
Prüfgegenstand: <i>Test item:</i>	3 IN 1 WIRELESS CHARGING STAND			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	#70416, ECL2-250331A, 608707704162			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.215 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart C Section 15.207			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-06-22	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	PRMS001250601A01			
Prüfzeitraum: <i>Testing period:</i>	2025-06-26 - 2025-07-08			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 2.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	 Hardy Suo		genehmigt von: <i>authorized by:</i>	 Bell Hu
Datum: <i>Date:</i>	2025-08-04		Ausstellungsdatum: <i>Issue date:</i>	2025-08-05
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / <i>Other:</i>	FCC ID: 2ATF5-E70416			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25VCXE 001
Test report no.:

Seite 2 von 17
Page 2 of 17

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25VCXE 001
Test Report No.:

Seite 3 von 17
Page 3 of 17

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Radiated Spurious Emission</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>16</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	17
7	LIST OF TABLES.....	17

Prüfbericht - Nr.: CN25VCXE 001
Test Report No.:

Seite 5 von 17
Page 5 of 17

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

A2LA Certificate Number: 7133.01

FCC Accreditation Designation No.: CN1376

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radiated Emission Test Equipment List					
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. Due date
☒	EMI Measuring Receiver	R&S	ESR	101160	2025.09.24
☒	Spectrum Analyzer	R&S	FSV40	101470	2025.09.22
☒	Low Noise Pre Amplifier	SCHWARZBEC K	BBV 9745	00282	2025.09.24
☒	Low Noise Pre Amplifier	CESHENG	CSKJLNA231016A	CSKJLNA231016A	2025.09.24
☒	Passive Loop	ETS	6512	00165355	2027.08.28
☒	TRILOG Super Broadband test Antenna	SCHWARZBEC K	VULB9168	01434	2027.08.28
☒	6dB Attenuator	JFW	50FPE-006	4360846-949-1	2025.09.23
☒	Test Software	EZ	EZ-EMC_RE	Ver.AIT-03A	

Conducted Emission Test Equipment List					
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. Due date
☒	EMI Test Receiver	R&S	ESPI	100771	2025.09.24
☒	LISN	R&S	NNLK 8129	8130179	2025.09.23
☒	LISN	R&S	ESH3-Z5	892785/016	2025.09.22
☒	Pulse Limiter	R&S	ESH3-Z2	102789	2025.09.23
☒	Test Software	EZ	EZ-EMC_CE	Ver.AIT-03A	

Bandwidth Test Equipment List					
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. Due date
☒	Passive Loop	ETS	6512	00165355	2027.08.28
☒	Spectrum Analyzer	R&S	FSV40	101470	2025.09.22

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-30MHz	±1.20 dB
2	Radiated emission 9kHz-30MHz	±3.10 dB
3	Radiated emission 30MHz-1GHz	±3.75 dB
4	Occupied Channel Bandwidth	± 1.5 * 10 ⁻⁶

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

Guangdong Asia Hongke Test Technology Limited. Test facility located at B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 3-in-1 Wireless charger, which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT		Value
Kind of Equipment:		3 IN 1 WIRELESS CHARGING STAND
Type Designation:		#70416, ECL2-250331A, 608707704162 All models are same in hardware and electronic aspects, the difference is only the model number for market strategy.
FCC ID:		2ATF5-E70416
Operating Temperature Range:		0°C to +40°C
Rated Input		9.0V=3.0A
Rated Output:		Output 1: 5.0W/7.5W/10W/15.0W (for Phone) Output 2: 5.0W (for Earbuds) Output 3: 2.5W (for Watch) Total Output: 22.5W MAX
Test Voltage:		AC 120V, 60Hz
Technical Specification of WPT		
Output 1 (Coil 1)	Frequency Range:	110.5kHz to 205kHz
	Type of Modulation:	Pulse Amplitude Frequency Technique.
	Antenna Type:	Coil antenna
	Antenna Number:	1
Output 2 (Coil 2)	Frequency Range:	127.7kHz
	Type of Modulation:	Pulse Amplitude Frequency Technique.
	Antenna Type:	Coil antenna
	Antenna Number:	1
Output 3 (Coil 3)	Frequency Range:	326.5kHz
	Type of Modulation:	Pulse Amplitude Frequency Technique.
	Antenna Type:	Coil antenna
	Antenna Number:	1

3.3 Independent Operation Modes

Mode	Test Description	Frequency	Client
1	Standby, Powered by AC/DC Adapter form 120V~60Hz	Output 1: 110.5kHz to 205kHz Output 2: 127.7kHz Output 3: 326.5kHz	None
2	Direct contact During charging / operating between the EUT& WPT Client. EUT is powered by AC/DC adapter. 120V~60Hz	Output 1 Phone: 110.5-205kHz	Output 1: iPhone 14 Plus (5/7.5/10/15W)
3		Output 2 Earbuds: 127.7kHz	Output 2: Apple AirPods Pro (5W)
4		Output 3: watch 326.5kHz	Output 3: Apple MX1P3CH/B (2.5W)
5		Output 1: 110.5-205kHz Output 2: 127.7kHz Output 3: 326.5kHz	Output 1: iPhone 14 Plus (5W) Output 1: iPhone 14 Plus (15W) Output 2: Apple AirPods Pro (5W) Output 3: Apple MX1P3CH/B (2.5W)

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Block Diagram
- ID Label and Location Info
- User Manual
- Schematics
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model #70416 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Adapter	Xiaomi	MDY-14-EU	45461/A62502T103407S	Test lab
Phone	Apple	iPhone 14 Pro	N/A	Test lab
Earbud	Apple	AirPods Pro	N/A	Test lab
Watch	Apple	MX1P3CH/B	HCJFPLX66W	Test lab

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

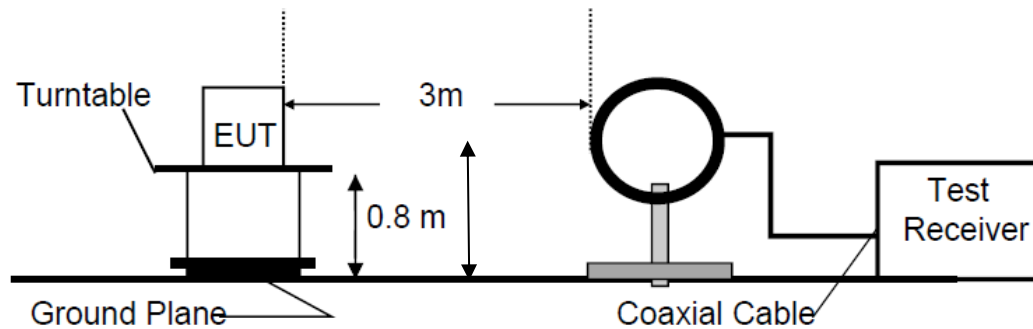


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


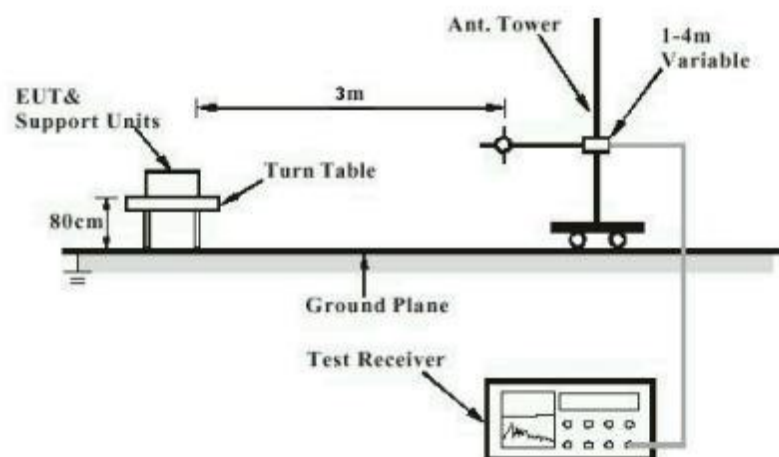


Diagram of Measurement Configuration for Mains Conduction Measurement

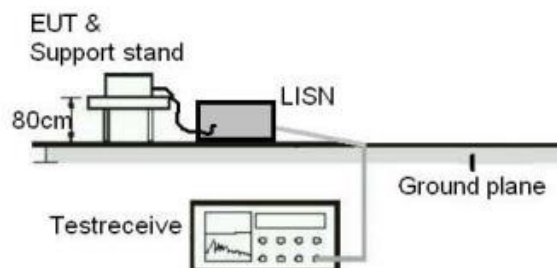

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : Part 15.203
the use of antennas with directional gains that do not
exceed 6 dBi

According to the manufacturer declared, the EUT has internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25VCXE 001
Test Report No.:Seite 13 von 17
Page 13 of 17

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-16
Input voltage	: AC 120V, 60Hz
Operation mode	: Mode 2~4
Ambient temperature	: 26 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Use the following spectrum analyzer settings:

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency
2. Span = approximately 2 to 5 times the OBW
3. RBW = 1% to 5% of the OBW
4. VBW $\geq 3 \times$ RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold
8. All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 99% bandwidth of the emission

5.1.3 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2025-06-26 to 2025-07-08
Input voltage	: AC 120V, 60Hz
Operation mode	: Mode 1~5
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: Refer to test result

For the measurement records, refer to the appendix A.

Note:

Measurements are to be taken in dBuV/m, corrected, and the end result shall be mathematically converted to the dBuA/m for RSS and presented against the correct limit.

$E \text{ [dBuA/m]} = AF \text{ [dBS/m]} + V \text{ [dBuV]} + \text{Cable loss [dB]}$

E [dBuA/m] is the magnetic field strength (Final Test results)

AF [dBS/m] is the magnetic antenna factor of the antenna (H-field)

V [dBuV] is the reading level on the spectrum analyzer

Note that when using the AF [dBS/m] the 51.5 dB is already account for into the antenna factor.

Measurement bandwidth:

9 kHz – 150 kHz: RBW = 200 / 300 Hz

150 kHz – 30 MHz: RBW = 9 / 10 kHz

30 MHz -1000 MHz: RBW = 100 / 120 kHz

Test Procedure for 9kHz-30MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The Loop Antenna centre which was at 1.3 m height above the ground plane.
3. The projection of the loop antenna centre onto the ground plane was at the measurement distance (3m) from the projection on the ground plane of the closest point on the boundary of the EUT.
4. The measurements were performed with the loop antenna placed vertically, in turn, in two polarizations:
5. coaxial (loop plane perpendicular to the ground plane and to the measurement axis); and
6. coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis).

Test Procedures for 30MHz-1GHz:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

Prüfbericht - Nr.: CN25VCXE 001
Test Report No.:

Seite 15 von 17
Page 15 of 17

3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum HoldMode.
6. If the emission level of the EUT in peak mode was 3dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 3dB margin would be re-tested one by one using peak, quasi-peak as specified and then reported in a data sheet.

Prüfbericht - Nr.: CN25VCXE 001
Test Report No.:

Seite 16 von 17
Page 16 of 17

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-06-28
Input voltage	: AC 120V, 60Hz
Operation mode	: Mode 1~5
Earthing	: Not connected
Ambient temperature	: 26 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10


Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20dB BANDWIDTH	2
APPENDIX A.2: TEST RESULTS OF RADIATED SPURIOUS EMISSION.....	3
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	29

Appendix A.1: Test Results of 20dB Bandwidth


Frequency	20 dB Bandwidth (Hz)
Output 1: 110.5-205kHz (15W)	267
Output 2: 127.7kHz (5W)	293
Output 3: 326.5kHz (2.5W)	246

The test plot as follows:

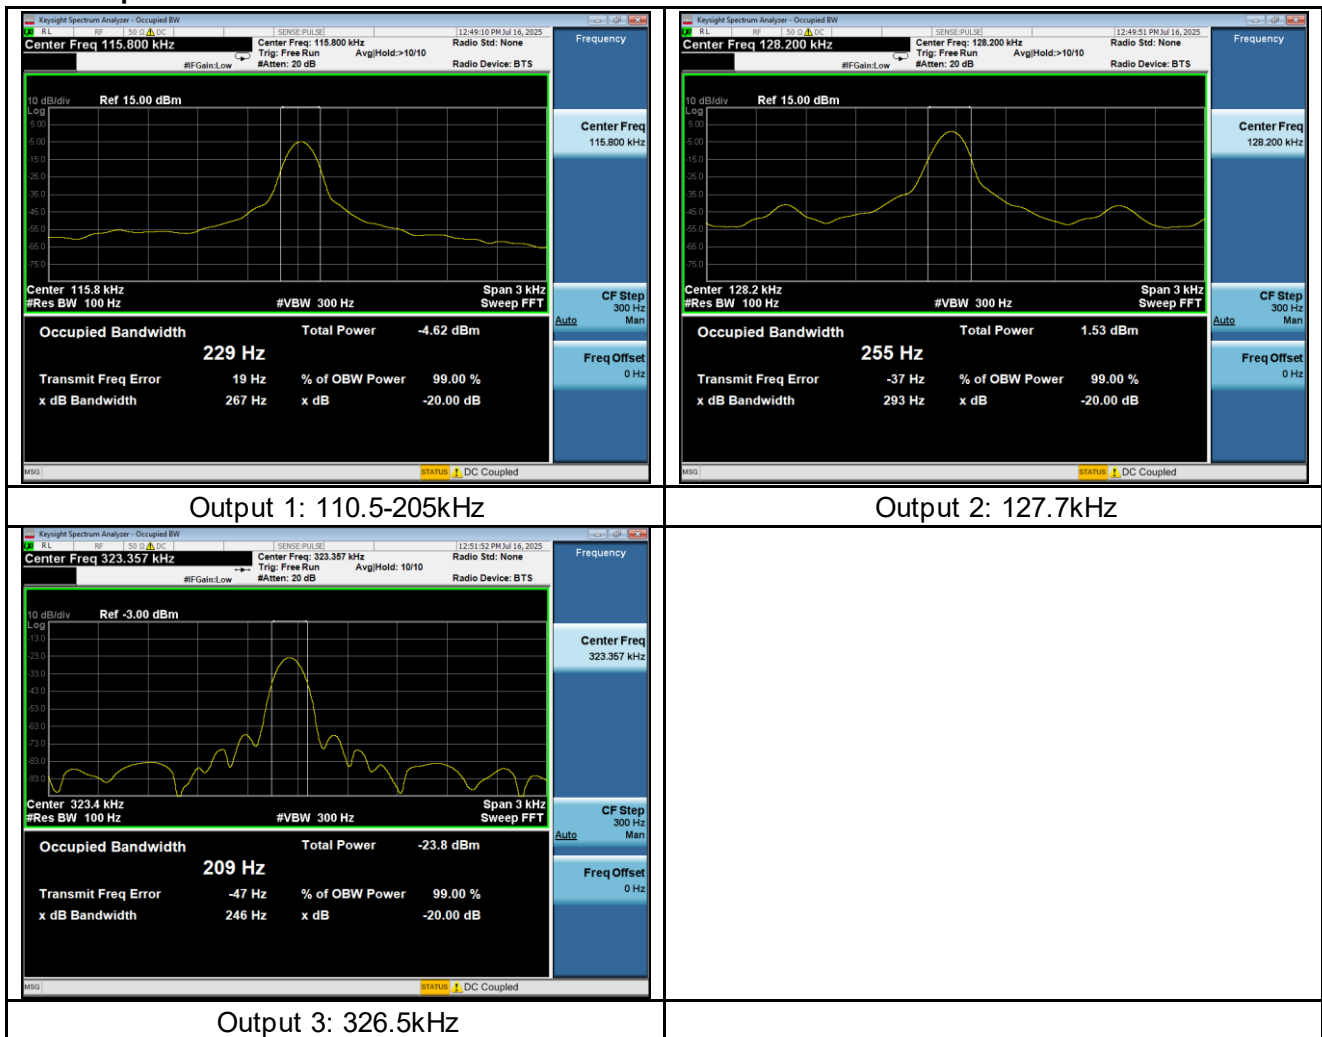


Appendix A.2: Test Results of Radiated Spurious Emission

Note 1: The highest waveform in the figure is WPT Fundamental.
Note 2: The worst-case mode reported.

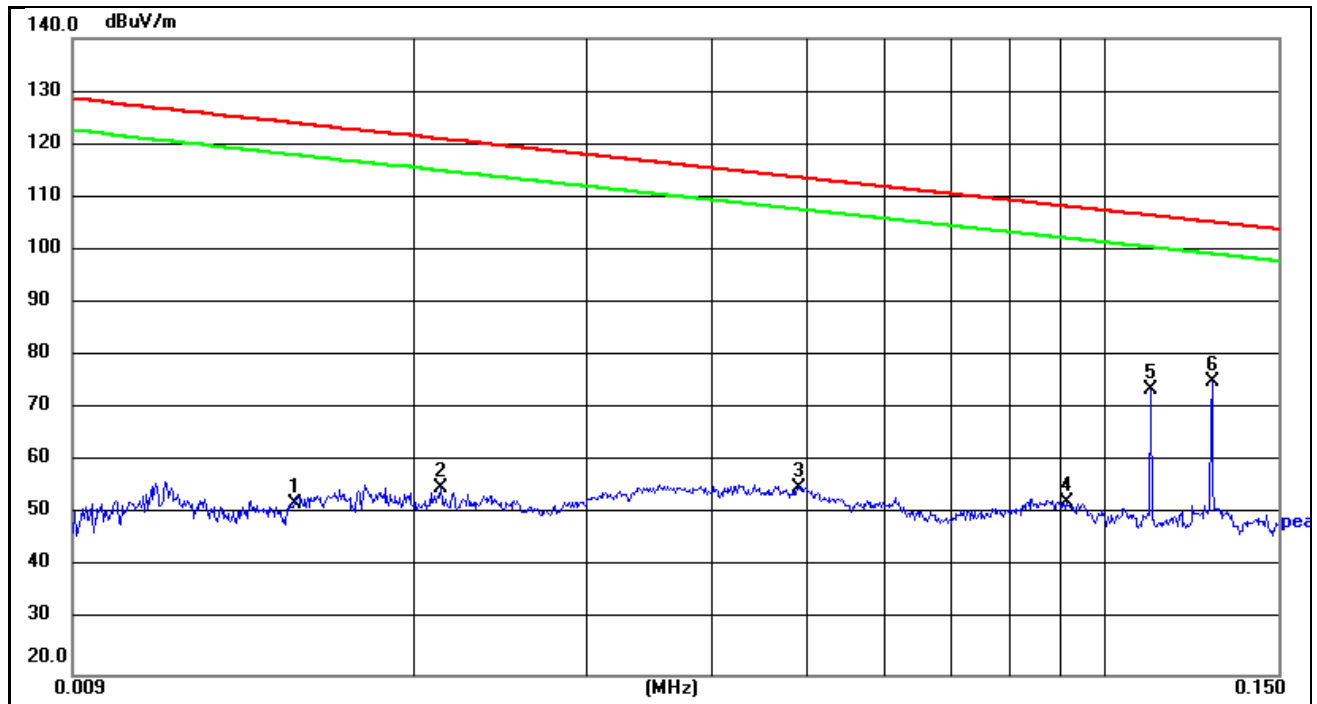


Site:	FCC Part15C-RE 9K-150kHz	Antenna::X	Temperature(C):26(C)
Limit:	3 IN 1 WIRELESS CHARGING	Distance:3m	Humidity(%):54%
EUT:	STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0151	31.19	21.11	52.30	124.03	-71.73	peak	100	47	
2	0.0212	34.39	20.87	55.26	121.08	-65.82	peak	100	69	
3	0.0490	32.88	22.54	55.42	113.80	-58.38	peak	100	254	
4	0.0913	30.20	22.53	52.73	108.39	-55.66	peak	100	185	
5	0.1111	51.63	22.29	73.92	106.69	-32.77	peak	100	255	
6	0.1282	53.18	22.12	75.30	105.45	-30.15	peak	100	154	

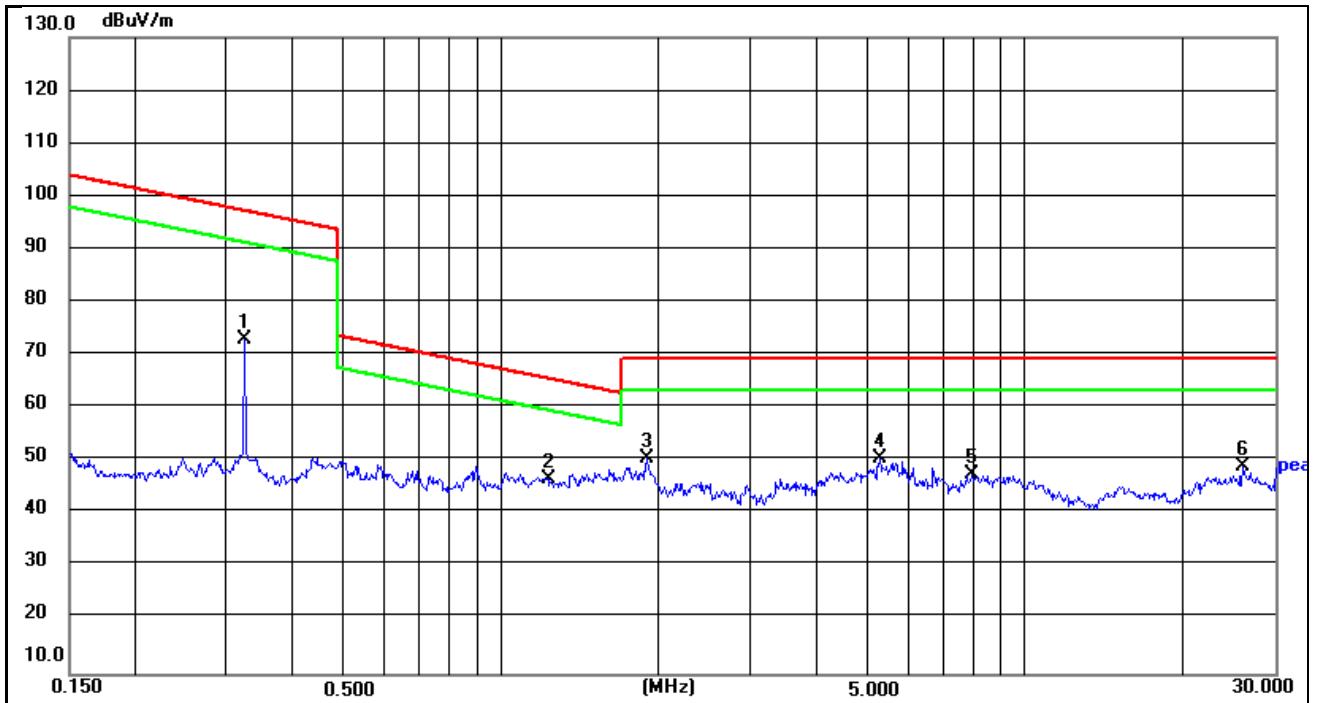


Site:		Antenna::X	Temperature(C):26(C)
Limit:	FCC Part15C-RE 150K-30MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.3234	51.54	21.52	73.06	97.41	-24.35	peak	100	145	
2	1.2291	24.44	22.55	46.99	65.81	-18.82	peak	100	123	
3	1.8980	28.18	22.42	50.60	69.54	-18.94	peak	100	68	
4	5.2770	27.37	23.26	50.63	69.54	-18.91	peak	100	28	
5	7.9352	24.88	22.89	47.77	69.54	-21.77	peak	100	139	
6	26.0012	27.63	21.66	49.29	69.54	-20.25	peak	100	285	

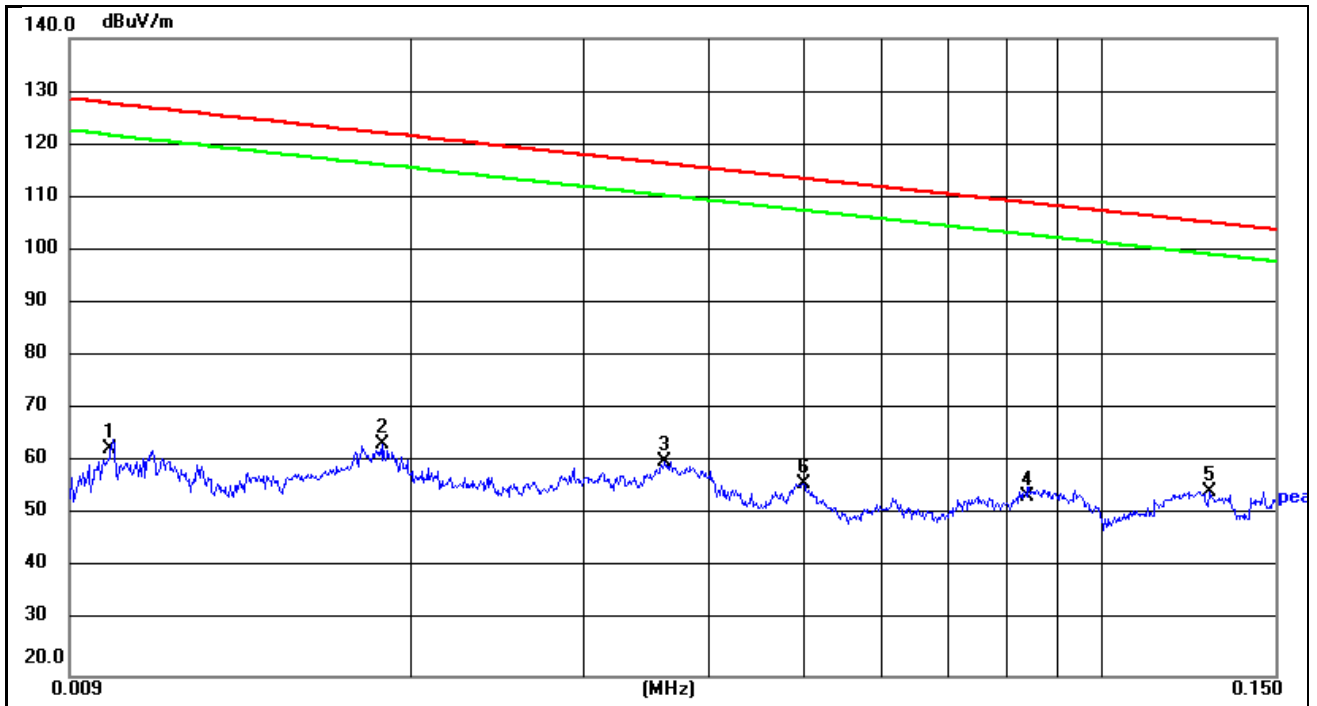


Site:		Antenna::Y	Temperature(C):26(C)
Limit:	FCC Part15C-RE 9K-150kHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0100	41.28	21.43	62.71	127.60	-64.89	peak	100	125	
2	0.0187	42.89	20.88	63.77	122.17	-58.40	peak	100	254	
3	0.0361	38.79	21.77	60.56	116.45	-55.89	peak	100	321	
4	0.0840	31.32	22.64	53.96	109.12	-55.16	peak	100	28	
5 *	0.1282	32.68	22.12	54.80	105.45	-50.65	peak	100	28	
6	0.0500	33.68	22.60	56.28	113.62	-57.34	peak	100	154	

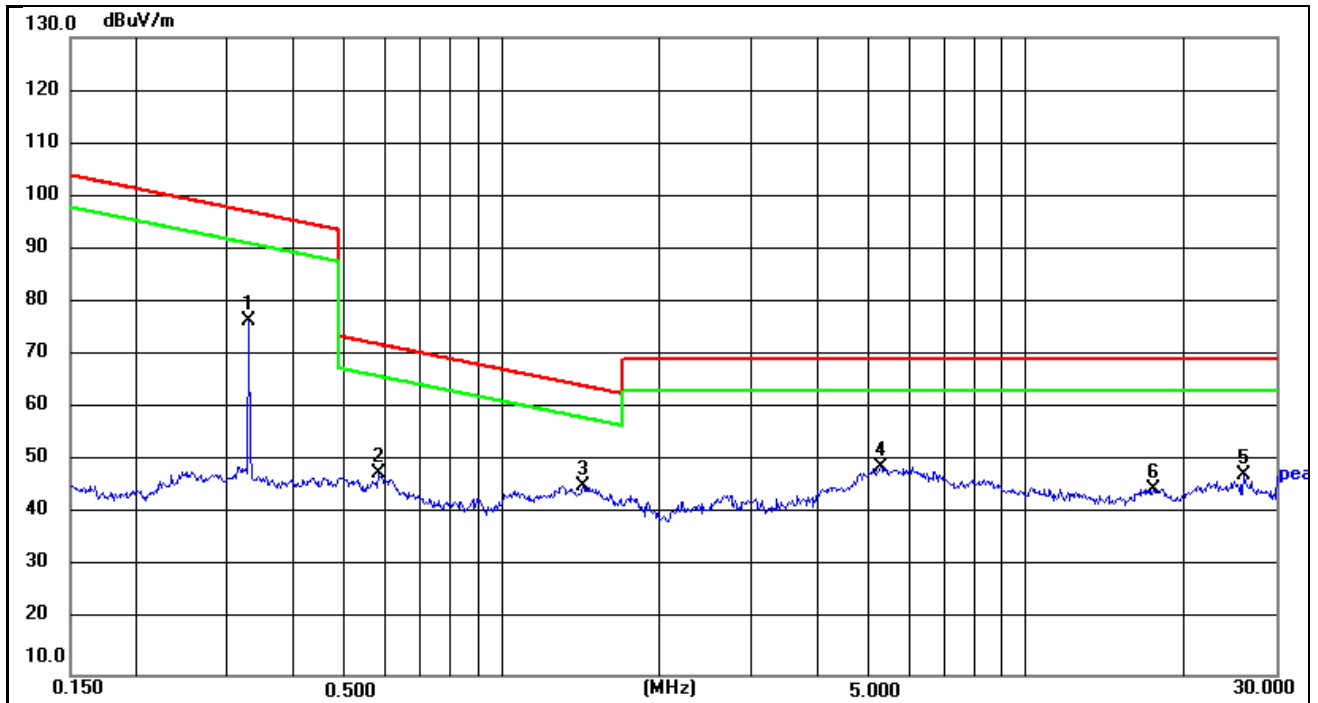


Site:	FCC Part15C-RE 150K-30MHz	Antenna::Y	Temperature(C):26(C)
Limit:	3 IN 1 WIRELESS CHARGING	Distance:3m	Humidity(%):54%
EUT:	STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.3285	55.04	21.53	76.57	97.27	-20.70	peak	100	312	
2	0.5823	26.06	22.03	48.09	72.30	-24.21	peak	100	215	
3 *	1.4254	23.03	22.51	45.54	64.53	-18.99	peak	100	187	
4	5.2770	25.87	23.26	49.13	69.54	-20.41	peak	100	258	
5	26.0012	26.13	21.66	47.79	69.54	-21.75	peak	100	296	
6	17.4750	21.51	23.50	45.01	69.54	-24.53	peak	100	22	

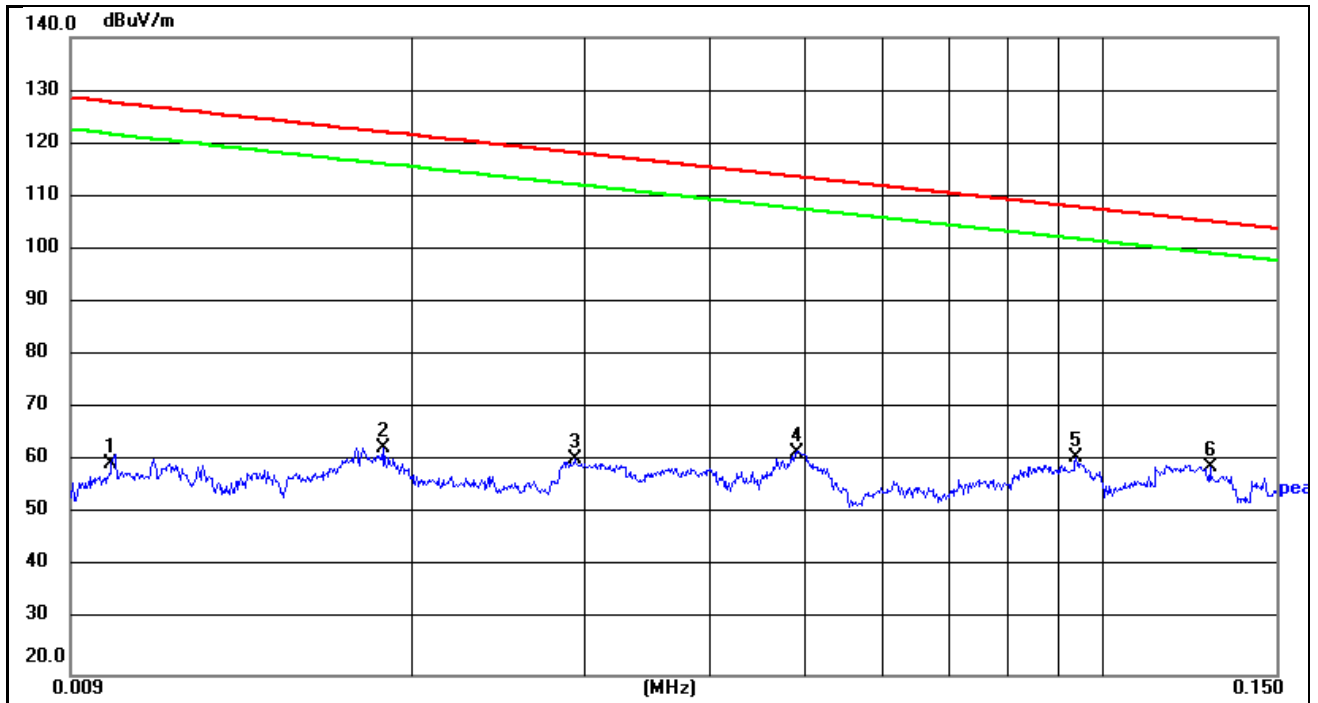


Site:		Antenna::Z	Temperature(C):26(C)
Limit:	FCC Part15C-RE 9K-150kHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0100	38.28	21.43	59.71	127.60	-67.89	peak	100	51	
2	0.0187	41.89	20.88	62.77	122.17	-59.40	peak	100	187	
3	0.0291	39.37	21.35	60.72	118.33	-57.61	peak	100	241	
4	0.0490	39.38	22.54	61.92	113.80	-51.88	peak	100	256	
5	0.0940	38.46	22.49	60.95	108.14	-47.19	peak	100	281	
6 *	0.1282	37.18	22.12	59.30	105.45	-46.15	peak	100	28	

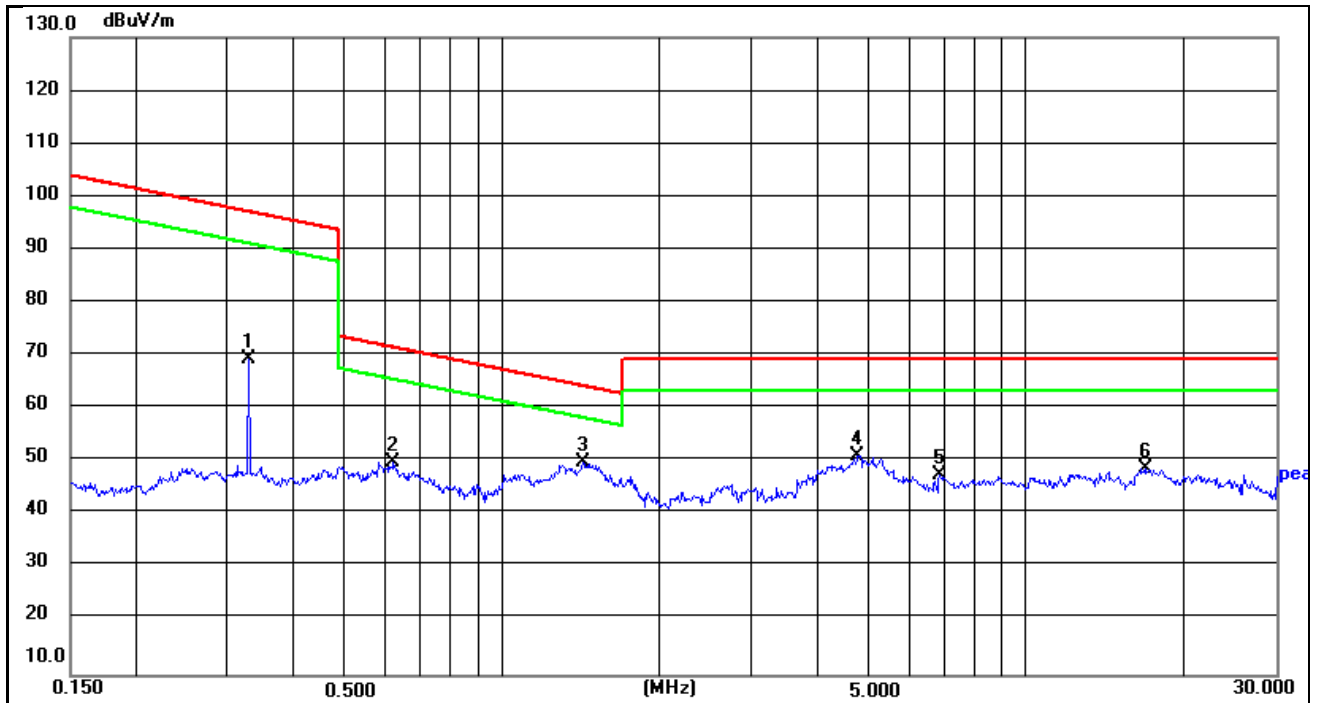


Site:	FCC Part15C-RE 150K-30MHz	Antenna::Z	Temperature(C):26(C)
Limit:	3 IN 1 WIRELESS CHARGING	Distance:3m	Humidity(%):54%
EUT:	STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.3285	48.04	21.53	69.57	97.27	-27.70	peak	100	65	
2	0.6205	27.97	22.14	50.11	71.75	-21.64	peak	100	165	
3 *	1.4254	27.53	22.51	50.04	64.53	-14.49	peak	100	241	
4	4.7713	28.25	23.21	51.46	69.54	-18.08	peak	100	157	
5	6.8410	24.69	23.04	47.73	69.54	-21.81	peak	100	285	
6	16.8384	25.46	23.53	48.99	69.54	-20.55	peak	100	321	

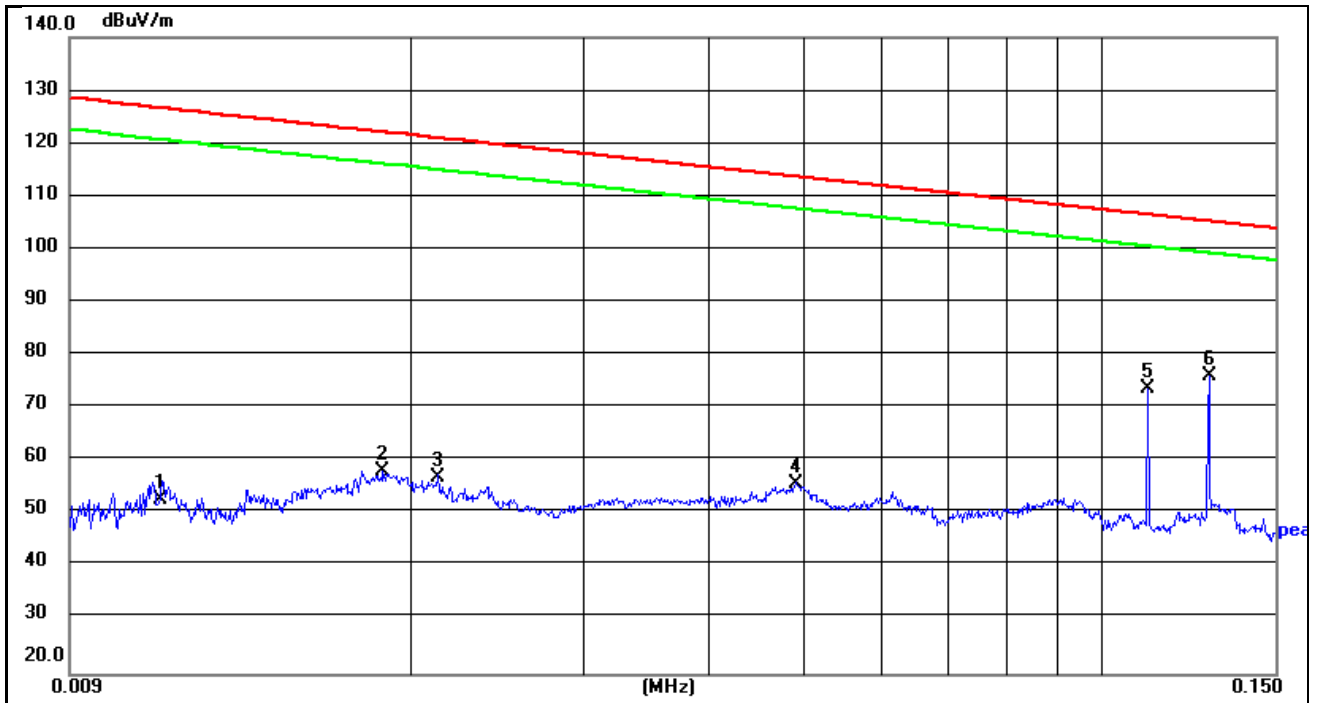


Site:		Antenna::X	Temperature(C):26(C)
Limit:	FCC Part15C-RE 9K-150kHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0111	31.75	21.36	53.11	126.70	-73.59	peak	100	154	
2	0.0187	37.39	20.88	58.27	122.17	-63.90	peak	100	232	
3	0.0212	36.39	20.87	57.26	121.08	-63.82	peak	100	103	
4	0.0490	33.38	22.54	55.92	113.80	-57.88	peak	100	174	
5	0.1111	51.63	22.29	73.92	106.69	-32.77	peak	100	164	
6	0.1282	54.18	22.12	76.30	105.45	-29.15	peak	100	352	

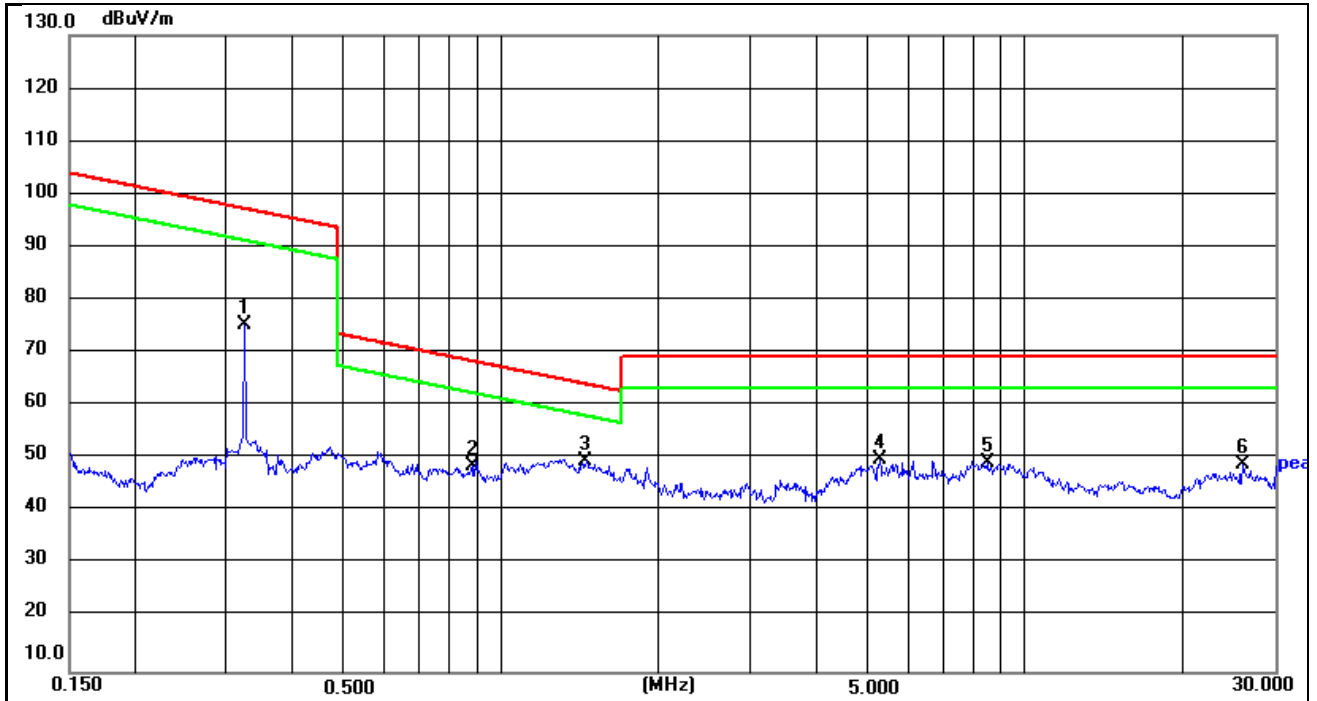


Site:		Antenna::X	Temperature(C):26(C)
Limit:	FCC Part15C-RE 150K-30MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.3234	54.04	21.52	75.56	97.41	-21.85	peak	100	252	
2	0.8800	26.27	22.55	48.82	68.71	-19.89	peak	100	352	
3	1.4559	27.32	22.51	49.83	64.34	-14.51	peak	100	284	
4	5.2770	26.87	23.26	50.13	69.54	-19.41	peak	100	135	
5	8.4560	26.66	22.82	49.48	69.54	-20.06	peak	100	31	
6	26.0012	27.63	21.66	49.29	69.54	-20.25	peak	100	68	

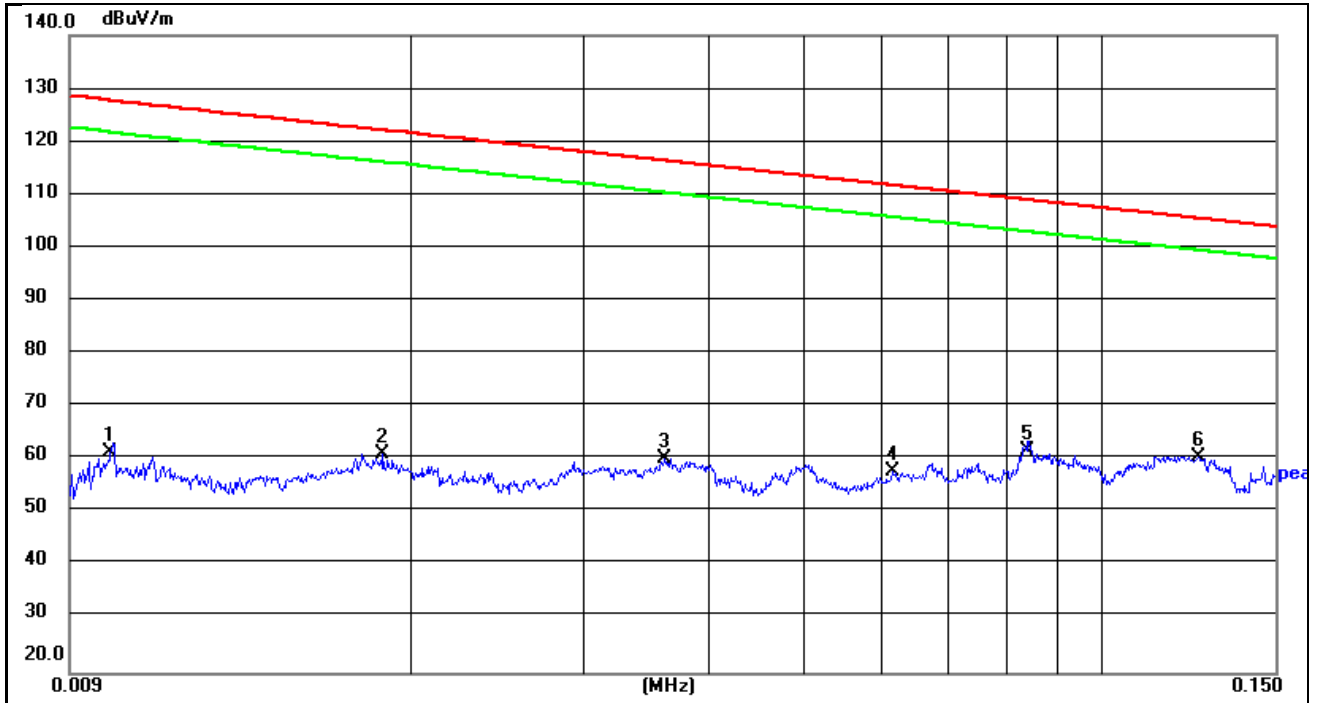


Site:		Antenna:: Y	Temperature(C): 26(C)
Limit:	FCC Part15C-RE 9K-150kHz	Distance: 3m	Humidity(%): 54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0100	40.28	21.43	61.71	127.60	-65.89	peak	100	51	
2	0.0187	40.39	20.88	61.27	122.17	-60.90	peak	100	251	
3	0.0361	38.79	21.77	60.56	116.45	-55.89	peak	100	184	
4	0.0613	35.39	22.64	58.03	111.86	-53.83	peak	100	257	
5	0.0840	39.32	22.64	61.96	109.12	-47.16	peak	100	28	
6 *	0.1252	38.49	22.15	60.64	105.65	-45.01	peak	100	125	

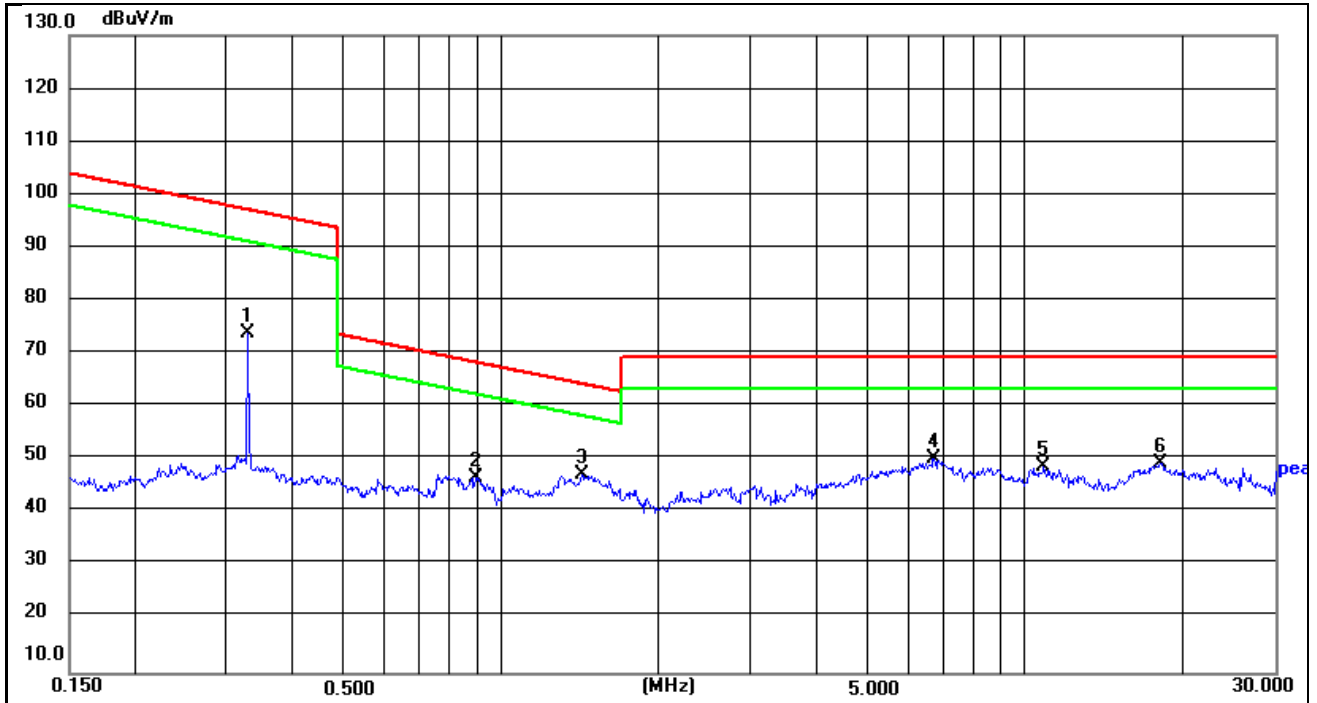


Site:	FCC Part15C-RE 150K-30MHz	Antenna::Y	Temperature(C):26(C)
Limit:	3 IN 1 WIRELESS CHARGING	Distance:3m	Humidity(%):54%
EUT:	STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.3285	52.54	21.53	74.07	97.27	-23.20	peak	100	152	
2	0.8941	24.32	22.56	46.88	68.58	-21.70	peak	100	154	
3 *	1.4254	25.03	22.51	47.54	64.53	-16.99	peak	100	215	
4	6.6977	27.42	23.06	50.48	69.54	-19.06	peak	100	174	
5	10.8473	26.19	22.77	48.96	69.54	-20.58	peak	100	236	
6	18.1352	26.12	23.47	49.59	69.54	-19.95	peak	100	321	

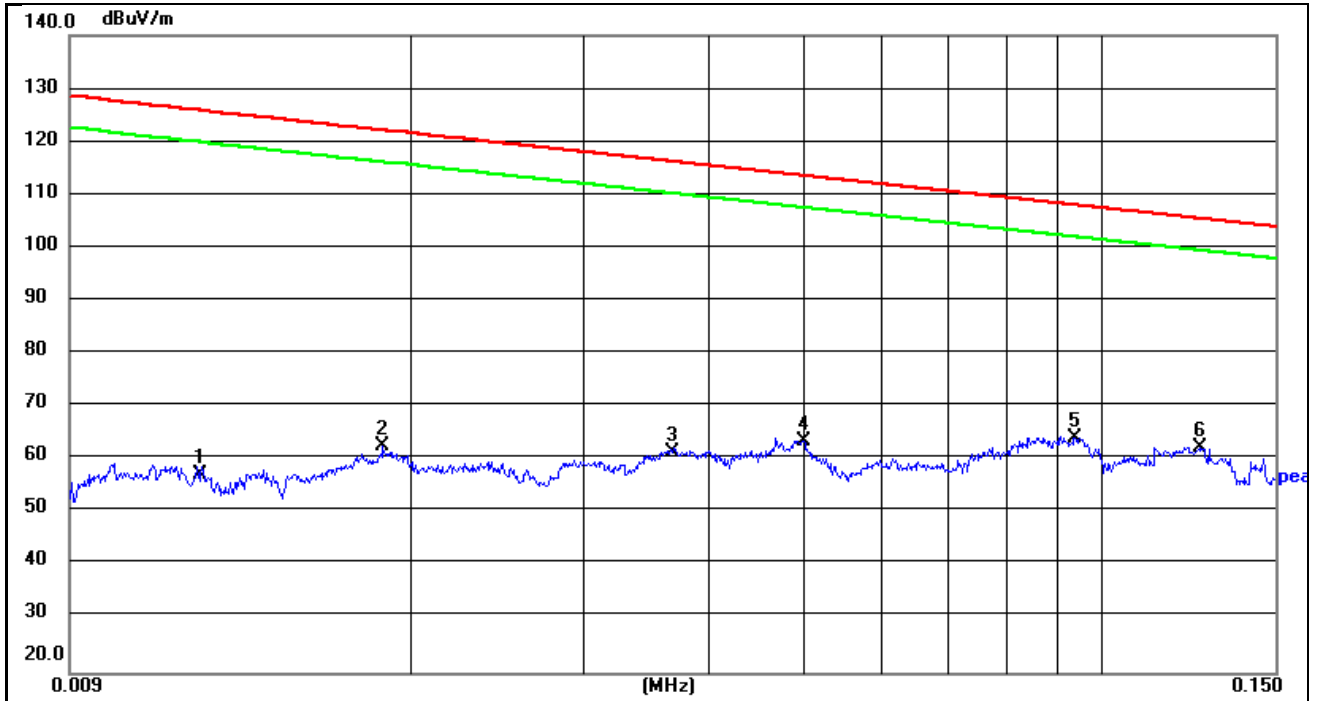


Site:		Antenna::Z	Temperature(C):26(C)
Limit:	FCC Part15C-RE 9K-150kHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0122	36.03	21.29	57.32	125.88	-68.56	peak	100	52	
2	0.0187	41.89	20.88	62.77	122.17	-59.40	peak	100	316	
3	0.0367	39.82	21.80	61.62	116.31	-54.69	peak	100	274	
4	0.0500	41.18	22.60	63.78	113.62	-49.84	peak	100	198	
5	0.0940	41.96	22.49	64.45	108.14	-43.69	peak	100	251	
6 *	0.1259	40.50	22.14	62.64	105.60	-42.96	peak	100	28	

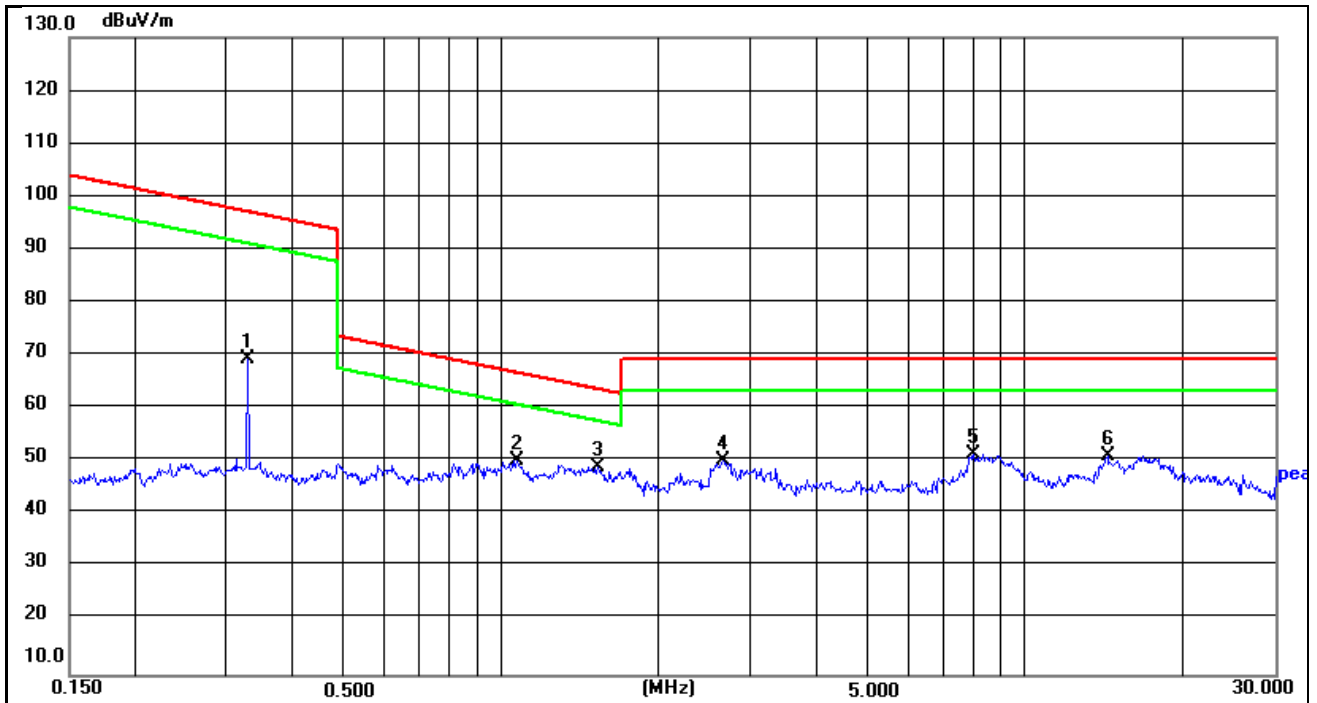


Site:		Antenna::Z	Temperature(C):26(C)
Limit:	FCC Part15C-RE 150K-30MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/06/26
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watche	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.3285	48.04	21.53	69.57	97.27	-27.70	peak	100	251	
2	1.0710	27.75	22.59	50.34	67.01	-16.67	peak	100	115	
3 *	1.5273	26.71	22.49	49.20	63.93	-14.73	peak	100	179	
4	2.6500	27.78	22.53	50.31	69.54	-19.23	peak	100	235	
5	7.9774	28.69	22.88	51.57	69.54	-17.97	peak	100	287	
6	14.3640	27.84	23.47	51.31	69.54	-18.23	peak	100	66	

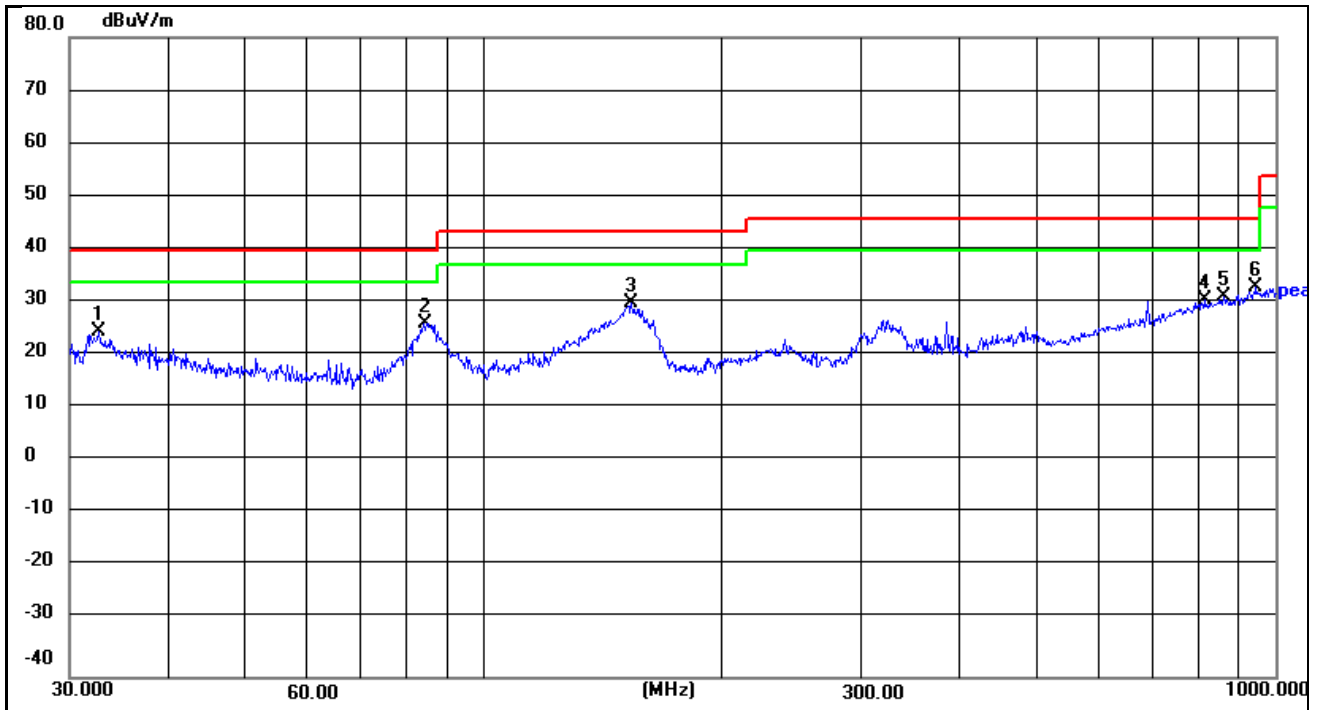


Site:		Antenna:: Vertical	Temperature(C): 26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance: 3m	Humidity(%): 54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/07
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Standby	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	32.6340	42.36	-17.39	24.97	40.00	-15.03	QP	100	51	
2	84.7019	47.49	-20.96	26.53	40.00	-13.47	QP	100	241	
3	153.7385	46.79	-16.52	30.27	43.50	-13.23	QP	100	47	
4	813.1115	36.64	-5.83	30.81	46.00	-15.19	QP	100	172	
5	860.0352	36.86	-5.30	31.56	46.00	-14.44	QP	100	234	
6	945.4399	36.88	-3.63	33.25	46.00	-12.75	QP	100	187	

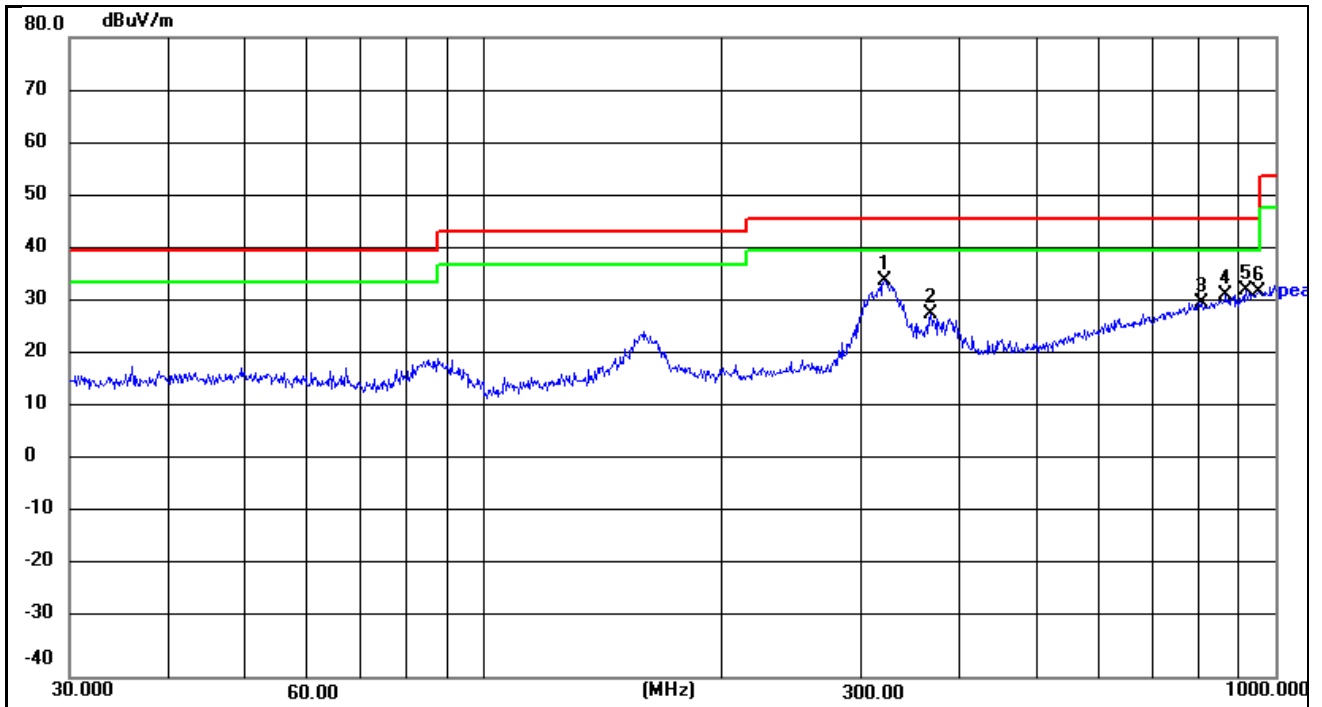


Site:		Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING	Test Time:	2025/07/07
	STAND		
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Standby	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	321.0608	50.86	-16.33	34.53	46.00	-11.47	QP	200	17	
2	366.8231	43.49	-15.31	28.18	46.00	-17.82	QP	200	254	
3	807.4290	36.20	-5.90	30.30	46.00	-15.70	QP	200	169	
4	866.0880	37.01	-5.21	31.80	46.00	-14.20	QP	200	28	
5	919.2865	36.95	-4.32	32.63	46.00	-13.37	QP	200	254	
6	952.0937	35.71	-3.51	32.20	46.00	-13.80	QP	200	312	

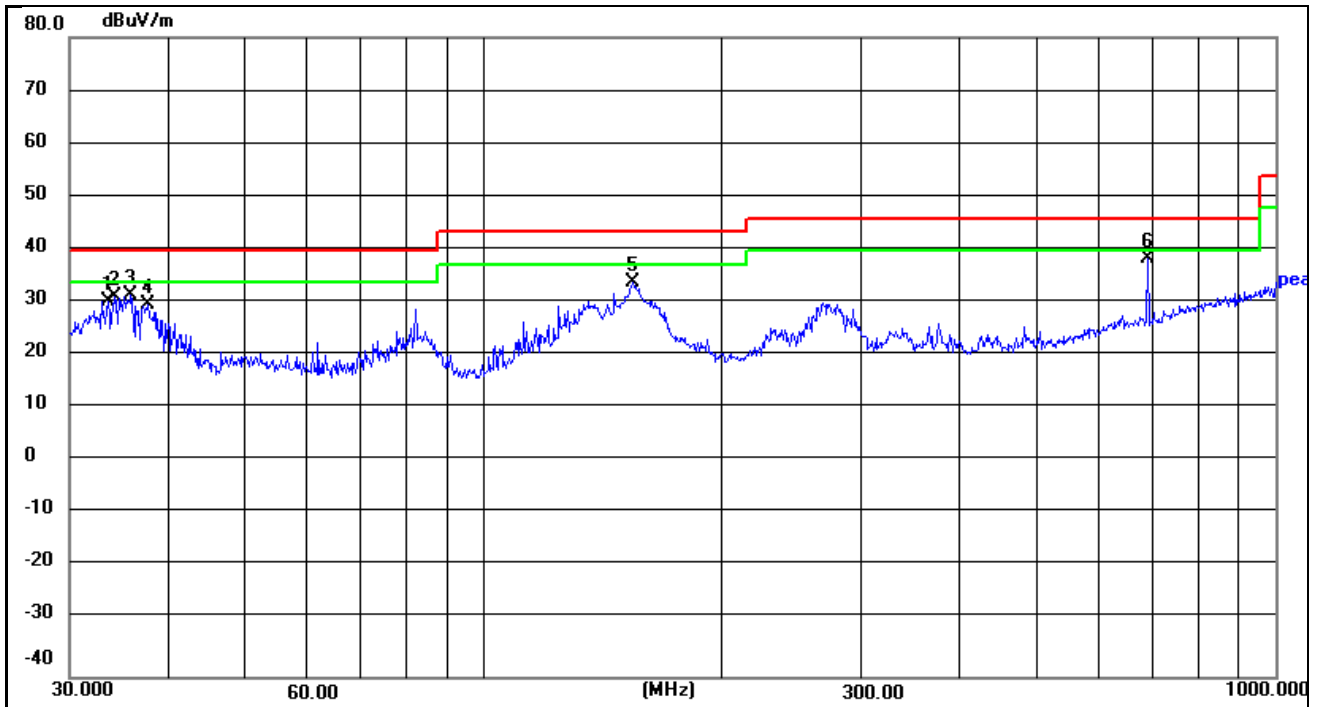


Site:	Antenna::Vertical	Temperature(C):26(C)
Limit: FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT: 3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/07
M/N.: #70416	Power Rating:	AC120/60Hz
Mode: Phone (15W)	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	33.5624	47.76	-17.31	30.45	40.00	-9.55	QP	100	174	
2	34.2760	48.71	-17.27	31.44	40.00	-8.56	QP	100	28	
3	35.8746	48.72	-17.09	31.63	40.00	-8.37	QP	100	352	
4	37.6797	46.65	-16.80	29.85	40.00	-10.15	QP	100	352	
5	154.2785	50.56	-16.51	34.05	43.50	-9.45	QP	100	187	
6	689.5644	46.84	-8.39	38.45	46.00	-7.55	QP	100	89	

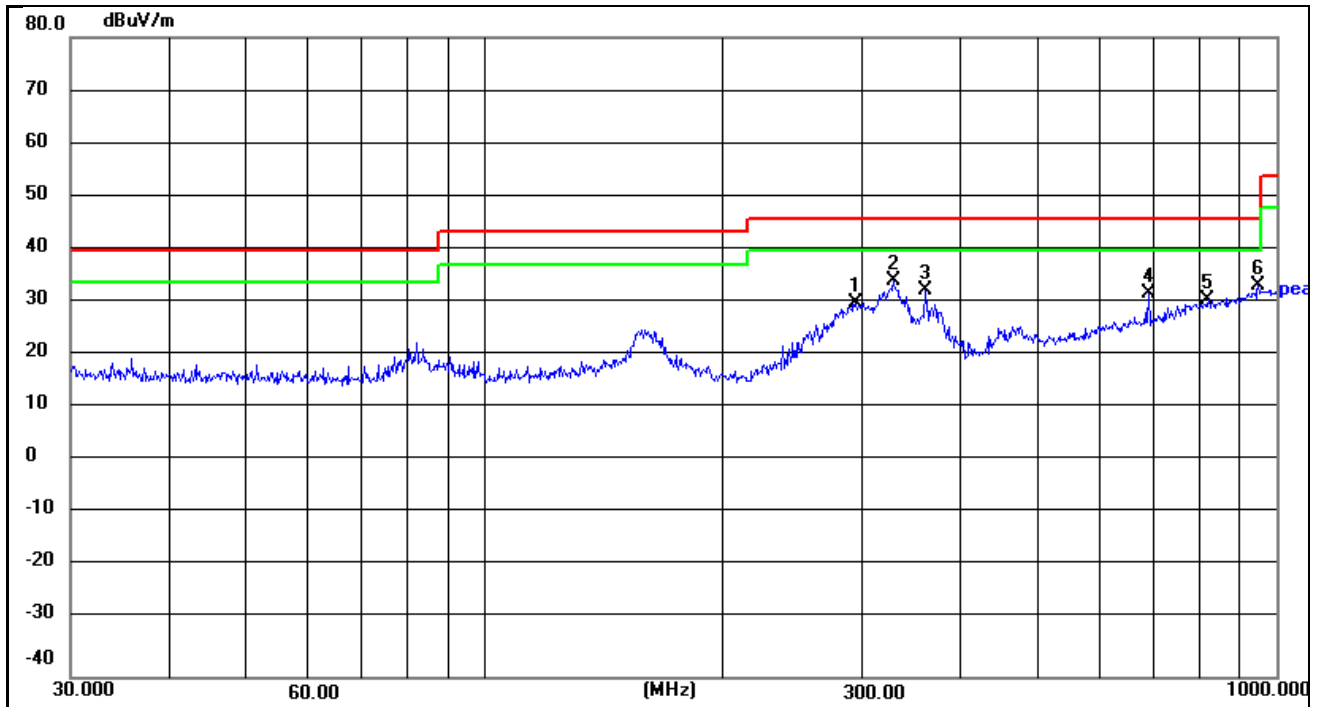


Site:		Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/07
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone (15W)	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	294.1137	47.25	-17.11	30.14	46.00	-15.86	QP	200	325	
2	327.8872	50.54	-16.17	34.37	46.00	-11.63	QP	200	325	
3	360.4476	48.17	-15.48	32.69	46.00	-13.31	QP	200	185	
4	689.5644	40.51	-8.39	32.12	46.00	-13.88	QP	200	38	
5	821.7103	36.54	-5.73	30.81	46.00	-15.19	QP	200	58	
6	948.7610	36.96	-3.55	33.41	46.00	-12.59	QP	200	254	

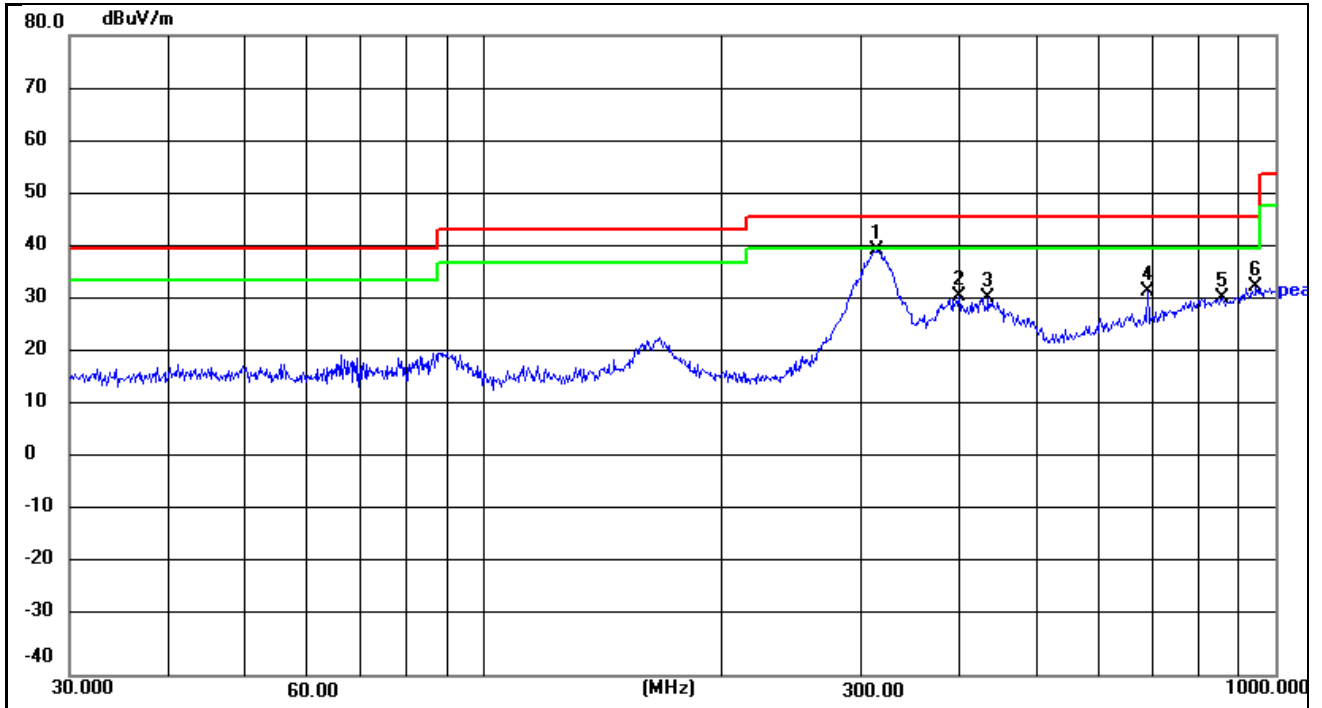


Site:		Antenna:: Horizontal	Temperature(C): 26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance: 3m	Humidity(%): 54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/07
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	314.3764	56.21	-16.53	39.68	46.00	-6.32	QP	200	233	
2	399.0302	45.65	-14.60	31.05	46.00	-14.95	QP	200	284	
3	434.0650	44.61	-13.66	30.95	46.00	-15.05	QP	200	185	
4	689.5644	40.46	-8.39	32.07	46.00	-13.93	QP	200	287	
5	857.0246	36.19	-5.33	30.86	46.00	-15.14	QP	200	152	
6	945.4400	36.55	-3.63	32.92	46.00	-13.08	QP	200	99	

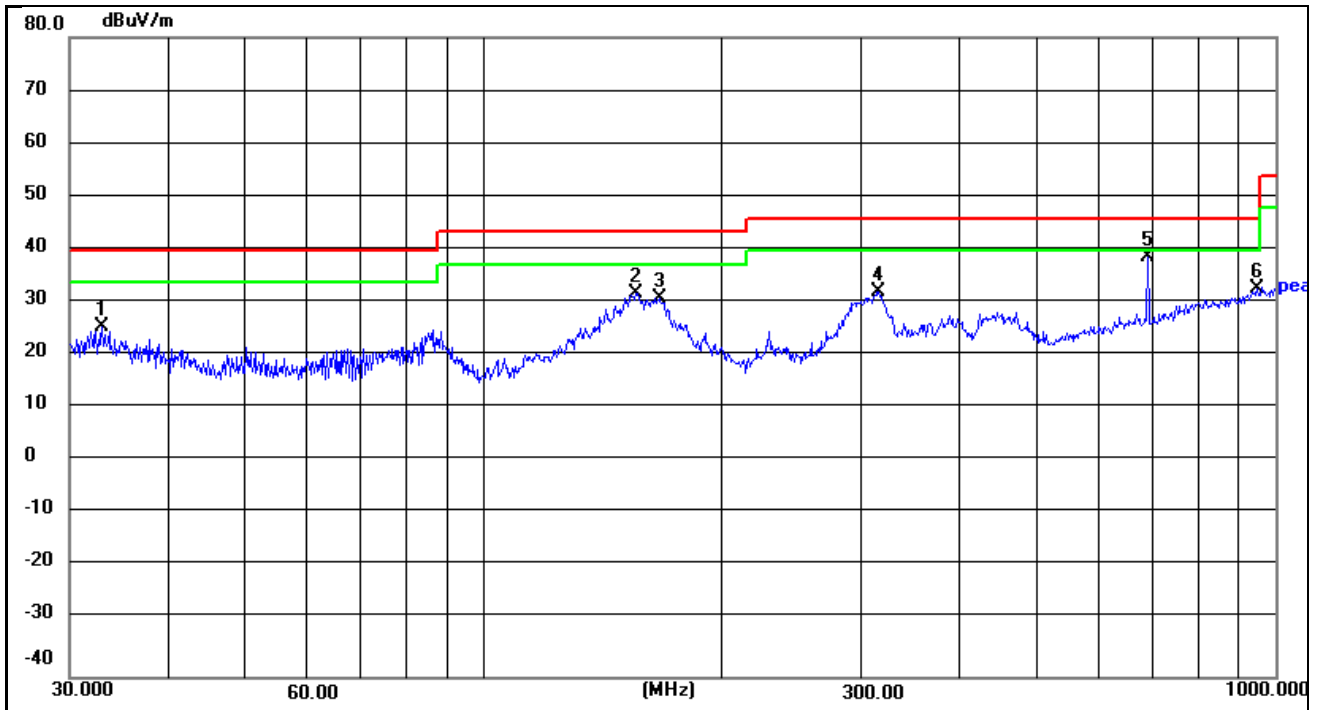


Site:		Antenna::Vertical	Temperature(C):26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/07
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	32.9791	43.20	-17.36	25.84	40.00	-14.16	QP	100	52	
2	155.9101	48.55	-16.53	32.02	43.50	-11.48	QP	100	217	
3	166.6514	47.85	-16.74	31.11	43.50	-12.39	QP	100	352	
4	315.4808	48.96	-16.49	32.47	46.00	-13.53	QP	100	284	
5	689.5644	47.20	-8.39	38.81	46.00	-7.19	QP	100	147	
6	948.7610	36.55	-3.55	33.00	46.00	-13.00	QP	100	113	

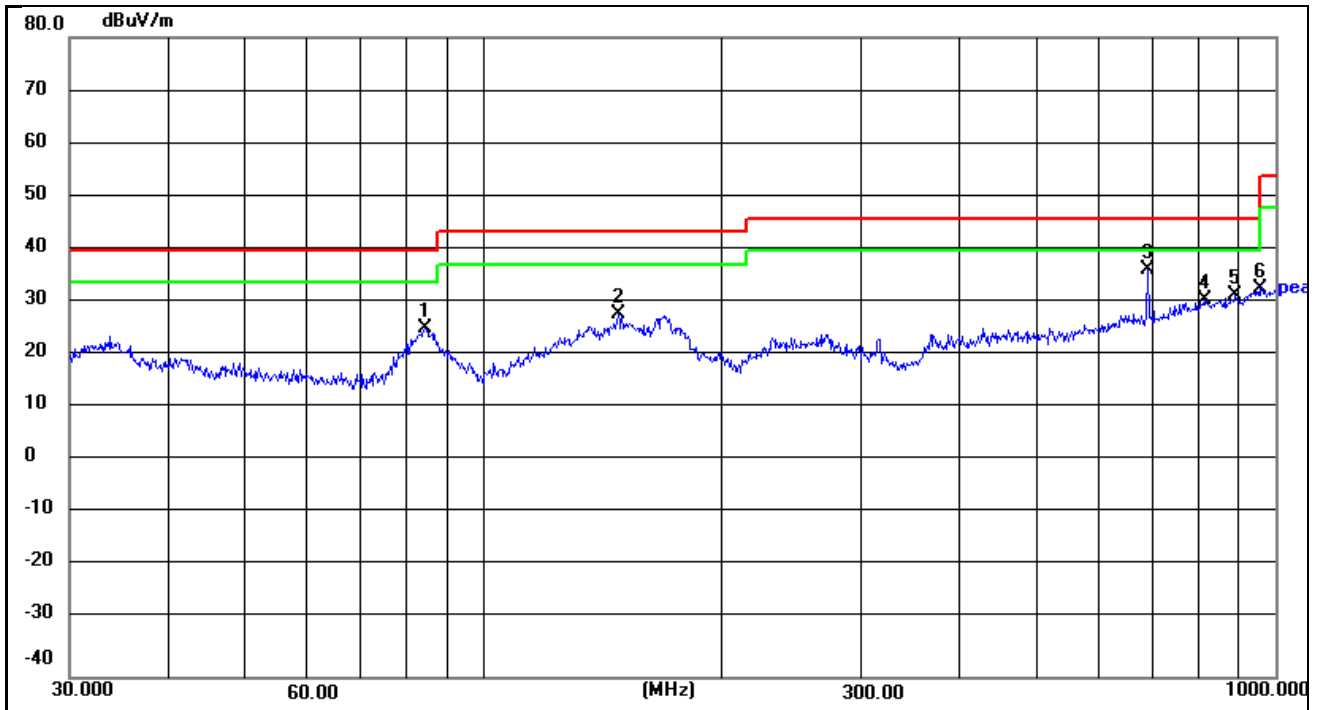


Site:	Antenna::Vertical	Temperature(C):26(C)
Limit: FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT: 3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/08
M/N.: #70416	Power Rating:	AC120/60Hz
Mode: Earbuds	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	84.4054	46.60	-20.96	25.64	40.00	-14.36	QP	100	254	
2	147.9214	44.96	-16.68	28.28	43.50	-15.22	QP	100	254	
3	689.5644	44.90	-8.39	36.51	46.00	-9.49	QP	100	121	
4	813.1115	36.54	-5.83	30.71	46.00	-15.29	QP	100	57	
5	890.7278	36.61	-4.93	31.68	46.00	-14.32	QP	100	57	
6	955.4381	36.35	-3.49	32.86	46.00	-13.14	QP	100	28	

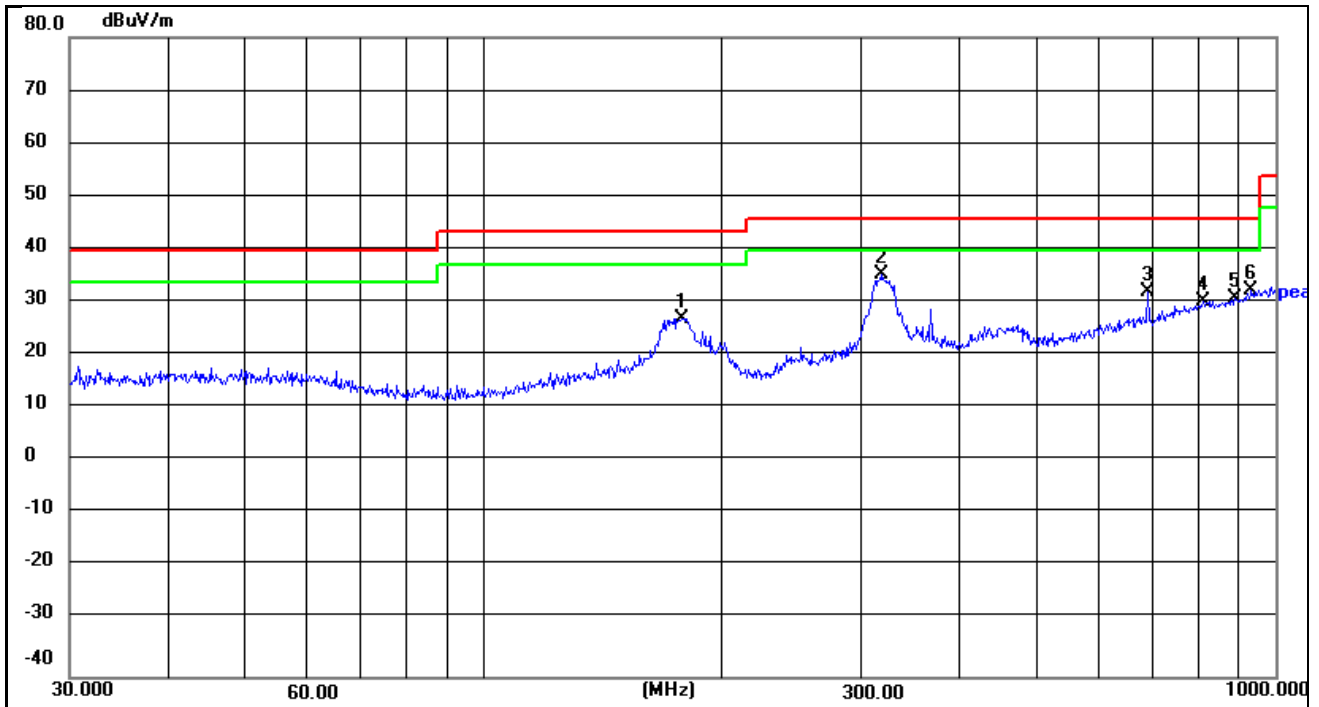


Site:	Antenna::Horizontal	Temperature(C):26(C)
Limit:	Distance:3m	Humidity(%):54%
EUT:	FCC Part15 RE-Class B_30-1000MHz	
	3 IN 1 WIRELESS CHARGING	Test Time: 2025/07/08
	STAND	
M/N.:	Power Rating:	AC120/60Hz
Mode:	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	178.1327	45.44	-18.03	27.41	43.50	-16.09	QP	200	135	
2	317.7010	52.00	-16.43	35.57	46.00	-10.43	QP	200	46	
3	689.5644	40.63	-8.39	32.24	46.00	-13.76	QP	200	68	
4	810.2653	36.53	-5.86	30.67	46.00	-15.33	QP	200	285	
5	890.7277	36.21	-4.93	31.28	46.00	-14.72	QP	200	144	
6	932.2715	36.74	-3.98	32.76	46.00	-13.24	QP	200	325	

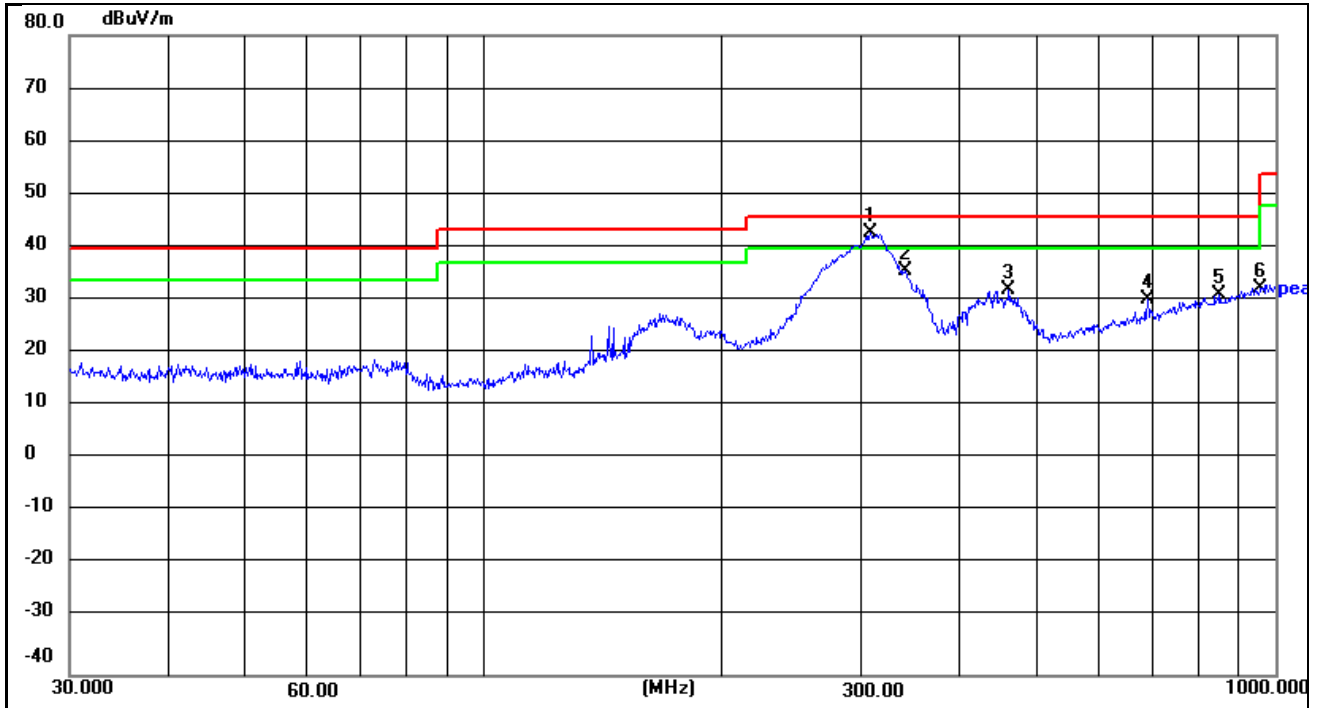


Site:	Antenna::Horizontal	Temperature(C):26(C)
Limit:	Distance:3m	Humidity(%):54%
EUT:	Test Time:	2025/07/08
M/N.:	Power Rating:	AC120/60Hz
Mode:	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	307.8312	59.73	-16.73	43.00	46.00	-3.00	QP	200	352	
2	340.7816	51.68	-15.93	35.75	46.00	-10.25	QP	200	57	
3	460.7271	45.27	-13.06	32.21	46.00	-13.79	QP	200	198	
4	689.5644	38.93	-8.39	30.54	46.00	-15.46	QP	200	257	
5	851.0353	36.84	-5.40	31.44	46.00	-14.56	QP	200	254	
6	958.7943	36.12	-3.48	32.64	46.00	-13.36	QP	200	151	

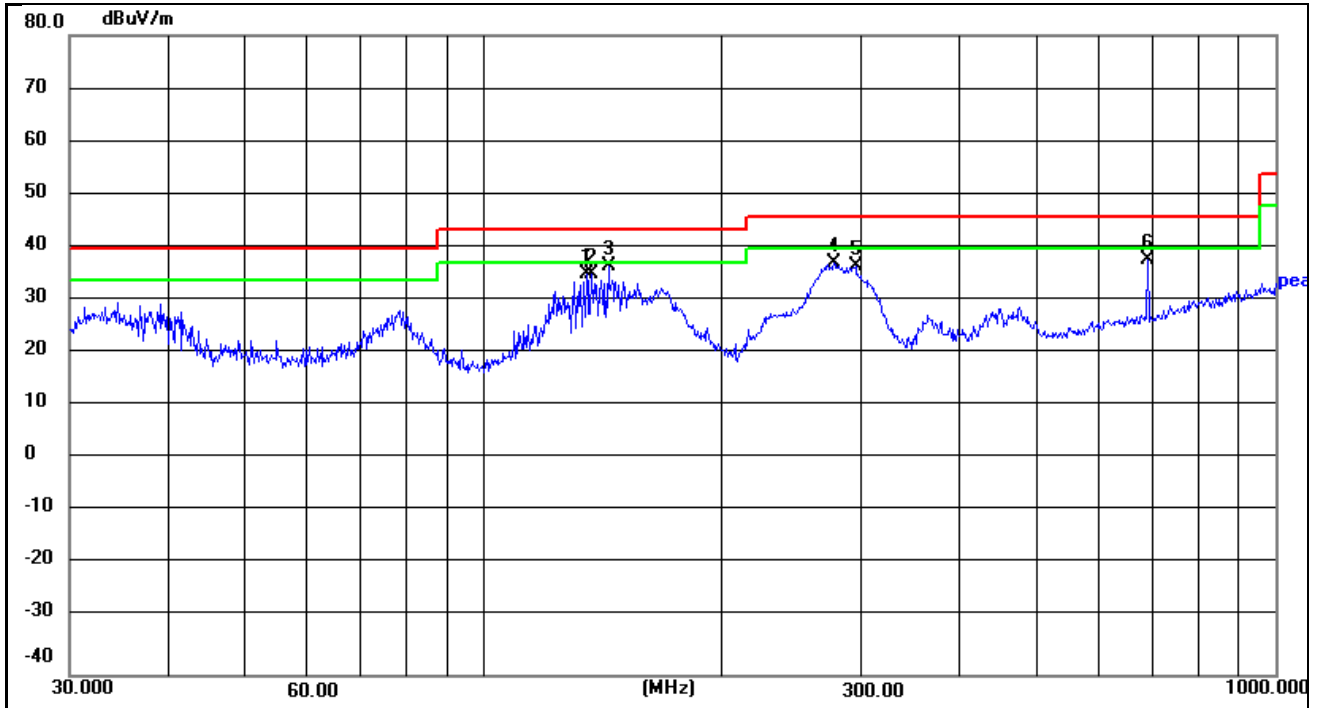


Site:		Antenna::Vertical	Temperature(C):26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/08
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	135.0318	52.93	-17.51	35.42	43.50	-8.08	QP	100	152	
2	136.9391	52.61	-17.45	35.16	43.50	-8.34	QP	100	46	
3	143.8295	53.81	-17.00	36.81	43.50	-6.69	QP	100	87	
4	277.0935	54.85	-17.59	37.26	46.00	-8.74	QP	100	325	
5	295.1468	53.82	-17.09	36.73	46.00	-9.27	QP	100	122	
6	689.5644	46.45	-8.39	38.06	46.00	-7.94	QP	100	128	

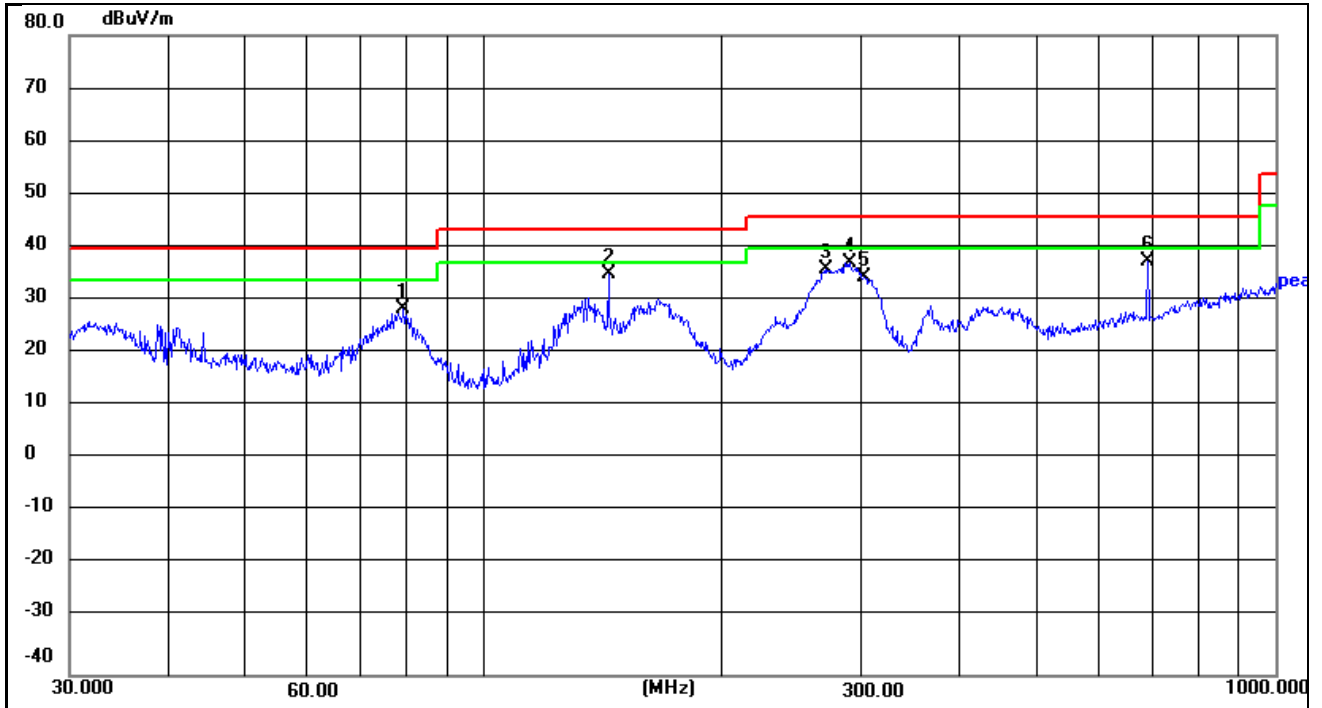


Site:	Antenna::Vertical	Temperature(C):26(C)
Limit:	Distance:3m	Humidity(%):54%
EUT:	Test Time:	2025/07/08
M/N.:	Power Rating:	AC120/60Hz
Mode:	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	79.2425	49.61	-20.78	28.83	40.00	-11.17	QP	100	266	
2	143.8295	52.43	-17.00	35.43	43.50	-8.07	QP	100	82	
3	270.3748	53.90	-17.82	36.08	46.00	-9.92	QP	100	73	
4	290.0172	54.65	-17.22	37.43	46.00	-8.57	QP	100	55	
5	302.4811	51.45	-16.88	34.57	46.00	-11.43	QP	100	251	
6	689.5644	46.01	-8.39	37.62	46.00	-8.38	QP	100	131	

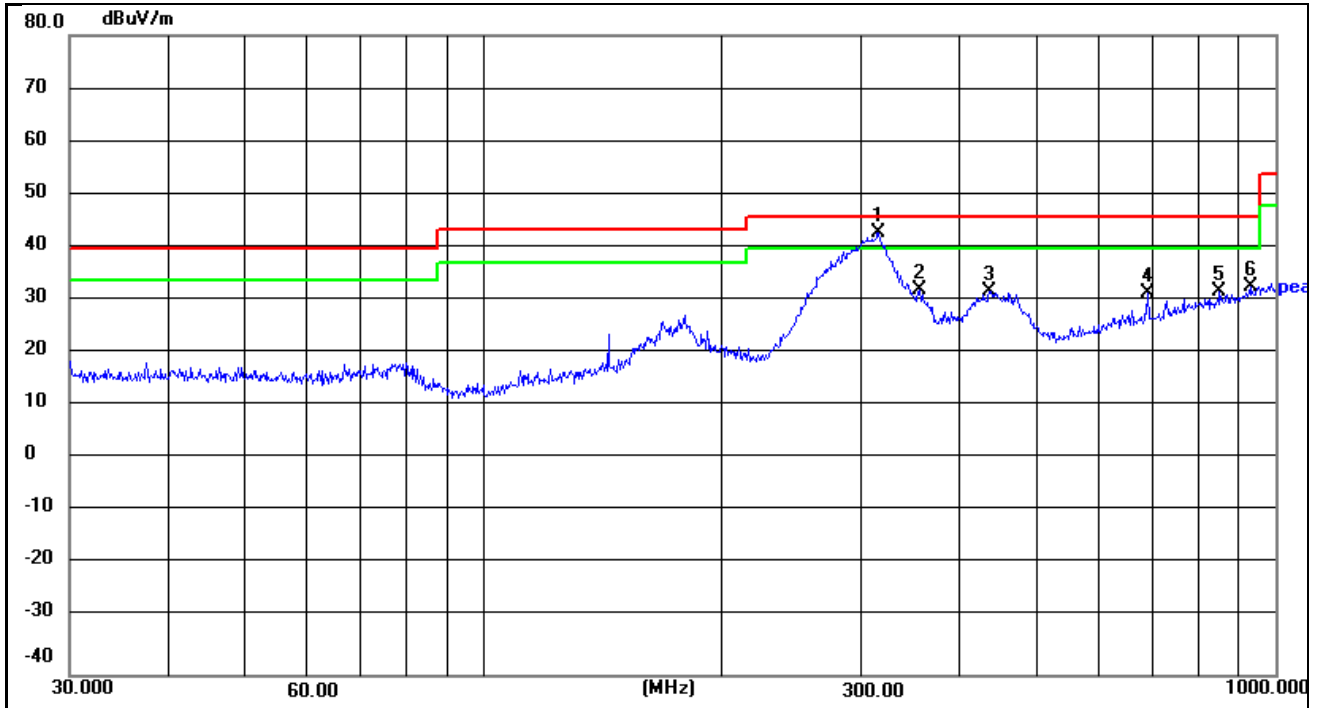


Site:		Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance:3m	Humidity(%):54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/08
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)+Earbuds+Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	315.4808	59.45	-16.49	42.96	46.00	-3.04	QP	200	125	
2	355.4273	47.91	-15.61	32.30	46.00	-13.70	QP	200	78	
3	435.5898	45.58	-13.61	31.97	46.00	-14.03	QP	200	99	
4	689.5644	40.25	-8.39	31.86	46.00	-14.14	QP	200	354	
5	851.0353	37.31	-5.40	31.91	46.00	-14.09	QP	200	285	
6	929.0082	37.09	-4.06	33.03	46.00	-12.97	QP	200	212	

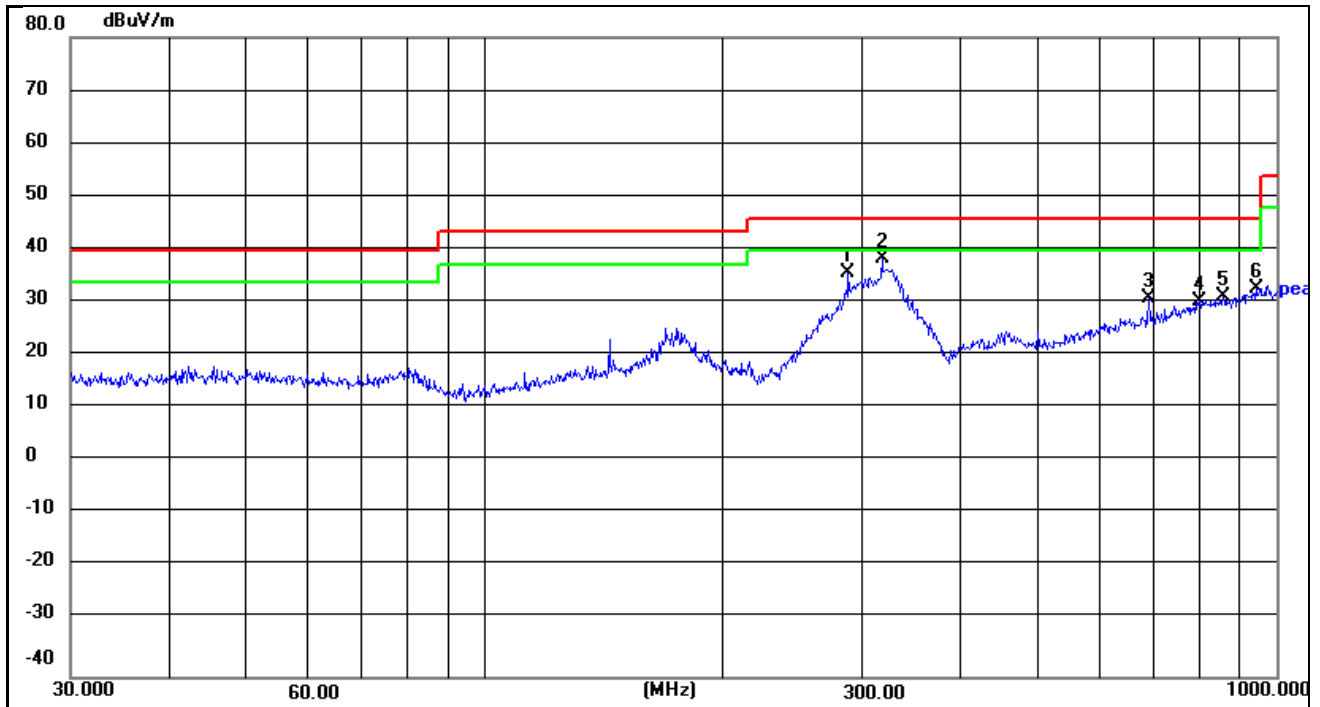

Site:	Antenna::Horizontal	Temperature(C):26(C)
Limit:	Distance:3m	Humidity(%):54%
EUT:	Test Time:	2025/07/08
M/N.:	Power Rating:	AC120/60Hz
Mode:	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	287.9904	53.18	-17.28	35.90	46.00	-10.10	QP	200	145	
2	317.7010	55.13	-16.43	38.70	46.00	-7.30	QP	200	322	
3	689.5644	39.45	-8.39	31.06	46.00	-14.94	QP	200	258	
4	798.9797	36.68	-5.99	30.69	46.00	-15.31	QP	200	68	
5	857.0246	36.87	-5.33	31.54	46.00	-14.46	QP	200	147	
6	942.1304	36.69	-3.72	32.97	46.00	-13.03	QP	200	125	

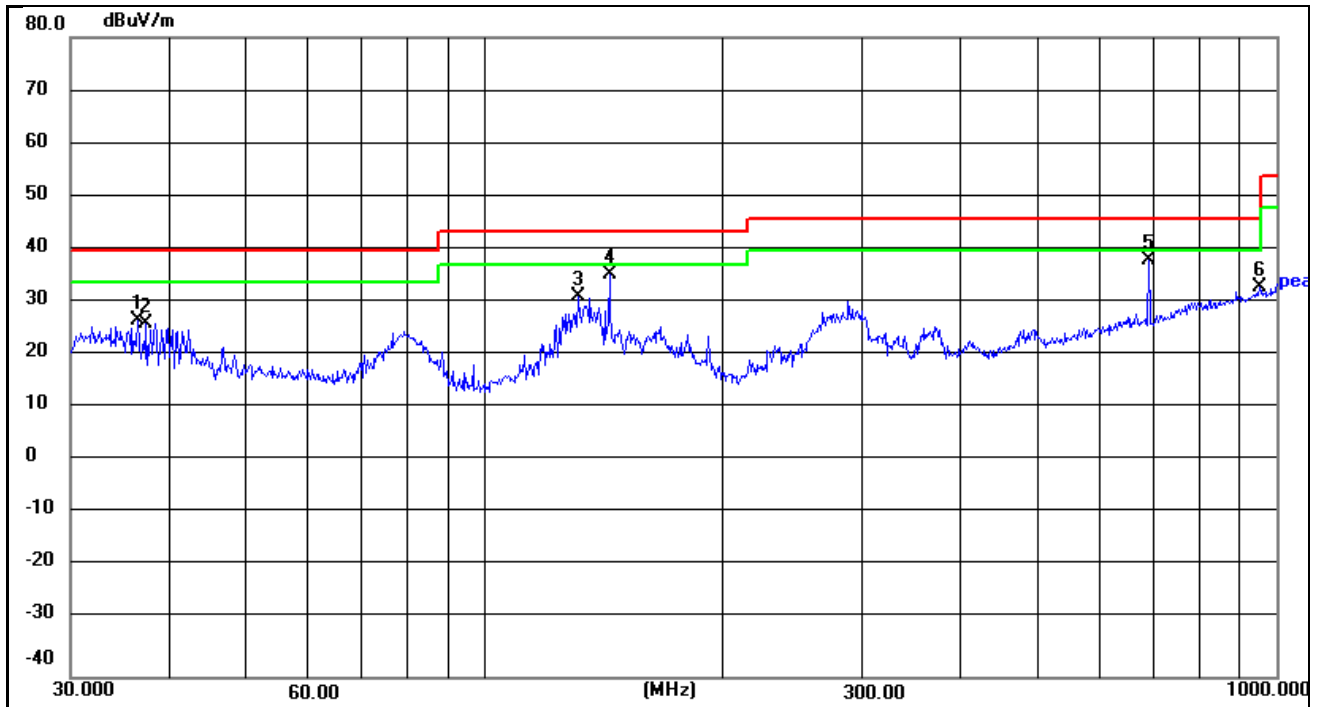


Site:		Antenna:: Vertical	Temperature(C): 26(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Distance: 3m	Humidity(%): 54%
EUT:	3 IN 1 WIRELESS CHARGING STAND	Test Time:	2025/07/08
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(5W)	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	36.5092	43.83	-16.98	26.85	40.00	-13.15	QP	100	320	
2	37.4165	43.17	-16.84	26.33	40.00	-13.67	QP	100	178	
3	131.2965	49.00	-17.66	31.34	43.50	-12.16	QP	100	255	
4	143.8295	52.62	-17.00	35.62	43.50	-7.88	QP	100	255	
5	689.5644	46.58	-8.39	38.19	46.00	-7.81	QP	100	258	
6	952.0937	36.58	-3.51	33.07	46.00	-12.93	QP	100	315	


Appendix A.3: Test Results of Conducted Emission on AC Mains

The worst-case mode 5 reported.

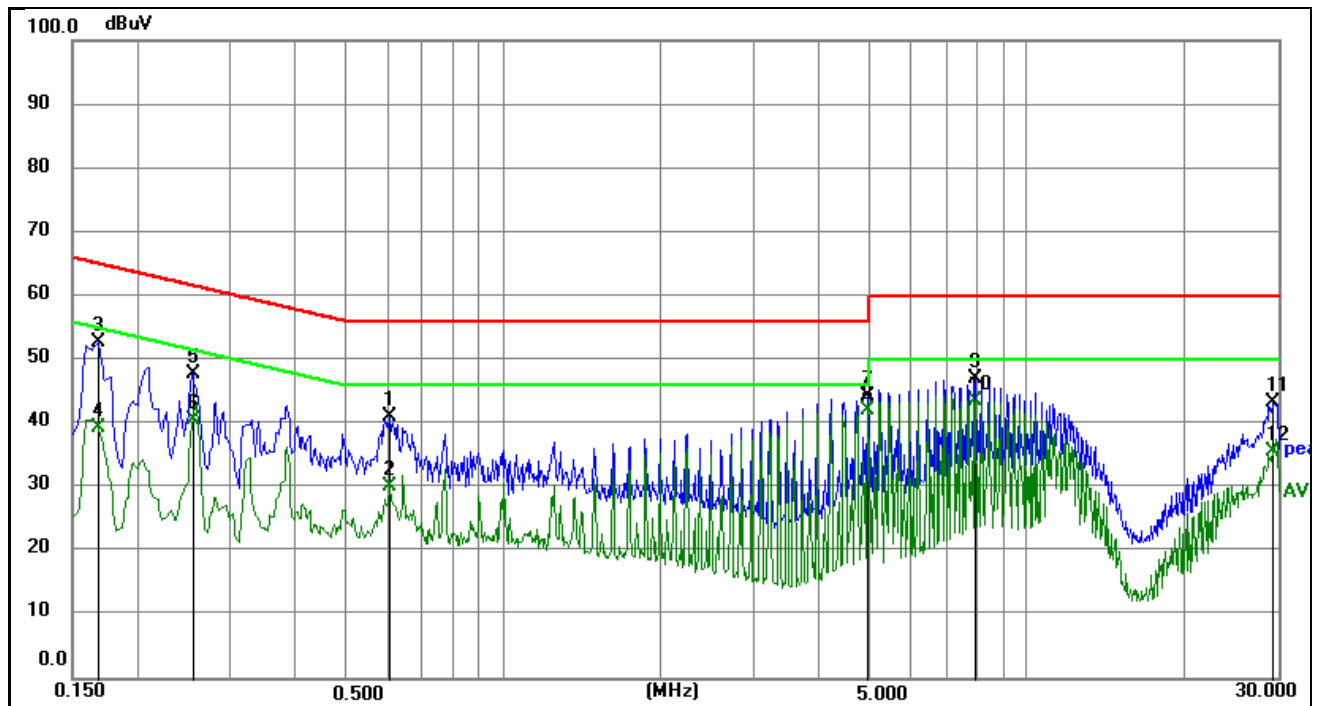

Site:	LAB	Phase: N	Temperature(C): 26(C)
Limit:	FCC Part15 CE-Class B_QP	Test Time:	Humidity(%): 54%RH
EUT:	3 IN 1 WIRELESS CHARGING STAND		2025/6/28
M/N.:	#70416	Power Rating:	AC120/60Hz
Mode:	Phone(15W)+Earbuds+Watch	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.6045	30.45	10.68	41.13	56.00	-14.87	QP
2	0.6045	19.44	10.68	30.12	46.00	-15.88	AVG
3	0.1680	42.13	10.67	52.80	65.06	-12.26	QP
4	0.1680	28.75	10.67	39.42	55.06	-15.64	AVG
5	0.2535	37.04	10.69	47.73	61.64	-13.91	QP
6	0.2535	29.76	10.69	40.45	51.64	-11.19	AVG
7	4.9740	33.40	11.01	44.41	56.00	-11.59	QP
8	4.9740	31.01	11.01	42.02	46.00	-3.98	AVG
9	7.9573	35.92	11.04	46.96	60.00	-13.04	QP
10	7.9573	32.44	11.04	43.48	50.00	-6.52	AVG
11	29.3820	31.61	11.61	43.22	60.00	-16.78	QP
12	29.3820	23.90	11.61	35.51	50.00	-14.49	AVG

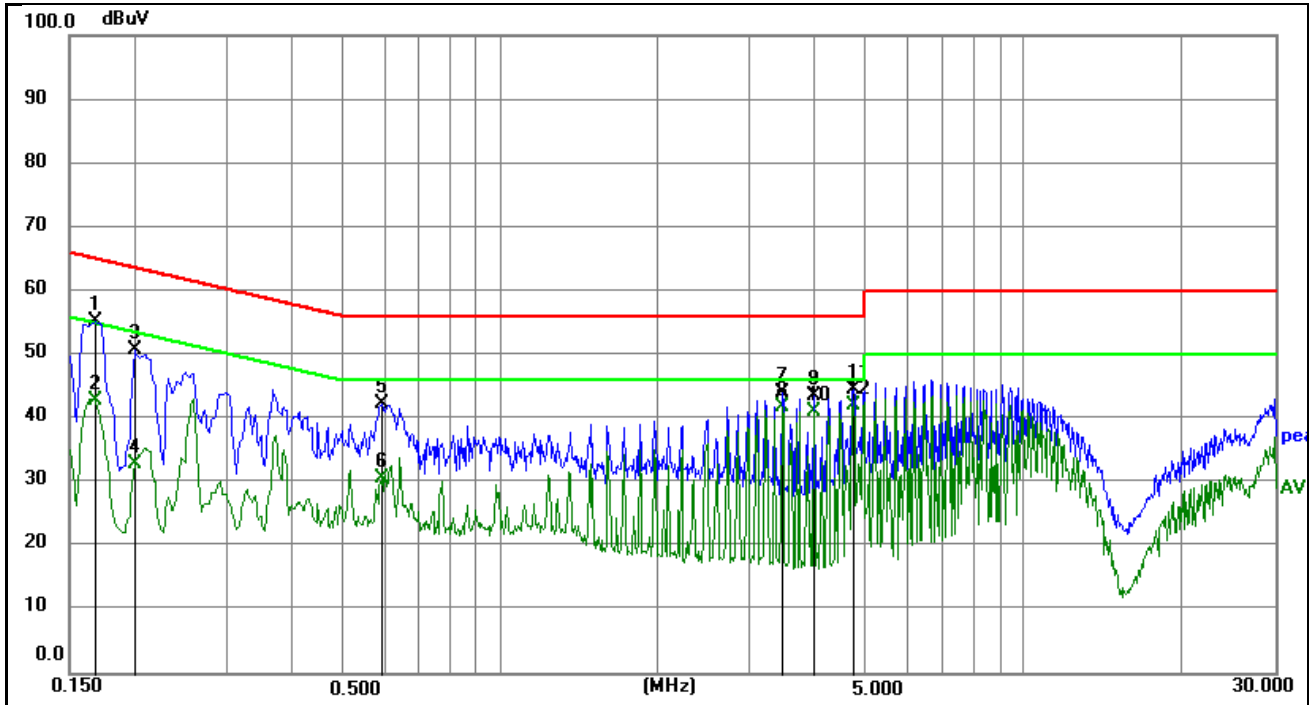

Site:	LAB	Phase:	L1	Temperature(C):	26(C)
Limit:	FCC Part15 CE-Class B_QP	Test Time:		Humidity(%):	54%RH
EUT:	3 IN 1 WIRELESS CHARGING STAND	Power Rating:	AC120/60Hz		
M/N.:	#70416	Test Engineer:			
Mode:	Phone(15W)+Earbuds+Watch				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1680	44.56	10.67	55.23	65.06	-9.83	QP
2	0.1680	32.22	10.67	42.89	55.06	-12.17	AVG
3	0.1995	39.96	10.70	50.66	63.63	-12.97	QP
4	0.1995	22.24	10.70	32.94	53.63	-20.69	AVG
5	0.5910	31.53	10.69	42.22	56.00	-13.78	QP
6	0.5910	20.06	10.69	30.75	46.00	-15.25	AVG
7	3.4440	33.12	10.97	44.09	56.00	-11.91	QP
8	3.4440	30.78	10.97	41.75	46.00	-4.25	AVG
9	3.9750	32.59	11.00	43.59	56.00	-12.41	QP
10	3.9750	29.96	11.00	40.96	46.00	-5.04	AVG
11	4.6993	33.51	11.01	44.52	56.00	-11.48	QP
12	4.6993	31.01	11.01	42.02	46.00	-3.98	AVG