



## FCC TEST REPORT

**FCC ID: 2ATFO-C7PRO**

On Behalf of

**ValueHD Corporation**

**Integrated UHD Video Conferencing Terminal**

**Model No.: C7Pro, T730Pro, C7lite, C7, C16**

Prepared for : ValueHD Corporation  
Address : 2-3/F, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, China

Prepared By : Shenzhen PSI Testing Co., Ltd.  
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2404064-C01-R11  
Date of Receipt : April 17, 2024  
Date of Test : April 17, 2024-May 14, 2024  
Date of Report : May 15, 2024  
Version Number : V0

## TABLE OF CONTENTS

| Description                                                      | Page       |
|------------------------------------------------------------------|------------|
| <b>1. Summary Of Standards And Results</b> -----                 | <b>6</b>   |
| 1.1. Description of Standards and Results -----                  | 6          |
| <b>2. General Information</b> -----                              | <b>7</b>   |
| 2.1. Description of Device (EUT) -----                           | 7          |
| 2.2. Accessories of Device (EUT) -----                           | 8          |
| 2.3. Tested Supporting System Details-----                       | 8          |
| 2.4. Block Diagram of Connection Between EUT and Simulators----- | 8          |
| 2.5. Test Mode Description-----                                  | 9          |
| 2.6. Test Conditions-----                                        | 10         |
| 2.7. Test Facility-----                                          | 10         |
| 2.8. Measurement Uncertainty -----                               | 10         |
| 2.9. Test Equipment List -----                                   | 11         |
| <b>3. Spurious Emission</b> -----                                | <b>12</b>  |
| 3.1. Test Limits -----                                           | 12         |
| 3.2. Block Diagram of Test setup -----                           | 13         |
| 3.3. Test Procedure -----                                        | 14         |
| 3.4. Test Results -----                                          | 15         |
| <b>4. Power Line Conducted Emission</b> -----                    | <b>26</b>  |
| 4.1. Test Limits -----                                           | 26         |
| 4.2. Test Procedure -----                                        | 26         |
| 4.3. Test Setup -----                                            | 26         |
| 4.4. Test Results -----                                          | 27         |
| <b>5. Out-of-band Emissions</b> -----                            | <b>30</b>  |
| 5.1. Test Limits -----                                           | 30         |
| 5.2. Test Procedure -----                                        | 30         |
| 5.3. Test Setup -----                                            | 30         |
| 5.4. Test Results -----                                          | 30         |
| <b>6. Conducted Maximum Output Power</b> -----                   | <b>61</b>  |
| 6.1. Test limits -----                                           | 61         |
| 6.2. Test Procedure -----                                        | 61         |
| 6.3. Test Setup -----                                            | 61         |
| 6.4. Test Results -----                                          | 62         |
| <b>7. Peak Power Spectral Density</b> -----                      | <b>64</b>  |
| 7.1. Test limits -----                                           | 64         |
| 7.2. Test Procedure -----                                        | 64         |
| 7.3. Test Setup -----                                            | 64         |
| 7.4. Test Results -----                                          | 65         |
| <b>8. Bandwidth</b> -----                                        | <b>84</b>  |
| 8.1. Test limits -----                                           | 84         |
| 8.2. Test Procedure -----                                        | 84         |
| 8.3. Test Setup -----                                            | 84         |
| 8.4. Test Results -----                                          | 84         |
| <b>9. Band Edge Test</b> -----                                   | <b>104</b> |
| 9.1. Block Diagram of Test Setup-----                            | 104        |
| 9.2. Test Limit-----                                             | 104        |
| 9.3. Test Procedure -----                                        | 104        |
| 9.4. Test Results -----                                          | 105        |
| <b>10. Antenna Requirement</b> -----                             | <b>111</b> |
| 10.1. Standard Requirement -----                                 | 111        |
| 10.2. Antenna Connected Construction -----                       | 111        |
| 10.3. Results -----                                              | 111        |
| <b>11. Photos of test setup</b> -----                            | <b>112</b> |

**12. Photos of EUT ----- 112**

## TEST REPORT DECLARATION

Applicant : ValueHD Corporation  
Address : 2-3/F, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, China  
Manufacturer : ValueHD Corporation  
Address : 2-3/F, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, China  
EUT Description : Integrated UHD Video Conferencing Terminal  
(A) Model No. : C7Pro, T730Pro, C7lite, C7, C16  
(B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10-2013**

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang  
Test Engineer

*Felix Pang*  
.....

Approved by (name + signature).....:

Simple Guan  
Project Manager

*Simple Guan*  
.....

Date of issue.....:

May 15, 2024

### Revision History

| Revision | Issue Date   | Revisions              | Revised By |
|----------|--------------|------------------------|------------|
| V0       | May 15, 2024 | Initial released Issue | Felix Pang |



## 1. Summary Of Standards And Results

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

| Test Item                                                                                                                                                                                                                                                                                                                                                                                                                                 | Standards Paragraph                        | Result |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------|
| Radiated Spurious Emission                                                                                                                                                                                                                                                                                                                                                                                                                | FCC Part 15: 15.209<br>FCC Part 15: 15.205 | P      |
| Radiated Band Edge Emission                                                                                                                                                                                                                                                                                                                                                                                                               | FCC Part 15: 15.247(d)                     | P      |
| Power Line Conducted Emissions                                                                                                                                                                                                                                                                                                                                                                                                            | FCC Part 15: 15.207                        | P      |
| 6dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                             | FCC PART 15:15.247(a)(2)                   | P      |
| Output Power                                                                                                                                                                                                                                                                                                                                                                                                                              | FCC Part 15: 15.247(b)(3)                  | P      |
| Out-of-band Emissions                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part 15: 15.247(d)                     | P      |
| Power Spectral Density                                                                                                                                                                                                                                                                                                                                                                                                                    | FCC PART 15:15.247(e)                      | P      |
| Antenna Requirement                                                                                                                                                                                                                                                                                                                                                                                                                       | FCC Part 15: 15.203                        | P      |
| <p>Note:</p> <ol style="list-style-type: none"><li>1. P is an abbreviation for Pass.</li><li>2. F is an abbreviation for Fail.</li><li>3. N/A is an abbreviation for Not Applicable.</li><li>4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.</li></ol> |                                            |        |

## 2. General Information

### 2.1. Description of Device (EUT)

Product Name : Integrated UHD Video Conferencing Terminal  
 Model : C7Pro, T730Pro, C7lite, C7, C16  
 Diff : There is no difference except the name of the model. All tests are made with the C7Pro model.

Test Voltage : DC 12V from Adapter

|                        |                                                                                                                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radio technology       | : 2.4G WiFi                                                                                                                                                                                              |
| Operation frequency    | : 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20, ax20<br>2422MHz-2452MHz for IEEE 802.11 n/HT40, ax40                                                                                                     |
| Channel No.            | : 802.11b/802.11g/802.11n(HT20)/ 802.11ax20: 11CH<br>802.11(HT40)/802.11ax40: 7CH                                                                                                                        |
| Modulation type        | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n:OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11ax: OFDMA (64QAM, 16QAM, QPSK, BPSK, 256QAM, 1024QAM) |
| Antenna Type           | : Internal antenna 1, Maximum Gain is 3.89dBi.<br>Internal antenna 2, Maximum Gain is 3.35dBi.                                                                                                           |
| Software version       | : V1.0                                                                                                                                                                                                   |
| Hardware version/FVIN  | : V1.0                                                                                                                                                                                                   |
| Intend use environment | : Residential, commercial and light industrial environment                                                                                                                                               |
| Note                   | : Antenna information is provided by applicant.<br>Testing lab is not responsible for the accuracy of the information.                                                                                   |

## 2.2. Accessories of Device (EUT)

Accessories : AC ADAPTER 1  
 Manufacturer : SHEN ZHEN TRANSIN TECHNOLOGIES CO., LTD  
 Model : TS-A036-120300M  
 Rating : Input: 100-240V~50/60Hz 1.2A  
 Output: DC 12.0V/3.0A


Accessories : AC ADAPTER 2  
 Manufacturer : Mass Power Electronics Inc.  
 Model : S042-1B120300M2  
 Rating : Input: 100-240V~50/60Hz 1.0A  
 Output: DC 12.0V/3.0A

Accessories : AC ADAPTER 3  
 Manufacturer : EDACPOWER ELEC.  
 Model : EA10681U-120  
 Rating : Input: 100-240V~50/60Hz 2.0A  
 Output: DC 12.0V/6.0A

## 2.3. Tested Supporting System Details

| No. | Description | Manufacturer | Model | Serial Number |
|-----|-------------|--------------|-------|---------------|
| 1   | N/A         | N/A          | N/A   | N/A           |

## 2.4. Block Diagram of Connection Between EUT and Simulators





## 2.5. Test Mode Description

| Keeping TX                                                                                                                          |                  |             |                |
|-------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------|----------------|
| Mode                                                                                                                                | Data rate (Mbps) | Channel     | Frequency(MHz) |
| IEEE 802.11 b                                                                                                                       | 1                | Low :CH1    | 2412           |
|                                                                                                                                     | 1                | Middle: CH6 | 2437           |
|                                                                                                                                     | 1                | High: CH11  | 2462           |
| IEEE 802.11 g                                                                                                                       | 6                | Low :CH1    | 2412           |
|                                                                                                                                     | 6                | Middle: CH6 | 2437           |
|                                                                                                                                     | 6                | High: CH11  | 2462           |
| IEEE 802.11 n/HT20                                                                                                                  | 6.5              | Low :CH1    | 2412           |
|                                                                                                                                     | 6.5              | Middle: CH6 | 2437           |
|                                                                                                                                     | 6.5              | High: CH11  | 2462           |
| IEEE 802.11 n/HT40                                                                                                                  | 13.5             | Low :CH1    | 2422           |
|                                                                                                                                     | 13.5             | Middle:CH4  | 2437           |
|                                                                                                                                     | 13.5             | High:CH7    | 2452           |
| IEEE 802.11 ax20                                                                                                                    | 8                | Low :CH1    | 2412           |
|                                                                                                                                     | 8                | Middle: CH7 | 2442           |
|                                                                                                                                     | 8                | High: CH13  | 2472           |
| IEEE 802.11 ax40                                                                                                                    | 16               | Low :CH3    | 2422           |
|                                                                                                                                     | 16               | Middle: CH7 | 2442           |
|                                                                                                                                     | 16               | High: CH11  | 2462           |
| Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test. |                  |             |                |

| Channel list:                     |                 |         |                 |         |                 |
|-----------------------------------|-----------------|---------|-----------------|---------|-----------------|
| For IEEE 802.11b, g, n/HT20, ax20 |                 |         |                 |         |                 |
| Channel                           | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| CH1                               | 2412            | CH5     | 2432            | CH9     | 2452            |
| CH2                               | 2417            | CH6     | 2437            | CH10    | 2457            |
| CH3                               | 2422            | CH7     | 2442            | CH11    | 2462            |
| CH4                               | 2427            | CH8     | 2447            |         |                 |
| For IEEE 802.11 n/HT40, ax40      |                 |         |                 |         |                 |
| Channel                           | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| CH1                               | 2422            | CH5     | 2442            |         |                 |
| CH2                               | 2427            | CH6     | 2447            |         |                 |
| CH3                               | 2432            | CH7     | 2452            |         |                 |
| CH4                               | 2437            |         |                 |         |                 |

Note: The product comes with three adapters for use, all of which have been tested. The report reflects the data of the worst TS-A036-120300M adapter model.

## 2.6. Test Conditions

| Items              | Required  | Actual |
|--------------------|-----------|--------|
| Temperature range: | 15-35℃    | 24℃    |
| Humidity range:    | 25-75%    | 56%    |
| Pressure range:    | 86-106kPa | 98kPa  |

## 2.7. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

| Item                                                                   | Uncertainty          |
|------------------------------------------------------------------------|----------------------|
| Uncertainty for Power point Conducted Emissions Test                   | 2.17dB               |
| Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)    | 3.5dB                |
| Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)  | 2.74dB(Polarize: V)  |
|                                                                        | 2.76dB(Polarize: H)  |
| Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)  | 4.29dB(Polarize: V)  |
|                                                                        | 4.82dB(Polarize: H)  |
| Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz) | 4.31 dB(Polarize: V) |
|                                                                        | 4.30 dB(Polarize: H) |
| Uncertainty for radio frequency                                        | 48.24KHz             |
| Uncertainty for conducted RF Power                                     | 0.41dB               |
| Uncertainty for Power Spectral Density                                 | 0.39 dB              |

## 2.9. Test Equipment List

| Item | Equipment              | Manufacturer  | Model No.         | Serial No.               | Firmware Version | Last Cal.  | Cal. Interval |
|------|------------------------|---------------|-------------------|--------------------------|------------------|------------|---------------|
| 1.   | 9*6*6 anechoic chamber | SKET          | 9*6*6             | N/A                      | /                | 2022.12.20 | 3 Year        |
| 2.   | Test Receiver          | Rohde&Schwarz | ESCI 7            | 101032/003               | 4.42 SP3         | 2023.12.19 | 1 Year        |
| 3.   | L.I.S.N.#1             | Rohde&Schwarz | ENV216            | 102282                   | /                | 2023.12.19 | 1 Year        |
| 4.   | L.I.S.N.#2             | RFT           | NNB111            | 13835240                 | /                | 2023.12.19 | 1 Year        |
| 5.   | Loop Antenna           | Schwarz beck  | FMZB 1519B        | 00128                    | /                | 2023.04.03 | 2 Year        |
| 6.   | Bilog Antenna          | Schwarz beck  | VULB 9168         | 01448                    | /                | 2022.12.26 | 2 Year        |
| 7.   | Spectrum Analyzer      | Rohde&Schwarz | FSV-40N           | 101648                   | 3.70             | 2023.12.19 | 1 Year        |
| 8.   | Horn Antenna           | Schwarz beck  | BBHA 9120 D       | 02706                    | /                | 2022.12.26 | 2 Year        |
| 9.   | Amplifier              | SKET          | LAPA_01G1 8G-45dB | SK20220329 01            | /                | 2023.12.19 | 1 Year        |
| 10.  | Horn Antenna           | Schwarz beck  | BBHA 9170         | 00946                    | /                | 2022.12.25 | 2 Year        |
| 11.  | Amplifier              | SKET          | LNPA_0118 G-45    | SK20200108 01            | /                | 2023.12.19 | 1 Year        |
| 12.  | RF Power Probe         | Rohde&Schwarz | NRP-Z11           | 1138.3004.02 -1111533-Fz | /                | 2023.12.19 | 1 Year        |

## For Test Software Information

| Item | Software Name | Manufacturer | Version |
|------|---------------|--------------|---------|
| RE   | EZ EMC        | Farad        | PSI-3A1 |
| CE   | EZ EMC        | Farad        | PSI-3A1 |
| RF   | RTS           | TACHOY       | V1.0.0  |

### 3. Spurious Emission

#### 3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |


#### 15.209 Limit

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                                             |                                   |
|------------------|--------------------|---------------------------------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V}/\text{m}$                                                                            | $\text{dB}(\mu\text{V})/\text{m}$ |
| 0.009-0.490      | 300                | 2400/F(KHz)                                                                                       | /                                 |
| 0.490-1.705      | 30                 | 24000/F(KHz)                                                                                      | /                                 |
| 1.705-30         | 30                 | 30                                                                                                | 29.5                              |
| 30 ~ 88          | 3                  | 100                                                                                               | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                                               | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                                               | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                                               | 54.0                              |
| Above 1000       | 3                  | 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) |                                   |


Note 1: The peak limit is 20 dB higher than the average limit

### 3.2. Block Diagram of Test setup


#### 3.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

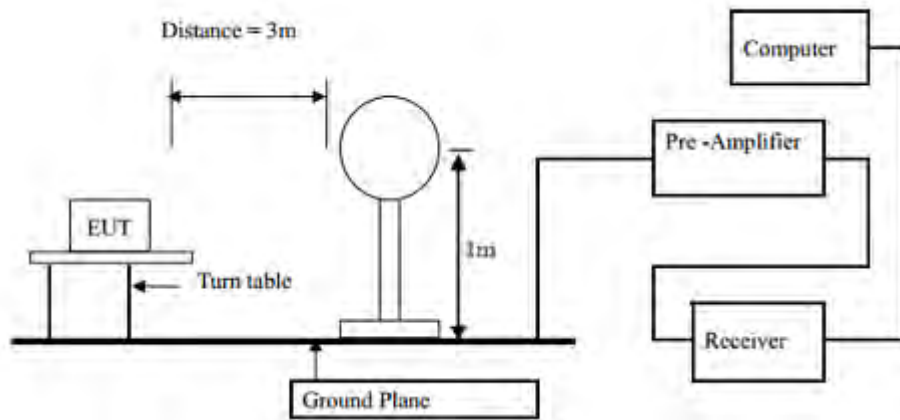

#### 3.2.2 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

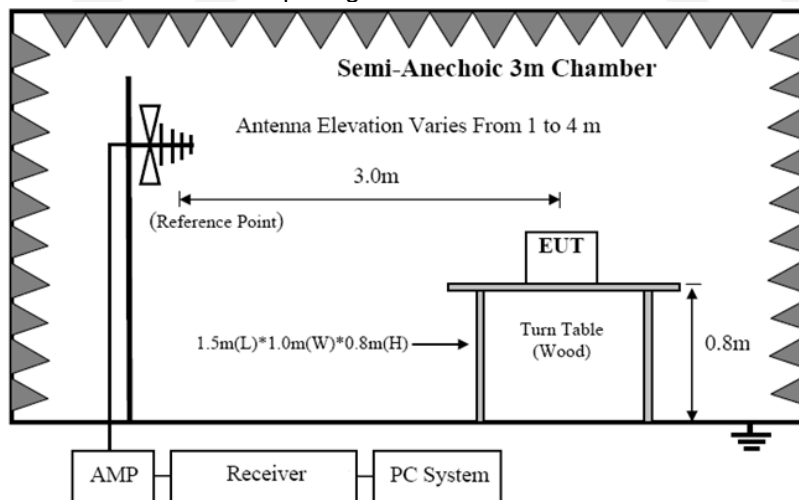

#### 3.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

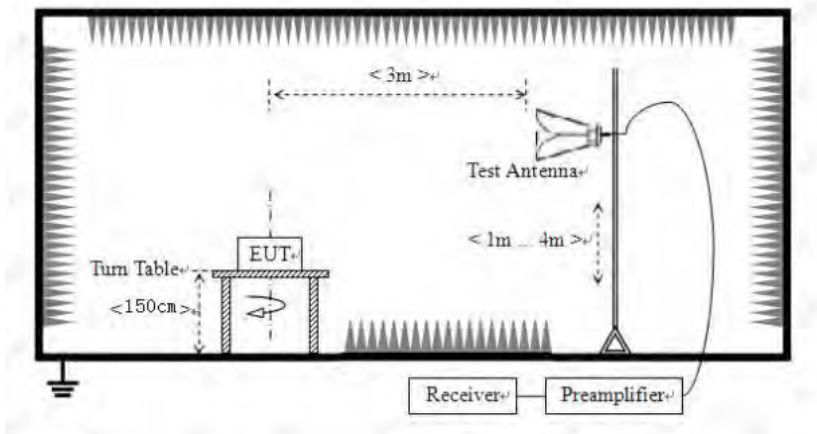

### 3.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

Test setup information:

|              |           |            |
|--------------|-----------|------------|
| 9KHz~150KHz  | RBW200Hz  | VBW1KHz    |
| 150KHz~30MHz | RBW9KHz   | VBW 30KHz  |
| 30MHZ~1GHz   | RBW120KHz | VBW 300KHz |
| Above1GHz    | RBW1MHz   | VBW 3MHz   |

### 3.4. Test Results

We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.  
Detailed information please see the following page.


|                               |                                                                                                                                    |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| From 9KHz to 30MHz:           |                                                                                                                                    |
| Test Date : 2024.04.26        | Temperature : 26℃                                                                                                                  |
| Test Engineer : Felix Pang    | Humidity : 54%                                                                                                                     |
| Test Mode : IEEE 802.11b mode |                                                                                                                                    |
| Test Results : <b>PASS</b>    |                                                                                                                                    |
| Note:                         | The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. |



|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| From 30MHz to 1000MHz:        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Date : 2024.04.26        | Temperature : 26℃                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Engineer : Felix Pang    | Humidity : 54%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Mode : IEEE 802.11b mode |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Results : <b>PASS</b>    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Note:                         | <ol style="list-style-type: none"><li>1. The test results are listed in next pages.</li><li>2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.</li><li>3. All modes have been tested, and only worst data of IEEE 802.11b mode, Channel 2412MHz was listed in this report.</li></ol> |




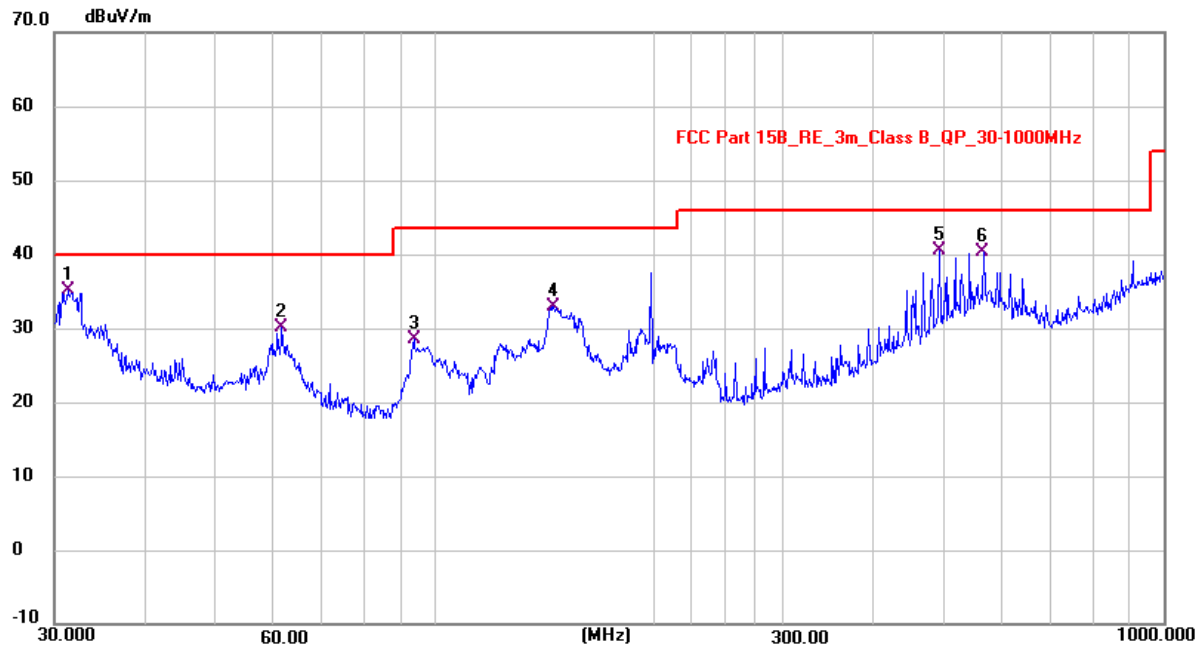

**Polarization: Horizontal**

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 31.2892         | 22.76          | 12.31         | 35.07          | 40.00          | -4.93       | QP       |
| 2   | 61.5617         | 18.14          | 11.99         | 30.13          | 40.00          | -9.87       | QP       |
| 3   | 93.4402         | 19.60          | 8.99          | 28.59          | 43.50          | -14.91      | QP       |
| 4   | 145.3505        | 20.06          | 12.94         | 33.00          | 43.50          | -10.50      | QP       |
| 5   | 492.4685        | 22.35          | 18.13         | 40.48          | 46.00          | -5.52       | QP       |
| 6   | 566.6221        | 20.49          | 19.89         | 40.38          | 46.00          | -5.62       | QP       |

Level = Reading + Factor Margin = Level - Limit

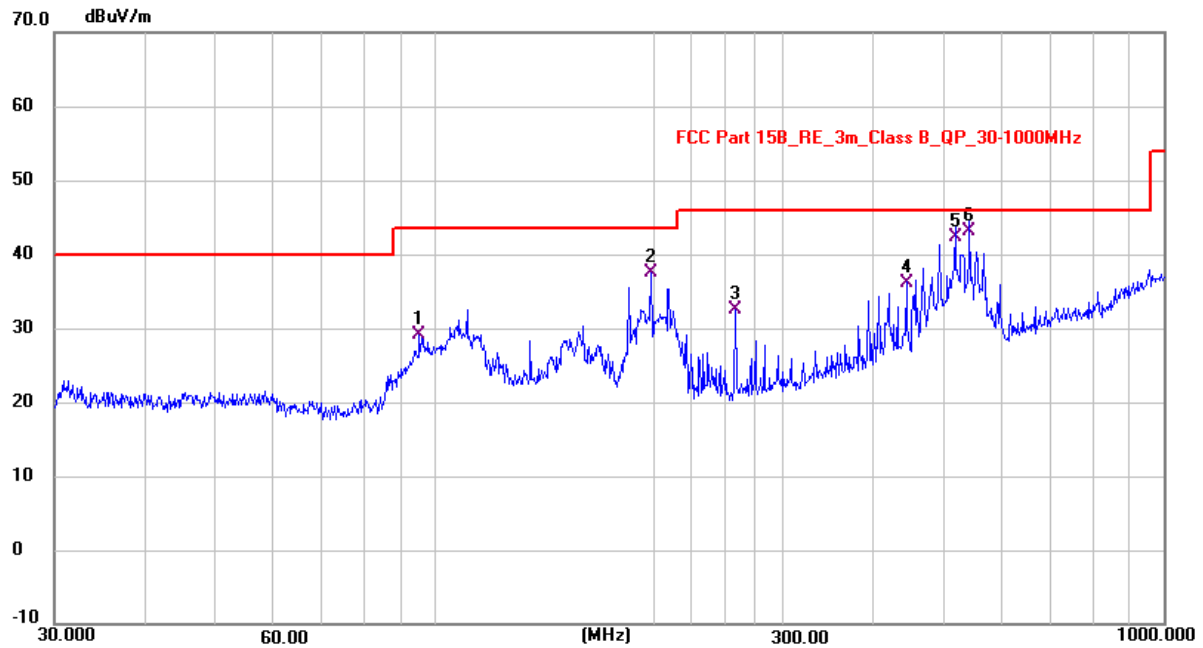**Polarization: Vertical**

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 95.0930         | 19.98          | 9.13          | 29.11          | 43.50          | -14.39      | QP       |
| 2   | 197.8925        | 27.25          | 10.16         | 37.41          | 43.50          | -6.09       | QP       |
| 3   | 258.3263        | 20.20          | 12.37         | 32.57          | 46.00          | -13.43      | QP       |
| 4   | 443.2941        | 19.10          | 17.10         | 36.20          | 46.00          | -9.80       | QP       |
| 5   | 517.2480        | 23.65          | 18.71         | 42.36          | 46.00          | -3.64       | QP       |
| 6 * | 541.3721        | 23.74          | 19.28         | 43.02          | 46.00          | -2.98       | QP       |

Level = Reading + Factor Margin = Level - Limit

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| From 1GHz to 25GHz:        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Date : 2024.04.26     | Temperature : 26℃                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Engineer : Felix Pang | Humidity : 54%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test Mode : WIFI mode      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Results : <b>PASS</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Note:                      | <ol style="list-style-type: none"><li>1. The test results are listed in next pages.</li><li>2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.</li><li>3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</li><li>4 Except for mode b/g, other modes test the MIMO status.<br/>The test result of SISO mode reflects the worst data between antenna 1 and antenna 2.</li></ol> |



| Test Mode : IEEE 802.11b TX Low                                                                                                                                                                                                       |          |          |                  |                |                 |                |        |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|----------------|-----------------|----------------|--------|--------|
| No.                                                                                                                                                                                                                                   | Freq MHz | Polarity | Reading (dBuV/m) | Correct Factor | Result (dBuV/m) | Limit (dBuV/m) | Margin | Remark |
| 1                                                                                                                                                                                                                                     | 4824     | V        | 82.67            | -27.27         | 55.40           | 74.00          | -18.60 | Peak   |
| 2                                                                                                                                                                                                                                     | 4824     | V        | 66.10            | -27.27         | 38.83           | 54.00          | -15.17 | Avg    |
| 3                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4824     | H        | 83.56            | -27.27         | 56.29           | 74.00          | -17.71 | Peak   |
| 6                                                                                                                                                                                                                                     | 4824     | H        | 71.96            | -27.27         | 44.69           | 54.00          | -9.31  | Avg    |
| 7                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11b TX Mid                                                                                                                                                                                                       |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4874     | V        | 85.30            | -27.79         | 57.51           | 74.00          | -16.49 | Peak   |
| 2                                                                                                                                                                                                                                     | 4874     | V        | 64.26            | -27.79         | 36.47           | 54.00          | -17.53 | Avg    |
| 3                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4874     | H        | 84.00            | -27.79         | 56.21           | 74.00          | -17.79 | Peak   |
| 6                                                                                                                                                                                                                                     | 4874     | H        | 72.24            | -27.79         | 44.45           | 54.00          | -9.55  | Avg    |
| 7                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11b TX High                                                                                                                                                                                                      |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4924     | V        | 85.67            | -28.30         | 57.37           | 74.00          | -16.63 | Peak   |
| 2                                                                                                                                                                                                                                     | 4924     | V        | 68.45            | -28.30         | 40.15           | 54.00          | -13.85 | Avg    |
| 3                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4924     | H        | 83.29            | -28.30         | 54.99           | 74.00          | -19.01 | Peak   |
| 6                                                                                                                                                                                                                                     | 4924     | H        | 71.92            | -28.30         | 43.62           | 54.00          | -10.38 | Avg    |
| 7                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.<br>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.<br>Result=Reading + Correct Factor.<br>Margin= Result-Limit. |          |          |                  |                |                 |                |        |        |

| Test Mode : IEEE 802.11g TX Low                                                                                                                                                                                                       |          |          |                  |                |                 |                |        |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|----------------|-----------------|----------------|--------|--------|
| No.                                                                                                                                                                                                                                   | Freq MHz | Polarity | Reading (dBuV/m) | Correct Factor | Result (dBuV/m) | Limit (dBuV/m) | Margin | Remark |
| 1                                                                                                                                                                                                                                     | 4824     | V        | 83.08            | -27.27         | 55.81           | 74.00          | -18.19 | Peak   |
| 2                                                                                                                                                                                                                                     | 4824     | V        | 66.48            | -27.27         | 39.21           | 54.00          | -14.79 | Avg    |
| 3                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4824     | H        | 81.51            | -27.27         | 54.24           | 74.00          | -19.76 | Peak   |
| 6                                                                                                                                                                                                                                     | 4824     | H        | 73.84            | -27.27         | 46.57           | 54.00          | -7.43  | Avg    |
| 7                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11g TX Mid                                                                                                                                                                                                       |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4874     | V        | 86.73            | -27.79         | 58.94           | 74.00          | -15.06 | Peak   |
| 2                                                                                                                                                                                                                                     | 4874     | V        | 63.74            | -27.79         | 35.95           | 54.00          | -18.05 | Avg    |
| 3                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4874     | H        | 81.91            | -27.79         | 54.12           | 74.00          | -19.88 | Peak   |
| 6                                                                                                                                                                                                                                     | 4874     | H        | 73.23            | -27.79         | 45.44           | 54.00          | -8.56  | Avg    |
| 7                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11g TX High                                                                                                                                                                                                      |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4924     | V        | 83.33            | -28.30         | 55.03           | 74.00          | -18.97 | Peak   |
| 2                                                                                                                                                                                                                                     | 4924     | V        | 70.35            | -28.30         | 42.05           | 54.00          | -11.95 | Avg    |
| 3                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4924     | H        | 80.43            | -28.30         | 52.13           | 74.00          | -21.87 | Peak   |
| 6                                                                                                                                                                                                                                     | 4924     | H        | 73.43            | -28.30         | 45.13           | 54.00          | -8.87  | Avg    |
| 7                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.<br>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.<br>Result=Reading + Correct Factor.<br>Margin= Result-Limit. |          |          |                  |                |                 |                |        |        |

| Test Mode : IEEE 802.11n/HT20 TX Low                                                                                                                                                                                                  |          |          |                  |                |                 |                |        |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|----------------|-----------------|----------------|--------|--------|
| No.                                                                                                                                                                                                                                   | Freq MHz | Polarity | Reading (dBuV/m) | Correct Factor | Result (dBuV/m) | Limit (dBuV/m) | Margin | Remark |
| 1                                                                                                                                                                                                                                     | 4824     | V        | 85.95            | -27.27         | 58.68           | 74.00          | -15.32 | Peak   |
| 2                                                                                                                                                                                                                                     | 4824     | V        | 65.07            | -27.27         | 37.80           | 54.00          | -16.20 | Avg    |
| 3                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4824     | H        | 82.68            | -27.27         | 55.41           | 74.00          | -18.59 | Peak   |
| 6                                                                                                                                                                                                                                     | 4824     | H        | 74.94            | -27.27         | 47.67           | 54.00          | -6.33  | Avg    |
| 7                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11n/HT20 TX Mid                                                                                                                                                                                                  |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4874     | V        | 87.56            | -27.79         | 59.77           | 74.00          | -14.23 | Peak   |
| 2                                                                                                                                                                                                                                     | 4874     | V        | 63.51            | -27.79         | 35.72           | 54.00          | -18.28 | Avg    |
| 3                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4874     | H        | 82.05            | -27.79         | 54.26           | 74.00          | -19.74 | Peak   |
| 6                                                                                                                                                                                                                                     | 4874     | H        | 70.57            | -27.79         | 42.78           | 54.00          | -11.22 | Avg    |
| 7                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11n/HT20 TX High                                                                                                                                                                                                 |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4924     | V        | 86.42            | -28.30         | 58.12           | 74.00          | -15.88 | Peak   |
| 2                                                                                                                                                                                                                                     | 4924     | V        | 68.00            | -28.30         | 39.70           | 54.00          | -14.30 | Avg    |
| 3                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4924     | H        | 80.11            | -28.30         | 51.81           | 74.00          | -22.19 | Peak   |
| 6                                                                                                                                                                                                                                     | 4924     | H        | 72.91            | -28.30         | 44.61           | 54.00          | -9.39  | Avg    |
| 7                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.<br>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.<br>Result=Reading + Correct Factor.<br>Margin= Result-Limit. |          |          |                  |                |                 |                |        |        |

| Test Mode : IEEE 802.11n/HT40 TX Low                                                                                                                                                                                                  |          |          |                  |                |                 |                |        |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|----------------|-----------------|----------------|--------|--------|
| No.                                                                                                                                                                                                                                   | Freq MHz | Polarity | Reading (dBuV/m) | Correct Factor | Result (dBuV/m) | Limit (dBuV/m) | Margin | Remark |
| 1                                                                                                                                                                                                                                     | 4844     | V        | 83.71            | -27.27         | 56.44           | 74.00          | -17.56 | Peak   |
| 2                                                                                                                                                                                                                                     | 4844     | V        | 66.09            | -27.27         | 38.82           | 54.00          | -15.18 | Avg    |
| 3                                                                                                                                                                                                                                     | 7266     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9688     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4844     | H        | 82.72            | -27.27         | 55.45           | 74.00          | -18.55 | Peak   |
| 6                                                                                                                                                                                                                                     | 4844     | H        | 72.69            | -27.27         | 45.42           | 54.00          | -8.58  | Avg    |
| 7                                                                                                                                                                                                                                     | 7266     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9688     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11n/HT40 TX Mid                                                                                                                                                                                                  |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4874     | V        | 85.51            | -27.79         | 57.72           | 74.00          | -16.28 | Peak   |
| 2                                                                                                                                                                                                                                     | 4874     | V        | 63.81            | -27.79         | 36.02           | 54.00          | -17.98 | Avg    |
| 3                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4874     | H        | 82.58            | -27.79         | 54.79           | 74.00          | -19.21 | Peak   |
| 6                                                                                                                                                                                                                                     | 4874     | H        | 70.64            | -27.79         | 42.85           | 54.00          | -11.15 | Avg    |
| 7                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11n/HT40 TX High                                                                                                                                                                                                 |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4904     | V        | 85.34            | -28.30         | 57.04           | 74.00          | -16.96 | Peak   |
| 2                                                                                                                                                                                                                                     | 4904     | V        | 67.15            | -28.30         | 38.85           | 54.00          | -15.15 | Avg    |
| 3                                                                                                                                                                                                                                     | 7356     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9808     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4904     | H        | 81.04            | -28.30         | 52.74           | 74.00          | -21.26 | Peak   |
| 6                                                                                                                                                                                                                                     | 4904     | H        | 73.47            | -28.30         | 45.17           | 54.00          | -8.83  | Avg    |
| 7                                                                                                                                                                                                                                     | 7356     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9808     | --       | --               | --             | --              | --             | --     | --     |
| Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.<br>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.<br>Result=Reading + Correct Factor.<br>Margin= Result-Limit. |          |          |                  |                |                 |                |        |        |

| Test Mode : IEEE 802.11ax20 TX Low                                                                                                                                                                                                    |          |          |                  |                |                 |                |        |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|----------------|-----------------|----------------|--------|--------|
| No.                                                                                                                                                                                                                                   | Freq MHz | Polarity | Reading (dBuV/m) | Correct Factor | Result (dBuV/m) | Limit (dBuV/m) | Margin | Remark |
| 1                                                                                                                                                                                                                                     | 4824     | V        | 86.09            | -27.27         | 58.82           | 74.00          | -15.18 | Peak   |
| 2                                                                                                                                                                                                                                     | 4824     | V        | 66.38            | -27.27         | 39.11           | 54.00          | -14.89 | Avg    |
| 3                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4824     | H        | 81.58            | -27.27         | 54.31           | 74.00          | -19.69 | Peak   |
| 6                                                                                                                                                                                                                                     | 4824     | H        | 73.76            | -27.27         | 46.49           | 54.00          | -7.51  | Avg    |
| 7                                                                                                                                                                                                                                     | 7236     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9648     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11n/HTax20 TX Mid                                                                                                                                                                                                |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4874     | V        | 86.57            | -27.79         | 58.78           | 74.00          | -15.22 | Peak   |
| 2                                                                                                                                                                                                                                     | 4874     | V        | 66.46            | -27.79         | 38.67           | 54.00          | -15.33 | Avg    |
| 3                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4874     | H        | 83.11            | -27.79         | 55.32           | 74.00          | -18.68 | Peak   |
| 6                                                                                                                                                                                                                                     | 4874     | H        | 71.30            | -27.79         | 43.51           | 54.00          | -10.49 | Avg    |
| 7                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11ax20 TX High                                                                                                                                                                                                   |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4924     | V        | 85.00            | -28.30         | 56.70           | 74.00          | -17.30 | Peak   |
| 2                                                                                                                                                                                                                                     | 4924     | V        | 67.87            | -28.30         | 39.57           | 54.00          | -14.43 | Avg    |
| 3                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4924     | H        | 83.18            | -28.30         | 54.88           | 74.00          | -19.12 | Peak   |
| 6                                                                                                                                                                                                                                     | 4924     | H        | 71.73            | -28.30         | 43.43           | 54.00          | -10.57 | Avg    |
| 7                                                                                                                                                                                                                                     | 7386     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9848     | --       | --               | --             | --              | --             | --     | --     |
| Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.<br>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.<br>Result=Reading + Correct Factor.<br>Margin= Result-Limit. |          |          |                  |                |                 |                |        |        |



| Test Mode : IEEE 802.11ax40 TX Low                                                                                                                                                                                                    |          |          |                  |                |                 |                |        |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|----------------|-----------------|----------------|--------|--------|
| No.                                                                                                                                                                                                                                   | Freq MHz | Polarity | Reading (dBuV/m) | Correct Factor | Result (dBuV/m) | Limit (dBuV/m) | Margin | Remark |
| 1                                                                                                                                                                                                                                     | 4844     | V        | 84.59            | -27.27         | 57.32           | 74.00          | -16.68 | Peak   |
| 2                                                                                                                                                                                                                                     | 4844     | V        | 65.55            | -27.27         | 38.28           | 54.00          | -15.72 | Avg    |
| 3                                                                                                                                                                                                                                     | 7266     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9688     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4844     | H        | 80.74            | -27.27         | 53.47           | 74.00          | -20.53 | Peak   |
| 6                                                                                                                                                                                                                                     | 4844     | H        | 73.87            | -27.27         | 46.60           | 54.00          | -7.40  | Avg    |
| 7                                                                                                                                                                                                                                     | 7266     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9688     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11ax40 TX Mid                                                                                                                                                                                                    |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4874     | V        | 84.48            | -27.79         | 56.69           | 74.00          | -17.31 | Peak   |
| 2                                                                                                                                                                                                                                     | 4874     | V        | 63.95            | -27.79         | 36.16           | 54.00          | -17.84 | Avg    |
| 3                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4874     | H        | 84.20            | -27.79         | 56.41           | 74.00          | -17.59 | Peak   |
| 6                                                                                                                                                                                                                                     | 4874     | H        | 72.41            | -27.79         | 44.62           | 54.00          | -9.38  | Avg    |
| 7                                                                                                                                                                                                                                     | 7311     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9748     | --       | --               | --             | --              | --             | --     | --     |
| Test Mode : IEEE 802.11ax40 TX High                                                                                                                                                                                                   |          |          |                  |                |                 |                |        |        |
| 1                                                                                                                                                                                                                                     | 4904     | V        | 85.96            | -28.30         | 57.66           | 74.00          | -16.34 | Peak   |
| 2                                                                                                                                                                                                                                     | 4904     | V        | 68.42            | -28.30         | 40.12           | 54.00          | -13.88 | Avg    |
| 3                                                                                                                                                                                                                                     | 7356     | --       | --               | --             | --              | --             | --     | --     |
| 4                                                                                                                                                                                                                                     | 9808     | --       | --               | --             | --              | --             | --     | --     |
| 5                                                                                                                                                                                                                                     | 4904     | H        | 83.98            | -28.30         | 55.68           | 74.00          | -18.32 | Peak   |
| 6                                                                                                                                                                                                                                     | 4904     | H        | 71.22            | -28.30         | 42.92           | 54.00          | -11.08 | Avg    |
| 7                                                                                                                                                                                                                                     | 7356     | --       | --               | --             | --              | --             | --     | --     |
| 8                                                                                                                                                                                                                                     | 9808     | --       | --               | --             | --              | --             | --     | --     |
| Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.<br>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.<br>Result=Reading + Correct Factor.<br>Margin= Result-Limit. |          |          |                  |                |                 |                |        |        |

## 4. Power Line Conducted Emission

### 4.1. Test Limits

| Frequency<br>MHz | Limits dB(μV)    |               |
|------------------|------------------|---------------|
|                  | Quasi-peak Level | Average Level |
| 0.15 -0.50       | 66 -56*          | 56 - 46*      |
| 0.50 -5.00       | 56               | 46            |
| 5.00 -30.00      | 60               | 50            |

Notes: 1. \*Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.


### 4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs.

Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

### 4.3. Test Setup

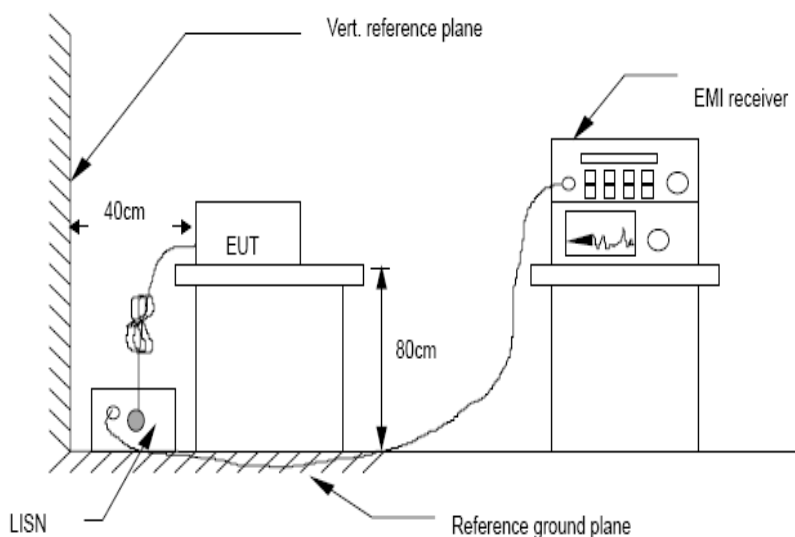

#### 4.4. Test Results

|               |               |             |       |
|---------------|---------------|-------------|-------|
| Test Date     | : 2024.04.25  | Temperature | : 26℃ |
| Test Engineer | : Felix Pang  | Humidity    | : 54% |
| Test Mode     | : WIFI mode   |             |       |
| Test Results  | : <b>PASS</b> |             |       |

Note: 1. The test results are listed in next pages.


2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.

3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

4. All modes have been tested, and only worst data of b mode, Channel 2412MHz (AC 120V/ 60Hz) was listed in this report.




## Polarization: L

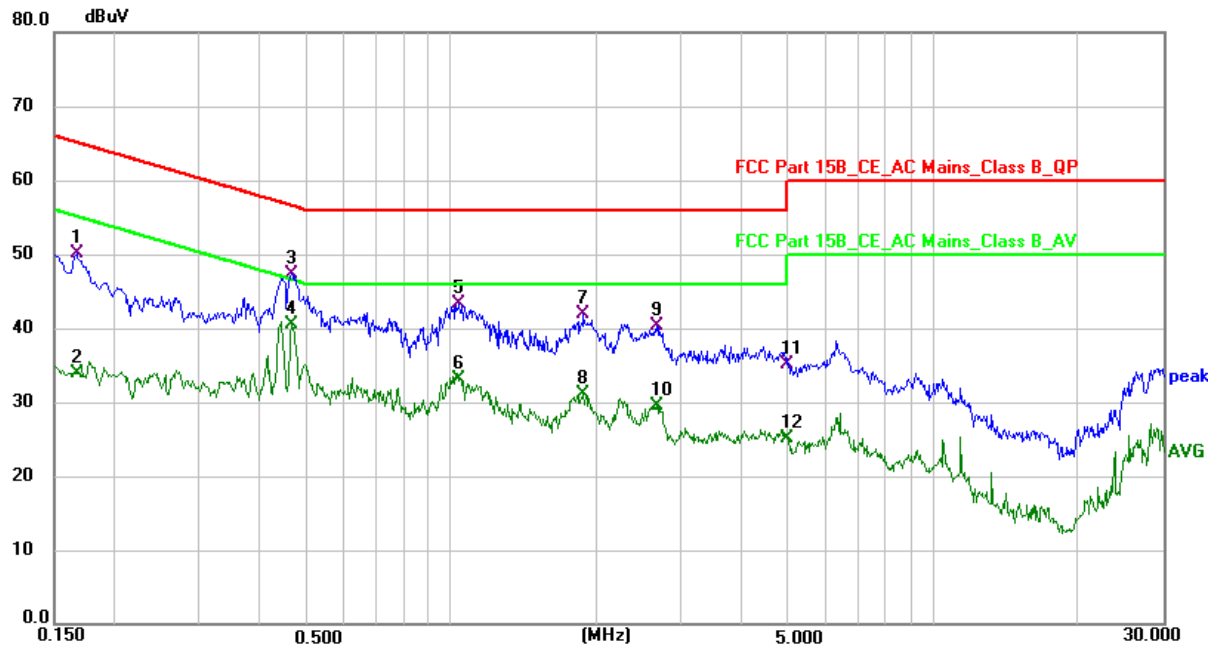

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|
| 1   | 0.1660          | 40.11          | 9.94        | 50.05        | 65.16        | -15.11      | QP       | P   |
| 2   | 0.1660          | 23.99          | 9.94        | 33.93        | 55.16        | -21.23      | AVG      | P   |
| 3   | 0.4660          | 37.59          | 9.81        | 47.40        | 56.58        | -9.18       | QP       | P   |
| 4 * | 0.4660          | 30.69          | 9.81        | 40.50        | 46.58        | -6.08       | AVG      | P   |
| 5   | 1.0420          | 33.92          | 9.41        | 43.33        | 56.00        | -12.67      | QP       | P   |
| 6   | 1.0420          | 23.66          | 9.41        | 33.07        | 46.00        | -12.93      | AVG      | P   |
| 7   | 1.8780          | 32.48          | 9.39        | 41.87        | 56.00        | -14.13      | QP       | P   |
| 8   | 1.8780          | 21.64          | 9.39        | 31.03        | 46.00        | -14.97      | AVG      | P   |
| 9   | 2.6780          | 31.00          | 9.38        | 40.38        | 56.00        | -15.62      | QP       | P   |
| 10  | 2.6780          | 20.16          | 9.38        | 29.54        | 46.00        | -16.46      | AVG      | P   |
| 11  | 4.9820          | 25.68          | 9.41        | 35.09        | 56.00        | -20.91      | QP       | P   |
| 12  | 4.9820          | 15.74          | 9.41        | 25.15        | 46.00        | -20.85      | AVG      | P   |

Note: Level = Reading + Factor Margin = Level - Limit

## Polarization: N

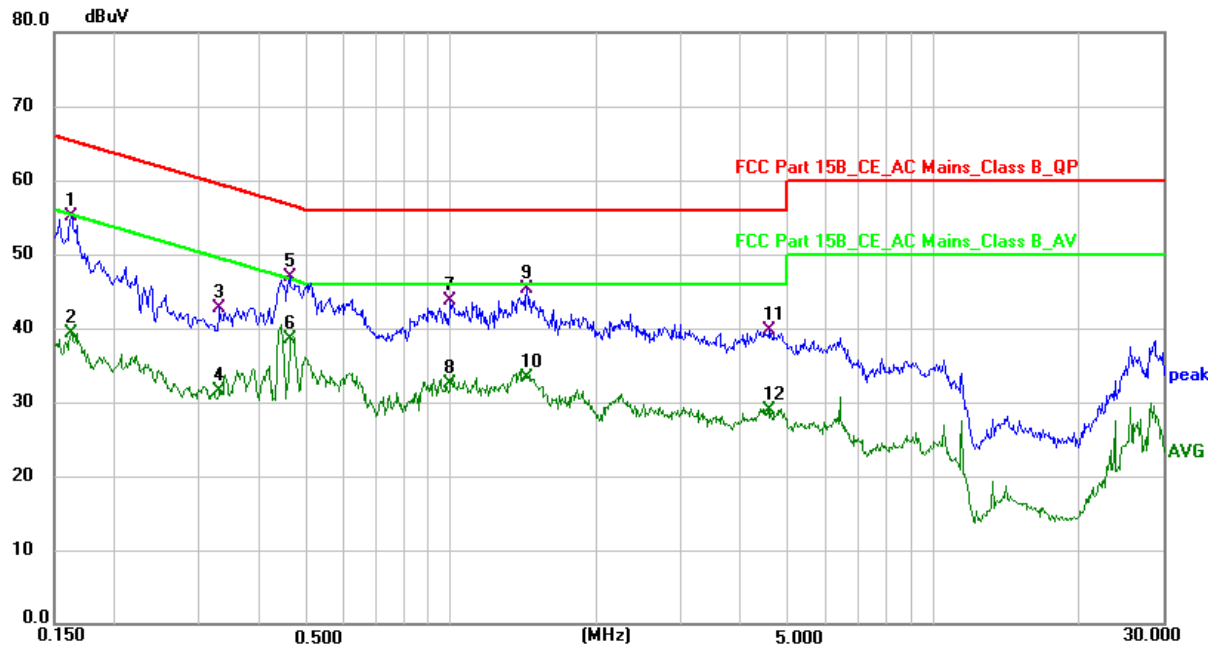

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|
| 1   | 0.1620          | 45.35          | 9.84        | 55.19        | 65.36        | -10.17      | QP       | P   |
| 2   | 0.1620          | 29.54          | 9.84        | 39.38        | 55.36        | -15.98      | AVG      | P   |
| 3   | 0.3300          | 33.00          | 9.71        | 42.71        | 59.45        | -16.74      | QP       | P   |
| 4   | 0.3300          | 21.74          | 9.71        | 31.45        | 49.45        | -18.00      | AVG      | P   |
| 5   | 0.4620          | 37.20          | 9.69        | 46.89        | 56.66        | -9.77       | QP       | P   |
| 6 * | 0.4620          | 28.86          | 9.69        | 38.55        | 46.66        | -8.11       | AVG      | P   |
| 7   | 0.9980          | 34.23          | 9.51        | 43.74        | 56.00        | -12.26      | QP       | P   |
| 8   | 0.9980          | 22.98          | 9.51        | 32.49        | 46.00        | -13.51      | AVG      | P   |
| 9   | 1.4340          | 35.85          | 9.40        | 45.25        | 56.00        | -10.75      | QP       | P   |
| 10  | 1.4340          | 23.91          | 9.40        | 33.31        | 46.00        | -12.69      | AVG      | P   |
| 11  | 4.5739          | 30.18          | 9.55        | 39.73        | 56.00        | -16.27      | QP       | P   |
| 12  | 4.5739          | 19.27          | 9.55        | 28.82        | 46.00        | -17.18      | AVG      | P   |

Note: Level = Reading + Factor Margin = Level - Limit

## 5. Out-of-band Emissions


### 5.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required.

### 5.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

### 5.3. Test Setup




### 5.4. Test Results

PASS.

The test results are listed in next pages.

**Band Edge: Pass**

Note: Both antennas have been tested and only the worst data of antenna 1 is shown.

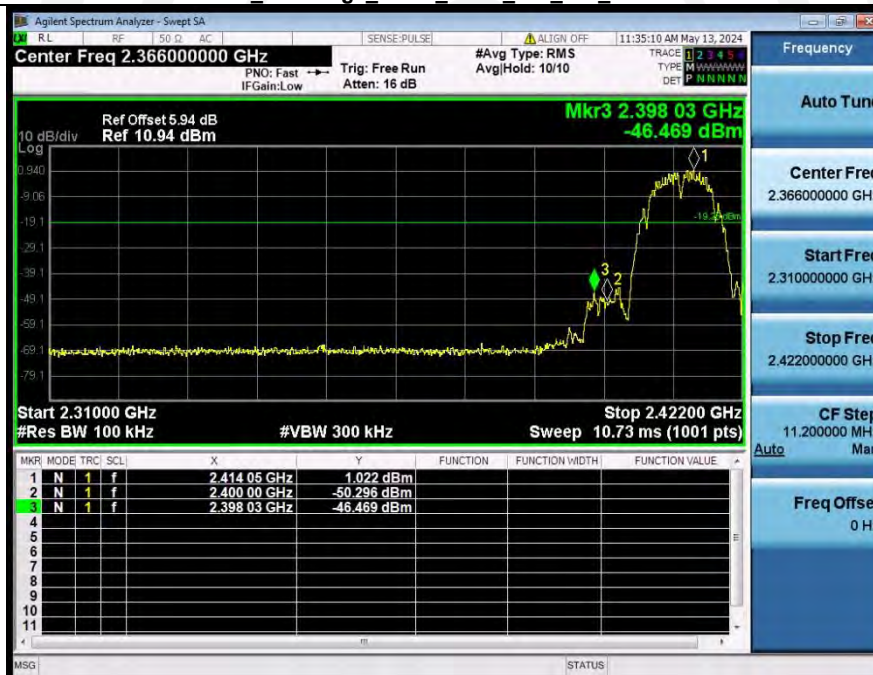**1 Reference Level NVNT\_ANT1\_802\_11b\_2412****2 Bandedge NVNT\_ANT1\_802\_11b\_2412**



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2462




## 2\_Bandedge\_NVNT\_ANT1\_802\_11b\_2462







## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2412

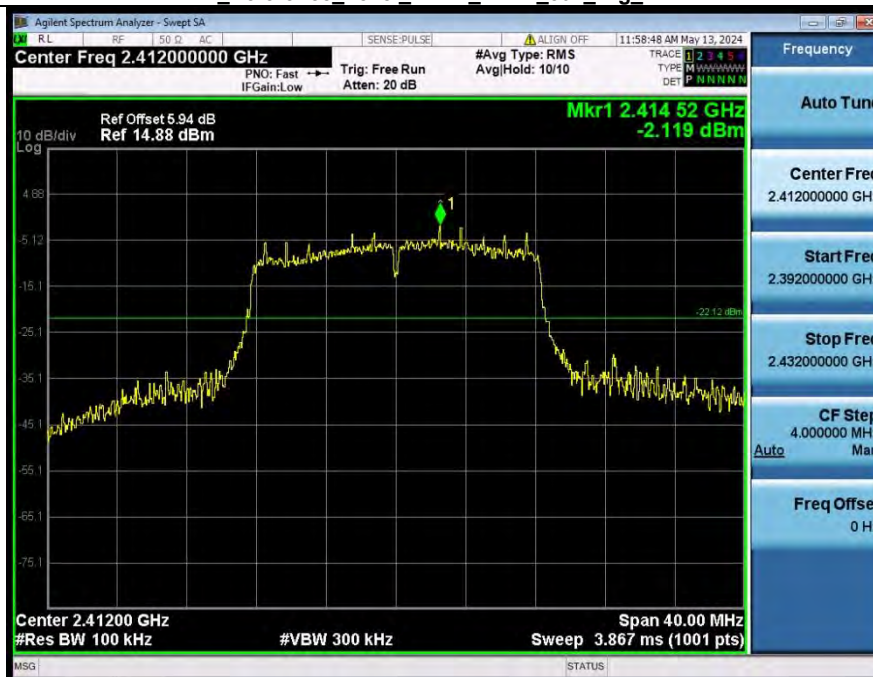

## 2\_Bandedge\_NVNT\_ANT1\_802\_11g\_2412

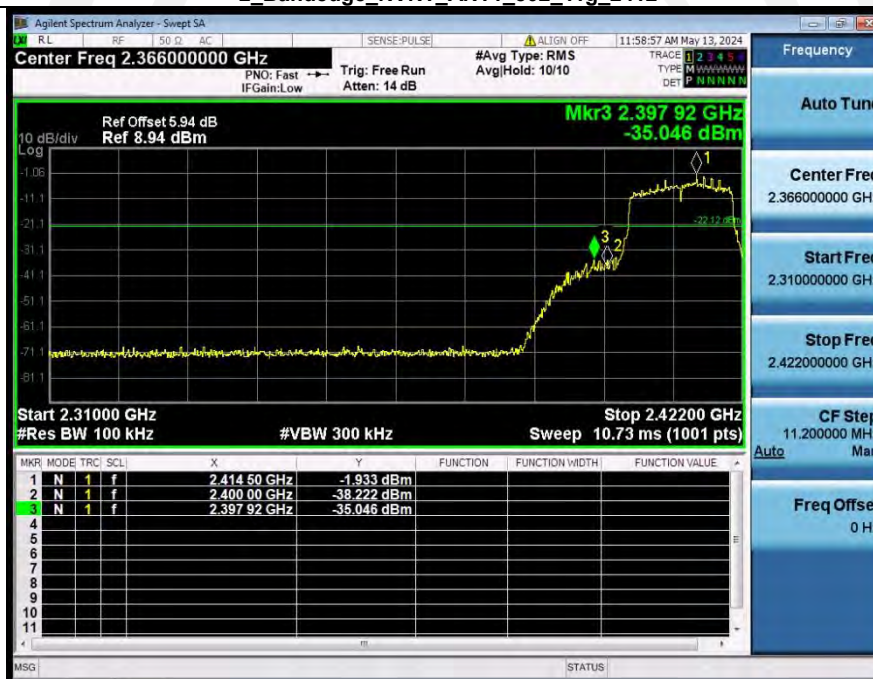

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2462

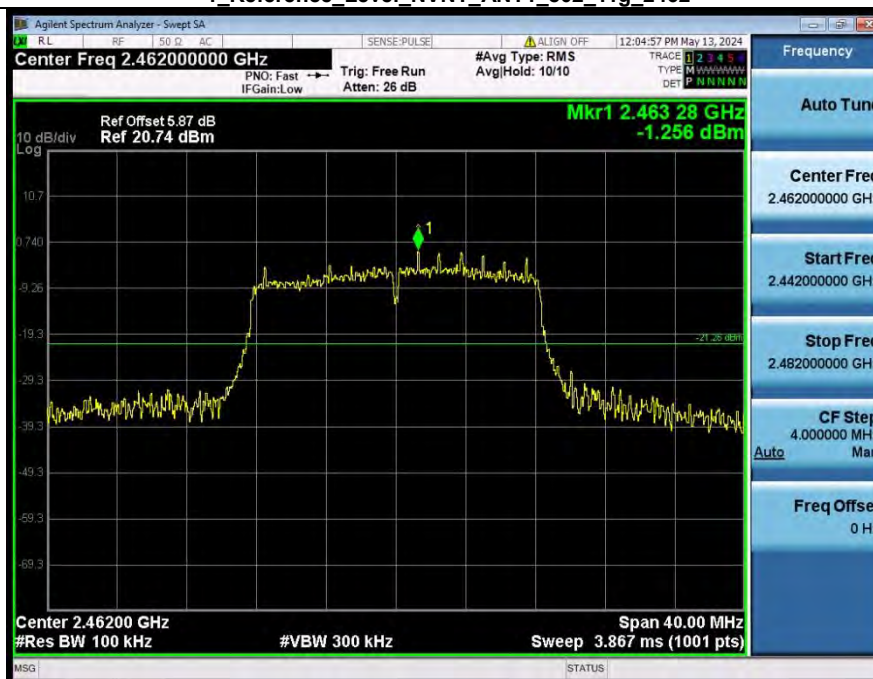


## 2\_Bandedge\_NVNT\_ANT1\_802\_11g\_2462



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2412



## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_2412

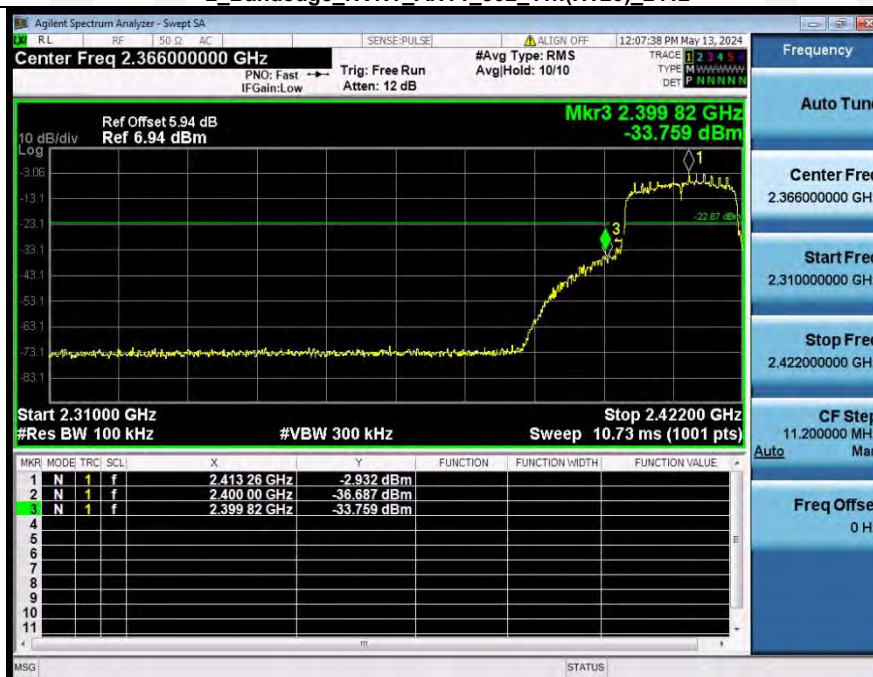



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2462



## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_2462



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT40)\_2422




## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT40)\_2422



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT40)\_2452



## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT40)\_2452

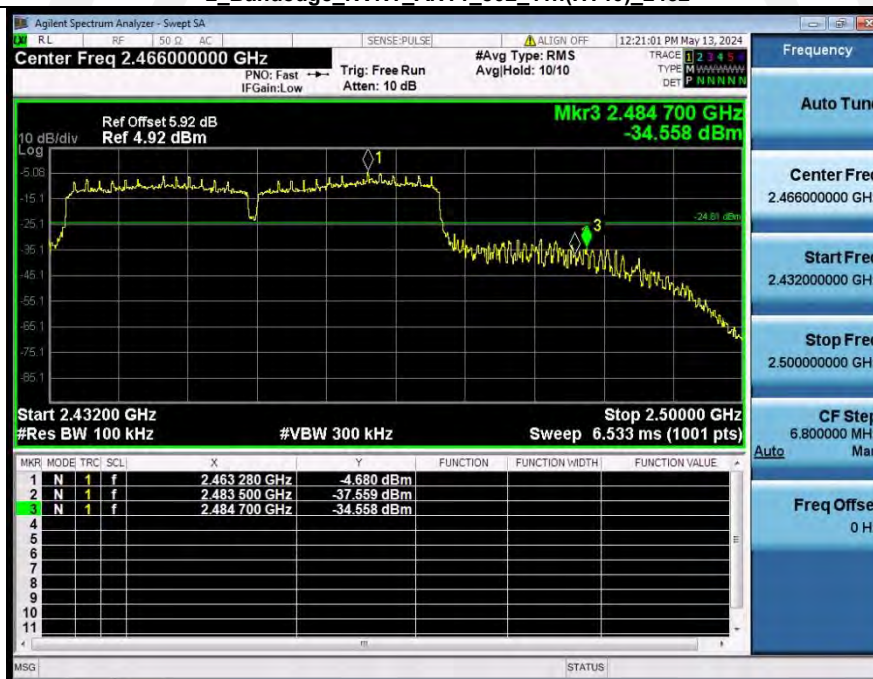




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE20)\_2412



## 2\_Bandedge\_NVNT\_ANT1\_802\_11ax(HE20)\_2412

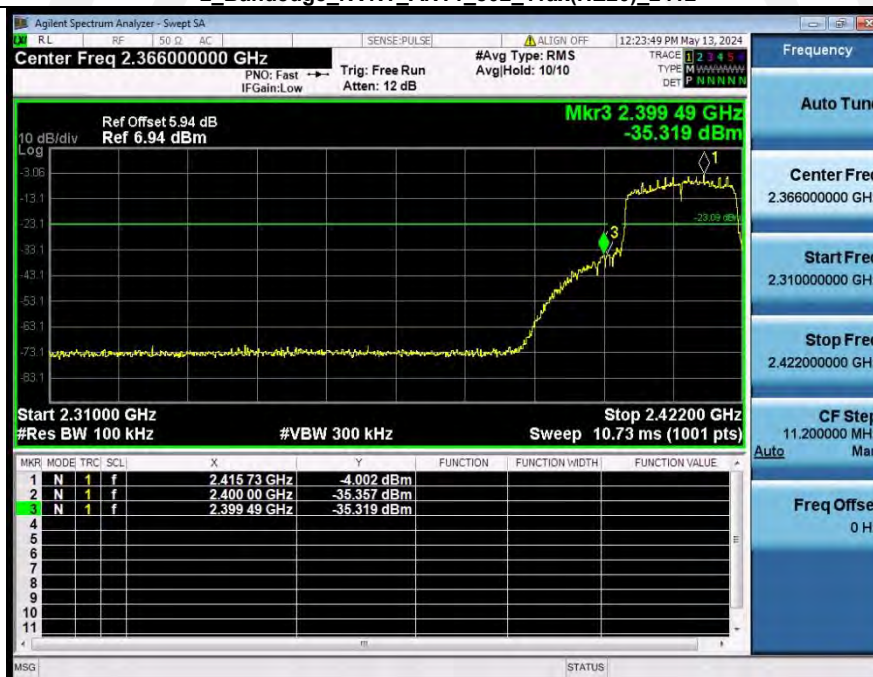

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE20)\_2462



## 2\_Bandedge\_NVNT\_ANT1\_802\_11ax(HE20)\_2462






## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE40)\_2422



## 2\_Bandedge\_NVNT\_ANT1\_802\_11ax(HE40)\_2422

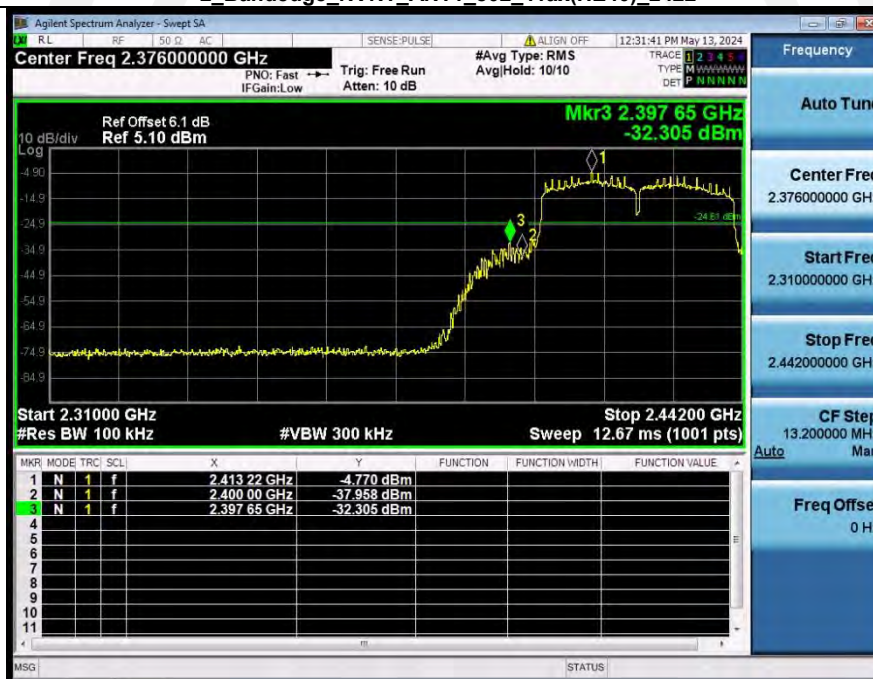

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE40)\_2452




## 2\_Bandedge\_NVNT\_ANT1\_802\_11ax(HE40)\_2452



**Conducted spurious emission: Pass**

Note: Both antennas have been tested and only the worst data of antenna 1 is shown.

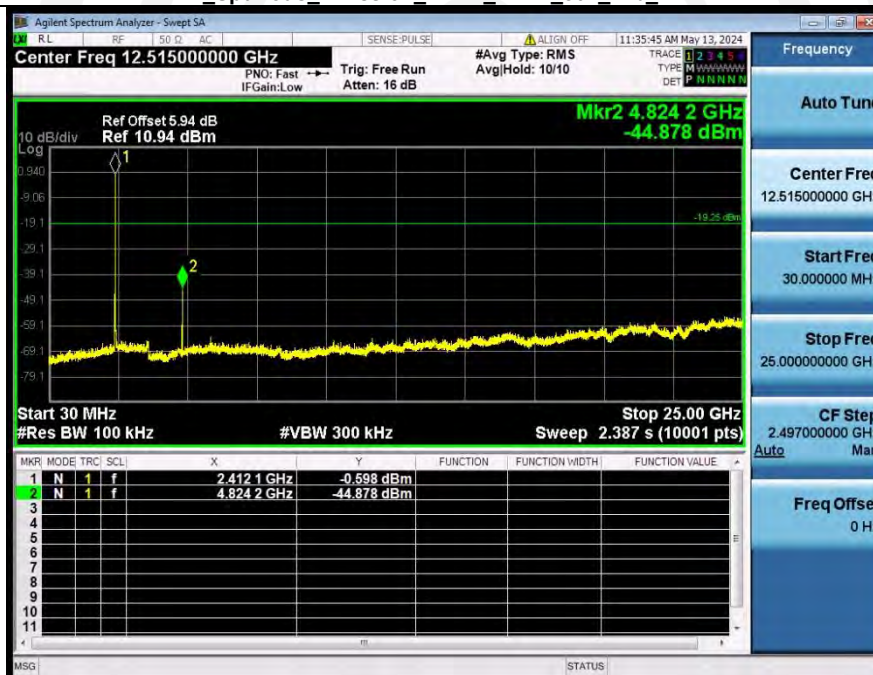
**1 Reference Level NVNT\_ANT1\_802\_11b\_2412****2 Spurious Emission NVNT\_ANT1\_802\_11b\_2412**



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2437




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2437

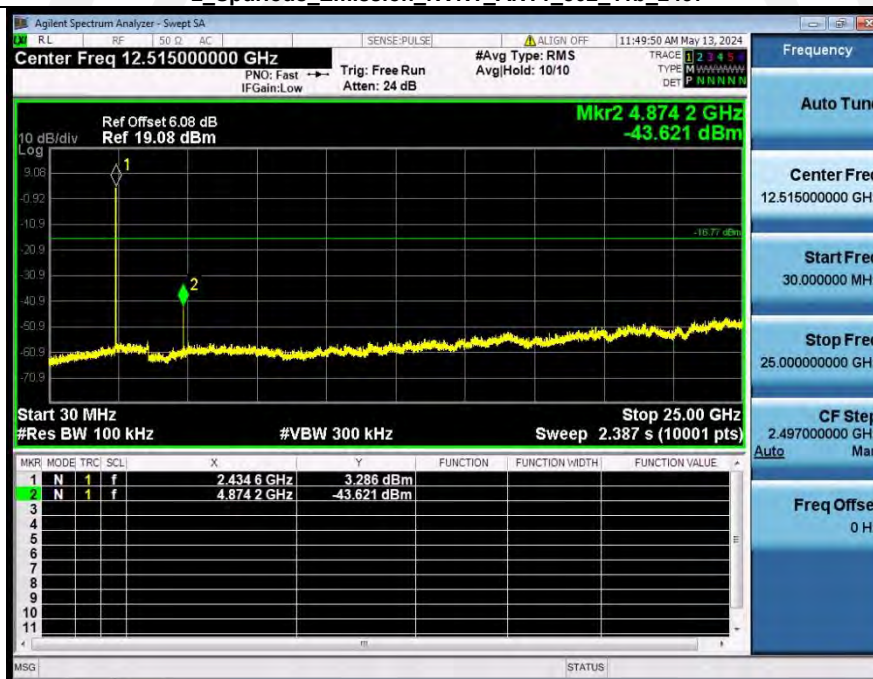


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2462




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2462

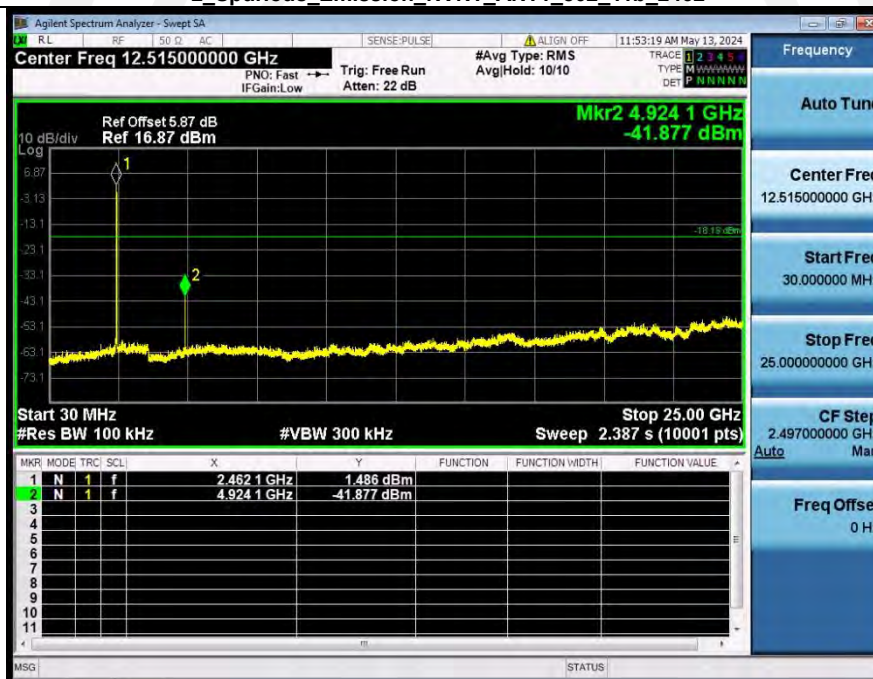

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2412

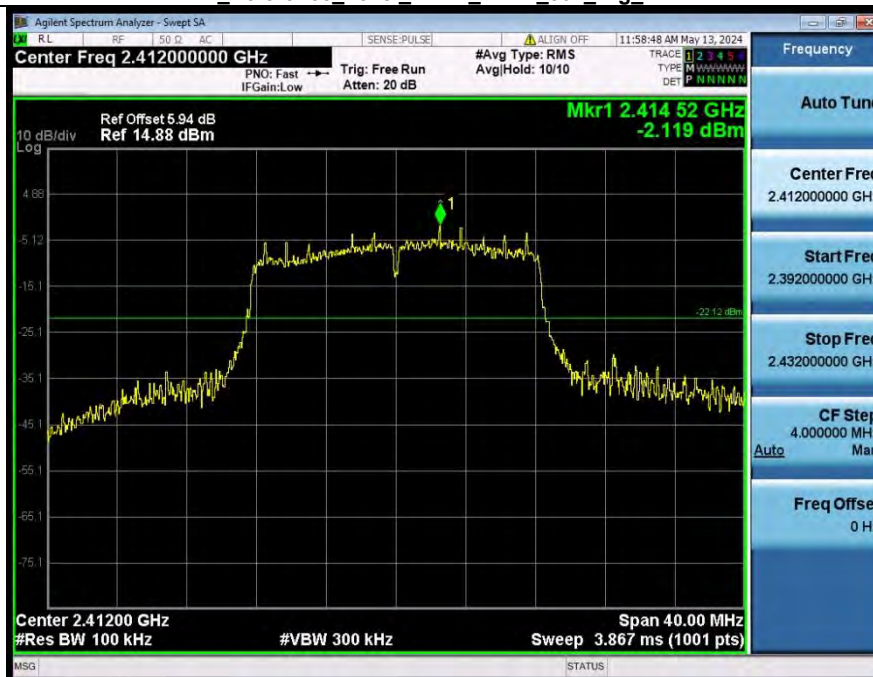

## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11g\_2412

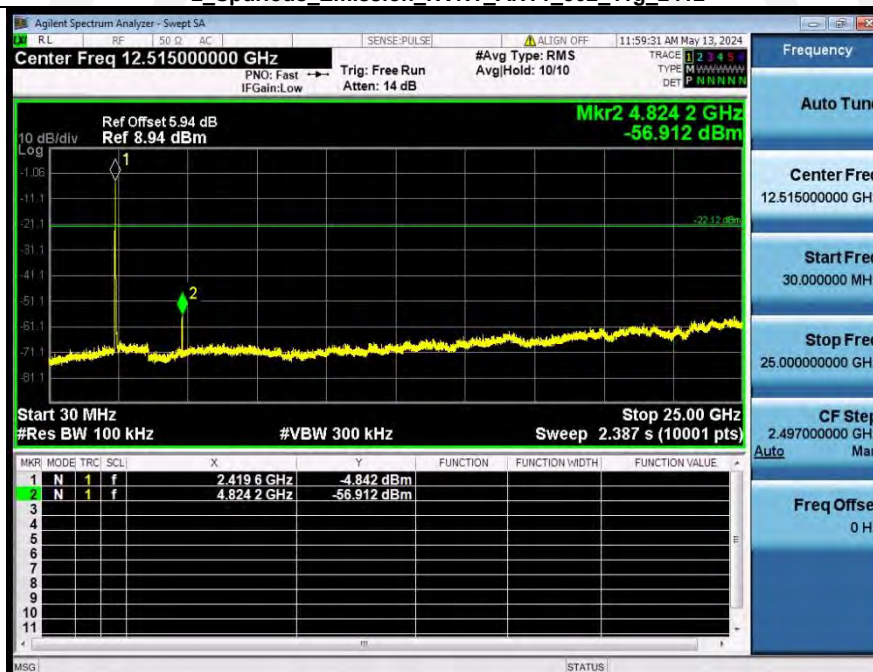




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2437




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11g\_2437

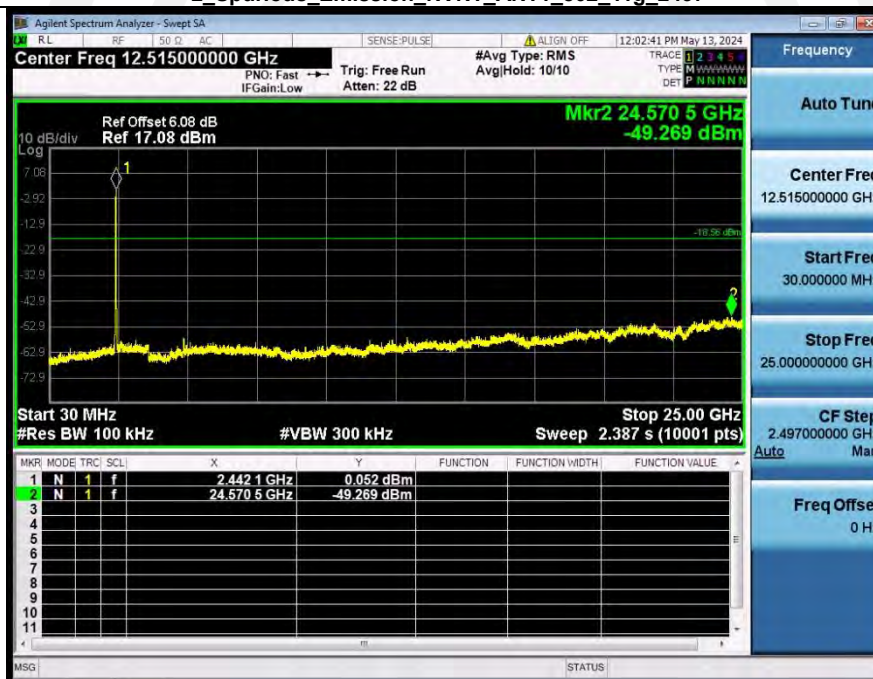




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2462

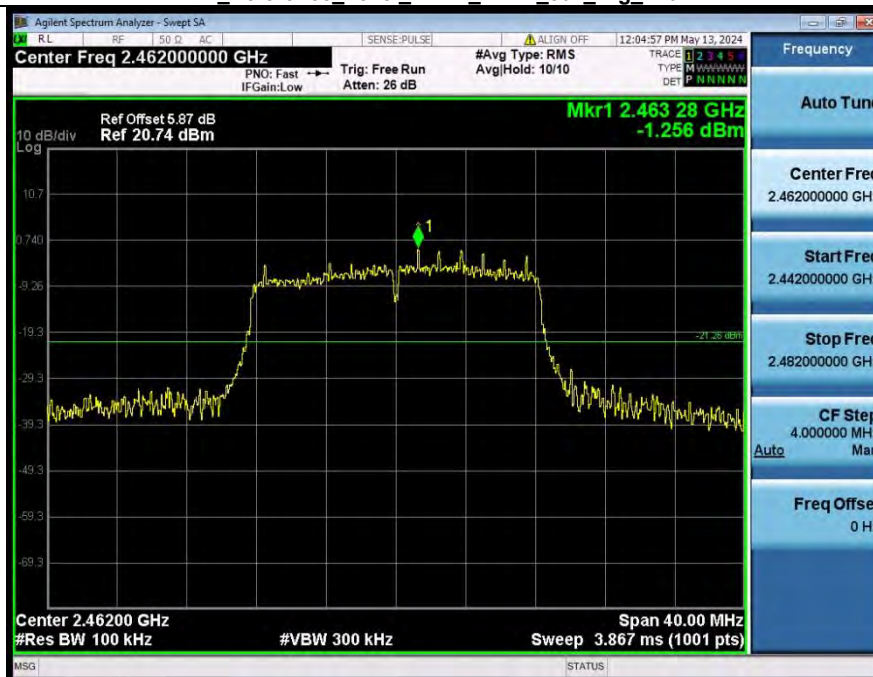


## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11g\_2462

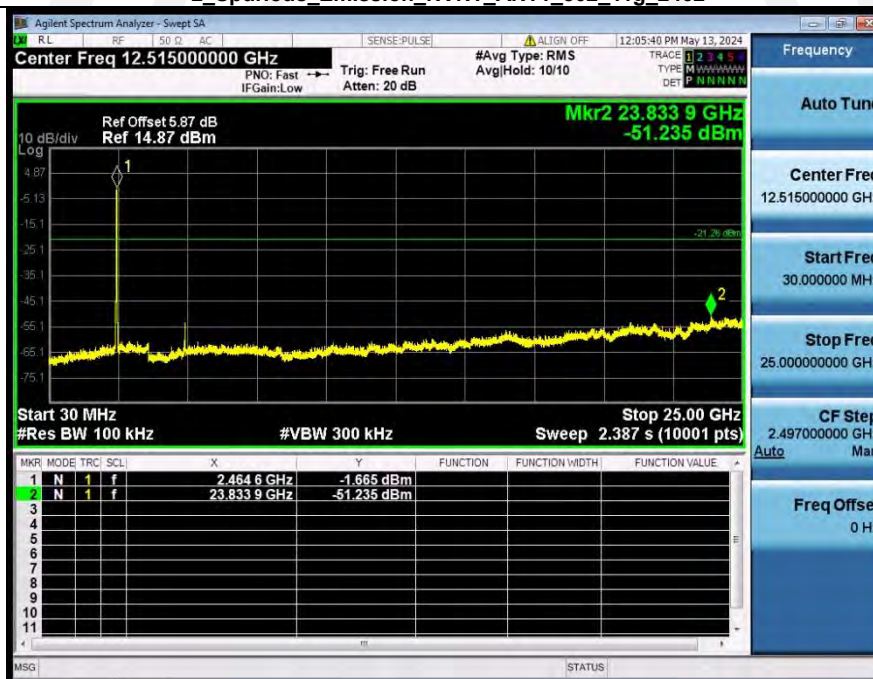

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2412




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2412

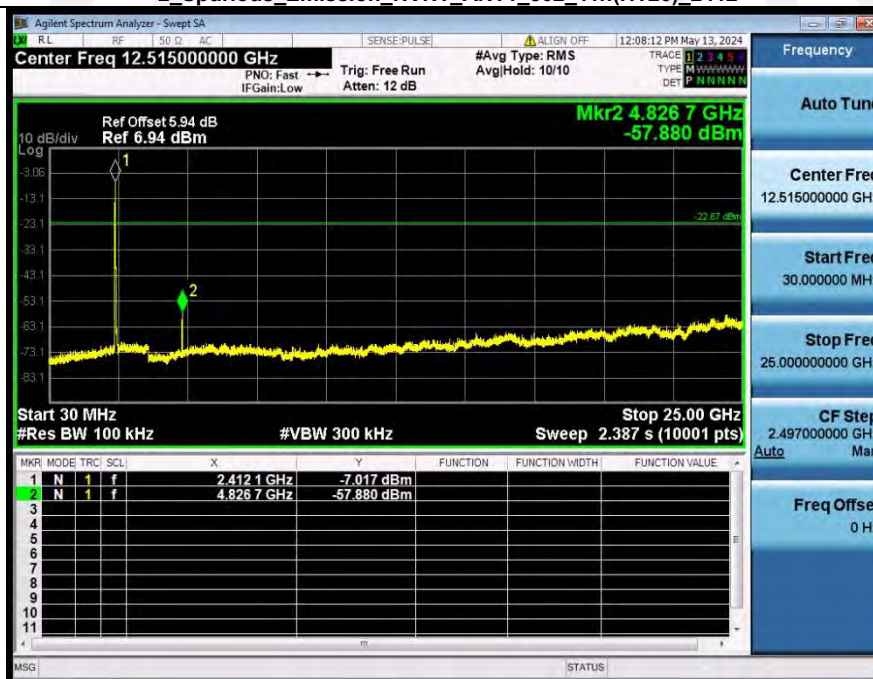

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2437



## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2437

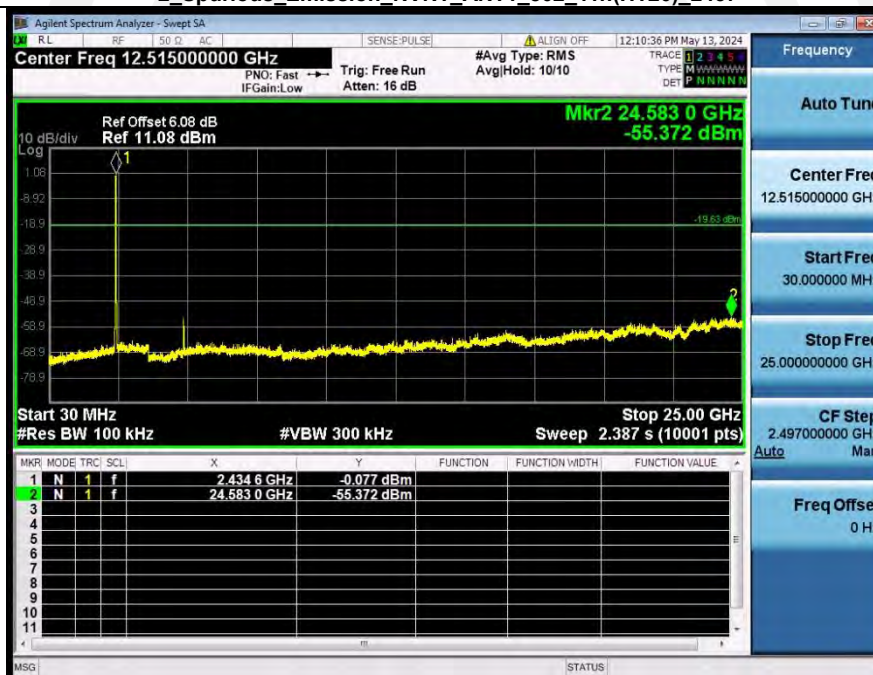




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2462




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2462

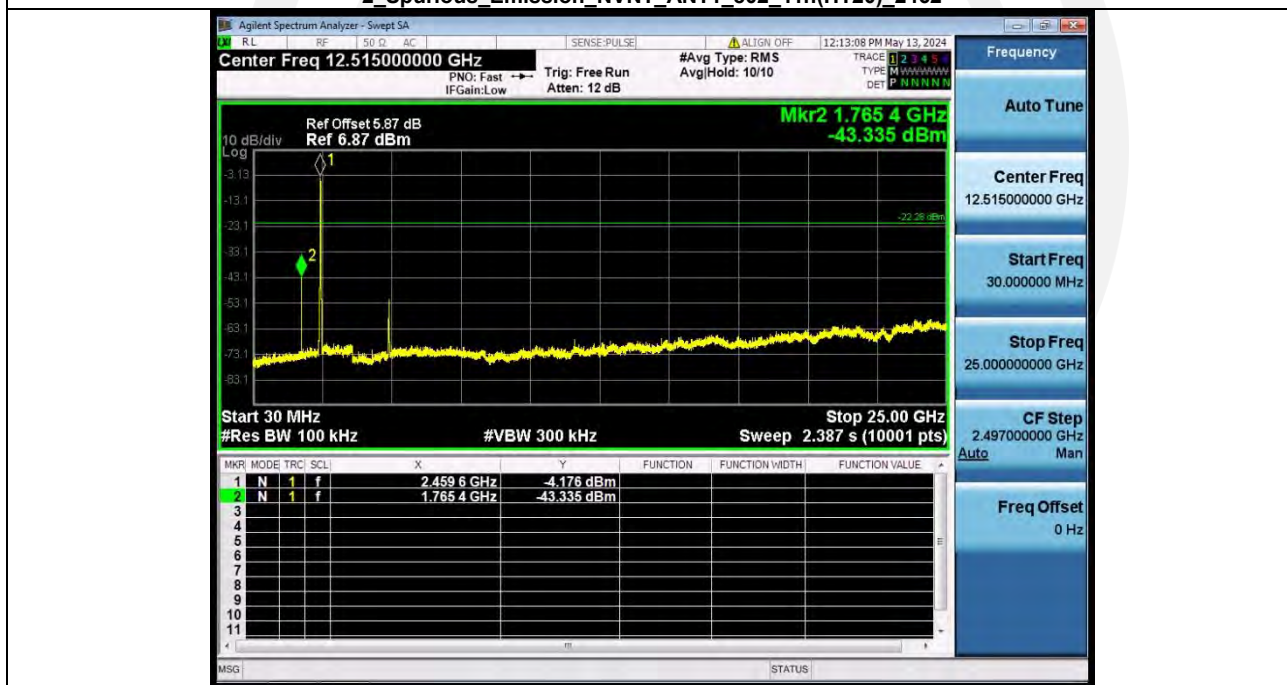


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT40)\_2422




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_2422

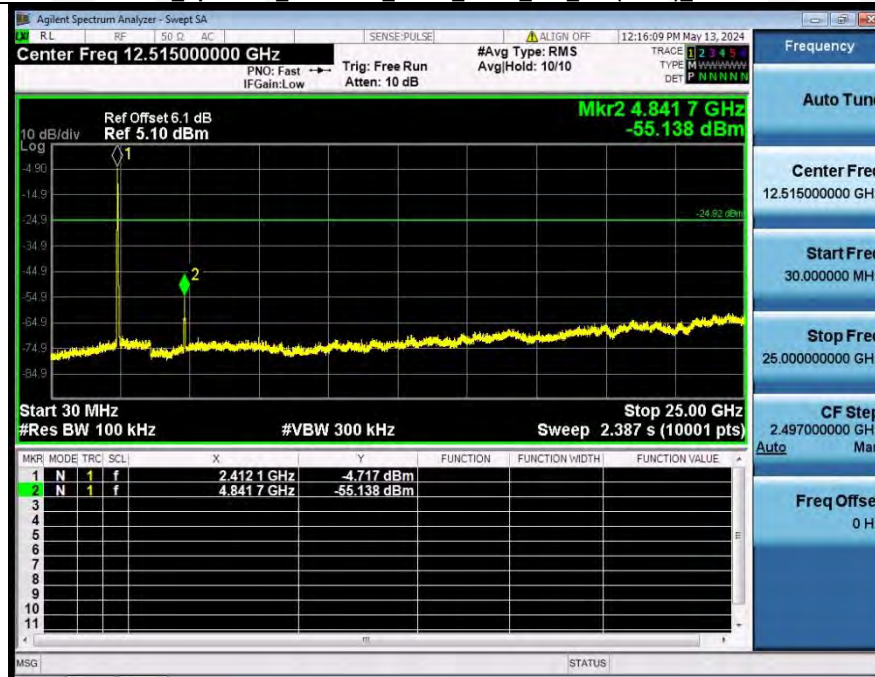

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT40)\_2437

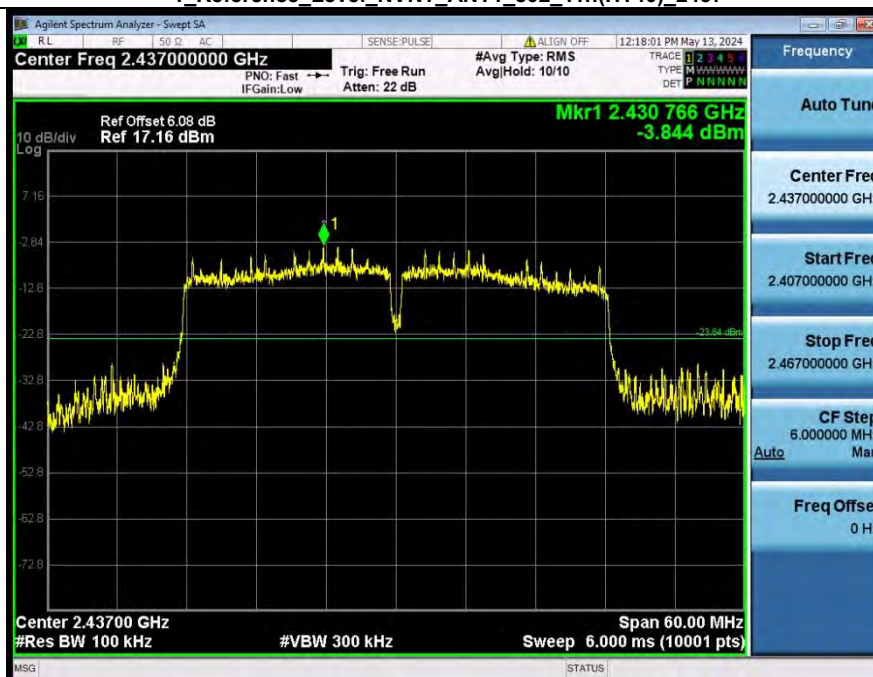

## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_2437

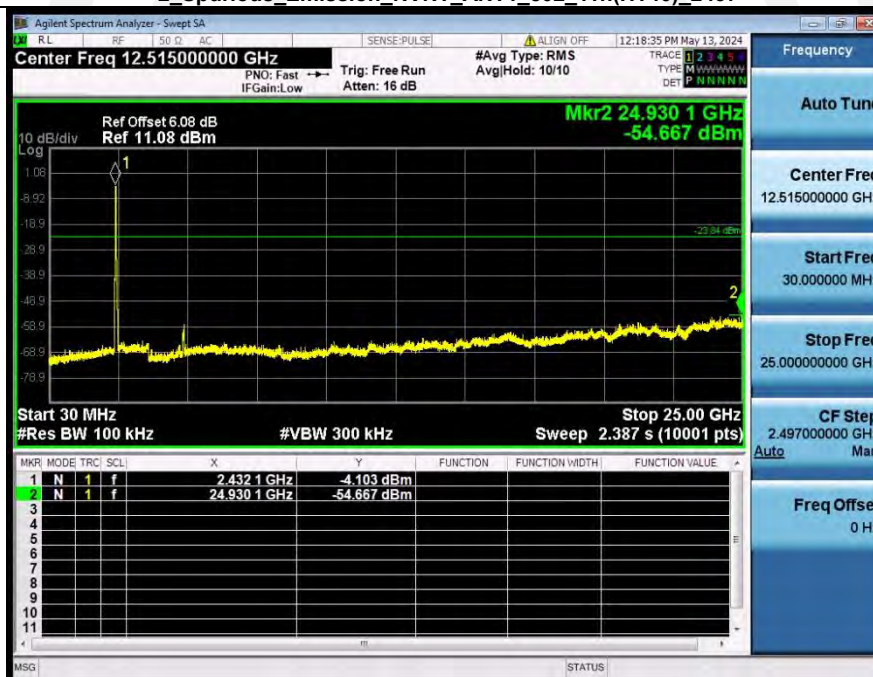




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT40)\_2452




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_2452

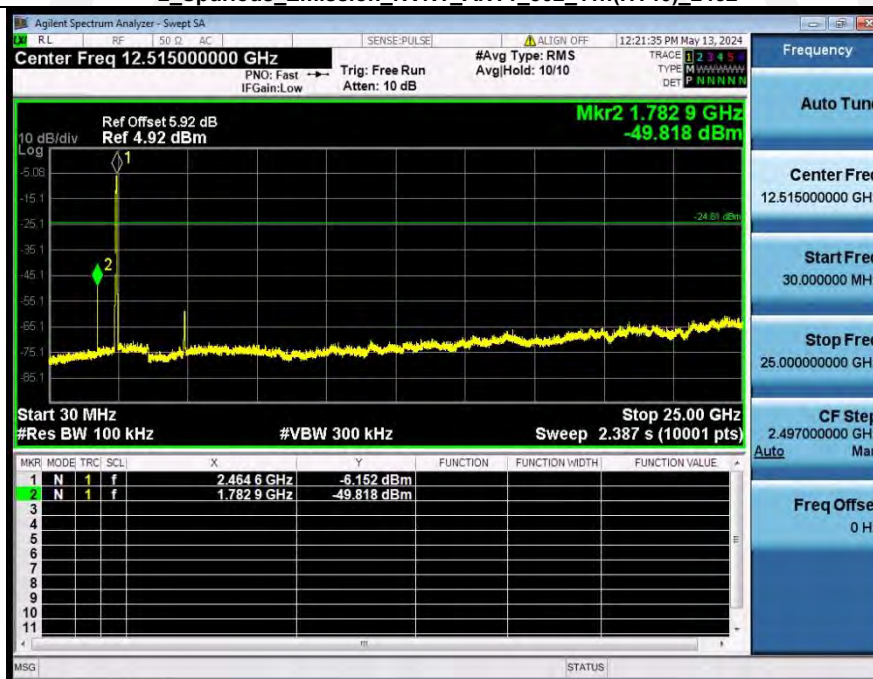


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE20)\_2412




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11ax(HE20)\_2412

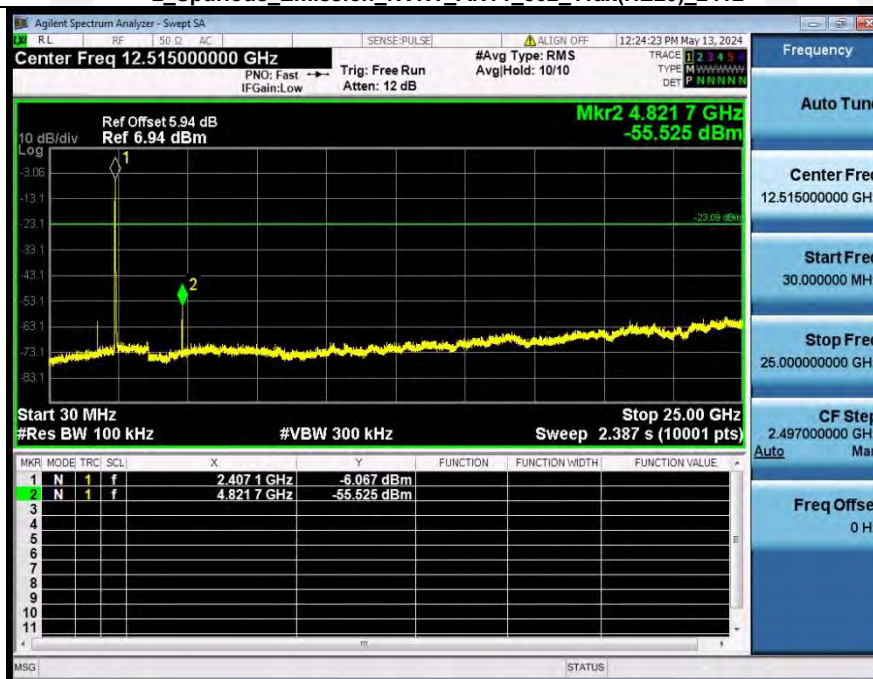

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE20)\_2437

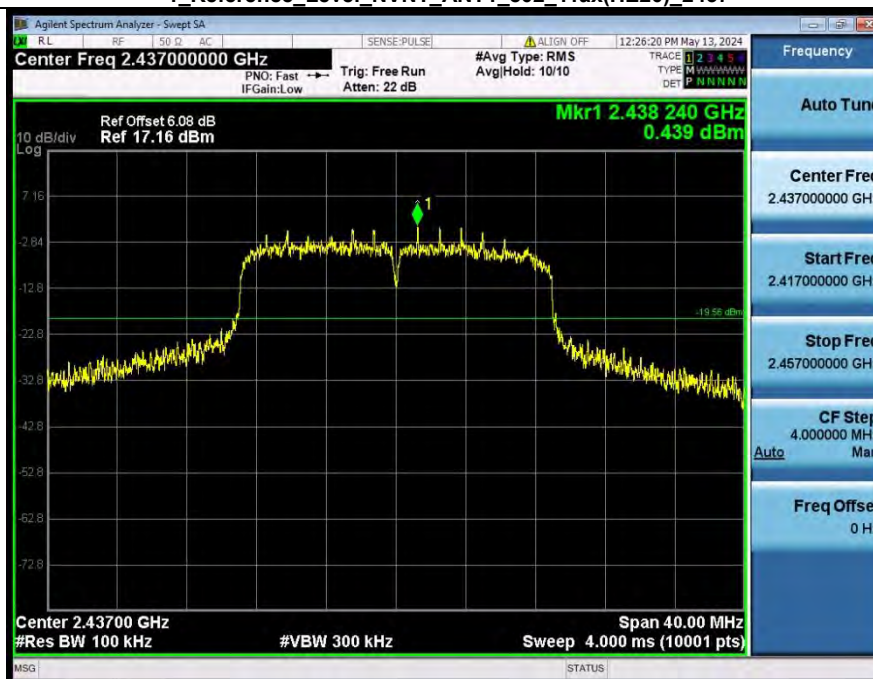

## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11ax(HE20)\_2437

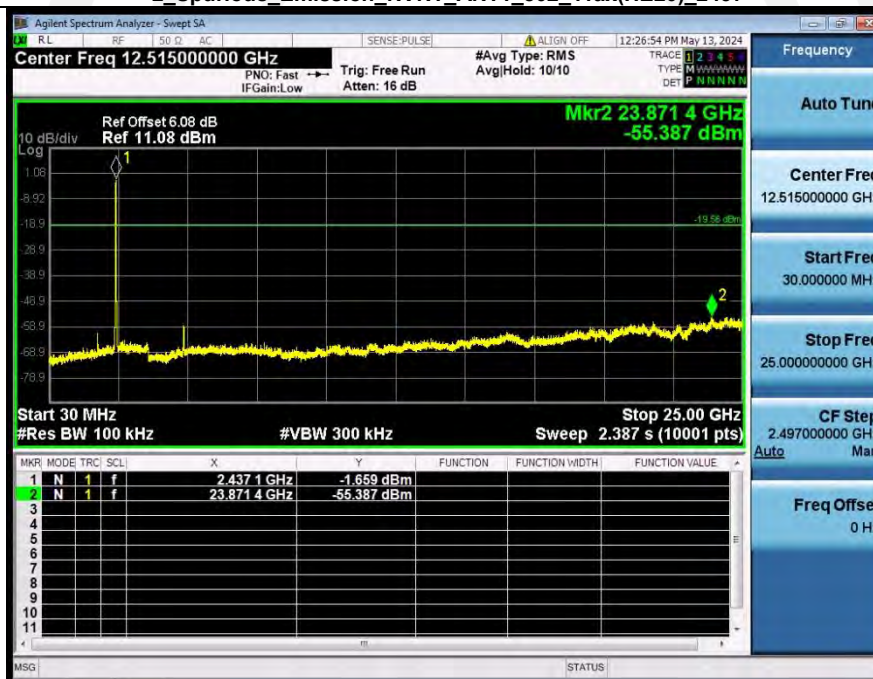



## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11ax(HE20)\_2462



## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11ax(HE20)\_2462

