


Safety & Use Manual



TM and © 2023 Disruptive Technologies AS
Disruptive Technologies AS
Strandveien 17, 1366 Lysaker, Norway
Strandveien 17, 1366 Lysaker, Norway
Researched AS. All rights reserved.
Designed in Norway,
assembled in Germany.


For support and more information about
our products, visit: d2ts.com/support
Disruptive Technologies AS
Disruptive Technologies AS
Strandveien 17, 1366 Lysaker, Norway

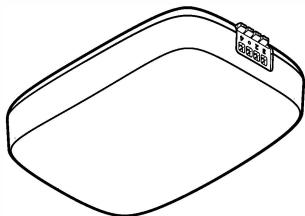

Getting Started

Sensor Installation

- 1 Pull the battery tab to activate the sensor.
- 2 Make sure the mounting surface is clean.
- 3 Mount the sensor using the adhesive on the backside.

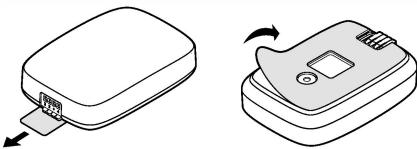

Supported Measurement Range

-200°C to 600°C (-328°F to 1112°F)

Note: The Sensor Unit supports this range.

Measurement temperature range depends on the connected probe. See probe specifications for details.

Sensor Unit Operating Conditions

Temperature: 0 to 50°C (32 to 122°F)


Humidity at 25°C: 0 to 90%RH (non condensing)

Recommended Storage Conditions


Cool and dry, near normal room temperature.

Connecting Temperature Probe

- 1 Open the terminals fully to insert the probe cables.




- 2 Insert cables based on probe wire count.



2 Wire Probe



3 Wire Probe



4 Wire Probe

Probe colors may vary. Only connect PT100 / PT1000 temperature probes to this sensor.

- 3 Close the terminals. The sensor will now begin capturing temperature measurements.

Ensure the sensor is within range of a Cloud Connector with internet access to receive data.



Keep sensors, containing batteries, out of reach of children. Seek medical assistance immediately in case of ingestion.

Please read this guide before attempting to operate the product

Failure to follow these instructions may result in an increased risk of personal injury or damage to property, including through fire, electrical shock, burns or suffocation.

Disruptive Technologies Research AS shall not be liable for damage caused where the product owner has failed to follow the instructions set out in this guide.

No changes shall be made to the equipment without the manufacturer's permission as this may void the user's authority to operate the equipment.

Wireless Temperature Probe Sensor (EU Version):

Frequency Band ISM 868 MHz
Transmit Power < 10 mW

CE: Hereby, Disruptive Technologies Research AS declares that the radio equipment type Wireless Temperature Probe Sensor PN 102772 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:
www.d21s.com/doc

UK: Hereby, Disruptive Technologies Research AS, declares that the radio equipment type Wireless Temperature Probe Sensor PN 102772 is in compliance with UK SI 2017, No 1206: Radio Equipment Regulations. The full text of the UK DoC can be found at the following web address:
www.d21s.com/doc

Wireless Temperature Probe Sensor (US Version):

Frequency Band ISM 915 MHz
Transmit Power < 10 mW

FCC: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device complies with the safety requirements for portable RF exposure in accordance with FCC rule part 2.1093 and KDB 447498 D01.

⚠️ Warnings

- Not waterproof, should only be used in a dry environment.
- Do not mount above 2 meters due to safety reasons.
- Only use 1.5V Alkaline or Lithium AA/FR6 batteries. Note the polarity (orientation) of the batteries as indicated on the device.
 - Do not crush, cut, disassemble or dispose of batteries in fire. It can result in an explosion or leakage of harmful and flammable substances.
 - Do not expose batteries to temperatures above 70°C or extremely low air pressure due to risk of rupture or explosion.

ISED: This device contains licence-exempt transmitter(s)/ receiver(s) that comply with Innovation, Science and Economic Development Canada's [\(IC:RS-005-2015-003\) Conditions subject to the \(2\) thing device conditions](#), except any interference, including interference that may cause undesired operation of the device.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes:

(1) Cet appareil ne doit pas causer d'interférences

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil

This device complies with the safety requirements for RF exposure in accordance with RSS-102 Issue 5 for portable use conditions.

Le présent appareil est conforme aux limites d'exposition aux RF conformément au norme CNR-102 émission 5 pour conditions d'utilisation portable.