

FCC REPORT

Applicant: Ubio Labs, Inc.

Address of Applicant: 2821 Northup Way, Suite 250 Bellevue, WA 98004 USA

Equipment Under Test (EUT)

Product Name: Wireless Charging Stand

Model No.: AWC1094

Trade mark: ubiolabs

FCC ID: 2ATGY-AWC1094

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.209

Date of sample receipt: 21 Jul., 2020

Date of Test: 21 Jul., to 29 Jul., 2020

Date of report issue: 10 Aug., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	30 Jul., 2020	Original
01	10 Aug., 2020	Update Page 4, 12, 13

Tested By:
Test Engineer**Date:**

10 Aug., 2020

Reviewed By:
Project Engineer**Date:**

10 Aug., 2020

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE AND TEST SAMPLES PLANS	5
5.4 DESCRIPTION OF SUPPORT UNITS.....	5
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	6
5.7 LABORATORY FACILITY.....	6
5.8 LABORATORY LOCATION	6
5.9 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT.....	8
6.2 RADIATED EMISSION	9
6.3 CONDUCTED EMISSION	16
6.4 BANDWIDTH	19
7 TEST SETUP PHOTOS	21
8 EUT CONSTRUCTIONAL PHOTOS	23

4 Test Summary

Test Item	Section in CFR 47	Result
Spurious emissions	15.209	Pass
20dB Bandwidth	15.215(c)	Pass
Conducted Emission	15.207	Pass
Remark:		
1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).		
Test Method:	ANSI C63.10-2013	

5 General Information

5.1 Client Information

Applicant:	Ubio Labs, Inc.
Address:	2821 Northup Way, Suite 250 Bellevue, WA 98004 USA
Factory:	SHENZHEN LANNENGSHITONG ELECTRONICS CO., LTD
Address:	Floor3 No.40, Xinhe Road, Shangmugu Village, Pinghu Neighborhood, Longgang District, Shenzhen City, Guangdong Province, China.

5.2 General Description of E.U.T.

Product Name:	Wireless Charging Stand
Model No.:	AWC1094
Operation Frequency:	127.7kHz
Modulation type:	Load modulation
Antenna Type:	Coil Antenna
Power supply (Wireless Charger):	Model: AWC1094 Input: DC 15V, 2.5A Input (USB-A): DC 5V, 2.4A Output Wireless: 5W-15W
AC Adapter:	Model: CHG1151 Input: AC 110-240V, 50-60 Hz Output: 15V / 2.5A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test mode and test samples plans

Transmitting mode:	Keep the EUT in transmitting mode with modulation
--------------------	---

5.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Skytek	Wireless charging match load	N/A	N/A	N/A
Apple	Mobile phone	iPhone 11 Pro	MWDE2CH/A	Doc

5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB
Radiated Emission (18GHz ~ 26.5GHz)	±3.20 dB

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
				07-22-2020	07-21-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Loop Antenna	SCHWARZBECK	FMZB 1519 B	00044	03-07-2020	03-06-2021
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Simulated Station	Anritsu	MT8820C	6201026545	03-07-2020	03-06-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2020
				07-21-2020	07-20-2021
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A


6 Test results and Measurement Data

6.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
E.U.T Antenna:	

6.2 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209							
Test Frequency Range:	9kHz to 1000MHz							
Test site:	Measurement Distance: 3m(Semi-Anechoic Chamber)							
Receiver setup:	Frequency	Detector	RBW	VBW	Remark			
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak Value			
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value			
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
Limit:	Frequency (MHz)	Limit (uV/m @3m)	Distance (m)					
	0.009-0.490	2400/F(kHz)	300					
	0.490-1.705	24000/F(kHz)	30					
	1.705-30	30	30					
	30-88	100	3					
	88-216	150	3					
	216-960	200	3					
Test Procedure:	Above 1GHz	500	3					
	<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>							
	<p>Test setup:</p> <p>9kHz-30MHz</p> <p>30MHz-1GHz</p>							

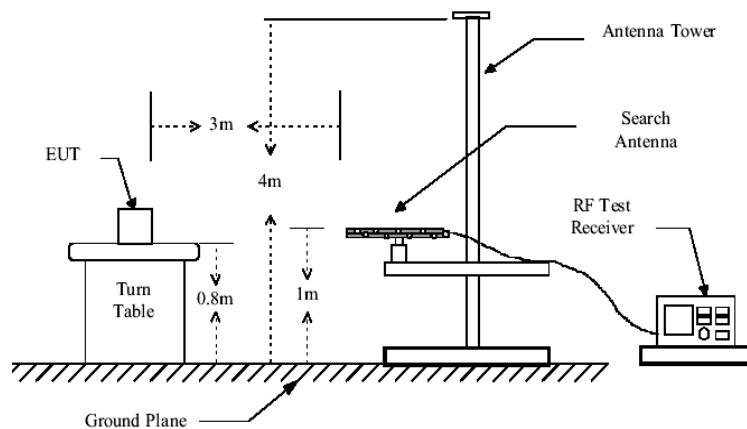


Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass
Remark:	The emission levels of above 1 GHz are very lower than the limit and not show in test report.

Measurement Data:**a) Fundamental field strength**


Peak value				
Test Polarization	Frequency (kHz)	H-field@3m (dB μ V)	Limit@3m (dB μ V)	Result
Horizontal	127.70	68.33	125.48	Pass
Vertical	127.70	62.41	125.48	Pass
Average value				
Test Polarization	Frequency (kHz)	H-field@3m (dB μ V)	Limit@3m (dB μ V)	Result
Horizontal	127.70	65.16	105.48	Pass
Vertical	127.70	59.38	105.48	Pass

b) Radiated spurious:

Below 1GHz:

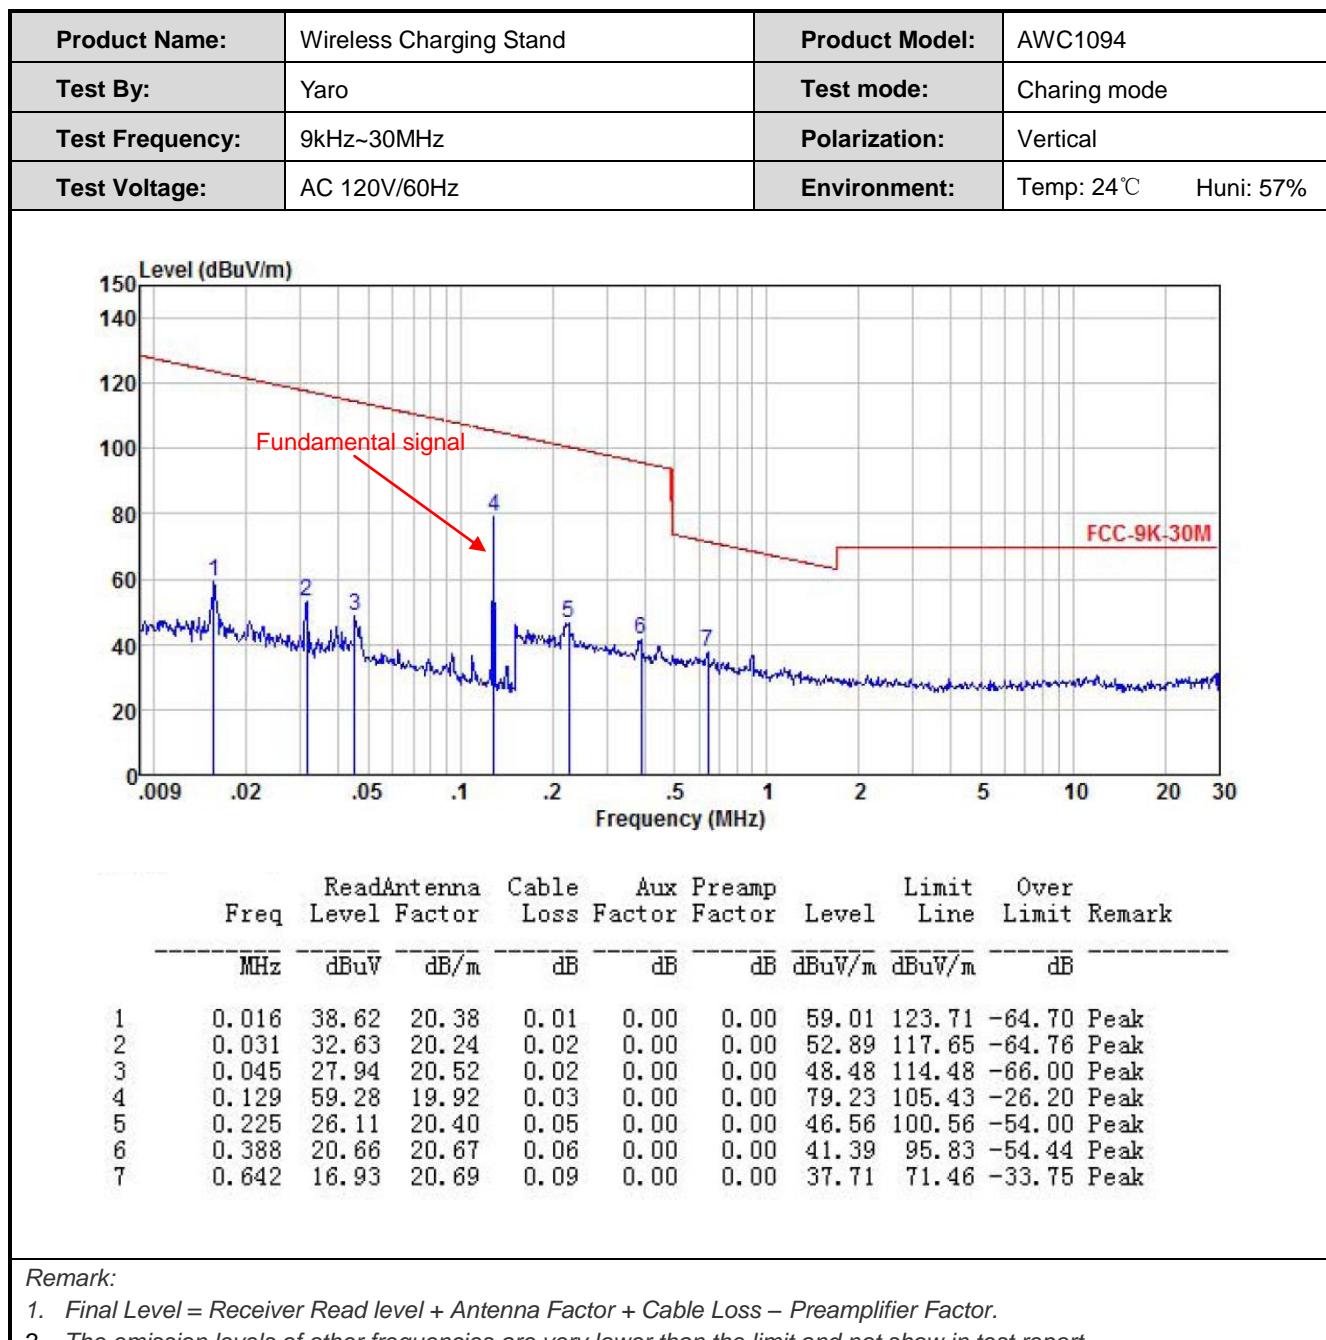

Product Name:	Wireless Charging Stand	Product Model:	AWC1094
Test By:	Yaro	Test mode:	Charing mode
Test Frequency:	9kHz~30MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

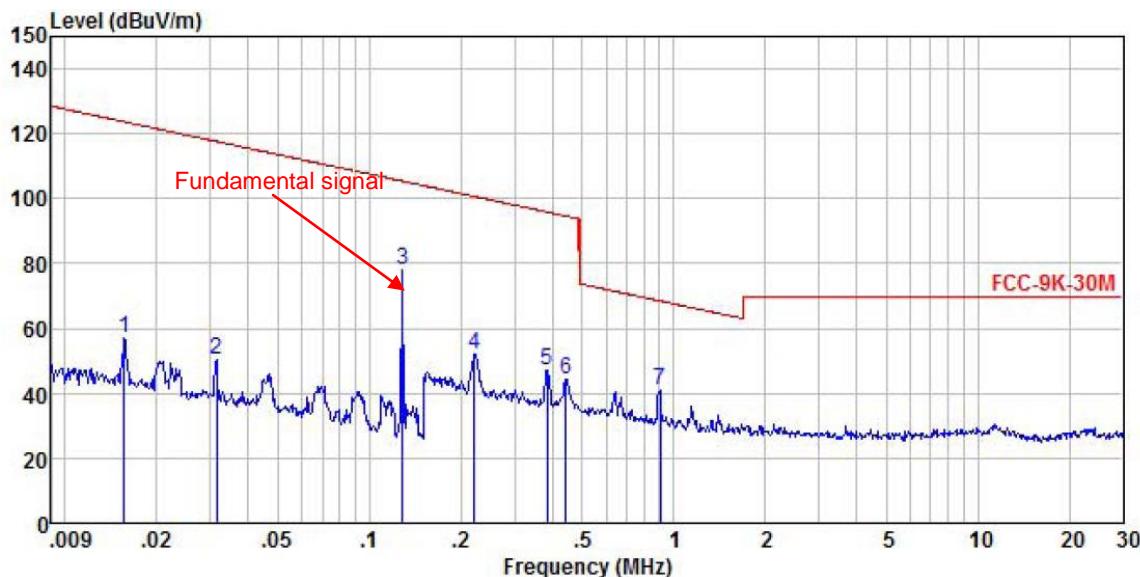


Freq MHz	Read	Antenna	Cable	Aux	Preamp	Limit Level dBuV/m	Line Limit dBuV/m	Over Limit dB	Remark
	Freq	Level	Factor	Loss	Factor				
1	0.016	36.49	20.38	0.01	0.00	56.88	123.71	-66.83	Peak
2	0.031	30.08	20.24	0.02	0.00	50.34	117.65	-67.31	Peak
3	0.129	58.31	19.92	0.03	0.00	78.26	105.43	-27.17	Peak
4	0.222	31.55	20.39	0.04	0.00	51.98	100.70	-48.72	Peak
5	0.385	26.26	20.67	0.06	0.00	46.99	95.90	-48.91	Peak
6	0.442	23.40	20.74	0.07	0.00	44.21	94.70	-50.49	Peak
7	0.902	20.46	20.55	0.11	0.00	41.12	68.51	-27.39	Peak

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Wireless Charging Stand	Product Model:	AWC1094
Test By:	Yaro	Test mode:	Charing mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

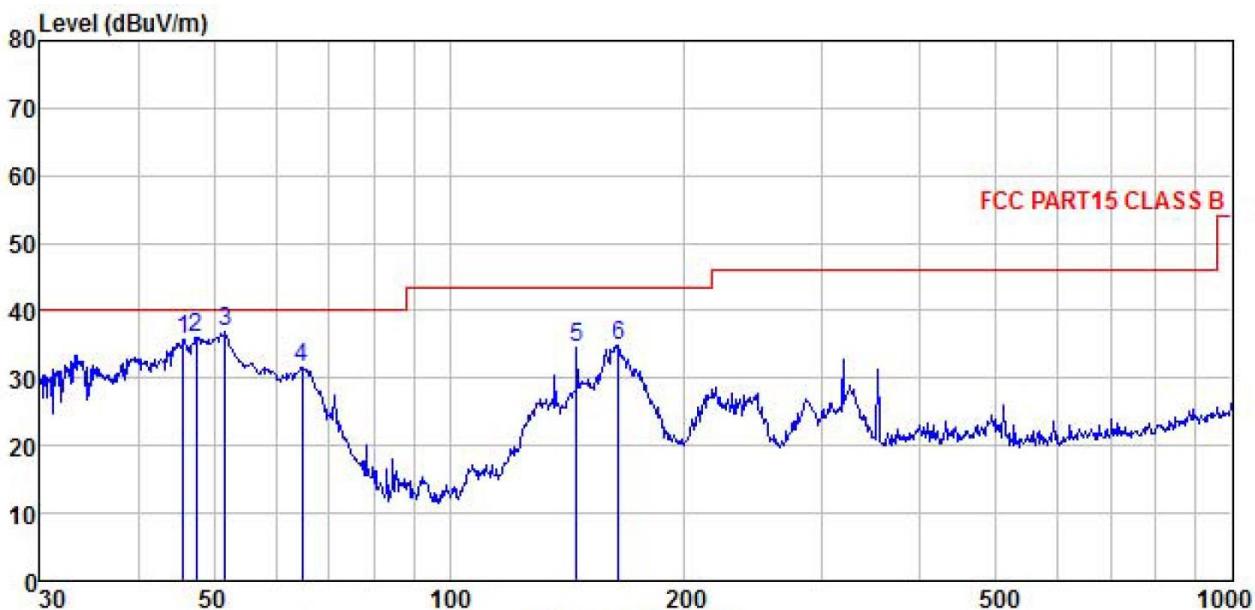


Freq	ReadAntenna		Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Over Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	45.695	52.26	12.94	0.38	0.00	29.85	35.73	40.00	-4.27 QP
2	47.492	52.52	13.05	0.38	0.00	29.84	36.11	40.00	-3.89 QP
3	51.662	53.72	12.57	0.39	0.00	29.81	36.87	40.00	-3.13 QP
4	64.887	51.23	9.80	0.43	0.00	29.76	31.70	40.00	-8.30 QP
5	145.351	49.23	13.94	0.61	0.00	29.24	34.54	43.50	-8.96 QP
6	164.330	47.61	15.59	0.64	0.00	29.10	34.74	43.50	-8.76 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Product Name:	Wireless Charging Stand	Product Model:	AWC1094
Test By:	Yaro	Test mode:	Charing mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

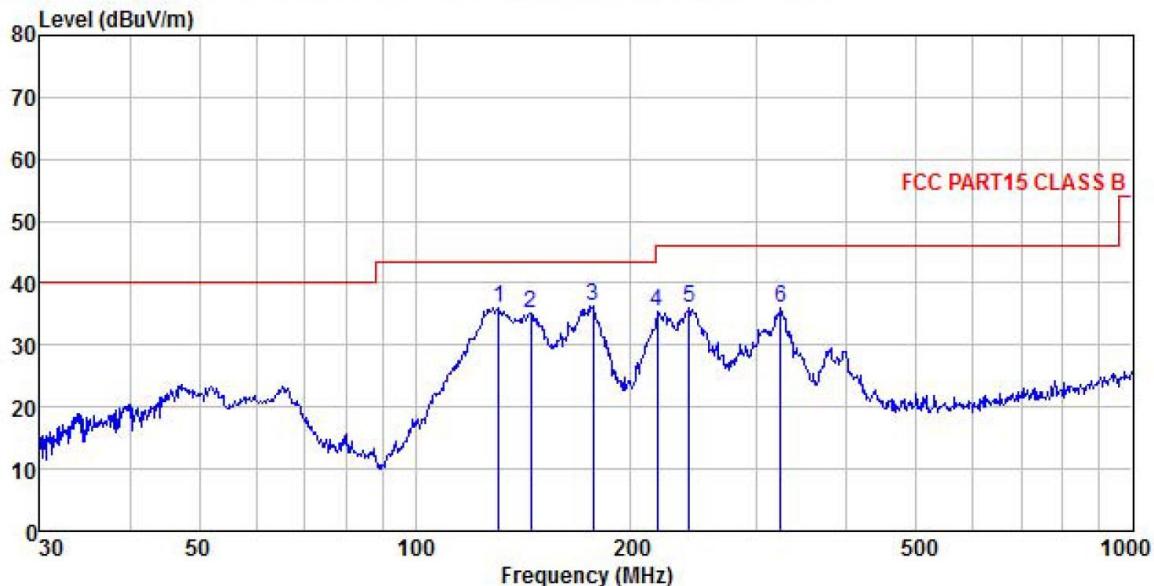


Freq MHz	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark
	Level dBuV	Factor	Loss dB	Factor	Factor	Level dBuV/m	Line dBuV/m	
1 130.837	52.51	12.11	0.59	0.00	29.32	35.89	43.50	-7.61 QP
2 144.842	49.75	13.90	0.61	0.00	29.25	35.01	43.50	-8.49 QP
3 176.888	47.95	16.84	0.67	0.00	29.00	36.46	43.50	-7.04 QP
4 217.544	44.93	18.38	0.74	0.00	28.72	35.33	46.00	-10.67 QP
5 240.830	45.31	18.47	0.76	0.00	28.59	35.95	46.00	-10.05 QP
6 323.320	44.94	18.75	0.89	0.00	28.50	36.08	46.00	-9.92 QP

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

6.3 Conducted Emission

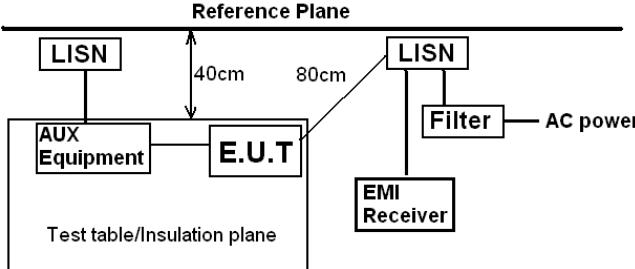Test Requirement:	FCC Part 15 B Section 15.207									
Test Frequency Range:	150kHz to 30MHz									
Class / Severity:	Class B									
Receiver setup:	RBW=9kHz, VBW=30kHz									
Limit:	Frequency range (MHz)		Limit (dB μ V)							
			Quasi-peak	Average						
	0.15-0.5		66 to 56*	56 to 46*						
	0.5-5		56	46						
0.5-30		60	50							
* Decreases with the logarithm of the frequency.										
Test setup:	 <p>Remark: <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>									
Test procedure	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). They provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. 									
Test environment:	Temp.:	23 °C	Humid.:	56%	Press.:	101kPa				
Test Instruments:	Refer to section 5.9 for details									
Test mode:	Refer to section 5.3 for details									
Test results:	Pass									

Measurement data:

Product name:	Wireless Charging Stand	Product Model:	AWC1094
Test by:	Yaro	Test mode:	Charing mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

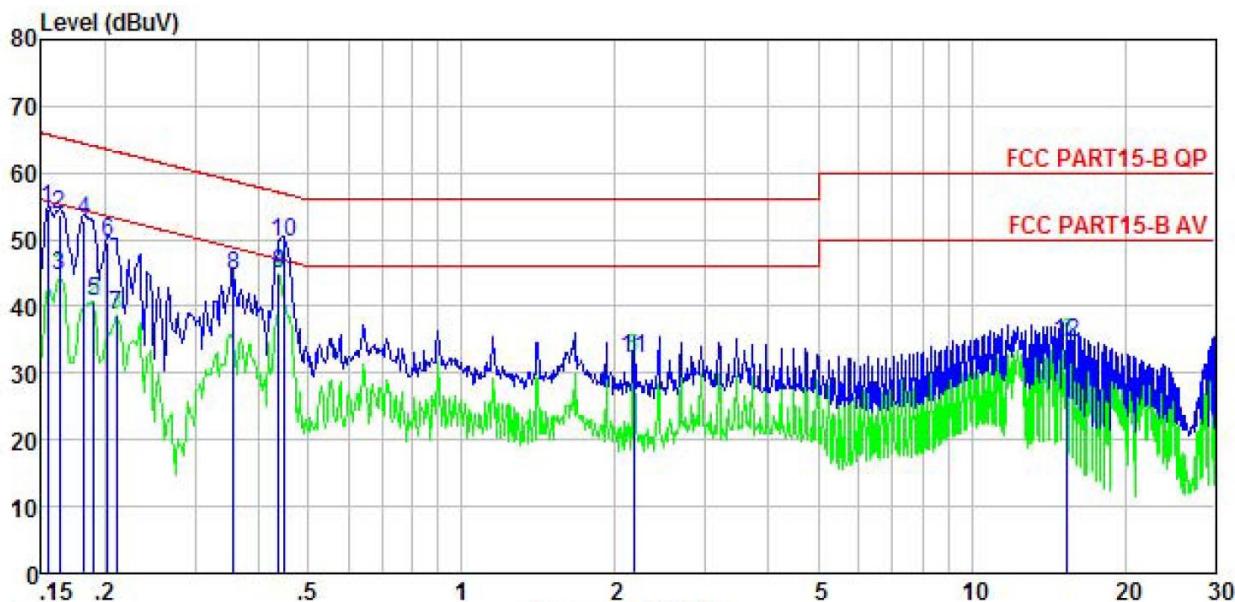


Freq	Read Level	LISN Factor	Cable Loss	Aux Factor	Level	Limit	Over	Remark
						Line	Line	
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	44.44	-0.57	10.78	-0.06	54.59	65.78	-11.19 QP
2	0.162	43.55	-0.58	10.77	-0.08	53.66	65.34	-11.68 QP
3	0.162	34.41	-0.58	10.77	-0.08	44.52	55.34	-10.82 Average
4	0.182	42.71	-0.58	10.77	-0.12	52.78	64.42	-11.64 QP
5	0.190	30.73	-0.59	10.76	-0.14	40.76	54.02	-13.26 Average
6	0.202	39.51	-0.59	10.76	-0.16	49.52	63.54	-14.02 QP
7	0.211	28.68	-0.58	10.76	-0.17	38.69	53.18	-14.49 Average
8	0.358	34.33	-0.51	10.73	0.16	44.71	58.78	-14.07 QP
9	0.437	34.59	-0.46	10.74	0.11	44.98	47.11	-2.13 Average
10	0.447	39.19	-0.46	10.74	0.05	49.52	56.93	-7.41 QP
11	2.178	21.98	-0.49	10.95	-0.30	32.14	46.00	-13.86 Average
12	15.388	20.94	-0.71	10.90	3.38	34.51	50.00	-15.49 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss.

Product name:	Wireless Charging Stand	Product Model:	AWC1094
Test by:	Yaro	Test mode:	Charing mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

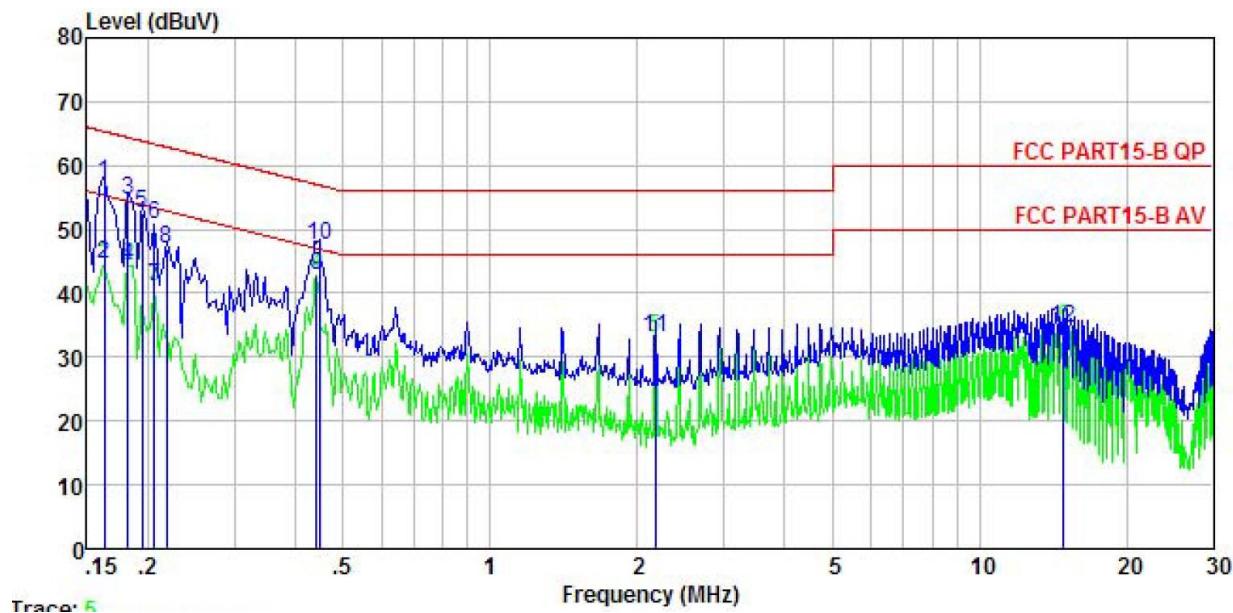


Freq	Read	LISN	Cable	Aux	Limit	Over	Remark	
	Freq	Level	Factor	Loss				
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	dB
1	0.162	47.28	-0.68	10.77	0.01	57.38	65.34	-7.96 QP
2	0.162	34.37	-0.68	10.77	0.01	44.47	55.34	-10.87 Average
3	0.182	44.54	-0.68	10.77	0.00	54.63	64.42	-9.79 QP
4	0.182	34.24	-0.68	10.77	0.00	44.33	54.42	-10.09 Average
5	0.194	42.31	-0.67	10.76	0.00	52.40	63.84	-11.44 QP
6	0.206	40.64	-0.67	10.76	0.00	50.73	63.36	-12.63 QP
7	0.206	30.89	-0.67	10.76	0.00	40.98	53.36	-12.38 Average
8	0.219	36.70	-0.67	10.76	0.00	46.79	62.88	-16.09 QP
9	0.442	32.82	-0.64	10.74	-0.02	42.90	47.02	-4.12 Average
10	0.447	37.40	-0.64	10.74	-0.02	47.48	56.93	-9.45 QP
11	2.178	22.48	-0.70	10.95	0.20	32.93	46.00	-13.07 Average
12	14.828	21.29	-0.81	10.90	3.05	34.43	50.00	-15.57 Average

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.4 Bandwidth

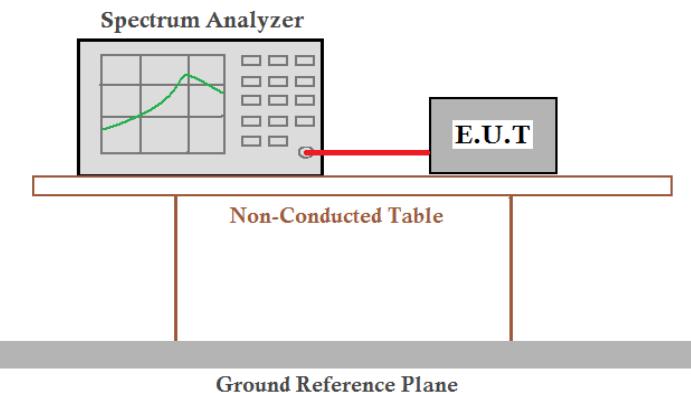Test Requirement:	FCC Part15 C Section 15.215 (c)
Receiver setup:	RBW=1 kHz, VBW=3 kHz, detector: Peak
Limit:	The fundamental emission be kept within atleast the central 80% of the permitted band
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

20dB bandwidth (kHz)	99% bandwidth (kHz)	Limits
2.82	2.36	N/A

Remark: For report purpose only.


Test plot as follows:

20dB bandwidth

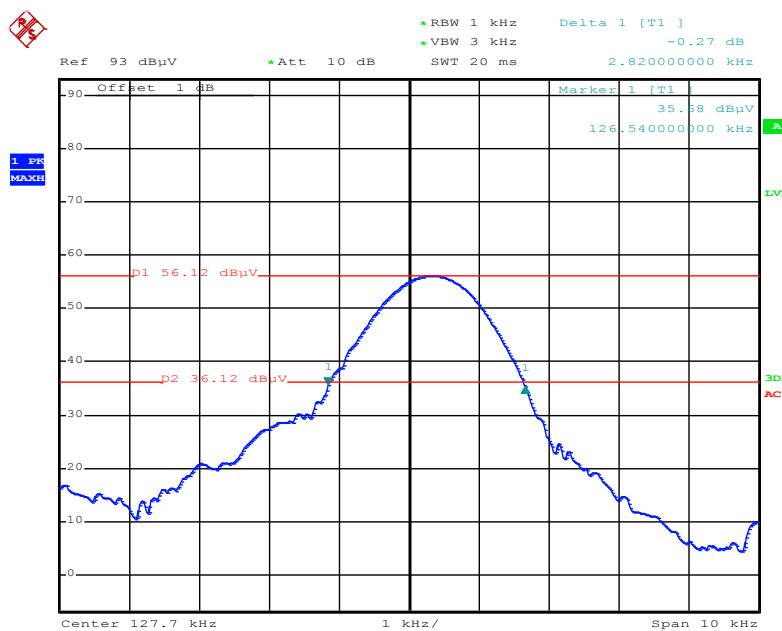

Date: 24.JUL.2020 16:48:05

99% bandwidth

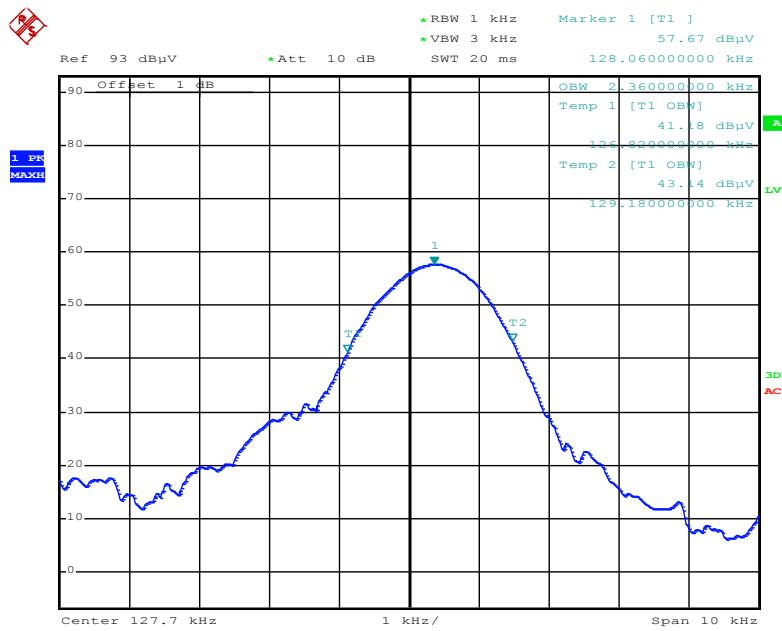

Date: 24.JUL.2020 16:47:16

7 Test Setup Photos


Radiated Emission(9kHz-30MHz)




Radiated Emission(30MHz-1000MHz)




Conducted Emission

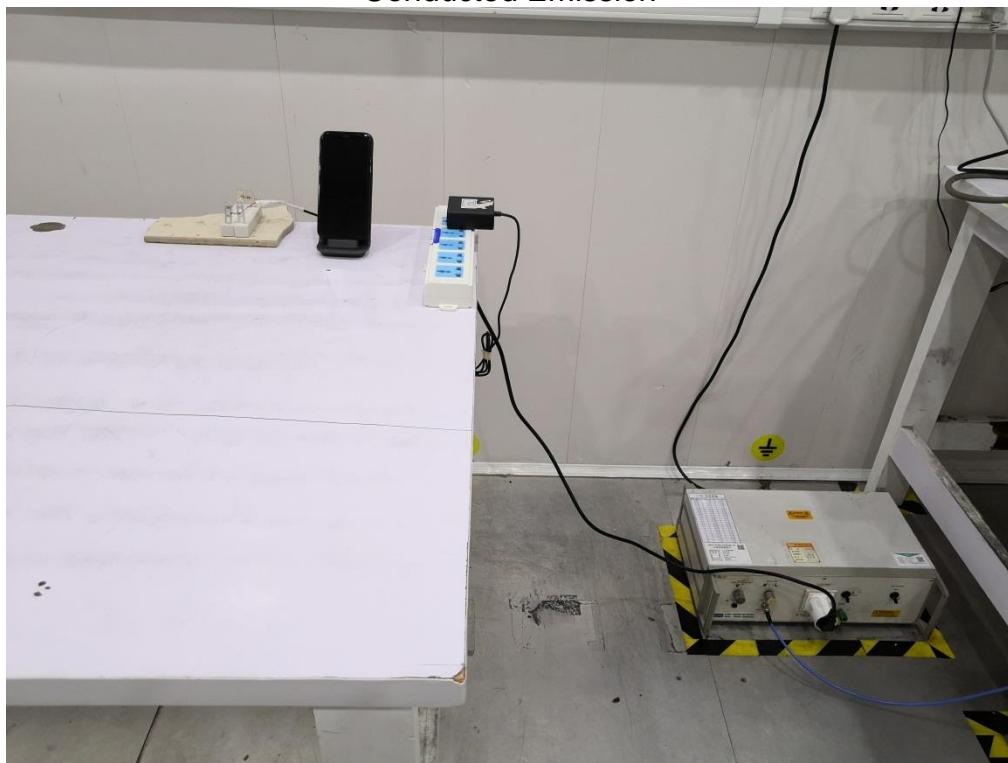

8 EUT Constructional Photos

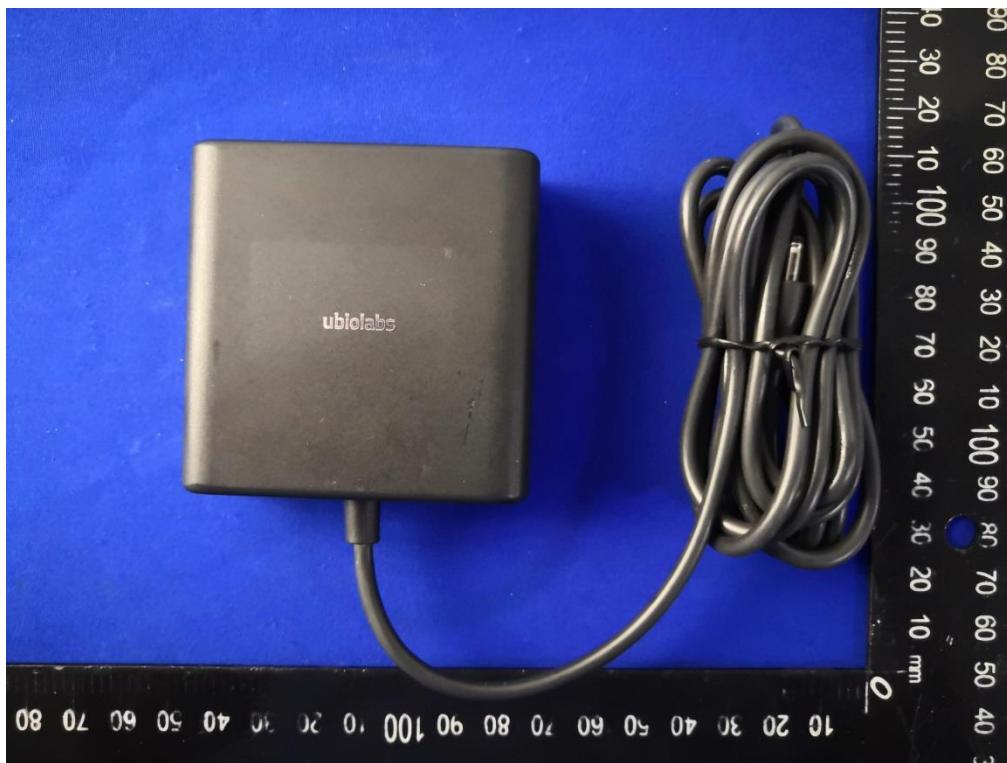







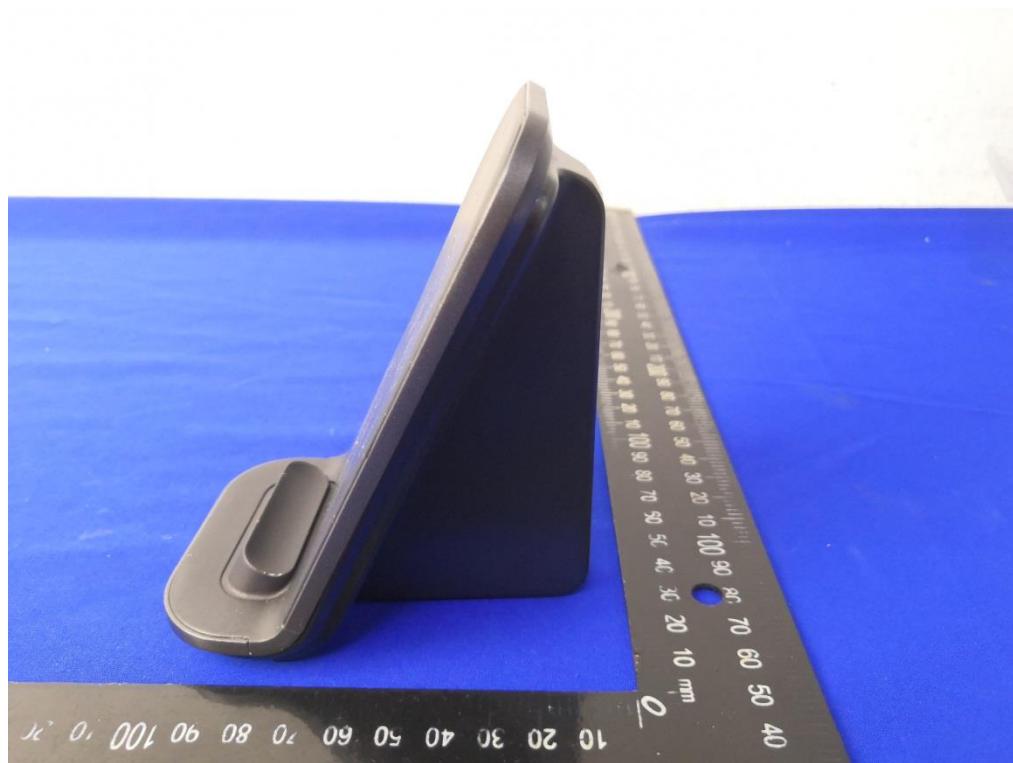







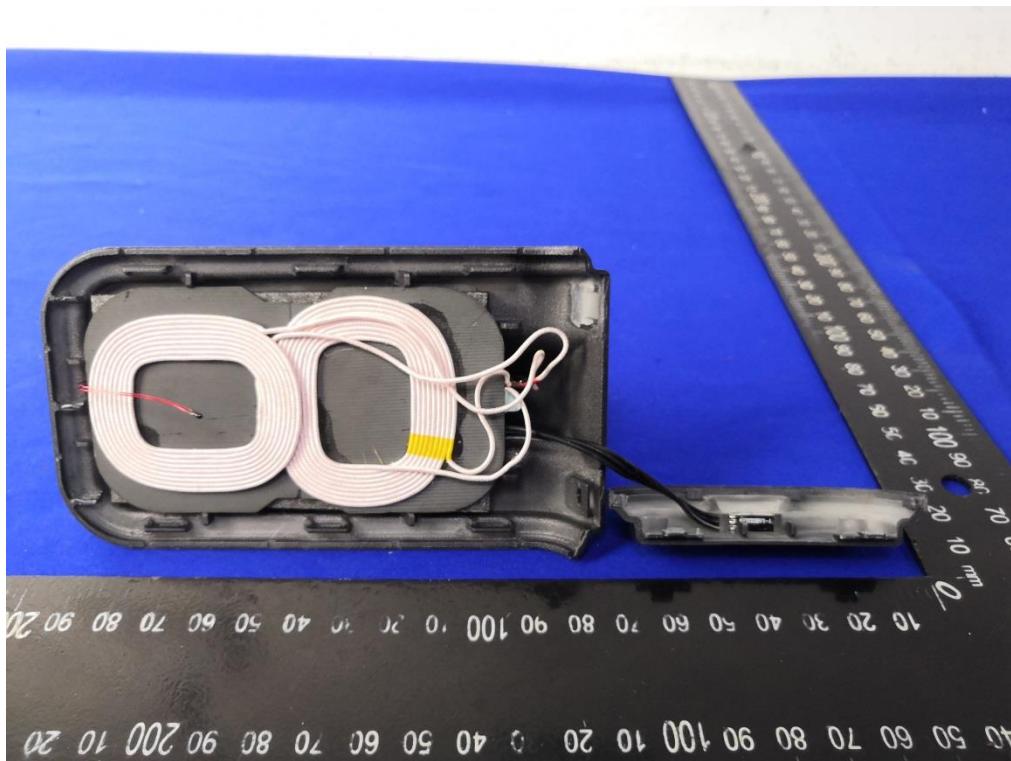

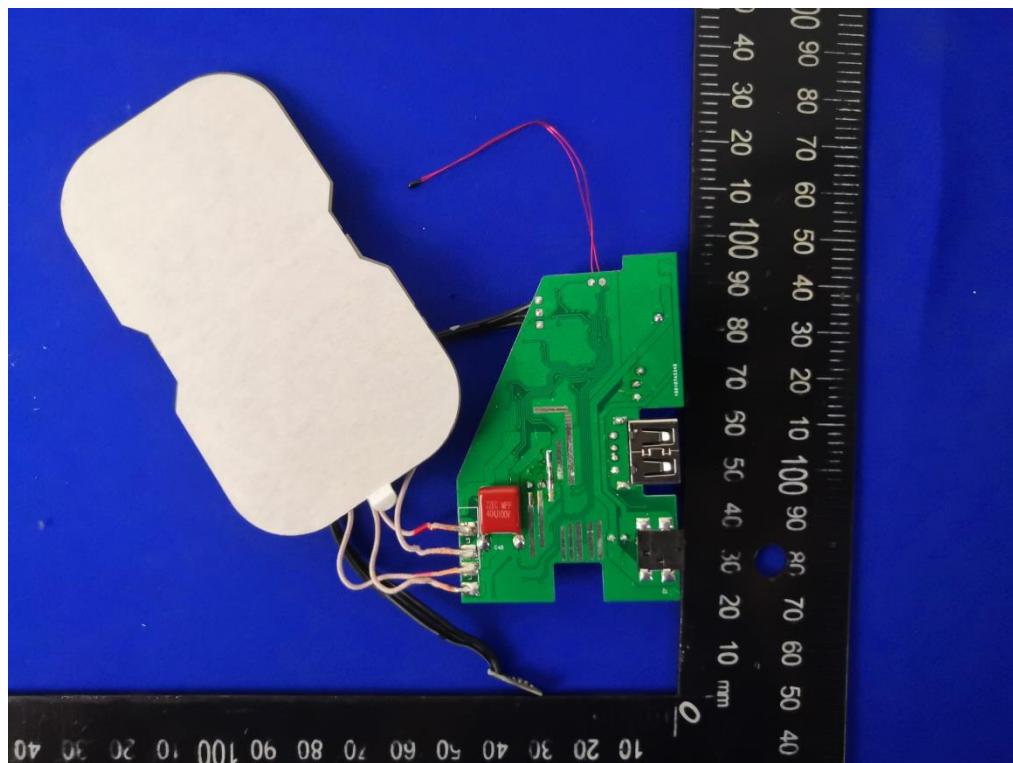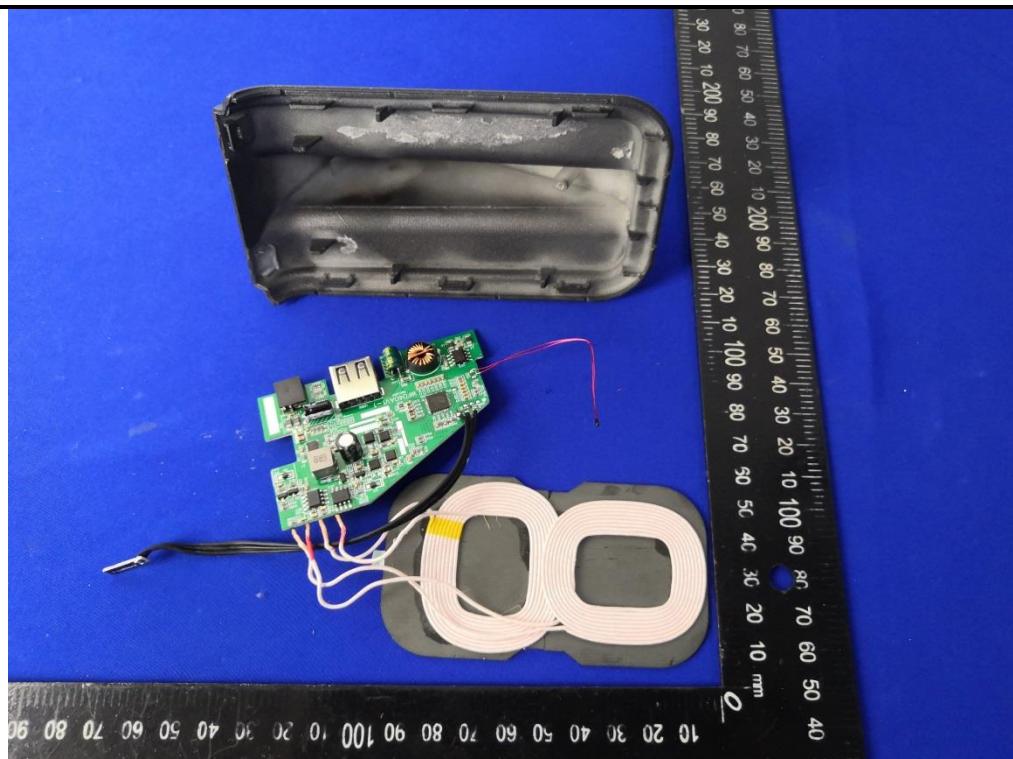

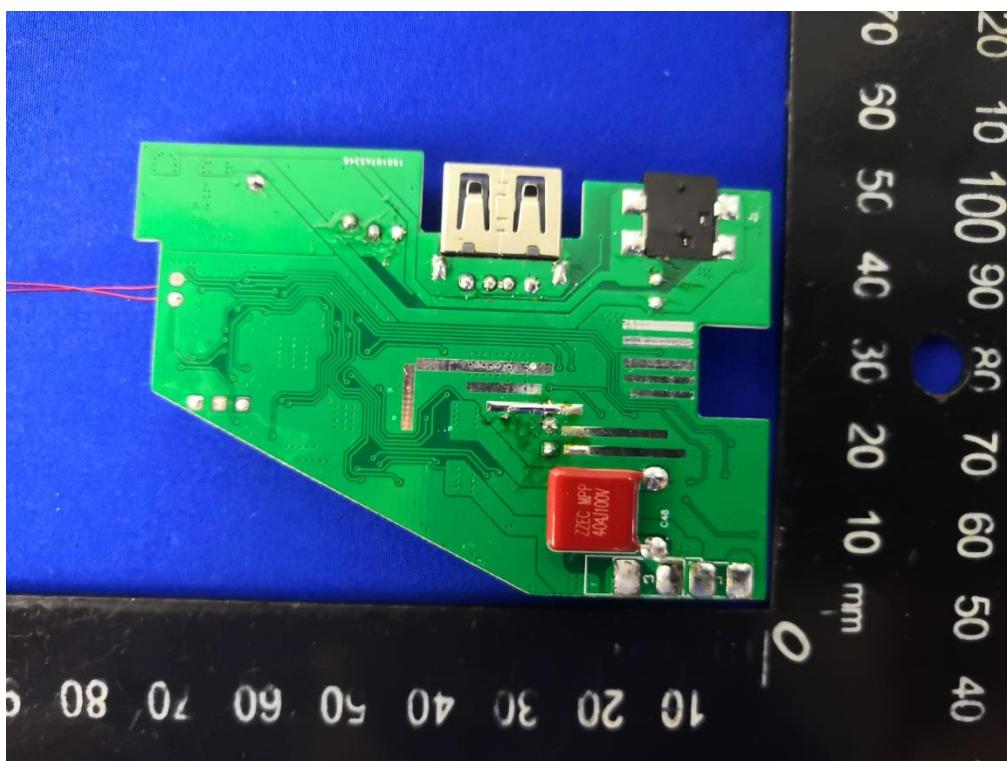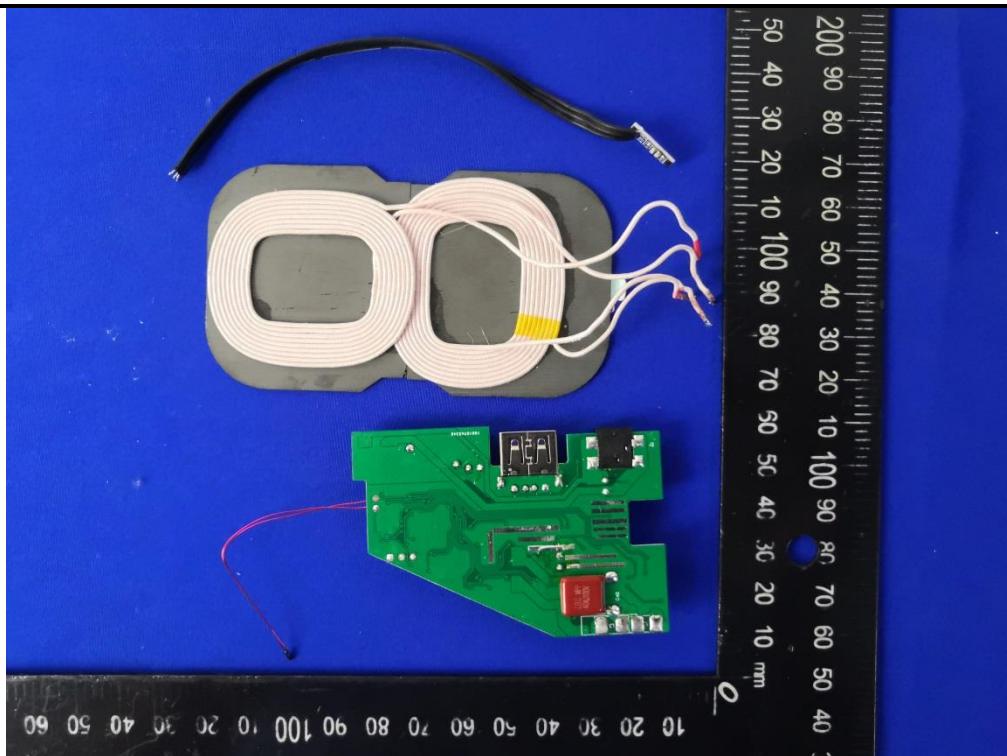

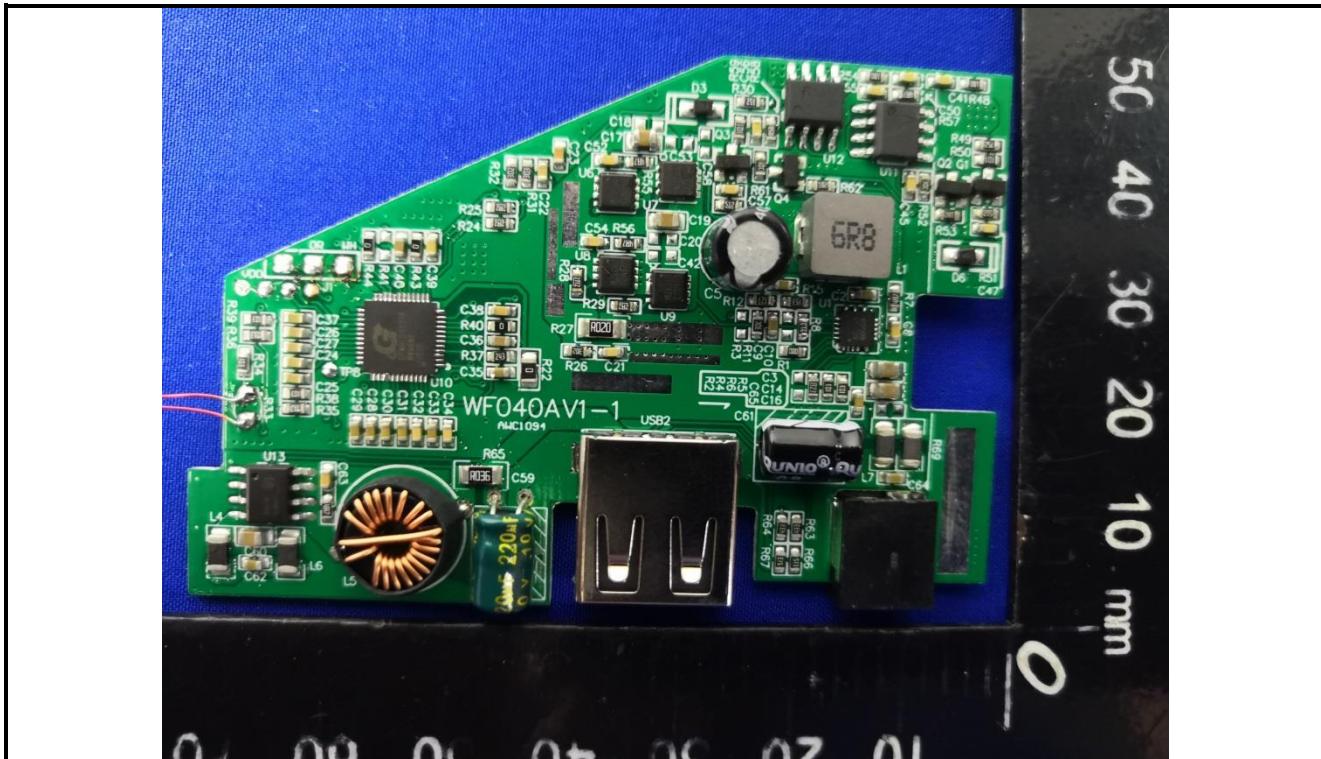

-----End of report-----