



FCC TEST REPORT

**Test report
On Behalf of
Pilotfly GmbH
For
Maverick Gimbal
Model No.: PFY-MAV-01,PFY-MAV-XX
(X represents the number from 0 to 9)**

FCC ID: 2ATHA-01FF

**Prepared for : Pilotfly GmbH
Biberkopfstr.9 86163 Augsburg Germany**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China**

**Date of Test: Apr. 29, 2018 ~ Jun. 06, 2019
Date of Report: Jun. 06, 2019
Report Number: HK1904300957-E**



TEST RESULT CERTIFICATION

Applicant's name : Pilotfly GmbH

Address : Biberkopfstr.9 86163 Augsburg Germany

Manufacture's Name : Pilotfly GmbH

Address : Biberkopfstr.9 86163 Augsburg Germany

Product description

Trade Mark: PFY

Product name : Maverick Gimbal

Model and/or type reference : PFY-MAV-01, PFY-MAV-XX
(X represents the number from 0 to 9)

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : Apr. 29, 2018 ~ May. 09, 2019

Date of Issue : May. 09, 2019


Test Result : Pass

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 Carrier Frequency of Channels	6
2.3 Operation of EUT during testing	6
2.4 DESCRIPTION OF TEST SETUP	6
2.5 MEASUREMENT INSTRUMENTS LIST	7
3 . CONDUCTED EMISSIONS TEST	8
3.1 Conducted Power Line Emission Limit	8
3.2 Test Setup	8
3.3 Test Procedure	8
3.4 Test Result	8
4 RADIATED EMISSION TEST	11
4.1 Radiation Limit	11
4.2 Test Setup	11
4.3 Test Procedure	12
4.4 Test Result	12
5 BAND EDGE	18
5.1 Limits	18
5.2 Test Procedure	18
5.3 Test Result	18
6 OCCUPIED BANDWIDTH MEASUREMENT	22
6.1 Test Setup	22
6.2 Test Procedure	22
6.3 Measurement Equipment Used	22
6.4 Test Result	22
7 ANTENNA REQUIREMENT	24
8 PHOTOGRAPH OF TEST	25
Radiated Emission	25



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Maverick Gimbal
Model Name	PFY-MAV-01,PFY-MAV-XX (X represents the number from 0 to 9)
Serial No.	N/A
Trade Mark	PFY
Model Difference	All models are identical except use different.
FCC ID	2ATHA-01FF
Antenna Type	PCB Antenna
Antenna Gain	0dBi
BT Operation frequency	2402-2480MHz
Number of Channels	40CH
Modulation Type	GFSK
PowerSource	DC 5V by Adapter AC 120V/60Hz DC14.8V Battery
Power Rating	DC 5V by Adapter AC 120V/60Hz DC14.8V Battery



2.2 Carrier Frequency of Channels

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442	31	2462
02	2404	12	2424	22	2444	32	2464
03	2406	13	2426	23	2446	33	2466
04	2408	14	2428	24	2448	34	2468
05	2410	15	2430	25	2450	35	2470
06	2412	16	2432	26	2452	36	2472
07	2414	17	2434	27	2454	37	2474
08	2416	18	2436	28	2456	38	2476
09	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

2.3 Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2402MHz


Middle Channel: 2440MHz

High Channel: 2480MHz

2.4 DESCRIPTION OF TEST SETUP

/

Operation of EUT during Conducted testing:

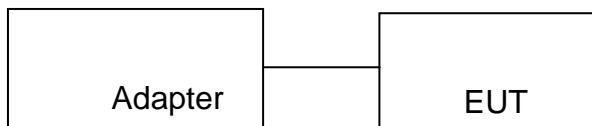

Operation of EUT during Radiation and Above1GHz Radiation testing:



Adapter

model:RXZ-0515

INPUT:AC 100-240V/50-60Hz 0.3A

OUTPUT:DC 5V~,1500mA



2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2018	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2018	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2018	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2018	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2018	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2018	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2018	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2018	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2018	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2018	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2018	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2018	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2018	3 Year

3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

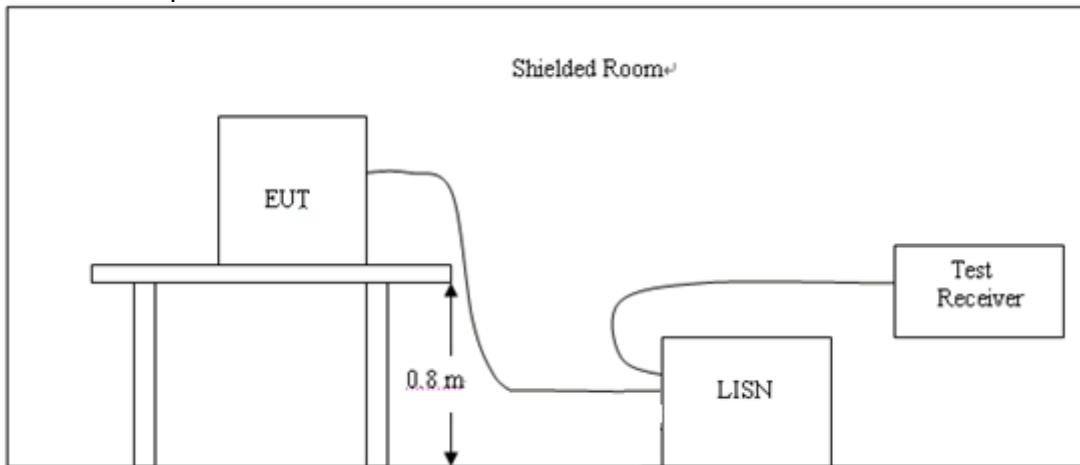

3.3 Test Procedure


- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

3.4 Test Result

*****pass*****




EUT:	Maverick Gimbal	Model Name:	PFY-MAV-01
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2019-06-06
Test Mode:	BT LINK	Polarization :	L
Test Power:	DC 5V by Adapter AC 120V/60Hz		

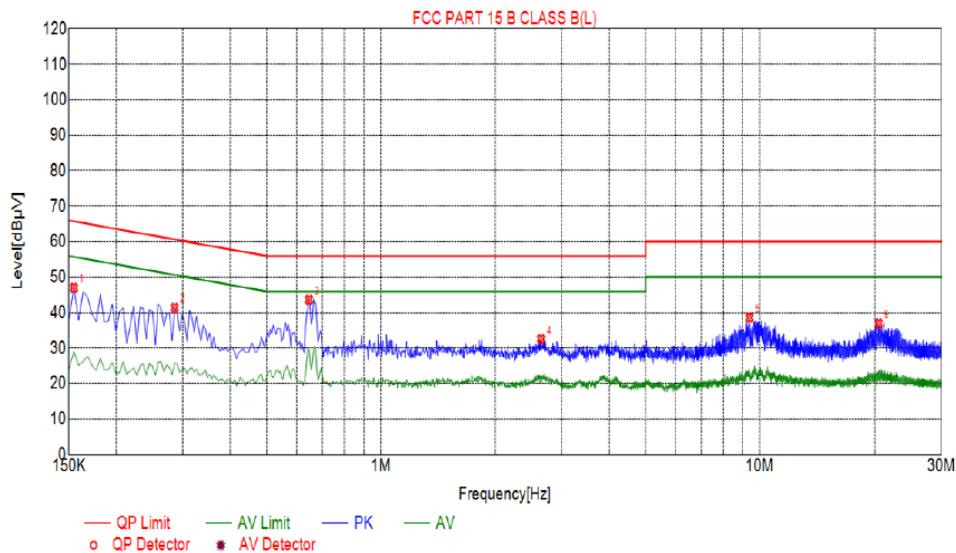Test Graph**Suspected List**

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.1545	47.02	10.03	65.75	18.73	PK
2	0.2850	41.44	10.04	60.67	19.23	PK
3	0.6450	43.66	10.05	56.00	12.34	PK
4	2.6475	32.57	10.21	56.00	23.43	PK
5	9.3975	38.59	10.10	60.00	21.41	PK
6	20.4810	37.04	10.12	60.00	22.96	PK



EUT:	Maverick Gimbal	Model Name:	PFY-MAV-01
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2019-06-06
Test Mode:	BT LINK	Polarization :	N
Test Power:	DC 5V by Adapter AC 120V/60Hz		

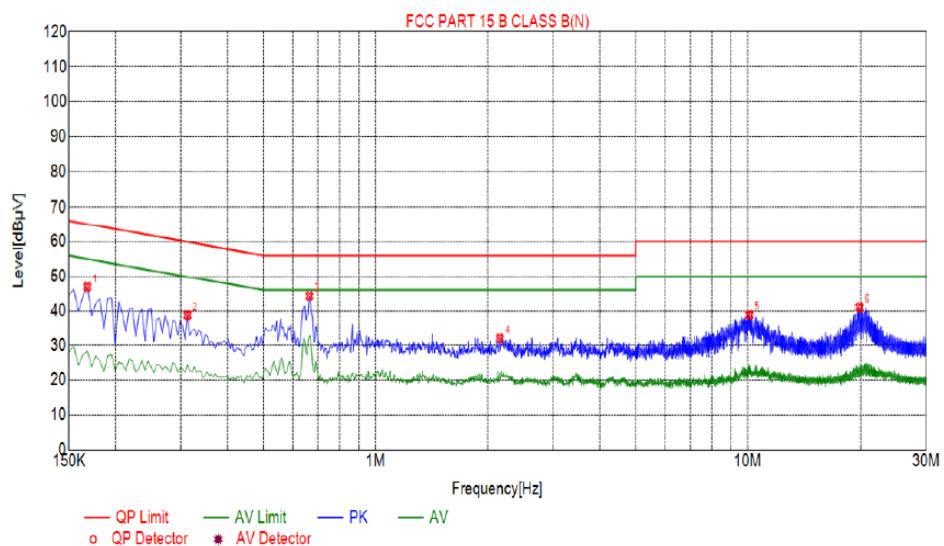Test Graph**Suspected List**

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.1680	46.94	10.01	65.06	18.12	PK
2	0.3120	38.76	10.05	59.92	21.16	PK
3	0.6630	44.27	10.05	56.00	11.73	PK
4	2.1570	32.02	10.16	56.00	23.98	PK
5	10.0950	38.81	10.06	60.00	21.19	PK
6	19.8375	41.01	10.10	60.00	18.99	PK

4 RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

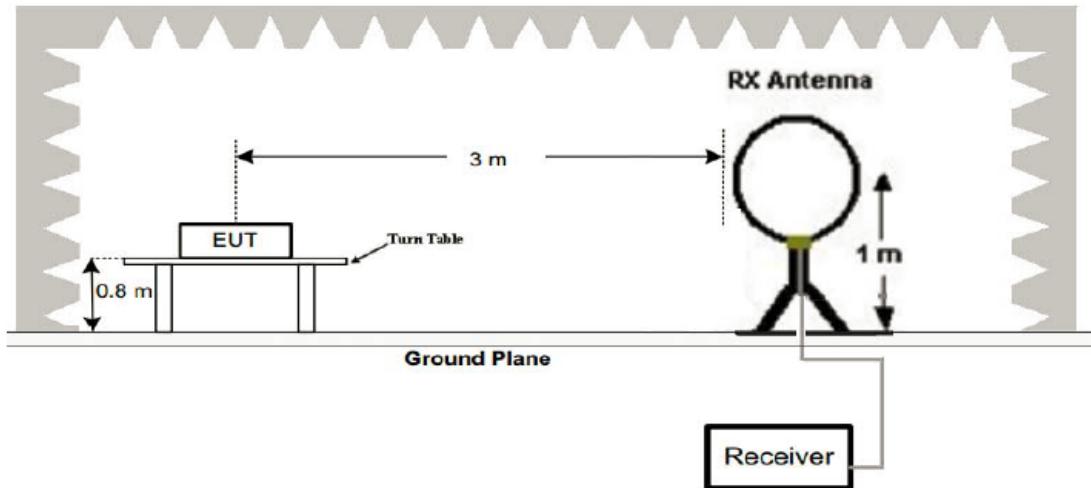

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

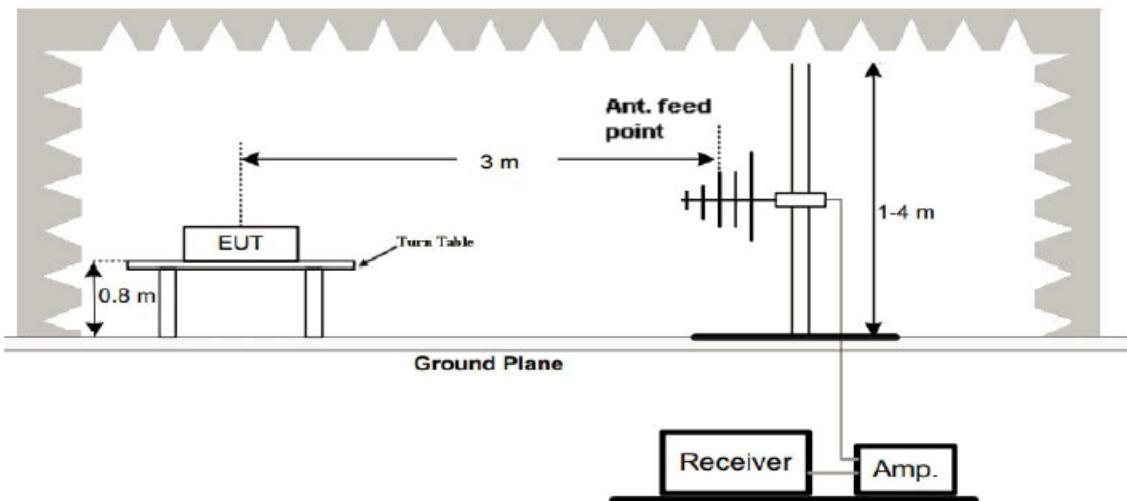

(3) Radiated Emission Test-Up Frequency Above 1GHz

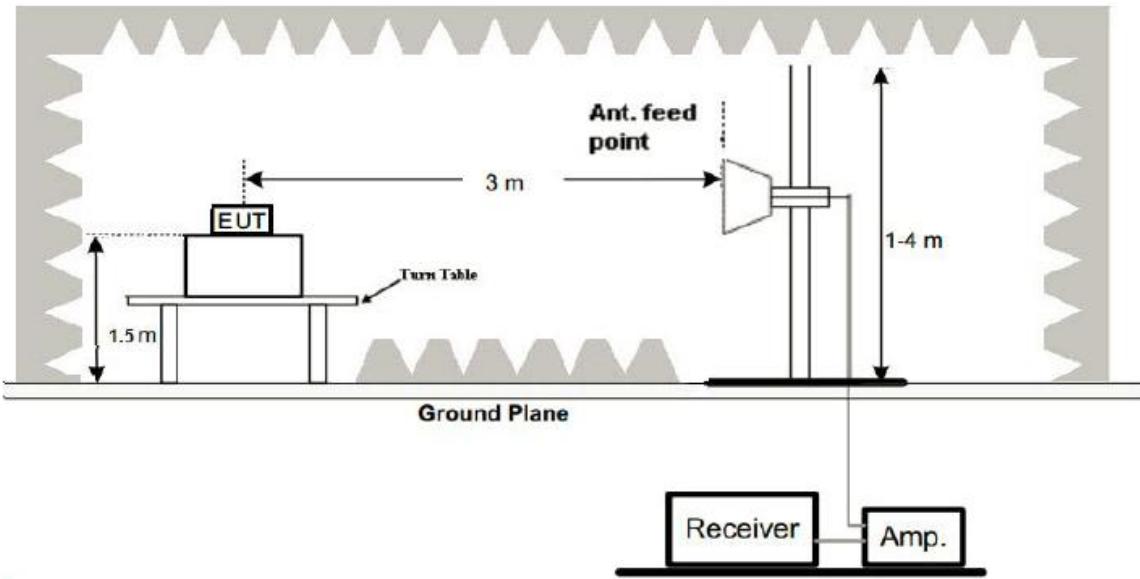

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result

PASS


All the test modes completed for test. The worst case of Radiated Emission is CH 2402; the test data of this mode was reported.



Below 1GHz Test Results:

EUT :	Maverick Gimbal	Model Name :	PFY-MAV-01
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2019-05-08
Test Mode :	Running	Polarization :	Horizontal
Test Power :	DC14.8V Battery		

Test Graph

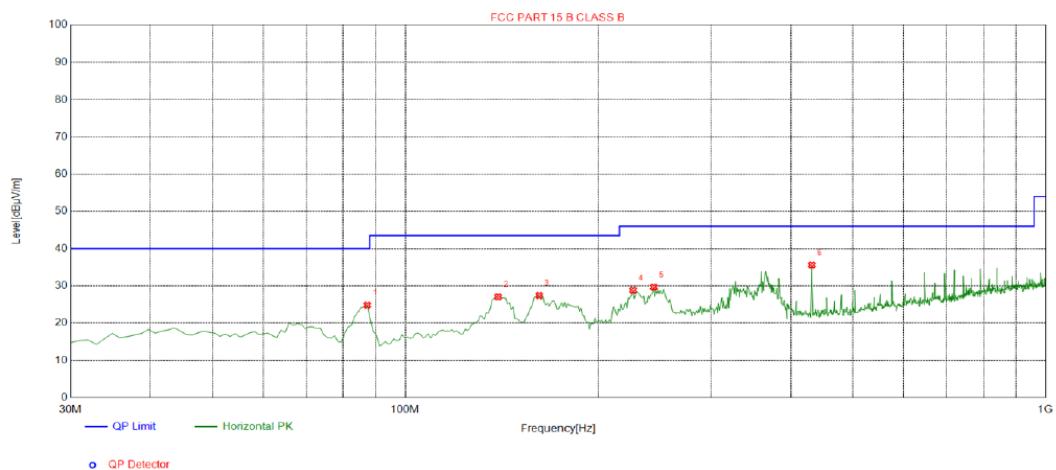

Suspected List


Suspected List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	87.2300	24.84	-17.73	40.00	15.16	100	193	Horizontal
2	139.610	27.05	-19.16	43.50	16.45	100	193	Horizontal
3	161.920	27.41	-18.04	43.50	16.09	100	168	Horizontal
4	226.910	28.84	-14.39	46.00	17.16	100	120	Horizontal
5	244.370	29.69	-13.65	46.00	16.31	100	120	Horizontal
6	431.580	35.61	-9.78	46.00	10.39	100	291	Horizontal

Final Data List

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

EUT :	Maverick Gimbal	Model Name :	PFY-MAV-01
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2019-05-08
Test Mode :	Running	Polarization :	Vertical
Test Power :	DC14.8V Battery		

Test Graph

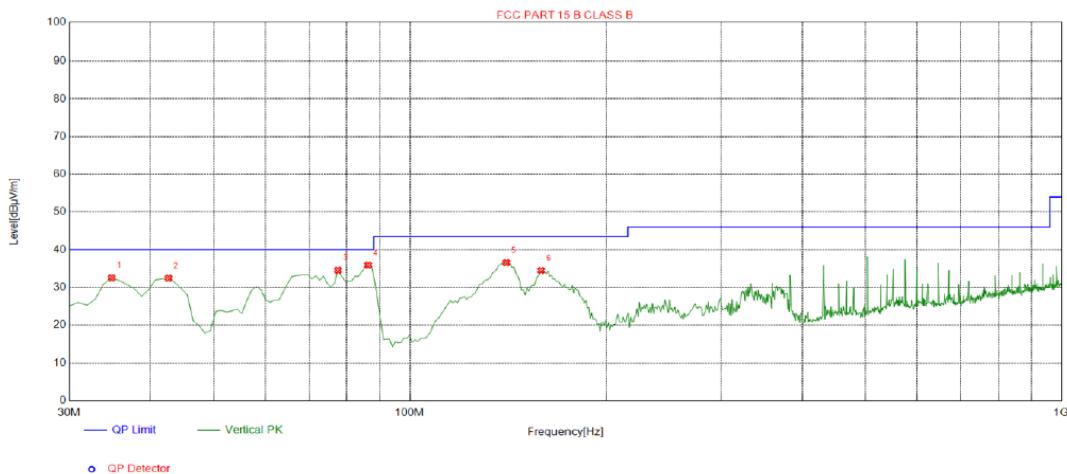

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8500	32.53	-16.15	40.00	7.47	100	56	Vertical
2	42.6100	32.46	-14.08	40.00	7.54	100	284	Vertical
3	77.5300	34.56	-19.03	40.00	5.44	100	94	Vertical
4	86.2600	35.92	-17.97	40.00	4.08	100	122	Vertical
5	140.580	36.57	-19.17	43.50	6.93	100	293	Vertical
6	159.010	34.50	-18.29	43.50	9.00	100	300	Vertical

Final Data List

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.



Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector Type
2402	108.43	-5.84	102.59	114	-11.41	peak
2402	85.73	-5.84	79.89	94	-14.11	AVG
4804	57.46	-3.64	53.82	74	-20.18	peak
4804	45.38	-3.64	41.74	54	-12.26	AVG
7206	56.52	-0.95	55.57	74	-18.43	peak
7206	39.86	-0.95	38.91	54	-15.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector Type
2402	107.34	-5.84	101.5	114	-12.5	peak
2402	83.28	-5.84	77.44	94	-16.56	AVG
4804	54.13	-3.64	50.49	74	-23.51	peak
4804	42.19	-3.64	38.55	54	-15.45	AVG
7206	52.76	-0.95	51.81	74	-22.19	peak
7206	41.07	-0.95	40.12	54	-13.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2441	108.64	-5.71	102.93	114	-11.07	peak
2441	83.92	-5.71	78.21	94	-15.79	AVG
4882	57.28	-3.51	53.77	74	-20.23	peak
4882	44.16	-3.51	40.65	54	-13.35	AVG
7323	55.38	-0.82	54.56	74	-19.44	peak
7323	39.42	-0.82	38.6	54	-15.4	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2441	108.52	-5.71	102.81	114	-11.19	peak
2441	84.76	-5.71	79.05	94	-14.95	AVG
4882	55.61	-3.51	52.1	74	-21.9	peak
4882	43.59	-3.51	40.08	54	-13.92	AVG
7323	58.23	-0.82	57.41	74	-16.59	peak
7323	41.38	-0.82	40.56	54	-13.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2480	108.46	-5.65	102.81	114	-11.19	peak
2480	83.26	-5.65	77.61	94	-16.39	AVG
4960	61.47	-3.43	58.04	74	-15.96	peak
4960	44.19	-3.43	40.76	54	-13.24	AVG
7440	59.72	-0.75	58.97	74	-15.03	peak
7440	42.18	-0.75	41.43	54	-12.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2480	107.64	-5.65	101.99	114	-12.01	peak
2480	82.16	-5.65	76.51	94	-17.49	AVG
4960	57.49	-3.43	54.06	74	-19.94	peak
4960	44.57	-3.43	41.14	54	-12.86	AVG
7440	54.89	-0.75	54.14	74	-19.86	peak
7440	40.52	-0.75	39.77	54	-14.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



5 BAND EDGE

5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSIC63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

PASS


Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	2310.000	41.24	6.36	47.60	74.00	-26.40	peak			
2	2310.000	25.79	6.36	32.15	54.00	-21.85	AVG			
3	2390.000	42.79	6.51	49.30	74.00	-24.70	peak			
4	2390.000	31.94	6.51	38.45	54.00	-15.55	AVG			
5	2400.000	43.57	6.53	50.10	74.00	-23.90	peak			
6	*	2400.000	32.90	6.53	39.43	54.00	-14.57	AVG		

100.0 dBuV/m

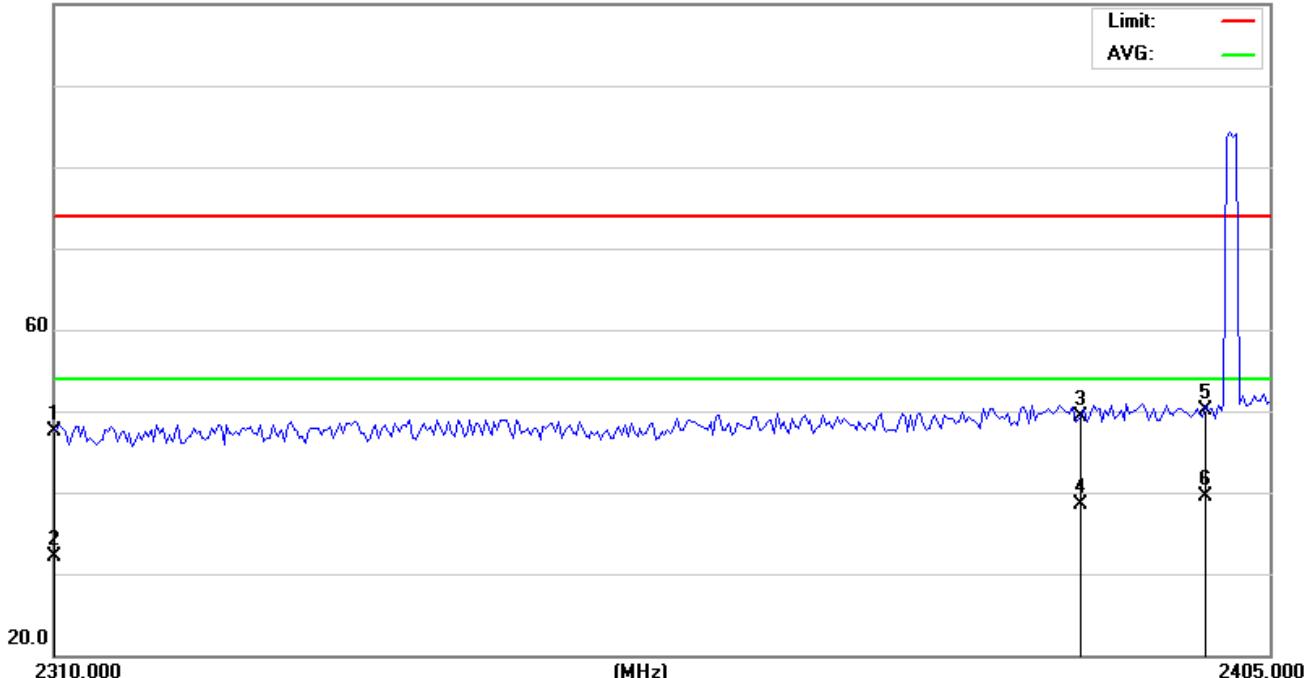




Vertical:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	40.64	6.36	47.00	74.00	-27.00	peak		
2		2310.000	30.59	6.36	36.95	54.00	-17.05	AVG		
3		2390.000	42.49	6.51	49.00	74.00	-25.00	peak		
4		2390.000	32.61	6.51	39.12	54.00	-14.88	AVG		
5		2400.000	44.77	6.53	51.30	74.00	-22.70	peak		
6	*	2400.000	34.34	6.53	40.87	54.00	-13.13	AVG		


100.0 dBuV/m

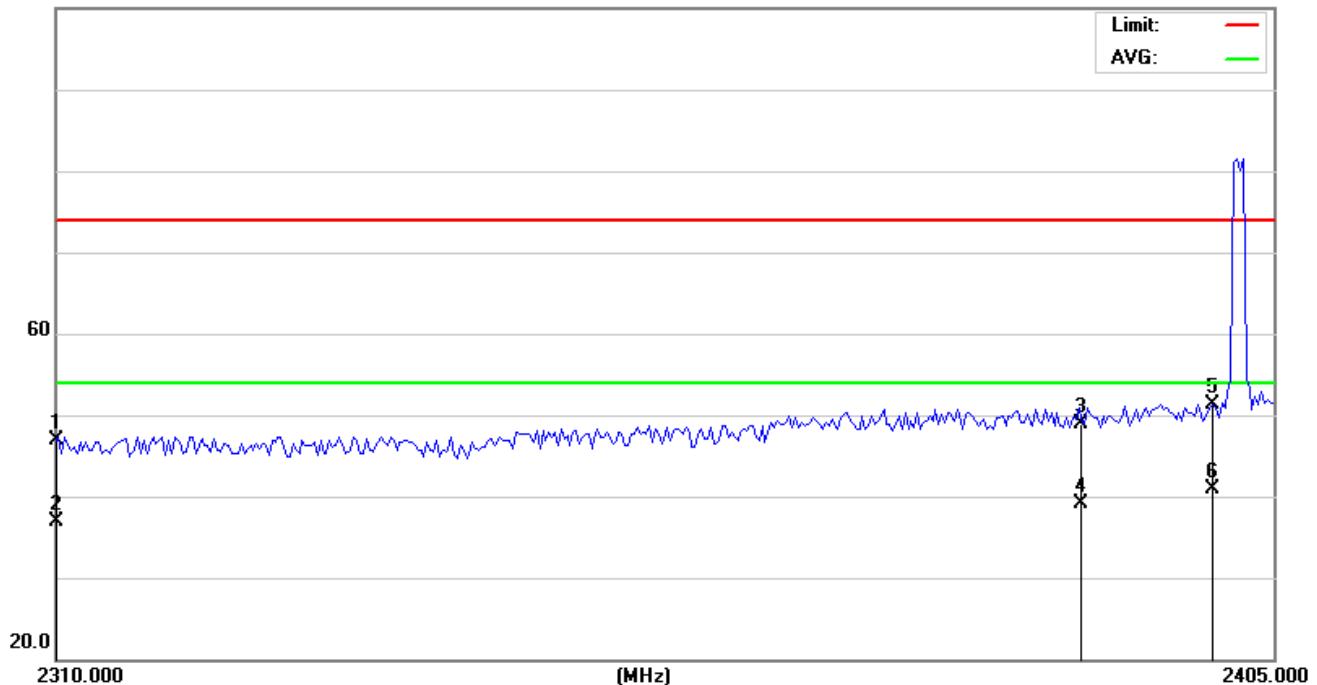

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.500	41.90	6.50	48.40	74.00	-25.60	peak		
2		2483.500	31.02	6.50	37.52	54.00	-16.48	AVG		
3		2500.000	44.61	6.49	51.10	74.00	-22.90	peak		
4	*	2500.000	34.87	6.49	41.36	54.00	-12.64	AVG		

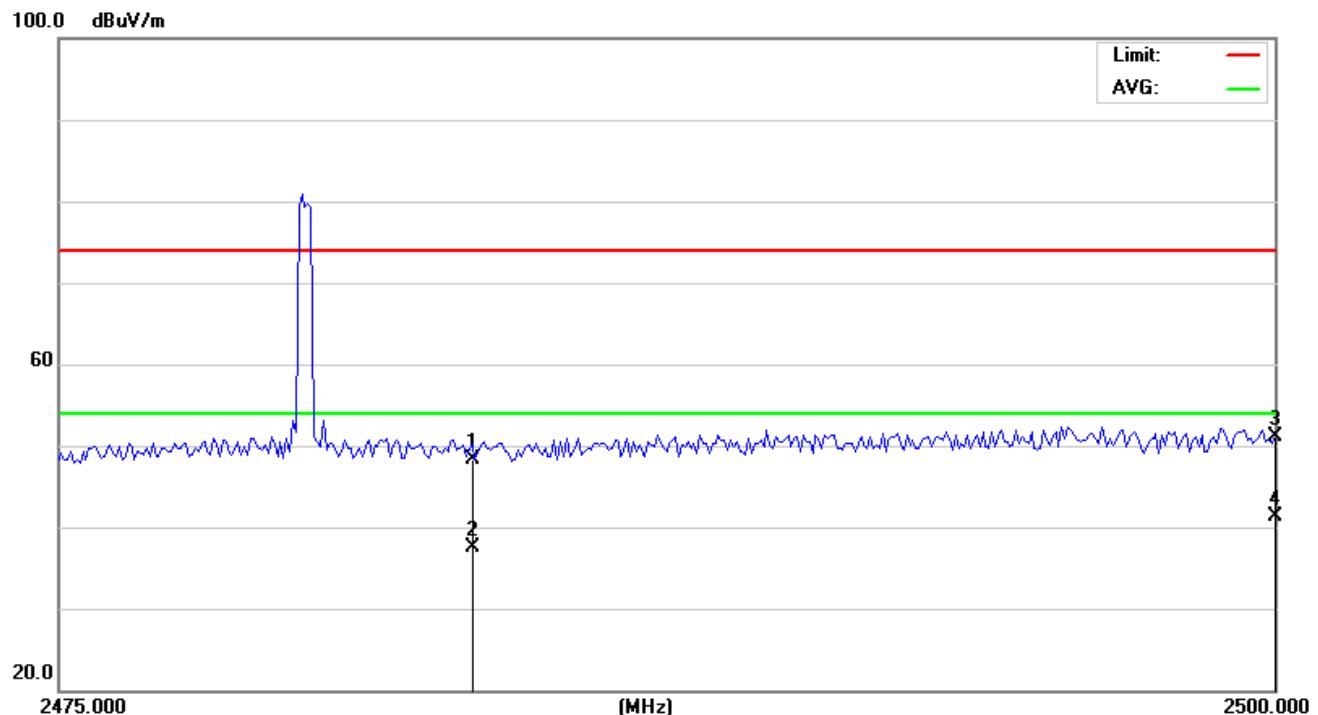




Vertical:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.500	42.40	6.50	48.90	74.00	-25.10	peak			
2		2483.500	31.14	6.50	37.64	54.00	-16.36	AVG			
3		2500.000	45.61	6.49	52.10	74.00	-21.90	peak			
4	*	2500.000	35.67	6.49	42.16	54.00	-11.84	AVG			

100.0 dBuV/m

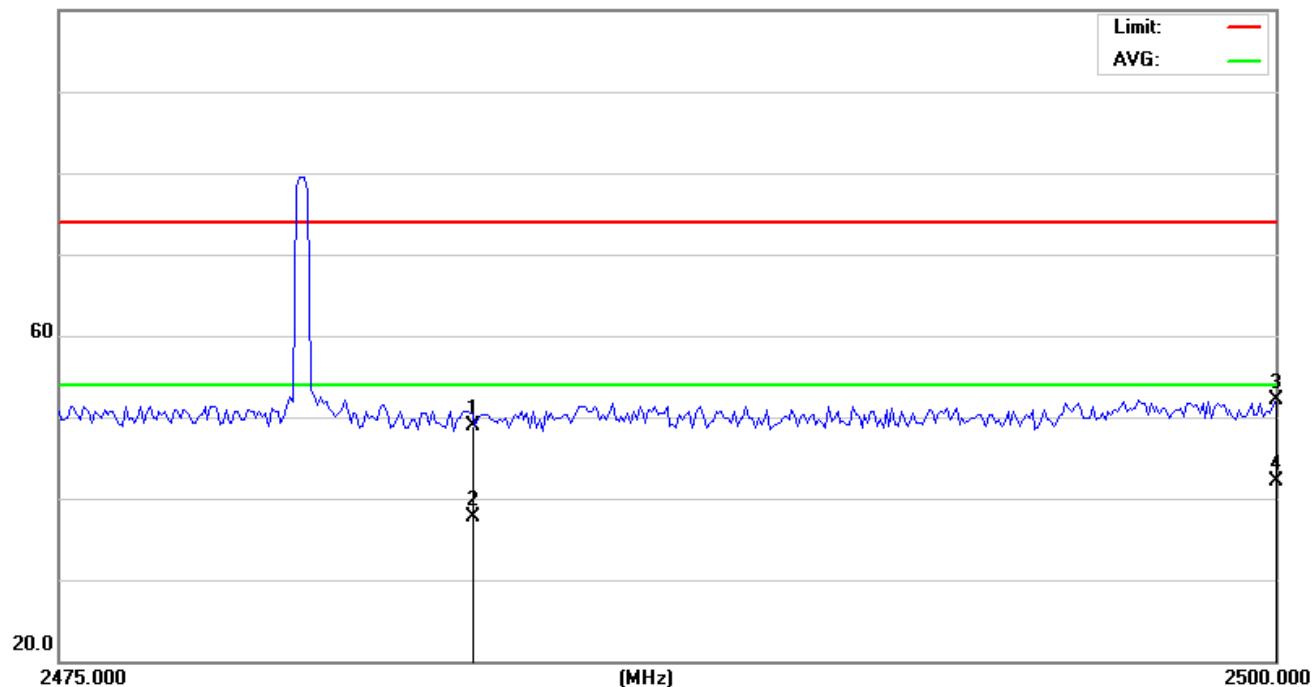



6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW= 30KHz. VBW= 100 KHz, Span=4MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3 Measurement Equipment Used

Same as Radiated Emission Measurement

6.4 Test Result

PASS


Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.074	PASS
2440 MHz	1.067	PASS
2480 MHz	1.064	PASS

CH: 2402MHz





CH: 2440MHz

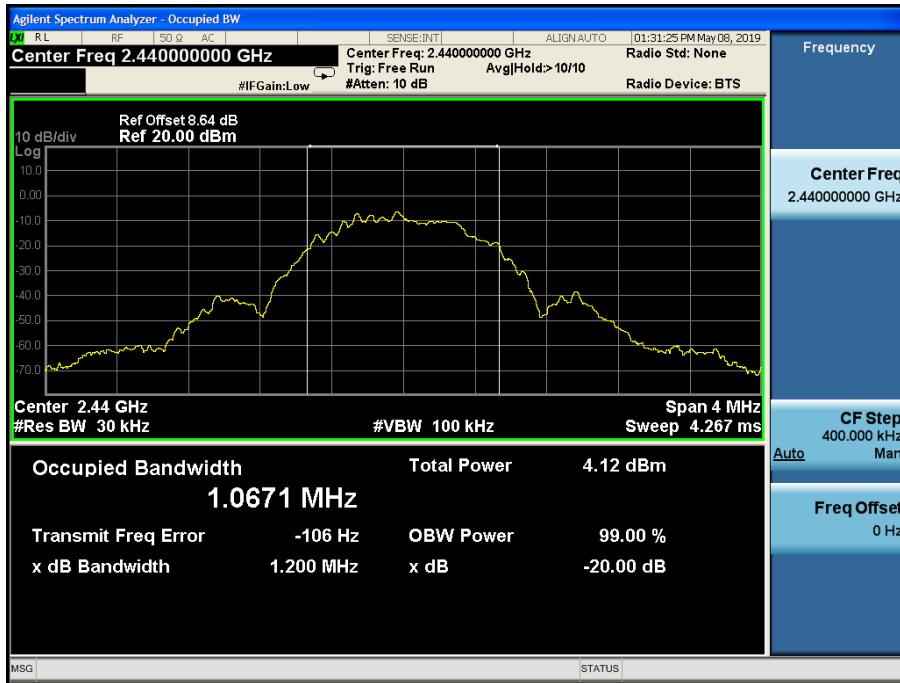

CH: 2480MHz





7 ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction



The antenna used in this product is a Internal Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA

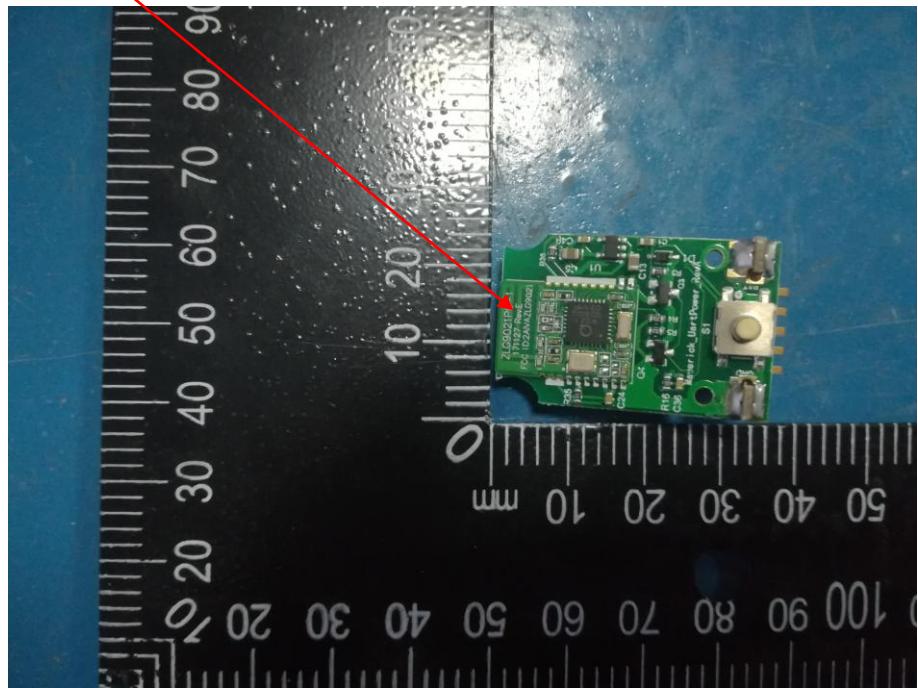

8 PHOTOGRAPH OF TEST

Radiated Emission

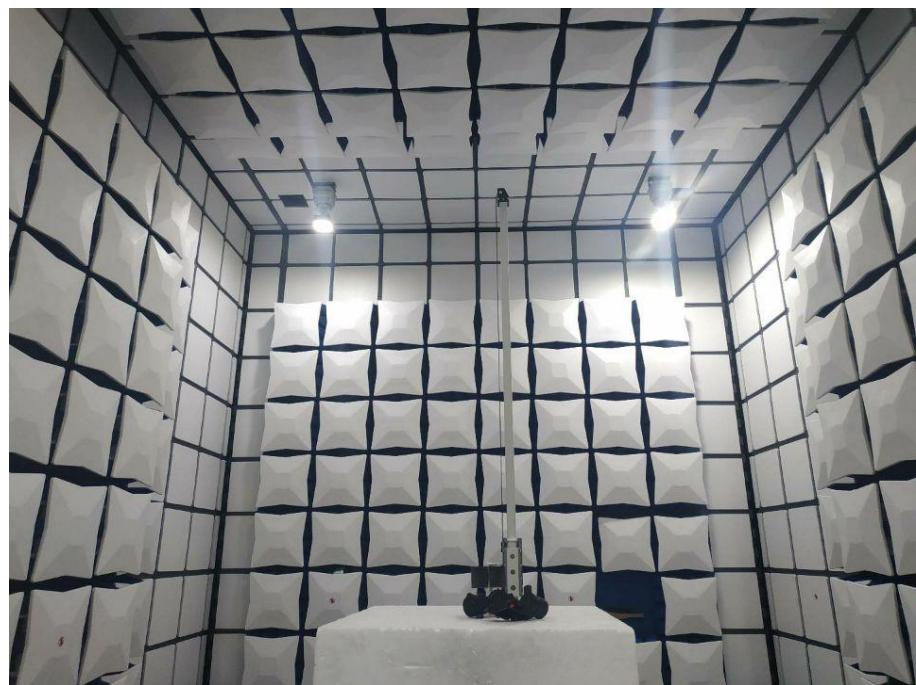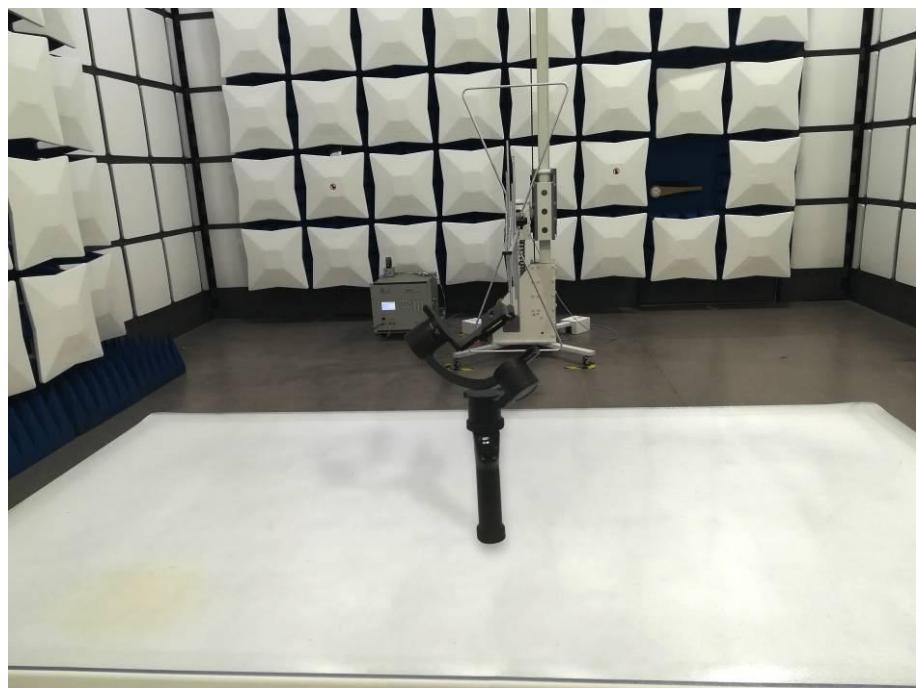



CE





EUT
Photo 1



Photo 2





Photo 3



Photo 4





Photo 5



Photo 6





Photo 7



Photo 8





Photo 9

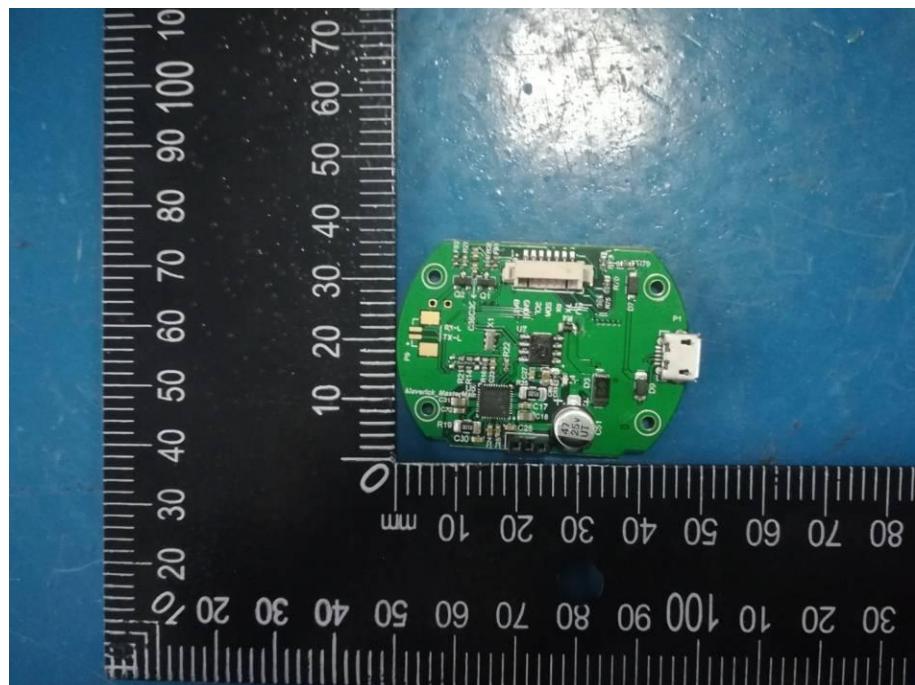


Photo 10

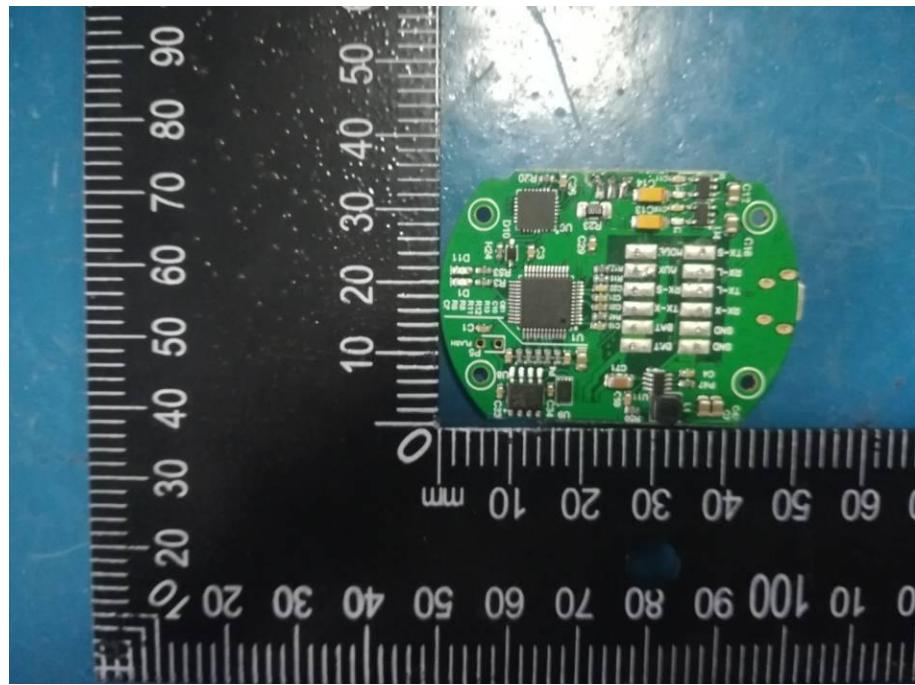




Photo 11

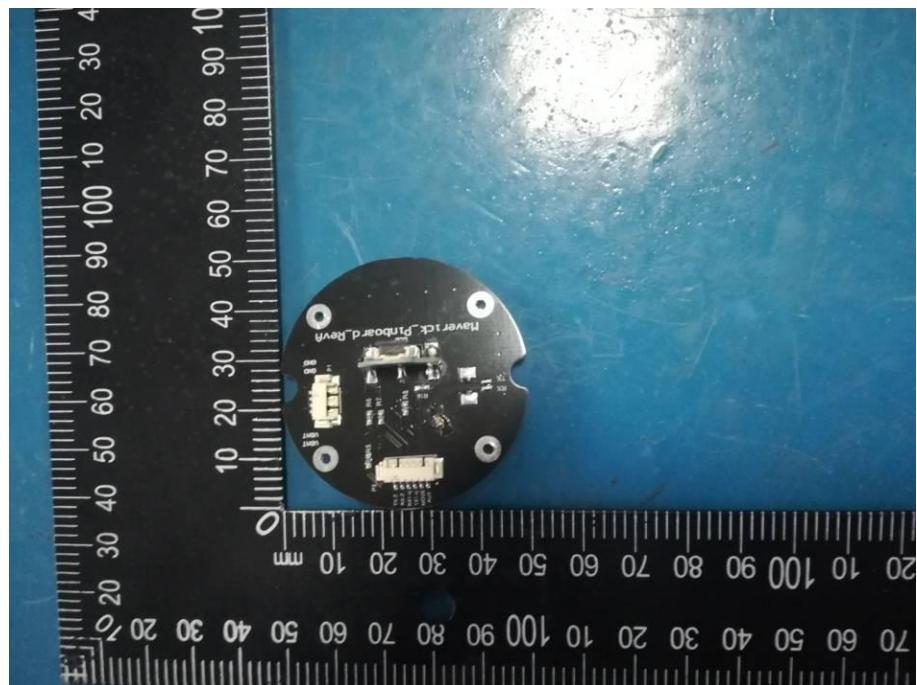


Photo 12

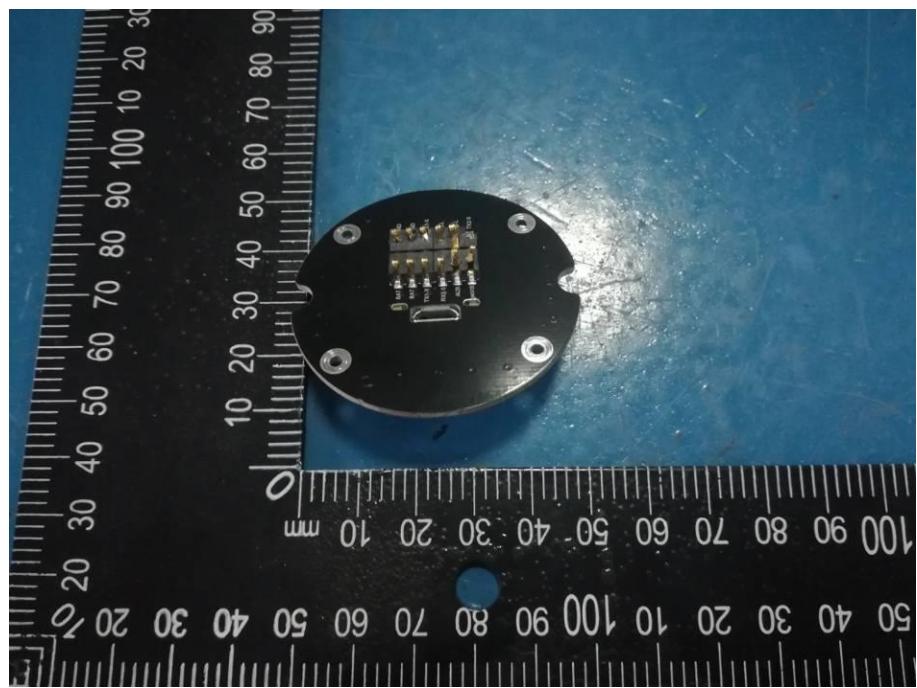




Photo 13



Photo 14





Photo 15



Photo 16

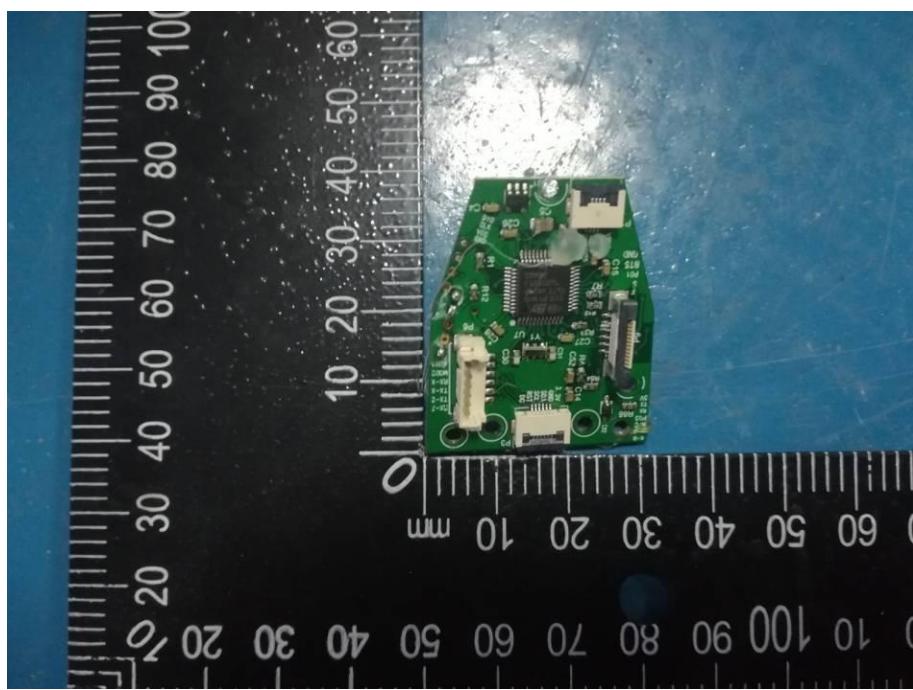


Photo 17


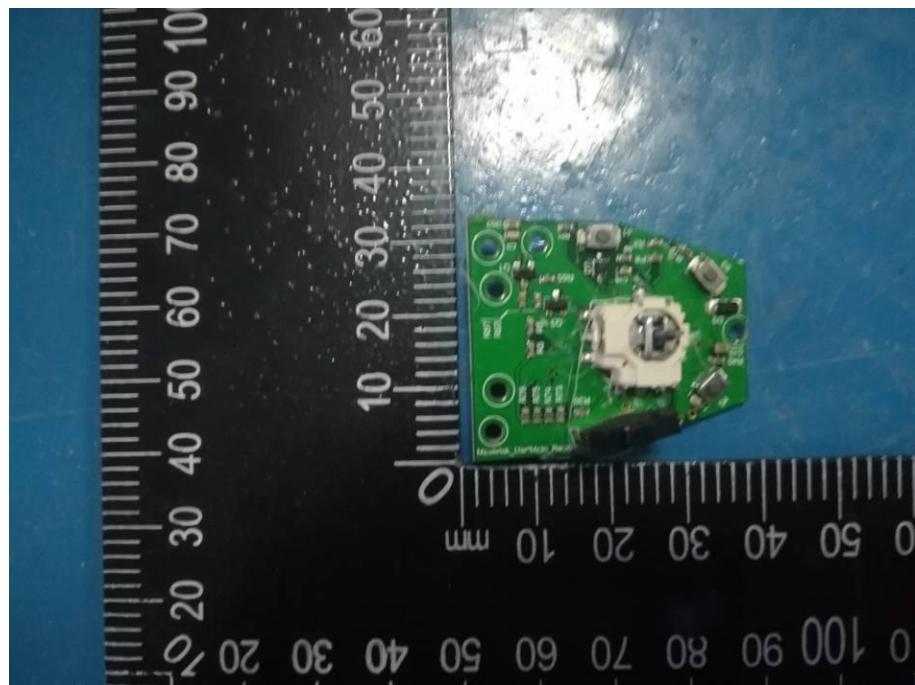


Photo 18





Photo 19

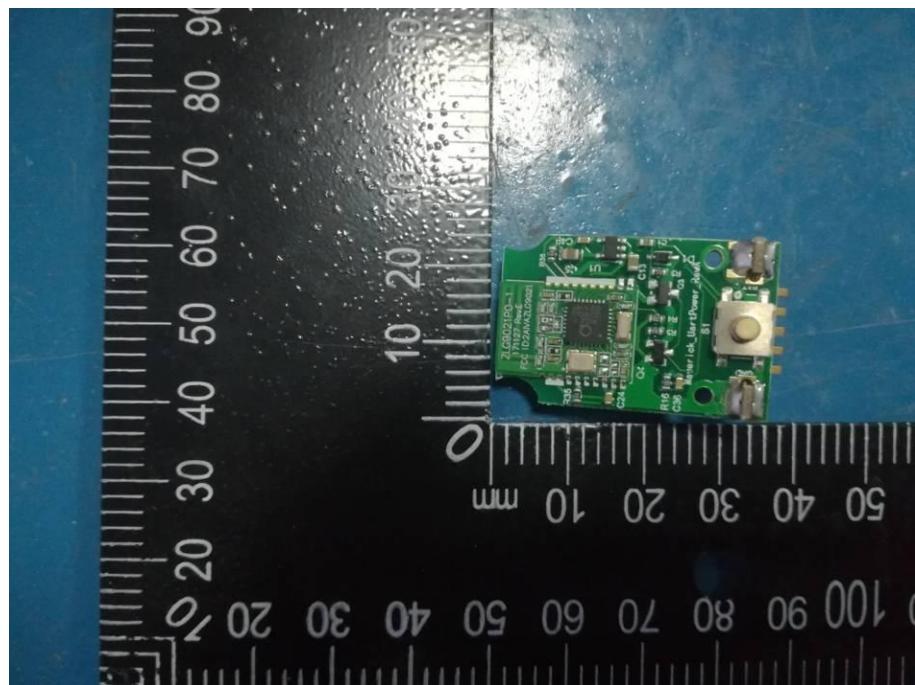

--The end of report--