

FCC Test Report

FCC ID : 2ATHBV510
Equipment : Electronic Identification Badge
Brand Name : SEC3URE GO!
Model Name : SGO1.0-B
Applicant : IX Co., Ltd.
8F-3, No. 15, Ln. 360, Sec. 1, Neihu Rd.,
Neihu Dist., Taipei City 114, Taiwan (R.O.C.)
Manufacturer : InnoComm Mobile Technology Corp.
3F, No.6, HsinAnn Rd, Hsinchu Science Park,
Hsinchu 30078, Taiwan
Standard : 47 CFR FCC Part 15.247

The product was received on May 10, 2019, and testing was started from May 27, 2019 and completed on Jun. 12, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	6
1.3 Testing Location Information	6
1.4 Measurement Uncertainty	6
2 TEST CONFIGURATION OF EUT.....	7
2.1 Test Condition	7
2.2 Test Channel Mode	7
2.3 The Worst Case Measurement Configuration.....	8
2.4 Accessories and Support Equipment	9
2.5 Test Setup Diagram	10
3 TRANSMITTER TEST RESULT	11
3.1 AC Power-line Conducted Emissions	11
3.2 DTS Bandwidth.....	12
3.3 Maximum Conducted Output Power	13
3.4 Power Spectral Density	15
3.5 Emissions in Non-restricted Frequency Bands	16
3.6 Emissions in Restricted Frequency Bands.....	17
4 TEST EQUIPMENT AND CALIBRATION DATA	20
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
APPENDIX G. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	



History of this test report

TEL : 886-3-3273456
FAX : 886-3-3270973
Report Template No.: HE1-C10 Ver3.4
FCC ID: 2ATHBV510

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]:30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]:8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands:>20 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Sam Tsai

Report Producer: Ann Hou

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Monopole	N/A	1.1

Note 1: The EUT has one antenna.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 (port 1) could transmit/receive simultaneously.

1.1.3 EUT Information

Operational Condition			
EUT Power Type	From DC Power Supply		
EUT Function	☐ Point-to-multipoint	☒ Point-to-point	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:	...	
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:	...	
☐	Other:		

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	1	0	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 v05r02

1.3 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
☐	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL : 886-3-656-9065	FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO01-HY	Edward	22.4~26.7°C / 52.4~57.6%	01/Jun/2019~12/Jun/2019
RF Conducted	TH07-HY	Clara	23.2~26.6°C / 62~69%	27/May/2019~30/May/2019
Radiated	03CH01-HY	Edward	24.6~27.3°C / 55.6~62.3%	28/May/2019

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	3V

2.2 Test Channel Mode

Test Software	CMD
---------------	-----

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	8
2440MHz	8
2480MHz	8

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	DC Power Supply mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	DC Power Supply mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		

2.4 Accessories and Support Equipment

Accessories				
Battery	Brand Name	Enbar	Model Name	CP503742
	Power Rating	3Vdc, 1900mAh	Type	Li-Mn battery


Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment – AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	DC Power Supply	GW	GSP-303000	N/A

Support Equipment – RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for Notebook	DELL	HA65NM130	DoC
3	Fixture	N/A	N/A	N/A

Support Equipment – Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	DC Power Supply	GW	GPS-3030DD	N/A
2	Radio Communication Analyzer (Remote)	Anitsu	MT8820C	N/A

2.5 Test Setup Diagram

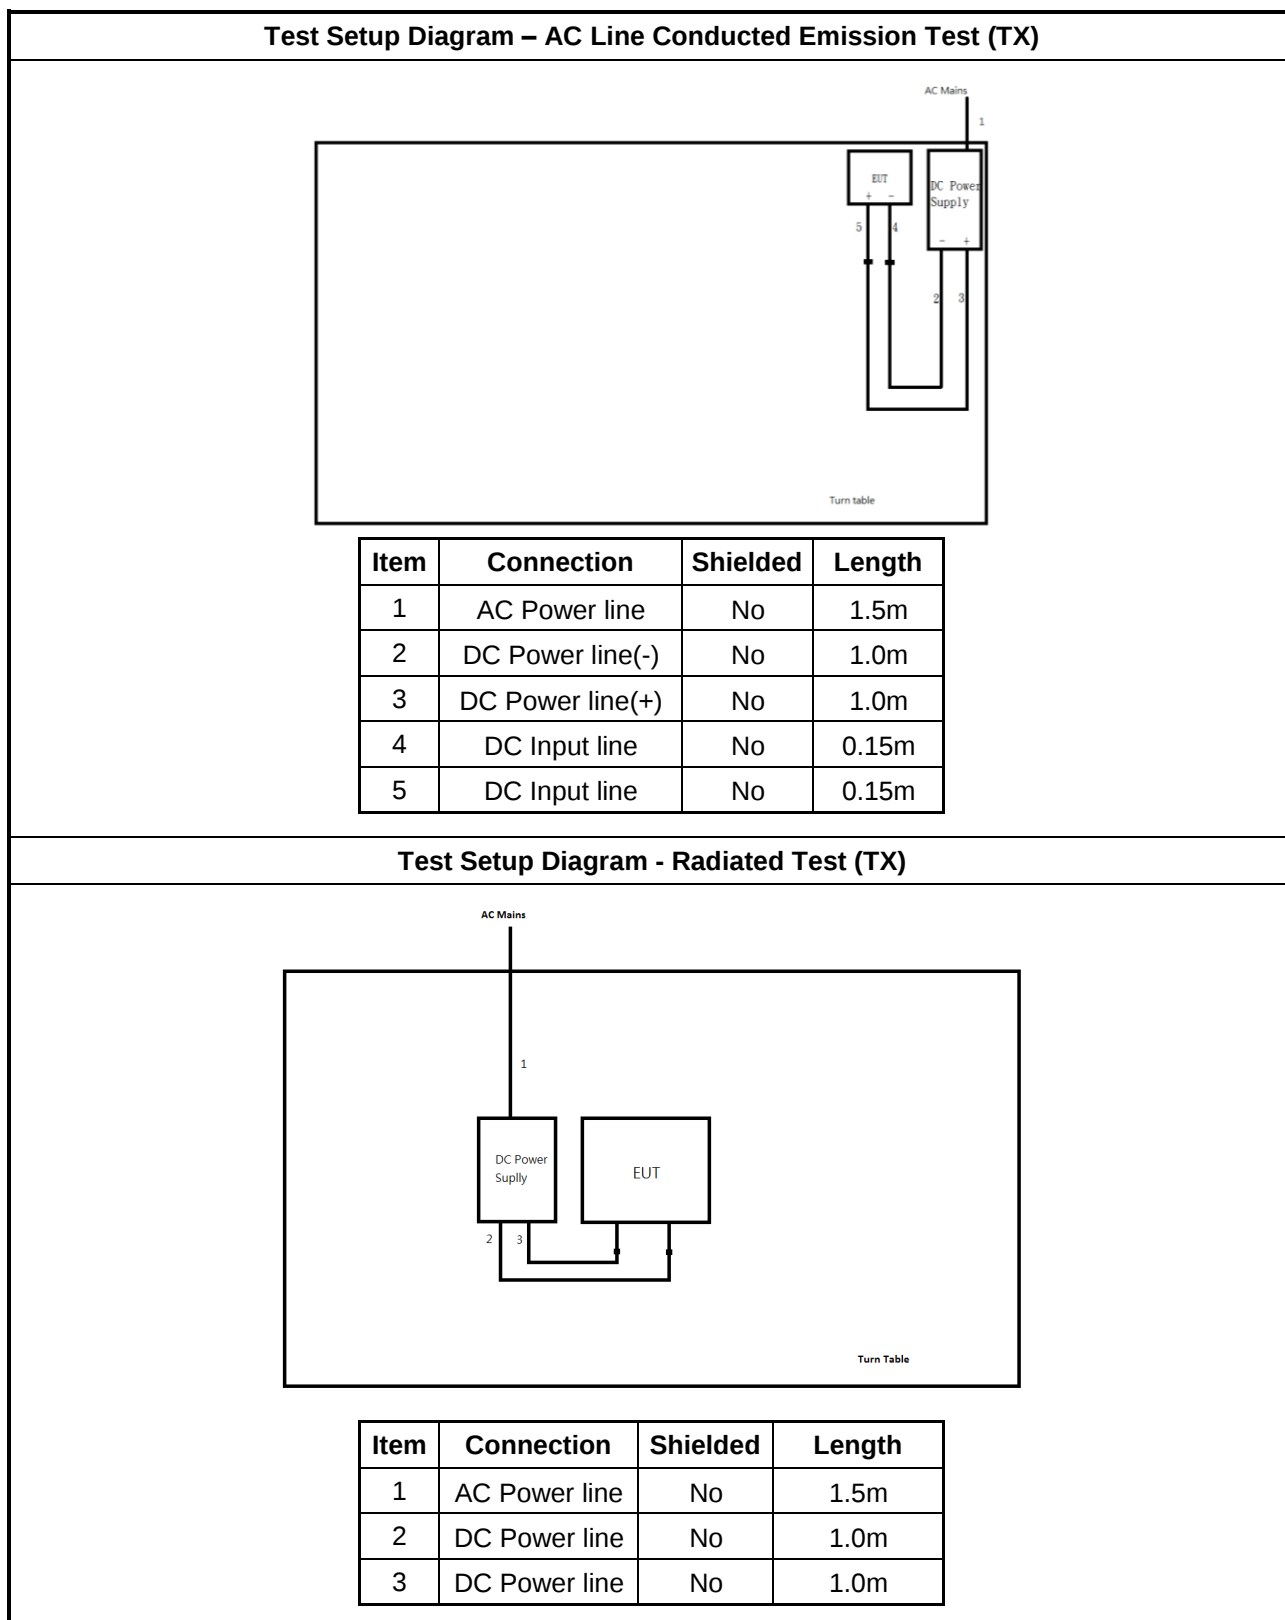

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.

3.1.4 Test Setup

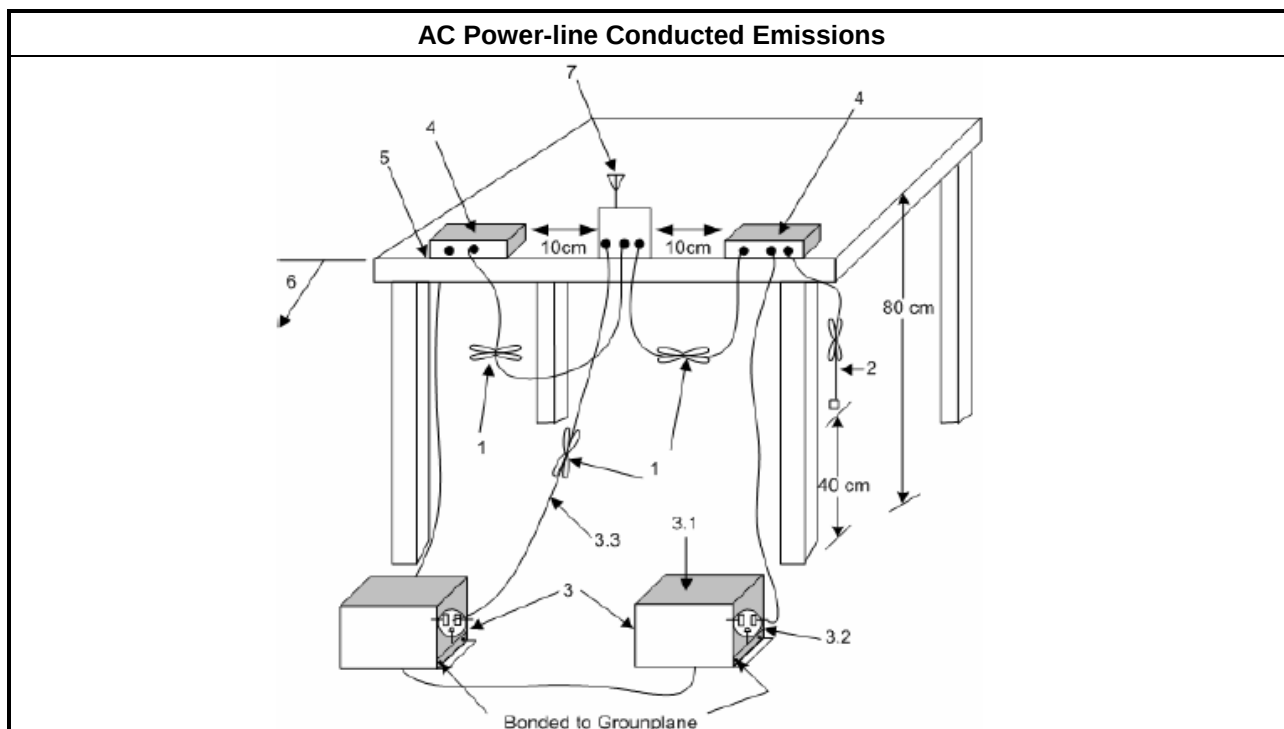

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
☐	Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

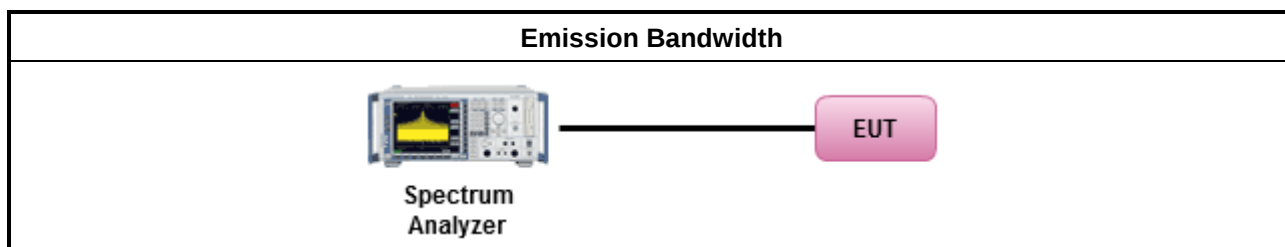

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
	2400-2483.5 MHz Band
	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	Smart antenna system (SAS)
	- Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
☐	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
☐	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
Maximum Average Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
☒	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

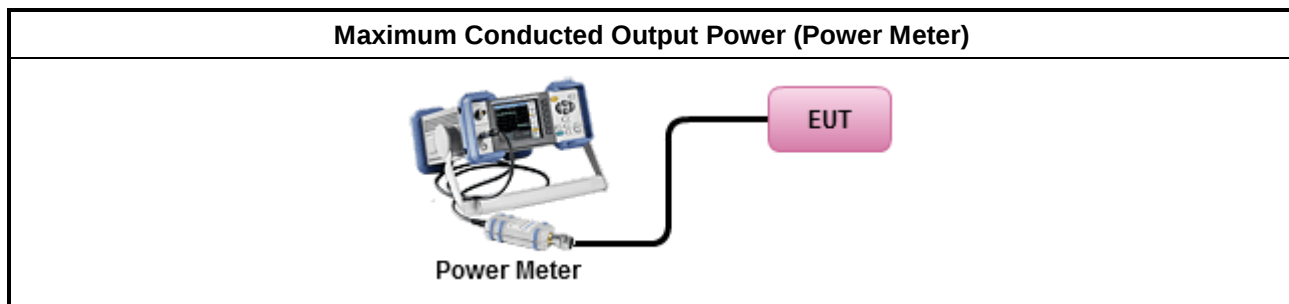

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
▪	Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

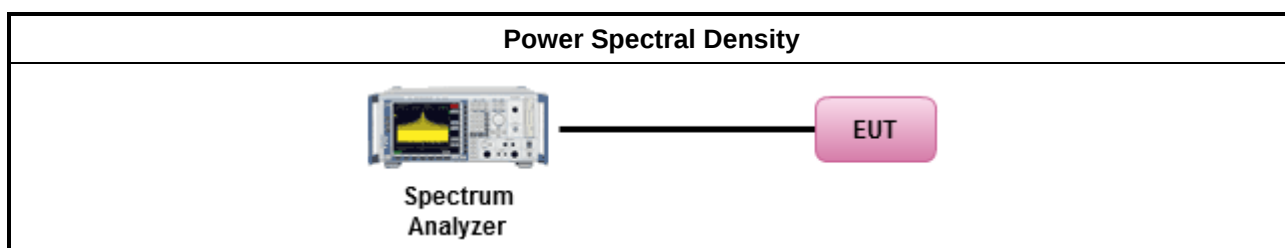

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

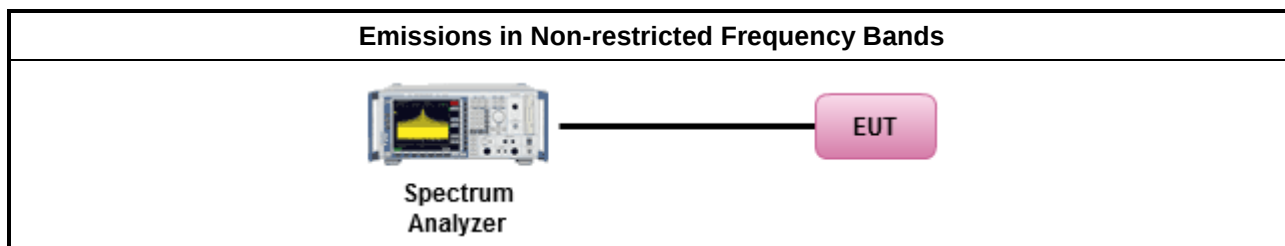

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
	Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.

3.6.4 Test Setup

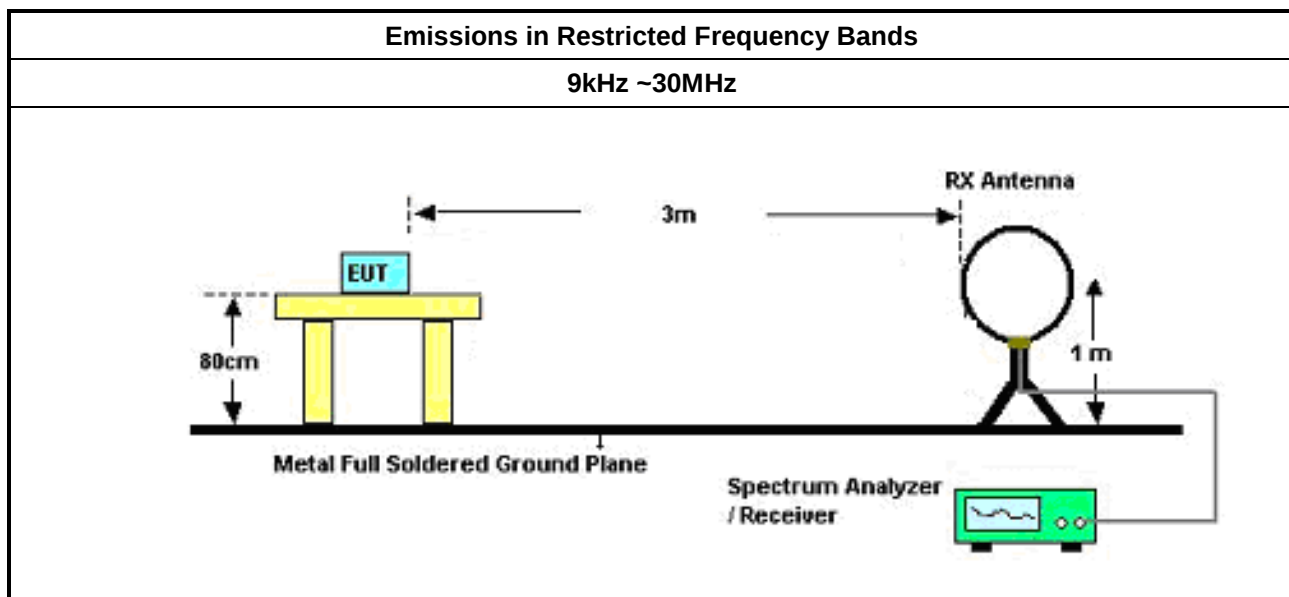

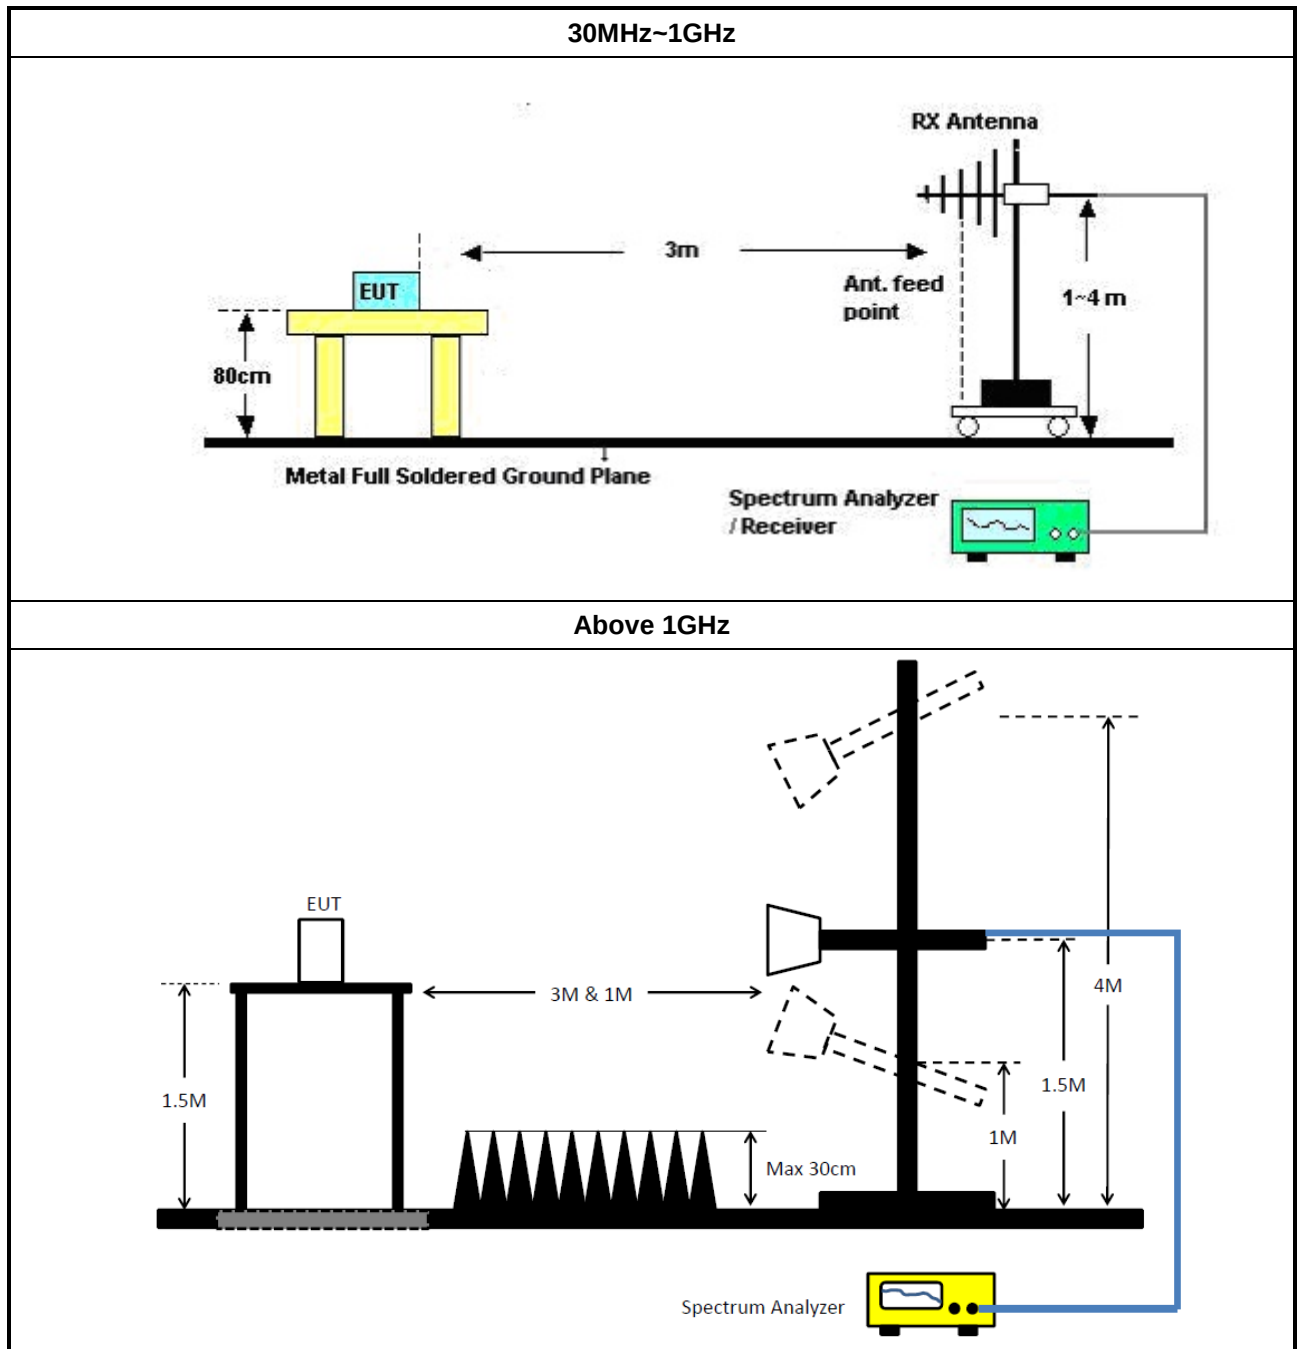

3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV 216	101274	9kHz ~ 30MHz	03/Jun/2019	02/Jun/2020
RF Cable-CON	MTJ	RG142	CB001-CO	9kHz ~ 30MHz	17/Sep/2018	16/Sep/2019
AC POWER	APC	AFC-11003G	F308010045	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561F	9495	9kHz ~ 30MHz	11/Oct/2018	10/Oct/2019

NCR : Non-Calibration Require

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101500	10Hz ~ 40GHz	18/Jul/2018	17/Jul/2019
Power Sensor	Anritsu	MA2411B	1339407	300MHz ~ 40GHz	17/Nov/2018	16/Nov/2019
Power Meter	Anritsu	ML2495A	1517010	300MHz ~ 40GHz	17/Nov/2018	16/Nov/2019
Cable 0.2m	HUBER	MY10710/4	RF Cable - 01	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.2m	HUBER	MY10711/4	RF Cable - 02	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.5m	HUBER	MY39470/4	RF Cable - 29	30MHz ~18G	10/Jan/2019	09/Jan/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz ~ 40GHz	12/Nov/2018	10/Nov/2020


Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	Riken	SAC-3M	03CH01-HY	30MHz ~ 1GHz 3m	11/Jan/2019	10/Jan/2020
3m Semi Anechoic Chamber	Riken	SAC-3M	03CH01-HY	1GHz ~ 18GHz 3m	09/Jan/2019	08/Jan/2020
PreAmplifier	COM-POWER	PA-103	161050	1 MHz ~ 1.0GHz	24/Jul/2018	23/Jul/2019
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~ 26.5GHz	27/Mar/2019	26/Mar/2020
Spectrum Analyzer	R&S	FSV40	101407	10Hz ~ 40GHz	16/Aug/2018	15/Aug/2019
RF Cable-R03m	Jye Bao	RG142	CB019	9kHz ~ 1GHz	14/Dec/2018	13/Dec/2019
RF Cable-high	SUHNER	SUCOFLEX 104	SN805196/4+M Y39495	1 GHz ~ 18 GHz	13/Mar/2019	12/Mar/2020
Bilog Antenna & 5db Attenuator	SCHAFFNER/MTJ	CBL6112D / MTJ6102-05	2678 / 001	30MHz ~ 2GHz	07/Jul/2018	06/Jul/2019
EMI Test Receiver	R&S	ESU-26	100422	20Hz ~ 26.5GHz	25/Oct/2018	24/Oct/2019
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	15/Mar/2019	14/Mar/2020
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170339	18GHz ~ 40GHz	19/Apr/2019	18/Apr/2020
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D-1130	1GHz ~ 18GHz	26/Oct/2018	25/Oct/2019

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	DC Power Supply mode		

01/06/2019

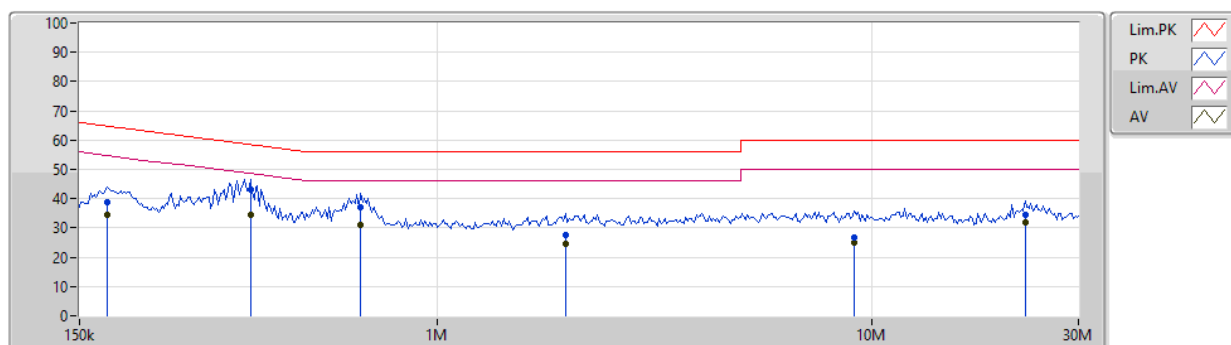


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	174.145k	38.68	64.76	-26.08	19.52	Neutral	-	19.16	9.65	0.01	9.86			
AV	174.145k	34.44	54.76	-20.32	19.52	Neutral	-	14.92	9.65	0.01	9.86			
QP	370.968k	43.27	58.49	-15.22	19.51	Neutral	-	23.76	9.64	0.01	9.86			
AV	370.968k	34.60	48.49	-13.89	19.51	Neutral	"Worst"	15.09	9.64	0.01	9.86			
QP	667.263k	36.95	56.00	-19.05	19.51	Neutral	-	17.44	9.64	0.01	9.86			
AV	667.263k	31.23	46.00	-14.77	19.51	Neutral	-	11.72	9.64	0.01	9.86			
QP	1.974M	27.53	56.00	-28.47	19.55	Neutral	-	7.98	9.65	0.03	9.87			
AV	1.974M	24.51	46.00	-21.49	19.55	Neutral	-	4.96	9.65	0.03	9.87			
QP	9.137M	26.54	60.00	-33.46	19.67	Neutral	-	6.87	9.70	0.07	9.90			
AV	9.137M	24.91	50.00	-25.09	19.67	Neutral	-	5.24	9.70	0.07	9.90			
QP	22.598M	34.54	60.00	-25.46	19.79	Neutral	-	14.75	9.70	0.12	9.97			
AV	22.598M	31.81	50.00	-18.19	19.79	Neutral	-	12.02	9.70	0.12	9.97			

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	DC Power Supply mode		

01/06/2019

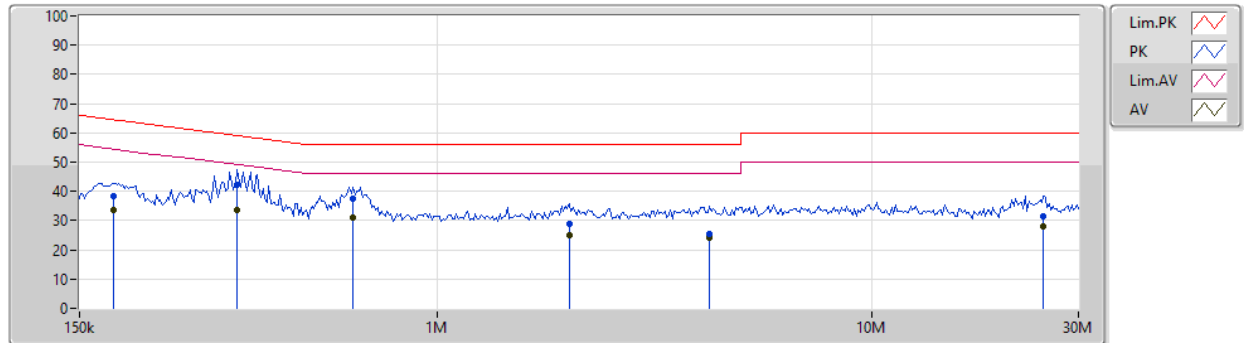

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	179.422k	38.51	64.51	-26.00	19.48	Line	-	19.03	9.61	0.01	9.86			
AV	179.422k	33.74	54.51	-20.77	19.48	Line	-	14.26	9.61	0.01	9.86			
QP	346.008k	42.05	59.06	-17.01	19.48	Line	-	22.57	9.61	0.01	9.86			
AV	346.008k	33.82	49.06	-15.24	19.48	Line	-	14.34	9.61	0.01	9.86			
QP	641.227k	37.43	56.00	-18.57	19.48	Line	-	17.95	9.61	0.01	9.86			
AV	641.227k	30.94	46.00	-15.06	19.48	Line	"Worst"	11.46	9.61	0.01	9.86			
QP	2.014M	28.69	56.00	-27.31	19.52	Line	-	9.17	9.62	0.03	9.87			
AV	2.014M	25.01	46.00	-20.99	19.52	Line	-	5.49	9.62	0.03	9.87			
QP	4.247M	25.59	56.00	-30.41	19.56	Line	-	6.03	9.63	0.05	9.88			
AV	4.247M	24.24	46.00	-21.76	19.56	Line	-	4.68	9.63	0.05	9.88			
QP	24.962M	31.43	60.00	-28.57	19.68	Line	-	11.75	9.58	0.12	9.98			
AV	24.962M	28.02	50.00	-21.98	19.68	Line	-	8.34	9.58	0.12	9.98			



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	741.25k	1.057M	1M06F1D	711.25k	1.052M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	711.25k	1.057M
2440MHz	Pass	500k	716.25k	1.052M
2480MHz	Pass	500k	741.25k	1.057M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz
EBW

30/05/2019

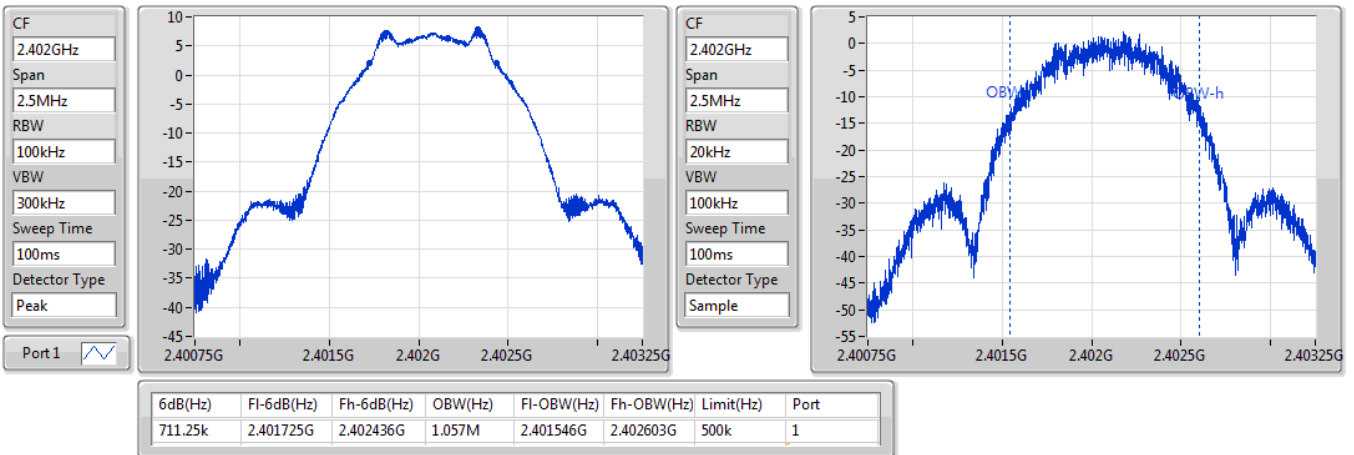
BT-LE(1Mbps)
2440MHz
EBW


30/05/2019

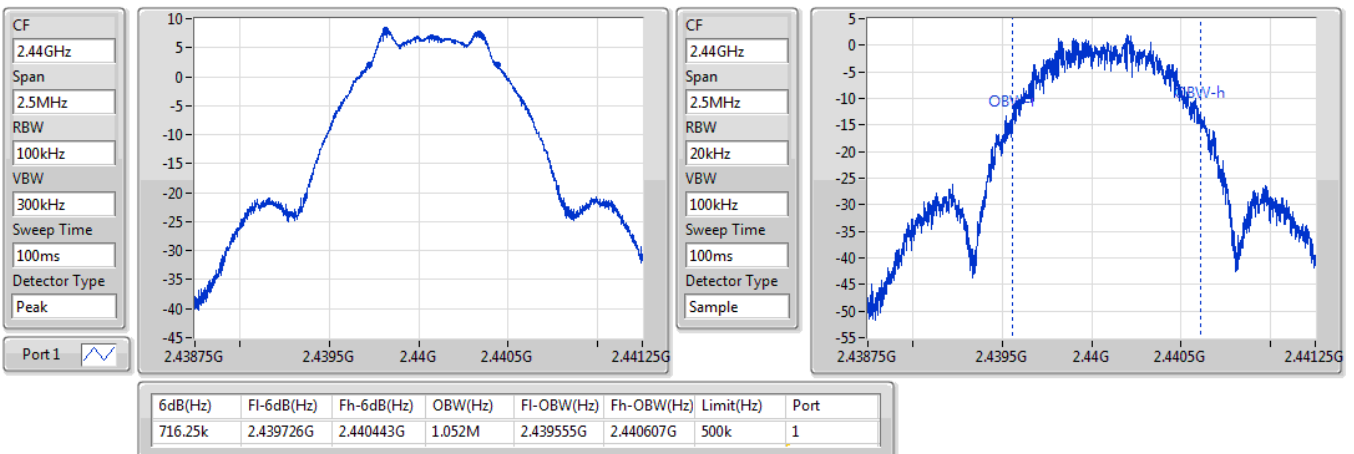

BT-LE(1Mbps)

2480MHz

30/05/2019

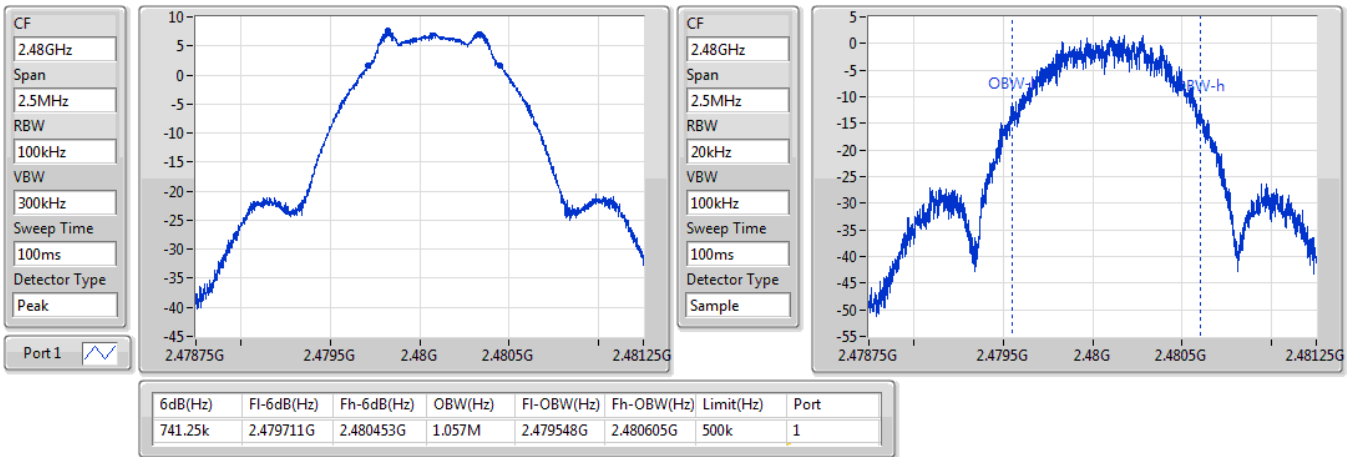



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.51	0.00710



Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.10	8.40	30.00
2440MHz	Pass	1.10	8.49	30.00
2480MHz	Pass	1.10	8.51	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.37	0.00687



Average Power-DTS

Appendix C.2

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.10	8.25	30.00
2440MHz	Pass	1.10	8.35	30.00
2480MHz	Pass	1.10	8.37	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-5.71

RBW=3 kHz.



Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.10	-7.23	8.00
2440MHz	Pass	1.10	-5.71	8.00
2480MHz	Pass	1.10	-6.64	8.00

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

BT-LE(1Mbps)

PSD

2402MHz

30/05/2019

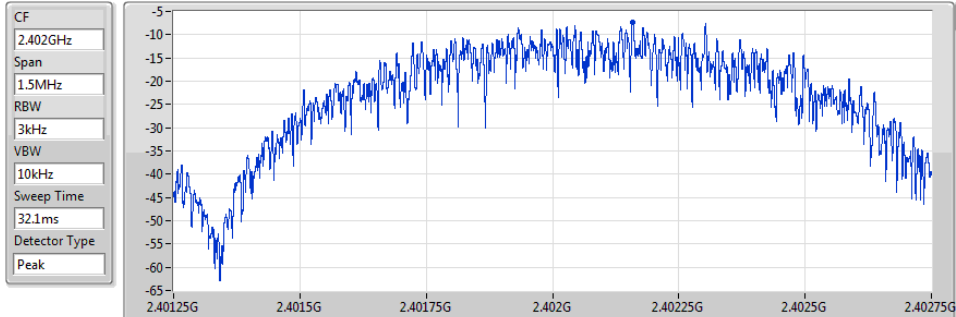


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.23	-7.23	-7.23

BT-LE(1Mbps)

PSD

2440MHz

30/05/2019

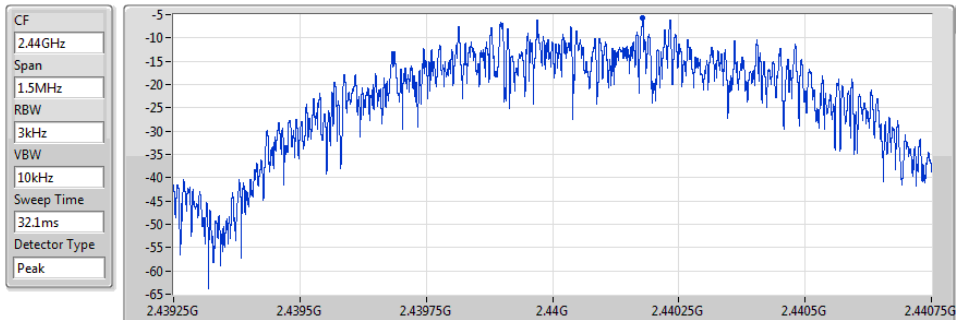


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.71	-5.71	-5.71

BT-LE(1Mbps)

PSD

2480MHz

30/05/2019

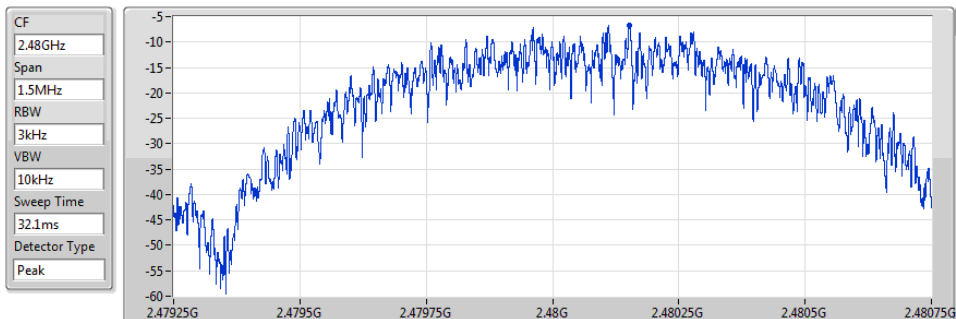

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.64	-6.64	-6.64



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.47983G	7.75	-22.25	2.398G	-57.46	2.39999G	-45.54	2.48503G	-61.46	7.2051G	-50.62	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.47983G	7.75	-22.25	2.398G	-57.46	2.39999G	-45.54	2.48503G	-61.46	7.2051G	-50.62	1
2440MHz	Pass	2.47983G	7.75	-22.25	2.39238G	-63.52	2.39952G	-60.55	2.48499G	-60.54	15.10769G	-51.19	1
2480MHz	Pass	2.47983G	7.75	-22.25	1.93594G	-63.02	2.39858G	-62.05	2.48353G	-51.70	15.10769G	-52.24	1

BT-LE(1Mbps)


2402MHz

CSE NdB

30/05/2019

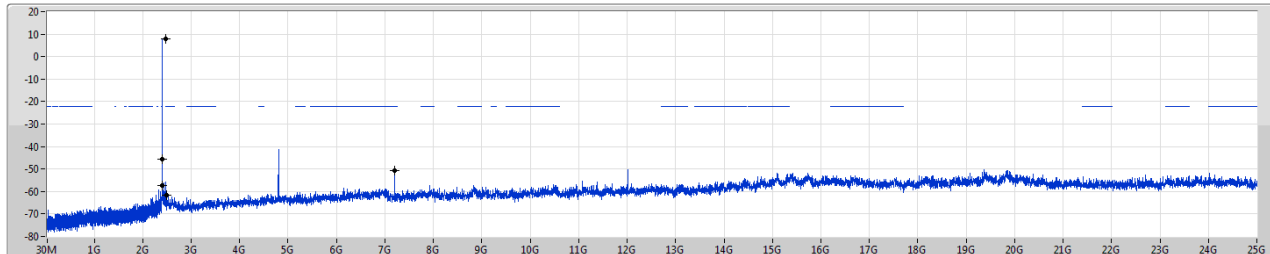

Port1

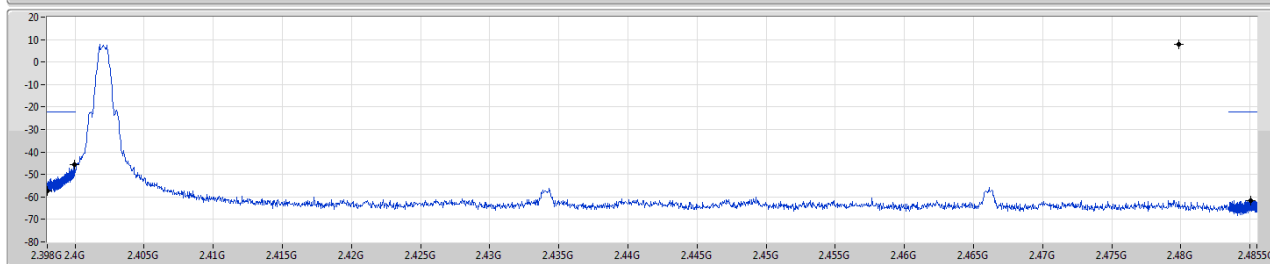

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47983G	7.75	-22.25	2.398G	-57.46	2.39999G	-45.54	2.48503G	-61.46	7.2051G	-50.62	1

BT-LE(1Mbps)


2440MHz

CSE NdB

30/05/2019

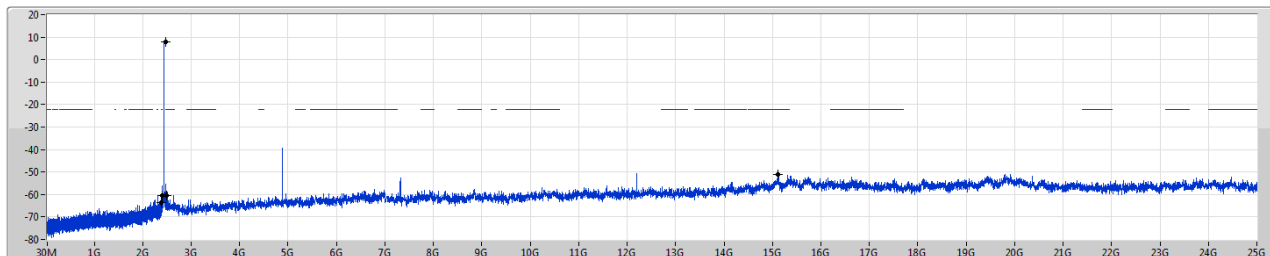

Port1

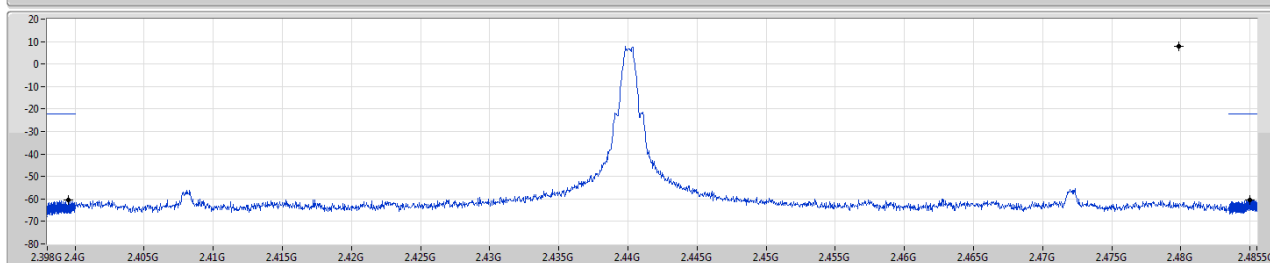

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47983G	7.75	-22.25	2.39238G	-63.52	2.39952G	-60.55	2.48499G	-60.54	15.10769G	-51.19	1



BT-LE(1Mbps)

2480MHz

CSE NdB

30/05/2019

Port1

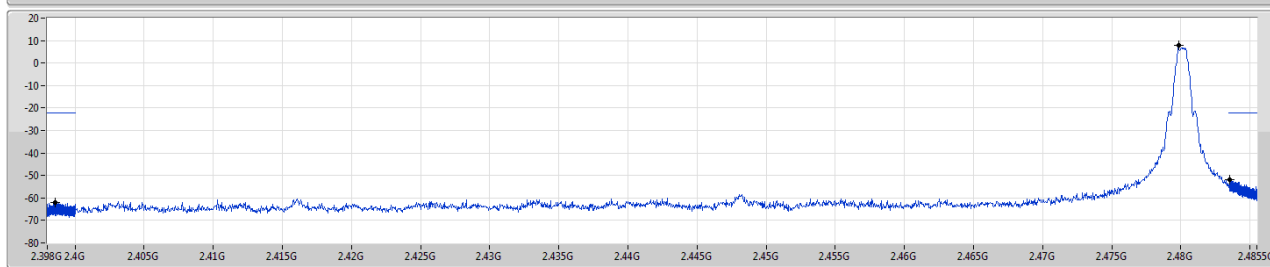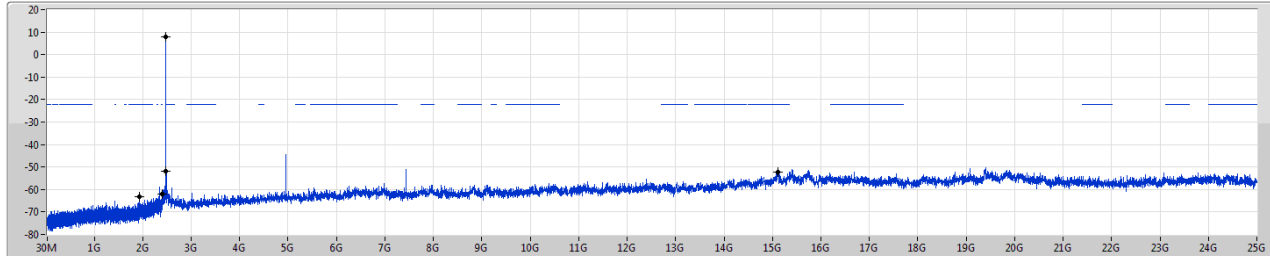

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47983G	7.75	-22.25	1.93594G	-63.02	2.39858G	-62.05	2.48353G	-51.70	15.10769G	-52.24	1



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	37.76M	29.16	40.00	-10.84	-11.96	3	Vertical	360	3.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz_DC Power Supply	Pass	PK	37.76M	29.16	40.00	-10.84	-11.96	3	Vertical	360	3.00	-
2440MHz_DC Power Supply	Pass	PK	121.18M	24.12	43.50	-19.38	-13.71	3	Vertical	360	3.00	-
2440MHz_DC Power Supply	Pass	PK	266.68M	20.27	46.00	-25.73	-11.45	3	Vertical	360	3.00	-
2440MHz_DC Power Supply	Pass	PK	348.16M	20.71	46.00	-25.29	-10.34	3	Vertical	360	3.00	-
2440MHz_DC Power Supply	Pass	PK	433.52M	22.91	46.00	-23.09	-7.49	3	Vertical	360	3.00	-
2440MHz_DC Power Supply	Pass	PK	559.62M	25.45	46.00	-20.55	-4.69	3	Vertical	360	3.00	-
2440MHz_DC Power Supply	Pass	PK	30M	22.89	40.00	-17.11	-8.16	3	Horizontal	0	3.00	-
2440MHz_DC Power Supply	Pass	PK	121.18M	19.55	43.50	-23.95	-13.71	3	Horizontal	0	3.00	-
2440MHz_DC Power Supply	Pass	PK	260.86M	20.09	46.00	-25.91	-11.15	3	Horizontal	0	3.00	-
2440MHz_DC Power Supply	Pass	PK	359.8M	20.68	46.00	-25.32	-9.85	3	Horizontal	0	3.00	-
2440MHz_DC Power Supply	Pass	PK	416.06M	22.73	46.00	-23.27	-7.73	3	Horizontal	0	3.00	-
2440MHz_DC Power Supply	Pass	PK	476.2M	24.45	46.00	-21.55	-6.49	3	Horizontal	0	3.00	-

BT-LE(1Mbps)

2440MHz_DC Power Supply

30/05/2019

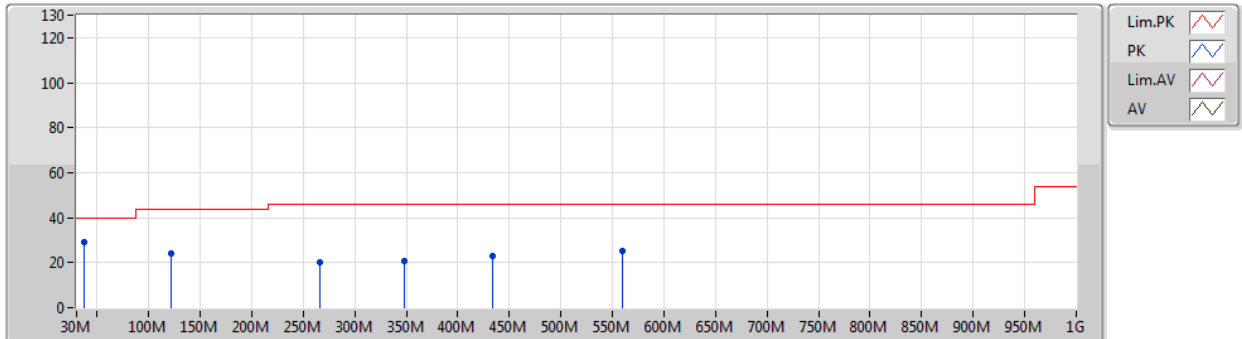


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
PK	37.76M	29.16	40.00	-10.84	-11.96	3	Vertical	360	3.00	-				
PK	121.18M	24.12	43.50	-19.38	-13.71	3	Vertical	360	3.00	-				
PK	266.68M	20.27	46.00	-25.73	-11.45	3	Vertical	360	3.00	-				
PK	348.16M	20.71	46.00	-25.29	-10.34	3	Vertical	360	3.00	-				
PK	433.52M	22.91	46.00	-23.09	-7.49	3	Vertical	360	3.00	-				
PK	559.62M	25.45	46.00	-20.55	-4.69	3	Vertical	360	3.00	-				

BT-LE(1Mbps)

2440MHz_DC Power Supply

30/05/2019

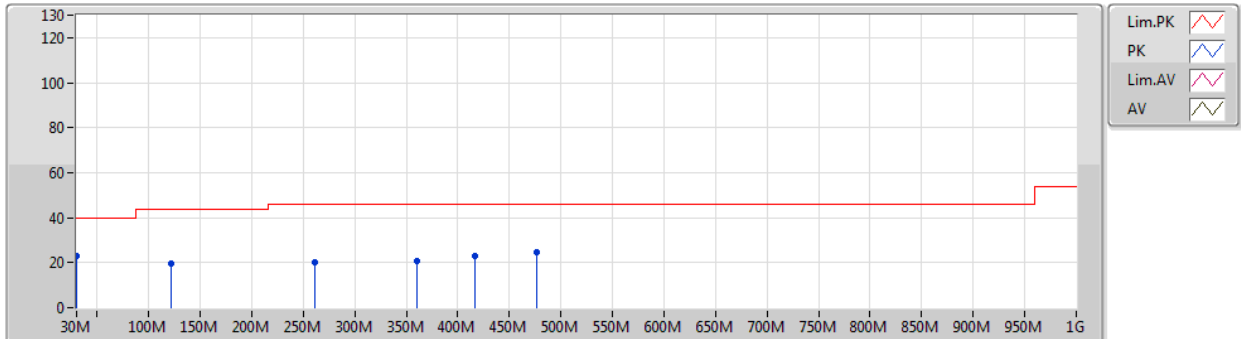

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
PK	30M	22.89	40.00	-17.11	-8.16	3	Horizontal	0	3.00	-
PK	121.18M	19.55	43.50	-23.95	-13.71	3	Horizontal	0	3.00	-
PK	260.86M	20.09	46.00	-25.91	-11.15	3	Horizontal	0	3.00	-
PK	359.8M	20.68	46.00	-25.32	-9.85	3	Horizontal	0	3.00	-
PK	416.06M	22.73	46.00	-23.27	-7.73	3	Horizontal	0	3.00	-
PK	476.2M	24.45	46.00	-21.55	-6.49	3	Horizontal	0	3.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	4.80418G	51.15	54.00	-2.85	1.62	3	Vertical	182	2.58	-

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz_TX	Pass	AV	2.3698G	45.87	54.00	-8.13	30.89	3	Vertical	226	1.19	-
2402MHz_TX	Pass	AV	2.402G	103.56	Inf	-Inf	31.00	3	Vertical	226	1.19	-
2402MHz_TX	Pass	PK	2.3564G	58.09	74.00	-15.91	30.84	3	Vertical	226	1.19	-
2402MHz_TX	Pass	PK	2.4022G	104.02	Inf	-Inf	31.00	3	Vertical	226	1.19	-
2402MHz_TX	Pass	AV	2.352G	45.59	54.00	-8.41	30.83	3	Horizontal	2	2.76	-
2402MHz_TX	Pass	AV	2.402G	96.93	Inf	-Inf	31.00	3	Horizontal	2	2.76	-
2402MHz_TX	Pass	PK	2.3876G	58.38	74.00	-15.62	30.95	3	Horizontal	2	2.76	-
2402MHz_TX	Pass	PK	2.4022G	97.41	Inf	-Inf	31.00	3	Horizontal	2	2.76	-
2402MHz_TX	Pass	AV	4.80418G	51.15	54.00	-2.85	1.62	3	Vertical	182	2.58	-
2402MHz_TX	Pass	PK	4.8046G	54.67	74.00	-19.33	1.62	3	Vertical	182	2.58	-
2402MHz_TX	Pass	AV	4.80412G	51.06	54.00	-2.94	1.62	3	Horizontal	25	2.53	-
2402MHz_TX	Pass	PK	4.80442G	54.62	74.00	-19.38	1.62	3	Horizontal	25	2.53	-
2440MHz_TX	Pass	AV	2.3756G	45.86	54.00	-8.14	30.90	3	Vertical	205	1.50	-
2440MHz_TX	Pass	AV	2.44G	102.36	Inf	-Inf	31.14	3	Vertical	205	1.50	-
2440MHz_TX	Pass	AV	2.4948G	46.39	54.00	-7.61	31.35	3	Vertical	205	1.50	-
2440MHz_TX	Pass	PK	2.3684G	57.73	74.00	-16.27	30.88	3	Vertical	205	1.50	-
2440MHz_TX	Pass	PK	2.4404G	102.82	Inf	-Inf	31.14	3	Vertical	205	1.50	-
2440MHz_TX	Pass	PK	2.4992G	58.25	74.00	-15.75	31.36	3	Vertical	205	1.50	-
2440MHz_TX	Pass	AV	2.342G	45.59	54.00	-8.41	30.79	3	Horizontal	360	2.72	-
2440MHz_TX	Pass	AV	2.44G	96.11	Inf	-Inf	31.14	3	Horizontal	360	2.72	-
2440MHz_TX	Pass	AV	2.4956G	46.39	54.00	-7.61	31.35	3	Horizontal	360	2.72	-
2440MHz_TX	Pass	PK	2.3836G	58.50	74.00	-15.50	30.93	3	Horizontal	360	2.72	-
2440MHz_TX	Pass	PK	2.44G	96.59	Inf	-Inf	31.14	3	Horizontal	360	2.72	-
2440MHz_TX	Pass	PK	2.4988G	58.17	74.00	-15.83	31.36	3	Horizontal	360	2.72	-
2440MHz_TX	Pass	AV	4.88012G	50.70	54.00	-3.30	1.81	3	Vertical	230	2.41	-
2440MHz_TX	Pass	AV	7.31988G	38.25	54.00	-15.75	7.50	3	Vertical	218	1.50	-
2440MHz_TX	Pass	PK	4.88036G	54.56	74.00	-19.44	1.81	3	Vertical	230	2.41	-
2440MHz_TX	Pass	PK	7.30572G	50.07	74.00	-23.93	7.45	3	Vertical	218	1.50	-
2440MHz_TX	Pass	AV	4.88018G	50.65	54.00	-3.35	1.81	3	Horizontal	37	2.70	-
2440MHz_TX	Pass	AV	7.3203G	41.66	54.00	-12.34	7.50	3	Horizontal	130	1.00	-
2440MHz_TX	Pass	PK	4.87982G	54.52	74.00	-19.48	1.81	3	Horizontal	37	2.70	-
2440MHz_TX	Pass	PK	7.32072G	51.95	74.00	-22.05	7.50	3	Horizontal	130	1.00	-
2480MHz_TX	Pass	AV	2.48G	103.84	Inf	-Inf	31.28	3	Vertical	220	2.20	-
2480MHz_TX	Pass	AV	2.4835G	47.72	54.00	-6.28	31.30	3	Vertical	220	2.20	-
2480MHz_TX	Pass	PK	2.48G	104.31	Inf	-Inf	31.28	3	Vertical	220	2.20	-
2480MHz_TX	Pass	PK	2.4846G	59.21	74.00	-14.79	31.31	3	Vertical	220	2.20	-
2480MHz_TX	Pass	AV	2.48G	97.17	Inf	-Inf	31.28	3	Horizontal	3	2.60	-
2480MHz_TX	Pass	AV	2.4835G	46.63	54.00	-7.37	31.30	3	Horizontal	3	2.60	-
2480MHz_TX	Pass	PK	2.48G	97.66	Inf	-Inf	31.28	3	Horizontal	3	2.60	-
2480MHz_TX	Pass	PK	2.4858G	58.79	74.00	-15.21	31.31	3	Horizontal	3	2.60	-
2480MHz_TX	Pass	AV	4.96018G	48.66	54.00	-5.34	2.02	3	Vertical	179	2.60	-
2480MHz_TX	Pass	AV	7.44048G	40.33	54.00	-13.67	7.81	3	Vertical	210	2.63	-
2480MHz_TX	Pass	PK	4.95994G	53.16	74.00	-20.84	2.02	3	Vertical	179	2.60	-
2480MHz_TX	Pass	PK	7.44018G	51.21	74.00	-22.79	7.81	3	Vertical	210	2.63	-
2480MHz_TX	Pass	AV	4.96018G	49.40	54.00	-4.60	2.02	3	Horizontal	37	2.44	-
2480MHz_TX	Pass	AV	7.44018G	43.29	54.00	-10.71	7.81	3	Horizontal	135	1.00	-
2480MHz_TX	Pass	PK	4.96042G	53.37	74.00	-20.63	2.02	3	Horizontal	37	2.44	-



RSE TX above 1GHz Result


Appendix F.2

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2480MHz_TX	Pass	PK	7.44054G	52.64	74.00	-21.36	7.81	3	Horizontal	135	1.00	-

BT-LE(1Mbps)

2402MHz_TX

30/05/2019

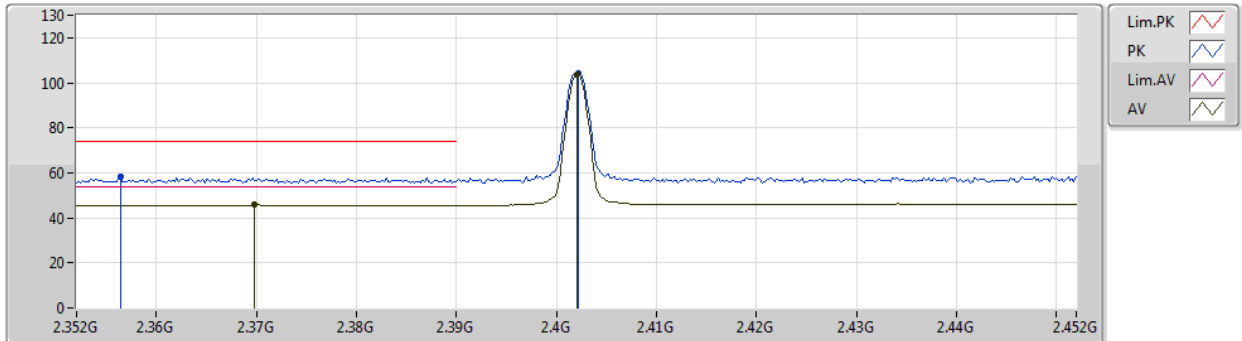


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	2.3698G	45.87	54.00	-8.13	30.89	3	Vertical	226	1.19	-				
AV	2.402G	103.56	Inf	-Inf	31.00	3	Vertical	226	1.19	-				
PK	2.3564G	58.09	74.00	-15.91	30.84	3	Vertical	226	1.19	-				
PK	2.4022G	104.02	Inf	-Inf	31.00	3	Vertical	226	1.19	-				

BT-LE(1Mbps)

2402MHz_TX

30/05/2019

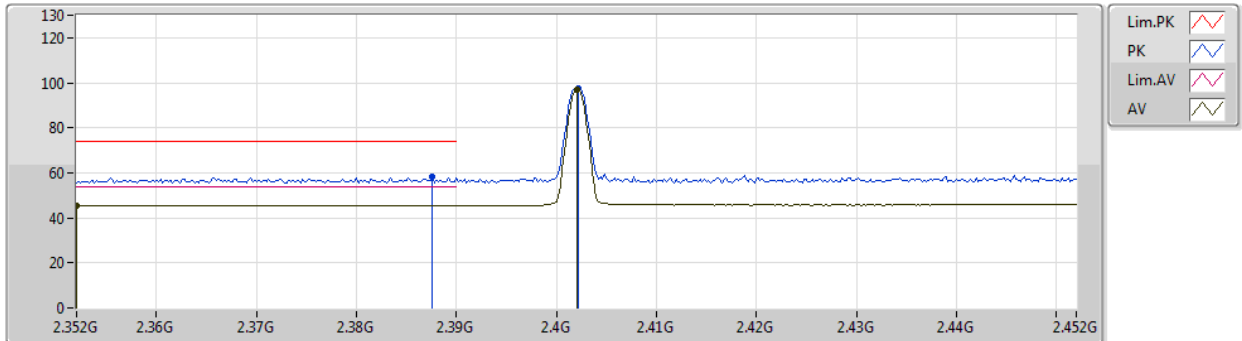


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	2.352G	45.59	54.00	-8.41	30.83	3	Horizontal	2	2.76	-				
AV	2.402G	96.93	Inf	-Inf	31.00	3	Horizontal	2	2.76	-				
PK	2.3876G	58.38	74.00	-15.62	30.95	3	Horizontal	2	2.76	-				
PK	2.4022G	97.41	Inf	-Inf	31.00	3	Horizontal	2	2.76	-				

BT-LE(1Mbps)

2402MHz_TX

30/05/2019

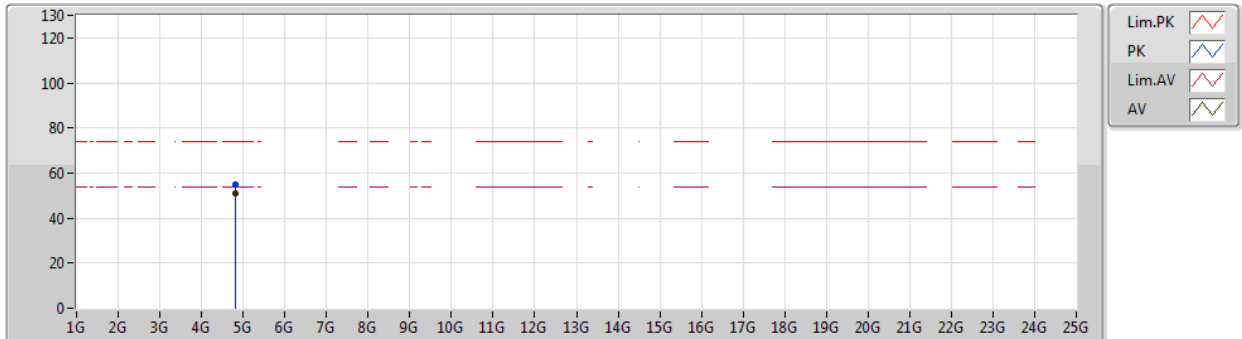


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.80418G	51.15	54.00	-2.85	1.62	3	Vertical	182	2.58	-
PK	4.8046G	54.67	74.00	-19.33	1.62	3	Vertical	182	2.58	-

BT-LE(1Mbps)

2402MHz_TX

30/05/2019

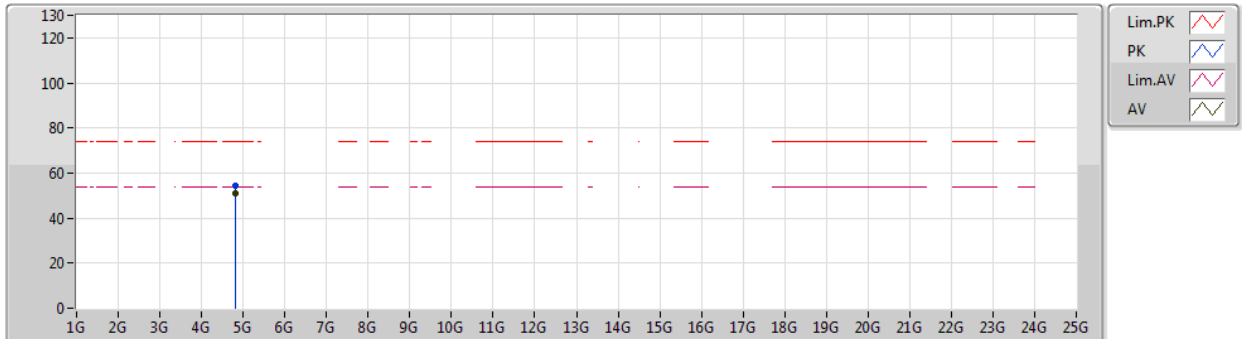


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.80412G	51.06	54.00	-2.94	1.62	3	Horizontal	25	2.53	-
PK	4.80442G	54.62	74.00	-19.38	1.62	3	Horizontal	25	2.53	-

BT-LE(1Mbps)

2440MHz_TX

30/05/2019

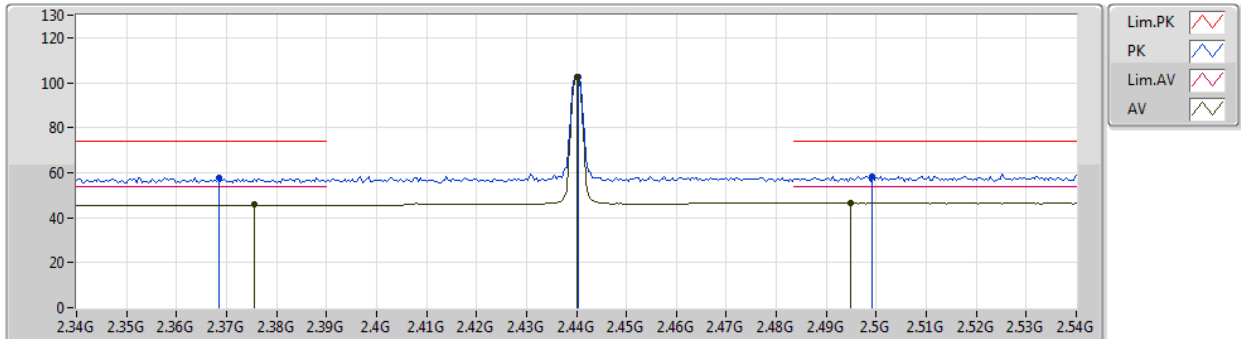


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	2.3756G	45.86	54.00	-8.14	30.90	3	Vertical	205	1.50	-				
AV	2.44G	102.36	Inf	-Inf	31.14	3	Vertical	205	1.50	-				
AV	2.4948G	46.39	54.00	-7.61	31.35	3	Vertical	205	1.50	-				
PK	2.3684G	57.73	74.00	-16.27	30.88	3	Vertical	205	1.50	-				
PK	2.4404G	102.82	Inf	-Inf	31.14	3	Vertical	205	1.50	-				
PK	2.4992G	58.25	74.00	-15.75	31.36	3	Vertical	205	1.50	-				

BT-LE(1Mbps)

2440MHz_TX

30/05/2019

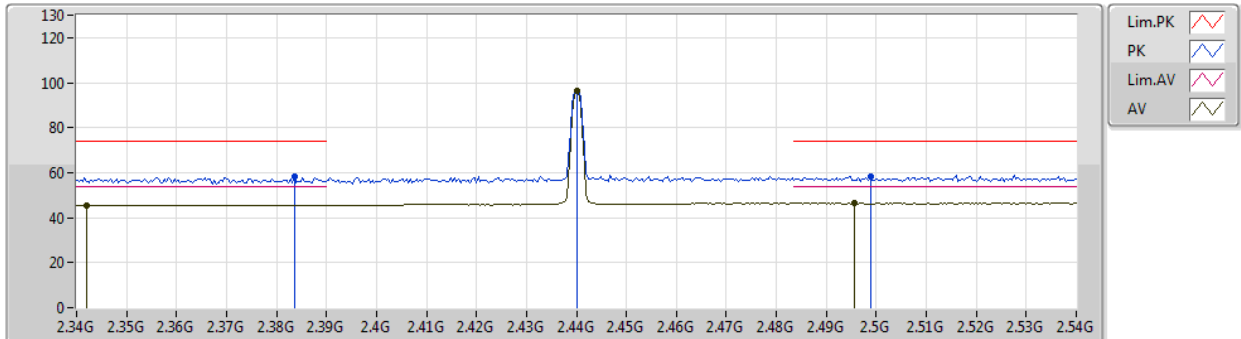


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	2.342G	45.59	54.00	-8.41	30.79	3	Horizontal	360	2.72	-				
AV	2.44G	96.11	Inf	-Inf	31.14	3	Horizontal	360	2.72	-				
AV	2.4956G	46.39	54.00	-7.61	31.35	3	Horizontal	360	2.72	-				
PK	2.3836G	58.50	74.00	-15.50	30.93	3	Horizontal	360	2.72	-				
PK	2.44G	96.59	Inf	-Inf	31.14	3	Horizontal	360	2.72	-				
PK	2.4988G	58.17	74.00	-15.83	31.36	3	Horizontal	360	2.72	-				

BT-LE(1Mbps)

2440MHz_TX

30/05/2019

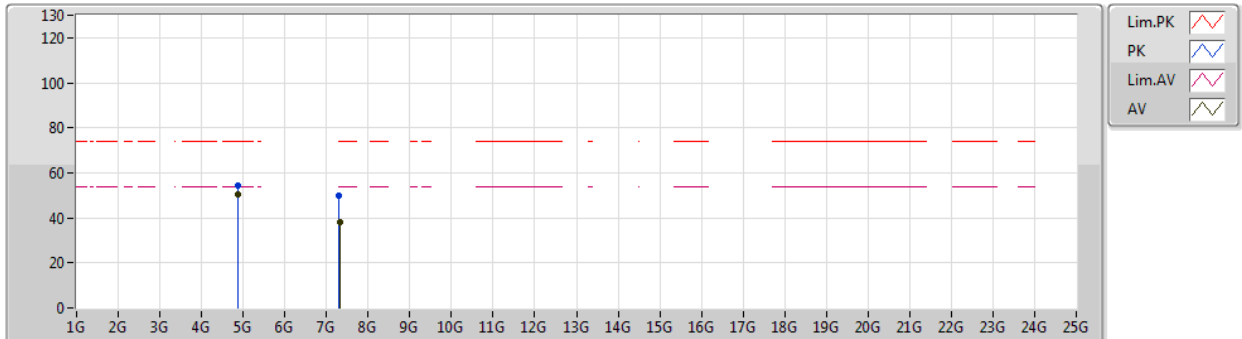


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	4.88012G	50.70	54.00	-3.30	1.81	3	Vertical	230	2.41	-				
AV	7.31988G	38.25	54.00	-15.75	7.50	3	Vertical	218	1.50	-				
PK	4.88036G	54.56	74.00	-19.44	1.81	3	Vertical	230	2.41	-				
PK	7.30572G	50.07	74.00	-23.93	7.45	3	Vertical	218	1.50	-				

BT-LE(1Mbps)

2440MHz_TX

30/05/2019

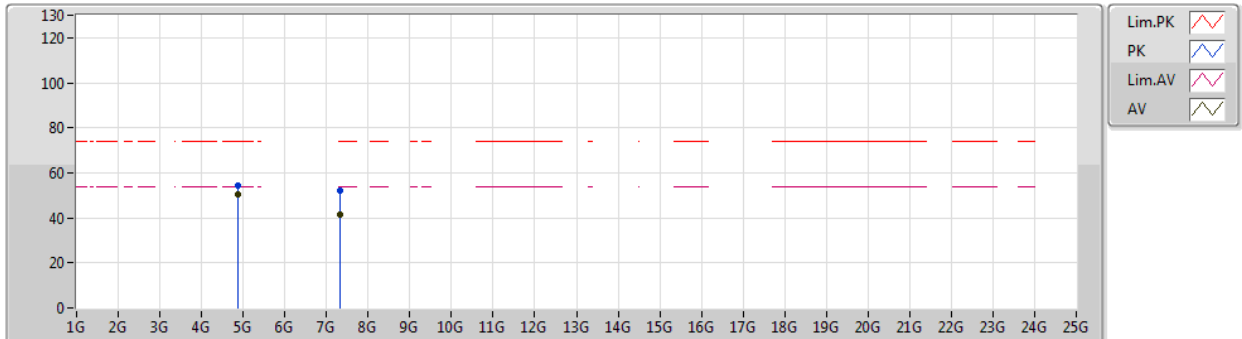


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	4.88018G	50.65	54.00	-3.35	1.81	3	Horizontal	37	2.70	-				
AV	7.3203G	41.66	54.00	-12.34	7.50	3	Horizontal	130	1.00	-				
PK	4.87982G	54.52	74.00	-19.48	1.81	3	Horizontal	37	2.70	-				
PK	7.32072G	51.95	74.00	-22.05	7.50	3	Horizontal	130	1.00	-				

BT-LE(1Mbps)

2480MHz_TX

30/05/2019

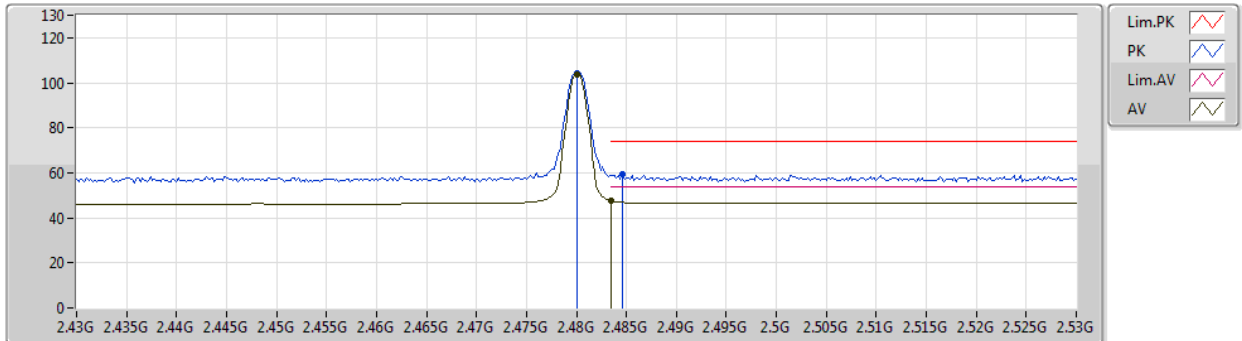


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)					
AV	2.48G	103.84	Inf	-Inf	31.28	3	Vertical	220	2.20	-				
AV	2.4835G	47.72	54.00	-6.28	31.30	3	Vertical	220	2.20	-				
PK	2.48G	104.31	Inf	-Inf	31.28	3	Vertical	220	2.20	-				
PK	2.4846G	59.21	74.00	-14.79	31.31	3	Vertical	220	2.20	-				

BT-LE(1Mbps)

2480MHz_TX

30/05/2019

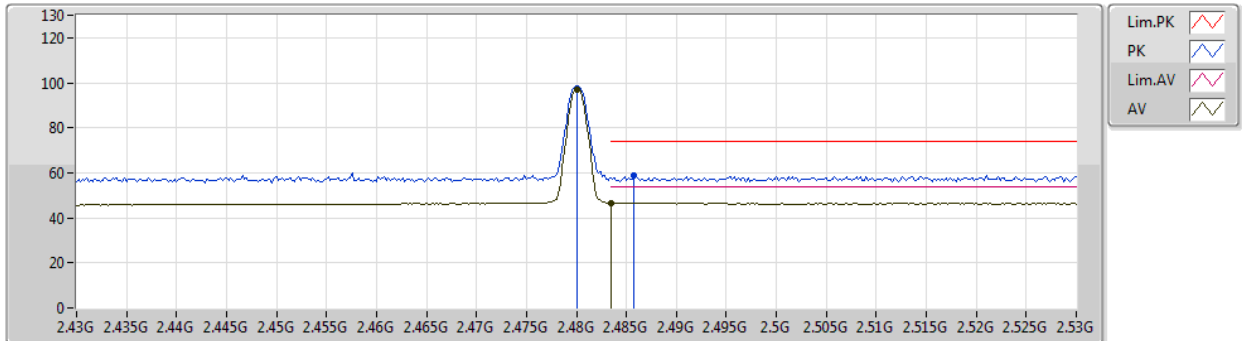


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment				
AV	2.48G	97.17	Inf	-Inf	31.28	3	Horizontal	3	2.60	-				
AV	2.4835G	46.63	54.00	-7.37	31.30	3	Horizontal	3	2.60	-				
PK	2.48G	97.66	Inf	-Inf	31.28	3	Horizontal	3	2.60	-				
PK	2.4858G	58.79	74.00	-15.21	31.31	3	Horizontal	3	2.60	-				

BT-LE(1Mbps)

2480MHz_TX

30/05/2019

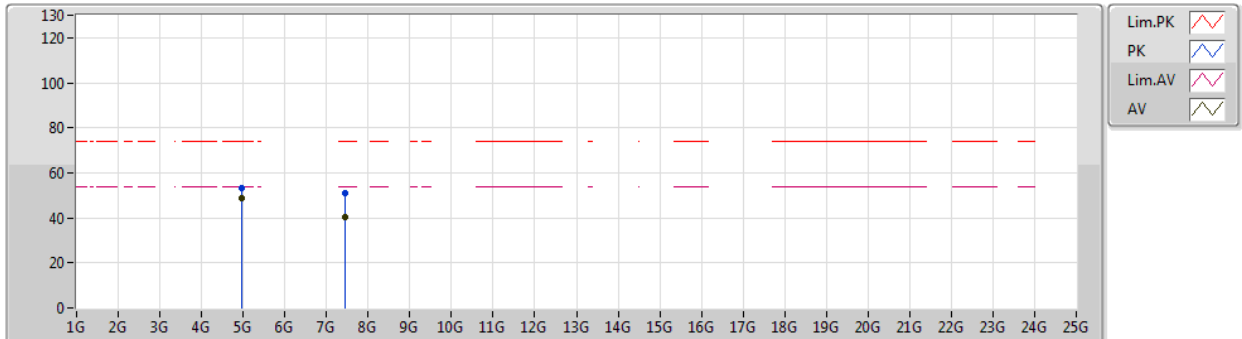


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.96018G	48.66	54.00	-5.34	2.02	3	Vertical	179	2.60	-
AV	7.44048G	40.33	54.00	-13.67	7.81	3	Vertical	210	2.63	-
PK	4.95994G	53.16	74.00	-20.84	2.02	3	Vertical	179	2.60	-
PK	7.44018G	51.21	74.00	-22.79	7.81	3	Vertical	210	2.63	-

BT-LE(1Mbps)

2480MHz_TX

30/05/2019

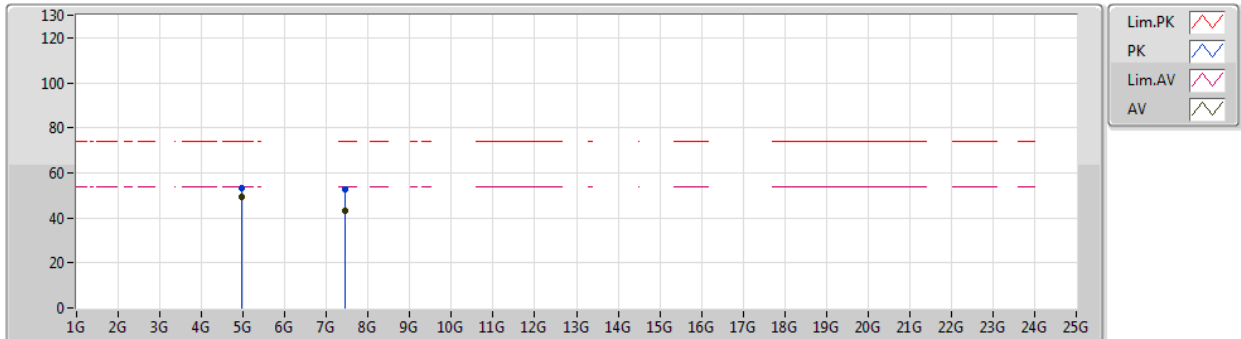

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.96018G	49.40	54.00	-4.60	2.02	3	Horizontal	37	2.44	-
AV	7.44018G	43.29	54.00	-10.71	7.81	3	Horizontal	135	1.00	-
PK	4.96042G	53.37	74.00	-20.63	2.02	3	Horizontal	37	2.44	-
PK	7.44054G	52.64	74.00	-21.36	7.81	3	Horizontal	135	1.00	-